

HomeTek Technology (Chang-An) Inc.

ADDRESS: South of Shatou Industry District, Chang-An Town,
DongGuan City, GuangDong, China

PHONE : 86-769-85303005 FAX : 86-769-85303006

E - mail : dgxuhong@changan.net

FCC TEST REPORT FOR

APPLICANT : GRIFFIN TECHNOLOGY CO.
ADDRESS : 1930 Air Lane Drive, Nashville, TN.37210 USA
EUT : iTrip Auto Universal
MODEL NO. : 7255-TRIPAUNI
FCC ID : PAV7255

Under Part 15, SUBPART B AND SUBPART C.

CLASS B

Certification

MEASUREMENT PROCEDURE USED

FCC RULES AND FCC / ANSI C63.4-2003

PREPARED BY :

HomeTek Technology (Chang-An) Inc.

South of Shatou Industry District, Chang-An Town,

DongGuan City, GuangDong, China

Report # : FBRP6059



HomeTek Technology (Chang-An) Inc.

ADDRESS: South of Shatou Industry District, Chang-An
Town, DongGuan City, GuangDong, China

PHONE : 86-769-85303005 FAX : 86-769-85303006

E - mail : dgxuhong@changan.net

CERTIFICATION

EUT : iTrip Auto Universal
 MODEL NO. : 7255-TRIPAUNI
 FCC ID : PAV7255
 Receipt Date : 07/25/2006 Final Test Date: 08/24/2006
 REPORT # : FBRP6059
 APPLICANT : GRIFFIN TECHNOLOGY CO.
 ADDRESS : 1930 Air Lane Drive, Nashville, TN.37210 USA

MEASUREMENT PROCEDURE USED :

FCC RULES AND REGULATION PART 15, SUBPART B AND SUBPART C
AND FCC / ANSI C63.4-2003

We hereby show that:

The measurement shown in this test report were made in accordance with and no deviation with the procedures indicated, and the maximum energy emitted by the equipment was found to be within the FCC limits applicable.

This test result of this report applies to above tested sample only.

This test report shall not be reproduce in part without written approval of HomeTek Technology (Chang-An) Inc.

PREPARED BY : CATHY HE DATE : 08/24/2006
Assistant

CHECK BY : GEORGE ZHOU DATE: 08/24/2006
Director

APPROVED BY : Grant Huang
GRANT HUANG / Manager





TABLE OF CONTENTS 1

GENERAL INFORMATION 2

MODIFICATION LIST 4

CONDUCTED POWER LINE TEST..... 5

 1 TEST PROCEDURE 5

 2 RESULT OF CONDUCTED EMISSION TEST 5

RADIATED EMISSION TEST 6

 1 TEST INSTRUMENTS & FACILITIES..... 6

 2 EUT OPERATING CONDITION 7

 3 TEST SETUP 8

 4 CONFIGURATION OF THE EUT 9

 5 TEST PROCEDURE 11

 6 LIMIT OF RADIATED EMISSION CLASS B 12

 7 RESULT OF RADIATED EMISSION TEST 12

 8 RADIATED EMISSION TEST DATA (PAGE 1)..... 13

 9 RADIATED EMISSION TEST DATA (PAGE 2)..... 14

 10 RADIATED EMISSION TEST DATA (PAGE 3)..... 15

 11 RADIATED EMISSION TEST DATA (PAGE 4)..... 16

 12 RADIATED EMISSION TEST DATA (PAGE 5)..... 17

 13 RADIATED EMISSION TEST DATA (PAGE 6)..... 18

PHOTO OF FCC ID LABEL 19

APPENDIX A

 PHOTOS OF TEST CONFIGURATION

APPENDIX B

 PHOTOS OF EUT

APPENDIX C

 PLOT OF OCCUPIED BANDWIDTH



GENERAL INFORMATION

- 1 APPLICANT : GRIFFIN TECHNOLOGY CO.
- 2 ADDRESS : 1930 Air Lane Drive, Nashville,TN.37210 USA
- 3 MANUFACTURER : GRIFFIN TECHNOLOGY CO.
- 4 ADDRESS : 1930 Air Lane Drive, Nashville,TN.37210 USA
- 5 DESCRIPTION OF EUT :
- EUT : iTrip Auto Universal
- FCC ID : PAV7255
- Model Number : 7255-TRIPAUNI
- Serial # : N/A

6 FEATURES OF EUT :

Dimension	:	12.5mm(h)×26mm(w)×72mm(l)
Weight	:	0.6 oz.
Built-in antenna		
Power	:	Supplied by 12 Volt cigarette lighter/power outlet (no batteries required)
Modulator	:	FM Stereo
Frequencies	:	88.0MHz-107.9MHz in 0.1MHz increments
High stability crystal, phase-lock loop control		
Frequency response	:	50Hz to 15KHz
Operating range	:	10-50 ft

7 TEST MODE :

The EUT were investigated with three operation modes shown as below :

- (1) FM 88.0MHz mode
- (2) FM 98.0MHz mode
- (3) FM107.9MHz mode

The test mode of (1) FM 98.0MHz is worst case.

And the final test data were shown in this test report.



MODIFICATION LIST

THE FOLLOWING ACCESSORIES WERE ADDED TO THE EUT DURING TESTING :

NO MODIFICATION BY HOMETEK TECHNOLOGY(Chang-An) INC.

CONDUCTED POWER LINE TEST

1 TEST PROCEDURE

According to **ANSI C63.4 – 2003**.

2 RESULT OF CONDUCTED EMISSION TEST

N/A(Conducted Power Line Test is not applicable to this EUT (Model :
7255-TRIPAUNI).

RADIATED EMISSION TEST

1 TEST INSTRUMENTS & FACILITIES

The following test Instruments was used during the radiated emission test :

Item	Instruments /facilities	Specification	Manufacturer	Model # / S/N#	Date of Cal.
1	OPEN AREA TEST SITE	<input checked="" type="checkbox"/> OATS 1			SEP/2005
2	EMI TEST RECEIVER	20Hz ~ 26.5GHz	ROHDE & SCHWARZ	845636/007	SEP/2005
3	PRE-AMPLIFIER	9KHz ~ 1300MHz	HEWLETT PACKARD	8447D 1937A02095	SEP/2005
4	BICONICAL/LOG BROADBAND ANTENNA	25MHz ~ 2GHz	ANTENNA RESEACH	LPB2520/A 1095	OCT/2005
5	Attenuation	50Ω/6dB	JYE BAO	FAT-N (M-F) 001	SEP/2005
6	Cable	10m	SUHNER	RG214/U OS3-003	SEP/2005
7	Cable	14m	BELDEN	9913 OS3-001	SEP/2005
8	EMI 32 (software)	N/A	AUDIX	19991013-0923	N/A


Note : Items 1 ~ 7 were calibrated within period of 1 year.

2 EUT OPERATING CONDITION

- 2.1 Configure the EUT according to the **ANSI C63.4 - 2003**.
- 2.2 The radiated emission in the frequency range from 30 MHz - 1000 MHz was test in a horizontal and vertical polarization at HomeTek(Chang-An) Lab's open site I.
- 2.3 The crystal frequency of the EUT is 7.6 MHz.
- 2.4 Provided by 12 Voltage cigarette lighter to EUT. Connect audio cable of EUT to audio output port of iPod player.
- 2.5 Turn on all the power of EUT and peripheral.
- 2.6 iPod player send 1KHz audio to EUT. (Apply audio signal 0.5Vrms to audio R/L of EUT).
- 2.7 The EUT was operated in its normal operating mode for the purpose of the measurements.
- 2.8 The receiving antenna polarized horizontally was varied from 1 to 4 meters and the wooden turntable was rotated through 360 degrees to obtain the highest reading on the ESMI test receiver or on the display of the spectrum analyzer. And also, each emission was to be maximized by changing the orientation of the EUT.
- 2.9 **The photos of radiated test configuration, please refer to appendix A.**


3 TEST SETUP

3.1 TEST SETUP OF OPEN SITE.

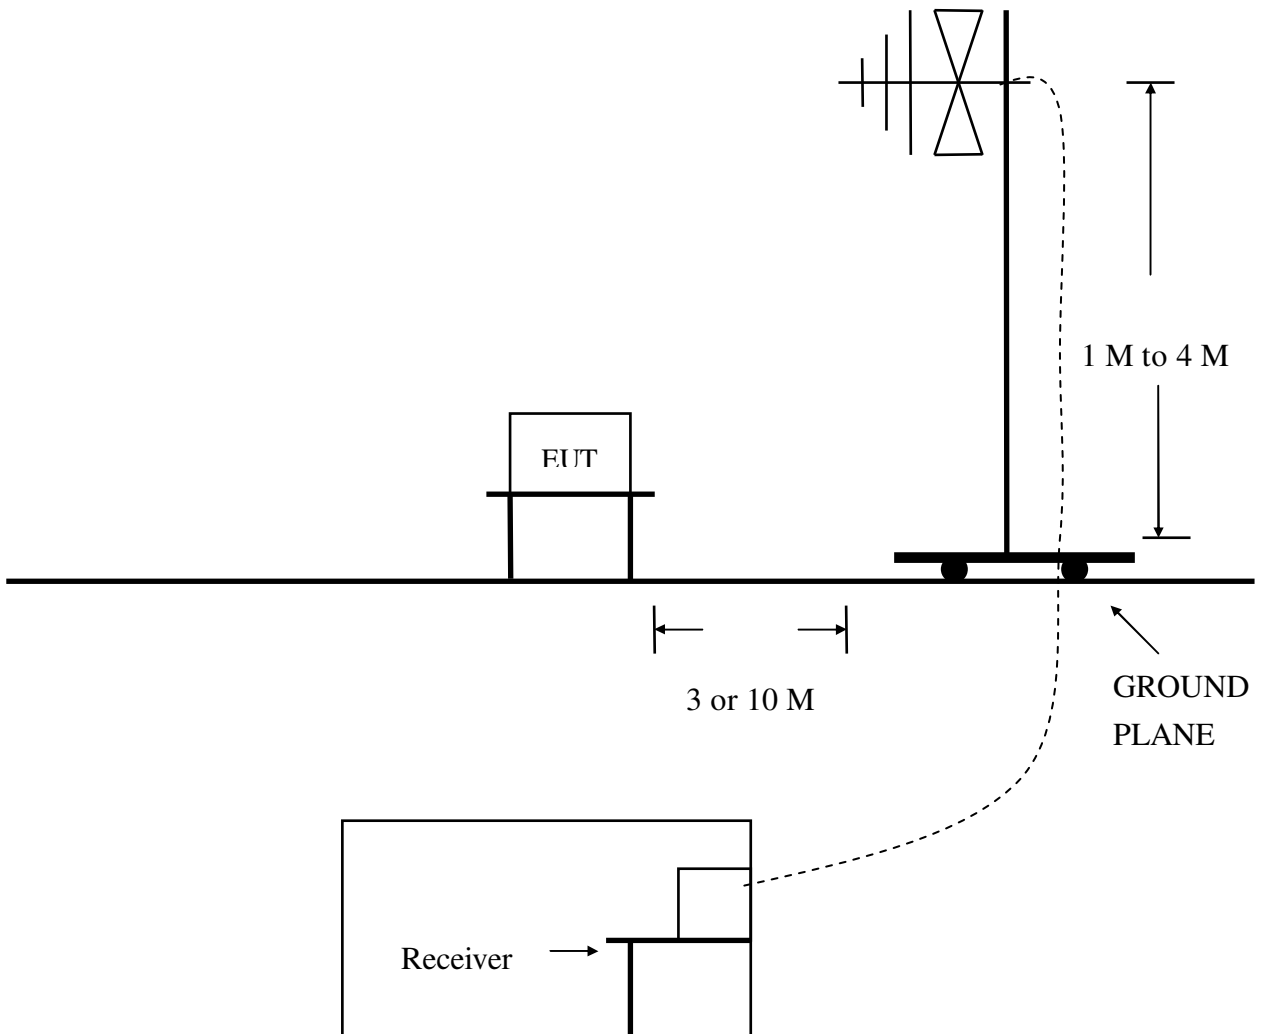

3.2 TEST SETUP OF EUT

ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9kHz TO 40 GHz ANSI C63.4-2003

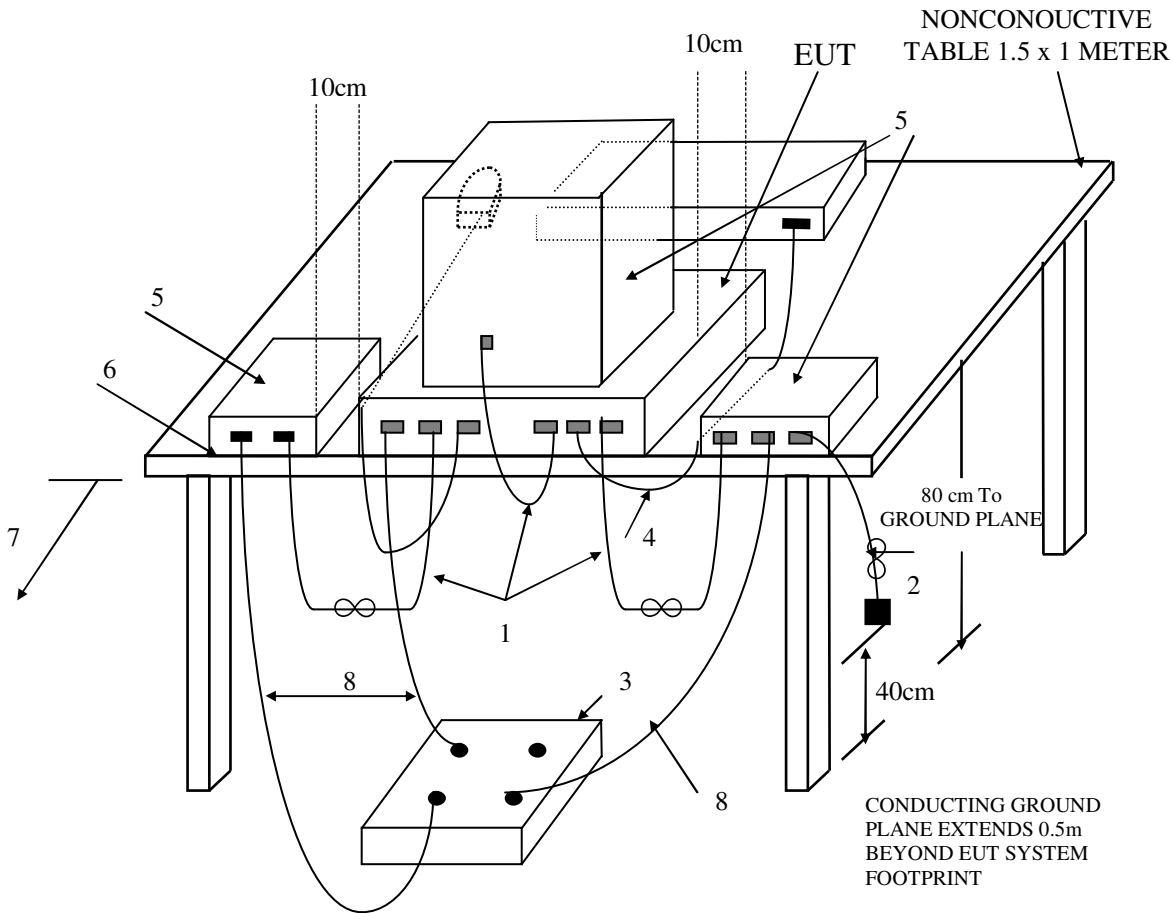

(Details for setup configuration, please refer to appendix A.)

LEGEND:

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 to 40 cm long, hanging approximately in the middle between ground plane and table.
2. I/O cables that are connected to a peripheral shall be bundled in center. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1m.
3. If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the ground plane with the receptacle flush with the ground plane.
4. Cables of hand-operated devices, such as keyboards, mice, etc., have to be placed as close as possible to the controller.
5. Non-EUT components of EUT system being tested.
6. The rear of all components of the system under test shall be located flush with the rear of the table.
7. No vertical conducting wall used.
8. Power cords drape to the floor and are routed over to receptacle.

Test Configuration
Tabletop Equipment Radiated Emission

4 CONFIGURATION OF THE EUT

The EUT was configured according to **ANSI C63.4 - 2003**. All I/O ports were connected to the appropriate peripherals. All peripherals and cables are listed below (including internal device) :

4.1 EUT

EUT Type : Proto Type Engineer Type Mass Production

Condition when received : Good Damage : _____

Device : iTrip Auto Universal

Applicant : GRIFFIN TECHNOLOGY CO.

Manufacturer : GRIFFIN TECHNOLOGY CO.

Model Number : 7255-TRIPAUNI

Serial Number : N/A

FCC ID : PAV7255

Power Cord (Output) : Un-Shielded, 0.5m

Audio Cable : Un-Shielded, 0.5m

Power Supply Type : Switching

4.2 PERIPHERALS

iPod

Manufacturer : Apple

Model Number : A1137

Serial Number : 5U547F01S2B

FCC ID : FCC DoC

Memory : 2GB

4.3 REMARK : N/A

5 TEST PROCEDURE

- 5.1 The EUT was test according to **ANSI C63.4 – 2003 & FCC Part 15.35/15.209/15.239.**
- 5.2 The radiated test was performed at HomeTek(Chang-An) Lab's Open Site I.
- 5.3 This site is on file with the FCC laboratory division, test firm registration number: 140723, expiration Date : 2004/09/29.
- 5.4 For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies. The signal of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
- 5.5 For emission frequencies measured below and above 1 GHz, set the spectrum analyzer or a 100KHz and 1MHz resolution bandwidth respectively for each frequency measured in item 5.4.
- 5.6 The receiving antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Move the antenna to a position where the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
- 5.7 Repeat item 5.6 until all frequencies need to be measured were completed.
- 5.8 Repeat item 5.7 with search antenna in vertical polarized orientations.
- 5.9 Check seven frequencies of highest emission with varying the placement of cables (if any) associated with EUT to obtain the worst case and record the result.
- 5.10 The frequency range from 30 MHz to 1 GHz were investigated, the measurement were made at 3 meters, with a BI-log antenna.

6 LIMIT OF RADIATED EMISSION CLASS B

Frequency (MHz)	Measurement Distance	dBuV/m	uV/m
Fundamental frequency	3 (M)	48	250
30 - 88	3 (M)	40	100
88 - 216	3 (M)	43.5	150
216 - 960	3 (M)	46	200
Above 960	3 (M)	54	500

6.1 The tighter limit shall apply at the edge between two frequency bands.

6.2 Measurement distance in meters between the measuring instrument antenna and the closed point of any part of the EUT or peripherals.

7 RESULT OF RADIATED EMISSION TEST

7.1 The frequency range from 30 MHz to 1 GHz was investigated.

7.2 All readings below or equal 1 GHz are quasi-peak or peak values with resolution bandwidth of 120 KHz. The reading of fundamental frequency is peak or average values. With resolution bandwidth of 120KHz.

7.3 The measurements were made at 3 meters of HomeTek(Chang-An) Lab's open site I.

7.4 Temperature : 19.7 °C, Humidity : 23 % RH.

7.5 Deviation form the test standards and rules : None

7.6 The radiation emission result were gained by the following method :

Level = Reading Level + Probe Factor (Antenna Factor) + Cable Loss – Preamp Factor

Over Limit = Level – Limit Line

7.7 The radiated mission test was passed at minimum margin :

Horizontal 98.057 MHz/ 42.70 dBuV/m, Antenna Height 2.9 Meter,
Turn Table 55 degree, The Model : 7255-TRIPAUNI.

7.8 Result : **PASSED**



8 RADIATED EMISSION TEST DATA (PAGE 1)




HomeTek Technology Inc

Tel:02-22608375 Fax:02-22748013

Data#: 13 File#: RP6059.EMI

Date: 7-25,2006 Time: 16:13:26

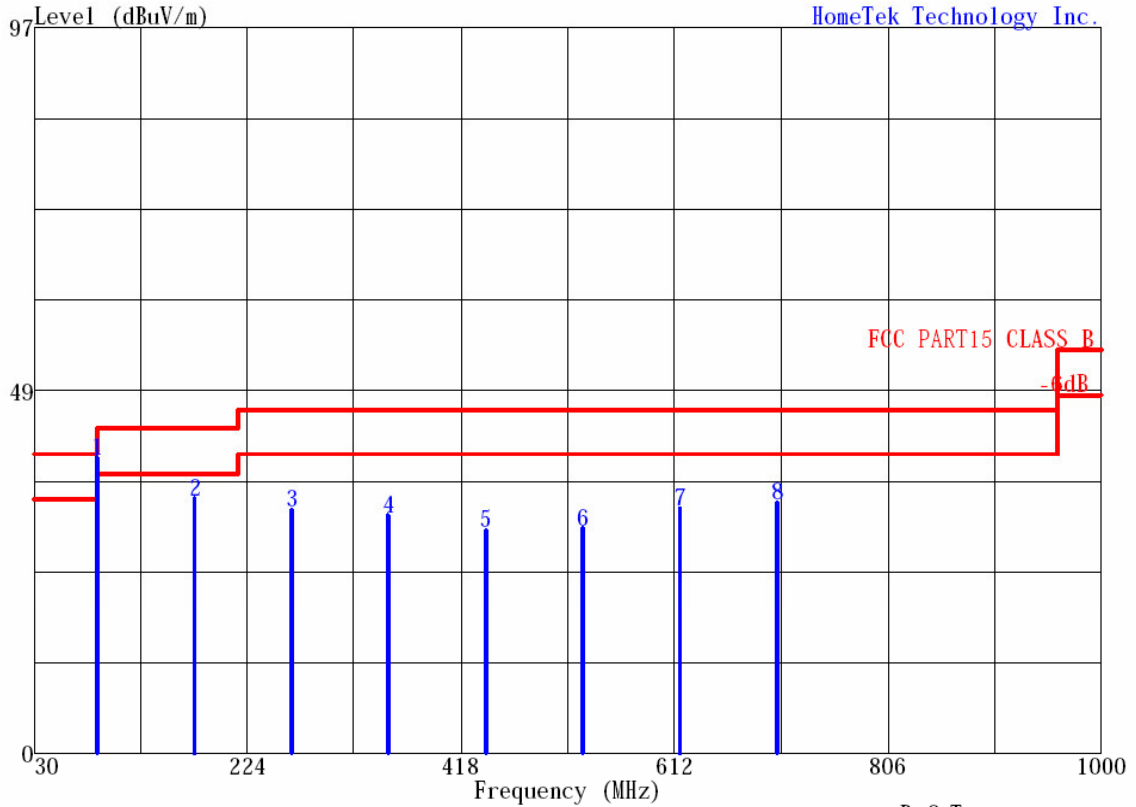

Hometek
 Trace :
 Limit : FCC PART15 CLASS B 3m
 Probe : LPB-250/A-031028_3 HORIZONTAL
 Margin: -6.0dB
 EUT : 7255-TRIPAUNI
 Power : DC12V
 Memo : 88MHz
 :
 :

Ref Trace:


Page: 1

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark
	MHz	dB	Limit	Line	Level	Factor	Loss	Factor	
			dB	dB	dB	dB	dB	dB	
1	88.081	39.57	-8.43	48.00	53.85	10.96	2.58	27.83	Peak
2	176.170	34.15	-9.35	43.50	46.85	11.61	3.11	27.43	QP
3	264.450	32.65	-13.35	46.00	40.70	13.90	5.22	27.17	Peak
4	352.160	31.87	-14.13	46.00	38.75	15.92	4.61	27.41	Peak
5	440.750	29.89	-16.11	46.00	34.72	17.54	5.53	27.90	Peak
6	528.760	30.23	-15.77	46.00	32.12	18.97	7.40	28.26	Peak
7	617.050	32.81	-13.19	46.00	32.96	20.08	8.19	28.42	Peak
8	705.400	33.52	-12.48	46.00	31.60	21.65	8.75	28.49	Peak

9 RADIATED EMISSION TEST DATA (PAGE 2)

Data#: 14 File#: RP6059.EMI

Date: 7-25,2006 Time: 16:47:33

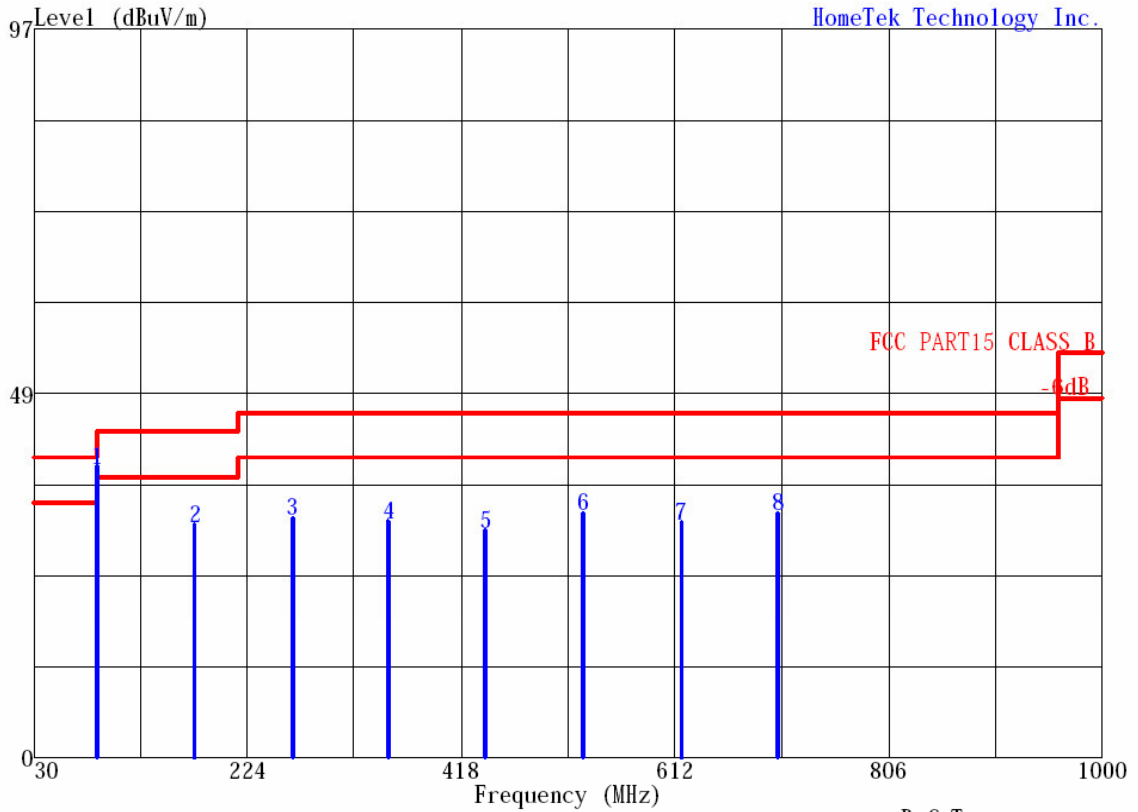

Hometek
 Trace :
 Limit : FCC PART15 CLASS B 3m
 Probe : LPB-250/A-031028_3 VERTICAL
 Margin: -6.0dB
 EUT : 7255-TRIPAUNI
 Power : DC12V
 Memo : 88MHz
 :
 :

Ref Trace:

Page: 1

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark
	MHz	dB	Limit	Line	Level	Factor	Loss	Factor	
			dB	dB	dB	dB	dB	dB	
1	87.988	38.90	-9.10	48.00	53.18	10.96	2.58	27.83	Peak
2	176.420	31.06	-12.44	43.50	43.76	11.61	3.11	27.43	QP
3	264.950	31.98	-14.02	46.00	40.04	13.90	5.21	27.17	Peak
4	352.160	31.55	-14.45	46.00	38.43	15.92	4.61	27.41	Peak
5	440.510	30.27	-15.73	46.00	35.10	17.54	5.53	27.90	Peak
6	528.640	32.59	-13.41	46.00	34.48	18.97	7.40	28.26	Peak
7	617.590	31.46	-14.54	46.00	31.61	20.08	8.19	28.42	Peak
8	705.800	32.69	-13.31	46.00	30.77	21.65	8.75	28.49	Peak

10 RADIATED EMISSION TEST DATA (PAGE 3)




HomeTek Technology Inc

Tel:02-22608375 Fax:02-22748013

Data#: 15 File#: RP6059.EMI

Date: 7-25,2006 Time: 17:20:12

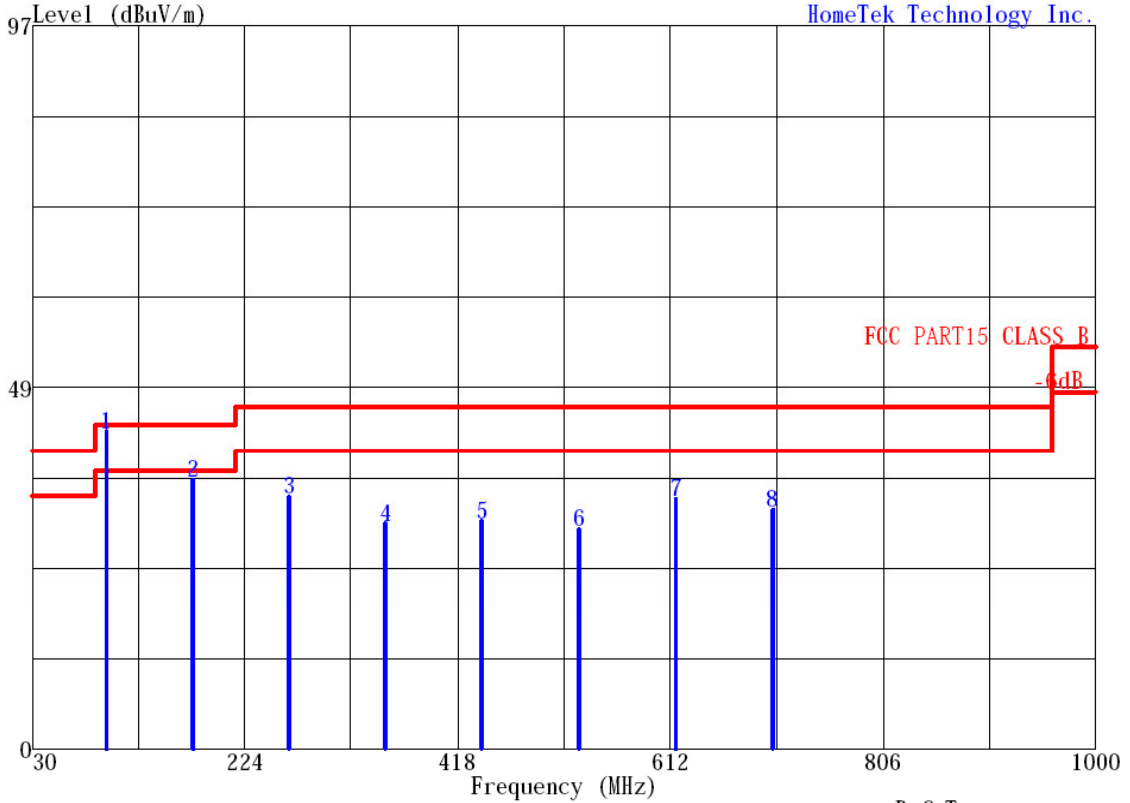

Hometek
 Trace :
 Limit : FCC PART15 CLASS B 3m
 Probe : LPB-250/A-031028_3 HORIZONTAL
 Margin: -6.0dB
 EUT : 7255-TRIPAUNI
 Power : DC12V
 Memo : 98MHz
 :
 :

Ref Trace:

Page: 1

Peak	Freq MHz	Level dB	Over Limit dB	Limit Line dB	Read Level dB	Probe Factor dB	Cable Loss dB	Preamp Factor dB	Remark
1	98.057	42.70	-5.30	48.00	56.21	11.64	2.65	27.81	Peak
2	176.590	36.26	-7.24	43.50	49.00	11.61	3.07	27.42	QP
3	264.580	33.90	-12.10	46.00	41.95	13.90	5.22	27.17	Peak
4	352.010	30.33	-15.67	46.00	37.22	15.92	4.59	27.40	Peak
5	440.168	30.66	-15.34	46.00	35.54	17.54	5.47	27.90	Peak
6	528.956	29.57	-16.43	46.00	31.46	18.97	7.40	28.26	Peak
7	617.056	33.53	-12.47	46.00	33.68	20.08	8.19	28.42	Peak
8	705.268	32.12	-13.88	46.00	30.20	21.65	8.75	28.49	Peak



11 RADIATED EMISSION TEST DATA (PAGE 4)




HomeTek Technology Inc

Tel:02-22608375 Fax:02-22748013

Data#: 16 File#: RP6059.EMI

Date: 7-25,2006 Time: 17:52:19

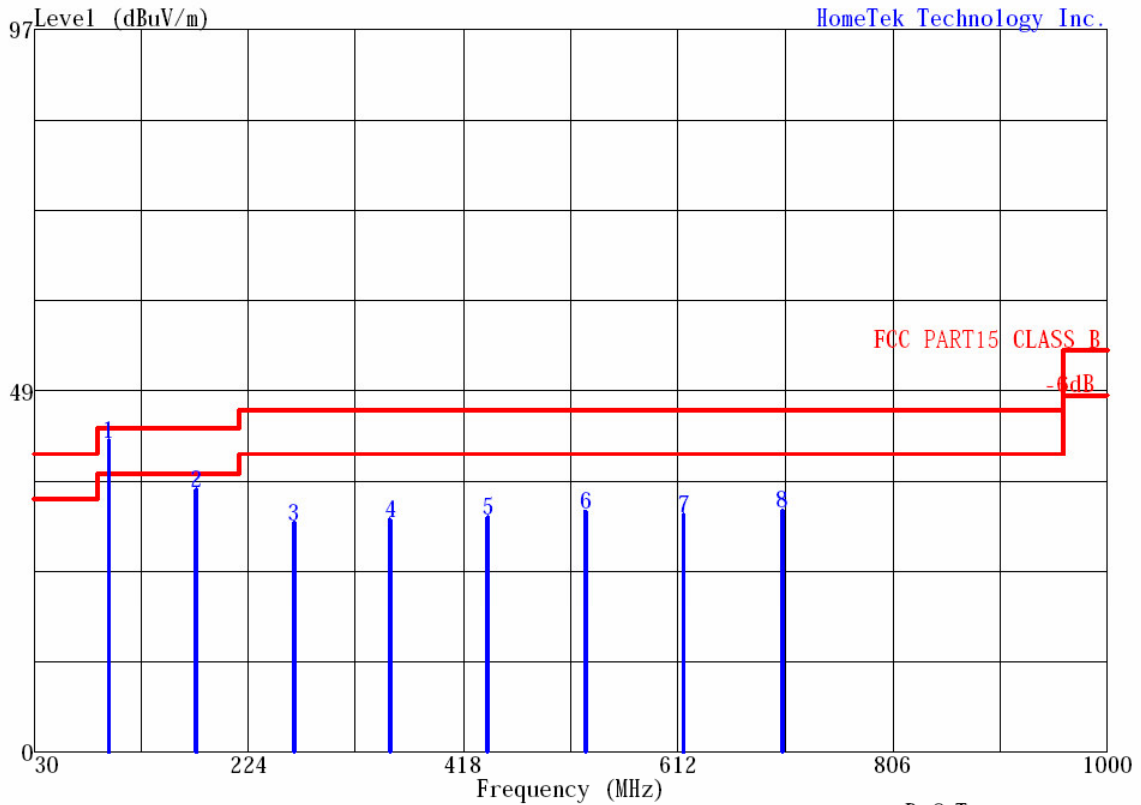

Hometek
 Trace :
 Limit : FCC PART15 CLASS B 3m
 Probe : LPB-250/A-031028_3 VERTICAL
 Margin: -6.0dB
 EUT : 7255-TRIPAUNI
 Power : DC12V
 Memo : 98MHz
 :
 :

Ref Trace:

Page: 1

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark
	MHz	dB	Limit	Line	Level	Factor	Loss	Factor	
			dB	dB	dB	dB	dB	dB	
1	97.996	41.93	-6.07	48.00	55.44	11.64	2.65	27.81	Peak
2	176.598	35.26	-8.24	43.50	48.00	11.61	3.07	27.42	QP
3	264.956	30.76	-15.24	46.00	38.82	13.90	5.21	27.17	Peak
4	352.164	31.26	-14.74	46.00	38.14	15.92	4.61	27.41	Peak
5	440.196	31.57	-14.43	46.00	36.45	17.54	5.47	27.90	Peak
6	528.659	32.28	-13.72	46.00	34.17	18.97	7.40	28.26	Peak
7	617.298	31.86	-14.14	46.00	32.01	20.08	8.19	28.42	Peak
8	705.913	32.48	-13.52	46.00	30.56	21.65	8.75	28.49	Peak



12 RADIATED EMISSION TEST DATA (PAGE 5)




HomeTek Technology Inc

Tel:02-22608375 Fax:02-22748013

Data#: 17 File#: RP6059.EMI

Date: 7-25,2006 Time: 19:10:47

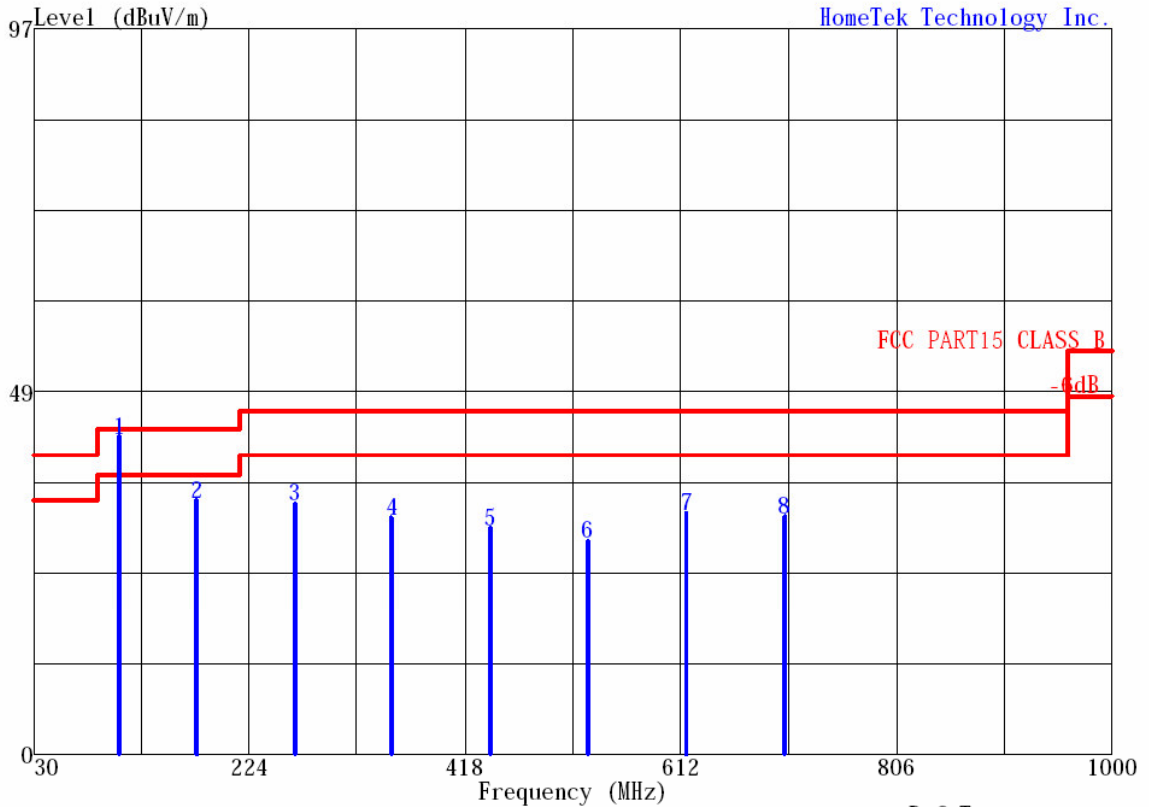

Hometek
 Trace :
 Limit : FCC PART15 CLASS B 3m
 Probe : LPB-250/A-031028_3 HORIZONTAL
 Margin: -6.0dB
 EUT : 7255-TRIPAUNI
 Power : DC12V
 Memo : 107.9MHz
 :
 :

Ref Trace:

Page: 1

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark
	MHz	dB	Limit	Line	Level	Factor	Loss	Factor	
			dB	dB	dB	dB	dB	dB	
1	107.925	42.48	-5.52	48.00	56.06	11.56	2.62	27.76	Peak
2	176.598	34.02	-9.48	43.50	46.76	11.61	3.07	27.42	QP
3	264.953	33.58	-12.42	46.00	41.64	13.90	5.21	27.17	Peak
4	352.194	31.78	-14.22	46.00	38.66	15.92	4.61	27.41	Peak
5	440.856	30.36	-15.64	46.00	35.19	17.54	5.53	27.90	Peak
6	528.196	28.57	-17.43	46.00	30.45	18.97	7.40	28.25	Peak
7	617.156	32.37	-13.63	46.00	32.52	20.08	8.19	28.42	Peak
8	705.164	31.88	-14.12	46.00	29.96	21.65	8.75	28.49	Peak



13 RADIATED EMISSION TEST DATA (PAGE 6)




HomeTek Technology Inc

Tel:02-22608375 Fax:02-22748013

Data#: 18 File#: RP6059.EMI

Date: 7-25,2006 Time: 19:45:56

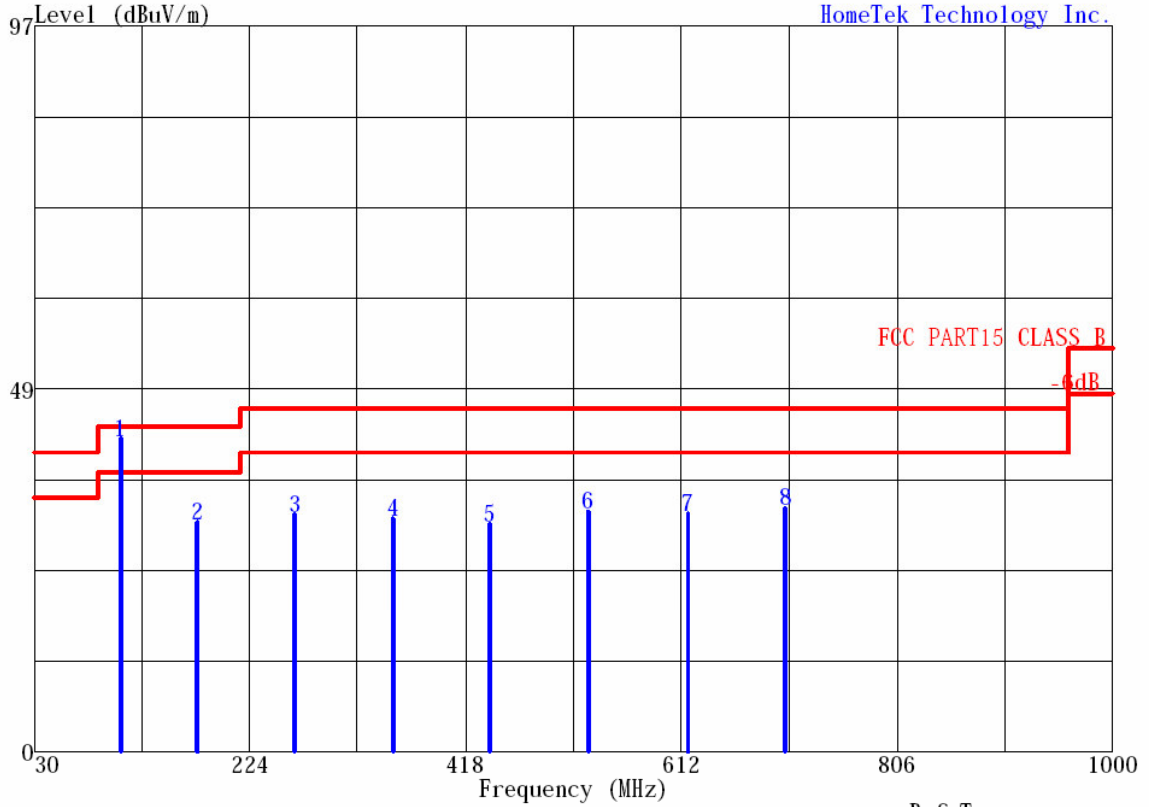

Hometek
 Trace :
 Limit : FCC PART15 CLASS B 3m
 Probe : LPB-250/A-031028_3 VERTICAL
 Margin: -6.0dB
 EUT : 7255-TRIPAUNI
 Power : DC12V
 Memo : 107.9MHz
 :
 :


Ref Trace:

Page: 1

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	
	MHz	dB	Limit	Line	Level	Factor	Loss	Factor	Remark
			dB	dB	dB	dB	dB	dB	
1	107.982	41.96	-6.04	48.00	55.54	11.56	2.62	27.76	Peak
2	176.593	30.87	-12.63	43.50	43.61	11.61	3.07	27.42	QP
3	264.591	31.78	-14.22	46.00	39.83	13.90	5.22	27.17	Peak
4	352.951	31.26	-14.74	46.00	38.14	15.92	4.61	27.41	Peak
5	440.122	30.42	-15.58	46.00	35.30	17.54	5.47	27.90	Peak
6	528.149	32.14	-13.86	46.00	34.02	18.97	7.40	28.25	Peak
7	617.895	31.83	-14.17	46.00	31.83	20.08	8.33	28.42	Peak
8	705.581	32.70	-13.30	46.00	30.78	21.65	8.75	28.49	Peak

PHOTO OF FCC ID LABEL

SAMPLE OF FCC ID LABEL :

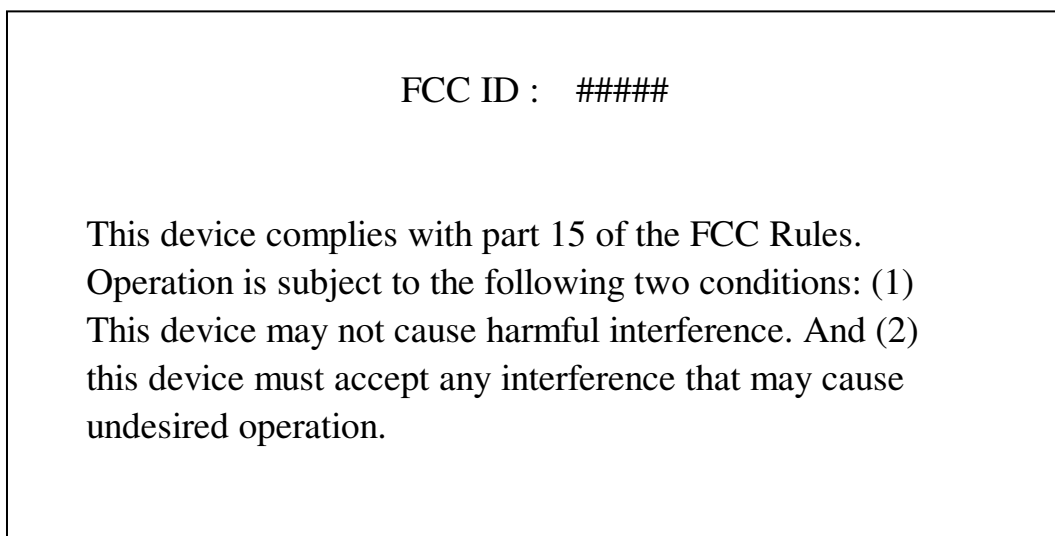

Please refer to appendix B photo of ID location.