



FCC/IC Test Report

FOR:

**Pacific Industrial CO., LTD
PMV-CA14**

FCC ID: PAXPMVCA14

IC ID: 3729A-PMVCA14

47 CFR Part 15.231

IC RSS-210 Issue 8

TEST REPORT #: EMC_CET10_203_14001_FCC15.231

DATE: 2014-09-18



**FCC listed
A2LA Accredited**

**IC recognized #
3462B**

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: +1 (408) 586 6200 ♦ Fax: +1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

TABLE OF CONTENTS

1 Assessment 4

2 Administrative Data..... 5

2.1 Identification of the Testing Laboratory Issuing the Test Report5

2.2 Identification of the Client5

2.3 Identification of the Manufacturer5

3 Equipment under Test (EUT) 6

3.1 Specification of the Equipment under Test6

3.2 Identification of the Equipment Under Test (EUT)6

3.3 Identification of Accessory Test Equipment.....6

4 Subject of Investigation 7

4.1 Modes of Operation7

4.2 Testing Notes7

4.3 Timing Diagrams of different transmission modes:.....8

5 Summary of Measurement Results 9

6 Measurements..... 10

6.1 Radiated Measurement Procedure.....10

6.2 Conducted Measurement Procedure12

6.3 Sample Calculations for Radiated Measurements.....13

6.3.1 *Field Strength Measurements:*.....13

6.3.2 *Power Measurements using Substitution Procedure:*.....13

6.4 Transmitter Duty Cycle.....14

6.4.1 *Reference:*.....14

6.4.2 *Test Conditions:*.....14

6.4.3 *Test Data:*15

6.4.4 *Measurement Result:*.....15

6.5 Transmitter Duration.....16

6.5.1 *Limits*16

6.5.2 *Results:*.....16

6.6 Transmitter Fundamental Field Strength17

6.6.1 *Limits:*.....17

6.6.2 *Test Conditions:*.....18

6.6.3 *Test Data:*18

6.6.4 *Measurement Result:*.....18

6.7 Transmitter 20dB Bandwidth.....19

6.7.1 *Limits:*19

6.7.2	Test Conditions:	19
6.7.3	Test Data:	19
6.7.4	Measurement Result.....	19
6.8	Transmitter Spurious Emissions- Radiated	20
6.8.1	References:	20
6.8.2	Measurement requirements:	20
6.8.3	Limits:	20
6.8.4	Measurement Settings:.....	20
6.8.5	Measurement Result.....	20
6.8.6	Test data/ plots:	21
6.9	Receiver Spurious Emissions- Radiated	24
6.9.1	Limits:	24
6.9.2	Test Result:	24
7	Test Equipment and Ancillaries used for tests.....	25
8	Test Setup Info:	26
9	Revision History	27

1 Assessment

The following device was tested against the applicable criteria specified in FCC rules Parts 15.231 of Title 47 of the Code of Federal Regulations and Industry Canada Standards RSS 210 Issue 8. No deviations were ascertained during the course of the tests performed.

Company	Description	Model #
Pacific Industrial Co., Ltd	Tire Pressure Monitoring System Transmitter	PMV-CA14

Responsible for Testing Laboratory:

Franz Engert

2014-09-18 Compliance (Manager of Compliance)

Date	Section	Name	Signature
------	---------	------	-----------

Responsible for the Report:

Josie Sabado

2014-09-18 Compliance (Test Lab Manager)

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data**2.1 Identification of the Testing Laboratory Issuing the Test Report**

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Acting Test Lab Manager:	Franz Engert
Responsible Project Manager:	Yadvinder Garcha

2.2 Identification of the Client

Applicant's Name:	Pacific Industrial Co., Ltd
Street Address:	Godo-Cho, Anpachi
City/Zip Code	Gifu/ 503-2397
Country	Japan
Contact Person:	Kunitaka Yano
Phone No.	+81-(0)584-28-0167
Fax:	+81-(0)584-28-0130
e-mail:	knyano@pacific-ind.co.jp

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as above.
Manufacturers Address:	
City/Zip Code	
Country	

3 Equipment under Test (EUT)**3.1 Specification of the Equipment under Test**

Marketing Name / Model No:	PMV-CA14
FCC-ID:	PAXPMVCA14
IC-ID:	3729A-PMVCA14
Product Description:	Tire Pressure Monitoring System Transmitter
Frequency Range / number of channels:	UHF Transmitter: 433.92MHz
Modulation:	FSK
Antenna Type / Gain:	Built-in Loop Antenna Gain: 15 dBi
Power Supply	3VDC Lithium battery
Operating Temperature Range	-40°C to 120°C
Prototype / Production unit	Prototype

3.2 Identification of the Equipment Under Test (EUT)

EUT #	Type	Serial Number
1	TPMS transmitter	00011F5
2	TPMS transmitter	00011F6

3.3 Identification of Accessory Test Equipment

AE #	Type	Manufacturer	Serial No.	Comments
1	Trigger Box	Pacific Industrial Co., Ltd	D0066	For programming the EUT to transmit. Not used for testing.

4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.231 of Title 47 of the Code of Federal Regulations and Industry Canada Standards RSS 210 Issue 8.

This test report is to support a request for new equipment authorization under the FCC ID: **PAXPMVCA14** and IC ID: **3729A-PMVCA14**

All testing was performed on the product referred to in Section 3 as EUT.
This test report contains full radiated and conducted testing results as per

- 47 CFR Part 15: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission subchapter A- General, Part 15- Radio Frequency Devices.
- RSS-210 Issue 8: Spectrum Management and Telecommunications- Radio Standards Specification. Low-power License-exempt radio communication devices (All frequency bands): Category 1 equipment.

4.1 Modes of Operation

Five modes of operation are possible in normal use: stationary, rotating, pressure alert during pressure change, pressure alert after pressure change, and FAT mode.

The Trigger box provided by the customer was used to force transmit modulated signal for 30 minutes (18000 frames/ 0.1 sec interval) for performing the measurements. This operating mode is for testing purposes only.

As the average output power is the same for all modes, it was deemed necessary to only measure the timing behavior in one mode.


4.2 Testing Notes

Stationary, rotating, pressure alert after pressure change, and FAT operating modes are tested and shows compliance against §15.231(e).


The pressure alert during pressure change operating mode is tested and shows compliance against §15.231(a)(4) because this mode is only triggered by an emergency situation such as a rapid change of tire pressure. After the pressure alert during pressure change operating mode is complete, then one of the other operating modes will be triggered.

4.3 Timing Diagrams of different transmission modes:

Rotating mode

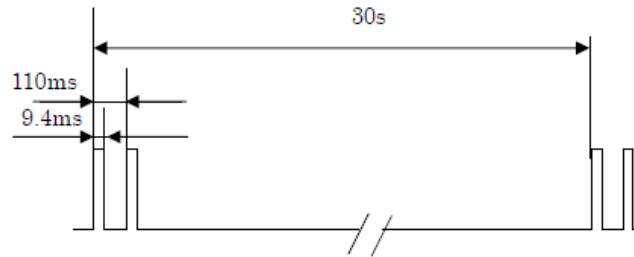


Stationary mode

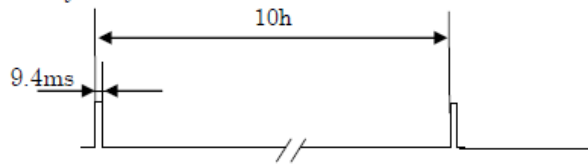


Pressure alert during the pressure change (Stationary mode only)



Pressure alert after the pressure change (Stationary mode only)

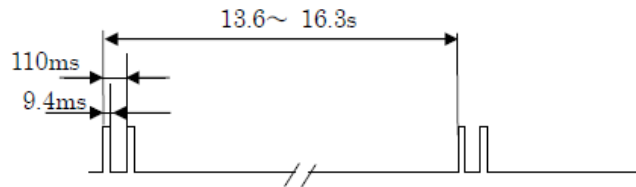

FAT mode (Rotating mode only)

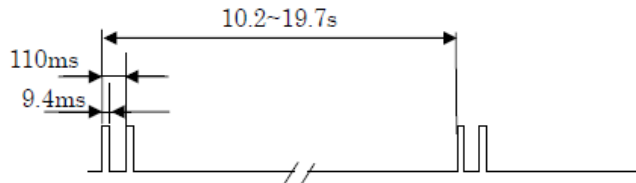

The timing pattern is the same for the FAT mode and the "pressure alert after the pressure change" mode. The only difference between these modes is the variation of the silent period between single transmissions. In FAT mode the variation is between 10.2 and 19.7 seconds, while the variation for the "pressure alert after the pressure change" mode is between 13.6 and 16.3 seconds. The exact value of the silent period between transmissions depends on the rotating speed of the wheels and therefore the speed of the vehicle.

5 Summary of Measurement Results

Test Specification	Test Case	Temperature and Voltage Conditions	Pass	Fail	NA	NP	Result
§15.231 (e)	Transmitter Fundamental Field Strength	Nominal	■	□	□	□	Complies
§15.231 (c)	Transmitter 20dB bandwidth	Nominal	■	□	□	□	Complies
§15.231 (a)	Transmitter Timeout	Nominal	■	□	□	□	Complies
§15.35 (c)	Transmitter Duty Cycle	Nominal	■	□	□	□	Complies
§15.231 (e) §15.209	Transmitter Radiated Emissions	Nominal	■	□	□	□	Complies
§15.109	RX Spurious Emissions Radiated	Nominal	□	□	■	□	-
§15.207	TX Conducted Emissions <30MHz	Nominal	□	□	■	□	-
§15.107(a)	RX Conducted Emissions <30MHz	Nominal	□	□	■	□	-

Note: NA= Not Applicable; NP= Not Performed.

6 Measurements

6.1 Radiated Measurement Procedure

ANSI C63.4 2003 Section 8.3.1.1: Exploratory radiated emission measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT. At near distances, for EUTs of comparably small size, it is relatively easy to determine the spectrum signature of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. A shielded room may be used for exploratory testing, but may have anomalies that can lead to significant errors in amplitude measurements.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of testing. It is recommended that either a headset or loudspeaker be connected as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT when the exploratory and final testing is performed in an OATS with strong ambient signals. Caution should be taken if either antenna height between 1 and 4 meters or EUT azimuth is not fully explored. Not fully exploring these parameters during exploratory testing may require complete testing at the OATS or semi-anechoic chamber when the final full spectrum testing is conducted.

The EUT should be set up in its typical configuration and arrangement, and operated in its various modes. For tabletop systems, cables or wires should be manipulated within the range of likely arrangements. For floor-standing equipment, the cables or wires should be located in the same manner as the user would install them and no further manipulation is made. For combination EUTs, the tabletop and floor-standing portions of the EUT shall follow the procedures for their respective setups and cable manipulation. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions.

For each mode of operation required to be tested, the frequency spectrum shall be monitored. Variations in antenna height between 1 and 4 m, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) shall be explored to produce the emission that has the highest amplitude relative to the limit. A step-by-step technique for determining this emission can be found in Annex C.

When measuring emissions above 1 GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1 GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beamwidth, the measurement antenna shall be aligned with the EUT.

ANSI C63.4: 2003 Section 8.3.1.2: Final radiated emission measurements

Based on the measurement results in 8.3.1.1, the one EUT, cable and wire arrangement, and mode of operation that produces the emission that has the highest amplitude relative to the limit is selected for the final measurement. The final measurement is then performed on a site meeting the requirements of 5.3, 5.4, or 5.5 as appropriate without variation of the EUT arrangement or EUT mode of operation. If the EUT is relocated from an exploratory test site to a final test site, the highest emission shall be remaximized at the final test location before final radiated emissions measurements are performed.


However, antenna height and polarity and EUT azimuth are to be varied. In addition, the full frequency spectrum (for the range to be checked for meeting compliance) shall be investigated. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. During the full frequency spectrum investigation, particular focus should be made on those frequencies found in exploratory testing that were used to find the final test configuration, mode of operation, and arrangement (associated with achieving the least margin with respect to the limit). This full spectrum test constitutes the compliance measurement.

For measurements above 1 GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the “cone of radiation” from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. The antenna may have to be higher or lower than the EUT, depending on the EUT’s size and mounting height, but the antenna should be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of measurements. Data collected shall satisfy the report requirements of Clause 10.

NOTES

- 1— Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.
- 2—Use of waveguide and flexible waveguide may be necessary at frequencies above 10 GHz to achieve usable signal-to noise ratios at required measurement distances. If so, it may be necessary to restrict the height search of the antenna, and special care should be taken to ensure that maximum emissions are correctly measured.
- 3—All presently known devices causing emissions above 10 GHz are physically small compared with the beam-widths of typical horn antennas used for EMC measurements. For such EUTs and frequencies, it may be preferable to vary the height and polarization of the EUT instead of the receiving antenna to maximize the measured emissions.

6.2 Conducted Measurement Procedure

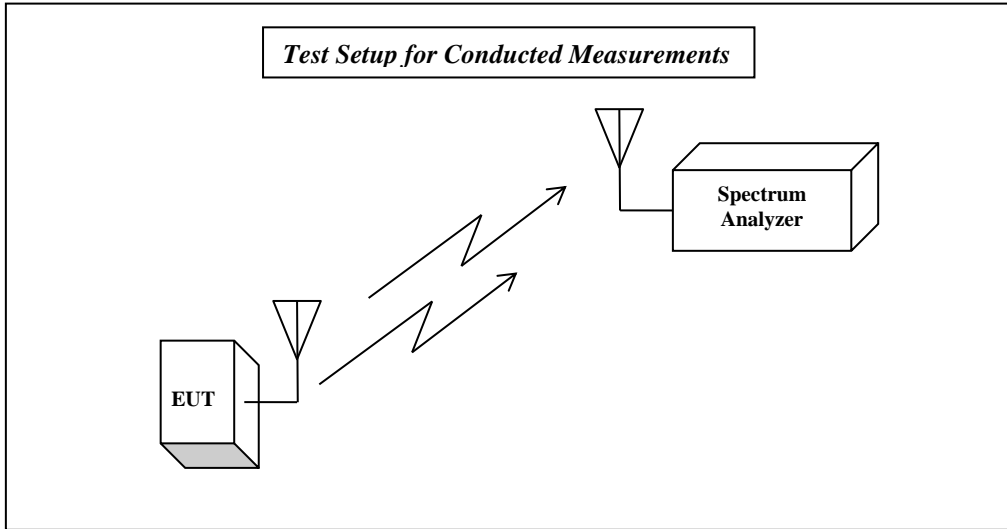

1. If the EUT does not have a conducted RF port, connect the equipment as shown in the above diagram using a radiated link.
2. Set EUT to transmit in the required operating mode.
3. Measurements are to be performed with the EUT set to the required transmit channel.

6.3 Sample Calculations for Radiated Measurements**6.3.1 Field Strength Measurements:**

Field Strength measurements are directly taken from the Spectrum Analyzer/ Receiver, taking into account the cable loss between the Receiving Antenna and the Spectrum Analyzer/ Receiver. Antenna Factor is accounted for by the test SW.

FS (dB μ V/m)= Measured Value on SA (dB μ V)+ Cable Loss (dB)

Eg:

Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Field Strength Result (dB μ V/m)
1000	95.5	3.5	99.0

6.3.2 Power Measurements using Substitution Procedure:

The measurement on the Spectrum Analyzer is used as a basis for the Substitution procedure. The EUT is replaced with a Signal Generator and an antenna. The setting on the Signal Generator is varied until the Spectrum Analyzer displays the original reading. EIRP is calculated as-

EIRP (dBm)= Signal Generator setting (dBm)- Cable Loss (dB)+ Antenna Gain (dBi)

Eg:

Frequency (MHz)	Measured SA (dB μ V)	Signal Generator setting (dBm)	Antenna Gain (dBi)	Dipole Gain (dBd)	Cable Loss (dB)	EIRP (dBm)
1000	95.5	24.5	6.5	0	3.5	27.5

6.4 Transmitter Duty Cycle

According to ANSI C63.4 2009 13.4.2, “Devices transmitting pulsed emissions and subject to a limit requiring an average detector function for radiated emissions shall initially be measured with an instrument that uses a peak detector. A radiated emission measured with a peak detector may then be corrected to a true average using the appropriate factor for emission duty cycle. This correction factor relates the measured peak level to the average limit and is derived by averaging absolute field strength over one complete pulse train that is 0.1 s, or less, in length. If the pulse train is longer than 0.1 s, the average shall be determined from the average absolute field strength during the 0.1 s interval in which the field strength is at a maximum”

6.4.1 Reference:

§15.35 (c)


6.4.2 Test Conditions:

Tnom: 25°C; Vnom: 3.0V

Spectrum Analyzer settings:

RBW=30 kHz, VBW=30 kHz, Detector: Peak, Sweep Time: 150 ms, Span=Zero

6.4.3 Test Data:

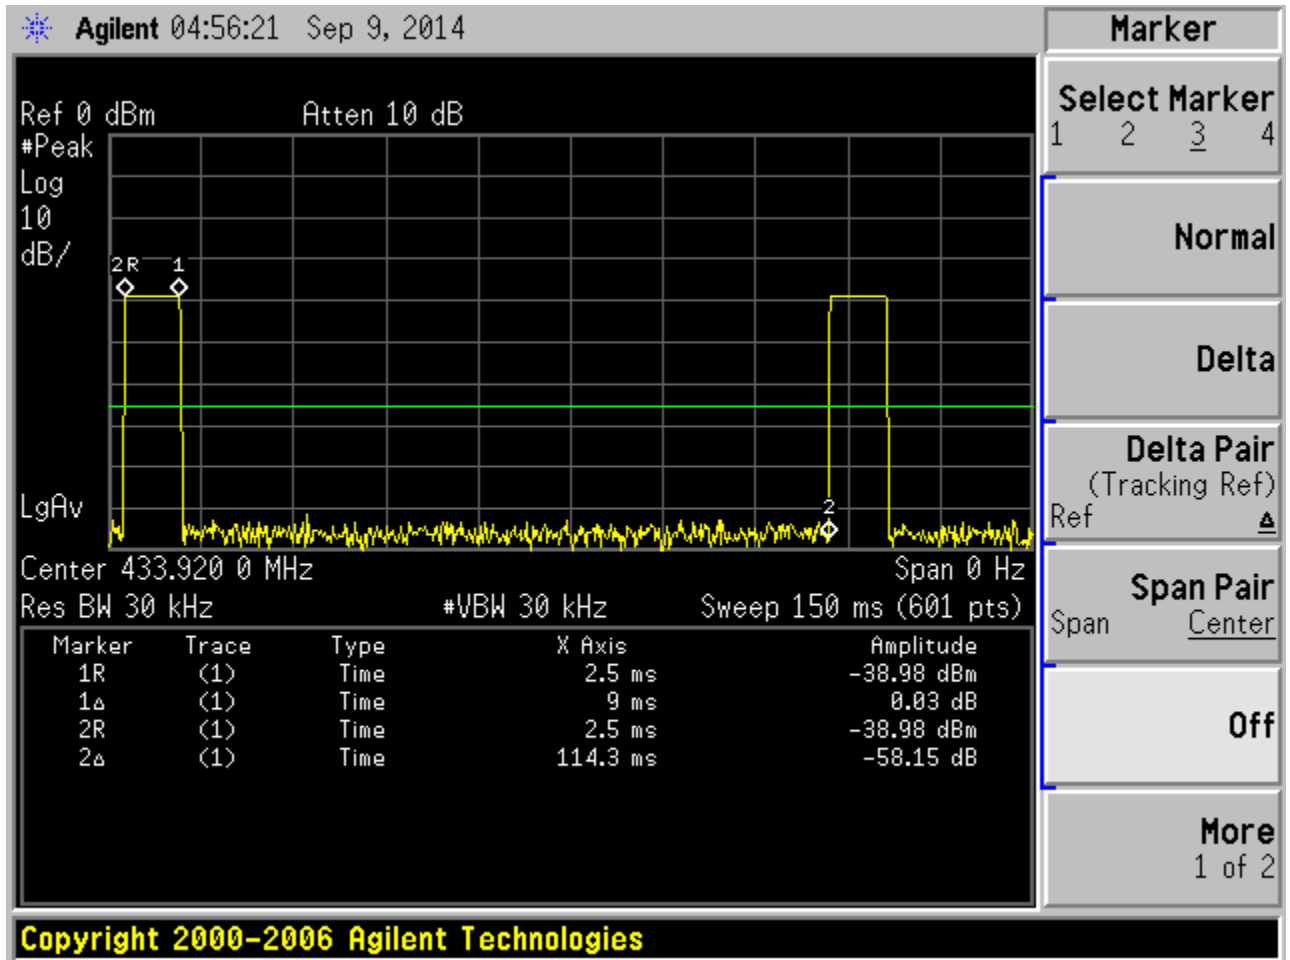

6.4.4 Measurement Result

Transmit on time = 9 ms;
 Period= 100 ms;
 Duty Cycle=9 %

Correction factor = 20 Log (Pulse Duration (ms)/ 100 ms) = 20Log (9/100) = -20.92 dB

Note: Regardless of the transmission mode, the maximum number of bursts in 100ms is 1 and therefore the duty cycle can never exceed the above calculated value.

6.5 Transmitter Duration

6.5.1 Limits

§15.231 (e)

Devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

6.5.2 Results

Rotating Mode:

Transmission length: $1 \times 114.3 \text{ ms} + 9 \text{ ms} = 123.3 \text{ ms} < 1 \text{ second}$

Minimum silent period: $30 \times 0.1 \text{ s} = 3 \text{ s}$

Silent Period: $30 \text{ s} - 0.1 \text{ s} = 29.9 \text{ s} > 10 \text{ s}$

Stationary Mode:

Transmission length: $1 \times 9 \text{ ms} = 9 \text{ ms} < 1 \text{ second}$

Minimum silent period: $30 \times 9 \text{ ms} = 270 \text{ ms}$

Silent Period: $36000 \text{ s} - 0.009 \text{ s} = 35999.991 \text{ s} > 10 \text{ s}$

Pressure Alert after the Pressure Change Mode:

Transmission length: $1 \times 114.3 \text{ ms} + 9 \text{ ms} = 123.3 \text{ ms} < 1 \text{ second}$

Minimum silent period: $30 \times 0.1 \text{ s} = 3 \text{ s}$

Silent Period: $13.6 \text{ s} - 0.1 \text{ s} = 13.5 \text{ s} > 10 \text{ s}$

FAT mode:

Transmission length: $1 \times 114.3 \text{ ms} + 9 \text{ ms} = 123.3 \text{ ms} < 1 \text{ second}$

Minimum silent period: $30 \times 0.1 \text{ s} = 3 \text{ s}$

Silent Period: $10.2 \text{ s} - 0.1 \text{ s} = 10.1 \text{ s} > 10 \text{ s}$

13.6 s and 10.2 s are the minimum interval between transmissions for the Pressure alert after the pressure change mode and the FAT mode respectively and therefore represent a worst case calculation.

6.6 Transmitter Fundamental Field Strength**6.6.1 Limits:**RSS 210 Issue 8 A.1.1.2§15.231 (e)

Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emission (microvolts/meter)
40.66–40.70	1,000	100
70–130	500	50
130–174	500 to 1,500 ¹	50 to 150 ¹
174–260	1,500	150
260–470	1,500 to 5,000 ¹	150 to 500 ¹
Above 470	5,000	500

¹Linear interpolations.

The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

For the EUT operating at 433.92 MHz, the fundamental field strength limit is calculated as follows:

$$\begin{aligned} \text{Field Strength} &= (16.67 \times F) - 2833.33 \text{ where } F \text{ is the frequency in MHz} \\ &= 4400.12 \text{ } \mu\text{V/m} \\ &= 73 \text{ dB } \mu\text{V/m} \end{aligned}$$

6.6.2 Test Conditions:


Tnom: 25°C; Vnom : 3V DC

Spectrum Analyzer settings:

RBW=120 kHz; VBW=300 kHz; Detector: Peak; Sweep Time: Auto; Span=2MHz

Maximized result for all orientations of the EUT and horizontal and vertical measurement antenna polarizations shown here.

6.6.3 Test Data:

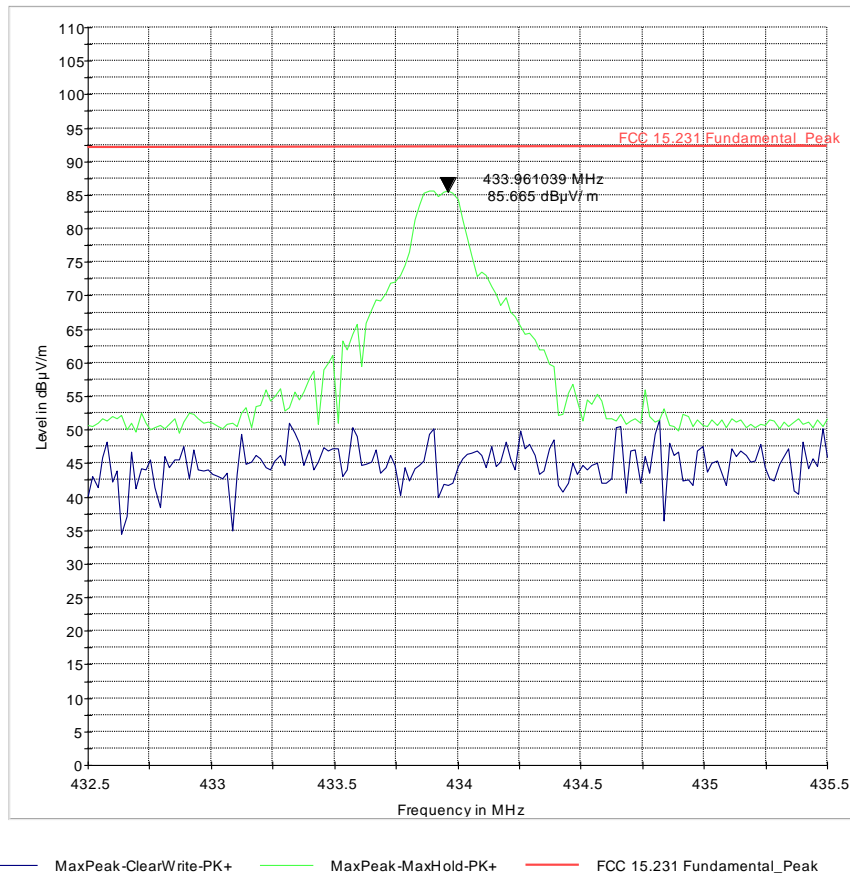

6.6.4 Measurement Result

Maximum power (dBµV/m at 3m)		Limit (dBµV/m)	Verdict
Measured Peak value	Calculated Average value		
85.665	$85.665 - 20.92 = 64.745$	73	Pass

6.7 Transmitter 20dB Bandwidth

6.7.1 Limits:

§15.231 (c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier. For 433.92 MHz transmitter, the 20 dB Bandwidth limit is $0.0025 \times 433.92 \text{ MHz} = 1.09 \text{ MHz}$. Therefore, 20dB bandwidth should be $< 1.09 \text{ MHz}$.


6.7.2 Test Conditions:

T_{nom} : 25°C; V_{nom} : 3.0V

Spectrum Analyzer settings:

RBW=1 kHz, VBW=5 kHz, Detector: Peak- Max hold; Sweep Time: Auto; Span=500 kHz

6.7.3 Test Data:

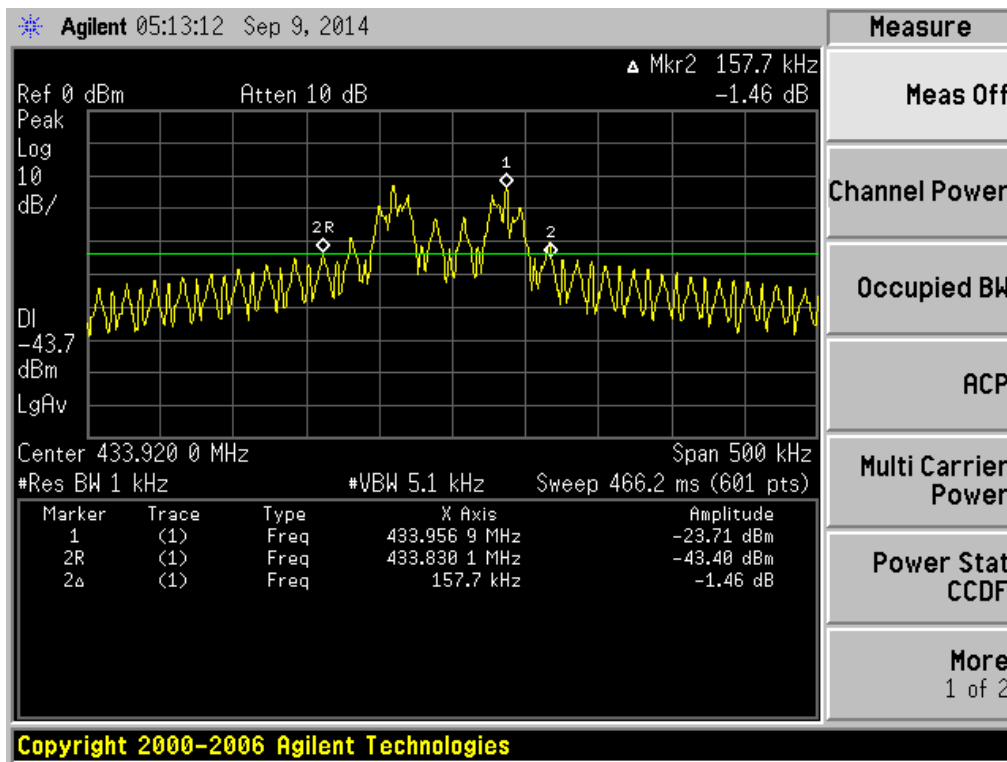

6.7.4 Measurement Result

Measured 20 dB bandwidth (kHz)	20 dB Bandwidth Limit(MHz)	Verdict
157.7	1.09	Pass

6.8 Transmitter Spurious Emissions- Radiated

6.8.1 References:

FCC CFR 2.1053

FCC CFR 15.231 (e) and 15.209

6.8.2 Measurement requirements:

FCC 2.1053: Field strength of spurious radiation.

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

6.8.3 Limits:

§15.231 (e)

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emission (microvolts/meter)
40.66–40.70	1,000	100
70–130	500	50
130–174	500 to 1,500 ¹	50 to 150 ¹
174–260	1,500	150
260–470	1,500 to 5,000 ¹	150 to 500 ¹
Above 470	5,000	500

6.8.4 Measurement Settings:

Peak detector used for the measurements- with RBW=120 kHz for measurements below 1GHz and RBW= 1MHz for measurements above 1GHz.

Testing performed up to 10x Transmit frequency.

Measurement distance= 3m


6.8.5 Measurement Result

Pass.

6.8.6 Test data/ plots:

Radiated spurious emissions: 9kHz- 30MHz

FCC 15 9kHz - 30 MHz

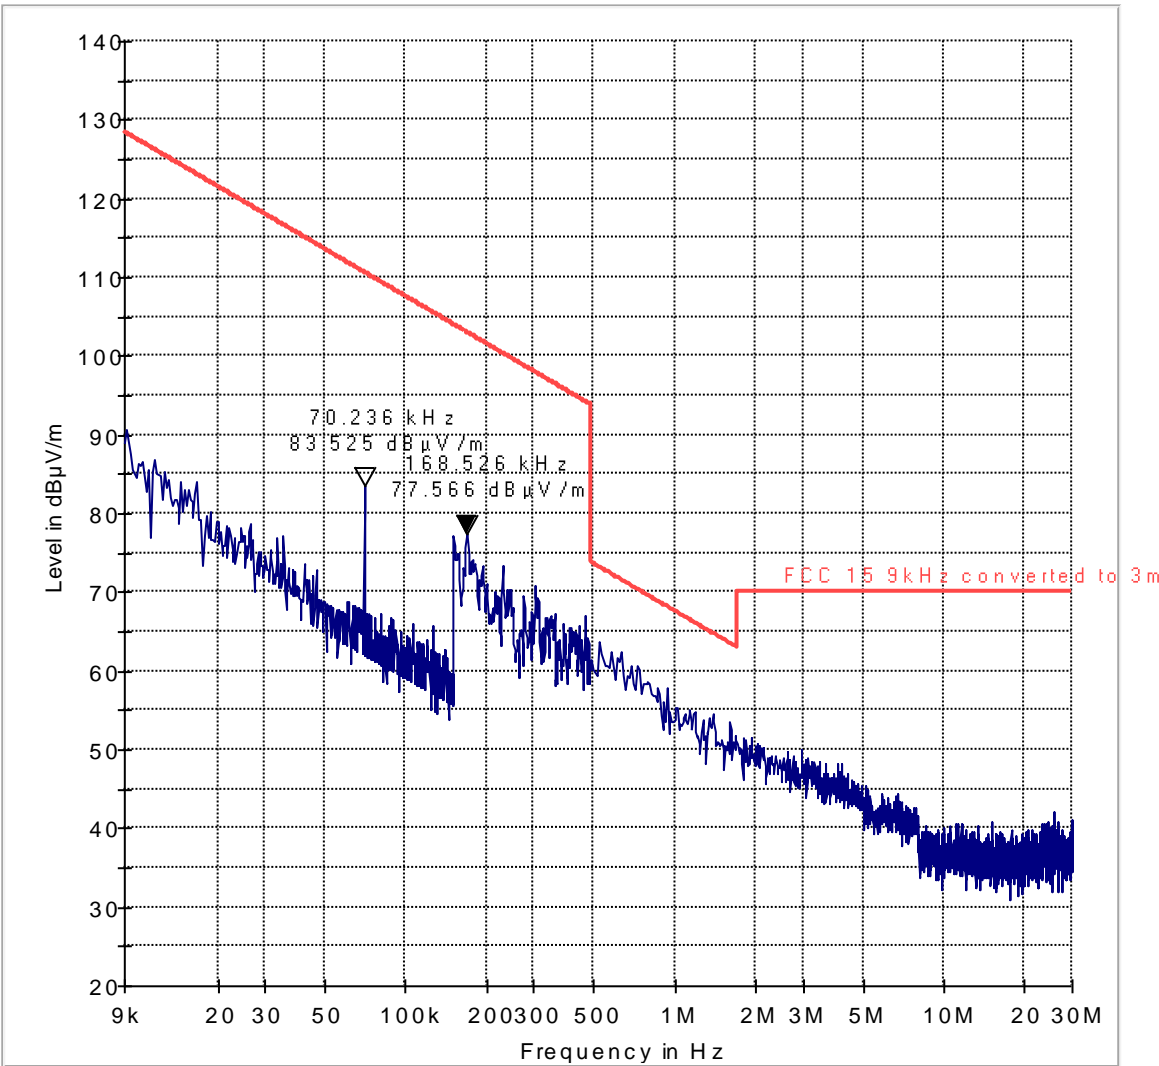


— FCC 15 9kHz converted to 3m — Preview Result 1-PK+

Radiated spurious emissions: 30M-1GHz

Measurement with both Peak and Average detector shown below.

Signal above the limit line is from the 433.92 MHz Transmitter.

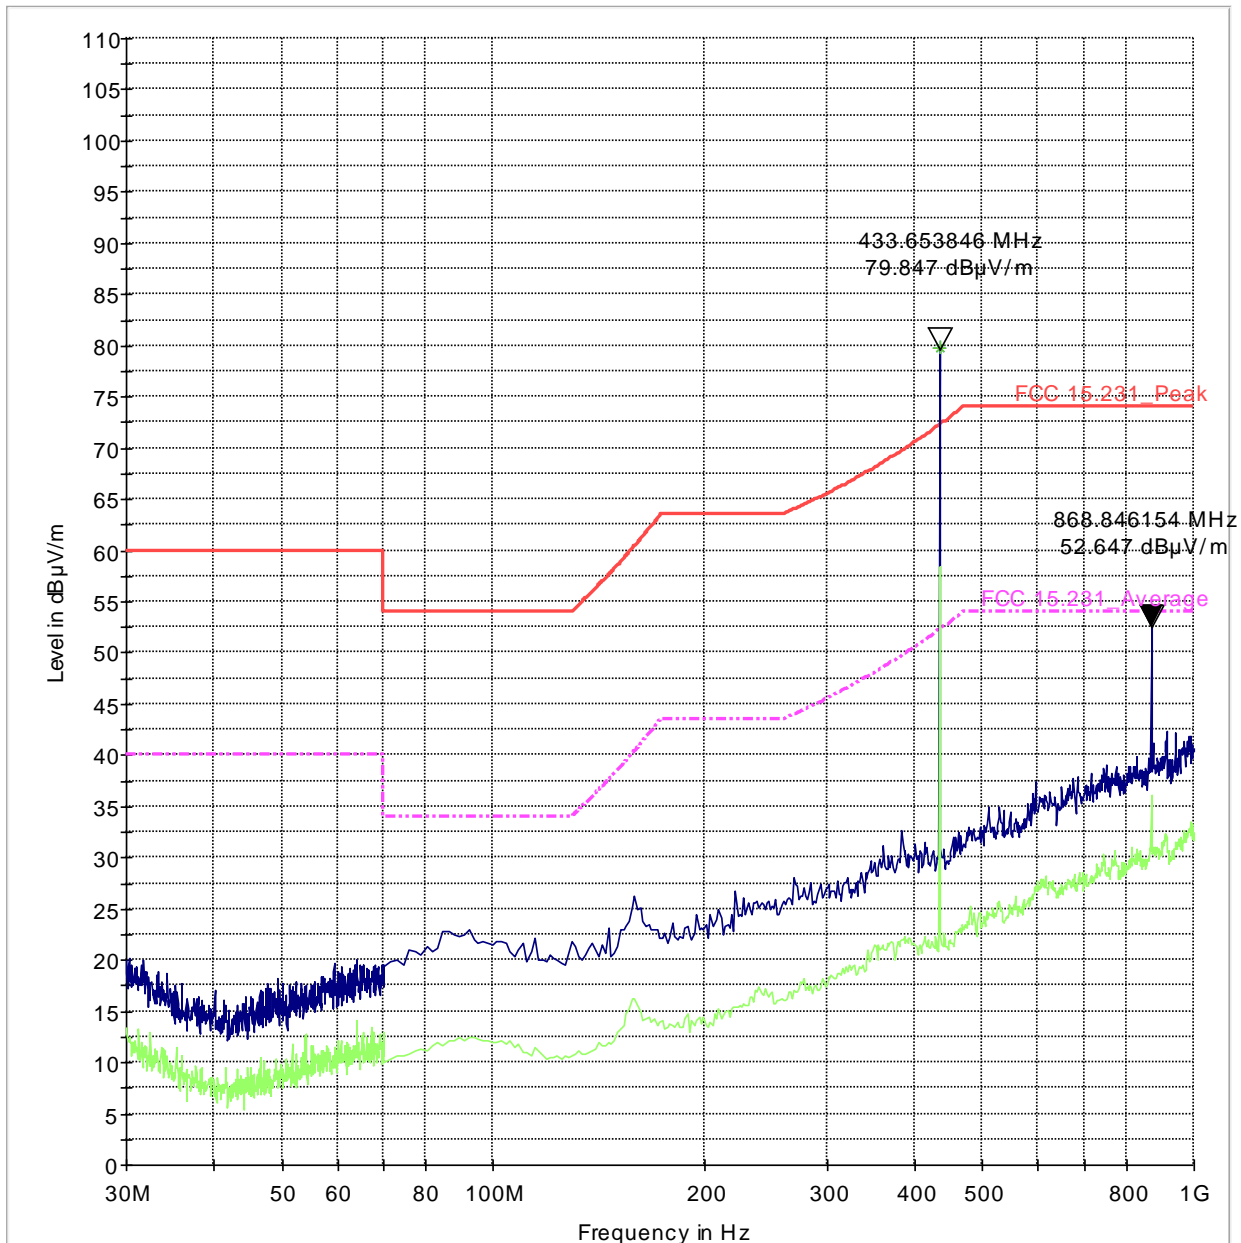


- FCC 15.231_Peak
- - - FCC 15.231_Average
- Preview Result 1-PK+
- Preview Result 2-AVG
- * Data Reduction Result 1 [3]-PK+
- * Data Reduction Result 2 [3]-PK+

Radiated spurious emissions: >1GHz

Measurement with both Peak and Average detector shown below.

FCC 15.231 1-4.5GHz_TX

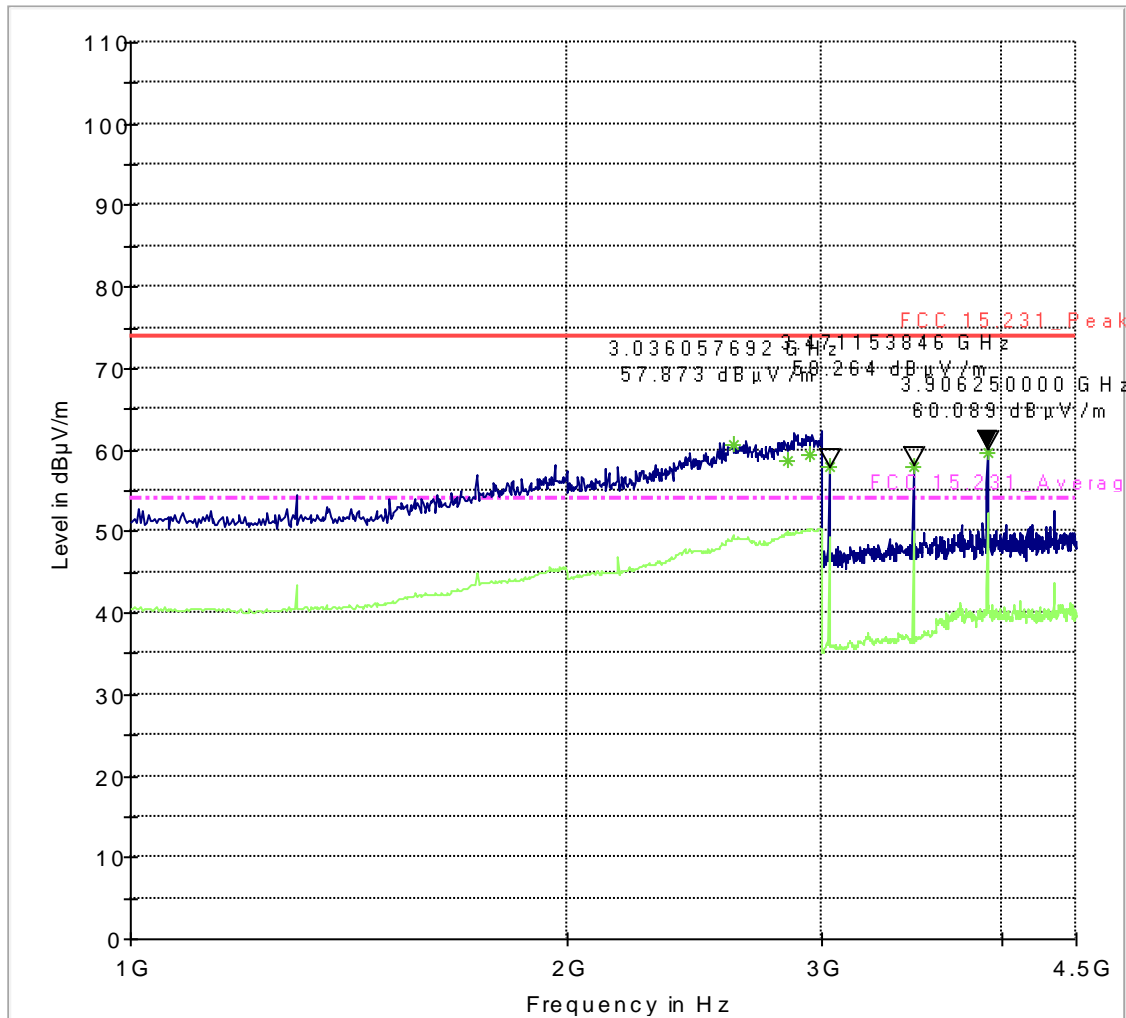

- FCC 15.231_Peak
- - - FCC 15.231_Average
- Preview Result 1-PK+
- Preview Result 2-AVG
- * Data Reduction Result 2 [4]-PK+

6.9 Receiver Spurious Emissions- Radiated**6.9.1 Limits:**

FCC CFR §15.109

Frequency of emission (MHz)	Field strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100 (40dB $\mu\text{V/m}$)	3
88–216	150 (43.5 dB $\mu\text{V/m}$)	3
216–960	200 (46 dB $\mu\text{V/m}$)	3
Above 960	500 (54 dB $\mu\text{V/m}$)	3



6.9.2 Test Result:

This is not applicable since there is no receiver mode available.

7 Test Equipment and Ancillaries used for tests

Instrument/Ancillary	Model	Manufacturer	Serial No.	Cal Date	Cal Interval
EMI Receiver/Analyzer	ESU40	Rohde & Schwarz	100251	Sept 2013	2 Years
Spectrum Analyzer	E4440A	Agilent	MY46186445	Dec 2012	2 Year
Loop Antenna	6512	EMCO	00049838	Mar 2014	3 years
Biconilog Antenna	3141	EMCO	0005-1186	Apr 2012	3 years
Horn Antenna (1-18GHz)	3115	ETS	00035111	Apr 2012	3 years
Communication Antenna	IBP5-900/1940	Kathrein	n/a	n/a	n/a
High Pass Filter	5HC2700	Trilithic Inc.	9926013	Part of system calibration	
High Pass Filter	4HC1600	Trilithic Inc.	9922307	Part of system calibration	
6GHz High Pass Filter	HPM50106	Microtronics	001	Part of system calibration	
Pre-Amplifier	JS4-00102600	Miteq	00616	Part of system calibration	
Temp Hum Logger	TM320	Dickson	03280063	Jul 2014	1 Year
Temp Hum Logger	TM325	Dickson	5285354	Jul 2014	1 Year

8 **Test Setup Info:**

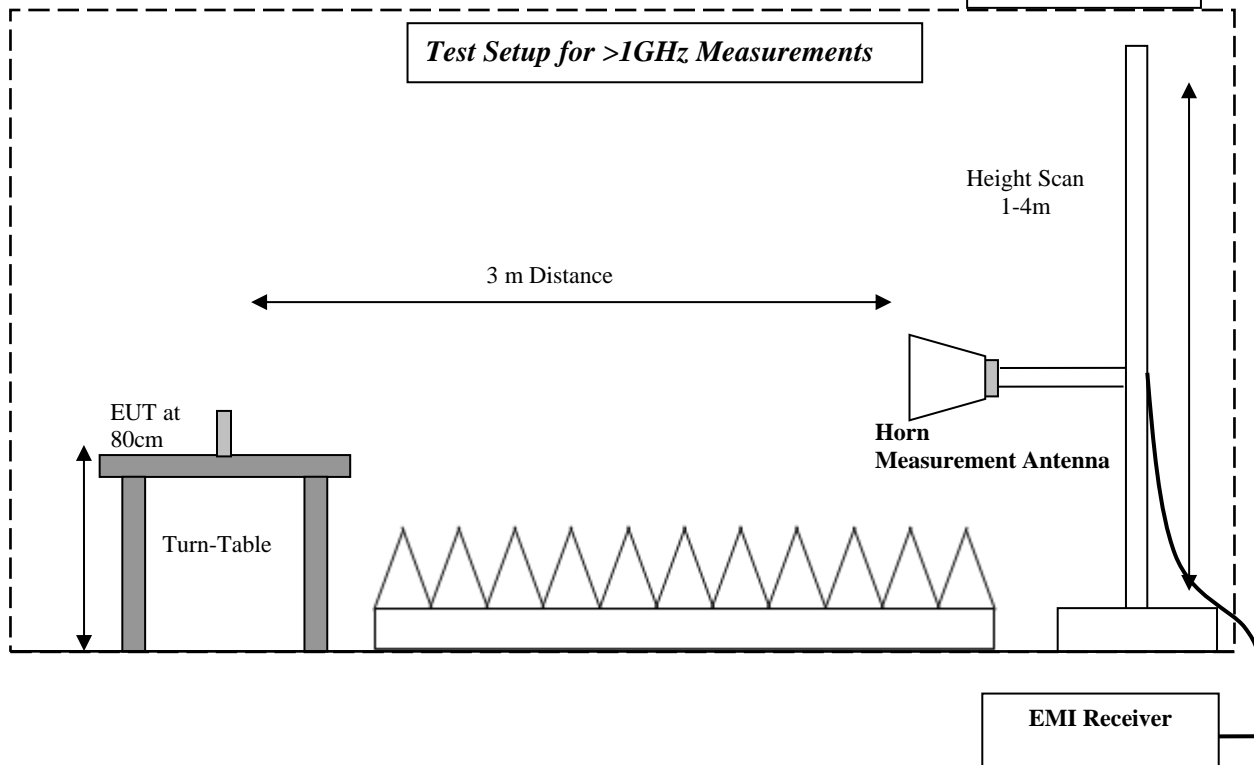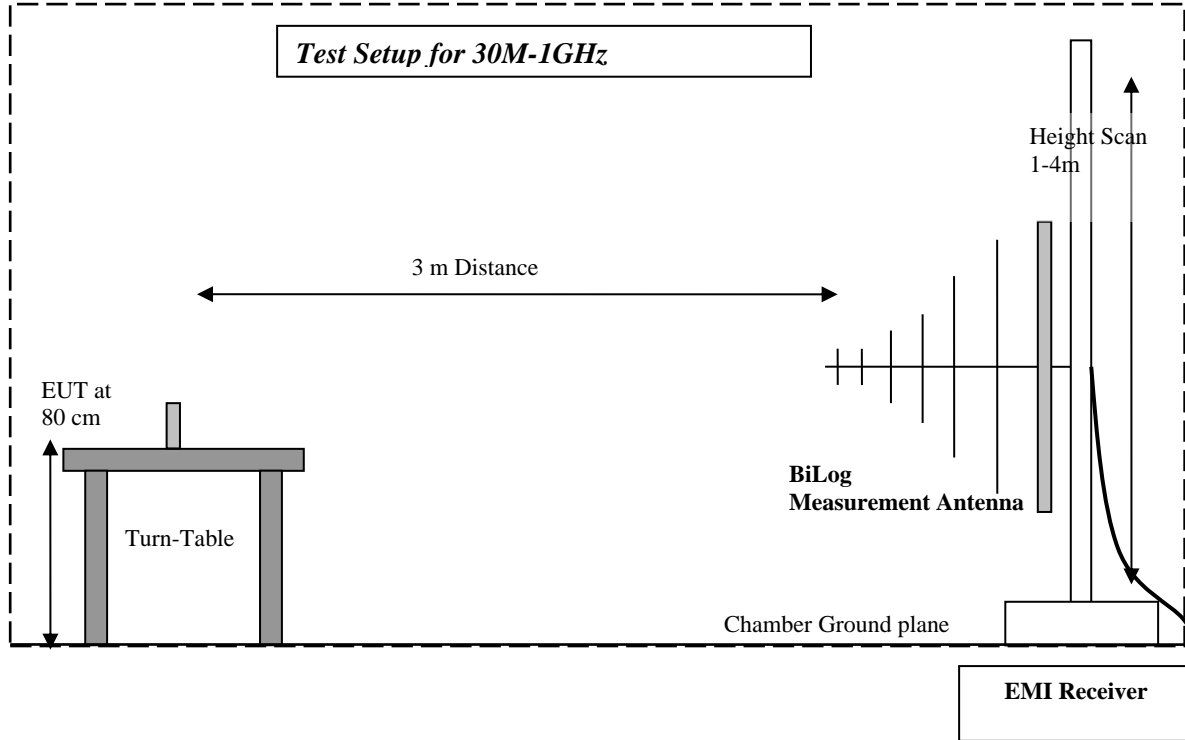

9 Revision History

Date	Report Name	Changes to report	Report prepared by
2014-09-18	EMC_CET10_203_14001_FCC15.231	First Version	K. Tran