

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C AND CANADIAN RSS 210 ISSUE 8 REQUIREMENT**

OF

Bluetooth Enabled Wall Charger

MODEL No.: IPU-IHB-11, IPU-IHB-13

BRAND NAME: XtremeMac

FCC ID: PB4-IPUIHB11

IC ID: 6900A-IPUIHB13

REPORT NO: ES110308067F

ISSUE DATE: March 31, 2011

Prepared for

Imation Corp.

1 Imation Way, Oakdale Minnesota 55128-3414 United States

Prepared by

SHENZHEN EMTEK CO., LTD

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China**

TEL: 86-755-26954280

FAX: 86-755-26954282

VERIFICATION OF COMPLIANCE

Applicant:	Imation Corp. 1 Imation Way, Oakdale Minnesota 55128-3414 United States
Manufacturer:	CCA Electronic Factory Building 120-121th, Pinghuan Industrial City, Pingshan Town, Longgang District, Shenzhen, Guangdong, China 518118
Product Description:	Bluetooth Enabled Wall Charger
Brand Name:	XtremeMac
Model Number:	IPU-IHB-11, IPU-IHB-13 (Note: all the modes are the same, except their model number are different. We take IPU-IHB-11 for test.)
Serial Number:	N/A
File Number:	ES110308067F
Date of Test:	March 8, 2011 to March 28, 2011

We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009), RSS GEN Issue 2 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247 and RSS 210 Issue 8.

The test results of this report relate only to the tested sample identified in this report.

Date of Test :

March 8, 2011 to March 28, 2011

Prepared by :



(Engineer)

Reviewer :



(Quality Manager)

Approve & Authorized Signer :



(Manager)

Table of Contents

1.	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION	5
1.2	RELATED SUBMITTAL(S) / GRANT (S)	5
1.3	TEST METHODOLOGY	5
1.4	SPECIAL ACCESSORIES	5
1.5	EQUIPMENT MODIFICATIONS	5
1.6	TEST FACILITY	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	EUT CONFIGURATION	7
2.2	EUT EXERCISE	7
2.3	TEST PROCEDURE	7
2.4	LIMITATION	7
2.5	CONFIGURATION OF TESTED SYSTEM	11
2.6	EQUIPMENT USED IN TESTED SYSTEM	11
2.7	DESCRIPTION OF TEST MODES	12
3.	SUMMARY OF TEST RESULTS	13
4.	CONDUCTED EMISSIONS TEST	14
4.1	MEASUREMENT PROCEDURE:	14
4.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
4.3	MEASUREMENT EQUIPMENT USED:	14
4.4	CONDUCTED EMISSION LIMIT	14
4.5	MEASUREMENT RESULT:	15
4.6	CONDUCTED MEASUREMENT PHOTOS:	16
5.	RADIATED EMISSION TEST	17
5.1	MEASUREMENT PROCEDURE	17
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	18
5.3	MEASUREMENT EQUIPMENT USED:	19
5.4	MEASUREMENT RESULT	19
5.5	RADIATED MEASUREMENT PHOTOS:	24
6.	CHANNEL SEPARATION TEST	25
6.1	MEASUREMENT PROCEDURE	25
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	25
6.3	MEASUREMENT EQUIPMENT USED:	25
6.4	MEASUREMENT RESULTS:	25
7.	BANDWIDTH TEST	28
7.1	MEASUREMENT PROCEDURE	28
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	28

7.3	MEASUREMENT EQUIPMENT USED:	28
7.4	MEASUREMENT RESULTS:.....	28
8.	QUANTITY OF HOPPING CHANNEL TEST.....	33
8.1	MEASUREMENT PROCEDURE.....	33
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	33
8.3	MEASUREMENT EQUIPMENT USED:	33
8.4	MEASUREMENT RESULTS:.....	33
9.	TIME OF OCCUPANCY (DWELL TIME) TEST	34
9.1	MEASUREMENT PROCEDURE.....	34
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	34
9.3	MEASUREMENT EQUIPMENT USED:	34
9.4	MEASUREMENT RESULTS:.....	34
10.	MAXIMUM PEAK OUTPUT POWER TEST	37
10.1	MEASUREMENT PROCEDURE.....	37
10.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	37
10.3	MEASUREMENT EQUIPMENT USED:	37
10.4	MEASUREMENT RESULTS:.....	37
11.	BAND EDGE TEST	38
11.1	MEASUREMENT PROCEDURE.....	38
11.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	38
11.3	MEASUREMENT EQUIPMENT USED:	38
11.4	MEASUREMENT RESULTS:.....	38
12.	ANTENNA PORT EMISSION.....	39
12.1	TEST EQUIPMENT	39
12.2	MEASURING INSTRUMENTS AND SETTING	39
12.3	TEST PROCEDURES	39
12.4	BLOCK DIAGRAM OF TEST SETUP.....	39
12.5	TEST RESULT	39
13.	ANTENNA APPLICATION.....	41
13.1	ANTENNA REQUIREMENT	41
13.2	RESULT	41

1. GENERAL INFORMATION

1.1 Product Description

The Imation Corp.

Model: IPU-IHB-11(referred to as the EUT in this report) The EUT is an short range, lower power, Bluetooth Enabled Wall Charger designed as an Device. It is designed by way of utilizing the GFSK, DQPSK and 8DPSK modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

A). Operation Frequency: 2402-2480MHz

B). Modulation: GFSK, DQPSK, 8DPSK

(All the modulation modes were tested and the data of the worst modes (8DPSK) are attached within report.)

C). Number of Channel: 79

D). Channel space: 1MHz

E). Rated RF Output Power: 1.22 dBm

F). BIT Rate of Transmission: 1 Mbps , 2Mbps, 3Mbps

G). Antenna Type: PCB antenna

H). Antenna GAIN: 0dBi

I). Power Supply: AC 100-240V, 50/60Hz, 0.25A, Output: DC 5.0V, 2.1A

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: PB4-IPUIHB11, IC ID: 6900A-IPUIHB13 filing to comply with Section 15.247 of the FCC Part 15 Subpart C Rules and Canadian RSS 210 Issue 8.0.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009) and in RSS GEN. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab.

: Accredited by CNAS, 2010.10.29
The certificate is valid until 2013.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01:2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC 17025

Accredited by FCC, October 28, 2010
The Certificate Registration Number is 406365.

Accredited by Industry Canada, March 5, 2010
The Certificate Registration Number is 46405-4480.

Name of Firm

: SHENZHEN EMTEK CO., LTD

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 and RSS GEN Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** using **CISPR Quasi-Peak and average detector mode**.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 and RSS GEN.

2.4 Limitation

(1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

(2)	20dB Bandwidth					
	Frequency	Limit(kHz)				
	Range(MHz)	Quantity of Hopping Channel	50	25	15	75
		902-928	<250	>250	NA	NA
		2400-2483.5	NA	NA	>1000	<1000

(3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Limit(Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	75	15
5725-5850	NA	NA	75	NA

(4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	LIMIT(rms)		
	20dB bandwidth <250kHz(50Channel)	20dB bandwidth >250kHz(25Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

Note: The “()”is all channel’s average time of occupancy.**(5) Maximum Peak Output Power**

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)

(6) Band edge

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Peak power ration to emission(dBc)	Limit Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

(8) Radiated Emission

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark: 1. Emission level in $\text{dB}\mu\text{V/m} = 20 \log (\mu\text{V/m})$
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz

Frequency(MHz)	Class A($\text{dB}\mu\text{V/m}$)(at 3m)		Class B($\text{dB}\mu\text{V/m}$)(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249 The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



2.6 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Bluetooth Enabled Wall Charger	N/A	N/A	PB4-IPUIHB11	N/A	EUT
2.	Notebook	Lenovo	20020	N/A	EB16076441	

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

2.7 Description of test modes

The EUT (Bluetooth Enabled Wall Charger) has been tested under normal operating condition.

This EUT is a FHSS system, we use blue test to control the EUT with parallel port, Let EUT hopping on and transmit at every channel with highest power, Only output power use conducted method, others are using radiated method. After sirfdemo330R1 send the command to EUT, it can be removed, and the EUT keep hopping. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for best.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480

3. Summary of Test Results


FCC Rules	IC Rules	Description Of Test	Result
§15.247(a)(1)	RSS 210 A8.1(2)	Channel Separation test	Compliant
§15.247(a)(1)	--	20dB Bandwidth	Compliant
--	RSS 210 A8.1(1)	99%dB Bandwidth	Compliant
§15.247(a)(1)(iii)	RSS 210 A8.1(4)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	RSS 210 A8.1(4)	Time of Occupancy (Dwell Time)	Compliant
§15.247(b)	RSS 210 A8.4	Max Peak output Power test	Compliant
§15.247(d)	RSS 210 A8.5	Band edge test	Compliant
§15.207	RSS GEN Table 2	AC Power Conducted Emission	Compliant
§15.247(d),§15.209	RSS 210 A8.5	Radiated Emission	Compliant
§15.203	--	Antenna Requirement	Compliant
§15.109	RSS GEN 7.2.3 Table 1	Receiver spurious emissions	Compliant

4. Conducted Emissions Test

4.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

4.2 Test SET-UP (Block Diagram of Configuration)

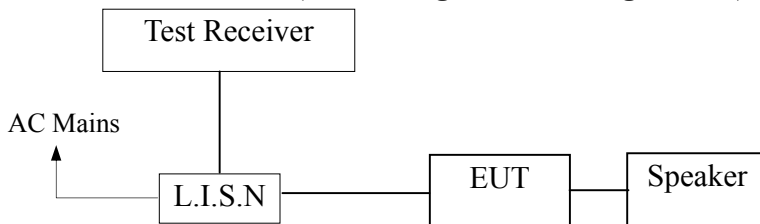

4.3 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2010	05/29/2011
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2010	05/29/2011
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2010	05/29/2011
50ΩCoaxial Switch	Anritsu	MP59B	M20531	005/29/2010	05/29/2011

4.4 Conducted Emission Limit

(7) Conducted Emission

Frequency(MHz)

0.15-0.5

0.5-5.0

5.0-30.0

Quasi-peak

66-56

56

60

Average

56-46

46

50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.5 Measurement Result:

Date of Test:	<u>03/25/2011</u>	Temperature:	<u>22</u>
Frequency Detector:	<u>0.15~30MHz</u>	Humidity:	<u>50%</u>
Test Result:	<u>PASS</u>	Test Mode:	<u>Bluetooth Mode</u>

Test Line	Frequency MHz	Emission Level QP dB(μV)	Emission Level AV dB(μV)	Limits QP dB(μV)	Limits AV dB(μV)	Margin QP dB(μV)	Margin AV dB(μV)
Line	0.49	49.37	32.17	56.17	46.17	-6.80	-14.00
	0.60	49.05	28.80	56.00	46.00	-6.95	-17.20
	0.81	49.55	27.69	56.00	46.00	-6.45	-18.31
	0.90	48.77	29.65	56.00	46.00	-7.23	-16.35
	1.11	47.23	25.69	56.00	46.00	-8.77	-20.31
	3.22	44.13	22.93	56.00	46.00	-11.87	-23.07
Neutral	0.60	48.46	32.15	56.00	46.00	-7.54	-13.85
	0.70	48.46	29.50	56.00	46.00	-7.54	-16.50
	0.98	48.66	29.27	56.00	46.00	-7.34	-16.73
	1.20	48.81	26.29	56.00	46.00	-7.19	-19.71
	1.51	48.72	29.46	56.00	46.00	-7.28	-16.54
	2.00	48.07	27.34	56.00	46.00	-7.93	-18.66

4.6 Conducted Measurement Photos:




5. Radiated Emission Test

5.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured was complete.

5.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

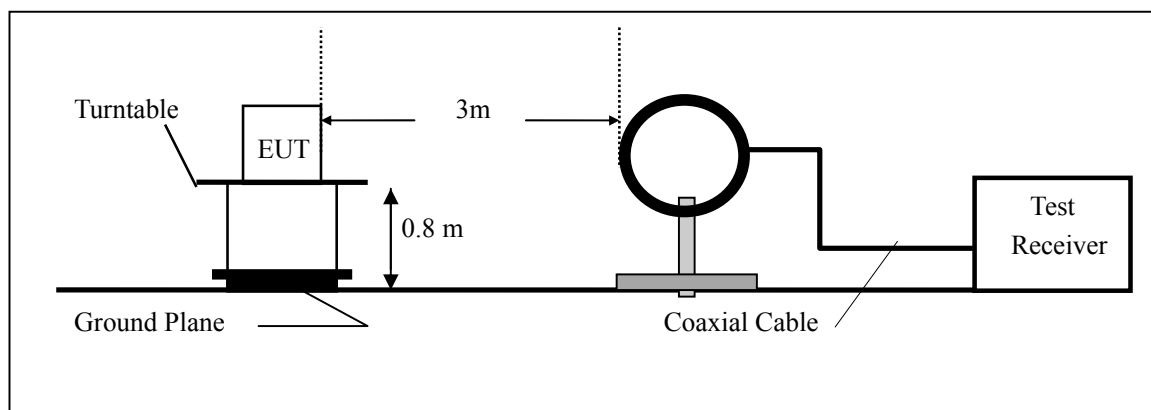

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

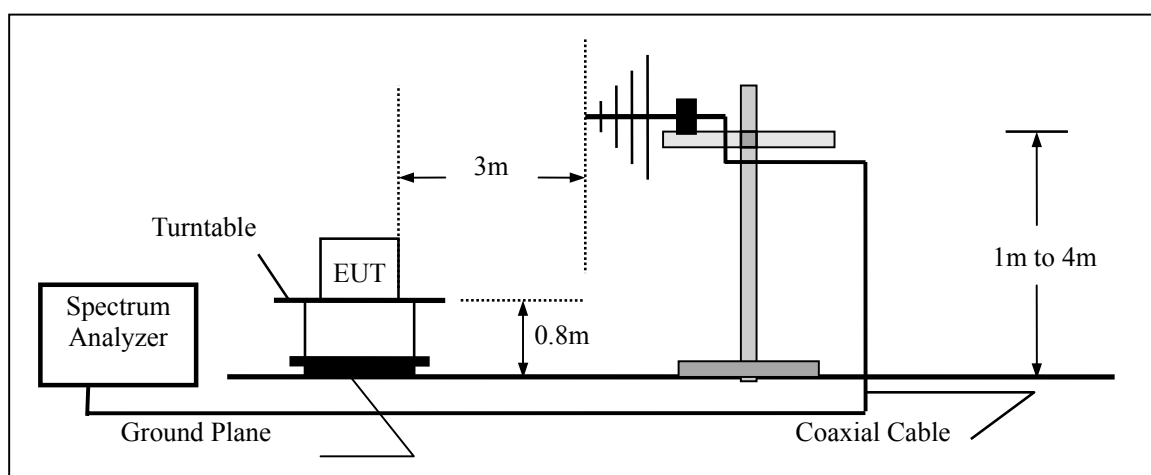

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

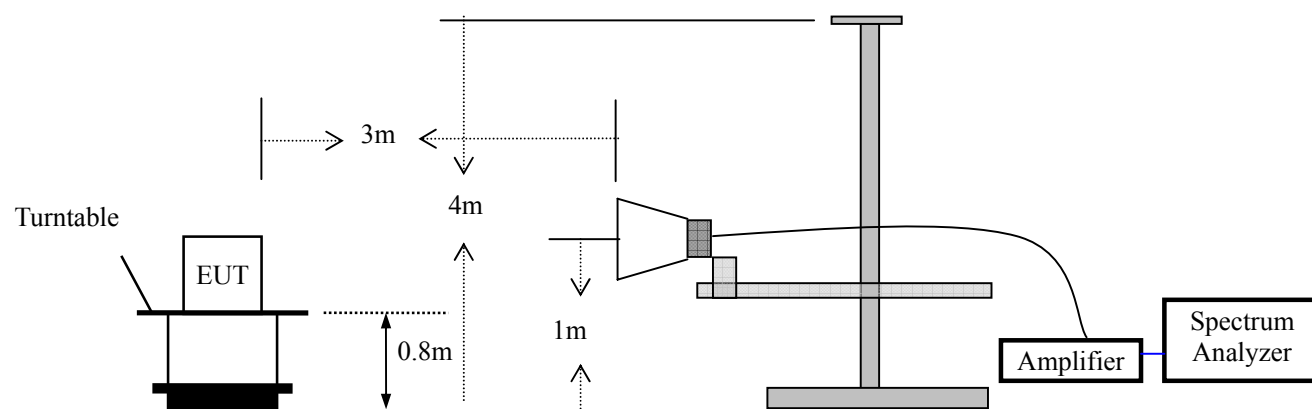

5.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2010	05/29/2011
Spectrum Analyzer	HP	E4407B	839840481	05/29/2010	05/29/2011
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2010	05/29/2011
Pre-Amplifier	HP	8447D	2944A07999	05/29/2010	05/29/2011
Bilog Antenna	Schwarzbeck	VULB9163	142	05/29/2010	05/29/2011
Loop Antenna	ARA	PLA-1030/B	1029	05/29/2010	05/29/2011
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/29/2010	05/29/2011
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/29/2010	05/29/2011

5.4 Measurement Result**TX mode:**

Operation Mode: 2402MHz Test Date : 03/25/2011
 Frequency Range: 30~1000MHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: KL

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
53.32	V	26.82	40	-13.18	PK
140.37	V	24.62	43.5	-18.88	PK
227.42	V	31.65	46	-14.35	PK
247.63	V	30.12	46	-15.88	PK
387.53	V	31.11	46	-14.89	PK
827.45	V	35.84	46	-10.16	PK
219.65	H	34.24	46	-11.76	PK
224.31	H	35.23	46	-10.77	PK
250.74	H	40.41	46	-5.59	PK
260.06	H	40.08	46	-5.92	PK
281.83	H	35.35	46	-10.65	PK
818.13	H	36.56	46	-9.44	PK

Operation Mode: 2441MHz Test Date : 03/25/2011
Frequency Range: 30~1000MHz Temperature : 28
Test Result: PASS Humidity : 65 %
Measured Distance: 3m Test By: KL

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
57.82	V	27.03	40	-12.97	PK
140.01	V	24.4	43.5	-19.1	PK
228.66	V	33.67	46	-12.33	PK
246.27	V	30.24	46	-15.76	PK
386.78	V	30.06	46	-15.94	PK
827.22	V	35.01	46	-10.99	PK
220.67	H	34.36	46	-11.64	PK
224.16	H	35.02	46	-10.98	PK
253.74	H	40.55	46	-5.45	PK
260.01	H	39.96	46	-6.04	PK
280.47	H	35.2	46	-10.8	PK
815.08	H	37.61	46	-8.39	PK

Operation Mode: 2480MHz Test Date : 03/25/2011
Frequency Range: 30~1000MHz Temperature : 28
Test Result: PASS Humidity : 65 %
Measured Distance: 3m Test By: KL

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
53.53	V	25.77	40	-14.23	PK
138.32	V	25.12	43.5	-18.38	PK
228.54	V	31.02	46	-14.98	PK
248.38	V	30.9	46	-15.1	PK
386.32	V	31.22	46	-14.78	PK
826.58	V	35.96	46	-10.04	PK
219.88	H	34.36	46	-11.64	PK
223.85	H	35.46	46	-10.54	PK
250.88	H	40.06	46	-5.94	PK
259.94	H	38.84	46	-7.16	PK
281.72	H	35.18	46	-10.82	PK
816.08	H	34.93	46	-11.07	PK

- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) All the x/y/z orientation has been investigated, and only worst case is presented in this report.

TX mode:

Operation Mode: CH1: 2402MHz Test Date : 03/25/2011
 Frequency Range: 1-25GHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4803.5	V	58.98	45.8	74	54	-15.02	-8.2
7205.24	V	60.81	49.68	74	54	-13.19	-4.32
9605.67	V	59.36	44.78	74	54	-14.64	-9.22
--	V	--	--	--	--	--	--
--	V	--	--	--	--	--	--
--	V	--	--	--	--	--	--
4802.15	H	56.5	39.98	74	54	-17.5	-14.02
7204.17	H	62.2	51.32	74	54	-11.8	-2.68
9608.36	H	59.78	42.36	74	54	-14.22	-11.64
--	H	--	--	--	--	--	--

Operation Mode: CH40: 2441MHz Test Date : 03/25/2011
 Frequency Range: 1-25GHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4881.05	V	57.63	44.15	74	54	-16.37	-9.85
7321.25	V	59.75	45.25	74	54	-14.25	-8.75
9775.28	V	58.15	43.61	74	54	-15.85	-10.39
--	V	--	--	--	--	--	--
--	V	--	--	--	--	--	--
--	V	--	--	--	--	--	--
4883.26	H	55.34	40.21	74	54	-18.66	-13.79
7321.96	H	66.07	50.29	74	54	-7.93	-3.71
9776.35	H	51.33	43.36	74	54	-22.67	-10.64
--	H	--	--	--	--	--	--

Operation Mode: CH79: 2480MHz Test Date : 03/25/2011
 Frequency Range: 1-25GHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960.35	V	61.72	43.01	74	54	-12.28	-10.99
7443.8	V	59.8	46.39	74	54	-14.2	-7.61
9919.87	V	60.6	46.49	74	54	-13.4	-7.51
--	V	--	--	--	--	--	--
--	V	--	--	--	--	--	--
--	V	--	--	--	--	--	--
4961.05	H	61.5	46.67	74	54	-12.5	-7.33
7442.65	H	60.65	45.69	74	54	-13.35	-8.31
9920.74	H	61.97	42.4	74	54	-12.03	-11.6
--	H	--	--	--	--	--	--

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
 - (4) All the x/y/z orientation has been investigated, and only worst case is presented in this report.

RX mode:

Operation Mode: RX Test Date : 03/25/2011
 Frequency Range: 30-1GHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: WOLF



Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Over (dB)	Note
47.93	V	25.98	40	-14.02	PK
134.72	V	23.77	43.5	-19.73	PK
232.14	V	32.46	46	-13.54	PK
249.58	V	31.02	46	-14.98	PK
385.27	V	29.4	46	-16.6	PK
825.92	V	35.13	46	-10.87	PK
219.52	H	33.02	46	-12.98	PK
224.62	H	33.39	46	-12.61	PK
251.93	H	40.2	46	-5.8	PK
262.25	H	38.85	46	-7.15	PK
283.50	H	33.04	46	-12.96	PK
819.53	H	35.98	46	-10.02	PK

Operation Mode: RX Test Date : 03/25/2011
 Frequency Range: 1-25GHz Temperature : 28
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: WOLF

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
5309.08	V	59.69	47.89	74	54	-14.31	-6.11
9832.96	V	55.89	44.57	74	54	-18.11	-9.43
10773.04	V	62.05	43.5	74	54	-11.95	-10.5
--	V	--	--	--	--	--	--
5158.22	H	60.34	48.56	74	54	-13.66	-5.44
7153.24	H	55.88	46.92	74	54	-18.12	-7.08
9952.28	H	62.06	42.39	74	54	-11.94	-11.61
--	H	--	--	--	--	--	--

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5 Radiated Measurement Photos:

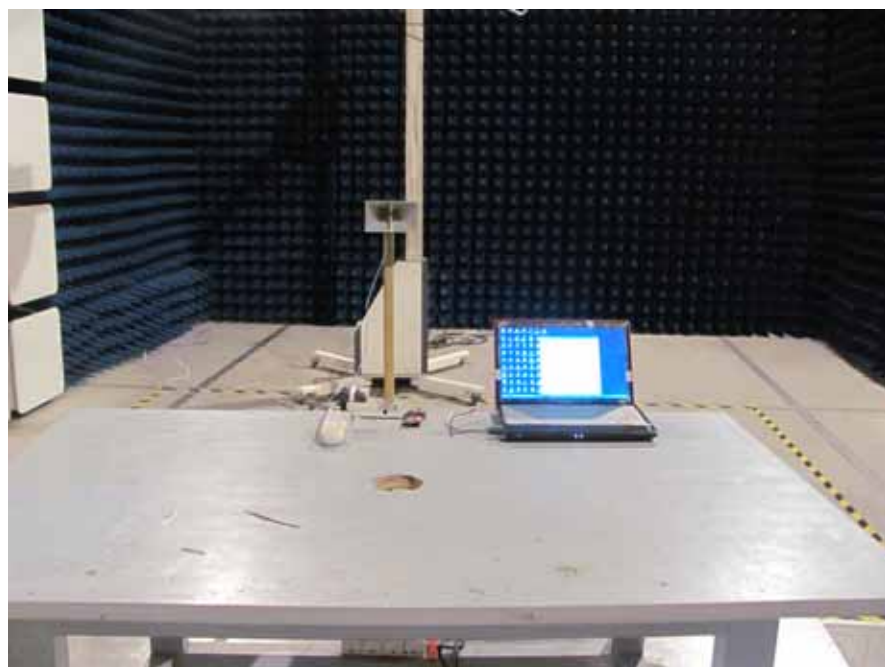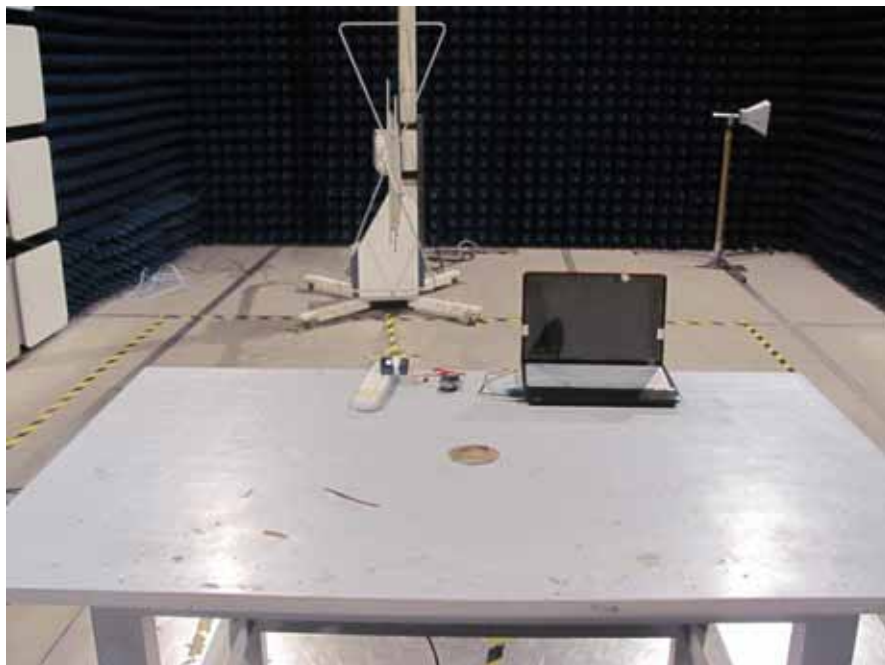


6. Channel Separation test

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Equipment Used:

Same as 4.3 Radiated Emission Measurement.



6.4 Measurement Results:


Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	03/25/2011
Test By:	Andy	Temperature :	28
Test Result:	PASS	Humidity :	65 %

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000.00	>775 kHz
40	2441	1000.00	>775 kHz
79	2480	1000.00	>758 kHz

NOTE: For two-third of the 20dB bandwidth (page 28) is greater than 25kHz. So the limit of Separation Limit is just as the above table.

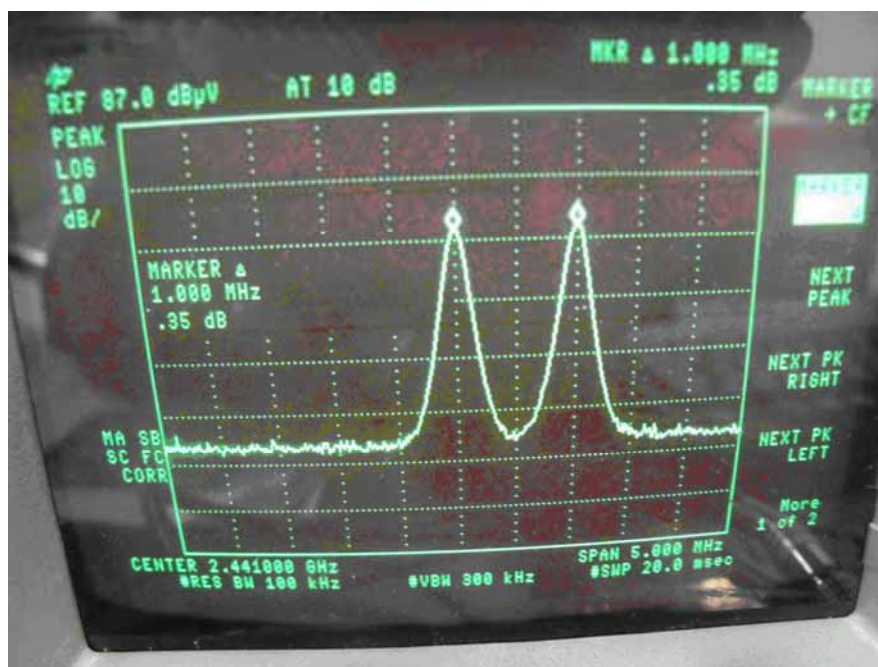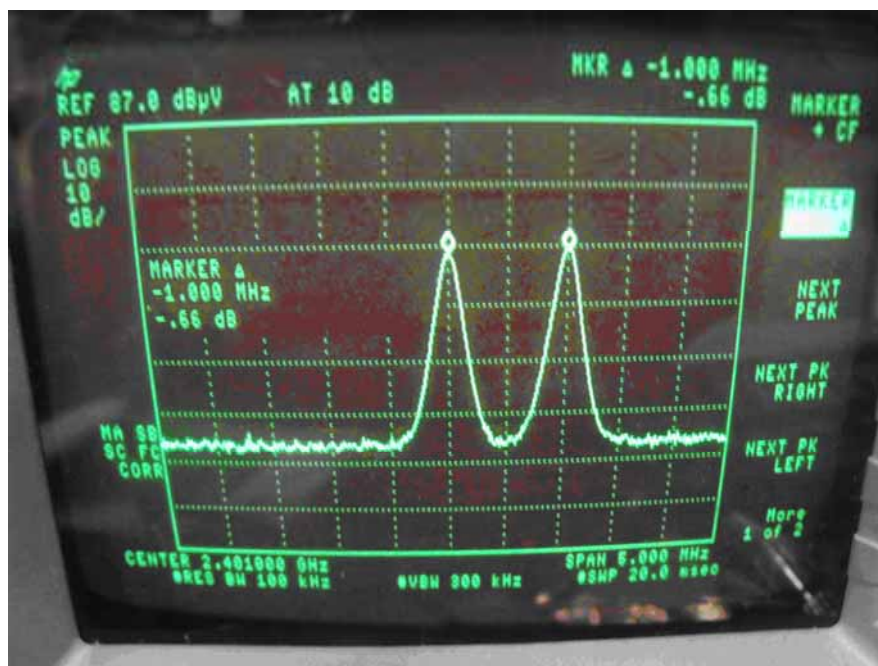

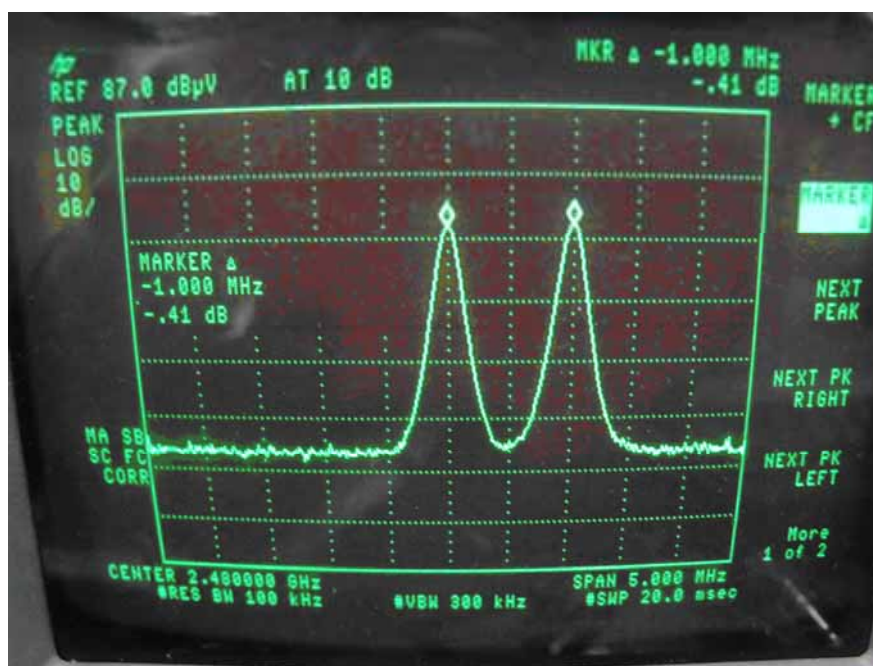


7. Bandwidth test

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used:

Same as 4.3 Radiated Emission Measurement.



7.4 Measurement Results:


7.4.1. 20dB Bandwidth test data Chart:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date:	03/25/2011
Test By:	Andy	Temperature:	28
Test Result:	PASS	Humidity:	65 %

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1163
40	2441	1163
79	2480	1138

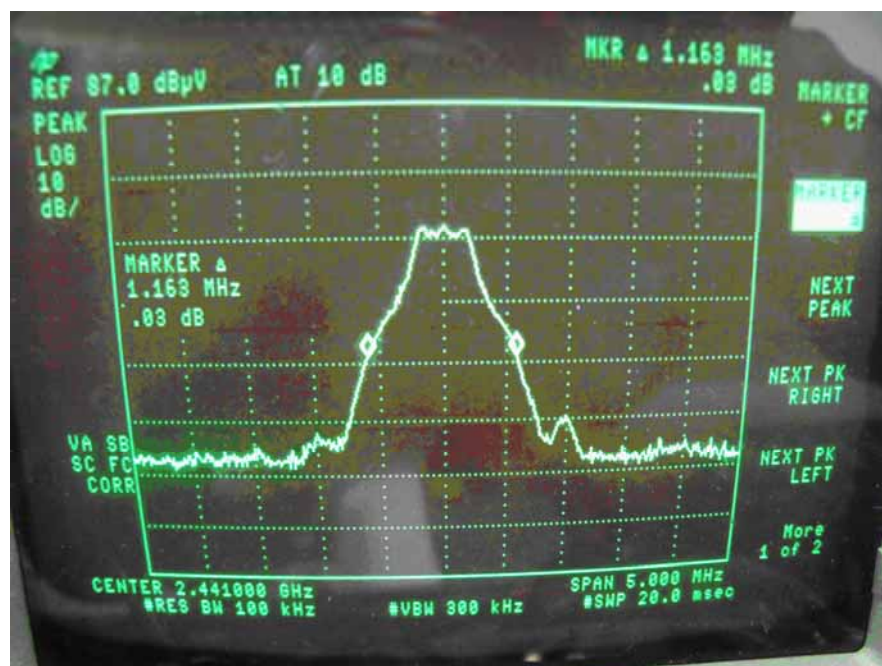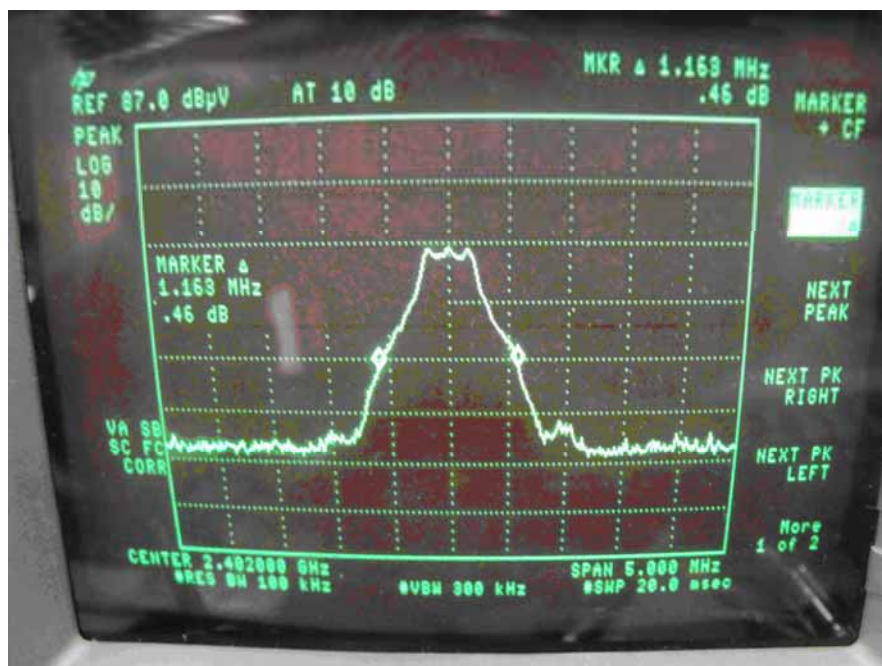


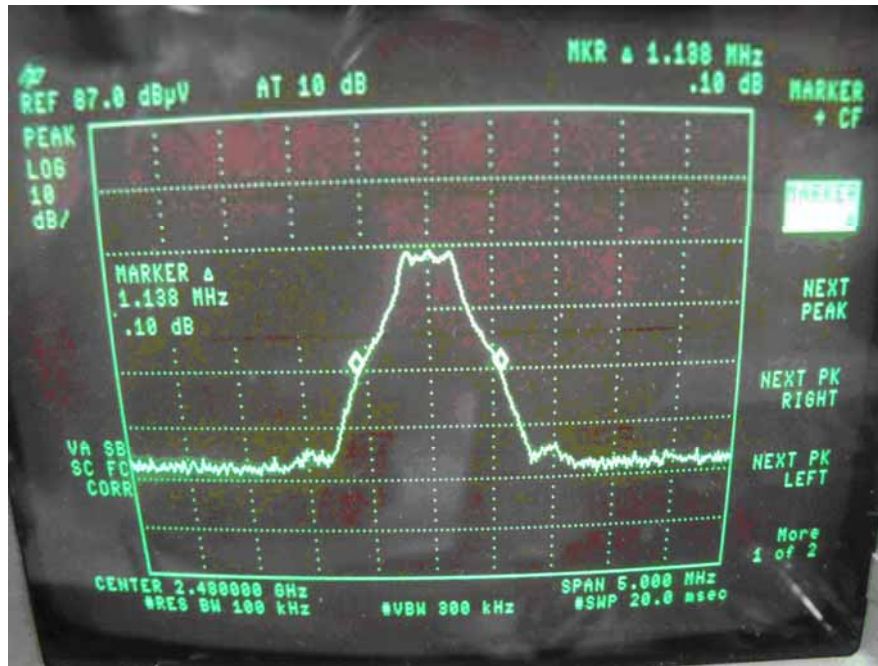



7.4.2. 99% Bandwidth test data Chart:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date:	03/25/2011
Test By:	Andy	Temperature:	28
Test Result:	PASS	Humidity:	65 %

Channel number	Channel frequency (MHz)	99% Down BW(kHz)
1	2402	962.5
40	2441	975
79	2480	1000

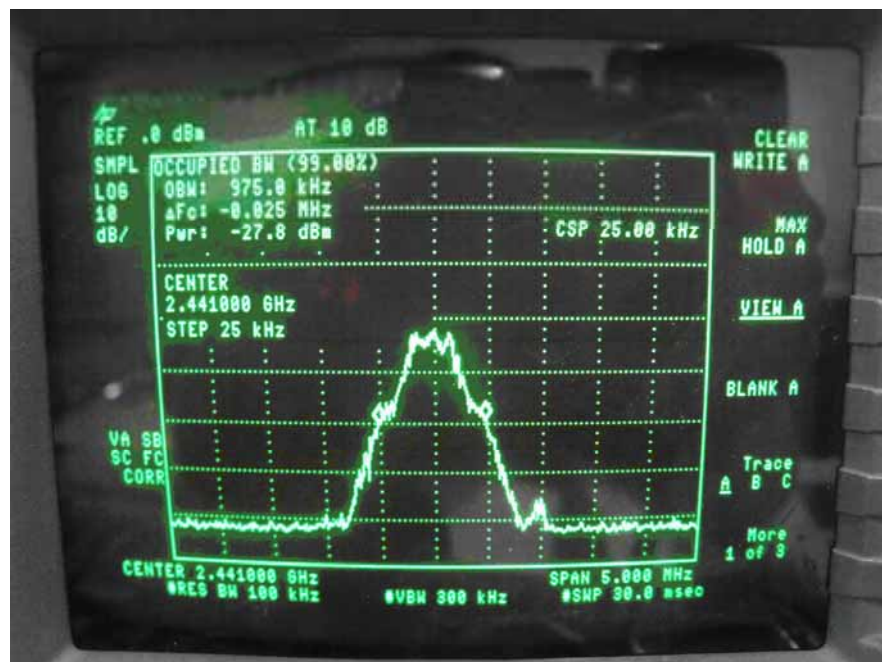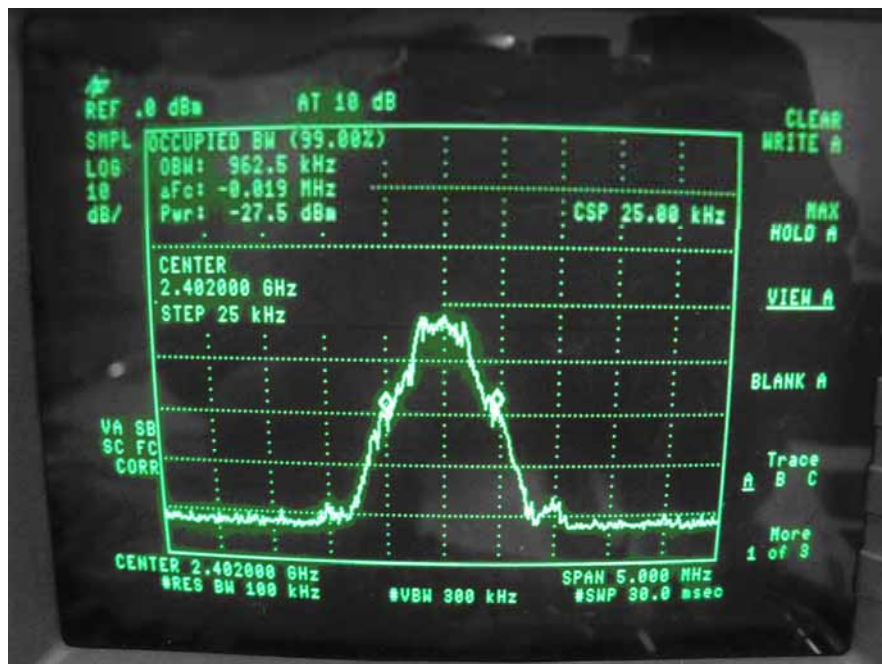

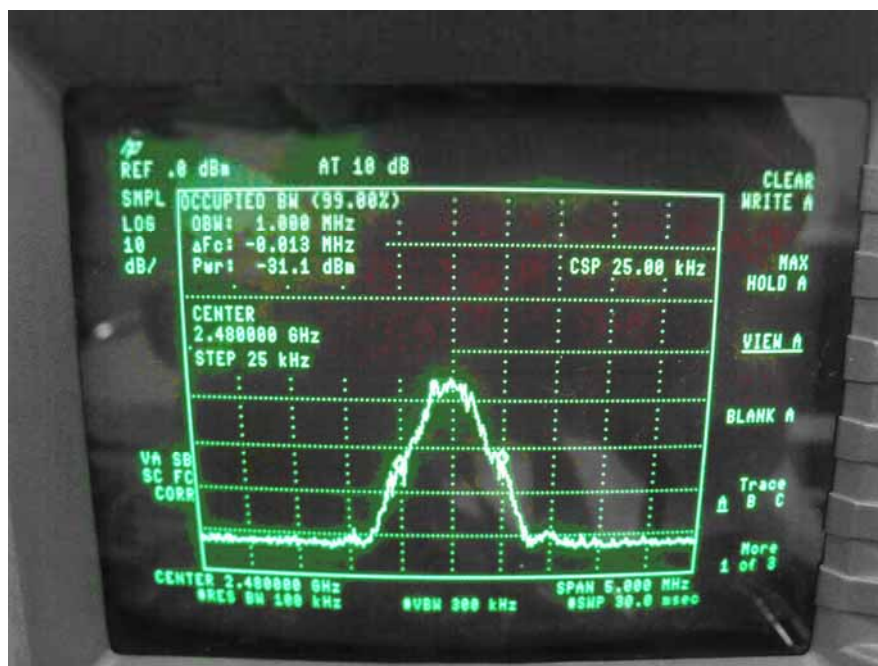


8. Quantity of Hopping Channel Test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:


Same as 4.3 Radiated Emission Measurement.

8.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	03/25/2011
Test By:	Andy	Temperature :	28
Test Result:	PASS	Humidity :	65 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	79

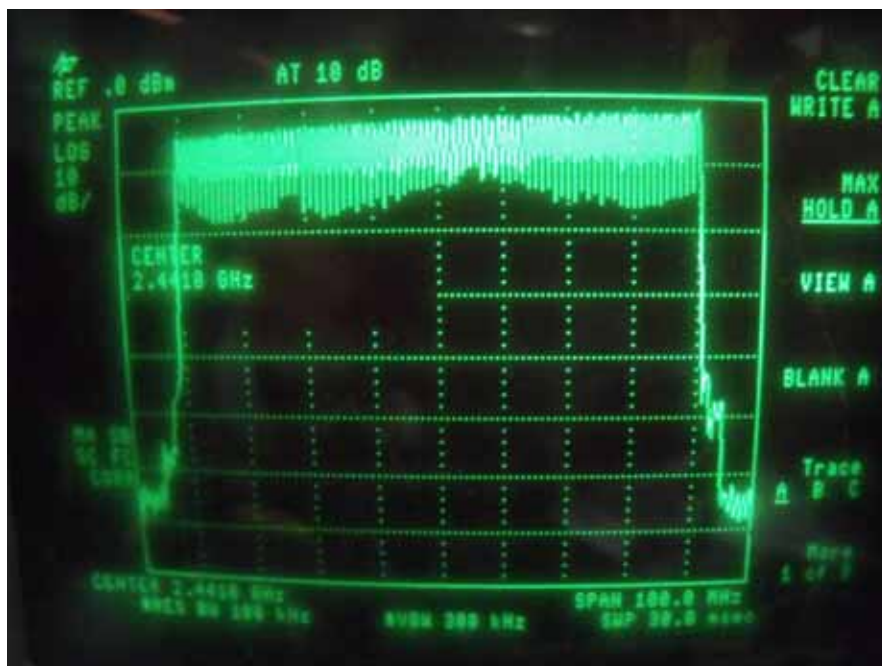


9. Time of Occupancy (Dwell Time) test

9.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:

Same as 4.3 Radiated Emission Measurement.


9.4 Measurement Results:

Refer to attached data chart.


Spectrum Detector:	PK	Test Date :	03/25/2011
Test By:	Andy	Temperature :	28
Test Result:	PASS	Humidity :	65 %

Mode	Number of transmission in a 31.6(79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	51(times/5 sec)*6.32=322.32 times	0.435	140.2092	400
DH3	26(times/5 sec)*6.32=164.32 times	0.862	141.6438	400
DH5	15(times/5 sec)*6.32=94.80 times	1.01	95.748	400


DH1

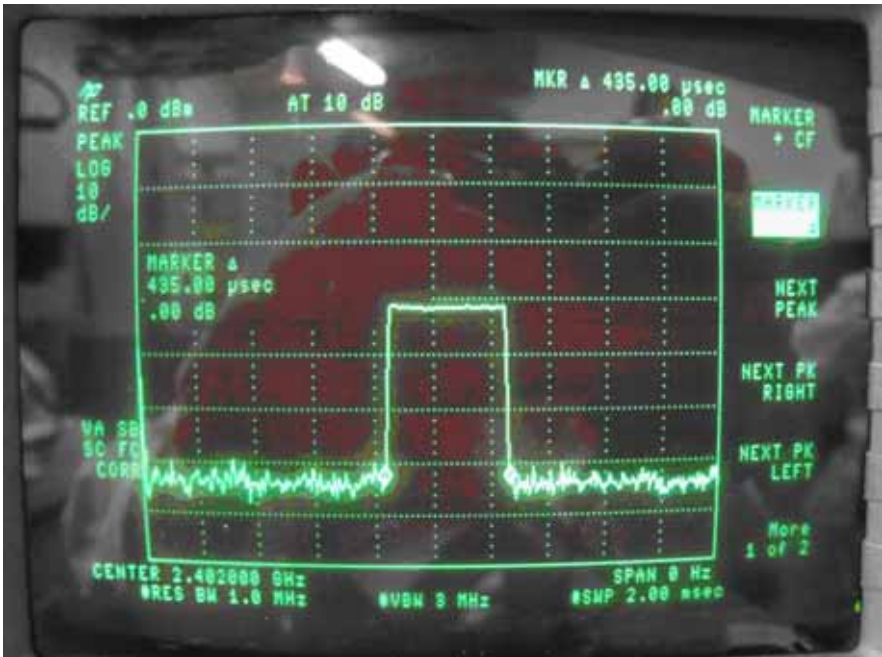

DH3

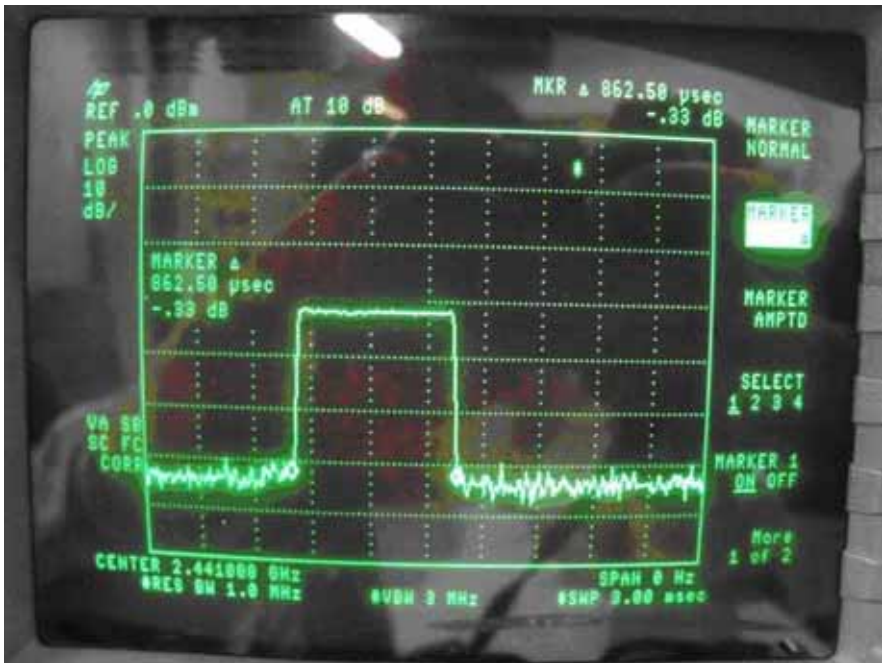

DH5

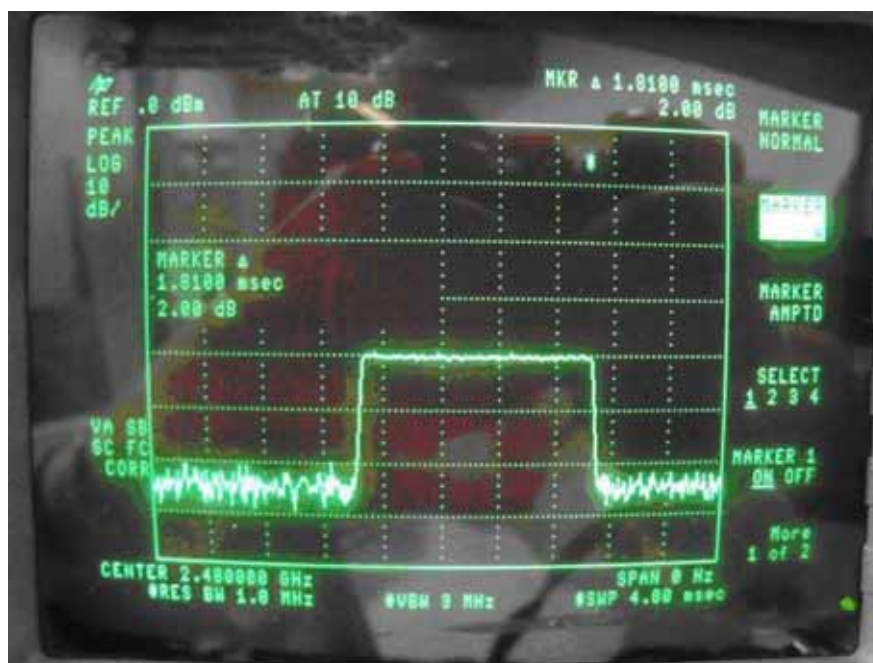


10. MAXIMUM PEAK OUTPUT POWER TEST

10.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

10.2 Test SET-UP (Block Diagram of Configuration)

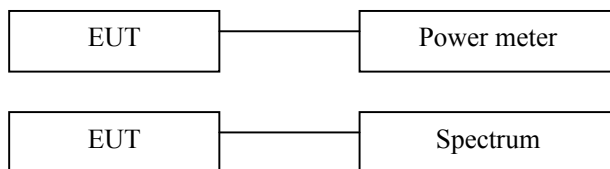

10.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2010	05/29/2011
Power meter	Boonton	4232A	29001	05/29/2010	05/29/2011
Power sensor	Boonton	51011-EMC	31184	05/29/2010	05/29/2011

10.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	03/25/2011
Test By:	Andy	Temperature :	28
Test Result:	PASS	Humidity :	65 %

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
1	2402.00	1.08	1.28	125	PASS
40	2441.00	1.22	1.32	125	PASS
79	2480.00	1.19	1.31	125	PASS

11. Band EDGE test

11.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

11.2 Test SET-UP (Block Diagram of Configuration)

As 5.2 Test set up (B) and (C)

11.3 Measurement Equipment Used:

Same as 5.3 Radiated Emission Measurement.

11.4 Measurement Results:

Spectrum Detector:	PK/AV	Test Date :	03/25/2011
Test By:	Andy	Temperature :	28
Test channel:	00	Humidity :	65 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2385.56	H	48.77	35.28	74	54
2384.78	V	49.26	36.33	74	54

Spectrum Detector:	PK/AV	Test Date :	03/25/2011
Test By:	Andy	Temperature :	28
Test channel:	78	Humidity :	65 %

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2484.78	H	51.03	38.54	74	54
2483.65	V	50.47	37.35	74	54

12. Antenna Port Emission

12.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/29/2010	05/29/2011

12.2 Measuring Instruments and setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

12.3 Test Procedures



The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels, The limit was determined by attenuation 20dB of the RF peak power output.


12.4 Block Diagram of Test setup



12.5 Test Result

PASS.

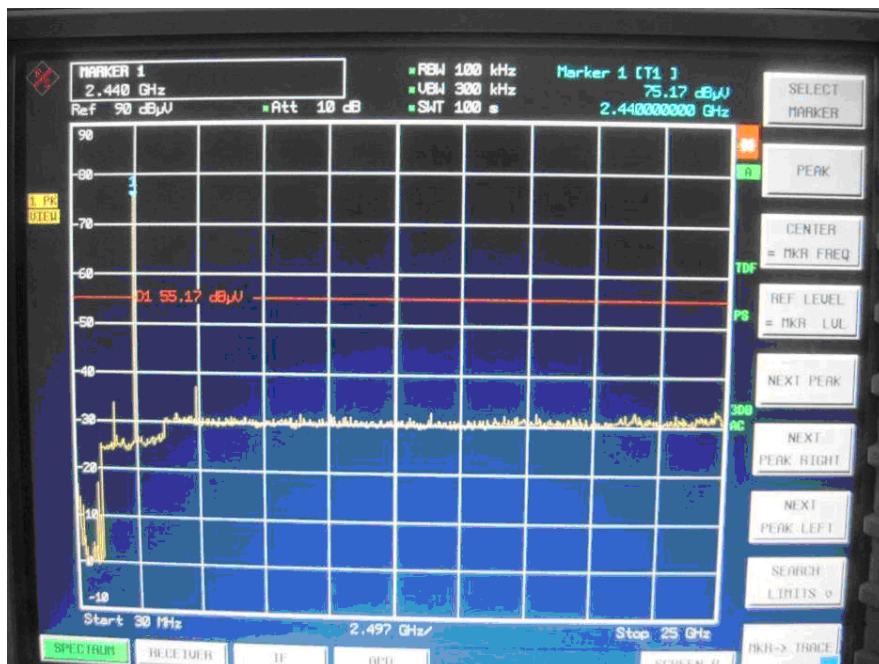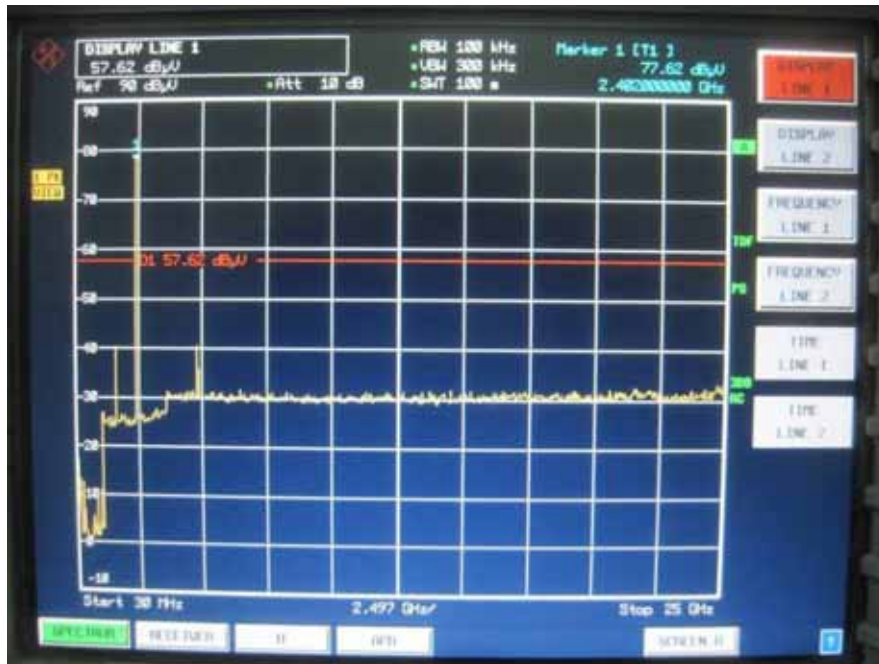

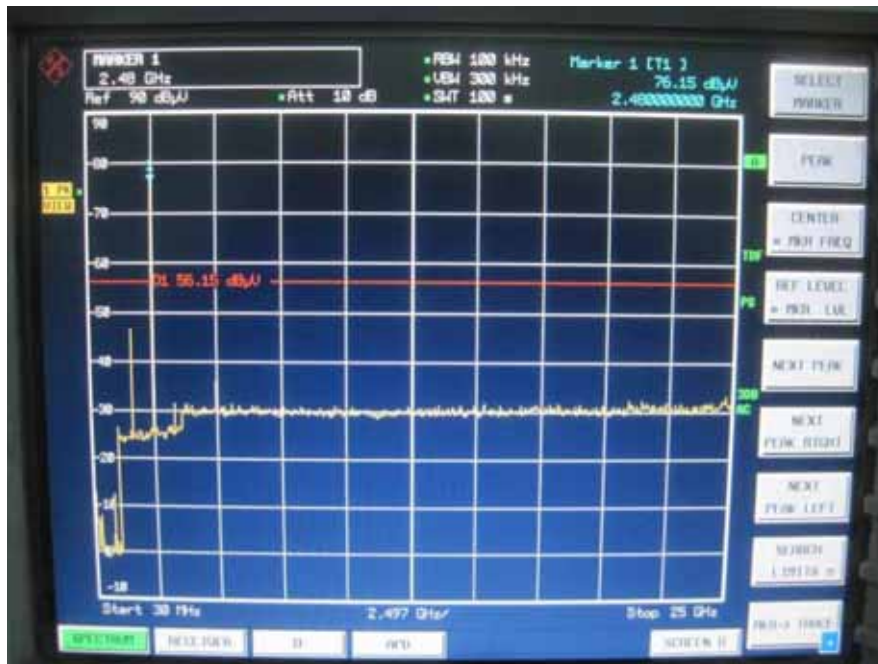

13. Antenna Application

13.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.240.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

13.2 Result

The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 0dBi and meets the requirement.