

**Nemko Test Report:** 132354-2TRFWL

**Applicant:** Imation Corp.  
1 Imation Way  
Oakdale, MN 55128-3414  
United States

**Apparatus:** WR700HP Wireless Headphone

**FCC ID:** PB4WR700HP

**In Accordance With:** FCC Part 15 Subpart C, 15.247  
FHSS System and Digitally Modulated Radiators  
902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz

**Authorized By:**   
Andrey Adelberg, Senior Wireless/EMC Specialist

**Date:** September 9, 2009

**Total Number of Pages:** 22

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>Section 1 : Report Summary .....</b>  | <b>3</b>  |
| <b>Section 2 : Equipment Under Test.....</b>   | <b>4</b>  |
| 2.1 Identification of Equipment Under Test (EUT).....  | 4         |
| 2.2 Accessories .....  | 4         |
| 2.3 EUT Description.....   | 4         |
| 2.4 Technical Specifications of the EUT .....  | 5         |
| 2.5 EUT Setup diagram .....  | 5         |
| 2.6 Operation of the EUT during testing .....  | 6         |
| 2.7 Modifications incorporated in the EUT .....  | 6         |
| <b>Section 3 : Test Conditions .....</b>   | <b>7</b>  |
| 3.1 Specifications .....   | 7         |
| 3.2 Deviations From Laboratory Test Procedures .....   | 7         |
| 3.3 Test Environment .....   | 7         |
| 3.4 Measurement Uncertainty.....   | 7         |
| 3.5 Test Equipment.....  | 8         |
| <b>Section 4 : Results Summary .....</b>   | <b>9</b>  |
| 4.1 FCC Part 15 Subpart C : Test Results .....   | 9         |
| <b>Appendix A : Test Results.....</b>  | <b>10</b> |
| Clause 15.209(a) Radiated Emissions within Restricted Bands .....  | 10        |
| Clause 15.247(a)(2) Minimum 6 dB Bandwidth .....   | 14        |
| Clause 15.247(b)(3) Maximum peak output power of systems using digital modulation in the 902–928 MHz,<br>2400–2483.5 MHz, and 5725–5850 MHz bands..... | 16        |
| Clause 15.247(b)(4) Maximum peak output power .....  | 16        |
| Clause 15.247(d) Radiated Emissions Not in Restricted Bands .....  | 18        |
| Clause 15.247(e) Power Spectral Density for Digitally Modulated Devices.....   | 19        |
| <b>Appendix B : Setup Photographs .....</b>  | <b>21</b> |
| <b>Appendix C : Block Diagram of Test Setups.....</b>  | <b>22</b> |

## Section 1 : Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C. Radiated tests were conducted in accordance with ANSI C63.4-2003.

The assessment summary is as follows:

|                                |   |
|--------------------------------|---|
| <b>Apparatus Assessed:</b>     | WR700HP Wireless Headphone  |
| <b>Specification:</b>          | FCC Part 15 Subpart C, 15.247                                     |
| <b>Compliance Status:</b>      | Complies  |
| <b>Exclusions:</b>             | None  |
| <b>Non-compliances:</b>        | None  |
| <b>Report Release History:</b> | Original Release  |
| <b>Test Location:</b>          | Nemko Canada Inc.<br>303 River Road<br>Ottawa, Ontario<br>K1V 1H2 |
| <b>Registration Number:</b>    | 176392 (3 m Semi-Anechoic Chamber)                                |
| <b>Tests Performed By:</b>     | Kevin Ma, Wireless/EMC Specialist                                 |
| <b>Test Dates:</b>             | August 25 to August 27, 2009                                      |

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

---

## Section 2 : Equipment Under Test

### 2.1 Identification of Equipment Under Test (EUT)

The following information identifies the EUT under test:

|                       |                    |
|-----------------------|--------------------|
| Type of Equipment:    | Wireless Headphone |
| Brand Name:           | TDK LoR            |
| Model Name or Number: | WR700HP            |
| Serial Number:        | N/A                |
| Nemko Sample Number:  | 2                  |
| FCC ID:               | PB4WR700HP         |
| Date of Receipt:      | August 25, 2009    |

### 2.2 Accessories

No accessories were used to exercise the EUT during testing.


### 2.3 EUT Description

Portable transceiver operates at 2.4–2.4835 GHz ISM band.

## 2.4 Technical Specifications of the EUT

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| <b>Operating Band:</b>            | 2400–2483.5 MHz                   |
| <b>Operating Frequency:</b>       | 2403–2478 MHz                     |
| <b>Modulation:</b>                | MSK                               |
| <b>Occupied Bandwidth:</b>        | 1.58 MHz                          |
| <b>Emission Designator:</b>       | 1M58G1D                           |
| <b>Channel Number:</b>            | 16                                |
| <b>Antenna Data:</b>              | Ceramic chip antenna max. 1.5 dBi |
| <b>Power Supply Requirements:</b> | 3 VDC 2x “AAA” type Batteries     |

## 2.5 EUT Setup diagram

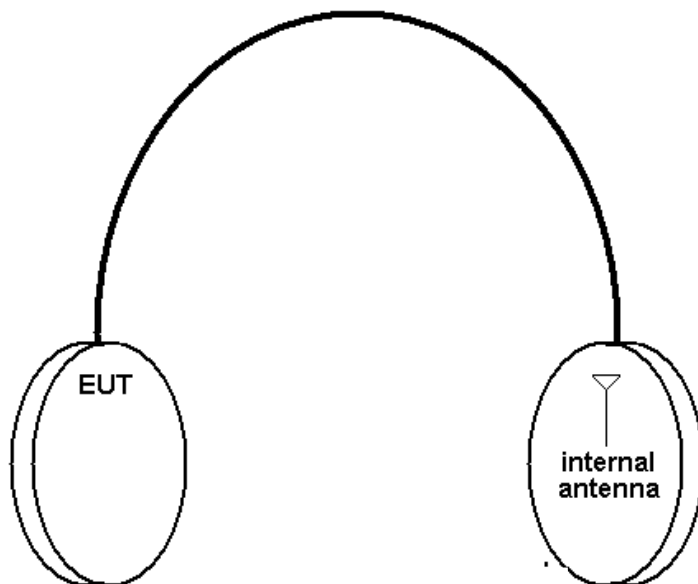

## **2.6 Operation of the EUT during testing**

The EUT has been controlled from PC to transmit constantly at the low, mid and high channel.

## **2.7 Modifications incorporated in the EUT**

There were no modifications performed to the EUT during this assessment.

## **Section 3 : Test Conditions**

### **3.1 Specifications**

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart C, 15.247

FHSS System and Digitally Modulated Radiators

902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz

### **3.2 Deviations From Laboratory Test Procedures**

No deviations were made from laboratory test procedures.

### **3.3 Test Environment**

All tests were performed under the following environmental conditions:

|                    |   |                        |
|--------------------|---|------------------------|
| Temperature range  | : | 15–30 °C               |
| Humidity range     | : | 20–75 %                |
| Pressure range     | : | 86–106 kPa             |
| Power supply range | : | ±5 % of rated voltages |

### **3.4 Measurement Uncertainty**

Nemko Canada measurement uncertainty has been calculated using guidance of UKAS LAB 34:2003 and TIA-603-B Nov 7, 2002. All calculations have been performed to provide a confidence level of 95 % and can be found in Nemko Canada document MU-003.

### 3.5 Test Equipment

| Equipment                  | Manufacturer     | Model No.    | Asset/Serial No. | Cal. Date  | Next Cal.  |
|----------------------------|------------------|--------------|------------------|------------|------------|
| 3 m EMI Test Chamber       | TDK              | SAC-3        | FA002047         | May 06/09  | May 06/10  |
| Bilog                      | Sunol            | JB3          | FA002108         | Jan. 27/09 | Jan. 27/10 |
| Flush Mount Turntable      | Sunol            | FM2022       | FA002082         | NCR        | NCR        |
| Controller                 | Sunol            | SC104V       | FA002060         | NCR        | NCR        |
| Mast                       | Sunol            | TLT2         | FA002061         | NCR        | NCR        |
| International Power Supply | California Inst. | 3001i        | FA001021         | Jan. 13/09 | Jan. 13/10 |
| Receiver/Spectrum Analyzer | Rohde & Schwarz  | ESU 26       | FA002043         | Dec. 16/08 | Dec. 16/09 |
| Horn Antenna #2            | EMCO             | 3115         | FA000825         | Jan. 21/09 | Jan. 21/10 |
| 1 – 18 GHz Amplifier       | JCA              | JCA118-503   | FA002091         | Oct 2/08   | Oct 2/09   |
| Receiver/Spectrum Analyzer | Rohde & Schwarz  | ESU 40       | FA002071         | Nov. 25/08 | Nov. 25/09 |
| Horn 18 – 26.5 GHz         | Electro-Metrics  | SH-50/60-1   | FA000479         | COU        | COU        |
| 18.0 – 26.0 GHz Amplifier  | NARDA            | BBS-1826N612 | FA001550         | COU        | COU        |
| Frequency Counter          | HP               | 5352B        | FA001915         | Jan 08/09  | Jan 08/10  |
| Multimeter                 | Fluke            | 16           | FA001831         | Jan 13/09  | Jan 13/10  |
| Attenuator                 | Narda            | 776B-20      | FA001153         | COU        | COU        |

COU – Calibrate on Use

NCR – No Calibration Required



## Section 4 : Results Summary

This section contains the following:

### FCC Part 15 Subpart C : Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N No : not applicable / not relevant.

Y Yes : Mandatory i.e. the apparatus shall conform to these tests.

N/T Not Tested, mandatory but not assessed. (See Report Summary)

### 4.1 FCC Part 15 Subpart C : Test Results

| Part 15           | Test Description   | Required | Result |
|-------------------|--|----------|--------|
| 15.31(e)          | Variation of power supply  | N        | PASS   |
| 15.207(a)         | Powerline Conducted Emissions  | N        |        |
| 15.209(a)         | Radiated Emissions within Restricted Bands   | Y        |        |
| 15.247(a)(1)      | Frequency hopping systems  | N        | PASS   |
| 15.247(a)(1)(i)   | Frequency hopping systems operating in the 902–928 MHz band  | N        |        |
| 15.247(a)(1)(ii)  | Frequency hopping systems operating in the 5725–5850 MHz band  | N        |        |
| 15.247(a)(1)(iii) | Frequency hopping systems operating in the 2400–2483.5 MHz band  | N        | PASS   |
| 15.247(a)(2)      | Minimum 6 dB Bandwidth   | Y        |        |
| 15.247(b)(1)      | Maximum peak output power of Frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band        | N        |        |
| 15.247(b)(2)      | Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band                                   | N        | PASS   |
| 15.247(b)(3)      | Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands | Y        |        |
| 15.247(b)(4)      | Maximum peak output power  | Y        |        |
| 15.247(c)(1)      | Fixed point-to-point Operation with directional antenna gains greater than 6 dBi   | N        | PASS   |
| 15.247(c)(2)      | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams                                    | N        |        |
| 15.247(d)         | Radiated Emissions Not in Restricted Bands   | Y        |        |
| 15.247(e)         | Power Spectral Density for Digitally Modulated Devices   | Y        | PASS   |
| 15.247(f)         | Time of Occupancy for Hybrid Systems   | N        |        |

## Appendix A : Test Results

### Clause 15.209(a) Radiated Emissions within Restricted Bands

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength      |                              | Measurement Distance<br>(meters) |
|--------------------|---------------------|------------------------------|----------------------------------|
|                    | ( $\mu\text{V/m}$ ) | ( $\text{dB}\mu\text{V/m}$ ) |                                  |
| 0.009–0.490        | 2400/F              | $67.6-20\log(F)$             | 300                              |
| 0.490–1.705        | 24000/F             | $87.6-20\log(F)$             | 30                               |
| 1.705–30.0         | 30                  | 29.5                         | 30                               |
| 30–88              | 100                 | 40.0                         | 3                                |
| 88–216             | 150                 | 43.5                         | 3                                |
| 216–960            | 200                 | 46.0                         | 3                                |
| Above 960          | 500                 | 54.0                         | 3                                |

Note: F = fundamental frequency in kHz

**Test Results:** Pass

#### Additional Observations:

The Spectrum was searched from 30 MHz to the 10<sup>th</sup> Harmonic.

These results apply to emissions found in the restricted bands defined in FCC Part 15 Subpart C, 15.205.

Fresh batteries were used throughout all tests.

All measurements were performed at the distance of 3 m. Peak detector was used with 100 kHz RBW/300 kHz VBW below 1 GHz and 1 MHz/3 MHz RBW/VBW above 1 GHz.

The EUT was measured on three orthogonal axis.



**Nemko Canada Inc.**

APPENDIX A : TEST RESULTS


Report Number: 132354-2TRFWL

Specification: FCC Part 15 Subpart C, 15.247

| Channel | Freq.<br>MHz | Pol. | Peak Field<br>Strength<br>dB $\mu$ V/m | Peak<br>Limit<br>dB $\mu$ V/m | Margin<br>dB | Average<br>Factor<br>dB | Average<br>Field<br>Strength<br>dB $\mu$ V/m | Average<br>Limit<br>dB $\mu$ V/m | Margin<br>dB |
|---------|--------------|------|--|-------------------------------|--------------|-------------------------|--|----------------------------------|--------------|
| 0       | 2183.6       | V    | 45.6                                   | 74.00                         | 28.4         | -33.47                  | 12.13  | 54.00                            | 41.87        |
| 0       | 2183.6       | H    | 50.5                                   | 74.00                         | 23.5         | -33.47                  | 17.03  | 54.00                            | 36.97        |
| 0       | 4804.4       | V    | 55.4                                   | 74.00                         | 18.6         | -33.47                  | 21.93  | 54.00                            | 32.07        |
| 0       | 4804.4       | H    | 54.9                                   | 74.00                         | 19.1         | -33.47                  | 21.43  | 54.00                            | 32.57        |
| 7       | 2216.4       | V    | 51.0                                   | 74.00                         | 23.0         | -33.47                  | 17.53  | 54.00                            | 36.47        |
| 7       | 2216.4       | H    | 55.0                                   | 74.00                         | 19.0         | -33.47                  | 21.53  | 54.00                            | 32.47        |
| 7       | 4876.0       | V    | 51.7                                   | 74.00                         | 22.3         | -33.47                  | 18.23  | 54.00                            | 35.77        |
| 7       | 4876.0       | H    | 50.5                                   | 74.00                         | 23.5         | -33.47                  | 17.03  | 54.00                            | 36.97        |
| 15      | 2252.0       | V    | 51.0                                   | 74.00                         | 23.0         | -33.47                  | 17.53  | 54.00                            | 36.47        |
| 15      | 2252.0       | H    | 58.2                                   | 74.00                         | 15.8         | -33.47                  | 24.73  | 54.00                            | 29.27        |
| 15      | 4957.6       | V    | 57.8                                   | 74.00                         | 16.2         | -33.47                  | 24.33  | 54.00                            | 29.67        |
| 15      | 4957.6       | H    | 55.5                                   | 74.00                         | 18.5         | -33.47                  | 22.03  | 54.00                            | 31.97        |


Note: Antenna Factor, cable loss and amplifier gain are included in the Peak Field Strength result.

## Duty Cycle: Transmission On Time

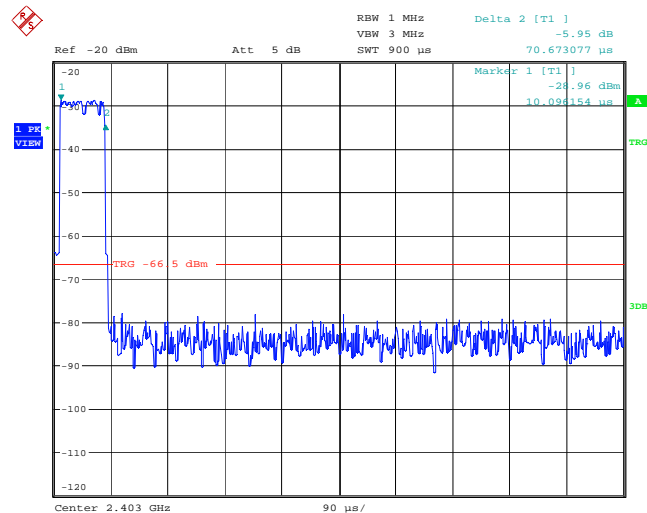

Date: 26.AUG.2009 12:43:03

## Transmission within 10 ms

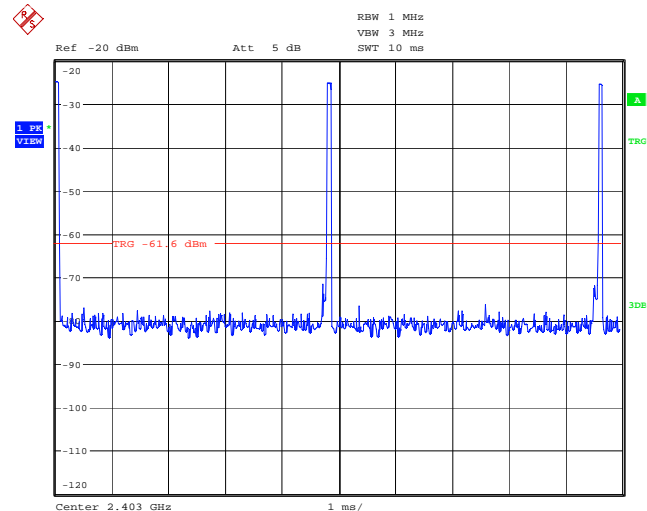


Date: 26.AUG.2009 12:51:33

| $T_{ON}$ (µs) | Maximum Number of pulses within 10 ms | Maximum Number of pulses within 100 ms | $T_{ON}$ (ms) within 100 ms | Average factor (dB) |
|---------------|---------------------------------------|--|-----------------------------|---------------------|
| 70.67         | 3                                     | 30                                     | 2.12                        | -33.47              |

Duty Cycle Correction (Average Factor) =  $20 \log_{10}(T_{ON} / 100 \text{ ms}) =$   
 $20 \log_{10}(2.12 \text{ ms} / 100 \text{ ms}) = -33.47 \text{ dB}$

## Delta Marker Measurement for 2.4835 GHz Band Edge

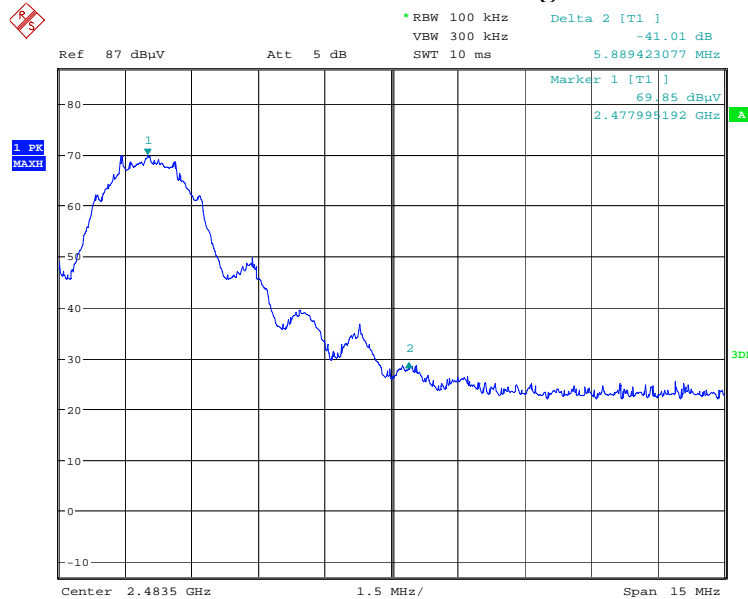

Date: 28.AUG.2009 13:05:43

Measured Field Strength for High Channel in 1 MHz RBW = 98.15 dBμV/m

Delta Marker = -41.01 dB

Therefore, Peak Field Strength = 98.15 dBμV/m - 41.01 dB = 57.14 dBμV/m

Limit = 74 dBμV/m

Average Field Strength = 57.14 dBμV/m - 33.47 dB (Duty Cycle) = 23.67 dBμV/m

Limit = 54 dBμV/m

| Peak Field Strength (dBμV/m)    | Peak Field Strength Limit (dBμV/m)    | Margin (dB) |
|---------------------------------|---------------------------------------|-------------|
| 57.14                           | 74.00                                 | 16.86       |
| Average Field Strength (dBμV/m) | Average Field Strength Limit (dBμV/m) | Margin (dB) |
| 23.67                           | 54.00                                 | 30.33       |

### Clause 15.247(a)(2) Minimum 6 dB Bandwidth


Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

**Test Results:** Pass

### 6 dB Bandwidth:


| Channel | 6 dB BW, MHz | Limit, MHz | Margin, MHz |
|---------|--------------|------------|-------------|
| Low     | 1.514        | 0.5        | 1.014       |
| Mid     | 1.587        | 0.5        | 1.087       |
| High    | 1.434        | 0.5        | 0.934       |

6 dB BW on Low channel:

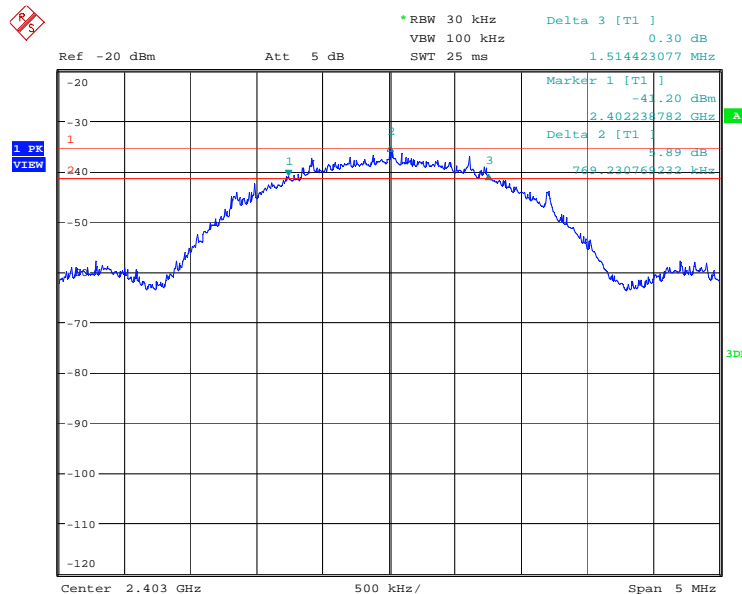


Date: 27.AUG.2009 09:20:38

6 dB BW on Mid channel:

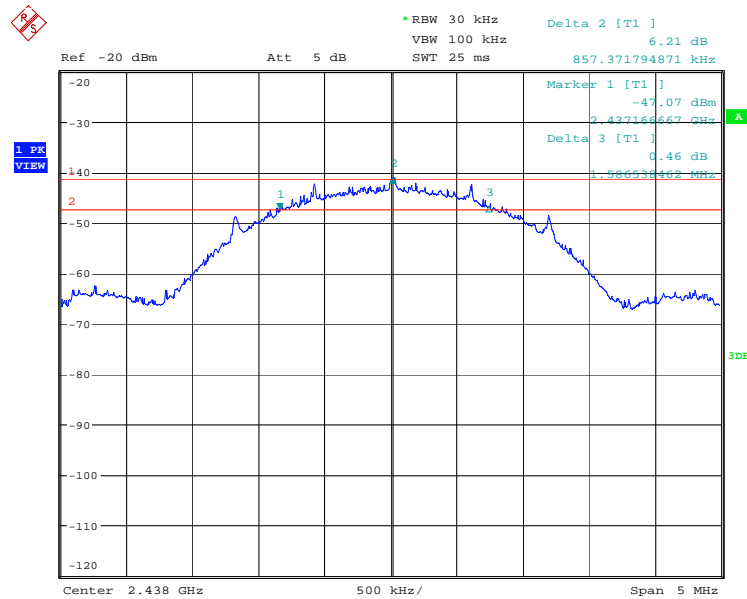

Date: 27.AUG.2009 09:01:38

6 dB BW on High channel:

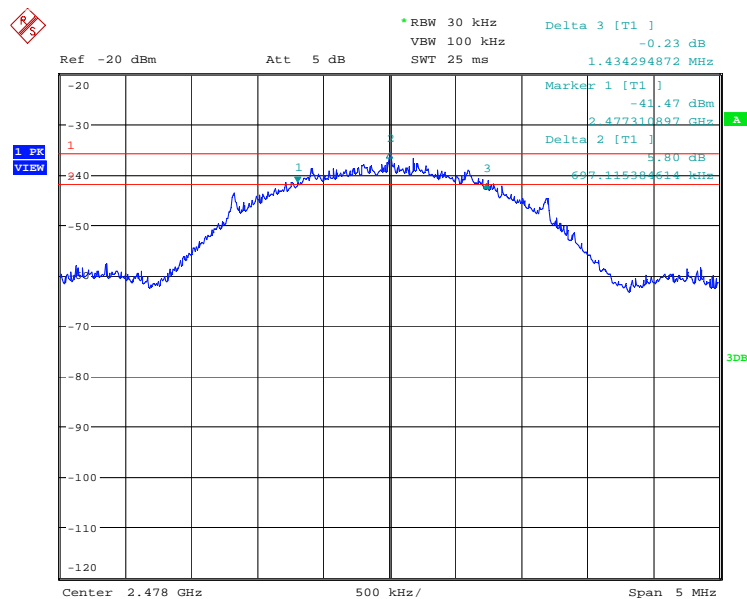

Date: 27.AUG.2009 09:08:43

---

**Clause 15.247(b)(3) Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands**

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 W. As an alternative to a peak power measurement, compliance with the 1 W limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

**Clause 15.247(b)(4) Maximum peak output power**

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Test Results:** Pass

The output power tested radiated using peak detector of the spectrum analyzer and 10 MHz/10 MHz of RBW/VBW at the distance of 3 meter.

Fresh batteries were used throughout all tests.



**Radiated Output Power:**

| Chan. | Freq.<br>MHz | Pol. | Ant.<br>Type | Peak Field Strength<br>dBμV/m | Conducted Output power<br>dBm | Conducted Power Limit<br>dBm | Margin<br>dB |
|-------|--------------|------|--------------|-------------------------------|-------------------------------|------------------------------|--------------|
| 0     | 2403.0       | V    | Horn         | 99.24                         | 2.51                          | 30.00                        | 27.49        |
| 0     | 2403.0       | H    | Horn         | 99.91                         | 3.18                          | 30.00                        | 26.82        |
| 7     | 2438.0       | V    | Horn         | 100.88                        | 4.15                          | 30.00                        | 25.85        |
| 7     | 2438.0       | H    | Horn         | 102.59                        | 5.78                          | 30.00                        | 24.22        |
| 15    | 2478.0       | V    | Horn         | 98.99                         | 2.26                          | 30.00                        | 27.74        |
| 15    | 2478.0       | H    | Horn         | 99.08                         | 2.35                          | 30.00                        | 27.65        |

$$E \text{ (V/m)} = \frac{10^{(FS/20)}}{1 \times 10^6} = \left( 10^{\left( \frac{102.59}{20} \right)} \right) \times 10^{-6} = 0.1334 \text{ V/m}$$

$$G \text{ (numeric)} = 10^{(Ag/10)} = 10^{\left( \frac{1.5}{10} \right)} = 1.41$$

$$P \text{ (W)} = \frac{E^2 R^2}{30G} = 0.003786 \text{ W} = 3.786 \text{ mW}$$

FS = Field Strength (dBμV/m)

Ag = Antenna gain (dBi)

E = Measured Value (V/m)

R = Measurement distance (m)

G = Antenna Gain (numeric)

P = Output power (W)

$$\text{Output Power (dBm)} = 10 \times \log(\text{Output Power (mW)}) = 10 \times \log(3.786) = 5.78 \text{ dBm}$$

$$\text{Conducted Output Power Limit} = 30 \text{ dBm}$$

$$\text{EIRP: Conducted Output power} + \text{antenna Gain} = 5.78 + 1.5 = 7.28 \text{ dBm.}$$

$$\text{EIRP limit} = 36 \text{ dBm.}$$

### Clause 15.247(d) Radiated Emissions Not in Restricted Bands

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**Test Results:** Pass

### Additional Observations:


The Spectrum was searched from 30 MHz to the 10<sup>th</sup> Harmonic.

Fresh batteries were used throughout all tests.

These results apply to emissions found not in the restricted bands defined in FCC Part 15 Subpart C, 15.205.

No emissions were found less than 20 dB below the fundamental emission with 100 kHz RBW/300 kHz VBW.

### Lower Band Edge:

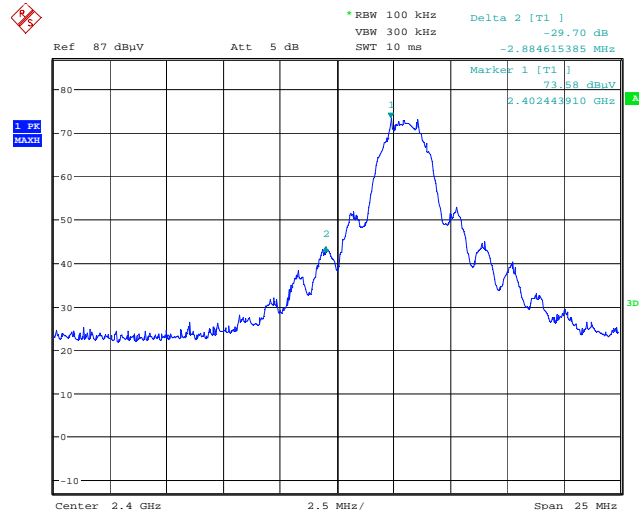

Date: 28.AUG.2009 13:03:52

**Clause 15.247(e) Power Spectral Density for Digitally Modulated Devices**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

**Test Results:** Pass

| Channel | Freq.<br>MHz | Peak Field Strength<br>dBμV/m/3 kHz | Conducted spectral Density<br>dBm/3 kHz | Spectral Density Limit<br>dBm/3 kHz | Margin<br>dB |
|---------|--------------|-------------------------------------|---|-------------------------------------|--------------|
| 0       | 2403         | 82.62                               | -14.11                                  | 8.00                                | 22.11        |
| 7       | 2438         | 91.45                               | -5.27                                   | 8.00                                | 13.27        |
| 15      | 2478         | 88.57                               | -8.16                                   | 8.00                                | 16.16        |

**Sample calculation for Mid channel:**

$$E \text{ (V/m/3 kHz)} = \frac{10^{(FS/20)}}{1 \times 10^6} = 0.03737 \text{ V/m/3 kHz}$$

$$G \text{ (numeric)} = 10^{(Ag/10)} = 10^{\left(\frac{1.5}{10}\right)} = 1.41$$

$$P \text{ (W/3 kHz)} = \frac{E^2 R^2}{30G} = 0.00029713 \text{ W/3 kHz} = 0.29713 \text{ mW/3 kHz}$$

FS = Field Strength (dBμV/m/3 kHz)

Ag = Antenna gain (dBi)

E = Measured Value (V/m/3 kHz)

R = Measurement distance (m)


G = Antenna Gain (numeric)

P = Spectral power Density (W/3 kHz)


$$\text{Spectral Power Density (dBm/3 kHz)} = 10 \times \log(0.29713) = -5.27 \text{ dBm/3 kHz}$$

Notes: Fresh batteries were used throughout all tests.

### Power Spectral Density on Low channel:

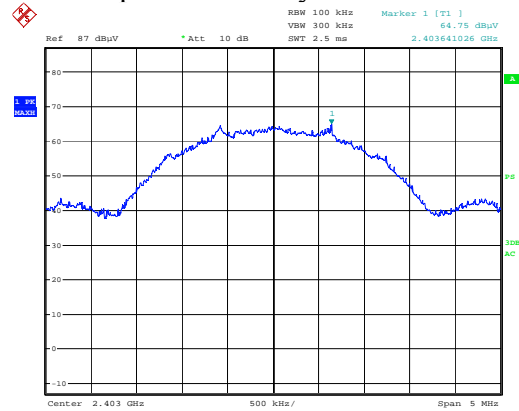


Date: 27.AUG.2009 11:09:21

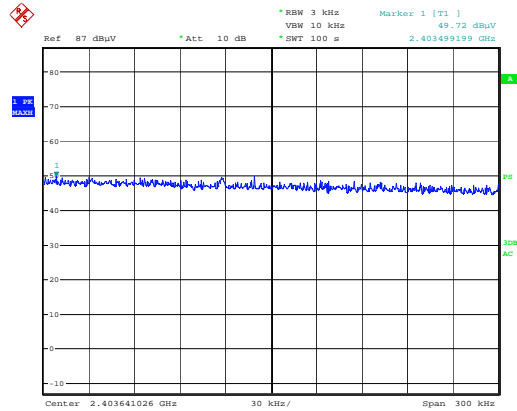


Date: 27.AUG.2009 11:12:23

### Power Spectral Density on Mid channel:

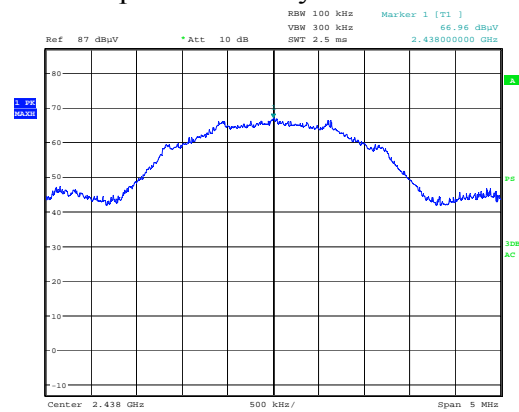


Date: 27.AUG.2009 10:49:02

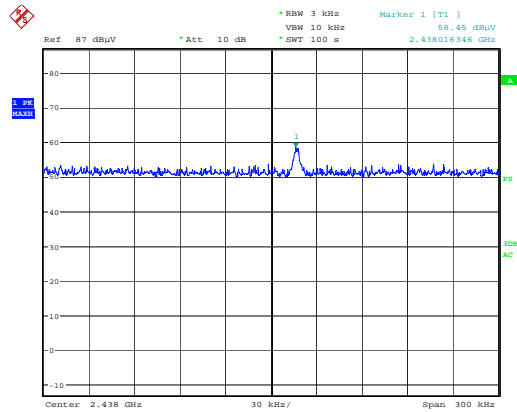


Date: 27.AUG.2009 10:52:54

### Power Spectral Density on High channel:

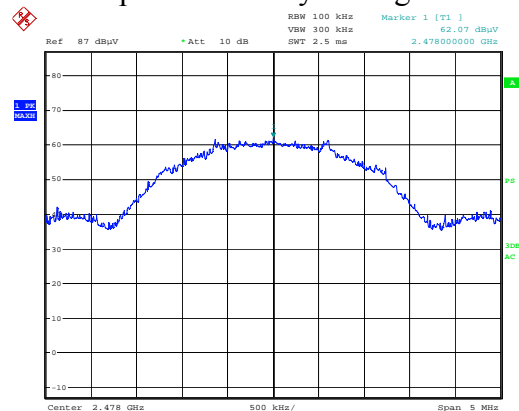


Date: 27.AUG.2009 12:12:03

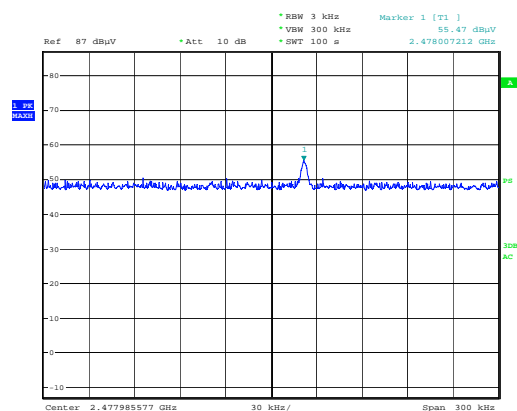

Date: 27.AUG.2009 10:35:38

## Appendix B : Setup Photographs

### Spurious Emissions Setup:

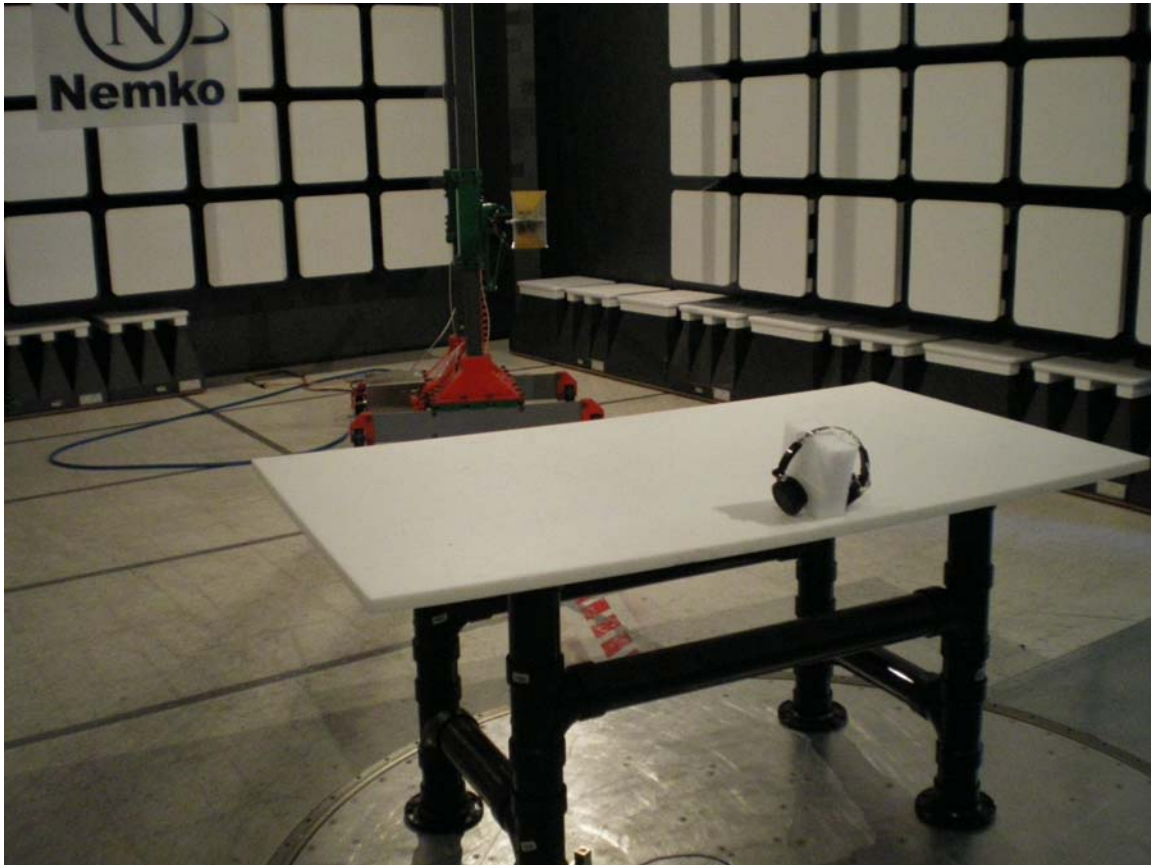

## Appendix C : Block Diagram of Test Setups

### Radiated Emissions above 30 MHz Test Site

