



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test report file number : E016R-030

Applicant : SAROTECH CO., LTD.
Address : Hangang Bldg. 1549-7, Seocho-Dong, Seocho-Ku, Seoul, 137-070, Korea

Manufacturer : SAROTECH CO., LTD.
Address : Hangang Bldg. 1549-7, Seocho-Dong, Seocho-Ku, Seoul, 137-070, Korea

Type of Equipment : External Bridge Adapter

FCC ID : PBCBA-01U

Model / Type No. : BA-01U

Serial number : N/A

Total page of Report : 13 pages (including this page)

Date of Incoming : May 03, 2001

Date of issuing : June 19, 2001

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, Class B**.

This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production.

Reviewed by:


Y. K. Kwon / Chief Engineer
EMC Dept.
ONETECH Corp.

Approved by:


S. S. Hong / Managing Director
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 RELATED SUBMITTAL(S) / GRANT(S)	4
2.3 TEST SYSTEM DETAILS.....	5
2.4 TEST METHODOLOGY	5
2.5 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION.....	6
3.2 EUT EXERCISE SOFTWARE.....	6
3.3 CABLE DESCRIPTION	6
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS	7
3.6 CONFIGURATION OF TEST SYSTEM.....	7
4. PRELIMINARY TEST	8
4.1 AC POWER LINE CONDUCTED EMISSION TEST	8
4.2 RADIATED EMISSION TEST	8
5. FINAL RESULT OF MEASURMENT.....	9
5.1 CONDUCTED EMISSION TEST	9
5.2 RADIATED EMISSION TEST	11
6. FIELD STRENGTH CALCULATION	12
7. LIST OF TEST EQUIPMENT	13



1. VERIFICATION OF COMPLIANCE

APPLICANT : SAROTECH CO., LTD.
ADDRESS : Hangang Bldg. 1549-7, Seocho-Dong, Seocho-Ku, Seoul, 137-070, Korea
CONTACT PERSON : Mr. Chung-Young, So / Manager
TELEPHONE NO : +82-2-585-4501
FCC ID : PBCBA-01U
MODEL NO/NAME : BA-01U
SERIAL NUMBER : N/A
DATE : June 19, 2001

DEVICE TYPE	Peripheral Device for Class B Computing Device - Unintentional Radiator
E.U.T. DESCRIPTION	External Bridge Adapter
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR 47 PART 15 §15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The SAROTECH CO., LTD., Model BA-01U (referred to as the EUT in this report) is an External Bridge Adapter, which shall be connected between a USB port on a personal computer and another external device for data transmission. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	48MHz on the Main Board
NUMBER OF LAYERS	Main Board: 2Layers
ELECTRICAL RATING	DC 5V supplied by a USB port on personal computer
EXTERNAL TERMINALS	One External Connecter (36Pin)

Model Differences

None

2.2 Related Submittal(s) / Grant(s)

Original submittal only



2.3 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
BA-01U	SAROTECH CO., LTD.	PBCBA-01U	External Bridge Adapter (EUT)	-
DCM	DEL Computer	DoC	PC	-
6550-23N	SONY	DoC	MONITOR	PC
NOTE-CD	SAROTECH	PBCNOTE-CD	CD-ROM	EUT
OK-720	A4-TECH	DoC	MOUSE	PC
5123W	Behavior Tech.	E5XKBP104M10	KEYBOARD	PC
2225C	HP	DSI6XU2225	PRINTER	PC
020-0470	CARDINAL	GDE0196	MODEM	PC

2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 12, 1999. (Registration Number: 92819)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	SAROTECH CO., LTD.	BA-01U	N/A

3.2 EUT exercise Software

The windows program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. This program was included into HOST. The series of H characters are displayed on the monitor until the screen is completely full and some data from CD-ROM, which was connected using EUT, were continuously read and written into the HDD in PC during the testing.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
External Bridge Adapter (EUT)	N/A	Y	1.5(D)
PC	N	-	1.5(P)
MONITOR	N	Y	1.5(P), 1.8(D)
NOTE-CD	N/A	Y	1.5(D)
KEYBOARD	N/A	N	1.5(D)
MOUSE	N/A	N	1.5(D)
PRINTER	N	Y	1.5(P), 1.5(D)
MODEM	N	Y	1.5(P), 1.5 (D)

* The marked "(P)" means the Power Cable and "(D)" means Signal Cable.



3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
External Bridge Adapter (EUT)	N/A	N/A	Y	BOTH END
PC	-	-	-	-
MONITOR	Y	BOTH END	Y	BOTH END
NOTE-CD	N	N/A	N	N/A
KEYBOARD	N	N/A	Y	PC END
MOUSE	N	N/A	Y	PC END
PRINTER	N	N/A	Y	BOTH END
MODEM	N	N/A	Y	BOTH END

3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“There was no Modified items during EMI test”

3.6 Configuration of Test System

Line Conducted Test: The EUT was connected to PC, and the power line of PC was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.



4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Read and write data through the EUT and display "H" character.	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Read and write data through the EUT and display "H" character.	X



5. FINAL RESULT OF MEASURMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test


Humidity Level	: <u>47%</u>	Temperature : <u>24•</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART B</u>	
Type of Test	: <u>CLASS B</u>	
Result	: <u>PASSED BY -5.80 dB at 1.58 MHz</u>	

EUT	: External Bridge Adapter	Date: May 04, 2001
Operating Condition	: Read and write data through the EUT and display "H" character.	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)	


Power Line Conducted Emission			FCC CLASS B	
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)
0.89	36.67	HOT	48.00	-11.33
1.16	37.27	HOT	48.00	-10.73
1.58	42.20	NEUTRAL	48.00	-5.80
2.53	38.27	HOT	48.00	-9.73
3.06	39.14	NEUTRAL	48.00	-8.86
12.23	31.36	NEUTRAL	48.00	-16.64

Line Conducted Emission Tabulated Data

Tested by: Young Min, Choi / Project Engineer

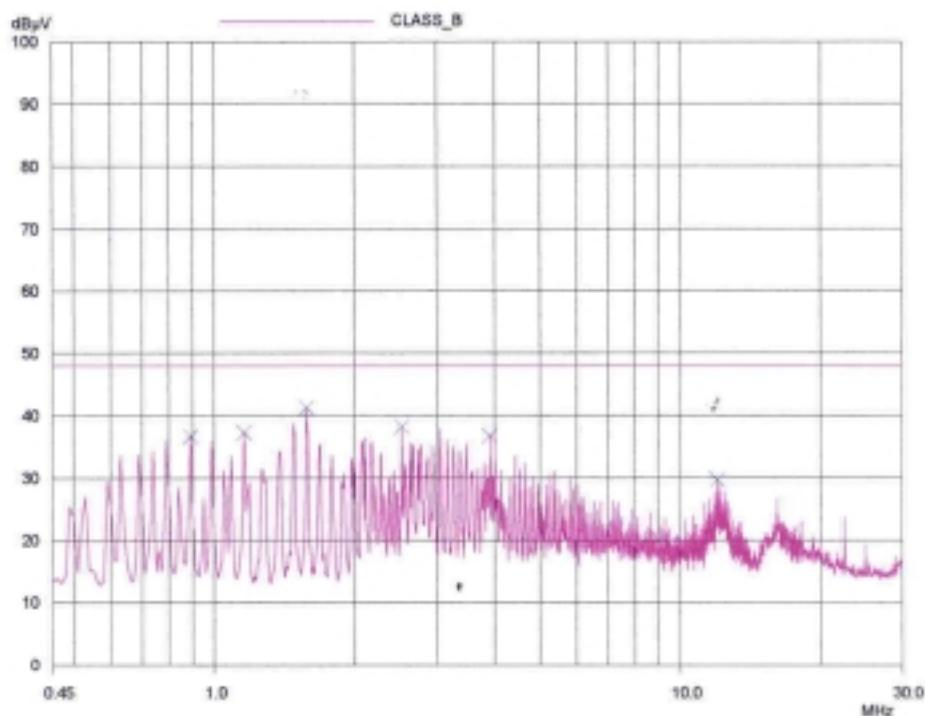

HOT LINE

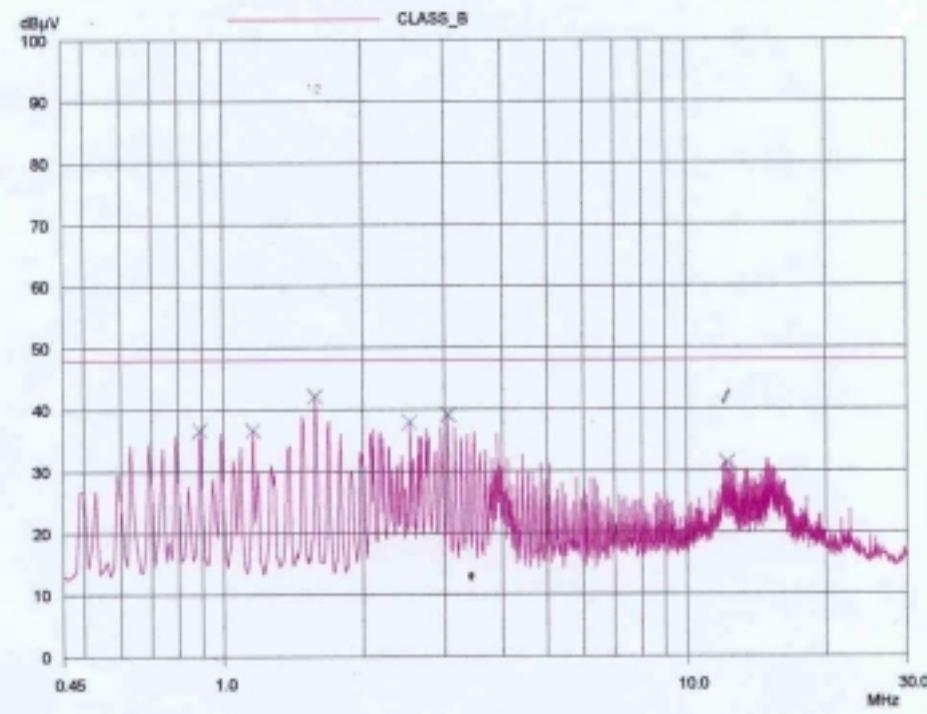

NEUTRAL LINE



5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>47 %</u>	Temperature : <u>24 •</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART B</u>	
Type of Test	: <u>CLASS B</u>	
Result	: <u>PASSED BY -6.74 dB at 192.00 MHz</u>	

EUT	: External Bridge Adapter		Date: May 14, 2001
Operating Condition	: Read and write data through the EUT and display "H" character.		
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)		
Distance	: 3 Meter		

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B		
Freq. (MHz)	Amp. (dBuV)		Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
48.00	15.80	V		11.25	0.91	27.96	40.00	-12.04
144.02	12.30	V		12.96	1.33	26.59	43.50	-16.91
192.00	18.80	V		16.44	1.52	36.76	43.50	-6.74
240.00	18.30	H		12.20	1.78	32.28	46.00	-13.72
288.00	14.00	H		14.70	1.95	30.65	46.00	-15.35
336.40	7.10	H		15.20	2.21	24.51	46.00	-21.49
384.40	6.70	H		15.63	2.41	24.74	46.00	-21.26
528.20	9.40	H		18.44	2.74	30.58	46.00	-15.42

Radiated Emission Tabulated Data

Tested by: Young Min, Choi / Project Engineer



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUe CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	SEP/00	12MONTH	■
2.	Test receiver	R/S	ESHS10	834467/007	APRIL/01	12MONTH	■
3.	Spectrum analyzer	HP	8568B	3026A0226	SEP/00	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	SEP/00	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	SEP/00	12MONTH	■
6.	Dipole Antenna	EMCO	3121C	9107-745	JUN/01	12MONTH	
7.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	MAR/01	12MONTH	■
8.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	MAR/01	12MONTH	■
9.	Horn Antenna	EMCO	3115	9509-4563	MAR/01	12MONTH	■
10.	LISN	EMCO	3825/2	9109-1867 9109-1869	JUN/01	12MONTH	■
11.	RF Amplifier	HP	8447F	3113A04554	JUN/01	N/A	
12.	Spectrum Analyzer	HP	8591A	3131A02312	APR/01	12MONTH	
13.	Spectrum Analyzer	HP	8561E	3350A00546	SEP/00	12MONTH	■
14.	Computer System Hard disk drive	HP	98581C 9153C	98543A CMC762Z9153	N/A N/A	N/A N/A	■ ■
15.	Plotter	HP	7475A	30052 22986	N/A	N/A	■
16.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
17.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
18.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■

Remark: "■" means used equipment.