



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test Report No. : E04DR-085

Applicant : SAROTECH CO., LTD.

Address : Sarotech Bldg. 320-15, Sungnae-Dong, Gangdong-Gu, Seoul, 134-851, Korea

Manufacturer : SAROTECH CO., LTD.

Address : Hanlim Venture Town #204, 689-6, Gumjeong-Dong, Gunpo-City, Kyungki-Do,
Korea

Type of Equipment : Multimedia Player (Peripheral Device for Class B Computing Device)

FCC ID : PBCDVP-254

Model Name : DVP-254

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 16 pages (including this page)

Date of Incoming : November 10, 2004


Date of Issuing : December 30, 2004

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, Class B.**

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by:


Seung-Hyun, Nam / Project Engineer
EMC Div.
ONETECH Corp.

Reviewed by:


Gea-Won, Lee / Chief Engineer
EMC Div.
ONETECH Corp.

It should not be reproduced except in full, without the written approval of ONETECH.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 MODEL DIFFERENCES.....	4
2.3 RELATED SUBMITTAL(S) / GRANT(S).....	4
2.4 TEST SYSTEM DETAILS.....	4
2.5 TEST METHODOLOGY.....	5
2.6 TEST FACILITY.....	5
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION.....	6
3.2 EUT EXERCISE SOFTWARE.....	6
3.3 CABLE DESCRIPTION.....	6
3.4 NOISE SUPPRESSION PARTS ON CABLE.....	7
3.5 EQUIPMENT MODIFICATIONS.....	7
3.6 CONFIGURATION OF TEST SYSTEM.....	7
4. PRELIMINARY TEST.....	8
4.1 AC POWER LINE CONDUCTED EMISSION TEST.....	8
4.2 RADIATED EMISSION TEST.....	8
5. FINAL RESULT OF MEASUREMENT.....	9
5.1 CONDUCTED EMISSION TEST.....	9
5.2 RADIATED EMISSION TEST.....	13
6. FIELD STRENGTH CALCULATION.....	15
7. LIST OF TEST EQUIPMENT.....	16

**1. VERIFICATION OF COMPLIANCE**

- APPLICANT : SAROTECH CO., LTD.
- ADDRESS : Sarotech Bldg. 320-15, Sungnae-Dong, Gangdong-Gu, Seoul, 134-851, Korea
- CONTACT PERSON : Mr. Cheol-Young, Cho / Manager
- TELEPHONE NO : +82-2-480-5140
- FCC ID : PBCDVP-254
- MODEL NAME : DVP-254
- SERIAL NUMBER : N/A
- DATE : December 30, 2004

DEVICE TYPE	Peripheral Device for Class B Computing Device - Unintentional Radiator
E.U.T. DESCRIPTION	Multimedia Player
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15, SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	Yes
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The SAROTECH CO., LTD., Model DVP-254 (referred to as the EUT in this report) is a Multimedia Player that is interfaced to personal computer via USB port. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Metal
LIST OF EACH OSC. or CRY. FREQ.(FREQ.>=1MHz)	12 MHz and 27 MHz
NUMBER OF LAYERS	4 Layers
USED AC/DC ADAPTOR	Chung Kwang Tech Inc., Model CKY-0710 Youshin Electronics Co., Ltd., Model YS5K12P
EXTERNAL CONNECTOR	Adaptor Input, USB, Component, Composite, Ext IR Receiver, Coaxial

2.2 Model Differences

-. The difference(s) compared to the EUT is as follows: None

2.3 Related Submittal(s) / Grant(s)

-. Original submittal only

2.4 Test System Details

The model numbers for all the equipments that were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
DVP-254	SAROTECH CO., LTD.	PBCDVP-254	Multimedia Player (EUT)	PC, Monitor
CKY-0710	Chung Kwang Tech Inc.	N/A	AC/DC ADAPTER	EUT
YS5K12P	Youshin Electronics Co., Ltd.			
GX240	DELL COMPUTER CORP.	DoC	PERSONAL COMPUTER	-
LME-17S	HUMAX	DoC	MONITOR	PC, EUT
LYNX2DT	N/A	N/A	MOUSE	PC
SK-8110	SILITEK	DoC	KEYBOARD	PC
2225C	HP	DSI6XU2225	PRINTER	PC
020-0470	CARDINAL	GDE0196	MODEM	PC
AivX	SAROTECH CO., LTD.	N/A	REMOTE CONTROLLER	N/A



2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	SAROTECH CO., LTD.	DVP-254(AIVX)	N/A
HDD	HITACHI	DK23CA-20F	N/A

3.2 EUT exercise Software

After connecting the EUT to a personal computer using USB cable, the data were continuously read and written from the personal computer to the EUT.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
Multimedia Player (EUT)	N	Y	1.2(P), 1.2(D)
AC ADAPTER	N/A	Y	1.2(D)
PERSONAL COMPUTER	N	Y	1.8(P), 1.2(D)
MONITOR	N	Y	1.5(P), 1.2(D)
MOUSE	N/A	Y	1.2(D)
KEYBOARD	N/A	Y	1.2(D)
PRINTER	N	Y	1.8(P), 1.2(D)
MODEM	N	Y	1.8(P), 1.2(D)

* The marked "(P)" means the Power Cable and "D" means the I/O Cable.

**3.4 Noise Suppression Parts on Cable**

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Multimedia Player (EUT)	Y	BOTH END	Y	BOTH END
AC ADAPTER	N	N/A	Y	EUT END
PERSONAL COMPUTER	N/A	N/A	N/A	-
MONITOR	Y	BOTH END	Y	BOTH END
MOUSE	N	N/A	Y	PC END
KEYBOARD	N	N/A	Y	PC END
PRINTER	N	N/A	Y	BOTH END
MODEM	N	N/A	Y	BOTH END

3.5 Equipment Modifications

-. To achieve compliance to levels, the following change(s) was made by ONETECH Corp. during compliance testing:

1. The paint was removed in the inside enclosure.
2. The HDD ground was connected to the enclosure ground through the gasket.
3. The inside digital ground was connected to the analog ground in the main board.
4. The main board ground was connected to the enclosure through the gasket.
5. The ferrite core was added on the both side of USB cable.

3.6 Configuration of Test System

Line Conducted Test : The AC Adapter of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2001 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary radiated emission test was conducted using the procedure in ANSI C63.4: 2001 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.



4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Coupling Condition	Operation Mode	The Worse operating condition (Please check one only)
Adaptor of the EUT	Data were continuously read and write by USB Port	X
PC	Data were continuously read and write by USB Port	

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Coupling Condition	Operation Mode	The Worse operating condition (Please check one only)
Adaptor of the EUT	Data were continuously read and write by USB Port	X
PC	Data were continuously read and write by USB Port	

**5. FINAL RESULT OF MEASUREMENT**

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test

Humidity Level : 43 % Temperature: 21 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107 (a)
 Type of Test : CLASS B
 Result : PASSED BY -6.22 dB at 1.43 MHz under adaptor type YS5K12P

EUT : Multimedia Player Date: December 06, 2004
 Operating Condition : Data were continuously read and written.
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)
 Remark : Used adaptor, type YS5K12P, Youshin Electronics Co., Ltd.

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.58	N	49.05	56.00	-6.95
0.65	H	48.53	56.00	-7.47
0.97	N	49.44	56.00	-6.56
1.04	H	48.82	56.00	-7.18
1.43	N	49.78	56.00	-6.22
2.66	N	48.62	56.00	-7.38
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
0.58	N	39.29	46.00	-6.71
0.65	H	38.18	46.00	-7.82
1.43	N	38.65	46.00	-7.35
2.66	N	37.01	46.00	-8.99

Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detect

See next page for an overview sweep performed with peak and average detector.



Remark : Used adaptor, type CKT-0710, Chung Kwang Tech Inc.

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.20	N	55.29	63.41	-8.12
0.27	N	49.02	60.97	-11.95
0.34	N	44.67	59.20	-14.53
0.35	H	37.58	58.96	-21.38
1.57	N	32.71	56.00	-23.29
3.69	N	32.12	56.00	-23.88
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
0.20	N	45.39	53.41	-8.02
0.27	N	39.95	50.97	-11.02
0.34	N	35.88	49.20	-13.32
1.57	N	30.91	46.00	-15.09

Line Conducted Emission Tabulated Data


Remark : "H": Hot Line, "N": Neutral line, "P": Peak detect

See next page for an overview sweep performed with peak and average detector.


Tested by: Seung-Hyun, Nam / Project Engineer



Remark: Used adaptor, type YS5K12P, Youshin Electronics Co., Ltd.

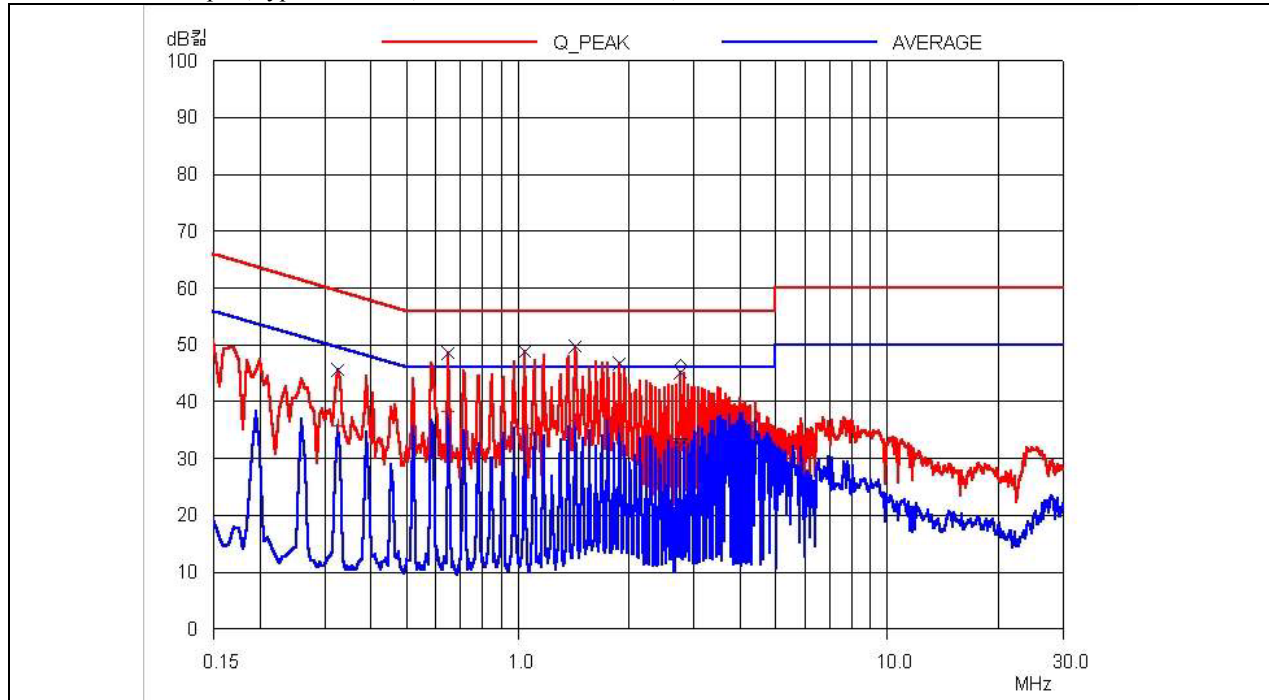


HOT LINE

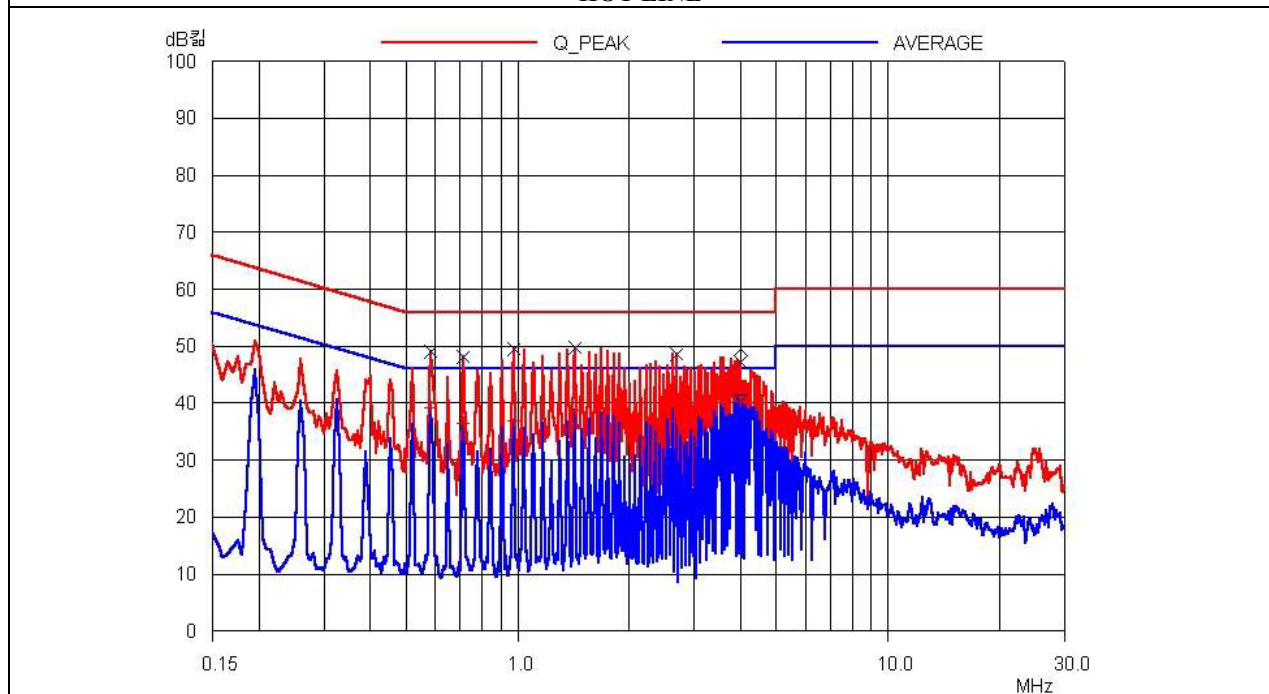


NEUTRAL LINE



Remark: Used adaptor, type CKT-0710, Chung Kwang Tech Inc.

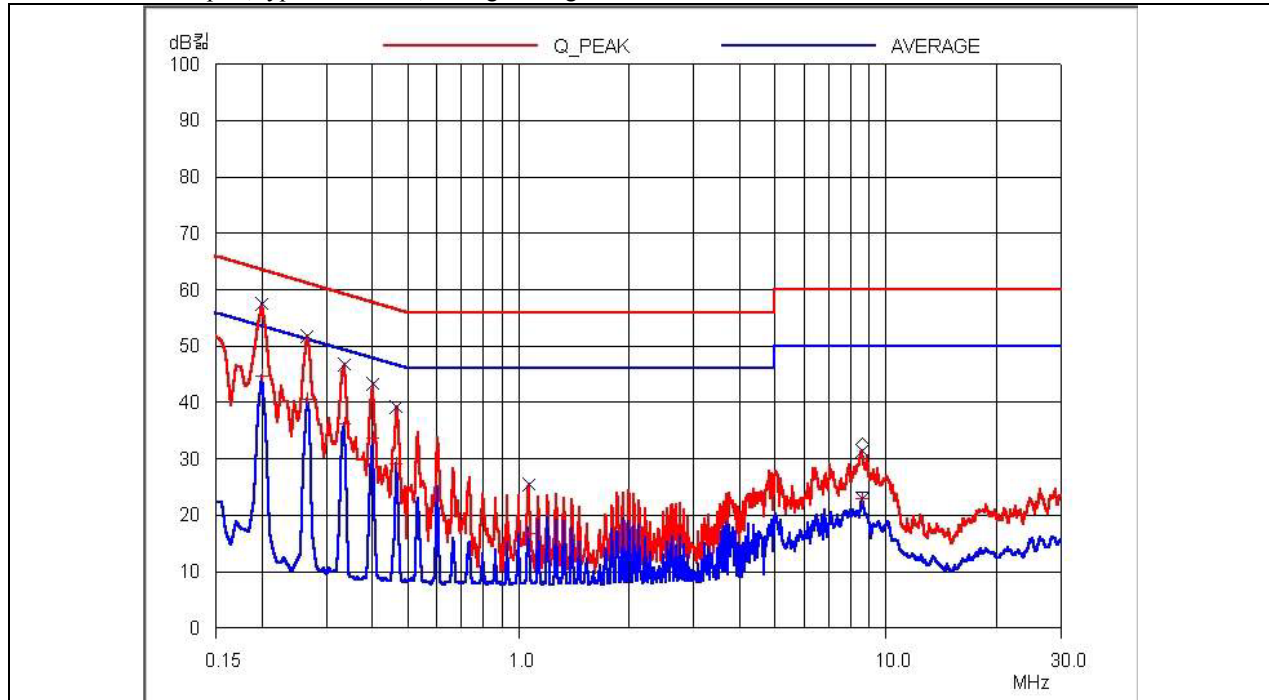

HOT LINE

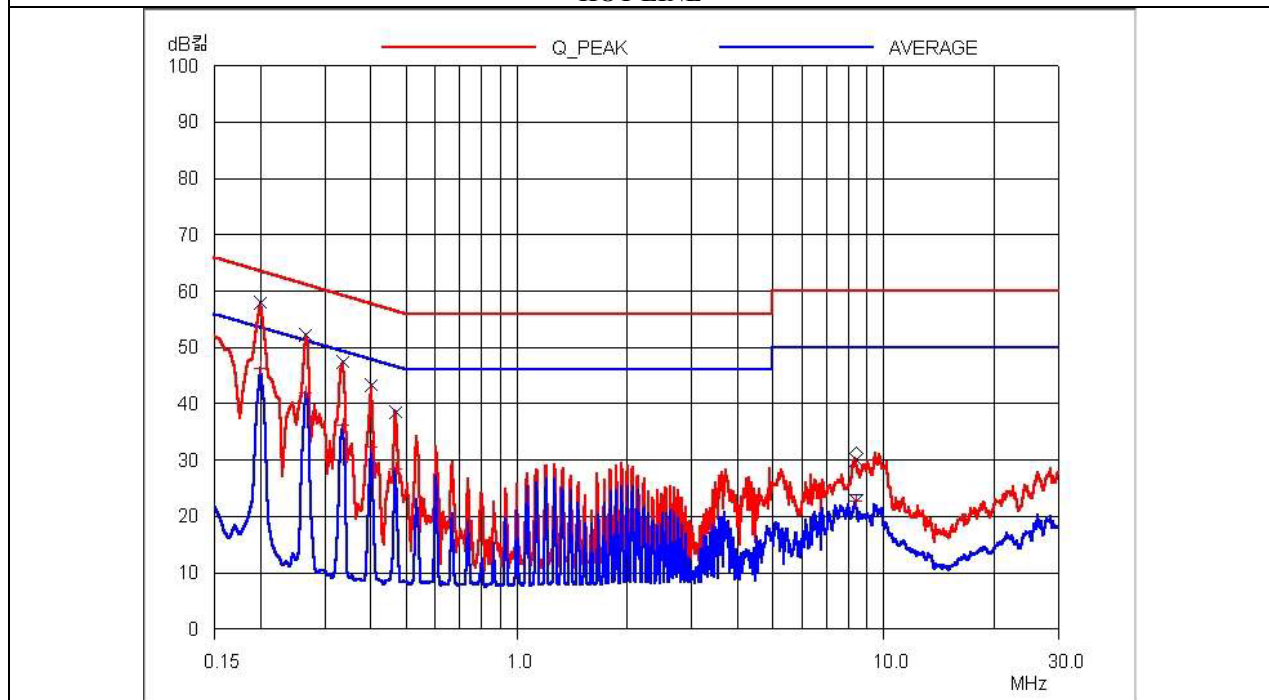

NEUTRAL LINE



5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 39 % Temperature: 17 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109 (a)
 Type of Test : CLASS B
 Result : PASSED BY -2.35 dB at 720.00 MHz under adaptor type YS5K12P

EUT : Multimedia Player Date: December 03, 2004
 Operating Condition : Data were continuously read and written.
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Frequency Range : 30 MHz – 1000 MHz
 Distance : 3 Meter
 Remark : Used adaptor, type YS5K12P, Youshin Electronics Co., Ltd.

Radiated Emissions		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
65.00	18.00	V	5.87	1.40	25.27	40.00	-14.73
69.30	17.50	H	5.15	1.49	24.14	40.00	-15.86
240.00	15.00	V	17.09	2.56	34.65	46.02	-11.37
480.00	22.30	V	17.39	3.60	43.29	46.02	-2.73
720.00	18.20	V	21.13	4.34	43.67	46.02	-2.35
960.00	15.03	V	22.96	5.26	43.25	46.02	-2.77

Radiated Emissions Tabulated Data



Remark : Used adaptor, type CKT-0710, Chung Kwang Tech Inc.

Radiated Emissions		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.00	13.00	V	18.94	0.60	32.54	40.00	-7.46
120.00	15.60	V	12.99	2.20	30.79	43.52	-12.73
240.00	16.30	V	17.09	2.56	35.95	46.02	-10.07
480.00	22.08	V	17.39	3.60	43.07	46.02	-2.95
720.00	18.12	V	21.13	4.34	43.59	46.02	-2.43
960.00	14.96	V	22.96	5.26	43.18	46.02	-2.84

Radiated Emissions Tabulated Data

Tested by: Seung-Hyun, Nam / Project Engineer



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVD	838453/018	MAR/04	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/04	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	JUL/04	12MONTH	
4.	Spectrum analyzer	HP	8568B	3109A05456	JUL/04	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	APR/04	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	JUL/04	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	FEB/04	12MONTH	
8	Biconical antenna	EMCO	3104C	9109-4443	MAY/04	12MONTH	
		Schwarzbeck	VHA9103	91031852	JAN/04		■
9.	Log Periodic antenna	EMCO	3146	9109-3213	FEB/04	12MONTH	
				9109-3217	MAY/04		
		Schwarzbeck	9108-A(494)	62281001	JAN/04		■
10.	LISN	EMCO	3825/2	9109-1867	JUL/04	12MONTH	■
				9109-1869	OCT/04		■
11.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
12.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
13.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■