



# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test report file number : E035R-023


**Applicant** : SAROTECH CO., LTD.  
**Address** : Hangang Bldg. 1549-7, Seocho-Dong, Seocho-Ku, Seoul, 137-070, Korea.  
**Manufacturer** : SAROTECH CO., LTD.  
**Address** : Hangang Bldg. 1549-7, Seocho-Dong, Seocho-Ku, Seoul, 137-070, Korea.  
**Type of Equipment** : USB Storage Device (Peripheral Device for Class B Computing Device)  
**FCC ID** : PBCFD-01U2  
**Model Name** : FD-01U2  
**Multiple Model Name** : N/A  
**Serial number** : N/A  
**Total page of Report** : 12 pages (including this page)  
**Date of Incoming** : March 10, 2003  
**Date of Issuing** : May 20, 2003

## SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, Class B.**

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by:   
G. W. Lee/ Chief Engineer  
EMC Div.  
ONETECH Corp.

Reviewed by:   
Y. K. Kwon/ Director  
EMC Div.  
ONETECH Corp.



**CONTENTS**

	Page
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>3</b>
<b>2. GENERAL INFORMATION.....</b>	<b>4</b>
<b>2.1 PRODUCT DESCRIPTION.....</b>	<b>4</b>
<b>2.2 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>4</b>
<b>2.3 TEST SYSTEM DETAILS .....</b>	<b>4</b>
<b>2.4 TEST METHODOLOGY .....</b>	<b>4</b>
<b>2.5 TEST FACILITY .....</b>	<b>4</b>
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
<b>3.1 JUSTIFICATION .....</b>	<b>5</b>
<b>3.2 EUT EXERCISE SOFTWARE.....</b>	<b>5</b>
<b>3.3 CABLE DESCRIPTION .....</b>	<b>5</b>
<b>3.4 NOISE SUPPRESSION PARTS ON CABLE .....</b>	<b>6</b>
<b>3.5 EQUIPMENT MODIFICATIONS .....</b>	<b>7</b>
<b>3.6 CONFIGURATION OF TEST SYSTEM .....</b>	<b>7</b>
<b>4. PRELIMINARY TEST.....</b>	<b>7</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>7</b>
<b>4.2 RADIATED EMISSION TEST .....</b>	<b>7</b>
<b>5. FINAL RESULT OF MEASUREMENT.....</b>	<b>8</b>
<b>5.1 CONDUCTED EMISSION TEST.....</b>	<b>8</b>
<b>5.3 RADIATED EMISSION TEST .....</b>	<b>10</b>
<b>6. FIELD STRENGTH CALCULATION.....</b>	<b>11</b>
<b>7. LIST OF TEST EQUIPMENT.....</b>	<b>12</b>



## 1. VERIFICATION OF COMPLIANCE

- APPLICANT : SAROTECH CO., LTD.
- ADDRESS : Hangang Bldg. 1549-7, Seocho-Dong, Seocho-Ku, Seoul, 137-070, Korea.
- CONTACT PERSON : Mr. Cheol-Young, Cho / Manager
- TELEPHONE NO : +82-2-585-4501
- FCC ID : PBCFD-01U2
- MODEL NO/NAME : FD-01U2
- SERIAL NUMBER : N/A
- DATE : May 20, 2003

DEVICE TYPE	Peripheral Device for Class B Computing Device - Unintentional Radiator
E.U.T. DESCRIPTION	USB Storage Device
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15, SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 and is not affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



## 2. GENERAL INFORMATION

### 2.1 Product Description

The SAROTECH CO., LTD., Model FD-01U2 (referred to as the EUT in this report) is a USB Storage Device that is a fully portable solid-state mass storage device functioning like a removable hard disk. The EUT is interfaced to personal computer via USB port. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic (Unshielded coating)
LIST OF EACH OSC. Or CRY. FREQ.(FREQ.>=1MHz)	12 MHz
INTERFACE	USB 2.0
DATA TRANSFER	Read: 4MB/sec, Write: 1.4MB/sec
NUMBER OF LAYERS	4 Layers
EXTERNAL CONNECTOR	USB port

#### Model Differences:

The difference(s) compared to the EUT is as follows: None.

### 2.2 Related Submittal(s) / Grant(s)

Original submittal only

### 2.3 Test System Details

The model numbers for all the equipments that were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
FD-01U2	SAROTECH CO., LTD.	PBCFD-01U2	USB Storage Device (EUT)	PC
GX240	DELL Computer Corp.	DOC	PC	-
E551	DELL Computer Corp.	DOC	MONITOR	PC
X06-08477	Microsoft Corp.	DOC	MOUSE	PC
SK-8110	SILITEK	DOC	KEYBOARD	PC
020-0470	Cardinal	GDE0196	MODEM	PC
2225C	HP	DSI6XU2225	PRINTER	PC

\*. The applicant not supplied user with adaptor.

### 2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

### 2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Gyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)



### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN B'D	SAROTECH CO., LTD.	FD-01U2	N/A

#### 3.2 EUT exercise Software

After connecting the EUT to a USB port on a personal computer, data were continuously read and written from the HDD of the computer to the EUT. The EUT was directly connected to a personal computer without USB cable according to a manufacturer specification.

#### 3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
USB Storage Device (EUT)	N/A	N/A	-
PC	N	-	1.5 (P),
Keyboard	N/A	N	1.0 (D)
Mouse	N/A	N	1.0 (D)
Printer	N	Y	1.5 (P), 1.5 (D)
Modem	N	Y	1.5 (P), 1.5 (D)
Monitor	N	Y	1.5 (P), 1.0 (D)

\* The marked "(P)" means the Power Cable and "(D)" means the I/O Cable.

**3.4 Noise Suppression Parts on Cable**

	<b>Ferrite Bead (Y/N)</b>	<b>Location</b>	<b>Metal Hood (Y/N)</b>	<b>Location</b>
USB Storage Device (EUT)	N	N/A	Y	PC END
PC	N	N/A	-	-
Keyboard	N	N/A	Y	PC END
Mouse	N	N/A	Y	PC END
Printer	N	N/A	Y	BOTH END
Modem	N	N/A	Y	BOTH END
Monitor	Y	PC END	Y	PC END



**3.5 Equipment Modifications**

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“There were no Modified items during EMI test”

**3.6 Configuration of Test System**

**Line Conducted Test** : The EUT was connected to USB port of PC and the power line of PC was connected to LISN. All supporting equipments were connected to another LISN. Using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions performed preliminary Power line Conducted Emission test.

**Radiated Emission Test** : Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

**4. PRELIMINARY TEST**

**4.1 AC Power line Conducted Emission Test**

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Data were continuously read and write via USB	X

**4.2 Radiated Emission Test**

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Data were continuously read and write via USB	X



## 5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

### 5.1 Conducted Emission Test

Humidity Level : 40 %

Temperature: 23 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107 (a)

Type of Test : CLASS B

Result : PASSED BY -22.90 dB at 28.22 MHz at Peak mode

EUT : USB Storage Device

Date: April 25, 2003

Operating Condition : Data were continuously read and written from the EUT to a personal computer.

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)


Frequency (MHz)	Line	Quasi-Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission Level	Detector Mode	Limits*		Emission level	Limits	
0.16	H	30.72	P	65.73	-35.01	-	-	-
0.28	H	32.30	P	60.97	-28.67	-	-	-
0.56	N	31.29	P	56.00	-24.71	-	-	-
1.04	H	32.32	P	56.00	-23.68	-	-	-
17.41	H	32.66	P	60.00	-27.34	-	-	-
28.22	N	37.10	P	60.00	-22.90	-	-	-

Line Conducted Emission Tabulated Data


Remark : "H": Hot Line, "N": Neutral line, "P": Peak detect

Average data was not recorded, because Peak values were under the average limit.

Tested by: Gi-Hong, Nam / Test Engineer

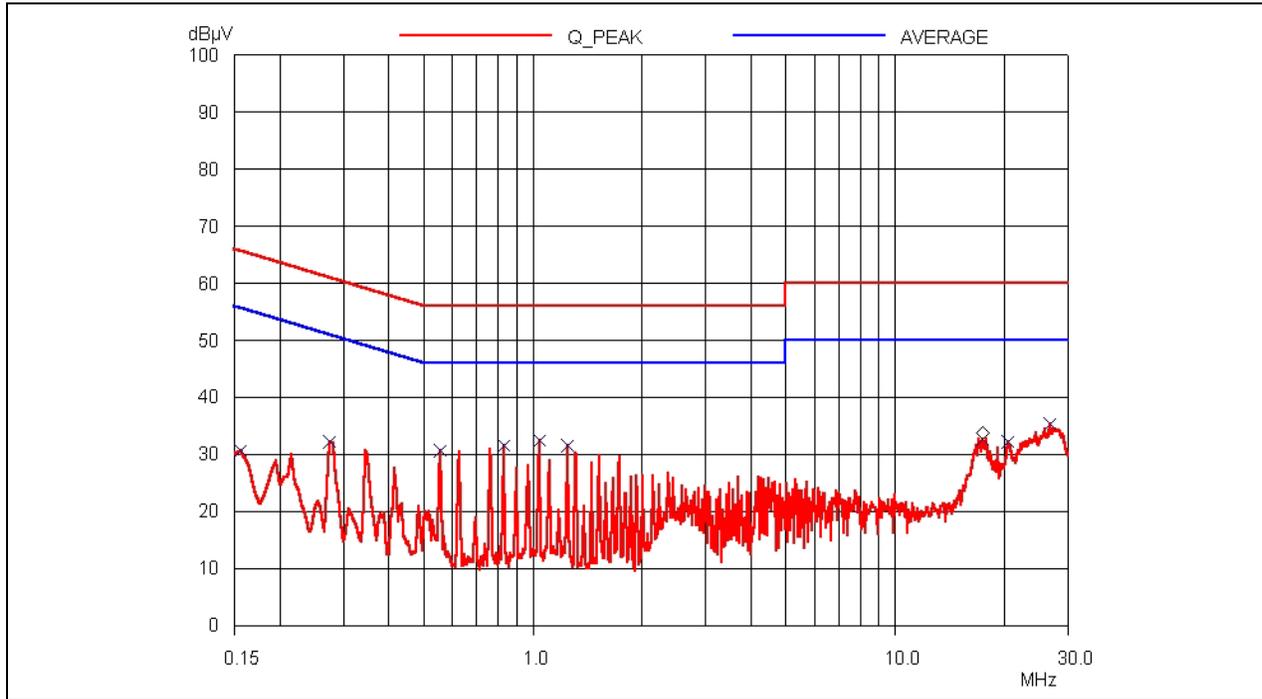

### HOT LINE

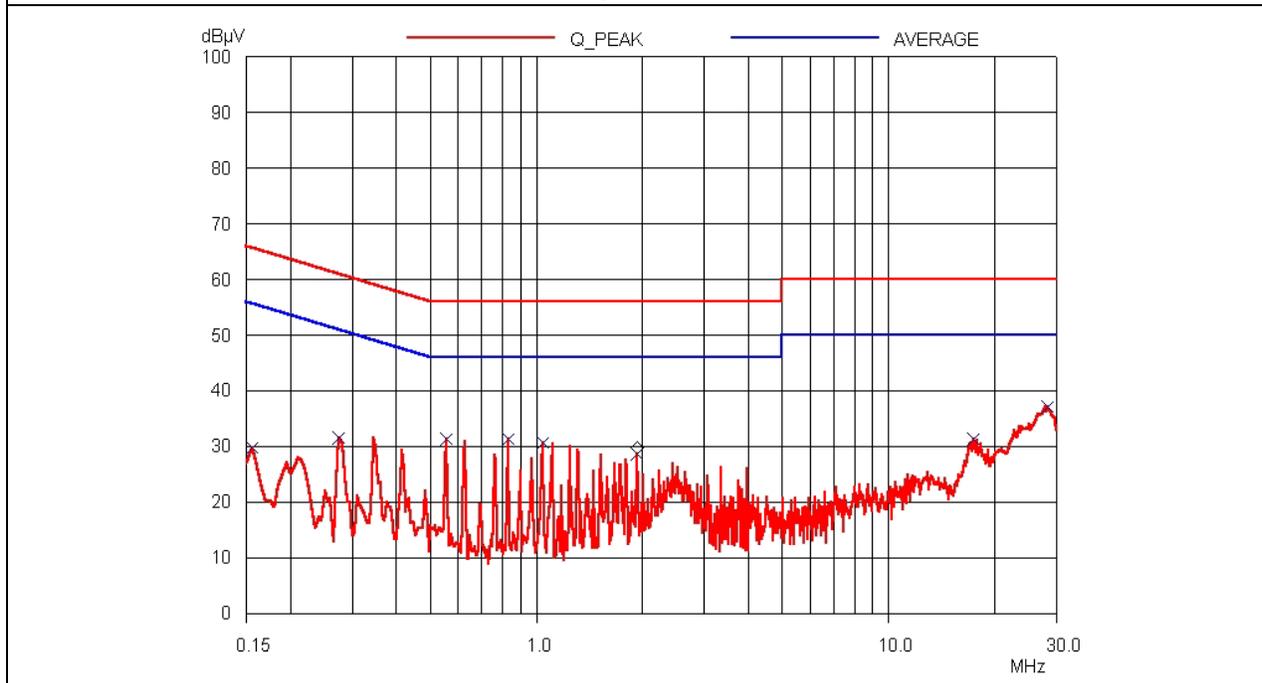

### NEUTRAL LINE



### 5.3 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 41 % Temperature: 24 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109 (a)  
 Type of Test : CLASS B  
 Result : PASSED BY -5.62 dB at 720.00 MHz

EUT : USB Storage Device Date: April 21, 2003  
 Operating Condition : Data were continuously read and written from EUT to a personal computer.  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)  
 Distance : 3 Meter

Radiated Emissions		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
48.03	16.10	V	10.80	0.91	27.81	40.00	-12.19
60.00	16.00	V	9.41	0.98	26.39	40.00	-13.61
72.03	16.80	V	7.39	1.00	25.19	40.00	-14.81
120.03	18.40	V	13.47	1.23	33.10	43.50	-10.40
144.03	12.50	V	12.93	1.33	26.76	43.50	-16.74
168.06	14.70	V	15.75	1.42	31.87	43.50	-11.63
240.80	12.40	V	11.66	1.78	25.84	46.00	-20.16
276.00	9.60	V	12.99	1.89	24.48	46.00	-21.52
287.80	11.30	H	14.03	1.95	27.28	46.00	-18.72
480.00	20.50	H	17.07	2.62	40.19	46.00	-5.81
720.00	16.16	H	20.80	3.42	40.38	46.00	-5.62
960.07	16.71	H	23.44	4.12	44.27	54.00	-9.73

Radiated Emissions Tabulated Data

Tested by: Gi-Hong, Nam / Test Engineer



## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

---

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



## 7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	OCT/02	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	APR/02	12MONTH	■
3.	Spectrum analyzer	HP	8568B	3109A05456	APR/02	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	APR/02	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	APR/02	12MONTH	■
6.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	APR/02	12MONTH	■
7.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	APR/02	12MONTH	■
8.	LISN	EMCO	3825/2	9109-1867 9109-1869	AUG/02	12MONTH	■
11.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
12.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
13.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■