



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

Dates of Tests: September 06~ October 15, 2013
Test Report S/N: LR500111310K
Test Site : LTA CO., LTD

CERTIFICATION OF COMPLIANCE

FCC ID

PBN- ET28KH

APPLICANT

ENTER TECH CO.,LTD.

Equipment Class	:	Part 15 Spread Spectrum Transmitter (DSS)
Manufacturing Description	:	HD MULTIMEDIA KARAOKE (Main Device)
Manufacturer	:	ENTER TECH CO.,LTD.
Model name	:	ET28KH
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C; ANSI C-63.4-2003
Frequency Range	:	2406 ~ 2474MHz
RF power	:	Max 8.27 dBm – Conducted
Data of issue	:	October 18, 2013

This test report is issued under the authority of:

Jae-Ho Lee, Manager

The test was supervised by:

Young-Jin Lee, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 INFORMATION ABOUT THE FHSS CHARACTERISTICS	-----	6
3.3 TECHNICAL CHARACTERISTICS TEST	-----	7
3.3.1 CARRIER FREQUENCY SEPARATION	-----	7
3.3.2 NUMBER OF HOPPING FREQUENCIES	-----	9
3.3.3 20 dB BANDWIDTH	-----	11
3.3.4 TIME OF OCCUPANCY (Dwell Time)	-----	14
3.3.5 TRANSMITTER OUTPUT POWER	-----	16
3.3.6 BAND – EDGE	-----	20
3.3.7 CONDUCTED SPURIOUS EMISSIONS	-----	23
3.3.8 RADIATED SPURIOUS EMISSIONS	-----	27
3.3.9 AC CONDUCTED EMISSIONS	-----	32
APPENDIX		
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	27

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	UPDATING	ECT accredited Lab.
RRA	KOREA	KR0049	2015-03-06	EMC accredited Lab.
FCC	U.S.A	610755	2014-04-27	FCC filing
FCC	U.S.A	649054	UPDATING	FCC CAB
VCCI	JAPAN	R2133(10 m), C2307	2014-06-21	VCCI registration
VCCI	JAPAN	T-2009	2013-12-23	VCCI registration
VCCI	JAPAN	G-563	2015-05-28	VCCI registration
IC	CANADA	5799A-1	2015-06-21	IC filing

2. Information about test item

2-1 Client

Company name : ENTER TECH CO.,LTD.
 Address : 156-7, Ojeong-dong, Ojeong-gu, Bucheon-city, Kyunggi-do, KOREA
 Telephone / Facsimile : +82-32-680-9072 / +82-32-678-0818

2-2 Manufacturer

Company name : ENTER TECH CO.,LTD.
 Address(Factory in Korea) : 156-7, Ojeong-dong, Ojeong-gu, Bucheon-city, Kyunggi-do, KOREA
 Address(Factory in China) : Baolai Area, 46 Xinhe Road, Shangmugu-Cun, Pinghu-Zhen,
 Longgang-Qu, Shenzhen, China
 Telephone / Facsimile : +82-32-680-9072 / +82-32-678-0818

2-3 Equipment Under Test (EUT)

Trade name : MAGICSING
 Model name : ET28KH
 Serial number : Identical prototype
 Date of receipt : September 02, 2013
 EUT condition : Pre-production, not damaged
 Antenna type : Radi antenna, Max Gain 4.75 dBi
 Frequency Range : 2406 ~ 2474MHz
 RF output power : Max. 8.27dBm - Conducted
 Number of channels : 18
 Channel spacing : 4MHz
 Channel Access Protocol : Frequency Hopping Spread Spectrum (FHSS)
 Power Source : 9.0 Vdc by Adapter
 Firmware Version : V1.0.0

2-4 Tested frequency

Bluetooth	LOW	MID	HIGH
Frequency (MHz)	2406	2442	2474

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 15 hops		C
15.247(a)	20 dB Bandwidth 99% Bandwidth	> 1.5 MHz		C
15.247(a)	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 250 mWatt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.109	Field Strength	-		C
15.207 / 15.107	AC Conducted Emissions	EN 55022	Line Conducted	C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

Note 1: Antenna Requirement

→ The **ENTER TECH CO.,LTD.** FCC ID:**PBN- ET28KH** unit complies with the requirement of §15.203.

The antenna type is Radi antenna.

Note 2: This Product is operated by Adapter.

Note 3: The sample was tested according to the following specification:
FCC Parts 15.247; ANSI C-63.4-2003

Note 4: TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2009) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled “**Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems**” were used in the measurement of the **ENTER TECH CO.,LTD.** FCC ID: **PBN- ET28KH**

3.2 Information about the FHSS characteristics:

3.2.1 Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 18 RF channels. The hopping sequence is unique for the piconet and is determined by this device address of the master; the phase in the hopping sequence is determined by the RF Chip clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies.

3.2.2 Equal Hopping Frequency Use

All units participating in the piconet are time and hop-synchronized to the channel.

3.2.3 System Receiver Input Bandwidth

Each channel bandwidth is 4MHz

3.2.4 Equipment Description

15.247(a)(1):

The hopping sequence must be pseudorandom. All Channels are used equally on average. The receiver input bandwidth is approximately equal to the transmit bandwidth. The receiver hops in sequence with the transmitted signal.

15.247(g):

The system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information).

15.247(h):

The system does not coordinate its channel selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

3.3 Transmitter requirements

3.3.1 Carrier Frequency Separation

Procedure:

The test follows DA00-705. The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 15 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz

Detector function = peak

Trace = max hold

Measurement Data:

Test Results	
Carrier Frequency Separation (MHz)	Result
3.994	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of 20dB bandwidth of the hopping channel, whichever is greater.

Measurement Setup


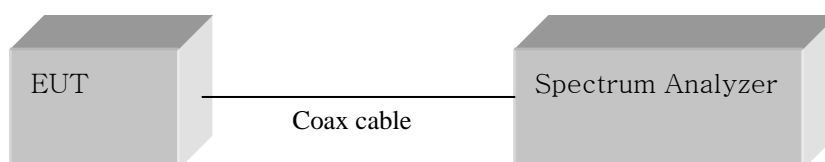


Figure 1: Measurement setup for the carrier frequency separation

Carrier Frequency Separation

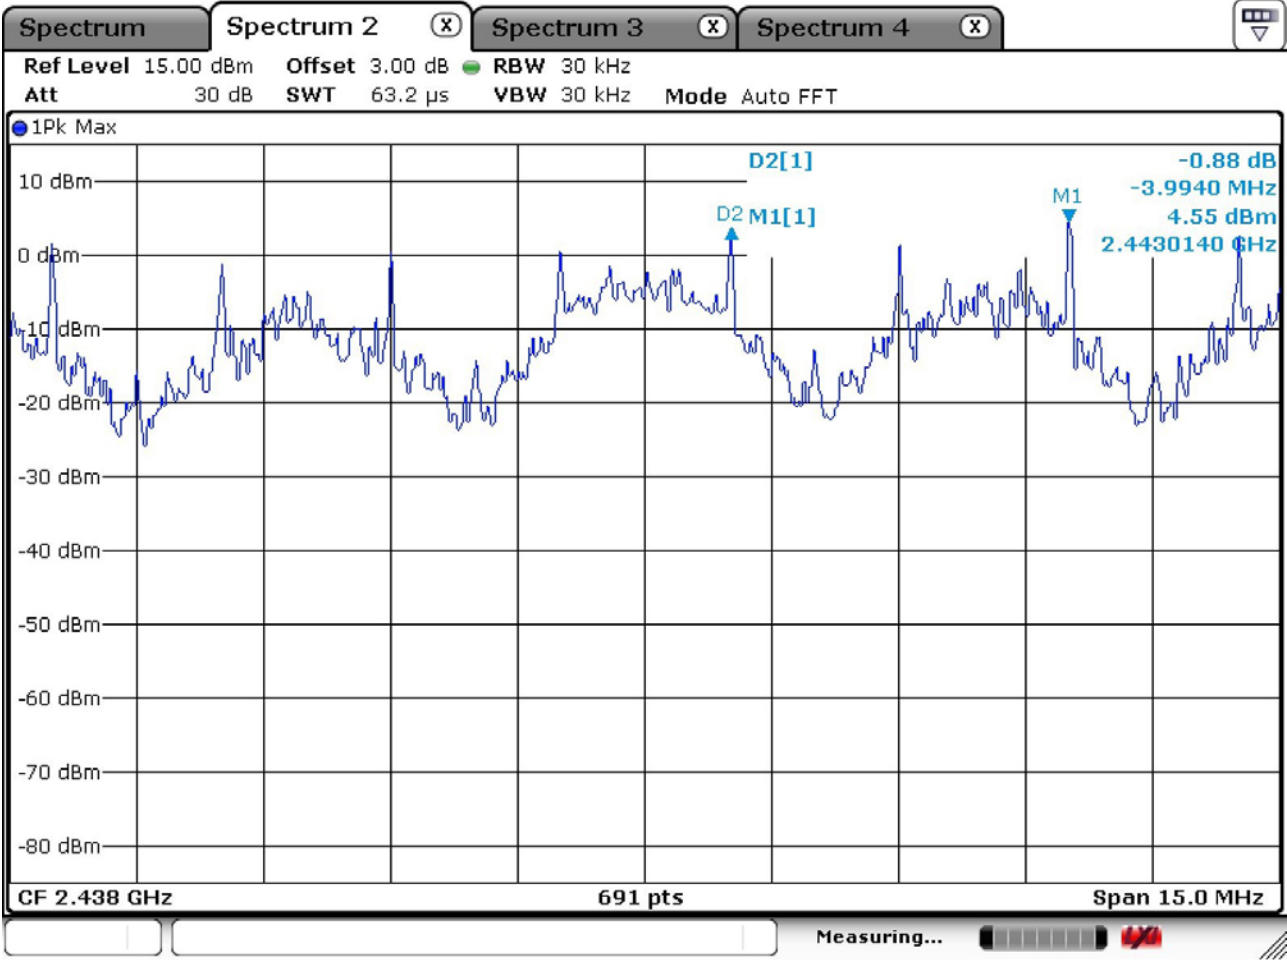

3.3.2 Number of Hopping Frequencies

Procedure:

The test follows DA00-705. The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to:

Frequency range Start = 2400.0MHz, Stop = 2483.5 MHz

RBW = 300 kHz Sweep = auto

VBW = 300 kHz (VBW ≥ RBW) Detector function = peak

Trace = max hold

Measurement Data : Complies

Total number of Hopping Channels	18
---	----

- See next pages for actual measured spectrum plots.


Minimum Standard:

At least 15 hopes

Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

Number of Hopping Frequencies

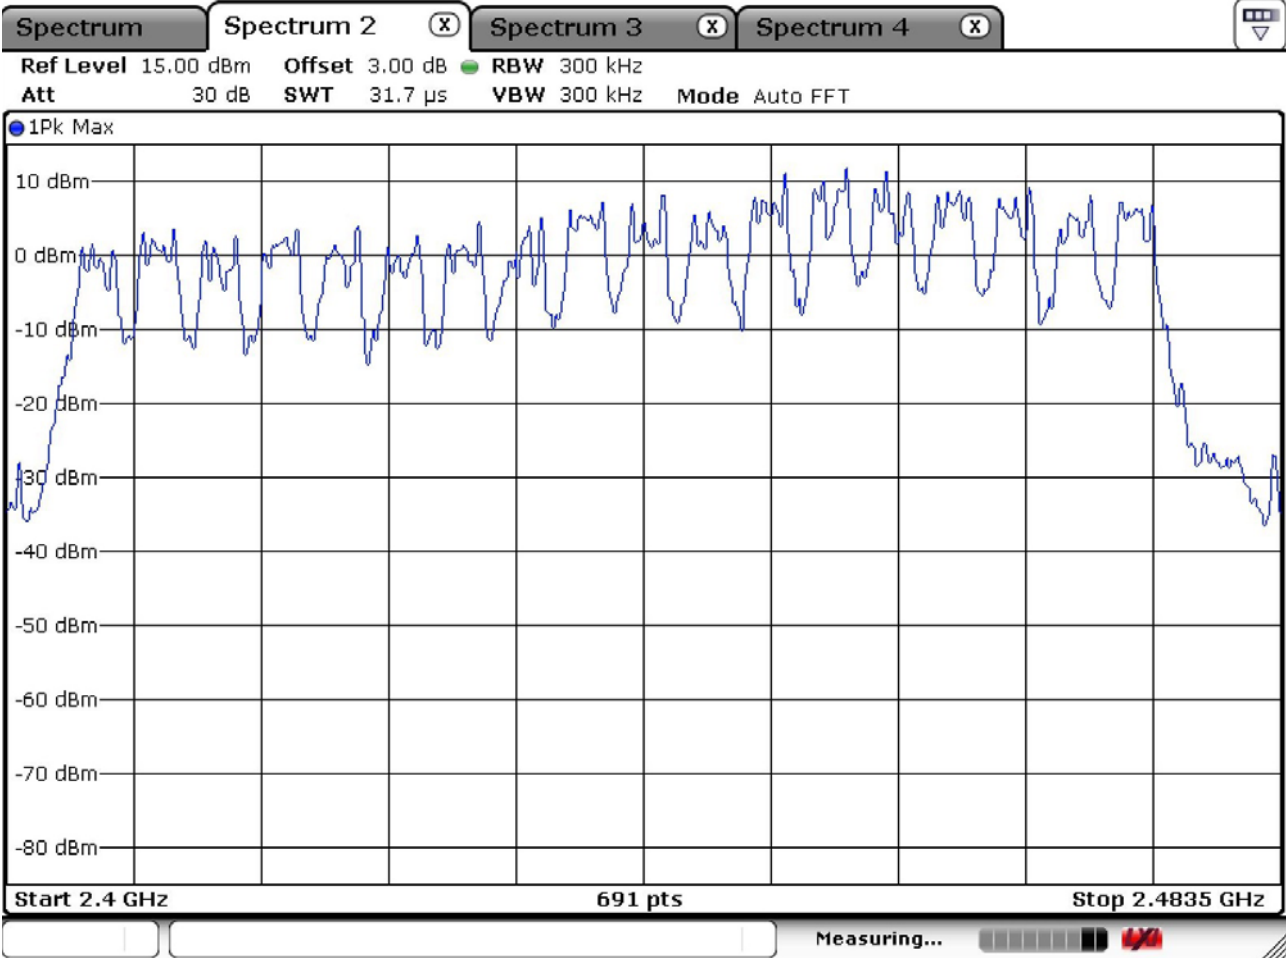

3.3.3 20 dB Bandwidth

Procedure:

The bandwidth at 20 dB below the highest in band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to (Bluetooth):

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz (VBW \geq RBW)

Detector function = peak

Trace = max hold

Measurement Data :

Frequency (MHz)	Channel No.	Test Results(MHz)
		20dB Bandwidth
2406	1	3.89
2442	10	3.81
2474	18	3.90

- See next pages for actual measured spectrum plots.

Minimum Standard:


N/A

Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)


Channel 1 of basic mode

20 dB Bandwidth

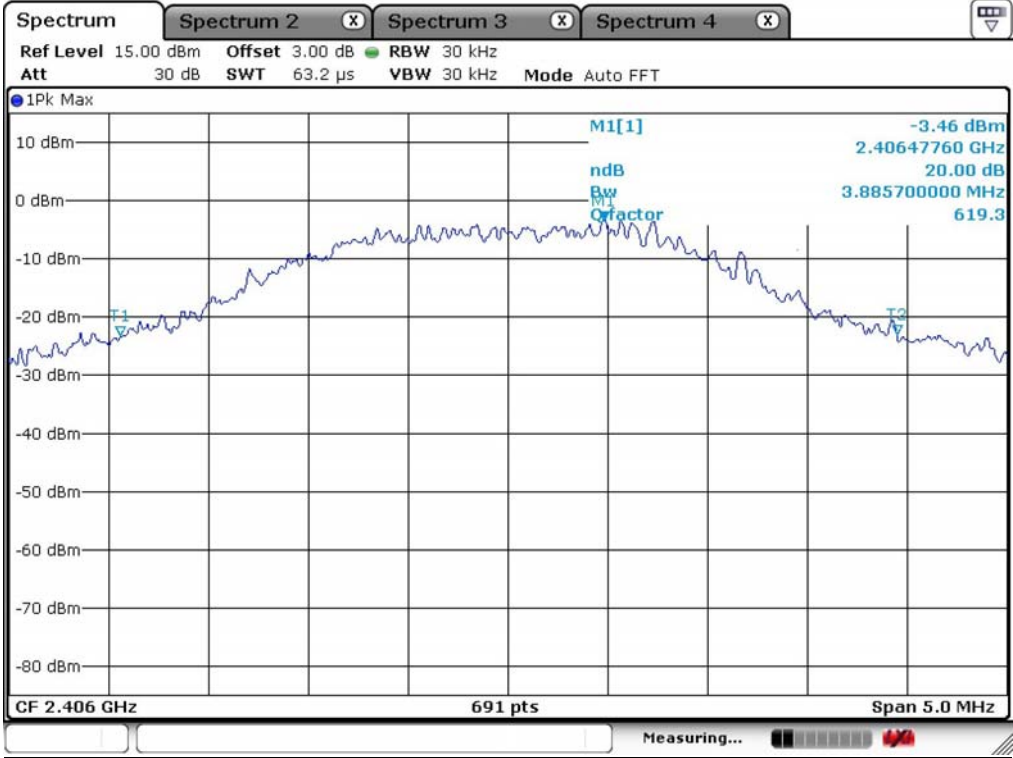


Channel 2 of basic mode

20 dB Bandwidth

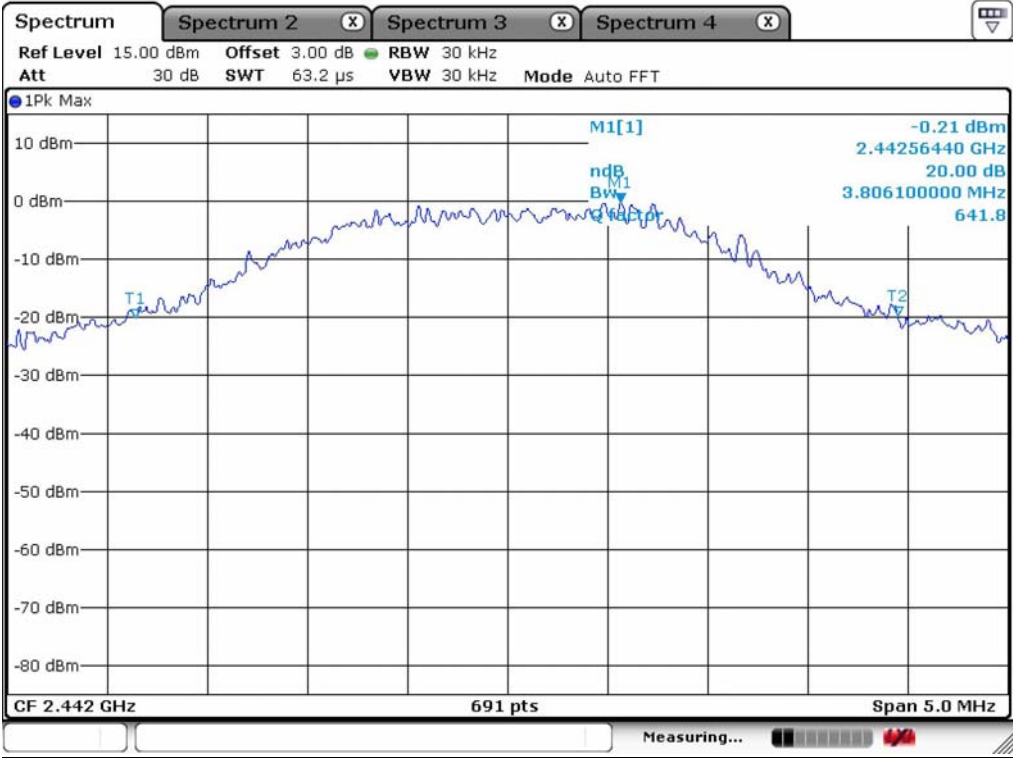

Channel 3 of basic mode

20 dB Bandwidth

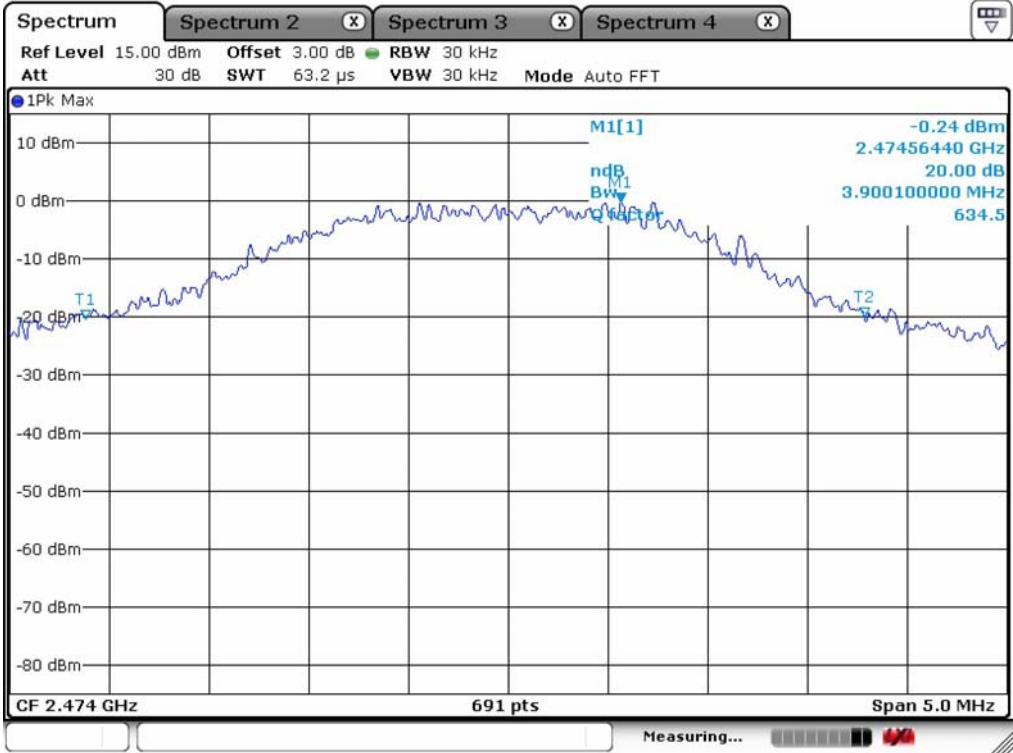

3.3.4 Time of Occupancy (Dwell Time)

Procedure:

The test follows DA00-705. The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

Center frequency = 2438 MHz

Span = zero

RBW = 1 MHz

VBW = 1 MHz (VBW \geq RBW)

Trace = single sweep

Detector function = peak

Measurement Data:

Number of transmission in a 7.2s (18 Hopping*0.4)	Length of Transmission Time (msec)	Result (msec)	Limit (msec)
(Times / 7.2sec) = 41	0.196	8.036	400

- See next pages for actual measured spectrum plots.
- dwell time = {(number of hopping per second / number of slot) x duration time per channel} x 0.4 ms



Minimum Standard:

0.4 seconds within a 30 second period per any frequency

Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

Time of Occupancy for PACKET

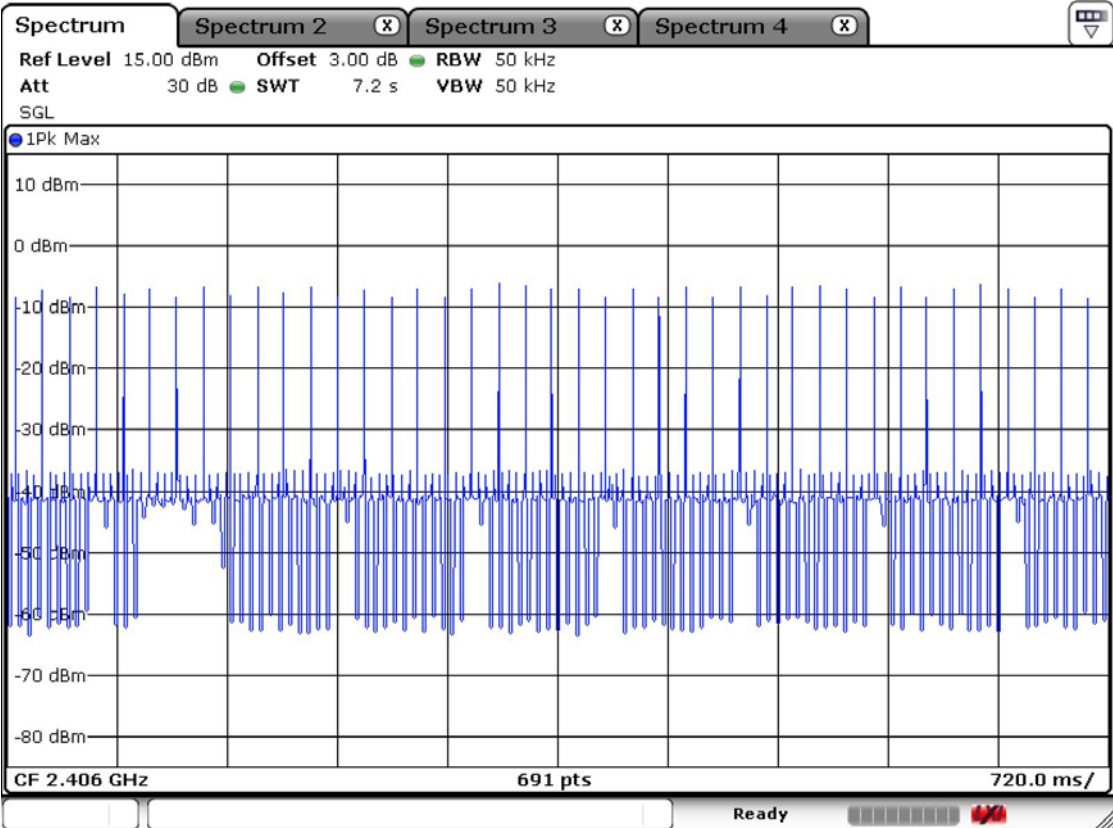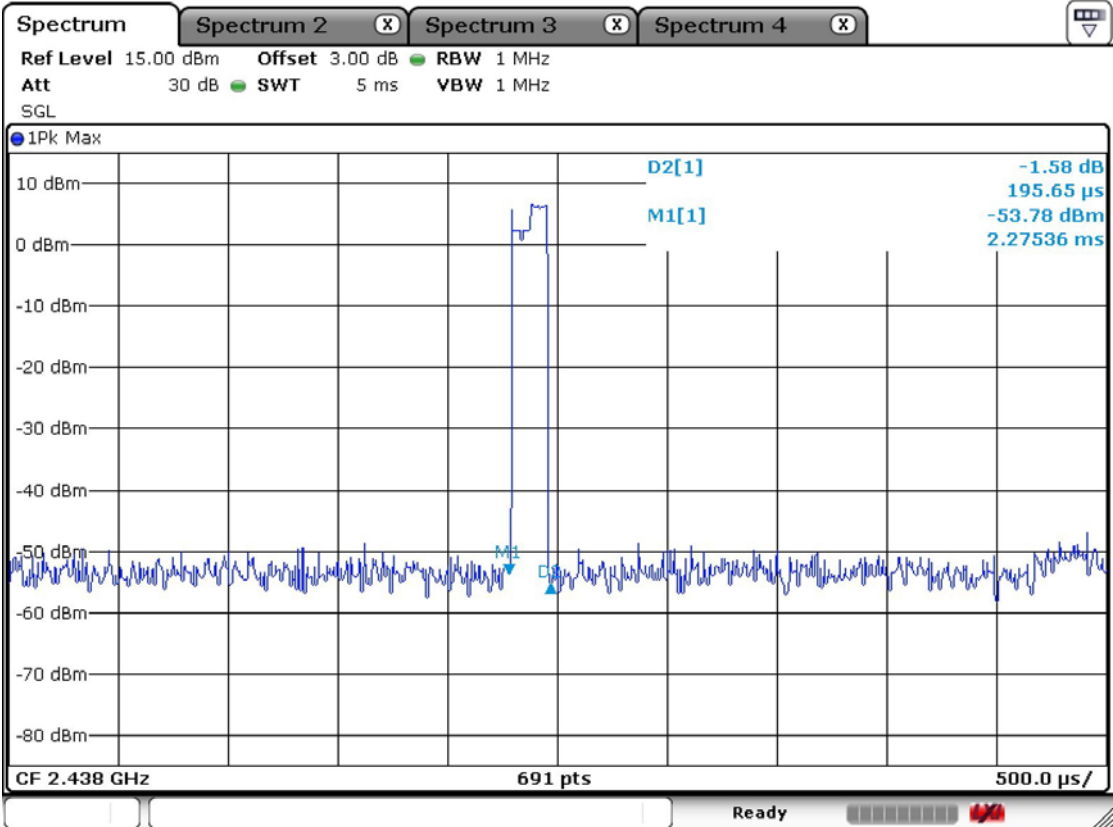

3.3.5 Transmitter Output Power

Procedure:

The test follows DA00-705. The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to :

Center frequency = the highest, middle and the lowest channels

Span = 10 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 3 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 3 MHz (VBW \geq RBW)

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data :

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2406	1	4.60	2.88	Complies
2442	10	7.49	5.61	Complies
2474	18	8.27	6.71	Complies


- See next pages for actual measured spectrum plots.

Minimum Standard:	< 250 mW
--------------------------	----------


Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)


Channel 1

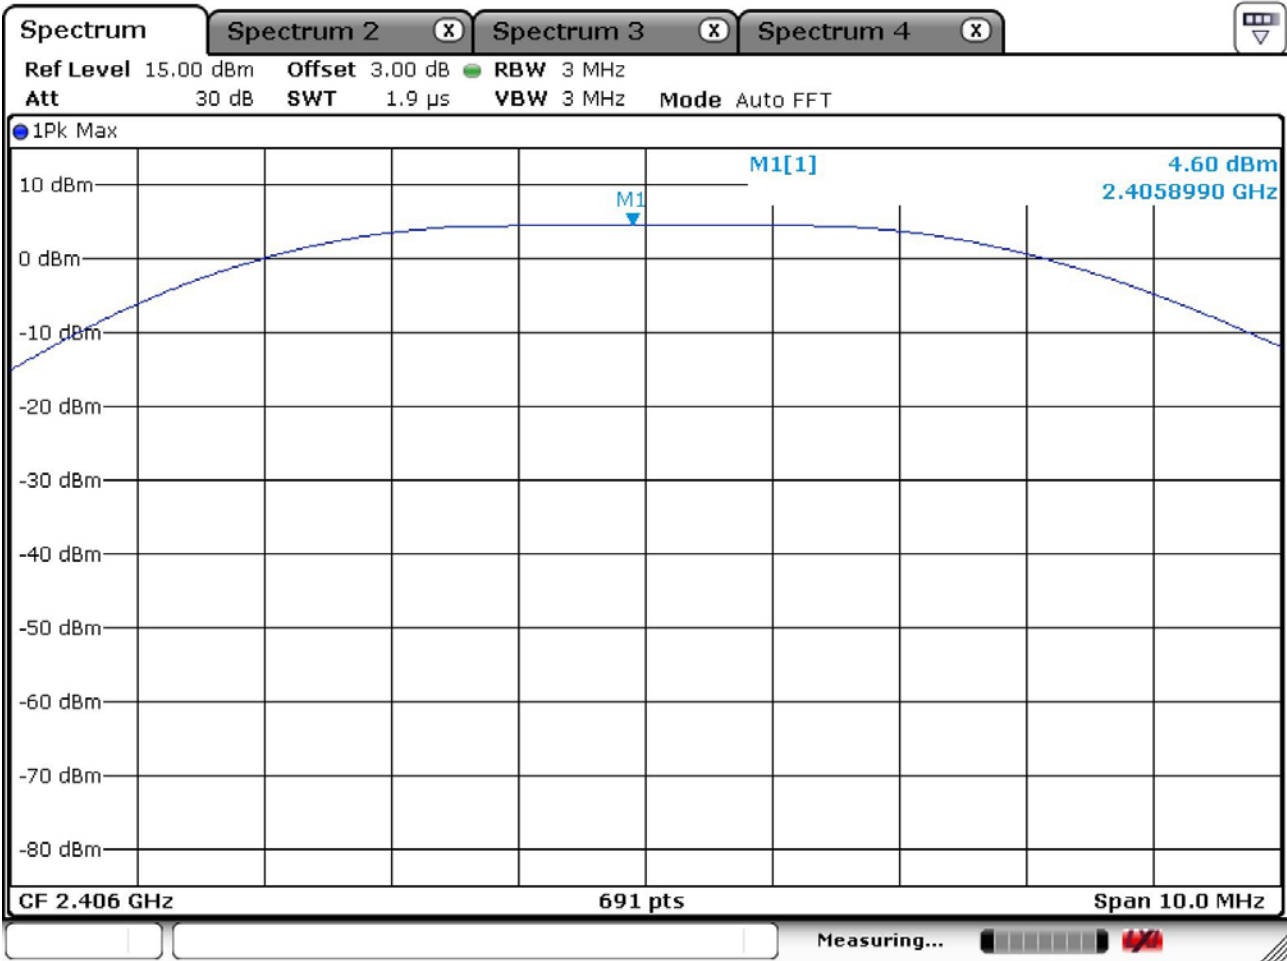

Channel 2

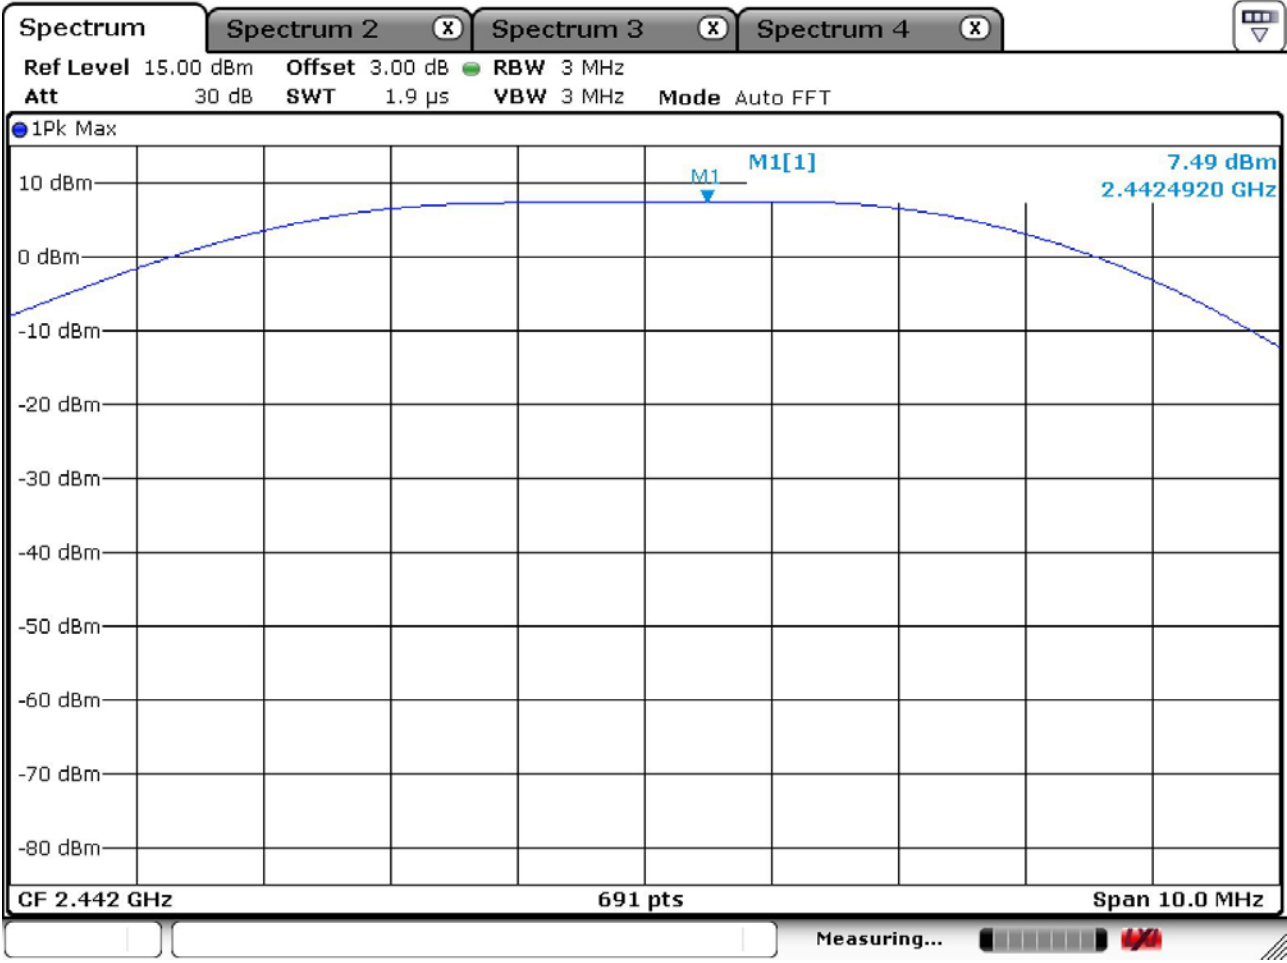

Channel 3

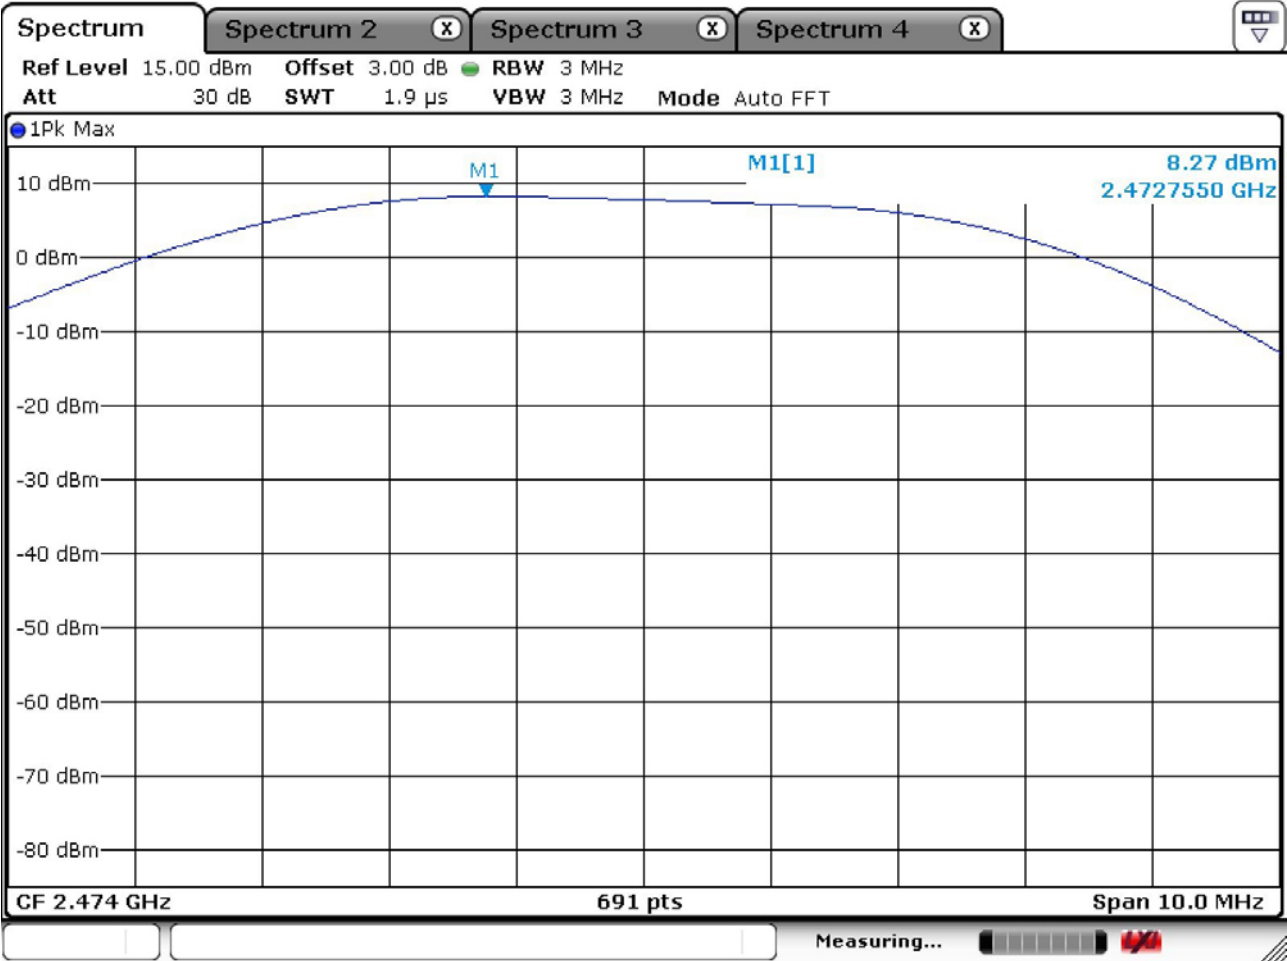

3.3.6 Band Edge

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 30-50 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: **Complies**


- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------


Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

Band – edge
Lower edge

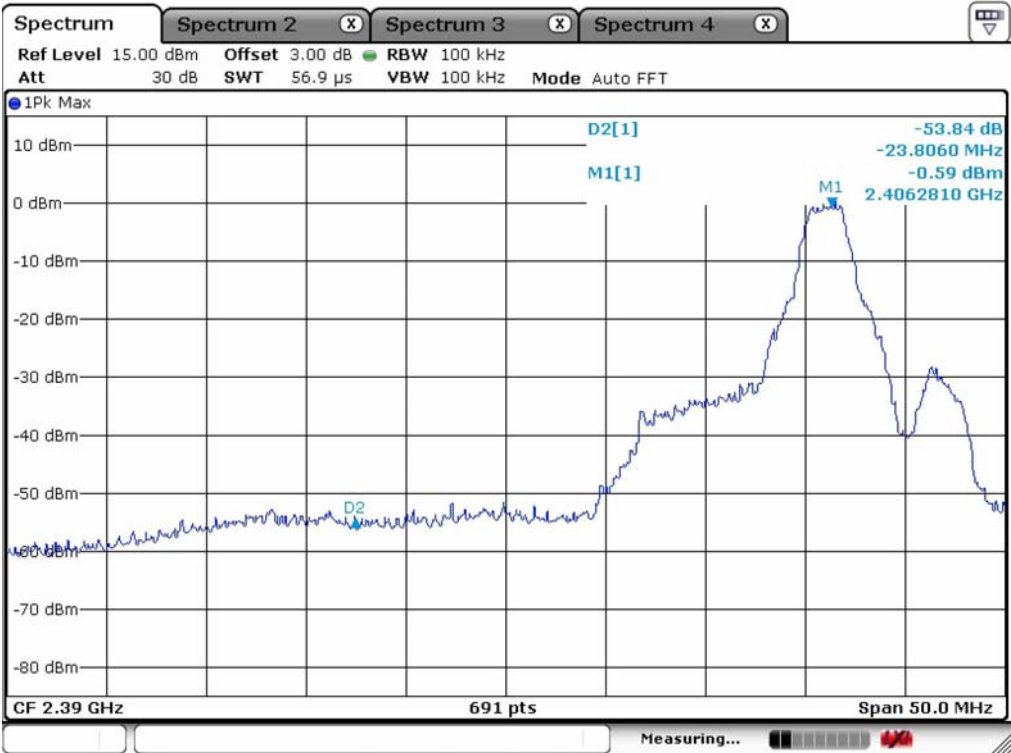

Upper edge

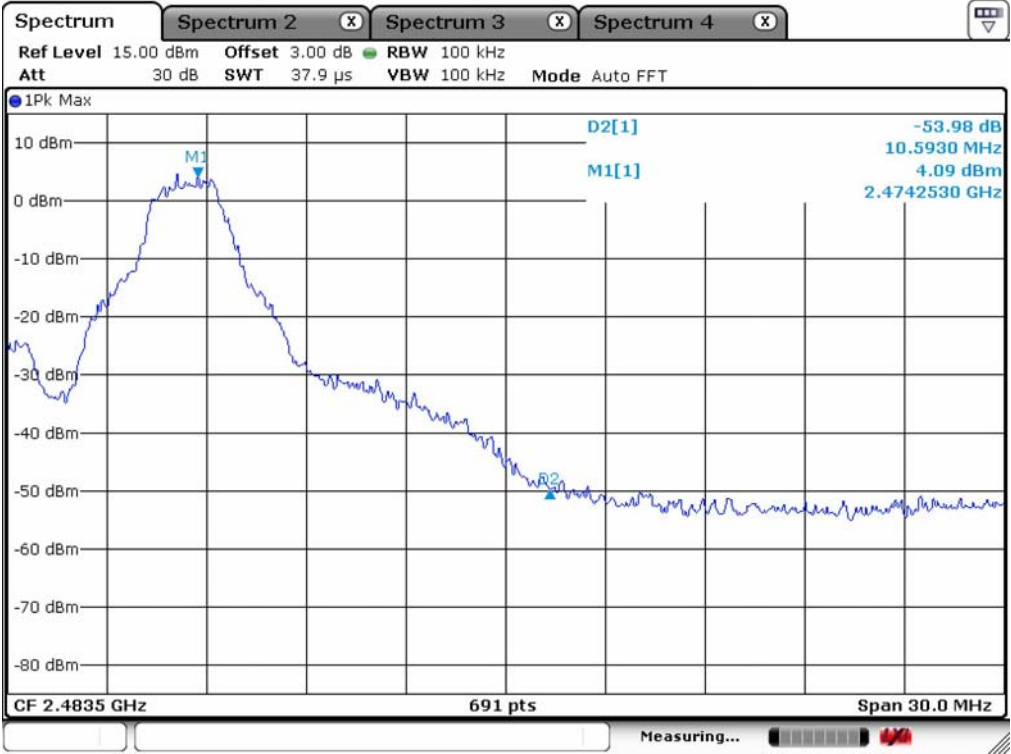

Radiated Band-edges in the restricted band 2310-2390 MHz measurement

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain + Cable Loss	AV / Peak		AV / Peak		AV / Peak	
2385.9	55.7	68.4	V	27.9	33.4	54.0	74.0	50.2	62.9	3.8	11.1

Radiated Band-edges in the restricted band 2483.5-2500 MHz measurement

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain + Cable Loss	AV / Peak		AV / Peak		AV / Peak	
2493.2	50.3	64.5	V	27.9	33.4	54.0	74.0	44.8	59.0	9.2	15.0

Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented.

3.3.7 Conducted Spurious Emissions

Procedure:

The test follows DA00-705. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold

Measurement Data: **Complies**


- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------


Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)


Unwanted Emission – Low channel
Frequency Range = 30 MHz ~ 26.5 GHz

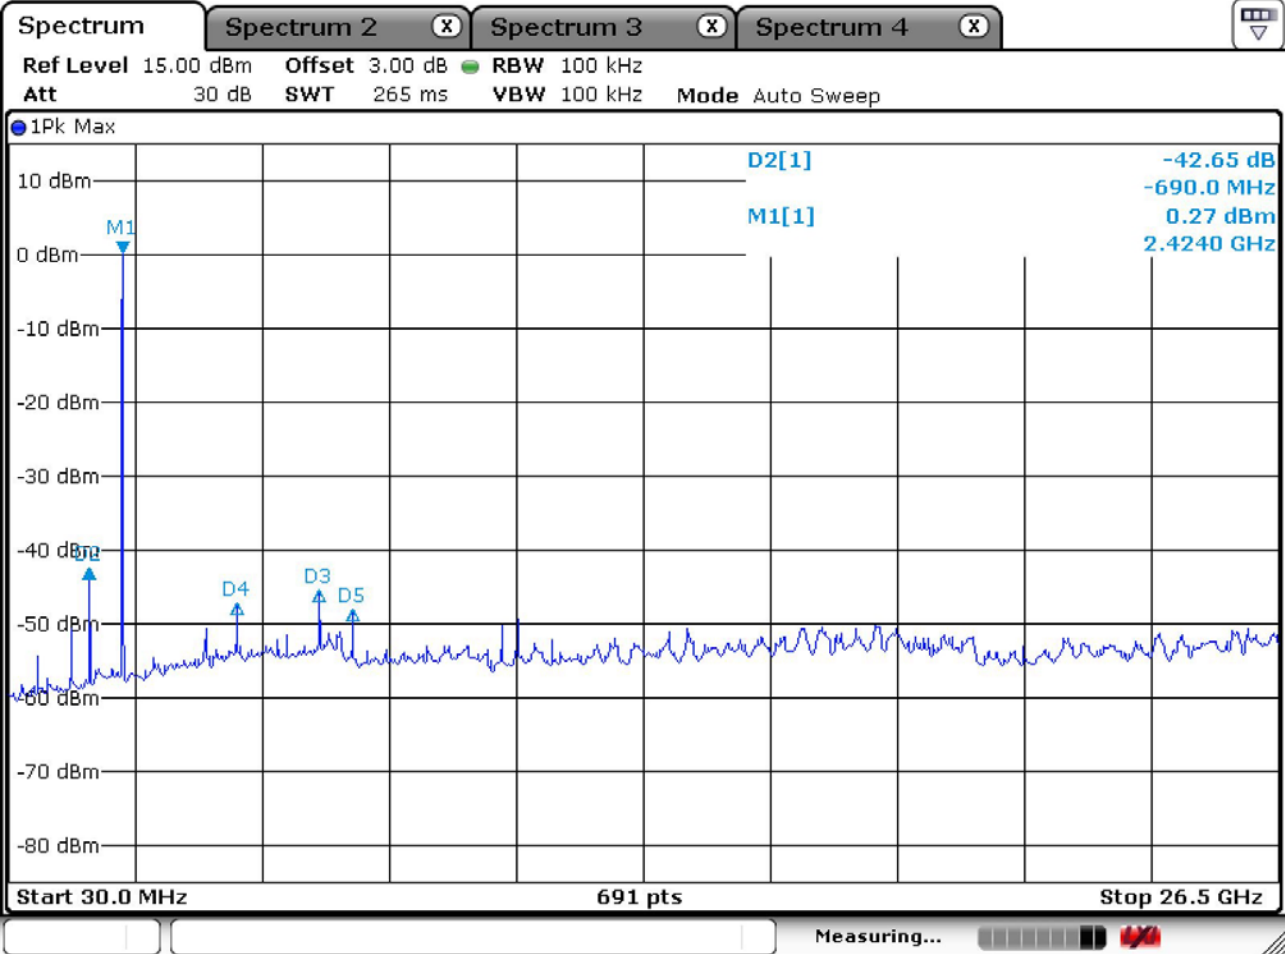

Unwanted Emission – Middle channel
Frequency Range = 30 MHz ~ 26.5 GHz

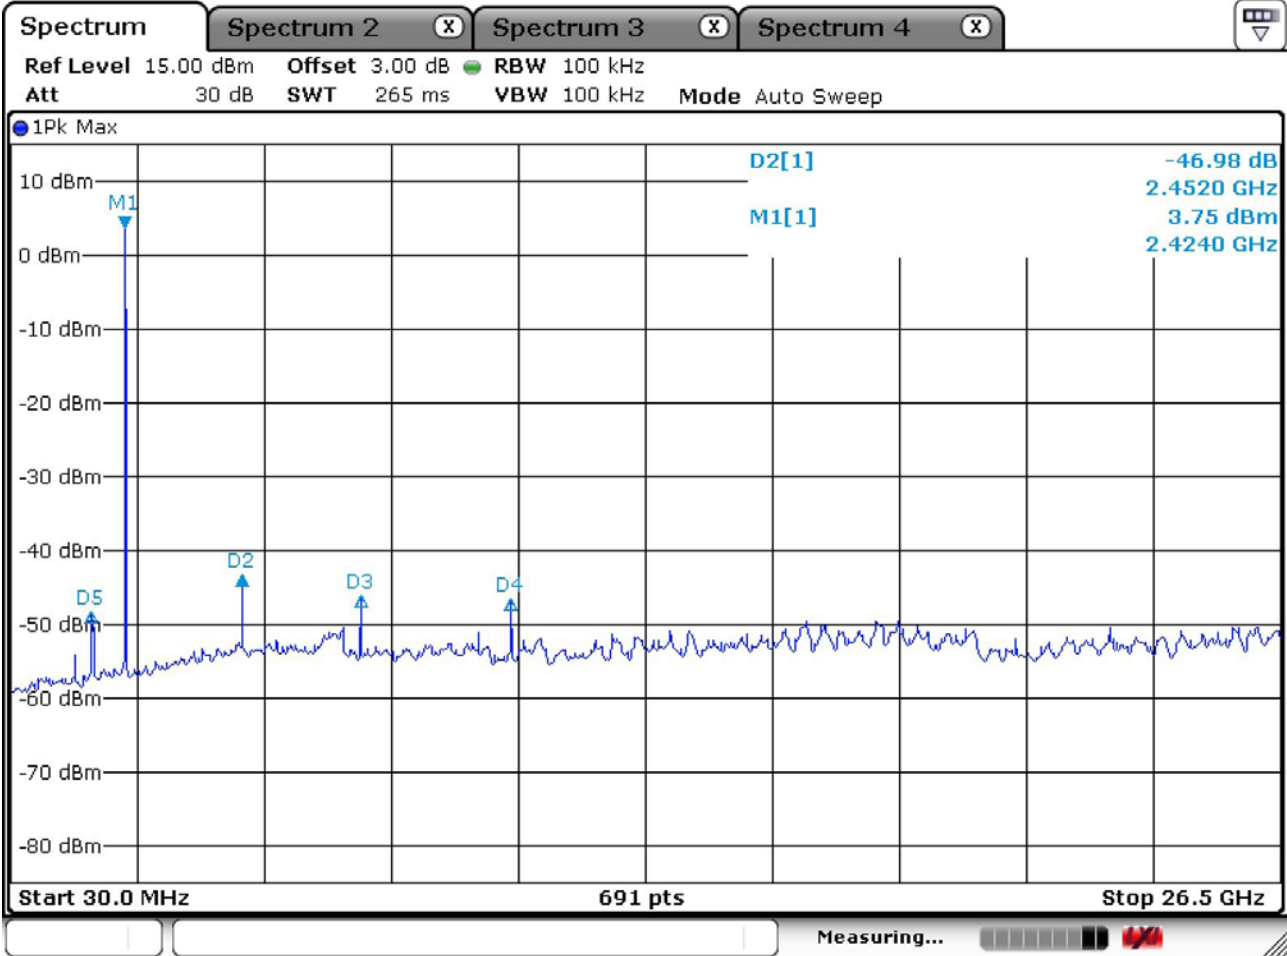

Unwanted Emission – High channel
Frequency Range = 30 MHz ~ 26.5 GHz

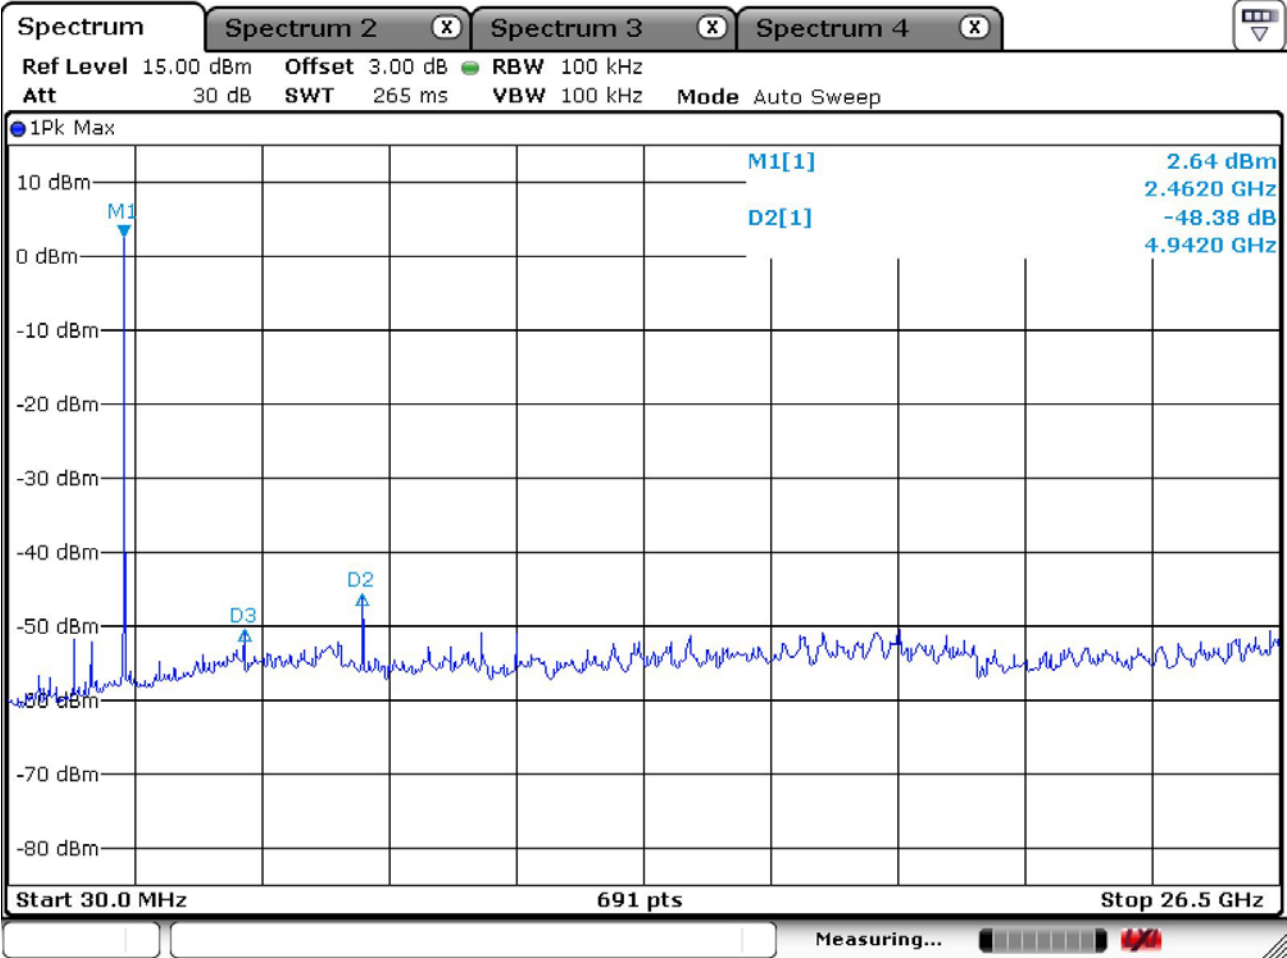

3.3.8 Field Strength of Harmonics

Procedure:

Radiated emissions from the EUT were measured according to the dictates of DA000705. The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

- (a) In the frequency range of 9kHz to 30 MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Trace = max hold


Peak: VBW \geq RBW

Average: VBW=10Hz


Detector function = peak

Sweep = auto


below 30MHz

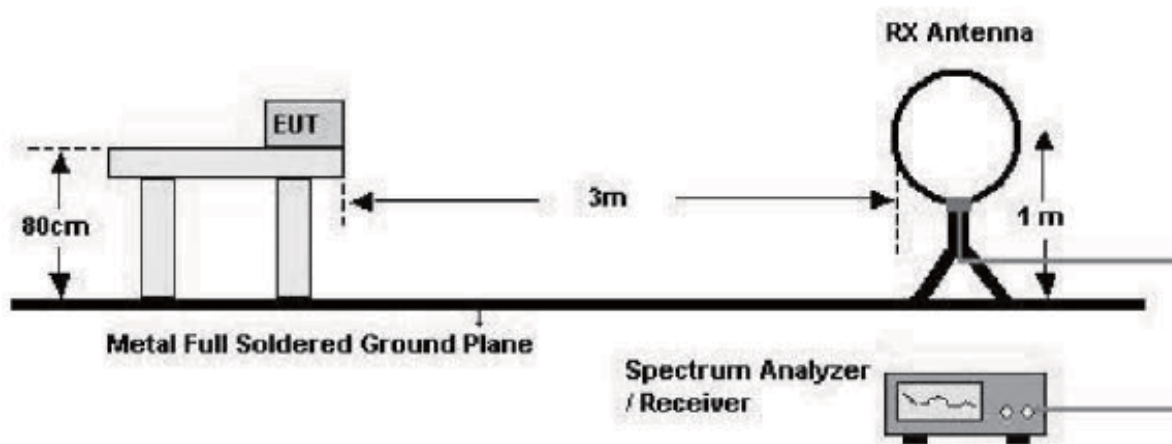

below 1GHz (30MHz to 1GHz)

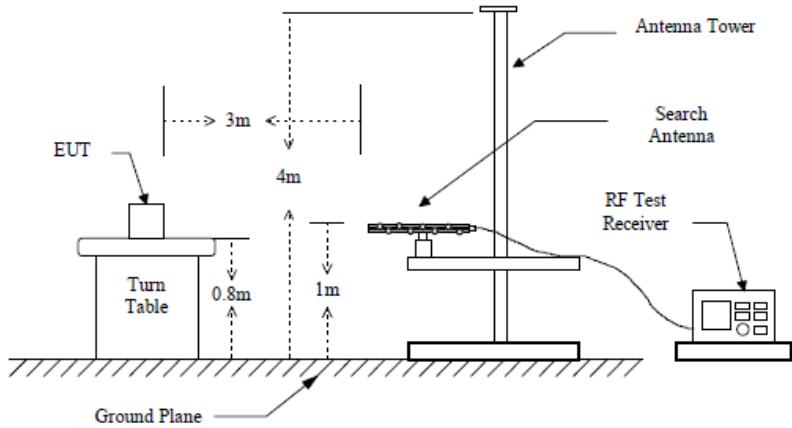

above 1GHz

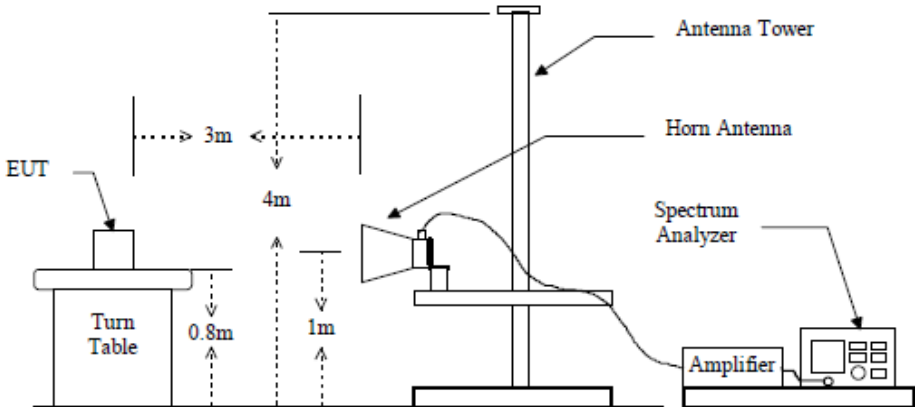

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20dB below limit.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
0.009 ~ 0.490	2400/F(kHz) (@ 300m)
0.490 ~ 1.705	24000/F(kHz) (@ 30m)
1.705 ~ 30	30(@ 30m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data :

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Correction Factor		Limits [dBuV/m] AV/Peak		Result [dBuV/m] AV/Peak		Margin [dB] AV / Peak	
	Antenna	Amp.Gain+Cable		AV/Peak	AV/Peak	AV / Peak	AV / Peak				
4805.8	49.1	57	V	25.1	33.7	54.0	74.0	40.5	48.4	13.5	25.6
Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Correction Factor		Limits [dBuV/m] AV/Peak		Result [dBuV/m] AV/Peak		Margin [dB] AV / Peak	
Antenna	Amp.Gain+Cable	AV/Peak		AV/Peak	AV / Peak	AV / Peak					
4883.3	51.3	60.5	V	25.1	33.7	54.0	74.0	42.7	51.9	11.3	22.1
Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Correction Factor		Limits [dBuV/m] AV/Peak		Result [dBuV/m] AV/Peak		Margin [dB] AV / Peak	
Antenna	Amp.Gain+Cable	AV/Peak		AV/Peak	AV / Peak	AV / Peak					
4952.4	52.5	62.9	V	25.1	33.7	54.0	74.0	43.9	54.3	10.1	19.7


- No other emissions were detected at a level greater than 20dB below limit.

Radiated Emissions – Play mode



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: ET28KH TEST MODE: Play mode
Temp Humi : 25 / 55 Tested by: PARK H W

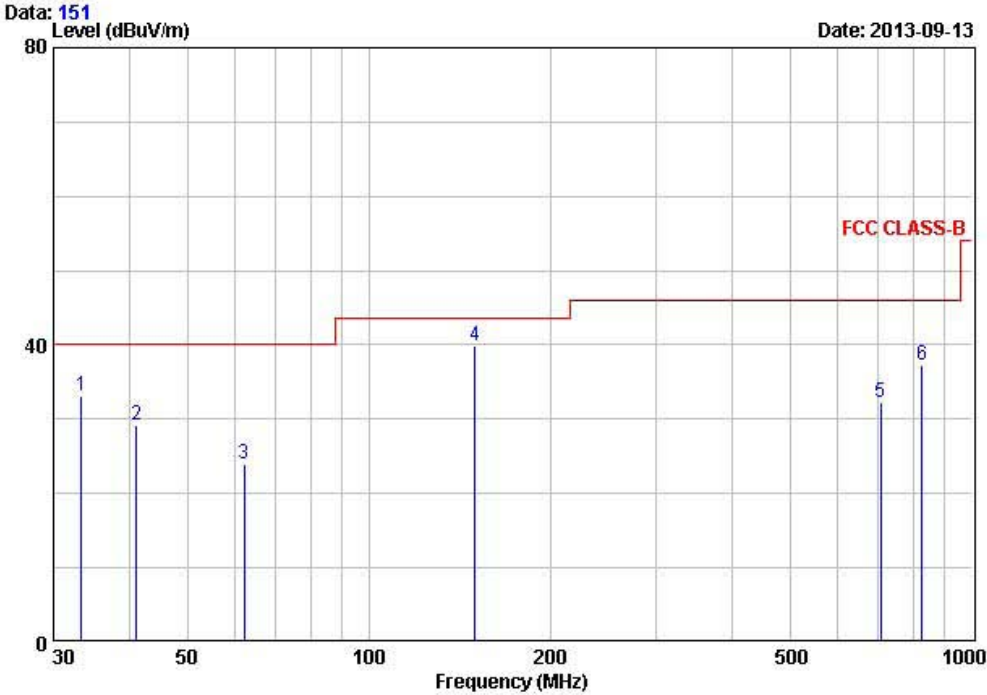

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV/m	dB/m	dBuV/m	QP	dB	cm	deg	
1	33.40	50.40	-17.18	33.22	40.00	6.78	100	21	VERTICAL
2	41.20	45.50	-16.31	29.19	40.00	10.81	100	69	VERTICAL
3	62.10	40.70	-16.74	23.96	40.00	16.04	245	44	VERTICAL
4	150.01	54.10	-14.27	39.83	43.50	3.67	100	342	VERTICAL
5	706.70	36.50	-4.32	32.18	46.00	13.82	100	64	HORIZONTAL
6	827.40	39.20	-1.90	37.30	46.00	8.70	100	188	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions – Wireless mode




243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: ET28KH

TEST MODE: Wireless mode

Temp Humi : 25 / 55

Tested by: PARK H W

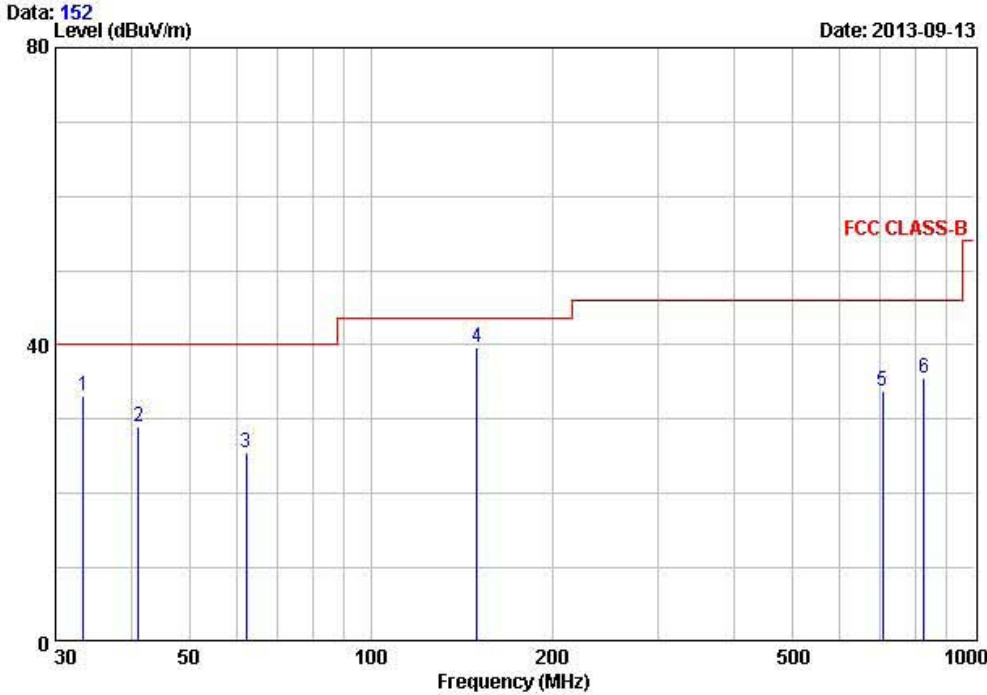

Peak	Freq MHz	Reading dBuV/m	C.F dB/m	Result dBuV/m	Limit QP dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1	33.40	50.40	-17.18	33.22	40.00	6.78	100	21	VERTICAL
2	41.20	45.40	-16.31	29.09	40.00	10.91	100	100	VERTICAL
3	62.10	42.20	-16.74	25.46	40.00	14.54	336	140	VERTICAL
4	150.01	54.00	-14.27	39.73	43.50	3.77	100	342	VERTICAL
5	706.20	38.10	-4.33	33.77	46.00	12.23	100	99	HORIZONTAL
6	827.50	37.50	-1.90	35.60	46.00	10.40	100	10	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.3.9 AC Conducted Emissions

Procedure:

AC power line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4:2003.

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- Refer to the next page.
- No other emissions were detected at a level greater than 20dB below limit
- It gave the worse case emissions

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Note: The limits will decrease with the frequency logarithmically within 0.15MHz to 0.5MHz


Radiated Emissions –Play mode - LINE



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : ET28KH Phase : LINE
 Test Mode : Play mode Test Power : 120 / 60
 Temp./Humi. : 25 / 57 Test Engineer : PARK H W

Data: 281 File: C:\Conducted Data\2013\LTA_Conduction_1309-1.EMI (443) Date: 09-11-2013

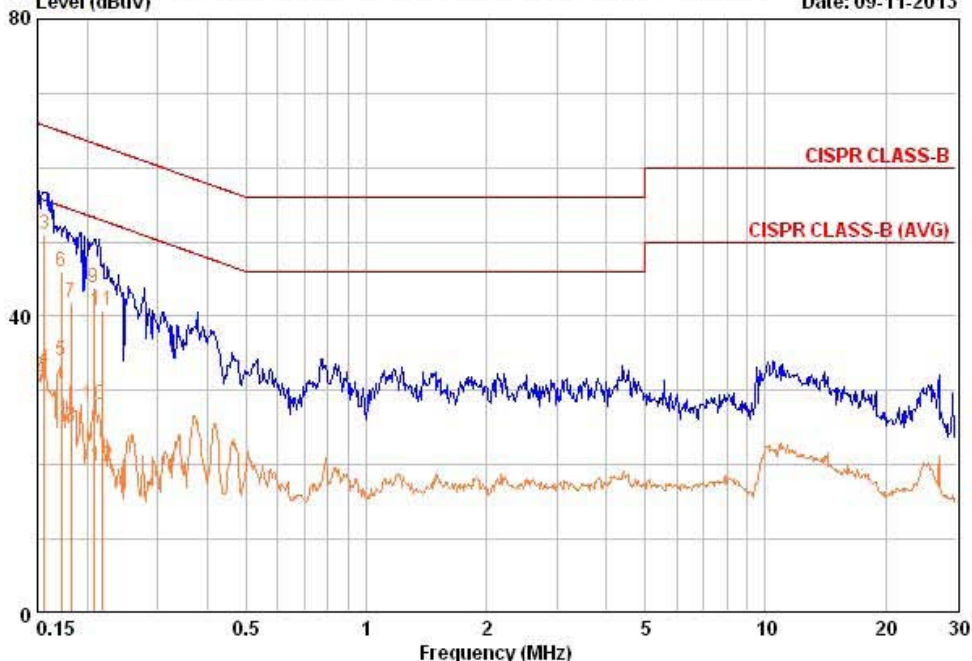

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.150	40.14	22.24	9.58	49.72	31.82	66.00	56.00	16.28	24.18
0.156	41.44	23.34	9.58	51.02	32.92	65.67	55.67	14.65	22.75
0.172	36.44	24.44	9.58	46.02	34.02	64.86	54.86	18.84	20.84
0.182	32.25	15.45	9.58	41.83	25.03	64.39	54.39	22.57	29.37
0.208	34.25	18.45	9.58	43.83	28.03	63.28	53.28	19.45	25.25
0.218	31.25	10.25	9.58	40.83	19.83	62.89	52.89	22.06	33.06

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


Radiated Emissions – Play mode - NEUTRAL



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : ET28KH Phase : NEUTRAL
 Test Mode : Play mode Test Power : 120 / 60
 Temp./Humi. : 25 / 57 Test Engineer : PARK H W

Data: 283 File: C:\Conducted Data\2013\LTA_Conduction_1309-1.EMI (443) Date: 09-12-2013

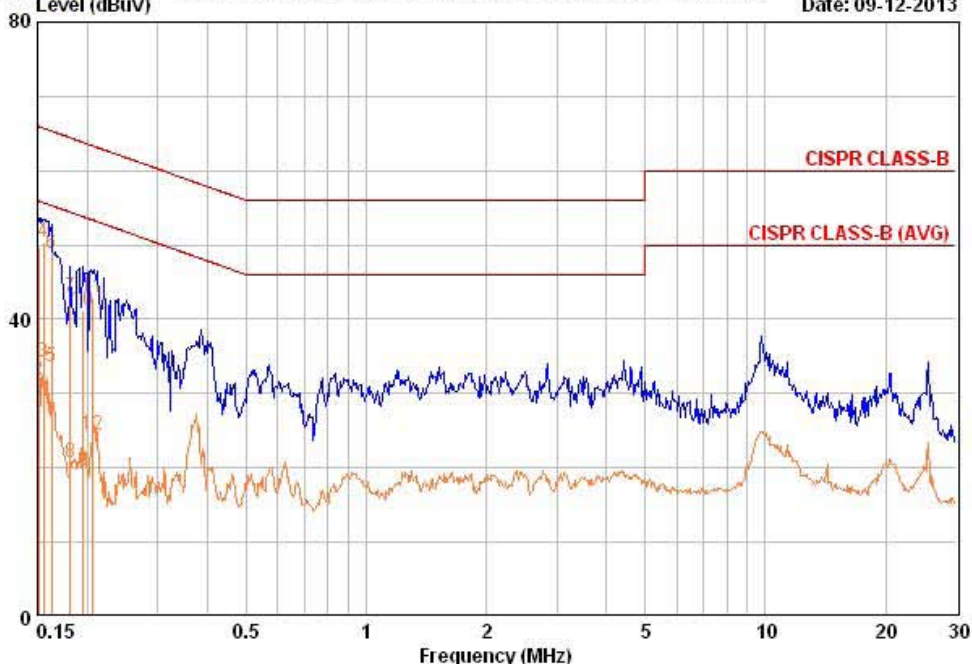

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.151	40.14	22.24	9.62	49.76	31.86	65.94	55.94	16.19	24.09
0.155	40.84	24.54	9.62	50.46	34.16	65.73	55.73	15.27	21.57
0.163	39.14	24.04	9.61	48.75	33.65	65.31	55.31	16.56	21.66
0.181	33.35	11.05	9.59	42.94	20.64	64.44	54.44	21.50	33.80
0.195	31.65	10.15	9.58	41.22	19.72	63.82	53.82	22.60	34.10
0.207	33.45	14.95	9.57	43.02	24.52	63.32	53.32	20.30	28.80

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


Radiated Emissions –Wireless mode - LINE



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : ET28KH Phase : LINE
 Test Mode : Wireless mode Test Power : 120 / 60
 Temp./Humi. : 25 / 57 Test Engineer : PARK H W

Data: 285 File: C:\Conducted Data\2013\LTA_Conduction_1309-1.EMI (443) Date: 09-12-2013

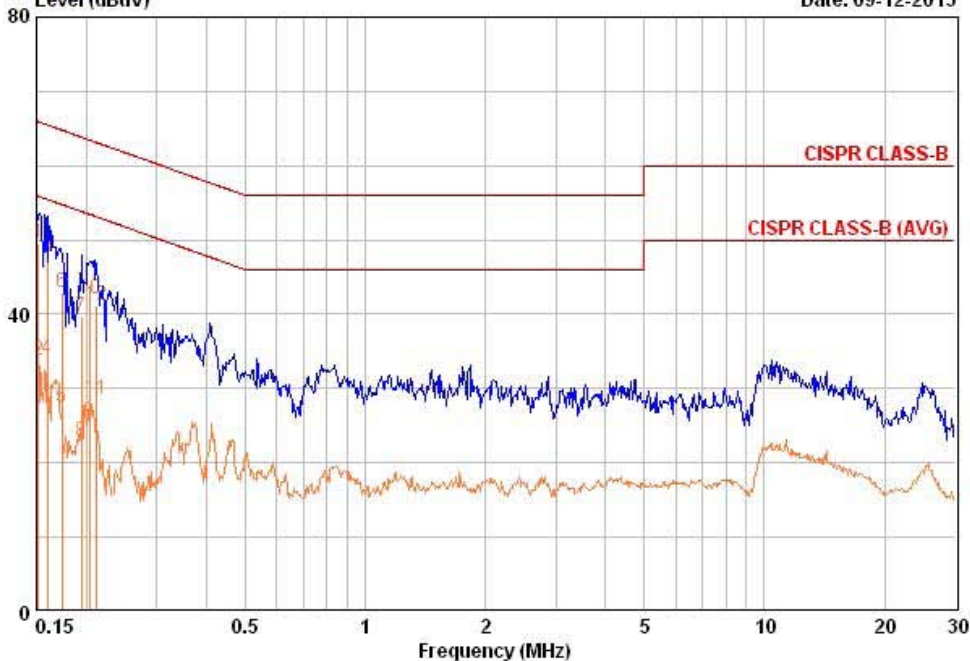

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.152	39.84	24.24	9.58	49.42	33.82	65.89	55.89	16.47	22.07
0.160	37.84	24.34	9.58	47.42	33.92	65.46	55.46	18.04	21.54
0.174	33.45	17.85	9.58	43.03	27.43	64.77	54.77	21.74	27.34
0.194	30.15	13.25	9.58	39.73	22.83	63.86	53.86	24.13	31.03
0.204	32.45	15.85	9.58	42.03	25.43	63.45	53.45	21.42	28.02
0.212	31.65	18.95	9.58	41.23	28.53	63.13	53.13	21.90	24.60

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


Radiated Emissions – Wireless mode - NEUTRAL



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : ET28KH	Phase : NEUTRAL
Test Mode : Wireless mode	Test Power : 120 / 60
Temp./Humi. : 25 / 57	Test Engineer : PARK H W

Data: 287 File: C:\Conducted Data\2013\LTA_Conduction_1309-1.EMI (443) Date: 09-12-2013

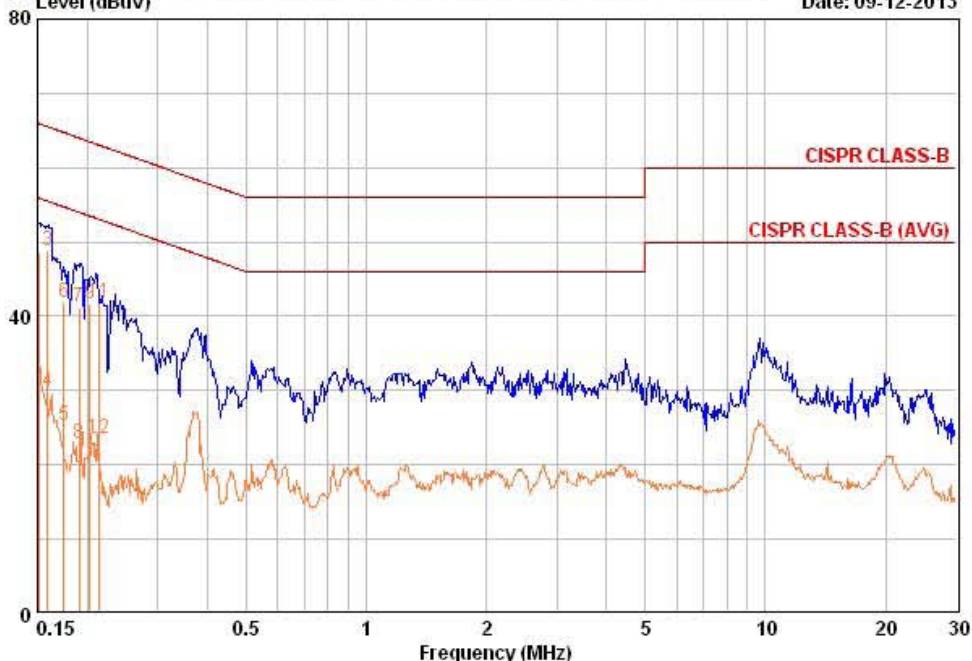

Freq MHz	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
	QP	AV		QP	AV	QP	AV		
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.151	39.04	20.24	9.62	48.66	29.86	65.94	55.94	17.29	26.09
0.159	39.24	20.24	9.61	48.85	29.85	65.52	55.52	16.66	25.66
0.175	32.25	15.65	9.59	41.84	25.24	64.72	54.72	22.88	29.48
0.191	31.65	13.25	9.58	41.23	22.83	63.99	53.99	22.76	31.16
0.203	32.05	12.25	9.57	41.62	21.82	63.49	53.49	21.87	31.67
0.213	32.35	14.05	9.57	41.92	23.62	63.09	53.09	21.17	29.47

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Signal Analyzer (9kHz~30GHz)	FSV-30	100757	R&S	1 year	2013-01-15
2	Spectrum Analyzer (9kHz~2.9GHz)	8594E	3649A03649	HP	2 year	2012-03-26
3	Signal Generator (~3.2GHz)	8648C	3623A02597	HP	1 year	2013-03-25
4	SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2013-03-25
5	Attenuator (3dB)	8491A	37822	HP	2 year	2012-09-22
6	Attenuator (10dB)	8491A	63196	HP	2 year	2012-09-22
7	Test Receiver (~30MHz)	ESHS10	828404/009	R&S	1 year	2013-03-25
8	EMI Test Receiver (~7GHz)	ESCI7	100722	R&S	1 year	2013-09-16
9	RF Amplifier (~1.3GHz)	8447D OPT 010	2944A07684	HP	1 year	2013-09-16
10	RF Amplifier (1~26.5GHz)	8449B	3008A02126	HP	1 year	2013-03-25
11	Horn Antenna (1~18GHz)	3115	00114105	ETS	2 year	2013-05-13
12	DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2012-03-15
13	DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2012-03-15
14	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2013-05-03
15	Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2013-03-14
16	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
17	Power Divider	11636A	06243	HP	2 year	2012-09-22
18	DC Power Supply	6674A	3637A01657	Agilent	-	-
19	Frequency Counter	5342A	2826A12411	HP	1 year	2013-03-25
20	Power Meter	EPM-441A	GB32481702	HP	1 year	2013-03-25
21	Power Sensor	8481A	US41030291	HP	1 year	2013-09-16
22	Audio Analyzer	8903B	3729A18901	HP	1 year	2013-09-16
23	Modulation Analyzer	8901B	3749A05878	HP	1 year	2013-09-16
24	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2013-09-16
25	Stop Watch	HS-3	601Q09R	CASIO	1 year	2013-03-15
26	LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2013-09-16
27	Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2013-04-25
28	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2013-07-25
29	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	-	-
30	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	-	-
31	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	1 year	2012-12-14