



## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

FCC ID.....: PBNMP30

Compiled by

( position+printed name+signature)..: File administrators Jack Yu

Jack Yu

Supervised by

( position+printed name+signature)..: Technique principal Jerry You

Jerry You

Approved by

( position+printed name+signature)..: Manager Can Liu

Can Liu

Date of issue.....: Jul. 10, 2017

**Representative Laboratory Name.** : Shenzhen Asia Test Technology Co.,Ltd.

Address.....: 7 / F, Xinwei Building, Gushu Village, Xixiang Town, Baoan District, Shenzhen, China

**Applicant's name.** : ENTERMEDIA CO., LTD.

Address.....: 157-1, Seong-ro, Ojeong-gu, Bucheon-Si, Gyunggi-do, South Korea

**Test specification.** :

Standard.....: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen Asia Test Technology Co.,Ltd.

### Shenzhen Asia Test Technology Co.,Ltd.All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Asia Test Technology Co.,Ltd. as copyright owner and source of the material. Shenzhen Asia Test Technology Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description.** : BLUETOOTH MICROPHONE

Trade Mark.....: MAGICSING

**Manufacturer.** : SHENZHEN TUOBU Electronic Technology Co. Ltd.

Model/Type reference.....: MP30

Listed Models .....: N/A

Modulation Type.....: GFSK,8DPSK,π/4DQPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Rating.....: DC 3.7V

Result.....: **PASS**



# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 2 of 45 -

## Contents

1	TEST STANDARDS .....	3
2	SUMMARY .....	4
2.1	General Remarks	4
2.2	Product Description	4
2.3	Equipment Under Test	4
2.4	EUT operation mode	4
2.5	Internal Identification of AE used during the test	5
2.6	Related Submittal(s) / Grant (s)	5
2.7	Modifications	5
3	TEST ENVIRONMENT .....	6
3.1	Address of the test laboratory	6
3.2	Test Facility	6
3.3	Environmental conditions	6
3.4	Test Conditions	6
3.5	Summary of measurement results	7
3.6	Equipments Used during the Test	8
4	TEST CONDITIONS AND RESULTS .....	10
4.1	AC Power Conducted Emission	10
4.2	Radiated Emission	13
4.3	Maximum Peak Output Power	20
4.4	20dB Bandwidth	21
4.5	Band Edge	24
4.6	Frequency Separation	29
4.7	Number of hopping frequency	31
4.8	Time of Occupancy (Dwell Time)	33
4.9	Spurious RF Conducted Emission	37
4.10	Pseudorandom Frequency Hopping Sequence	42
4.11	Antenna Requirement	43



## 1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices



## 2 SUMMARY

### 2.1 General Remarks

Date of receipt of test sample	:	Jun. 26, 2017
Testing commenced on	:	Jul. 01, 2017
Testing concluded on	:	Jul. 07, 2017

### 2.2 Product Description

The **ENTERMEDIA CO., LTD.** 's Model: MP30 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	BLUETOOTH MICROPHONE
Model Number	MP30
Listed Models	N/A
Model differences	N/A
Antenna Type	PCB
Antenna Gain	-0.64dBi(Calculated)
BT FCC Operation frequency	2402MHz-2480MHz
BT Modulation Type	GFSK,8DPSK,π/4DQPSK(BT 3.0)
Hardware version	MP30-1518-019C
Software version	V2.0
Bluetooth	BT 3.0
Extreme temp. Tolerance	-10°C to +45°C
Extreme vol. Limits	3.3VDC to 4.2VDC (nominal:3.7VDC)

### 2.3 Equipment Under Test

#### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.7V

### 2.4 EUT operation mode

The EUT has been tested under typical operating condition. There are EDR (Enhanced Data Rate) and BDR (Basic Data Rate) mode. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. There are 79 channels of EUT, and the test carried out at the lowest channel, middle channel and highest channel. all test performed use fully-charged battery.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448



# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 5 of 45 -

07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
<b>39</b>	<b>2441</b>		

## 2.5 Internal Identification of AE used during the test

AE ID*	Description
AE1	Adapter

AE1

Model: HS05001000ES

INPUT: AC100-240V 50/60Hz 0.3A Max

OUTPUT: DC 5.0V 1.0A

\*AE ID: is used to identify the test sample in the lab internally.

## 2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: PBNMP30** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.7 Modifications

No modifications were implemented to meet testing criteria.



## 3 TEST ENVIRONMENT

### 3.1 Address of the test laboratory

Shenzhen Asia Test Technology Co.,Ltd.

7 / F, Xinwei Building, Gushu Village, Xixiang Town, Baoan District, Shenzhen, China

### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 348715

Shenzhen Asia Test Technology Co.,Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

### 3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C  
Humidity: 30-60 %  
Atmospheric pressure: 950-1050mbar

### 3.4 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
20dB Emission Bandwidth (EBW)	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch00,TM1_DH5_Ch39,TM1_DH5_Ch78, TM3_3DH5_Ch00,TM3_3DH5_Ch39,TM3_3DH5_Ch78,
Carrier Frequency Separation	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Hop, TM3_3DH5_Hop,
Number of Hopping Channel	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Hop ,TM3_3DH5_Hop,
Time of Occupancy (Dwell Time)	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch39 ,TM3_3DH5_Ch39.
Maximum Peak Conducted Output Power	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH3_Ch00,TM1_DH3_Ch39,TM1_DH3_Ch78,TM2_2DH3_Ch00,TM2_2DH3_Ch39,TM2_2DH3_Ch78,TM3_3DH3_Ch00,TM3_3DH3_Ch39,TM3_3DH3_Ch78,
Bandedge spurious emission (Conducted)	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH3_Ch00,TM1_DH3_Ch78, TM3_3DH3_Ch00,TM3_3DH3_Ch78,
Conducted RF Spurious Emission	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78,



Radiated Emissions in the Restricted Bands	Meas. Method	TM3_3DH5_Ch39, TM3_3DH5_Ch78.
		ANSI C63.10:2013 30 MHz to 1 GHz: Pre: RBW=100kHz; VBW=300kHz; Det. = Peak. Final: RBW=120kHz; Det. = CISPR Quasi-Peak. 1 GHz to 26.5GHz: Average: RBW=1 MHz; VBW= 10Hz; Det. = Peak; Sweep-time= Auto; Trace = Single. Peak: RBW=1 MHz; VBW= 3 MHz; Det. = Peak; Sweep-time= Auto; Trace≥ MaxHold * 100.
	Test Environment	NTNV
	EUT Conf.	30 MHz-1GHz TM1_DH5_Ch00 (Worst Conf.). 1-18 GHz: TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, (Worst Conf.).

Test Case	Test Conditions		
	Configuration	Description	
AC Power Line Conducted Emissions	Measurement Method	AC mains conducted.	
	Test Environment	NTNV	
	EUT Configuration	TM1_DH5_Ch39. (Worst Conf.).	

Note:

1. For Radiated Emissions, By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.
2. For  $\pi/4$  QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worse case 8-DPSK and GFSK.

### 3.5 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e)	Power spectral density	-/-	-/-	-/-	-/-	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Not applicable for FHSS
§15.247(a)(1)	Carrier Frequency separation	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Middle	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Number of Hopping channels	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Full	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Spectrum bandwidth of a FHSS system 20dB bandwidth	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(1)	Maximum output power	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	Band edge compliance conducted	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies



§15.205	Band edge compliance radiated	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions conducted	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions radiated	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	GFSK	-/-	GFSK	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	GFSK	-/-	GFSK	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. We tested all test mode and recorded worst case in report

### 3.6 Equipments Used during the Test

Equipment No.	Instrument	Manufacturer	Model Name	Serial Number	Specification	Cal. Data	calibration due dates
1	Semi-anechoic chamber	Changzhou Chengyu	EC3088	N/A	9*6*6m	10/25/2016	10/24/2017
2	Loop Antenna	ARA	PLA-1030/B	1029	9kHz-30 MHz	03/20/2017	03/19/2018
3	Broadband antenna	R&S	VULB 9160	VULB91 60-516	30MHz-1500 MHz	10/25/2016	10/24/2017
4	Horn antenna	R&S	BBHA 9120D	10087	1GHz-18GHz	06/05/2016	06/04/2016
5	SHF-EHF Horn	SCHWARZBECK	BBHA9170	BBHA9170367	15GHz-26.5GHz	12/03/2016	12/02/2017
6	Test receiver	R&S	ESCI	101686	9KHz-3GHz	10/25/2016	10/24/2017
7	EMI Measuring Receiver	Agilent	N9020A	MY49100104	20KHz-26.5GHz	10/25/2016	10/24/2017
8	Multi-device controller	MF	MF-7868	MF78680 8762	N/A	10/25/2016	10/24/2017



# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 9 of 45 -

9	Amplifier	EM	EM-30180	060538	1GHz-18GHz	10/25/2016	10/24/2017
10	Amplifier	Schwarzbeck	BBV 9475	BBV 9475-663	1GHz-18GHz	06/05/2016	06/04/2017
11	Spectrum Analyzer	agilent	E4440B	US44300368	9kHz-26.5GHz	06/05/2016	06/04/2017
12	Test receiver	R&S	ESCI	101689	9KHz-3GHz	10/25/2016	10/24/2017
13	LISN	R&S	NSLK8126	8126466	9k-30MHz	10/25/2016	10/24/2017
14	LISN	Narda	L2-16B	5589756	9k-30MHz	10/25/2016	10/24/2017
15	Power Meter	Anritsu	ML2495A	N/A	40MHz	10/25/2016	10/24/2017
16	Power sensor	Anritsu	MA2411B	N/A	40MHz	10/25/2016	10/24/2017
17	Radiated Cable 1#	FUJIKURA	5D-2W	01	30MHz-1GHz	10/25/2016	10/24/2017
18	Radiated Cable 2#	FUJIKURA	10D2W	02	1GHz - 25GHz	10/25/2016	10/24/2017
19	Conducted Cable 1#	FUJIKURA	1D-2W	01	9KHz-30MHz	10/25/2016	10/24/2017
20	SMA Antenna connector	Dosin	Dosin-SMA	N/A	N/A	10/25/2016	10/24/2017

Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list.


The Cal.Interval was one year



## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

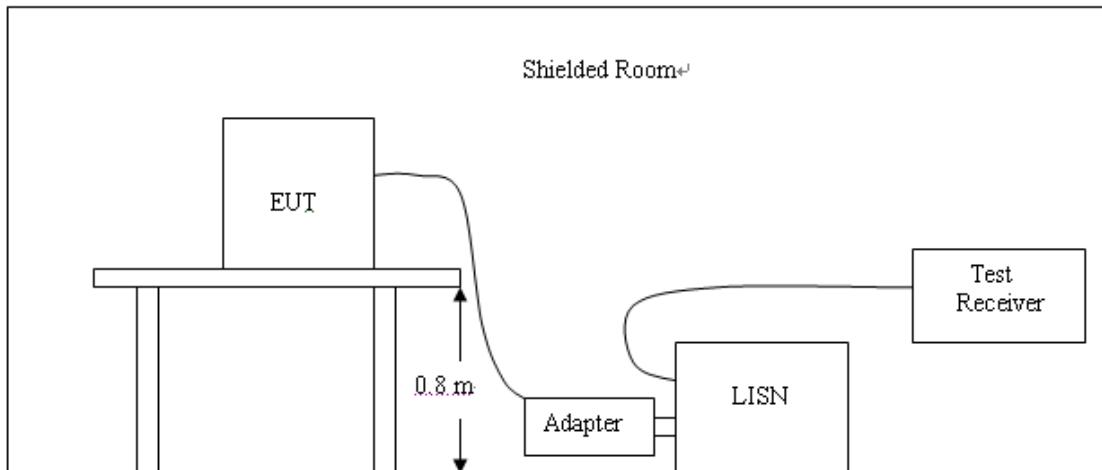

#### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013
4. All support equipments received AC power from a second LISN, if any.
5. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
6. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
7. During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB $\mu$ V)	
	Q.P.	Ave.
0.15 - 0.50	66-56*	56-46*
0.50 - 5.00	56	46
5.00 - 30.0	60	50

\* Decreasing linearly with the logarithm of the frequency




# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 11 of 45 -

## TEST RESULTS

Test Mode:		TM1_DH1_Ch00. (Worst Conf.)				Phase :		Line	
No.	Mk.	Reading Level	Correct Factor	Measure-ment	Limit	Over			
	Freq.	MHz	dBuV	dB	dBuV	dB	Detector	Comment	
1		0.2670	25.19	11.42	36.61	61.21	-24.60	QP	
2		0.2670	14.35	11.42	25.77	51.21	-25.44	AVG	
3	*	0.4515	30.97	11.32	42.29	56.85	-14.56	QP	
4		0.4515	19.73	11.32	31.05	46.85	-15.80	AVG	
5		0.8744	24.86	11.21	36.07	56.00	-19.93	QP	
6		0.8744	13.14	11.21	24.35	46.00	-21.65	AVG	
7		1.5900	24.61	11.49	36.10	56.00	-19.90	QP	
8		1.5900	13.82	11.49	25.31	46.00	-20.69	AVG	
9		2.2694	24.80	11.59	36.39	56.00	-19.61	QP	
10		2.2694	12.36	11.59	23.95	46.00	-22.05	AVG	
11		16.1960	21.41	11.41	32.82	60.00	-27.18	QP	
12		26.1960	13.15	10.73	23.88	50.00	-26.12	AVG	

Remark: Factor = LISN Factor + Cable Loss+ Pulse limiter Factor.

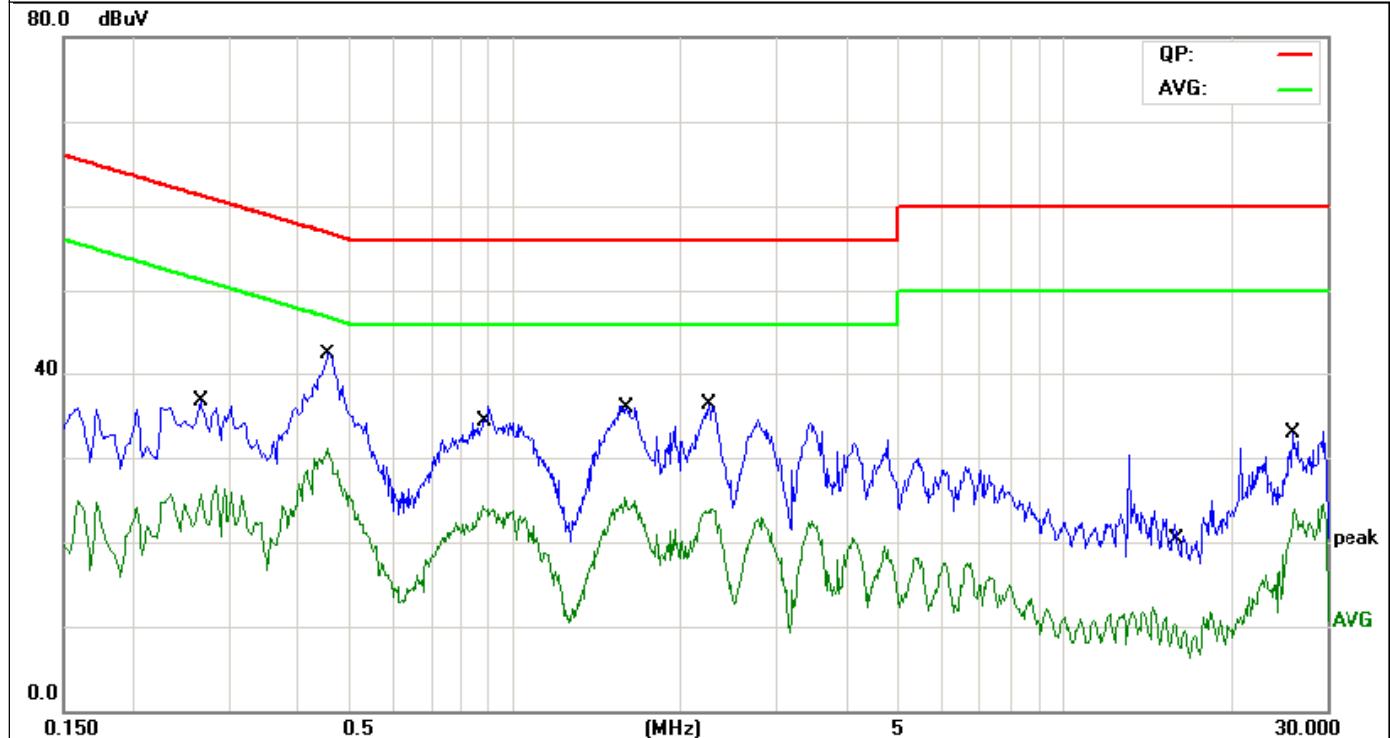




# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 12 of 45 -

Test Mode:		TM1_DH1_Ch00. (Worst Conf.)				Phase :		Neutral	
No.	Mk.	Reading Level	Correct Factor	Measure-ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2220	25.54	11.44	36.98	62.74	-25.76	QP	
2		0.2220	11.48	11.44	22.92	52.74	-29.82	AVG	
3	*	0.4560	27.06	11.32	38.38	56.76	-18.38	QP	
4		0.4560	15.98	11.32	27.30	46.76	-19.46	AVG	
5		0.8879	19.43	11.22	30.65	56.00	-25.35	QP	
6		0.8879	9.14	11.22	20.36	46.00	-25.64	AVG	
7		1.5944	18.62	11.49	30.11	56.00	-25.89	QP	
8		1.5944	9.20	11.49	20.69	46.00	-25.31	AVG	
9		26.4930	26.57	10.73	37.30	60.00	-22.70	QP	
10		26.4930	10.27	10.73	21.00	50.00	-29.00	AVG	
11		29.2380	21.11	10.62	31.73	60.00	-28.27	QP	
12		29.2380	11.80	10.62	22.42	50.00	-27.58	AVG	




Remark: Factor = LISN Factor + Cable Loss+ Pulse limiter Factor.

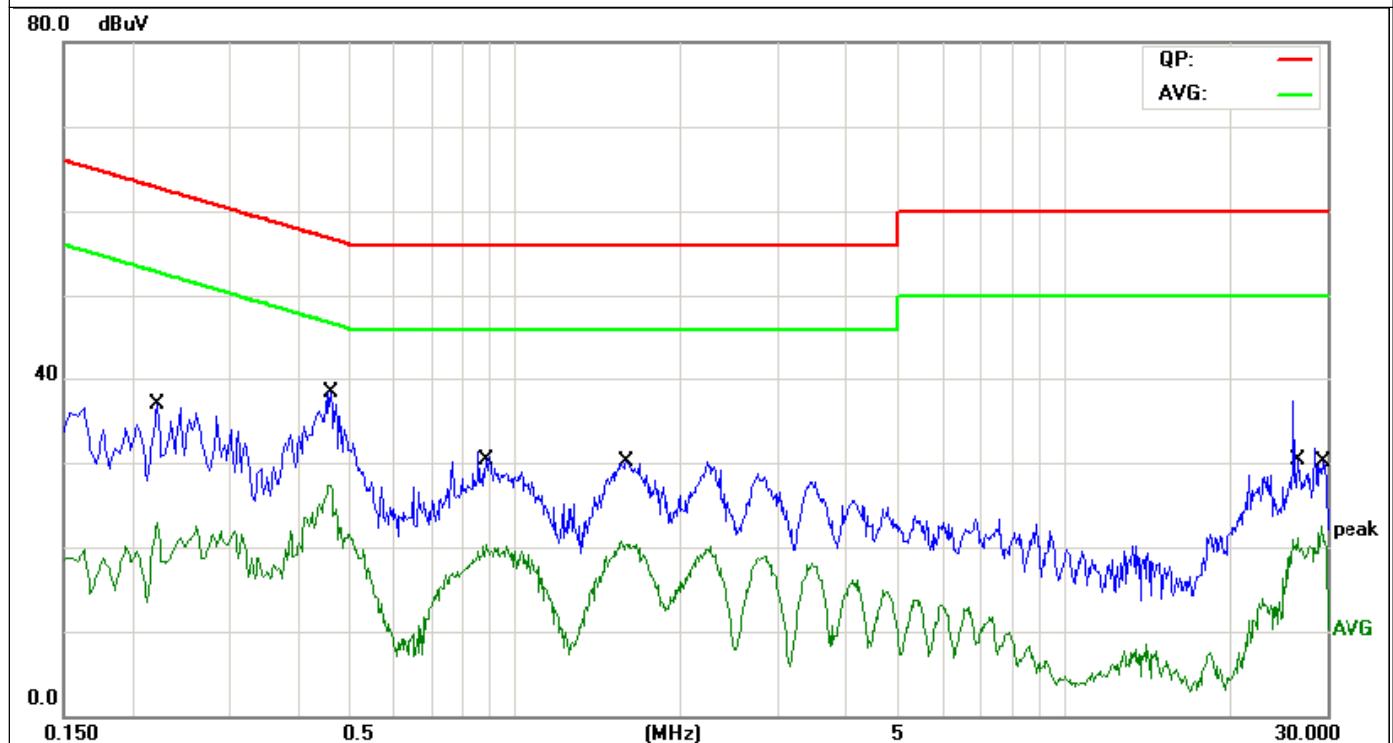



## 4.2 Radiated Emission

### TEST CONFIGURATION

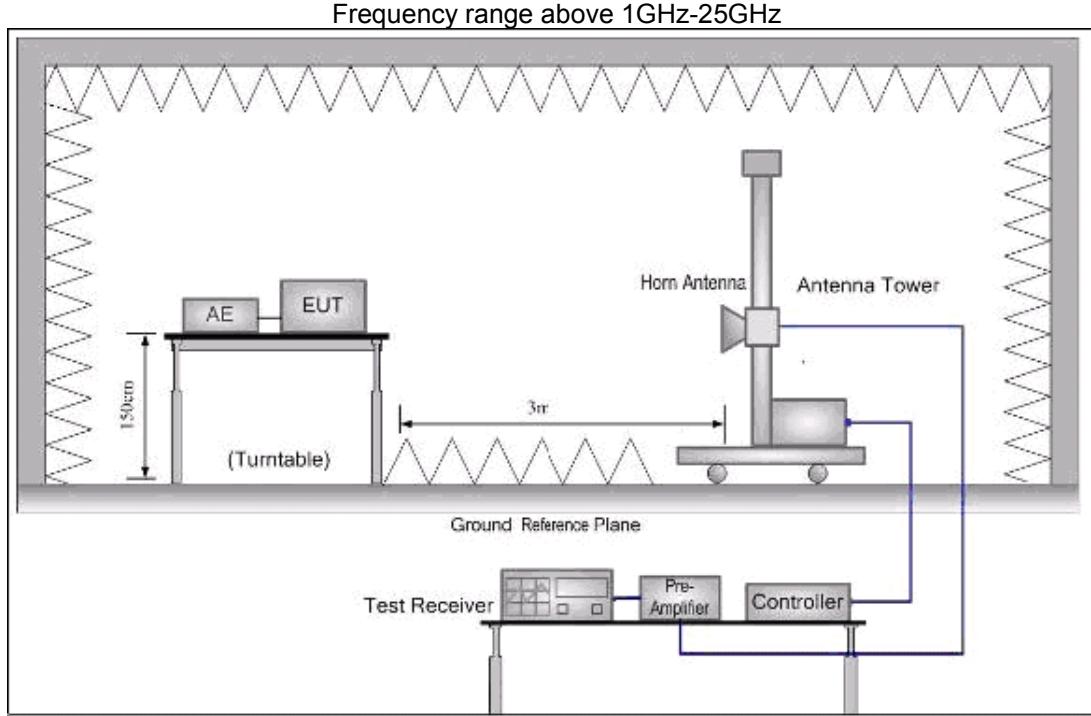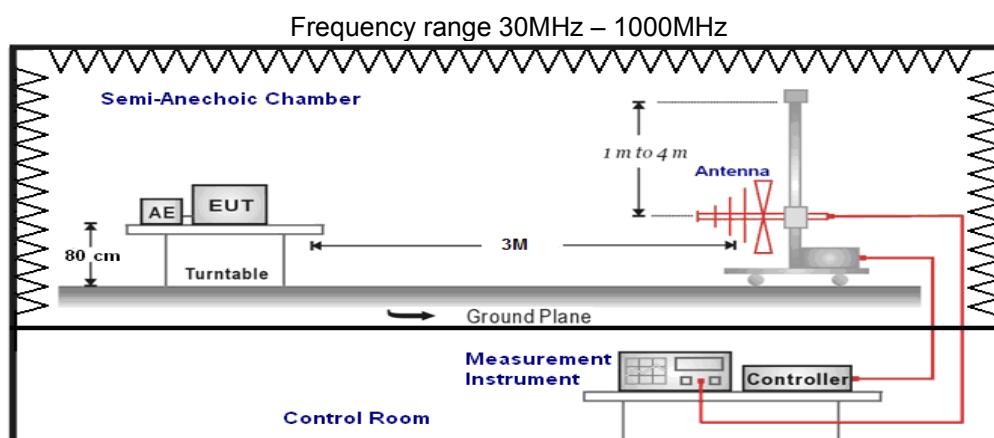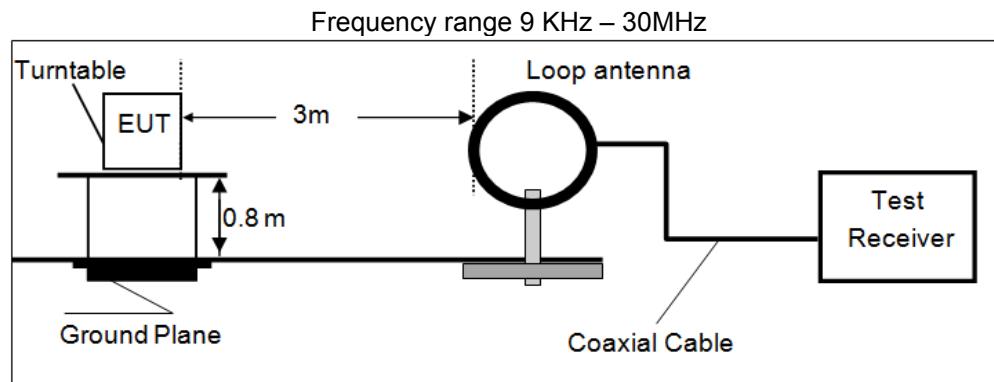

### TEST PROCEDURE



1. The EUT was placed on a turn table which is 0.8m(1.5m above 1G) above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9 KHz to 25GHz.
6. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

7. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Anternna	3

8. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	Peak (Receiver)
	Average Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	Average (Receiver)

## Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

Transd=AF +CL-AG



# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 15 of 45 -

## RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	300	$20\log(2400/F(\text{kHz}))+80$	$2400/F(\text{kHz})$
0.49-1.705	30	$20\log(24000/F(\text{kHz}))+40$	$24000/F(\text{kHz})$
1.705-30	30	$20\log(30)+40$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

## TEST RESULTS

Remark:

1. The radiated measurement are performed the each channel (low/mid/high) at all Packet type (DH1, DH3 and DH5) also for difference modulation type (GFSK, 8DPSK), recorded worst case at GFSK\_DH5\_Low channel (Channel 00) for below 1GHz and GFSK\_DH5\_Low channel (Channel 00), GFSK\_DH5\_Middle channel (Channel 39), GFSK\_DH5\_High channel (Channel 78) for above 1G.
2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
3. HORN ANTENNA for the radiation emission test above 1G.
4. “--” means not recorded as emission levels lower than limit.
5. Margin= Limit - Level

### **For 9KHz to 30MHz**

Frequency (MHz)	Corrected Reading (dB $\mu$ V/m) @3m	FCC Limit (dB $\mu$ V/m) @3m	Margin (dB)	Detector	Result
13.72	45.63	69.54	23.91	QP	PASS
21.72	44.30	69.54	25.24	QP	PASS




# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 16 of 45 -

For 30MHz to 1000MHz


(a) Antenna polarization: Horizontal

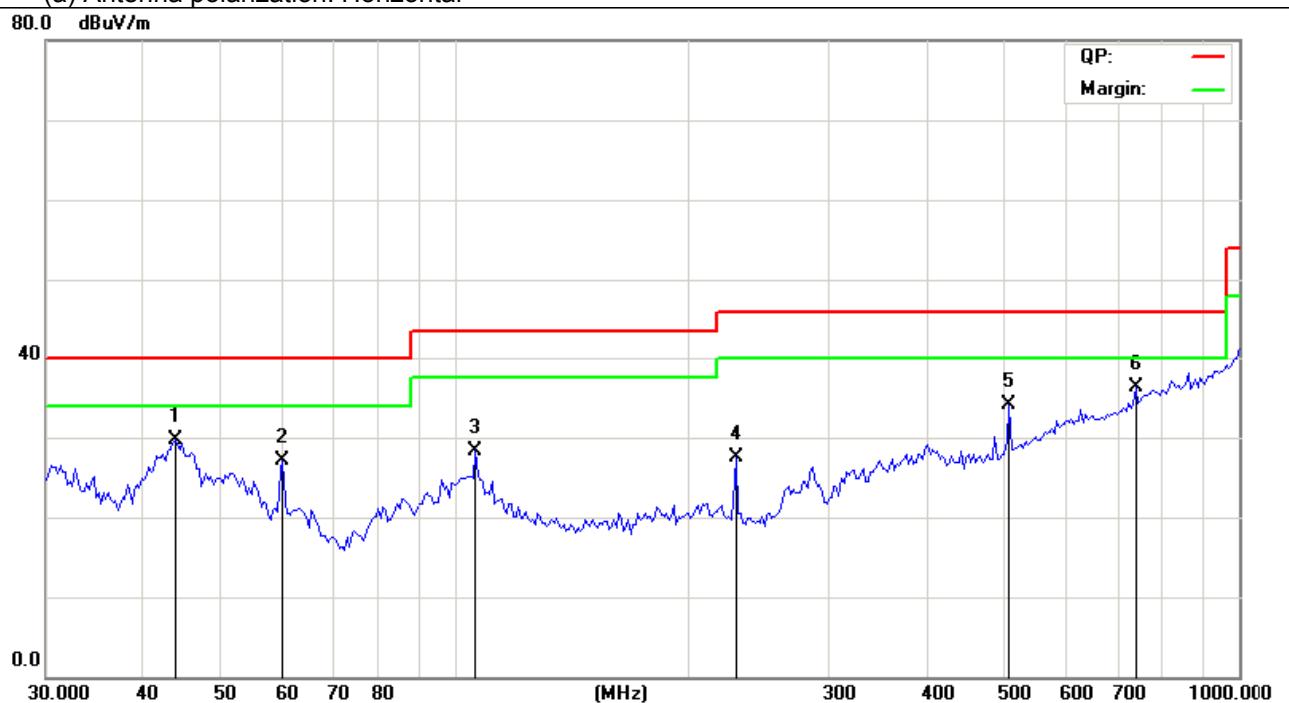

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		43.8451	36.58	-6.93	29.65	40.00	-10.35	QP	
2		60.1527	34.50	-7.49	27.01	40.00	-12.99	QP	
3		106.2810	35.06	-6.80	28.26	43.50	-15.24	QP	
4		228.6173	36.50	-9.06	27.44	46.00	-18.56	QP	
5		509.3559	34.93	-0.86	34.07	46.00	-11.93	QP	
6	*	739.2136	31.50	4.76	36.26	46.00	-9.74	QP	



(b) Antenna polarization: vertical

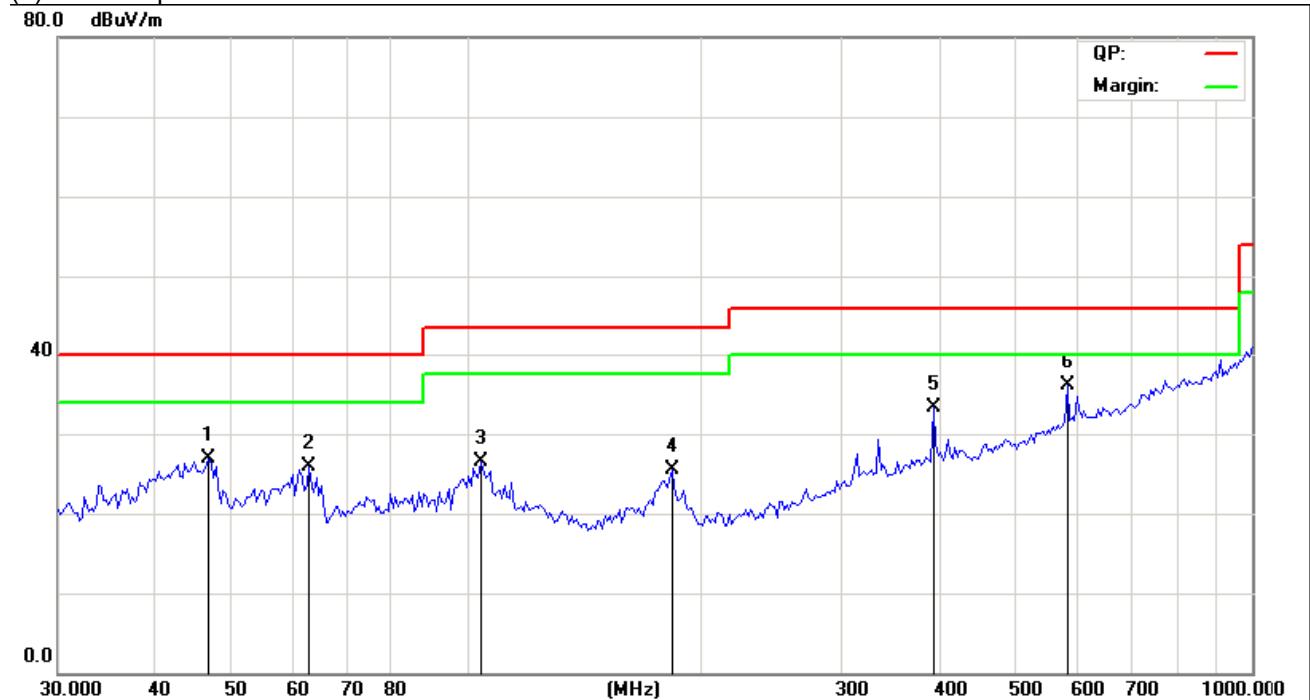

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		46.7077	33.82	-6.85	26.97	40.00	-13.03	QP	
2		62.7432	34.42	-8.44	25.98	40.00	-14.02	QP	
3		104.0639	33.19	-6.67	26.52	43.50	-16.98	QP	
4		182.5783	34.94	-9.53	25.41	43.50	-18.09	QP	
5		392.7375	34.96	-1.74	33.22	46.00	-12.78	QP	
6	*	582.1122	34.52	1.62	36.14	46.00	-9.86	QP	

Note:

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier




# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 18 of 45 -

## For 1GHz to 25GHz

Note: We tested GFSK,  $\pi/4$  DQSK, 8DPSK mode, recorded the worst case at the GFSK (2402MHz) Mode.

### (a) Antenna polarization: Horizontal

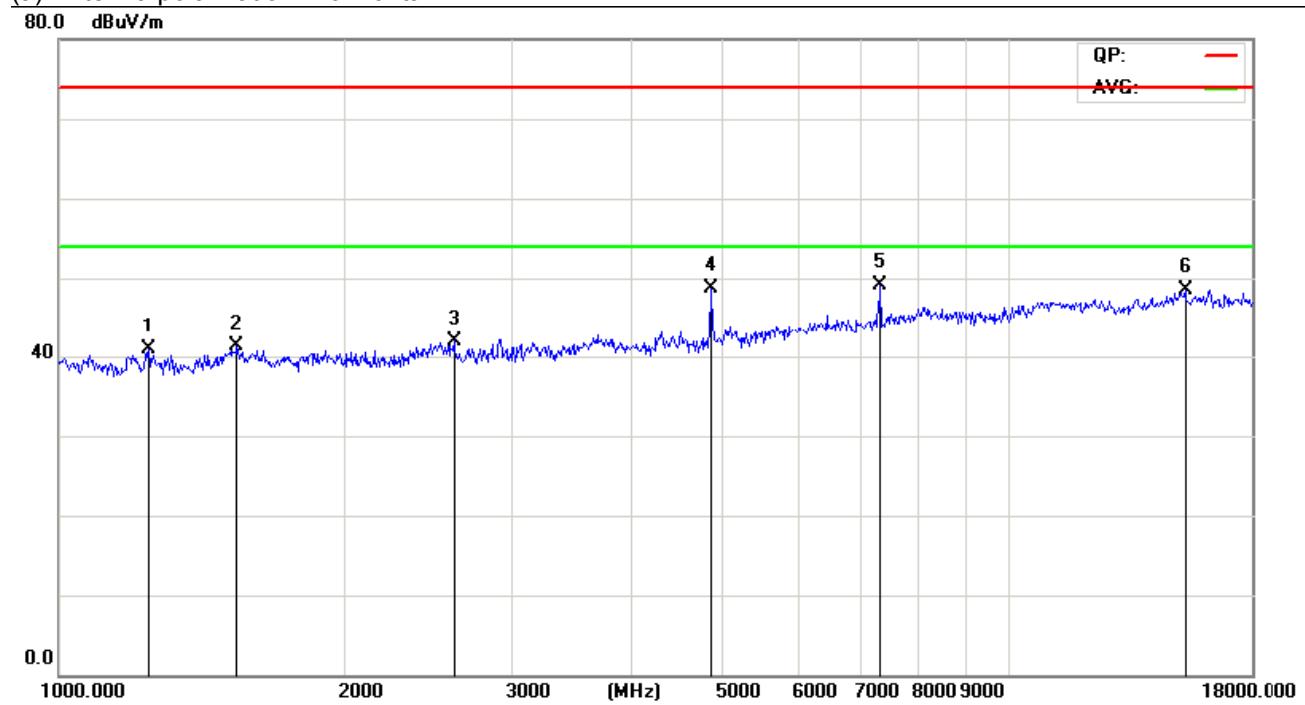

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1242.068	52.98	-12.09	40.89	74.00	-33.11	peak	
2		1538.281	53.08	-11.80	41.28	74.00	-32.72	peak	
3		2610.661	51.18	-9.33	41.85	74.00	-32.15	peak	
4		4859.975	50.37	-1.61	48.76	74.00	-25.24	peak	
5	*	7326.267	45.30	3.86	49.16	74.00	-24.84	peak	
6		15310.07	39.95	8.52	48.47	74.00	-25.53	peak	




# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 19 of 45 -

(b) Antenna polarization: Vertical

80.0 dBuV/m

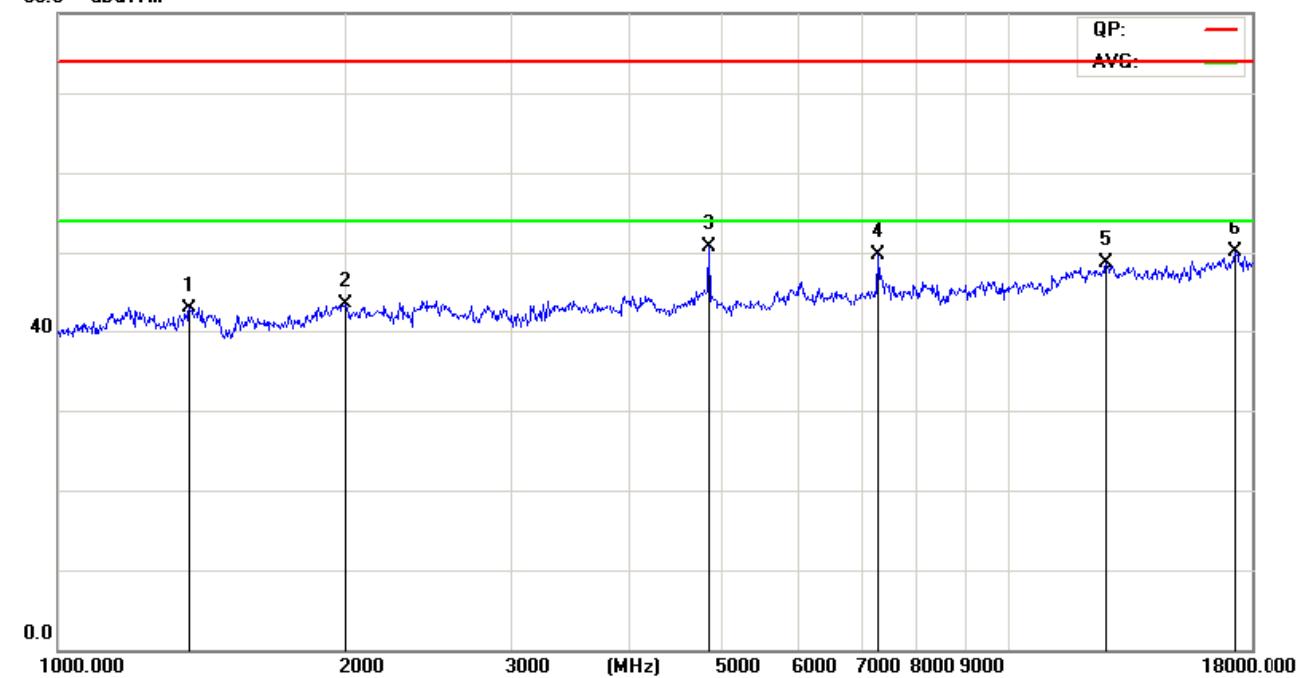

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1374.295	54.66	-11.77	42.89	74.00	-31.11	peak	
2		2001.084	55.15	-11.61	43.54	74.00	-30.46	peak	
3	*	4845.948	52.34	-1.65	50.69	74.00	-23.31	peak	
4		7284.038	45.85	3.82	49.67	74.00	-24.33	peak	
5		12651.12	41.07	7.70	48.77	74.00	-25.23	peak	
6		17286.16	38.38	11.68	50.06	74.00	-23.94	peak	

Note:

Measurement Level = Reading Level + Factor

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier

Lowest channel: 2402 MHz

Data rate: 1Mbps



## 4.3 Maximum Peak Output Power

### TEST CONFIGURATION



### TEST PROCEDURE

According to ANSI C63.10:2013 Maximum peak conducted output power: Connect antenna port into power meter and reading Peak values.

### LIMIT

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### TEST RESULTS

Remark: We test maximum peak output power at different Packet Type (DH1, DH3 and DH5), recorded worst case at DH5

#### 4.3.1 GFSK Test Mode

##### A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	-0.30	21	PASS
39	2441	-1.27	21	PASS
78	2480	-2.21	21	PASS

Note:

1.The test results including the cable loss.

#### 4.3.2 $\pi/4$ DQPSK Test Mode

##### A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	-0.37	21	PASS
39	2441	-1.33	21	PASS
78	2480	-2.22	21	PASS

Note:

1.The test results including the cable loss.

#### 4.3.3 8DPSK Test Mode

##### A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	-0.35	21	PASS
39	2441	-1.29	21	PASS
78	2480	-2.27	21	PASS

Note:

1.The test results including the cable loss.



## 4.4 20dB Bandwidth

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### LIMIT

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

### TEST RESULTS

#### 4.4.1 GFSK Test Mode

##### A. Test Verdict

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot	Limits (MHz)	Verdict
00	2402	1.103	Plot 4.4.1 A	/	PASS
39	2441	1.102	Plot 4.4.1 B	/	PASS
78	2480	1.103	Plot 4.4.1 C	/	PASS

Note: 1.The test results including the cable loss.

##### B. Test Plots



(Plot 4.4.1 A: Channel 00: 2402MHz @ GFSK)



# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 22 of 45 -



(Plot 4.4.1 B: Channel 39: 2441MHz @ GFSK)



(Plot 4.4.1 C: Channel 78: 2480MHz @ GFSK)




## 4.4.2 8DPSK Test Mode


### A. Test Verdict

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot	Limits (MHz)	Verdict
00	2402	1.326	Plot 4.4.2 A	/	PASS
39	2441	1.324	Plot 4.4.2 B	/	PASS
78	2480	1.323	Plot 4.4.2 C	/	PASS

Note: 1. The test results including the cable loss.

### B. Test Plots

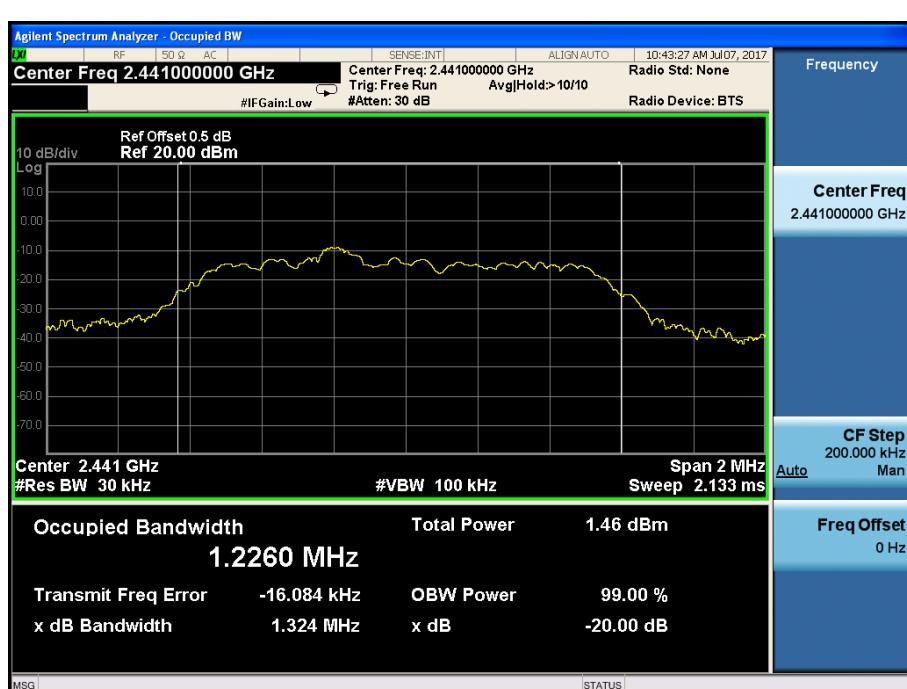

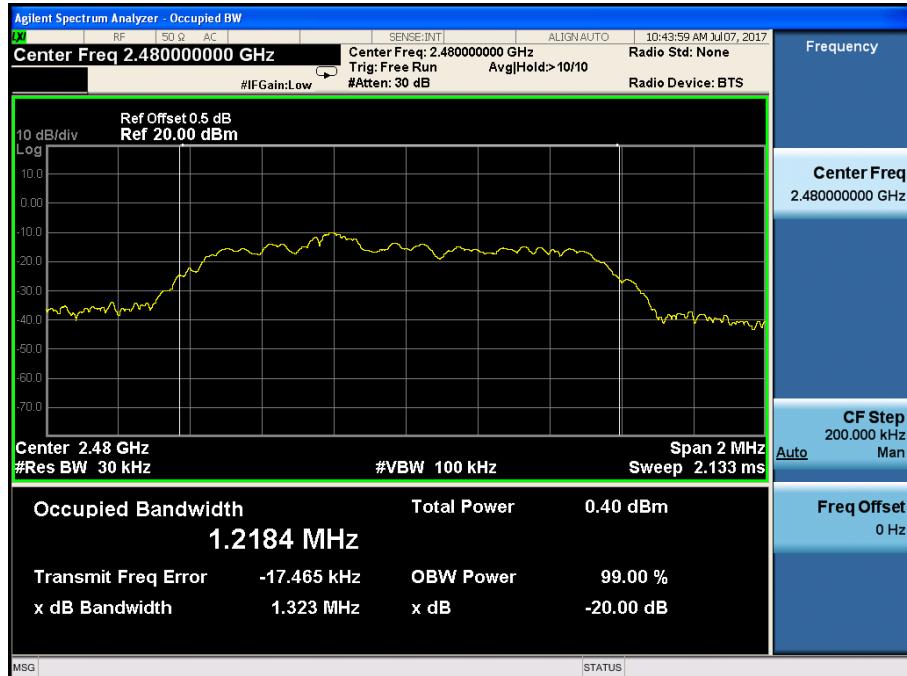

(Plot 4.4.2 C: Channel 78: 2480MHz @ 8DPSK)

## 4.5 Band Edge

### Applicable Standard


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### TEST CONFIGURATION

#### *For Radiated*

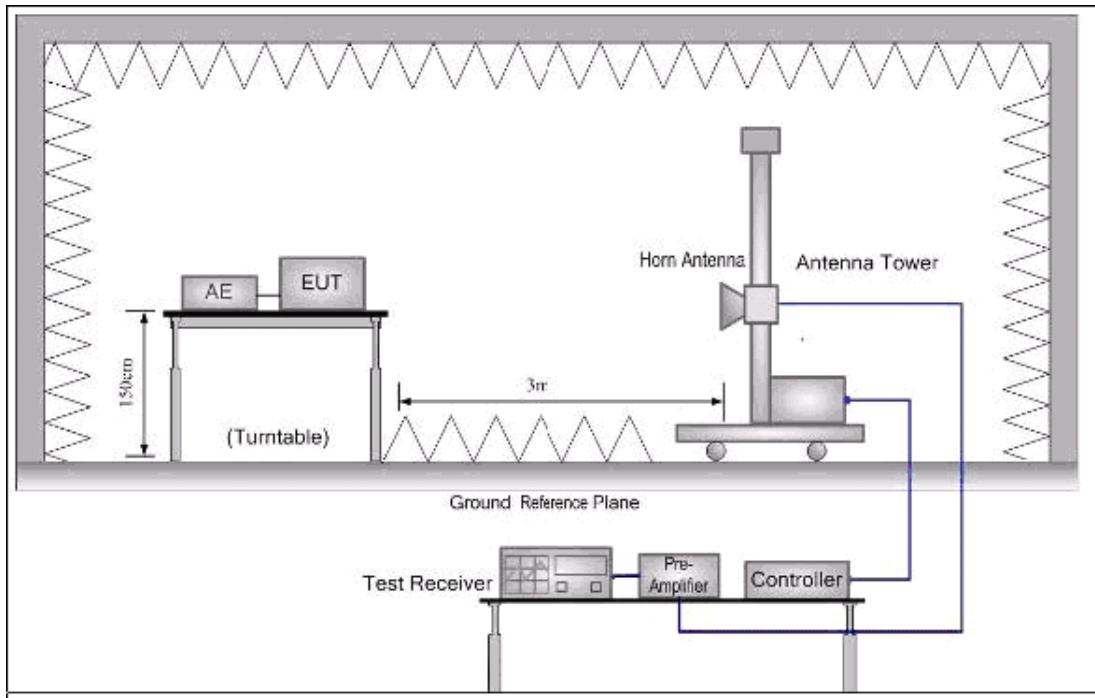

### For Conducted



### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m(1.5m above 1G) above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	Peak (Receiver)
1GHz-40GHz	Average Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	Average (Receiver)

### LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

### TEST RESULTS

Remark:

1. We test Band Edge at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.
2. “---” means not recorded as emission levels lower than limit.



## 4.5.1 For Radiated Bandedge Measurement

Remark: we tested radiated bandedge at both hopping and no-hopping modes, recorded worst case at no-hopping mode

### 4.5.1.1 Test data

Data rate	Test channel	Ant.P ol. H/V	Freq. (MHz)	Reading		Ant/CF CF(dB)	Act		Limit	
				Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)
1Mbps	CH00	V	2390	41.56	30.27	-5.79	39.88	27.82	74	54
	CH00	H	2390	43.68	31.14	-5.79	40.72	29.75	74	54
	CH78	V	2483.5	46.77	33.25	-4.98	39.17	27.06	74	54
	CH78	H	2483.5	45.12	33.52	-4.98	40.54	27.96	74	54
3Mbps	CH00	V	2390	40.36	30.72	-5.79	40.22	28.04	74	54
	CH00	H	2390	42.88	31.16	-5.79	42.05	29.87	74	54
	CH78	V	2483.5	41.79	30.33	-4.98	38.69	26.56	74	54
	CH78	H	2483.5	40.38	29.93	-4.98	39.11	26.70	74	54

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode.
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (3) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.




## 4.5.2 For Conducted Bandedge Measurement


### 4.5.2.1 GFSK Test Mode

We tested hopping mode and non-hopping mode, and recorded the worst case at the hopping mode.

#### A. Test Plots

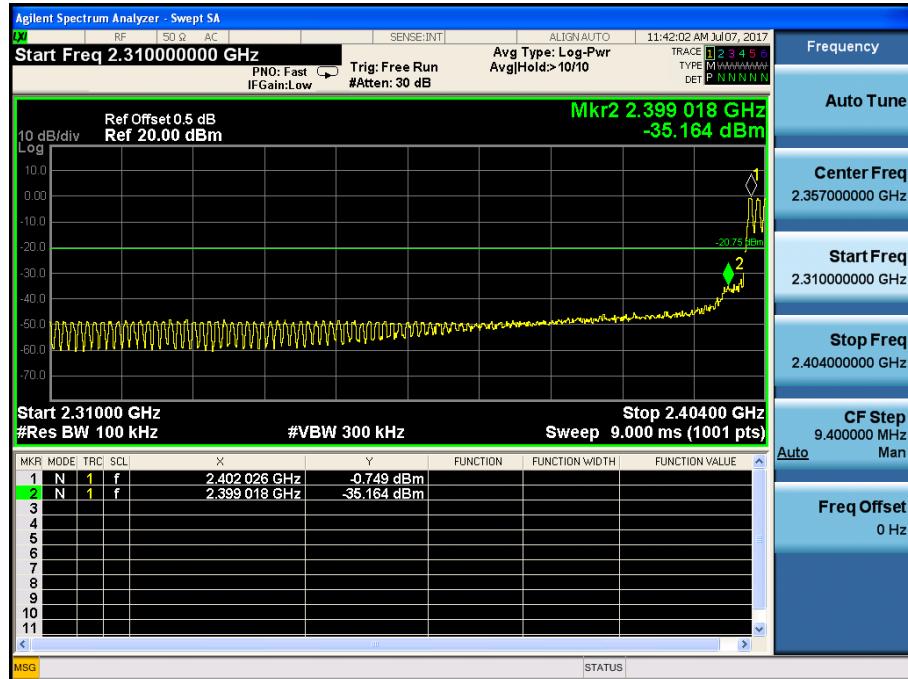

(Plot 4.5.2.1 A: Hopping Mode @ GFSK)

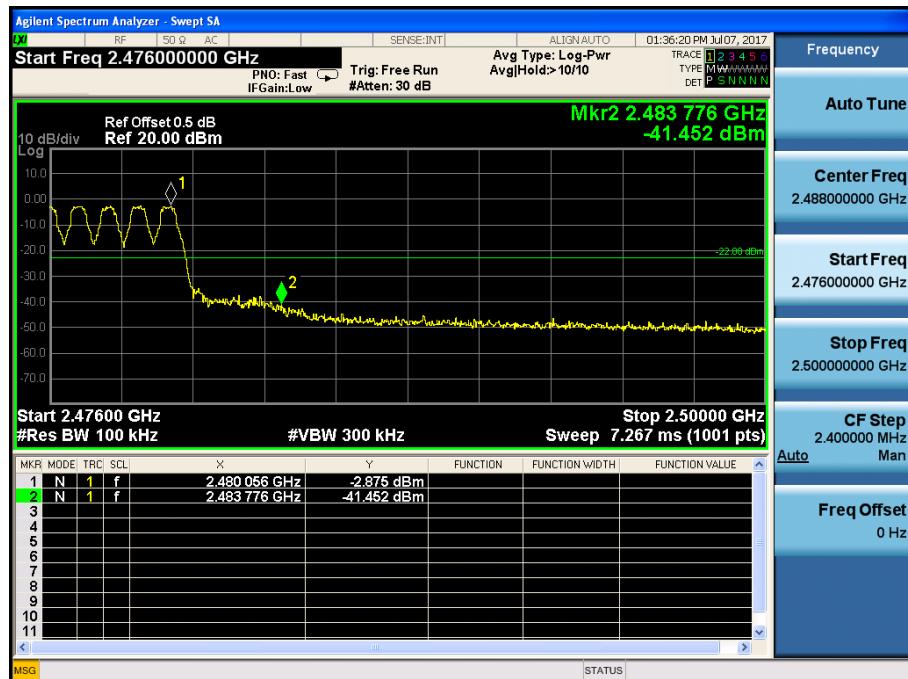


(Plot 4.5.2.1 B: Hopping Mode @ GFSK)




## 4.5.2.2 8DPSK Test Mode

We tested hopping mode and non-hopping mode, and recorded the worst case at the hopping mode.

### A. Test Plots

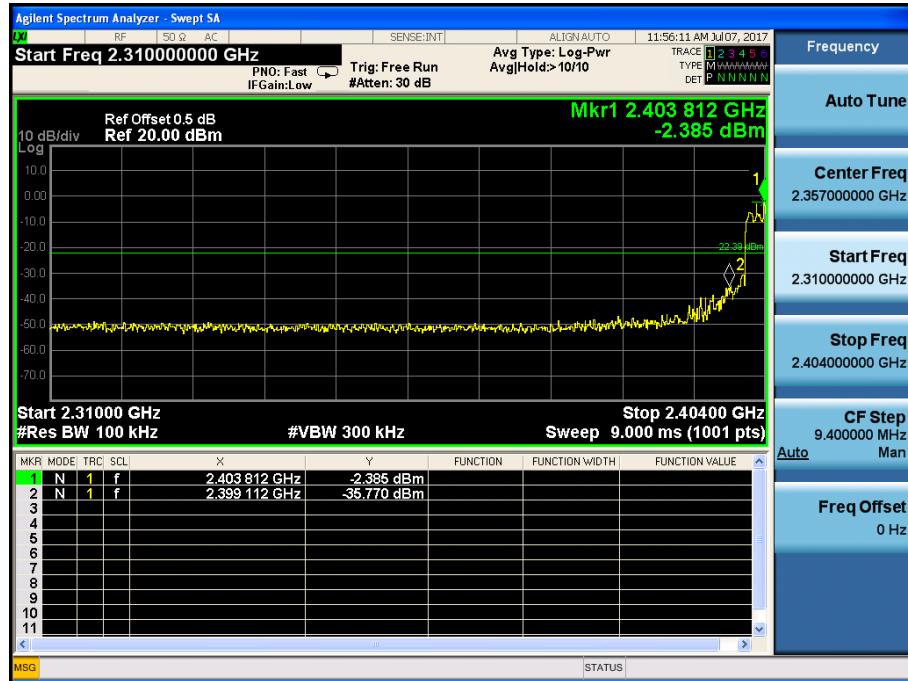

(Plot 4.5.2.2 A: Hopping Mode @ 8DPSK)

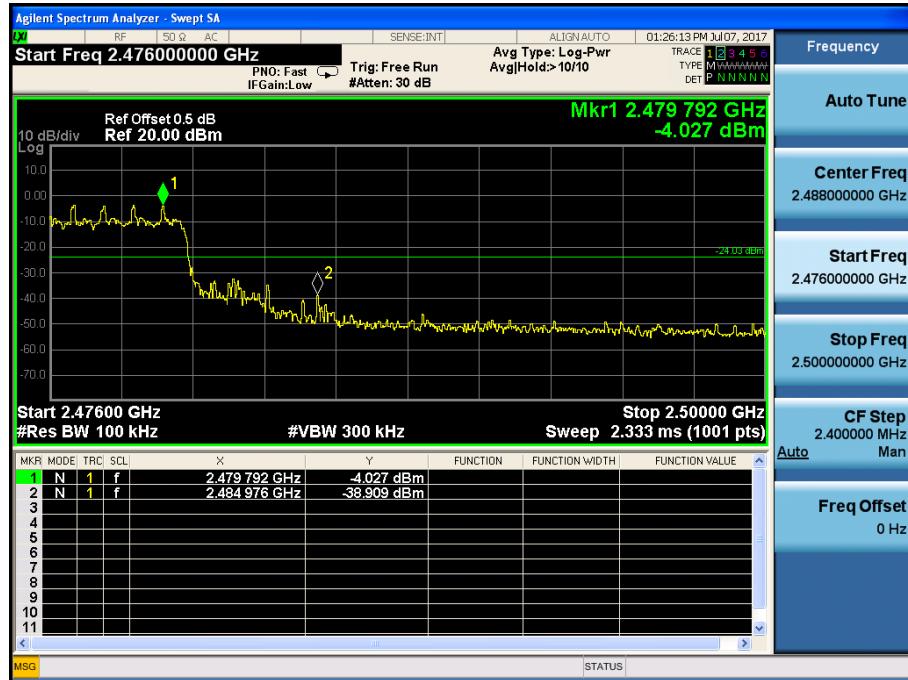

(Plot 4.5.2.2 B: Hopping Mode @ 8DPSK)



## 4.6 Frequency Separation

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz.

### LIMIT

According to 15.247(a)(1),frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3\*20dB bandwidth of the hopping channel, whichever is greater.

### TEST RESULTS


Remark: 1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5) and all test channels, recorded worst case at DH5 and middle channel.

#### 4.6.1 GFSK Test Mode

##### A. Test Verdict

Channel	Frequency (MHz)	Channel Separation (MHz)	Refer to Plot	Limits (MHz)	Verdict
38	2440				
39	2441	1.000	Plot 4.6.1 A	0.8702	PASS

##### B. Test Plots

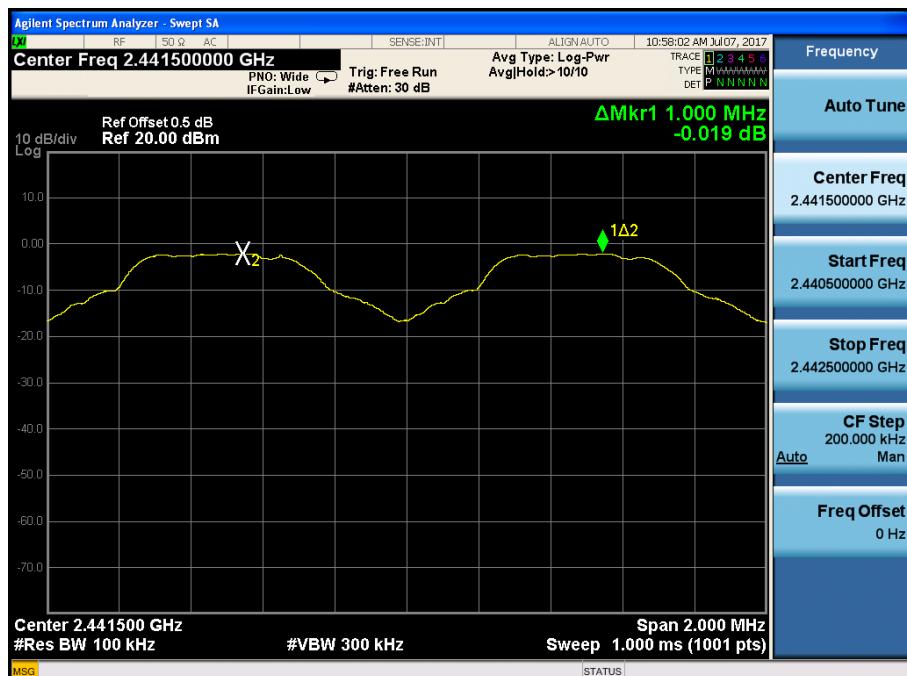



## 4.6.2 8DPSK Test Mode

### A. Test Verdict

Channel	Frequency (MHz)	Channel Separation (MHz)	Refer to Plot	Limits (MHz)	Verdict
38	2440	1.004	Plot 4.6.2 A	0.84936	PASS
39	2441				

### B. Test Plots



(Plot 4.6.2 A: Channel 39: 2441MHz @ 8DPSK)



## 4.7 Number of hopping frequency

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=100 KHz and VBW=300 KHz.

### LIMIT

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### TEST RESULTS


Remark: 1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.

#### 4.7.1 GFSK Test Mode

##### A. Test Verdict

Hopping Channel Frequency Range (MHz)	Number of Hopping Channel	Refer to Plot	Limit	Verdict
2400-2483.5	79	Plot 4.7.1 A1	≥15	PASS

##### B. Test Plots

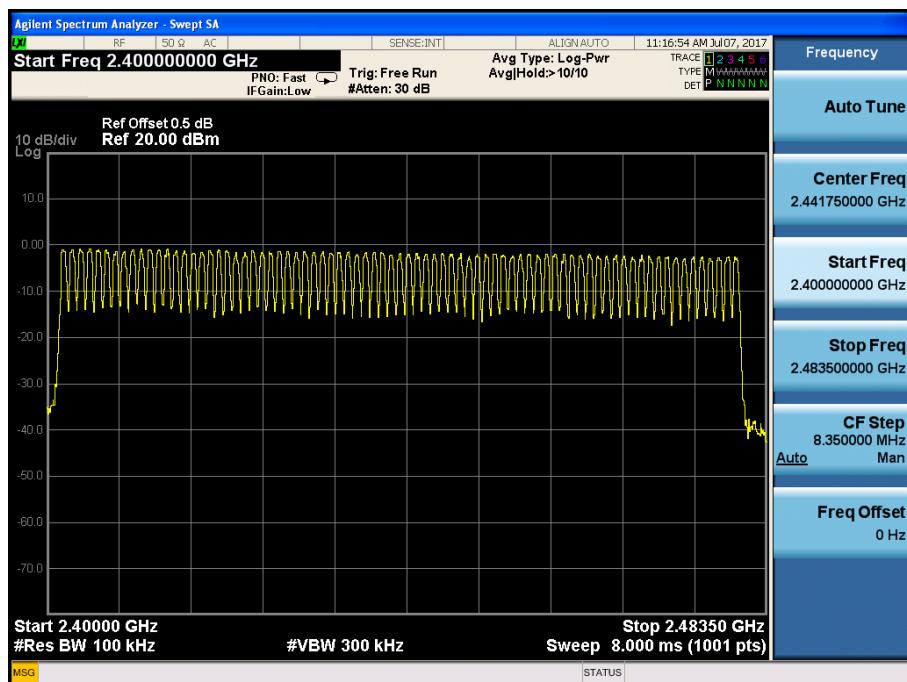




## 4.7.2 8DPSK Test Mode

### A. Test Verdict

Hopping Channel Frequency Range (MHz)	Number of Hopping Channel	Refer to Plot	Limit	Verdict
2400-2483.5	79	Plot 4.7.2 A1	≥15	PASS

### B. Test Plots

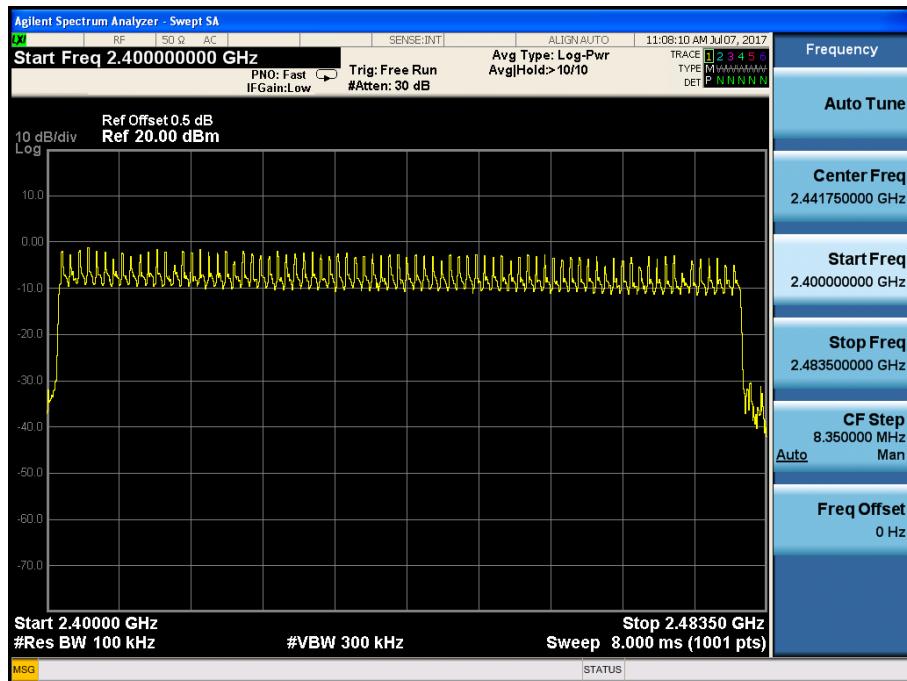

(Plot 4.7.2 A1: @ 8DPSK)



## 4.8 Time of Occupancy (Dwell Time)

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=1MHz, Span=0Hz.

### LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST RESULTS

The Dwell Time=Burst Width\*Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4[\text{s}]*\text{hopping number}=0.4[\text{s}]*79[\text{ch}]=31.6[\text{s}*\text{ch}]$ ;

The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.

The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch\*hop/s] for all channels. So the final hopping rate for all channels is  $1600/6=266.67[\text{ch}*\text{hop}/\text{s}]$

The hops per second on one channel:  $266.67[\text{ch}*\text{hops}/\text{s}]/79[\text{ch}]=3.38[\text{hop}/\text{s}]$ ;

The total hops for all channels within the dwell time calculation duration:  $3.38[\text{hop}/\text{s}]*31.6[\text{s}*\text{ch}]=106.67[\text{hop}*\text{ch}]$ ;

The dwell time for all channels hopping:  $106.67[\text{hop}*\text{ch}]*\text{Burst Width}[\text{ms}/\text{hop}/\text{ch}]$ .

Remark: 1. We test Frequency Separation at all test channels, recorded worst case at middle channel.

#### A. Test Verdict

##### 4.8.1 GFSK Test Mode

Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Refer to Plot	Verdict
DH1	2402	0.412	0.132	0.4	Plot 4.8.1 A	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 2 \div 79) \times 31.6$ Second					
DH3	2402	1.665	0.266	0.4	Plot 4.8.1 B	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 4 \div 79) \times 31.6$ Second					
DH5	2402	2.915	0.311	0.4	Plot 4.8.1 C	PASS
	<b>Note:</b> Dwell time=Pulse Time (ms) $\times (1600 \div 6 \div 79) \times 31.6$ Second					

##### 4.8.2 8DPSK Test Mode


Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Refer to Plot	Verdict
DH1	2402	0.413	0.132	0.4	Plot 4.8.2 A	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 2 \div 79) \times 31.6$ Second					
DH3	2402	1.665	0.266	0.4	Plot 4.8.2 B	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 4 \div 79) \times 31.6$ Second					
DH5	2402	2.915	0.311	0.4	Plot 4.8.2 C	PASS
	<b>Note:</b> Dwell time=Pulse Time (ms) $\times (1600 \div 6 \div 79) \times 31.6$ Second					

#### B. Test Plots




# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 34 of 45 -

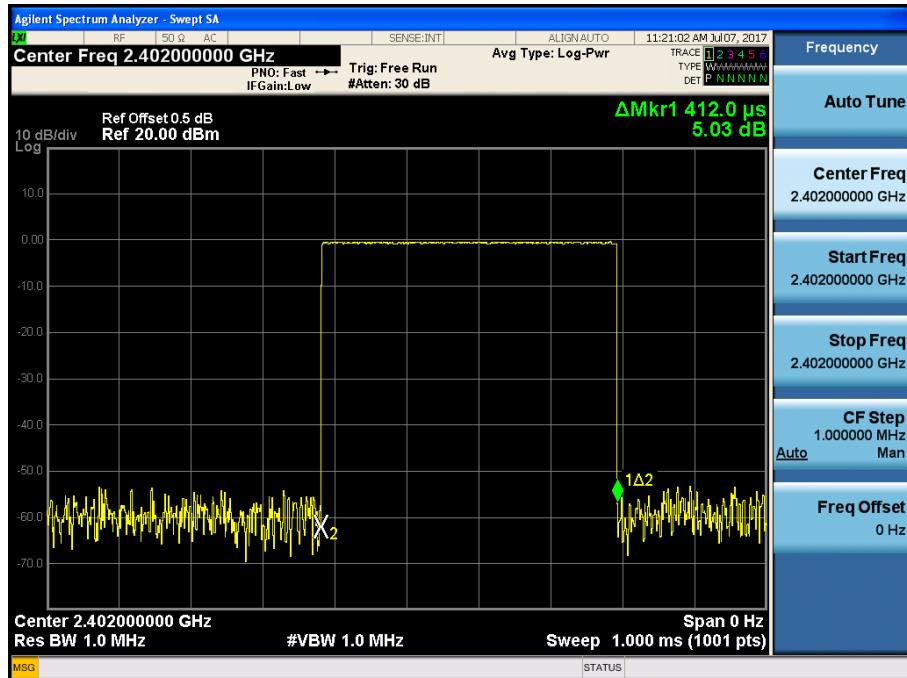

(Plot 4.8.1.A: Channel 00: 2402MHz @ GFSK @ DH1)

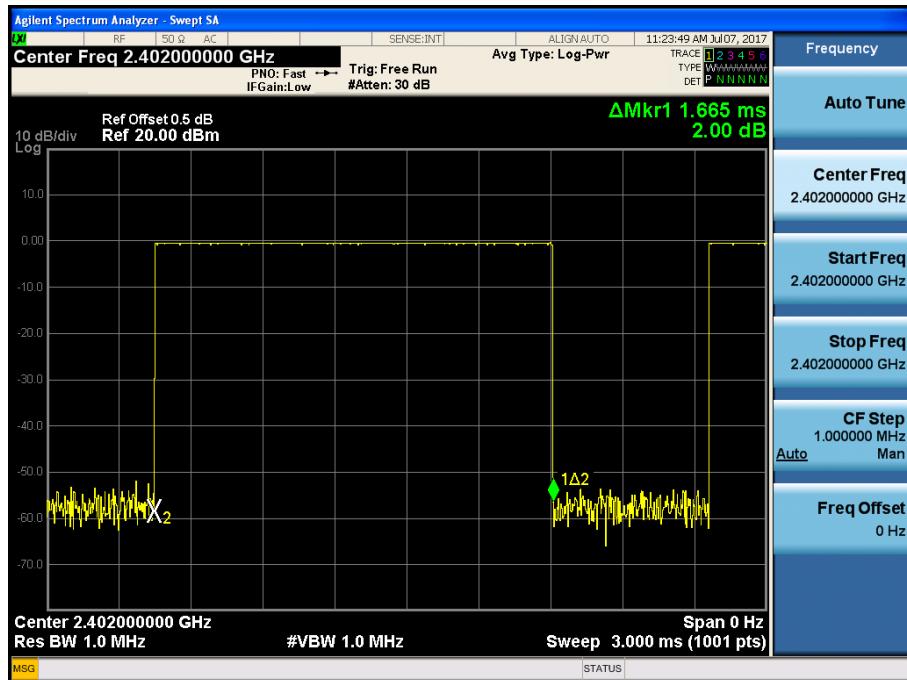


(Plot 4.8.1.B: Channel 00: 2402MHz @ GFSK @ DH3)




# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 35 of 45 -

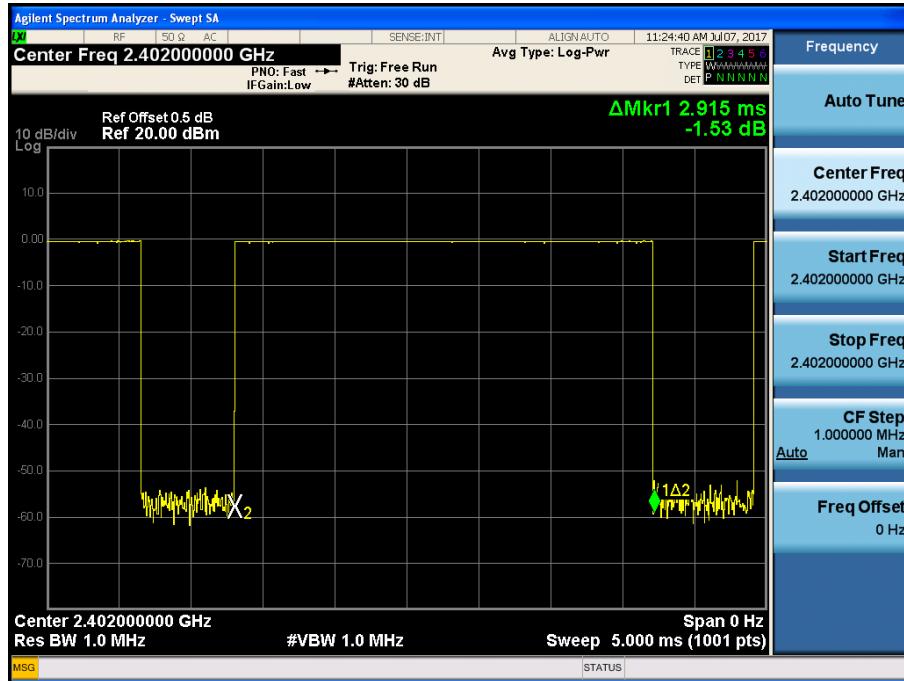

(Plot 4.8.1.C: Channel 00: 2402MHz @ GFSK @ DH5)

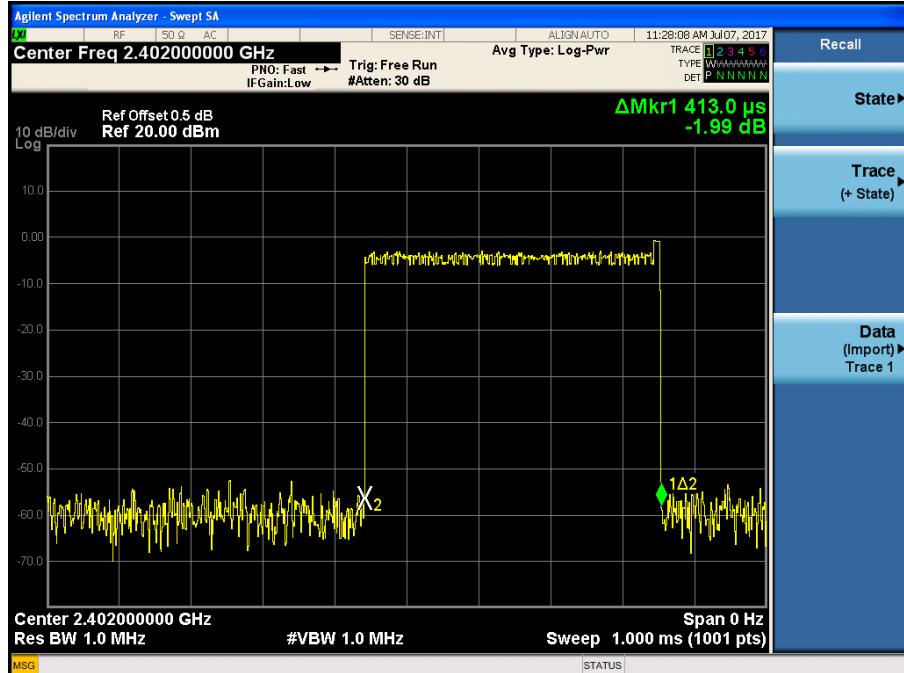


(Plot 4.8.2.A: Channel 00: 2402MHz @ 8DPSK @ DH1)




# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 36 of 45 -

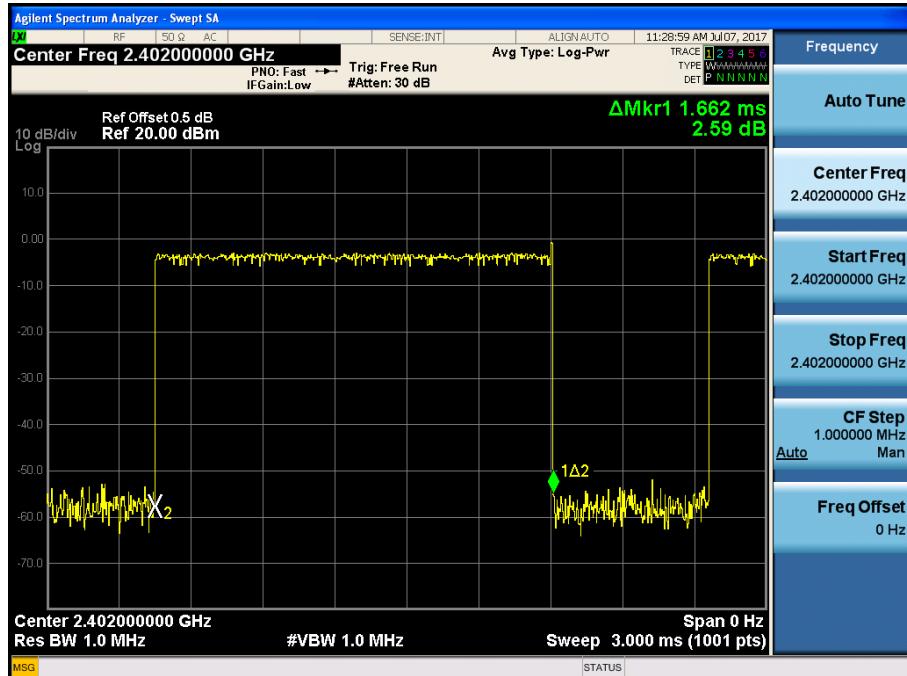

(Plot 4.8.2.B: Channel 00: 2402MHz @ 8DPSK @ DH3)

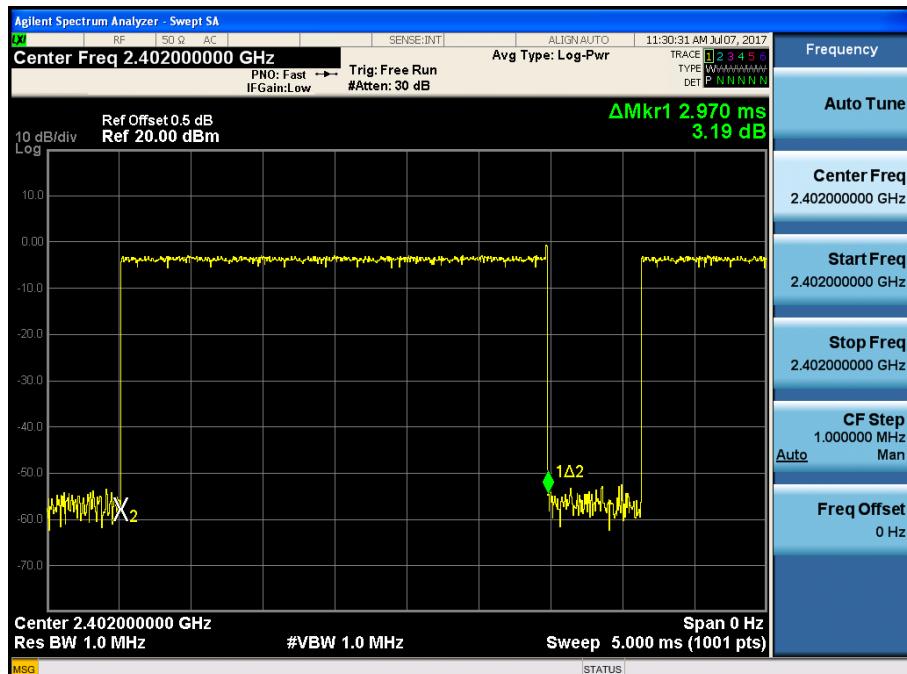

(Plot 4.8.2.C: Channel 00: 2402MHz @ 8DPSK @ DH5)



## 4.9 Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10:2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength , and measurement frequency range from 9KHz to 26.5GHz.

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### TEST RESULTS

#### Remark:

1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.
2. For 9KHz -30MHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

#### 4.9.1 GFSK Test Mode

##### A. Test Verdict

Channel	Frequency (MHz)	Frequency Range	Sweep Points	Refer to Plot	Limit (dBc)	Verdict
00	2402	30MHz-25GHz	10001	Plot 4.9.1 A	-21.10	PASS
39	2441	30MHz-25GHz	10001	Plot 4.9.1 B	-22.16	PASS
78	2480	30MHz-25GHz	10001	Plot 4.9.1 C	-23.70	PASS

#### Note:


1. The test results including the cable lose.

##### B. Test Plots




Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 38 of 45 -

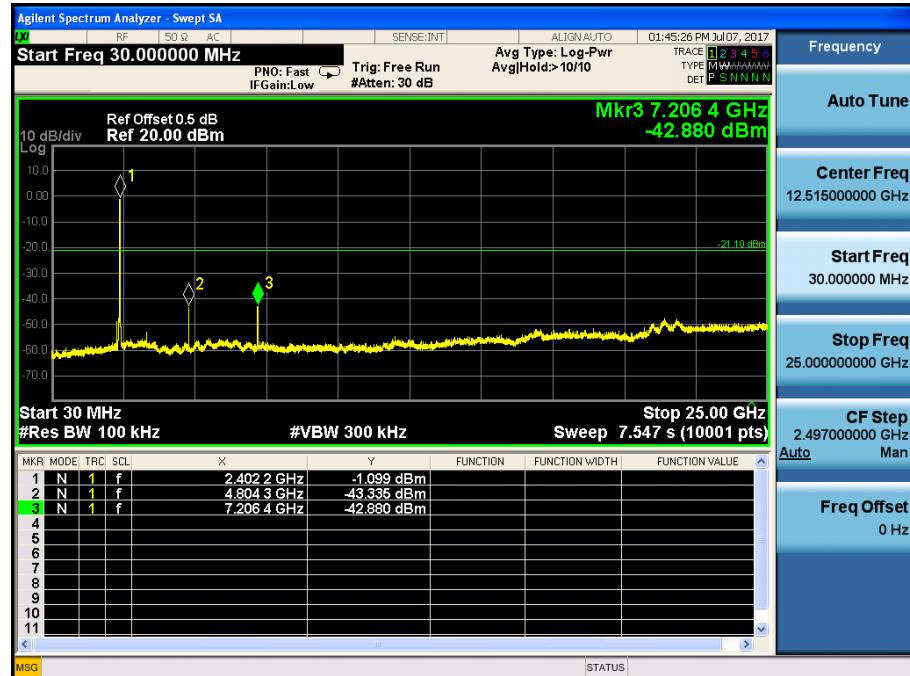

(Plot 4.9.1 A: Channel 00: 2402MHz @ GFSK)

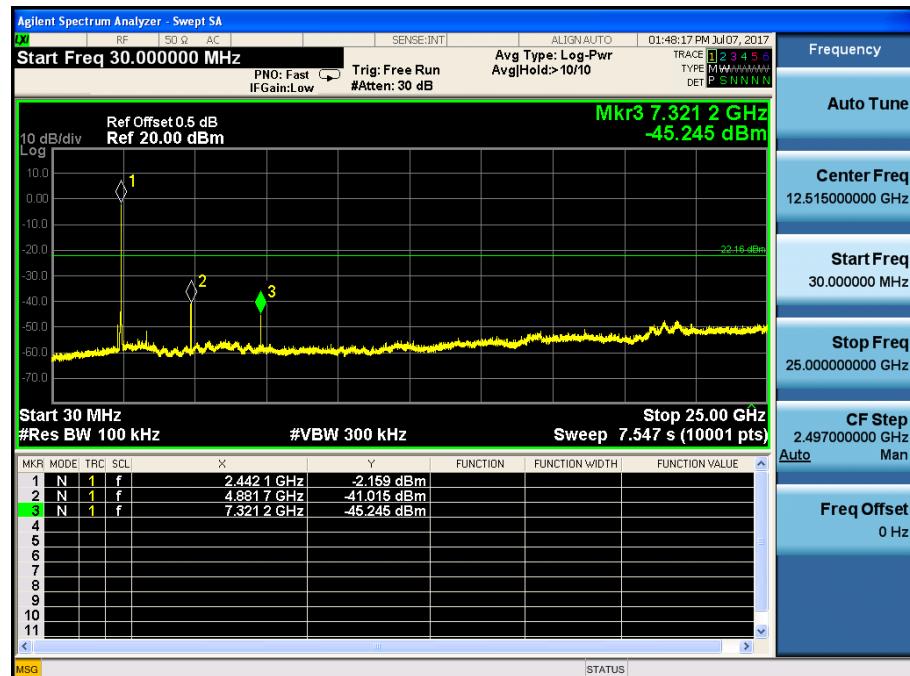


(Plot 4.9.1 B: Channel 39: 2441MHz @ GFSK)



# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 39 of 45 -

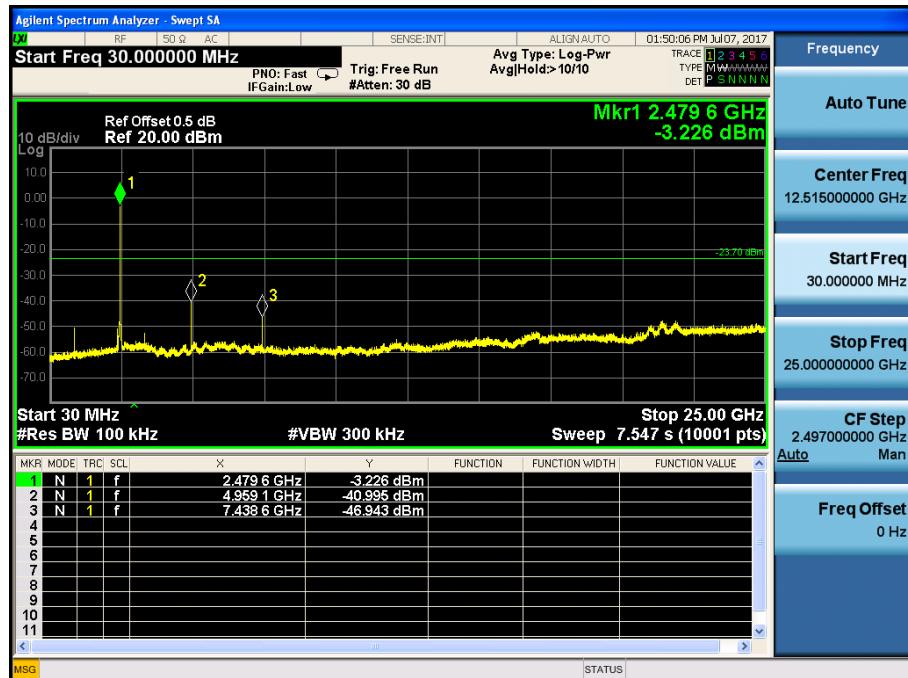

(Plot 4.9.1 C: Channel 78: 2480MHz @ GFSK)



## 4.9.2 8DPSK Test Mode


### A. Test Verdict

Channel	Frequency (MHz)	Frequency Range	Sweep Points	Refer to Plot	Limit (dBc)	Verdict
00	2402	30MHz-25GHz	10001	Plot 4.9.2 A	-22.42	PASS
39	2441	30MHz-25GHz	10001	Plot 4.9.2 B	-24.96	PASS
78	2480	30MHz-25GHz	10001	Plot 4.9.2 C	-25.07	PASS

Note:

1. The test results including the cable lose.

### B. Test Plots

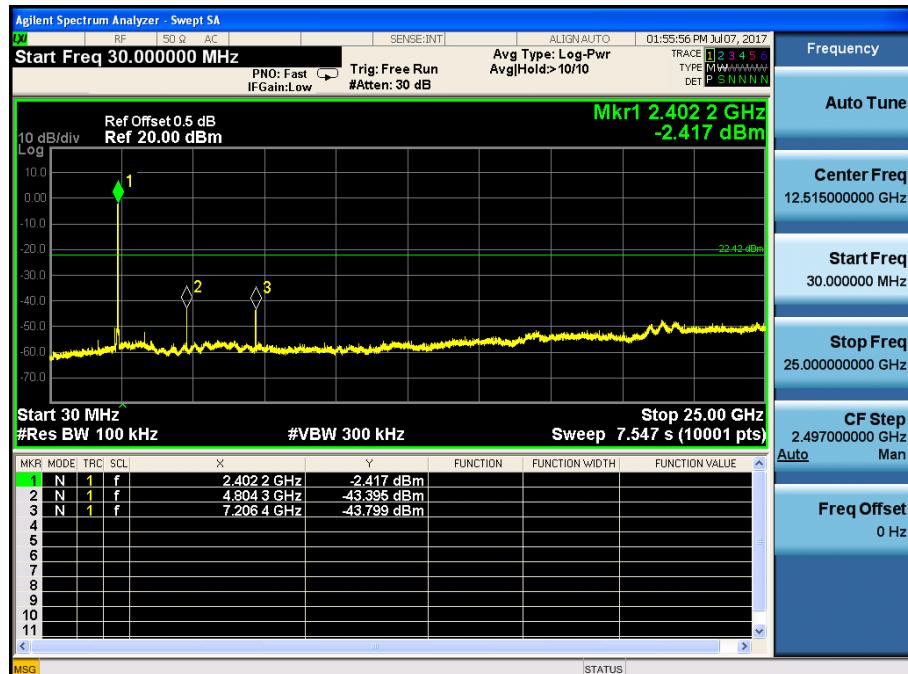


(Plot 4.9.2 A: Channel 00: 2402MHz @ 8DPSK)




# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 41 of 45 -

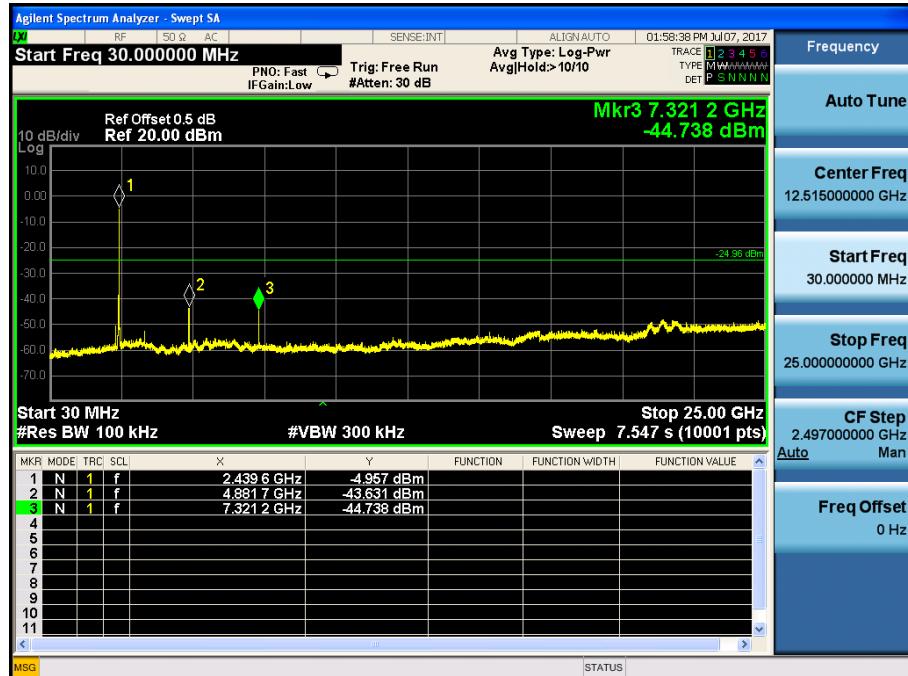

(Plot 4.9.2 B: Channel 39: 2441MHz @ @ 8DPSK)

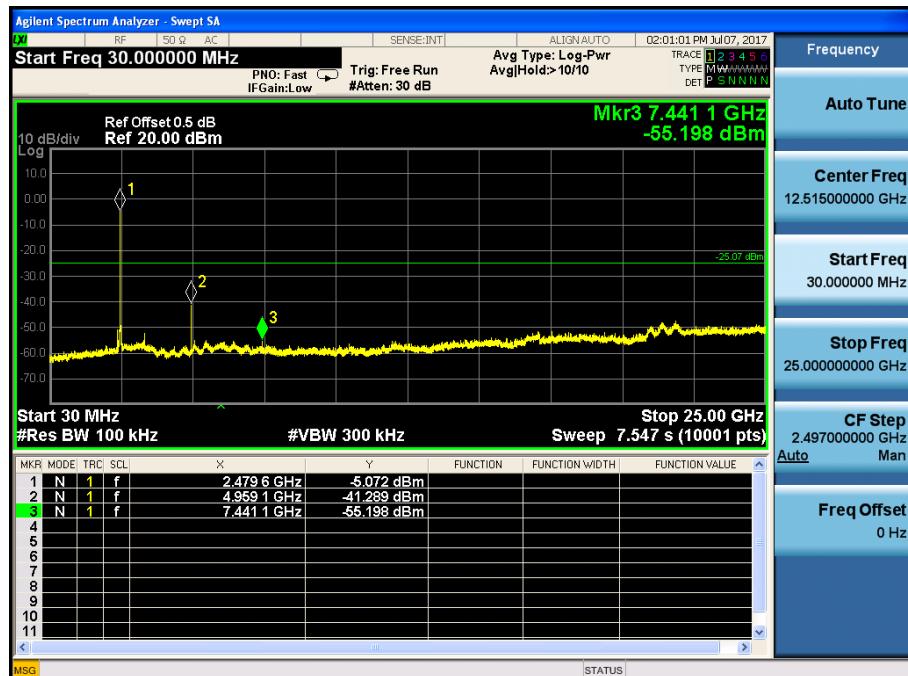

(Plot 4.9.2 C: Channel 78: 2480MHz @ @ 8DPSK)



## 4.10 Pseudorandom Frequency Hopping Sequence

### TEST APPLICABLE


#### For 47 CFR Part 15C section 15.247 (a)(1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

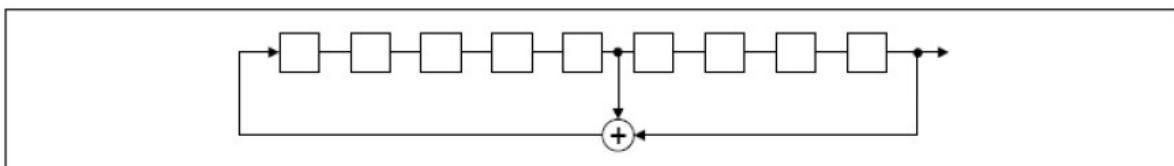

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

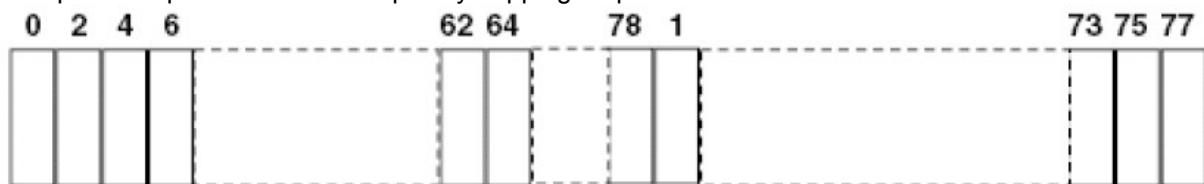

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.



## 4.11 Antenna Requirement

### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **Refer to statement below for compliance**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **Measurement**

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

### **Measurement parameters**

<b>Measurement parameter</b>	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

### **Limits**

antena type:PCB antena

FCC	IC
Antenna Gain	
6 dBi	

### **Results**

Antenna type:PCB antenna


T <sub>nom</sub>	V <sub>nom</sub>	Lowest Channel 2402 MHz	Middle Channel 2441 MHz	Highest Channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation		-0.30	-1.27	-2.21
Radiated power [dBm] Measured with GFSK modulation		-1.83	-2.43	-2.85
Gain [dBi] Calculated		-1.53	-1.16	-0.64
Measurement uncertainty		± 0.6 dB (cond.) / ± 2.56 dB (rad.)		



# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 44 of 45 -

## Setup photo

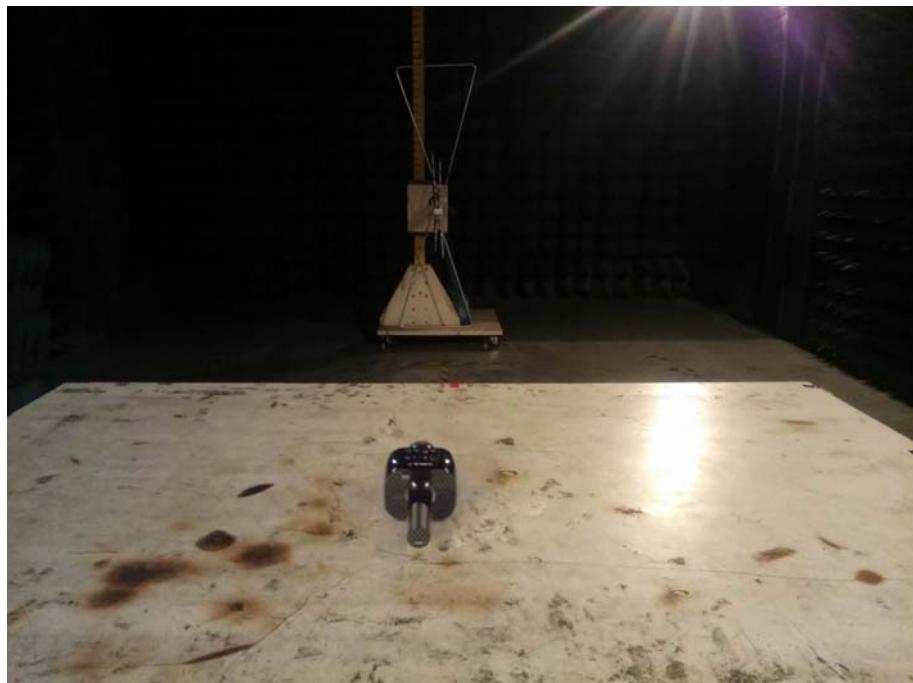



# Shenzhen Asia Test Technology Co., Ltd.

Report No. ATT2017SZ0625885F  
- Page 45 of 45 -



.....End of Report.....