

Dates of Tests: April 16 ~ April 26, 2016

Test Report S/N: LR500111605C

Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID

PBNRX01-CC85A

APPLICANT

ENTERMEDIA CO., LTD.

Equipment Class	:	Part 15 Spread Spectrum Transmitter (DSS)
Manufacturing Description	:	Wireless MIC receiver module
Model name	:	RX01-CC85A
Variation Model	:	RX01-CC85B
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C; ANSI C-63.4-2014
Frequency Range	:	2406 ~ 2474MHz
RF power	:	Max -7.50 dBm – Conducted
Data of issue	:	April 28, 2016

This test report is issued under the authority of:

The test was supervised by:



Yong-Cheol Wang, Manager



Jungwon Seo, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION ----- 3

2. INFORMATION ABOUT TEST ITEM ----- 4

3. TEST REPORT ----- 5

 3.1 SUMMARY OF TESTS ----- 5

 3.2 FREQUENCY HOPPING SYSTEM REQUIREMENTS----- 6

 3.3 TECHNICAL CHARACTERISTICS TEST ----- 8

 3.3.1 CARRIER FREQUENCY SEPARATION ----- 8

 3.3.2 NUMBER OF HOPPING FREQUENCIES ----- 10

 3.3.3 20 dB BANDWIDTH ----- 12

 3.3.4 TIME OF OCCUPANCY (Dwell Time) ----- 16

 3.3.5 TRANSMITTER OUTPUT POWER ----- 18

 3.3.6 BAND EDGE ----- 21

 3.3.7 CONDUCTED SPURIOUS EMISSIONS ----- 25

 3.3.8 RADIATED SPURIOUS EMISSIONS ----- 28

 3.3.9 AC CONDUCTED EMISSIONS ----- 40

APPENDIX

APPENDIX TEST EQUIPMENT USED FOR TESTS ----- 47

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2016-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	610755	2017-04-21	FCC filing
FCC	U.S.A	649054	2017-04-13	FCC CAB
VCCI	JAPAN	R2133(10 m), C2307	2017-06-21	VCCI registration
VCCI	JAPAN	T-2009	2016-12-23	VCCI registration
VCCI	JAPAN	G-563	2018-12-13	VCCI registration
IC	CANADA	5799A-1	UPDATING	IC filing
KOLAS	KOREA	NO.551	2017-01-08	KOLAS accredited Lab.

2. Information about test item

2-1 Client

Company name : ENTERMEDIA CO., LTD.
 Address : 157-1, Seongo-ro, Ojeong-gu, Bucheon-si, Gyeonggi-do, Korea
 Tel / Fax : TEL No : +82-02-680-9139 / FAX No : +82-32-673-0868

2-2 Manufacturer

Company name : ASSA TECHNOLOGY JOINT STOCK COMPANY
 Address : Thanh Hoa Hamlet, Ho Nai 3 ward, Trang Bom District, Dong Nai province, Vietnam

2-3 Equipment Under Test (EUT)

Model name : RX01-CC85A
 Variation model name : RX01-CC85B
 Serial number : Identical prototype
 Date of receipt : April 14, 2016
 EUT condition : Pre-production, not damaged
 Antenna type : PCB pattern antenna Max Gain 4.75 dBi
 Frequency Range : 2406 ~ 2474 MHz
 RF output power : Max. -7.50 dBm – Conducted
 Number of channels : 18
 Duty cycle : 8.40 %
 Channel spacing : 4 MHz
 Type of Modulation : Frequency Hopping Spread Spectrum(FHSS)
 Power Source : DC 5 V

2-4 Tested frequency

Bluetooth	LOW	MID	HIGH
Frequency (MHz)	2406	2442	2474

2-5 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	$\geq 2/3$ of 20 dB BW	Conducted	C
15.247(a)	Number of Hopping Frequencies	≥ 15 channels		C
15.247(a)	20 dB Bandwidth 99% Bandwidth	—		C
15.247(a)	Dwell Time	≤ 0.4 seconds		C
15.247(b)	Transmitter Output Power	≤ 1 W for 1 Mbps ≤ 125 mW for 2,3 Mbps		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3 m)	Radiated	C
15.109	Field Strength	—		C
15.207 / 15.107	AC Conducted Emissions	EN 55022	Line Conducted	C
15.203	Antenna requirement	—	—	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

Note 1: Antenna Requirement

→ The **ENTERMEDIA CO., LTD.** FCC ID: **PBNRX01-CC85A** unit complies with the requirement of §15.203.

The antenna type is PCB pattern antenna.

Note 2: The sample was tested according to the following specification:
FCC Parts 15.247; ANSI C-63.4-2014

Note3: TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2013) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled “**Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems**” were used in the measurement of the **ENTERMEDIA CO., LTD.**, FCC ID: **PBNRX01-CC85A**

3.2 Frequency Hopping System Requirements

3.2.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3.2.2 EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

Longest sequence of zeros: 8 (non-inverted signal)

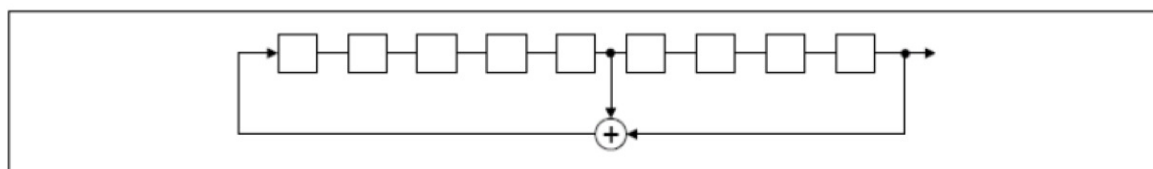

Linear Feedback Shift Register for Generation of the PRBS sequence

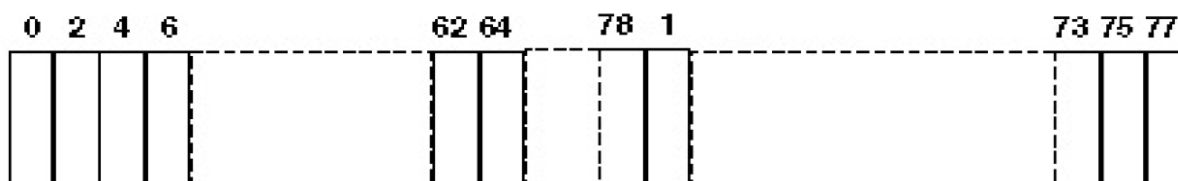

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

3.2.3 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

*Example for a Bluetooth device using channel numbers would be : Chan 44, 35, 78, 03, 15, 21, 76, 40, 56, 13, 02, 19, 67, 39, 78, 20, 21, 64, 75 etc.

3.3 TECHNICAL CHARACTERISTIC TEST

3.3.1 Carrier Frequency Separation

Procedure:

The test follows DA00-705. The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 10 MHz (Wide enough to capture the peaks of two adjacent channels)

RBW = 10 kHz (1 % of the span or more) Sweep = auto

VBW = 10 kHz Detector function = peak

Trace = max hold

Measurement Data:

Test Results	
Carrier Frequency Separation (MHz)	Result
3.9800	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of 20 dB bandwidth of the hopping channel, whichever is greater.

Measurement Setup


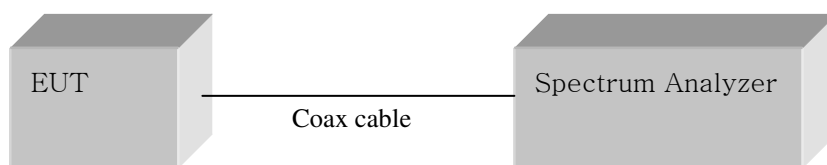


Figure 1: Measurement setup for the carrier frequency separation

Carrier Frequency Separation

Basic Mode

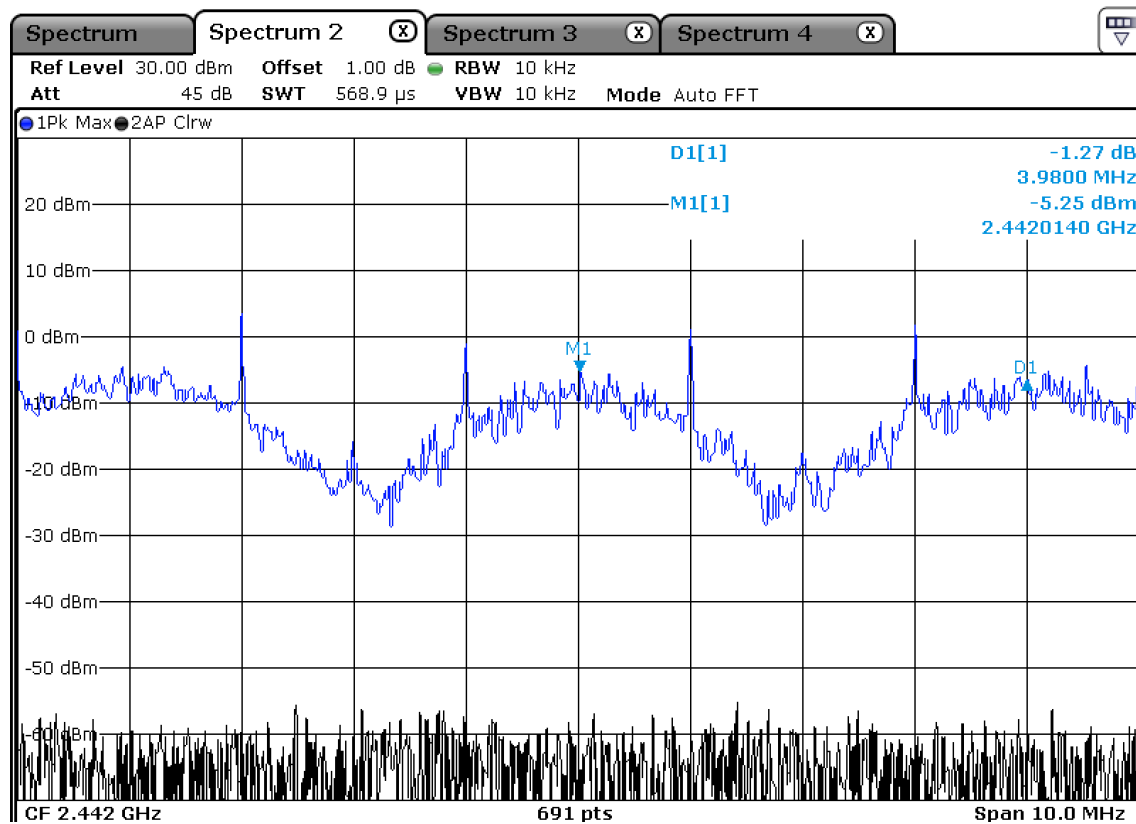

3.3.2 Number of Hopping Frequencies

Procedure:

The test follows DA00-705. The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to :

Frequency range Start = 2400.0 MHz, Stop = 2483.5 MHz

RBW = 100 kHz (1% of the span or more) Sweep = auto

VBW = 100 kHz (VBW $\geq$ RBW) Detector function = peak

Trace = max hold Span > 40 MHz

Measurement Data : Complies

Total number of Hopping Channels	18
---	----

- See next pages for actual measured spectrum plots.


Minimum Standard:

At least 15 channels

Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

Number of Hopping Frequencies

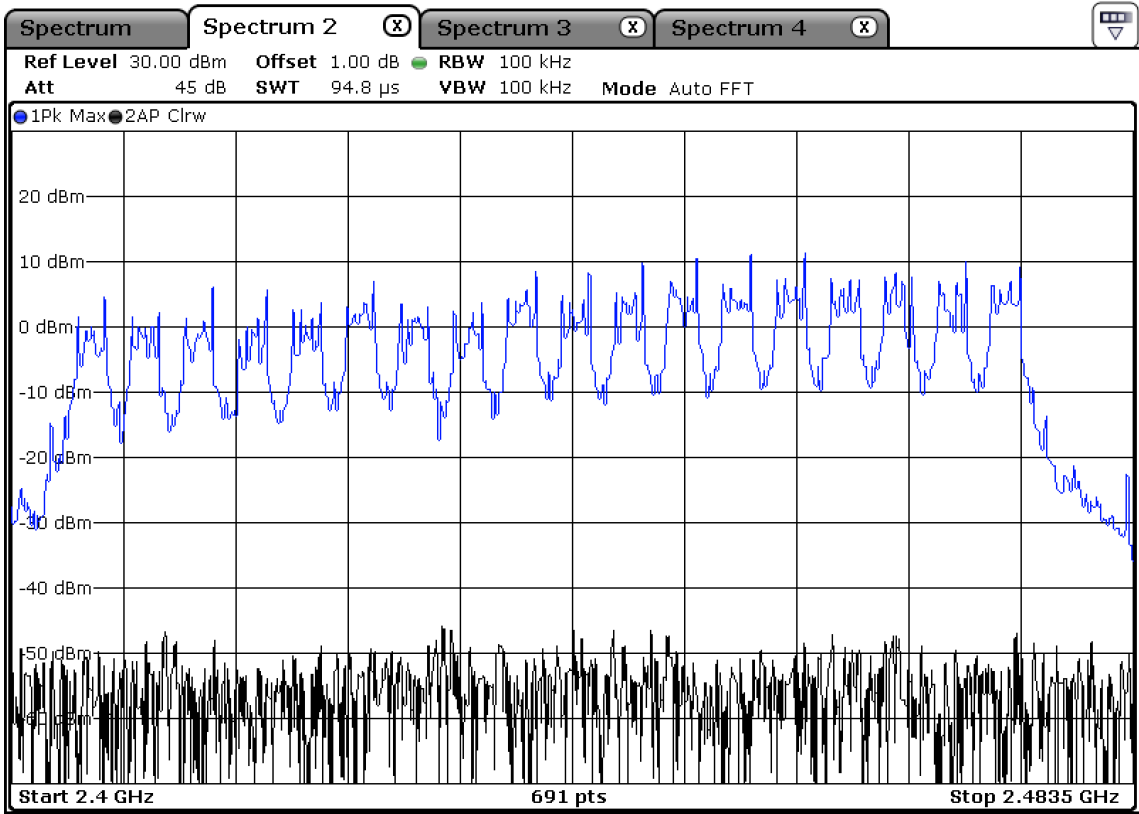

3.3.3 20 dB Bandwidth

Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to :

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz (VBW $\geq$ RBW)

Detector function = peak

Trace = max hold

Measurement Data: Basic Mode

Frequency (MHz)	Channel No.	Test Results(MHz)	
		20dB Bandwidth	99% Bandwidth
2406	1	0.0868	0.3126
2442	9	0.0912	0.1997
2474	18	0.2171	0.4298

- See next pages for actual measured spectrum plots.


Minimum Standard:

N/A


Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)


Channel 1 of basic mode
20 dB Bandwidth

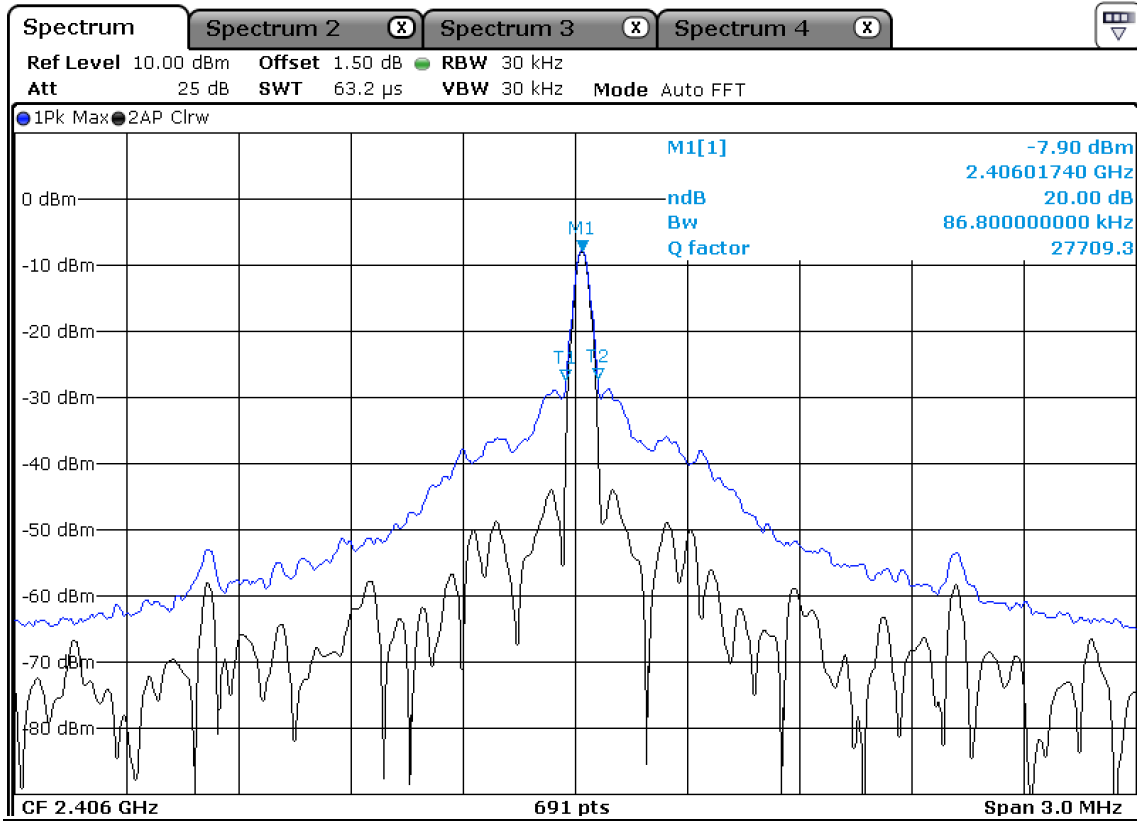


99% Bandwidth

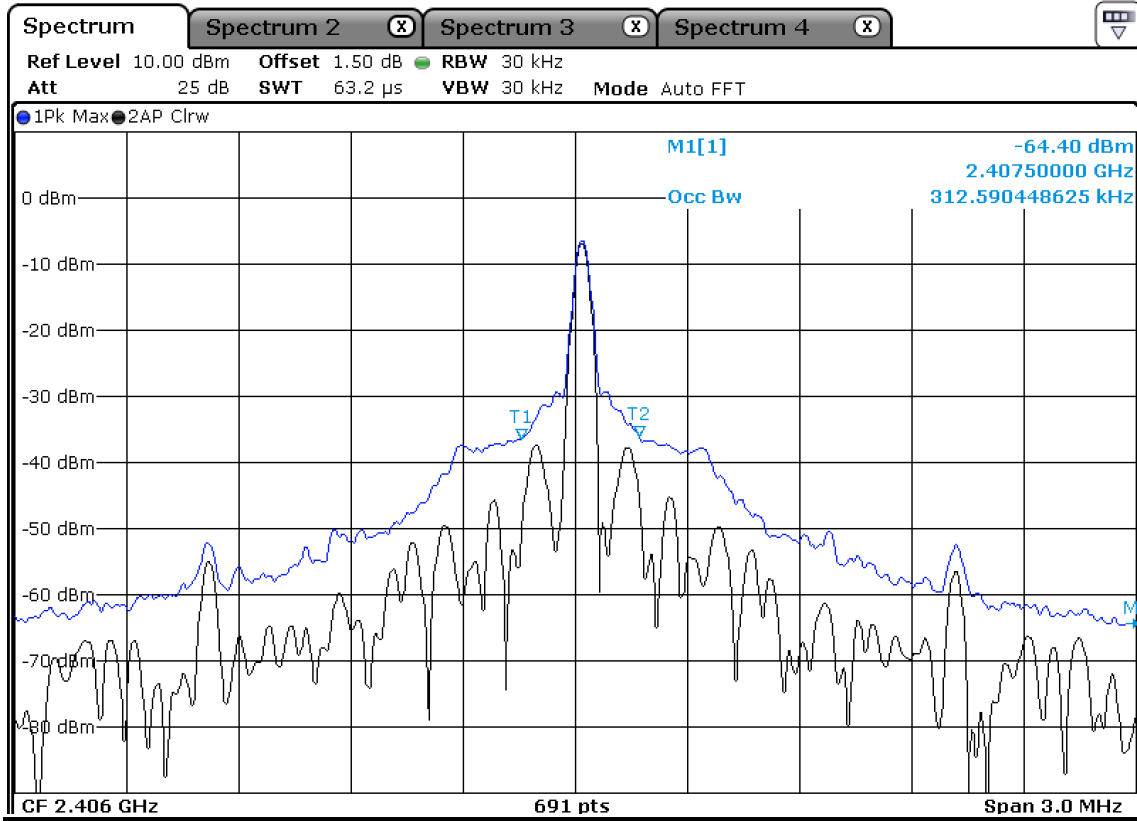

Channel 2 of basic mode
20 dB Bandwidth

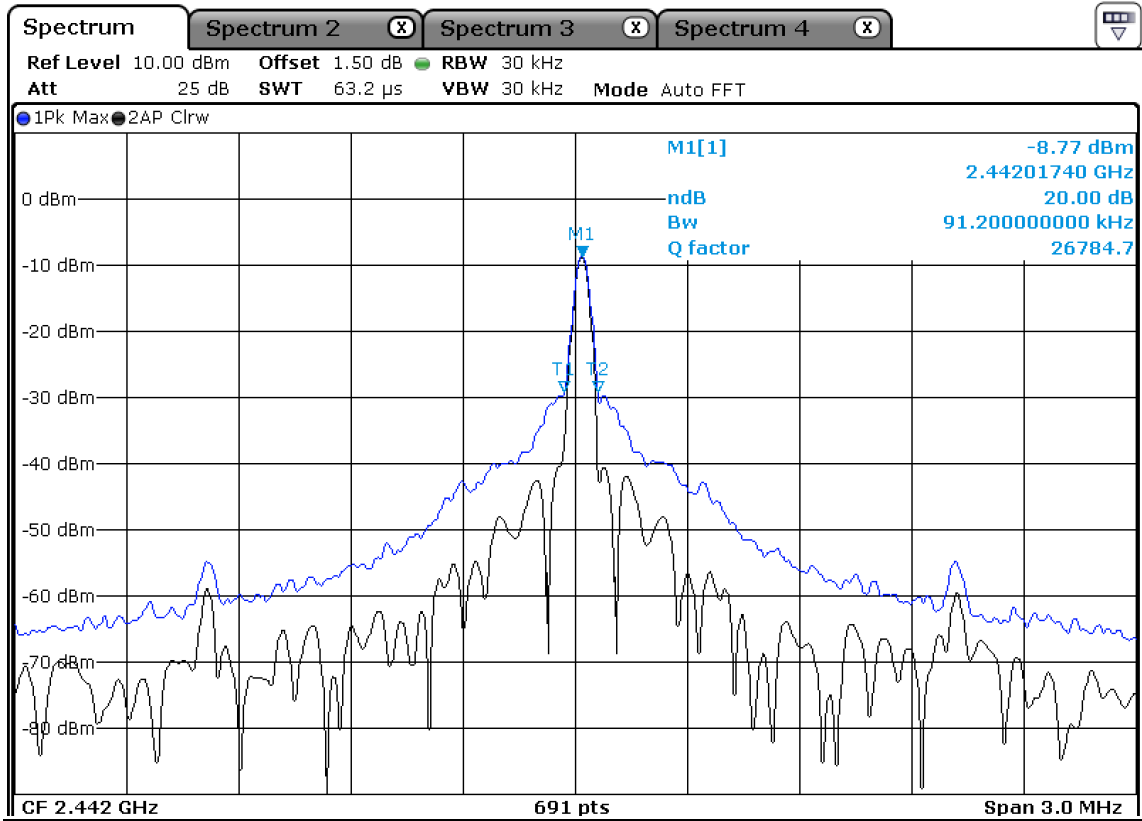


99% Bandwidth

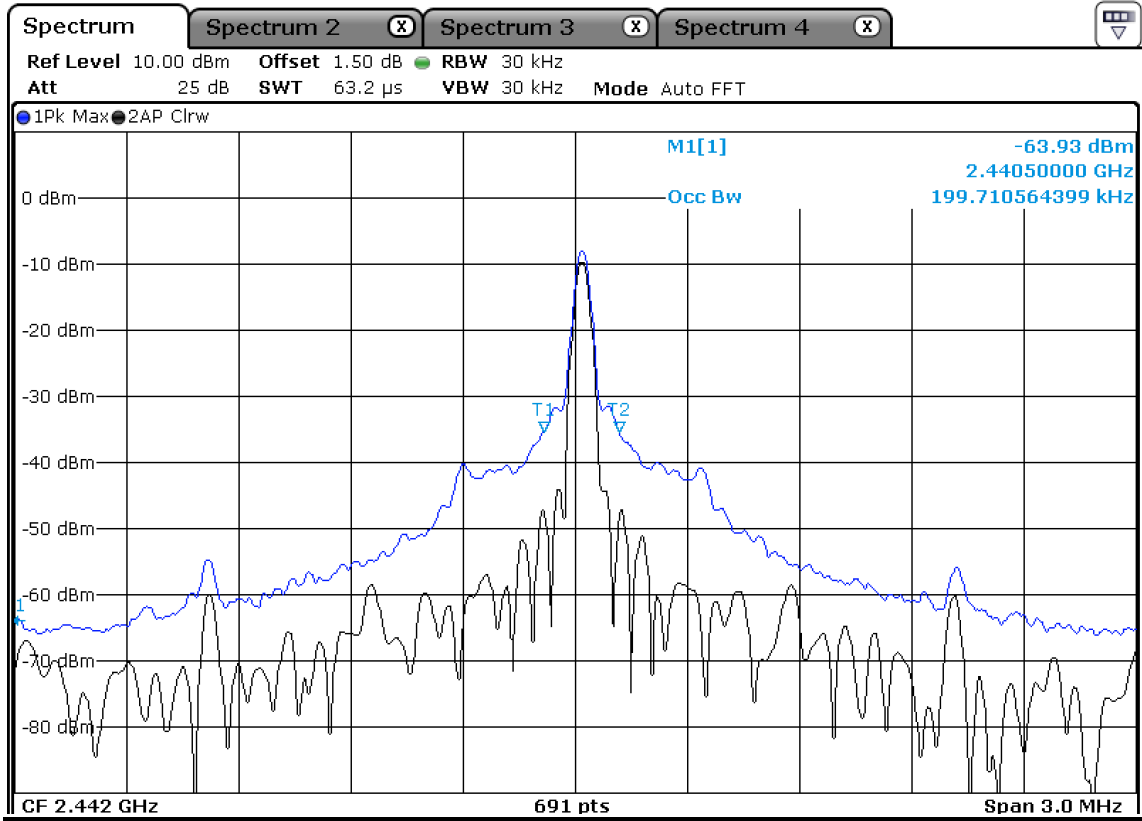


Channel 3 of basic mode

20 dB Bandwidth

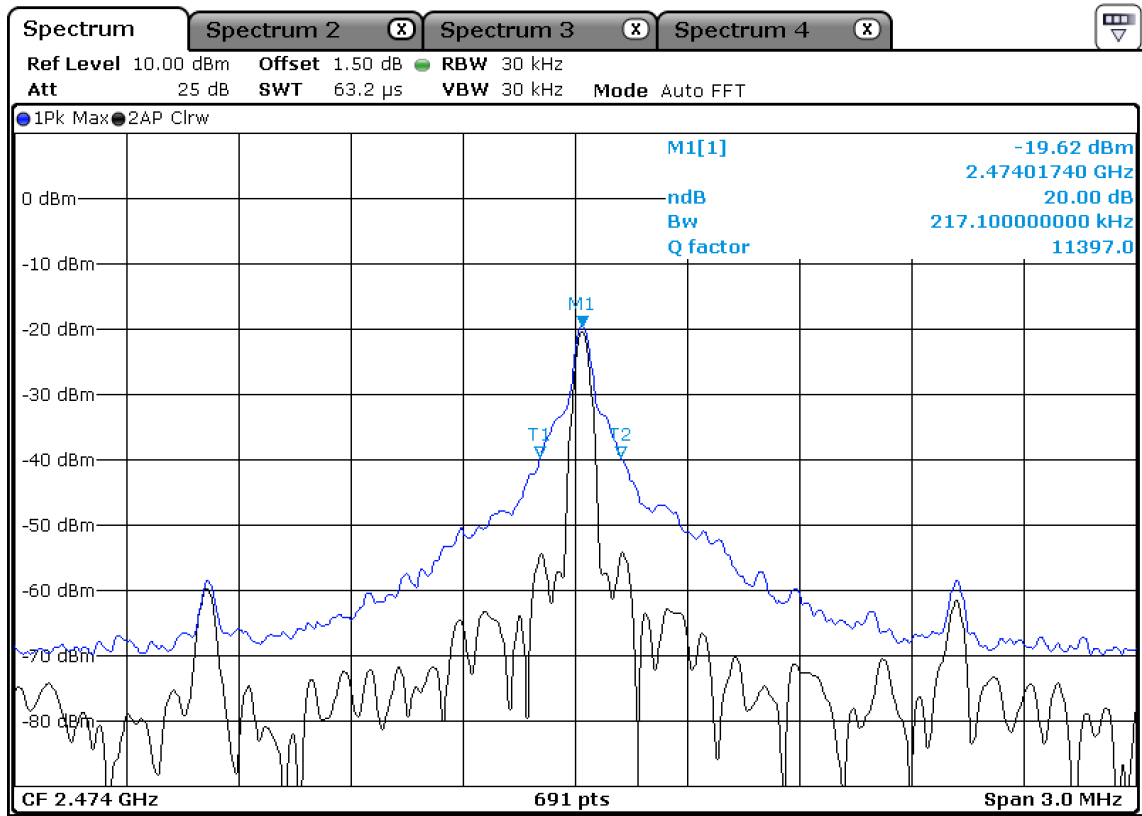

99% Bandwidth

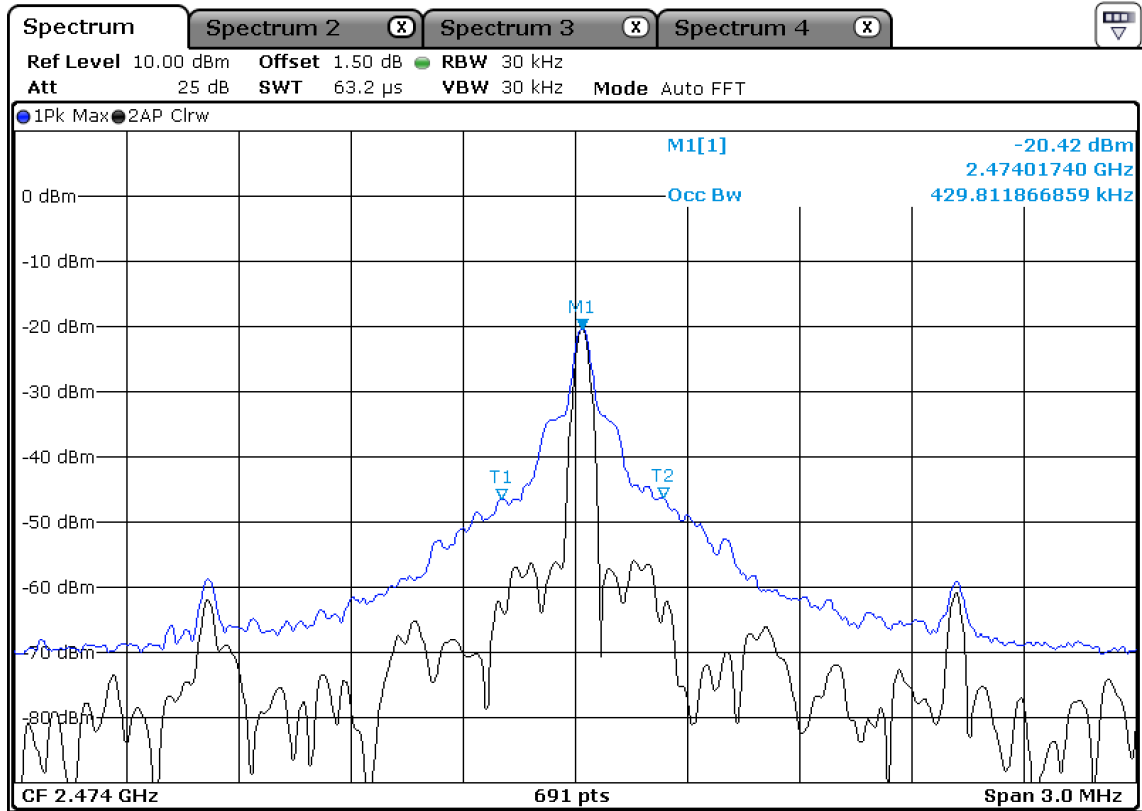

3.3.4 Time of Occupancy (Dwell Time)

Procedure:

The test follows DA00-705. The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

Center frequency = 2442 MHz

Span = zero

RBW = 1 MHz

VBW = 1 MHz (VBW $\geq$ RBW)

Trace = max hold

Detector function = peak

Measurement Data :

Mode	Number of transmission in a 7.2 s (18 Hopping*0.4)	Length of Transmission Time (msec)	Result (msec)	Limit (msec)
FHSS	17(Times / 3sec) *2.4 = 40.8	0.209	8.53	400

- See next pages for actual measured spectrum plots.
- dwell time = {(number of hopping per second / number of slot) x duration time per channel} x 0.4 ms



Minimum Standard:

0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

basic mode

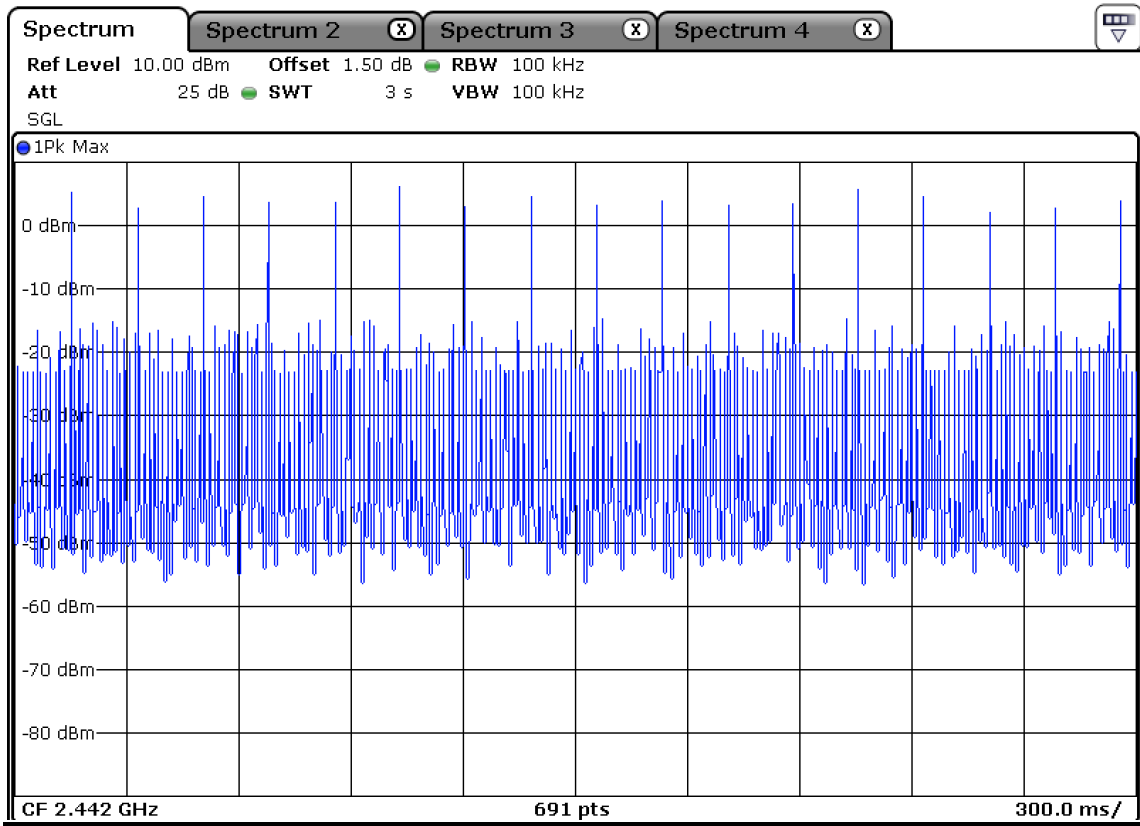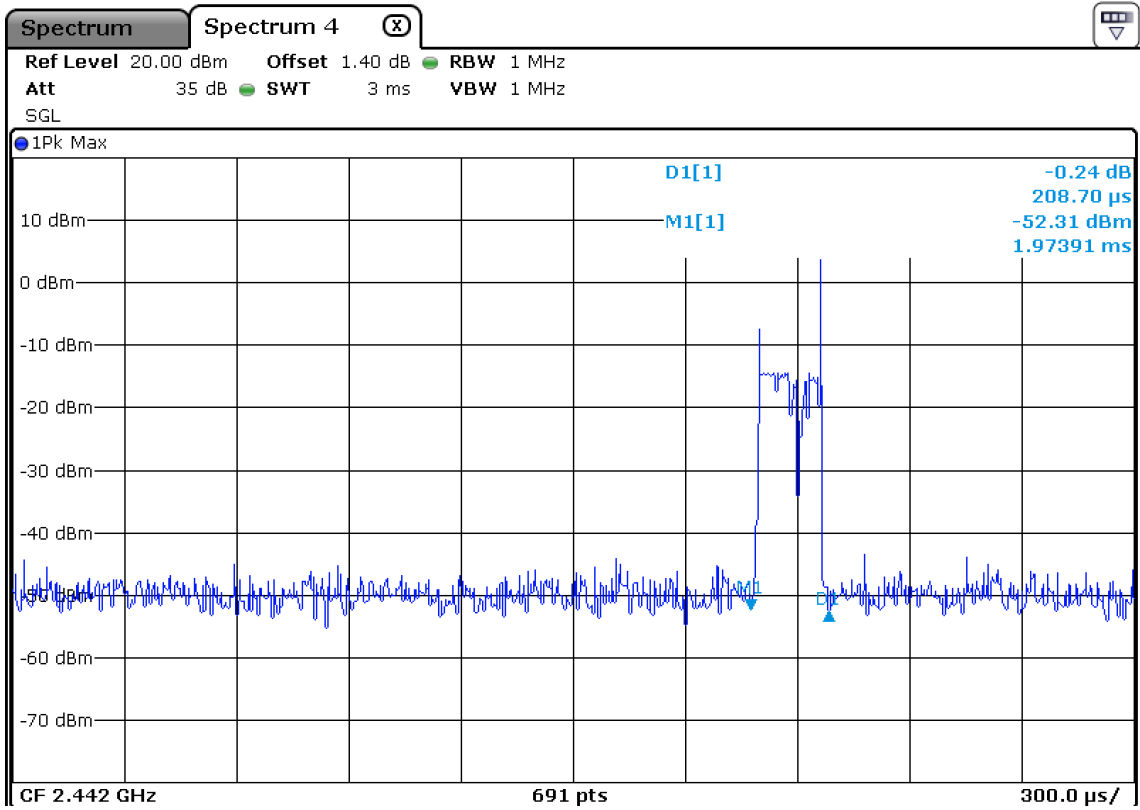

3.3.5 Transmitter Output Power

Procedure:

The test follows DA00-705. The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to :

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 3 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 3 MHz (VBW $\geq$ RBW)

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data : Basic Mode

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2406	1	-7.50	0.18	Complies
2442	9	-9.93	0.10	Complies
2474	18	-17.77	0.02	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:	For frequency hopping systems with at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems: 0.125 W.
--------------------------	--

Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)


Channel 1

Basic mode

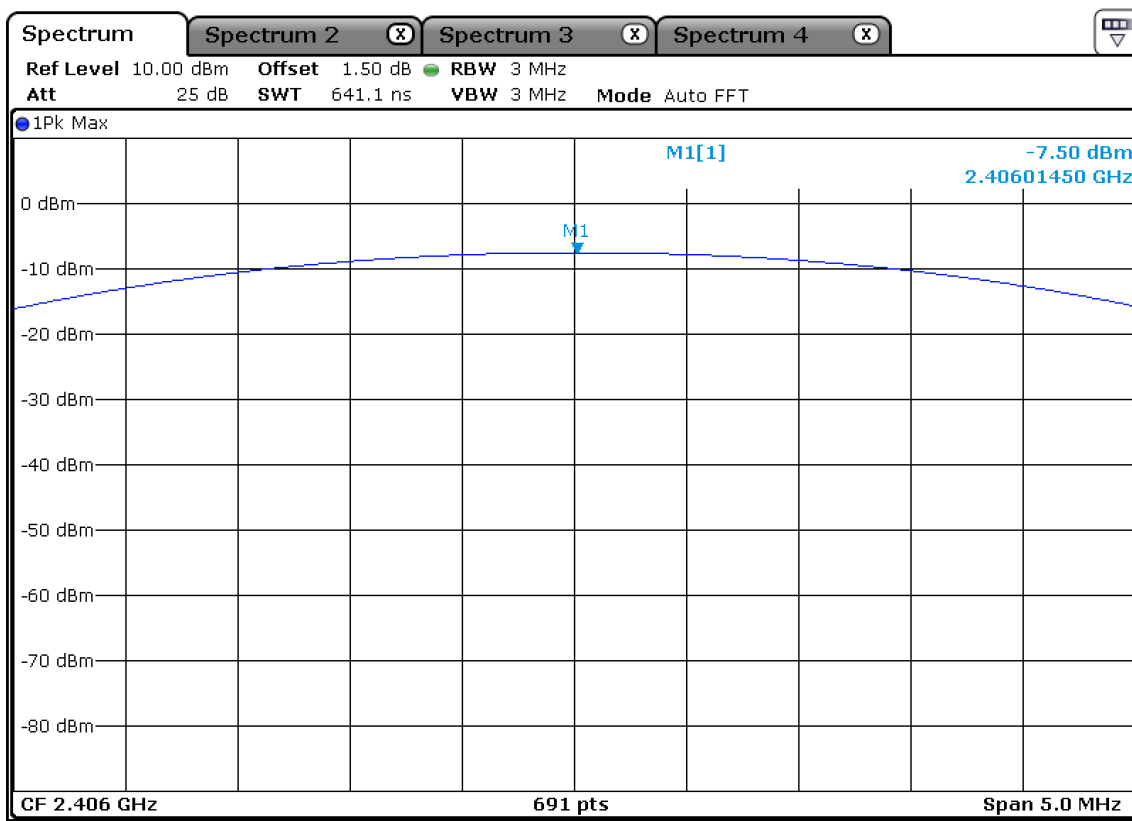


Channel 2

Basic mode

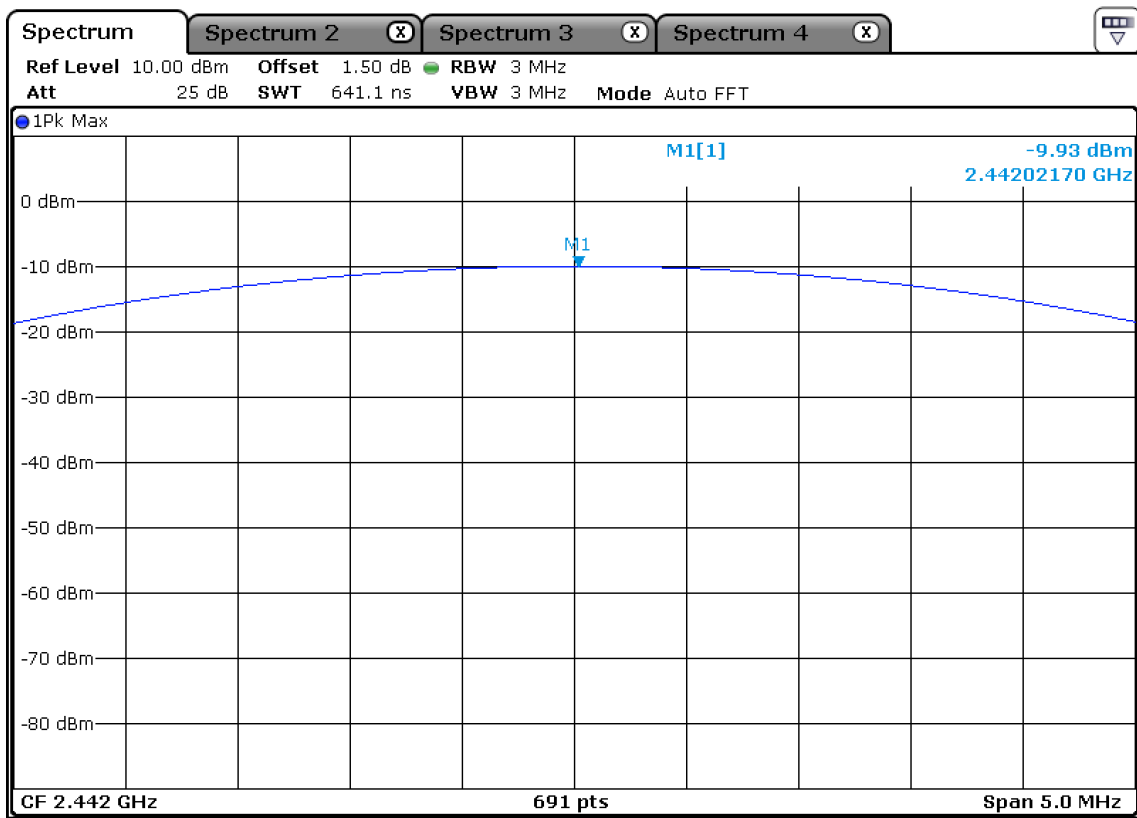

Channel 3
Basic mode

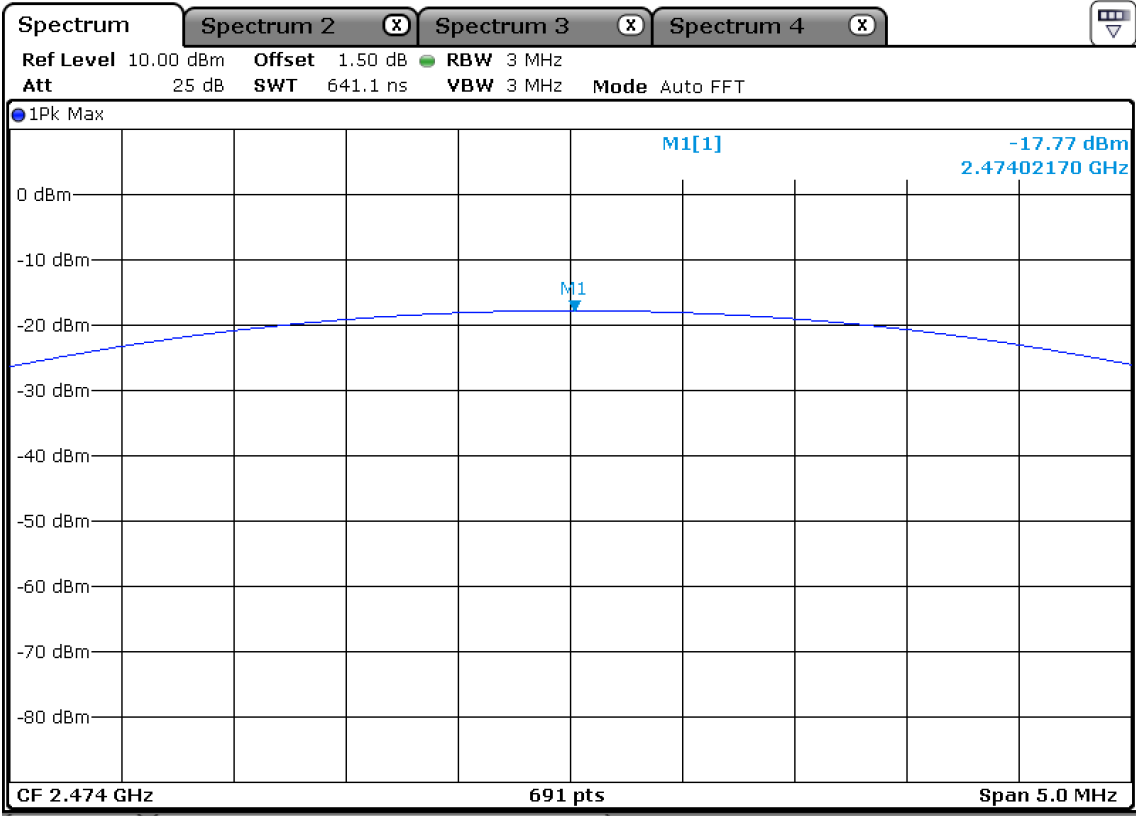

3.3.6 Band Edge

Procedure:

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 10 ~ 30 MHz

Detector function = peak

Trace = max hold

Sweep = auto



Measurement Data: **Complies**



- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------

Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)

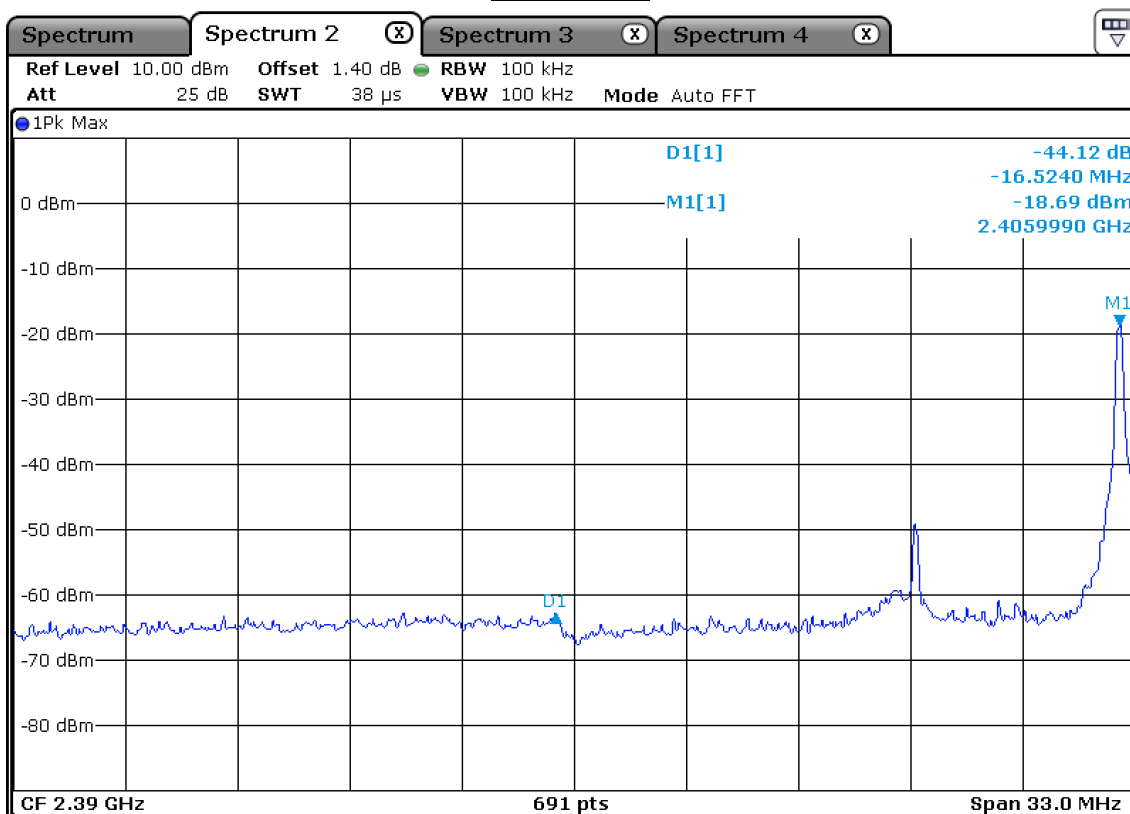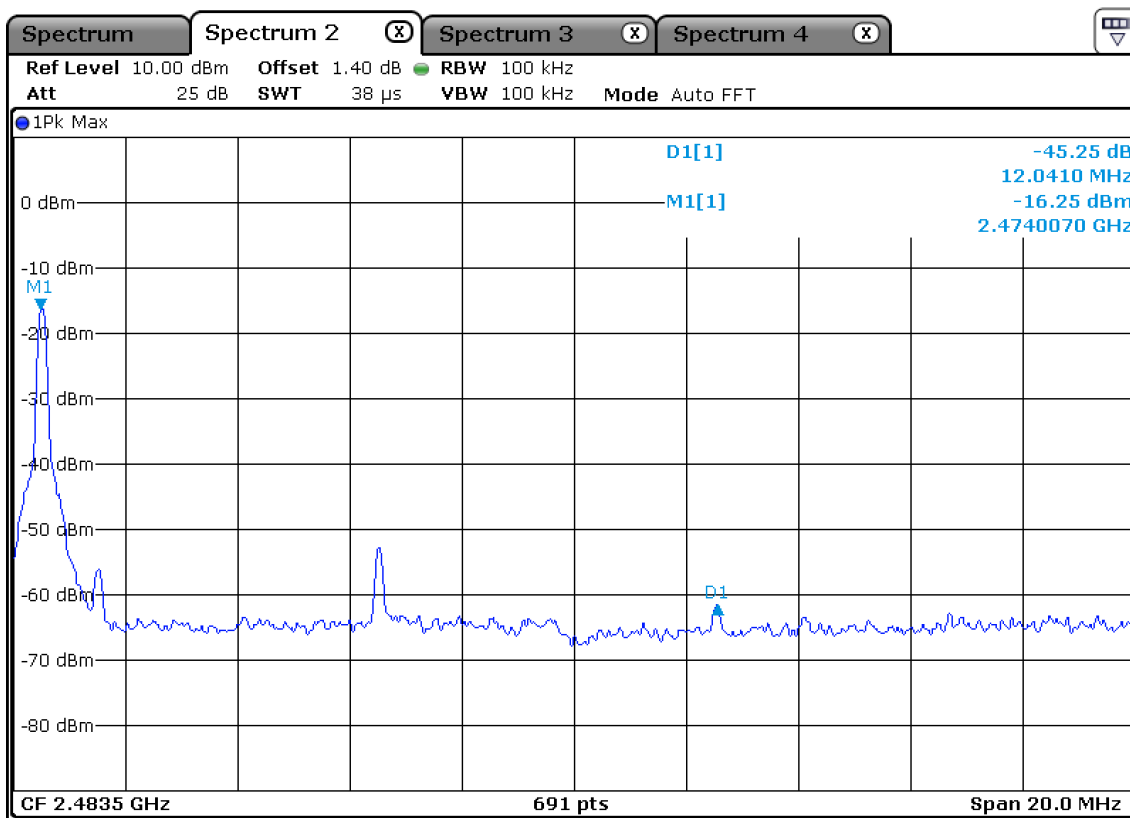Band Edge**Lower edge****Upper edge**

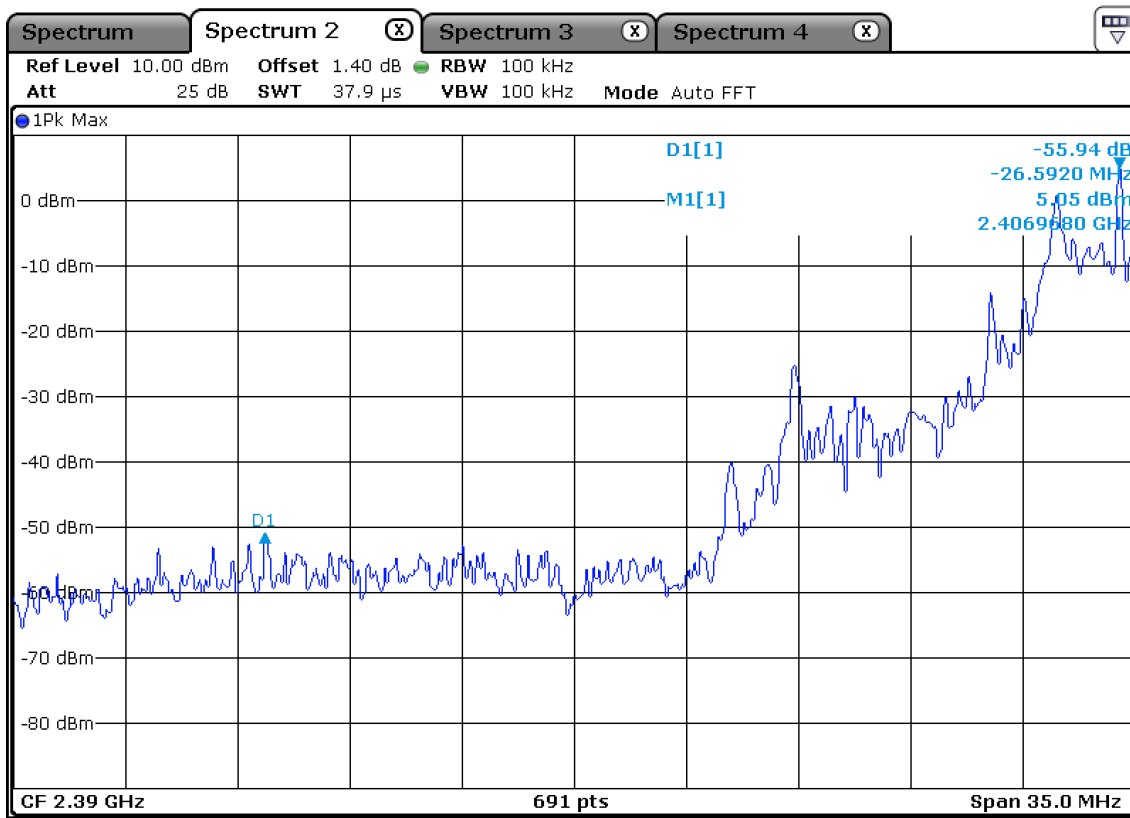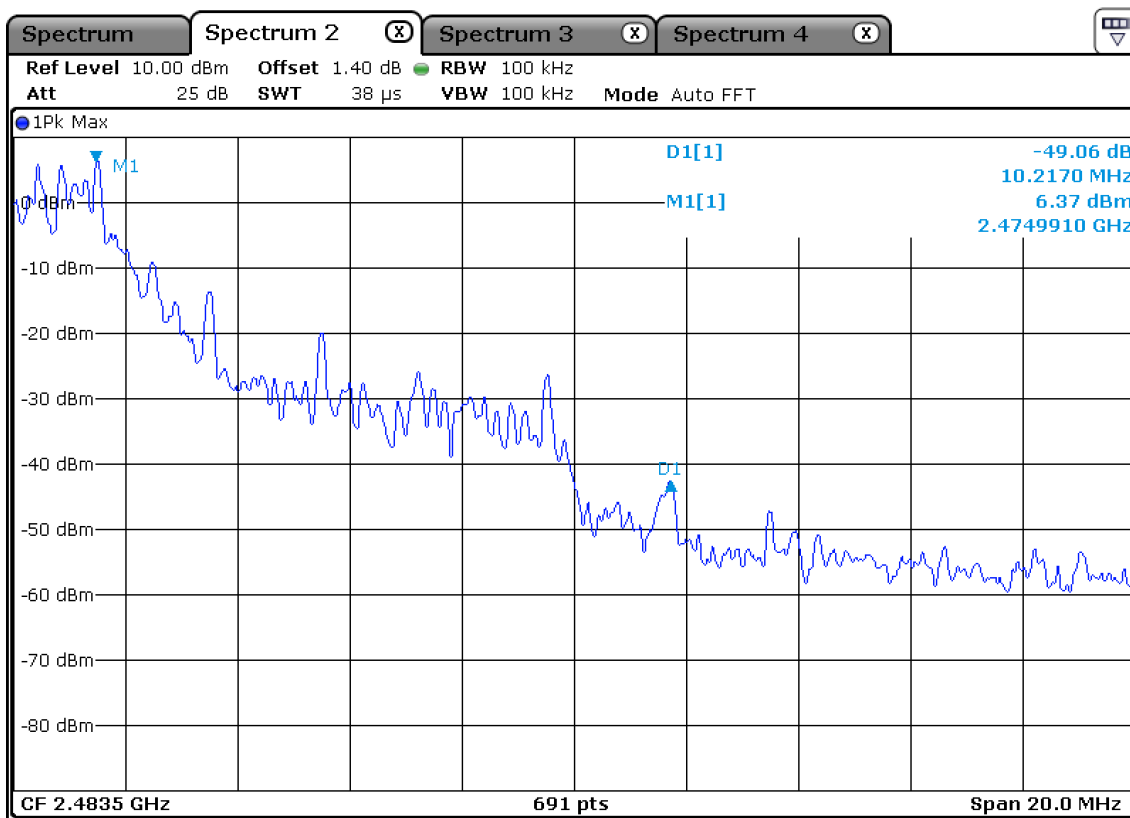Band Edge- Hopping**Lower edge****Upper edge**

Radiated Band edges in the restricted band 2310-2390 MHz measurement

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBμV/m]		Result [dBμV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain+CableLoss	AV / Peak		AV / Peak		AV / Peak	
2351.1	33.45	45.61	V	32.21	25.27	54.0	74.0	40.39	52.55	13.61	21.45

Radiated Band edges in the restricted band 2483.5-2500 MHz measurement

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBμV/m]		Result [dBμV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain+CableLoss	AV / Peak		AV / Peak		[MHz]	
2484.1	29.54	40.38	V	32.21	25.27	54.0	74.0	36.48	47.32	17.52	26.68

Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented.

3.3.7 Conducted Spurious Emissions

Procedure:

The test follows DA00-705. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold

Measurement Data: **Complies**


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------


Measurement Setup

Same as the Chapter 3.3.1 (Figure 1)


Unwanted Emission – Low channel
Frequency Range = 30 MHz ~ 26.5 GHz

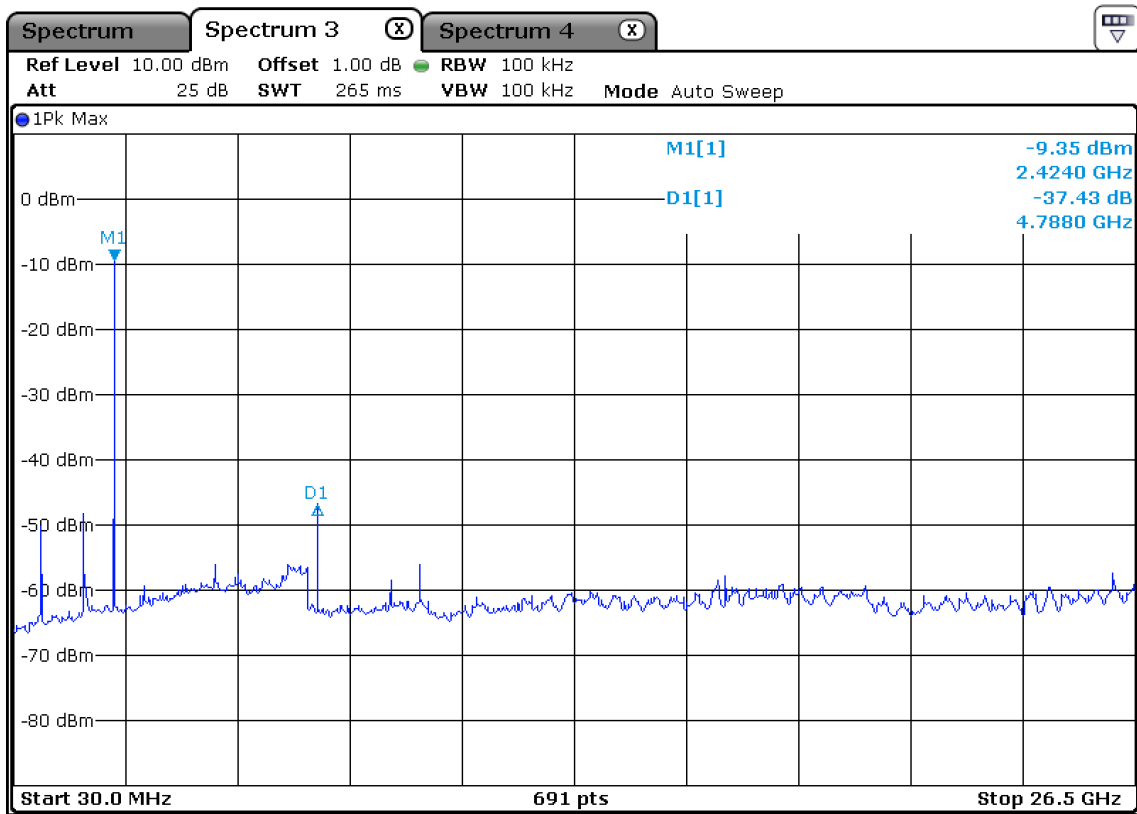

Unwanted Emission – Middle channel
Frequency Range = 30 MHz ~ 26.5 GHz

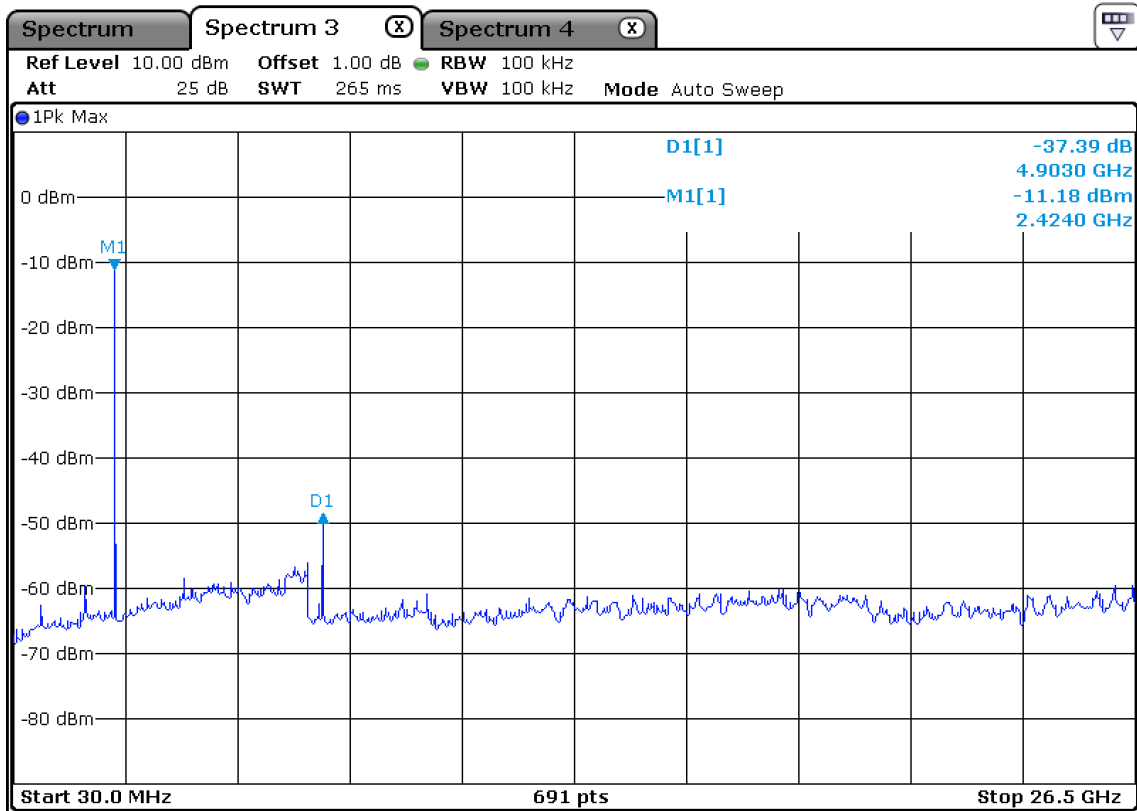

Unwanted Emission – High channel
Frequency Range = 30 MHz ~ 26.5 GHz

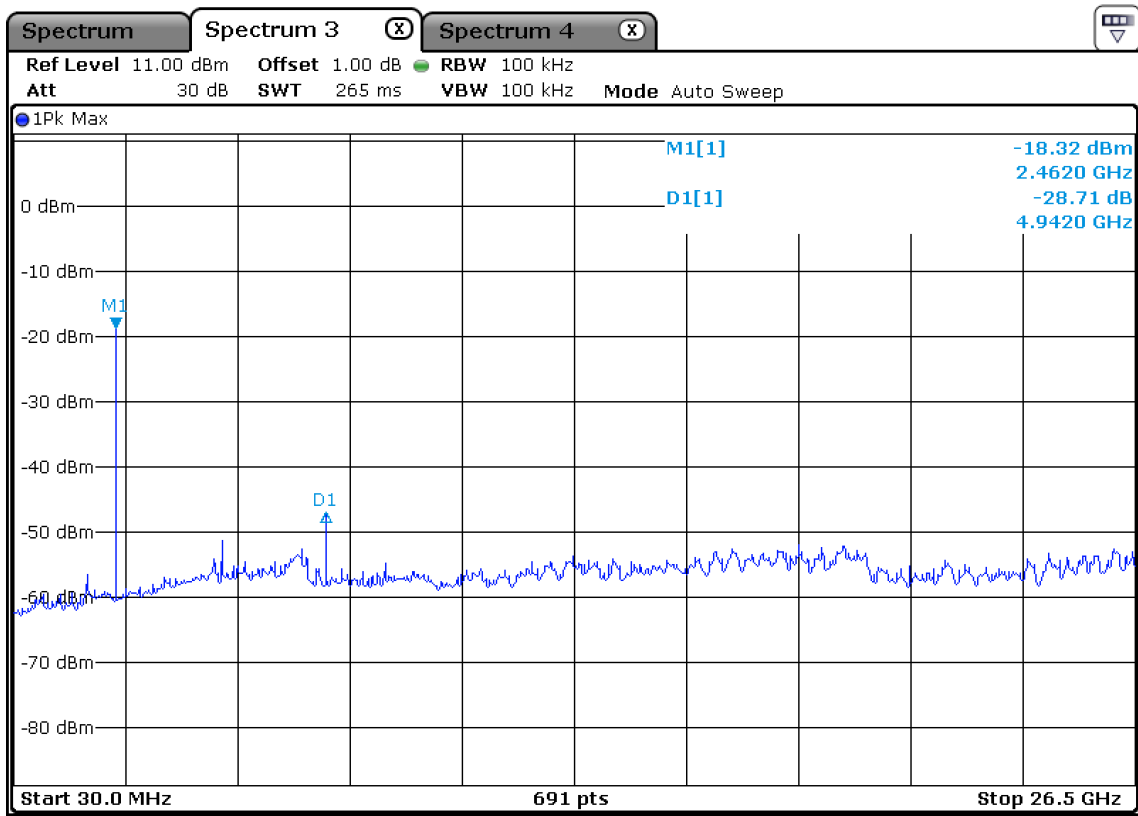

3.3.8 Radiated Spurious Emissions

Procedure:

Radiated emissions from the EUT were measured according to the dictates of DA00-705. The EUT was placed on a 0.8 m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

- (a) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 3 m distance from the EUT. The center of the Loop Test Antenna is 1 m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30 MHz, Bi-Log Test Antenna (30 MHz to 1 GHz) and Horn Test Antenna (above 1 GHz) are used. Test Antenna is 3 m away from the EUT. Test Antenna height is carried from 1 m to 4 m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 120 kHz (30 MHz ~ 1 GHz)

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz


Trace = max hold

VBW $\geq$ RBW


Detector function = peak

Sweep = auto


below 30 MHz

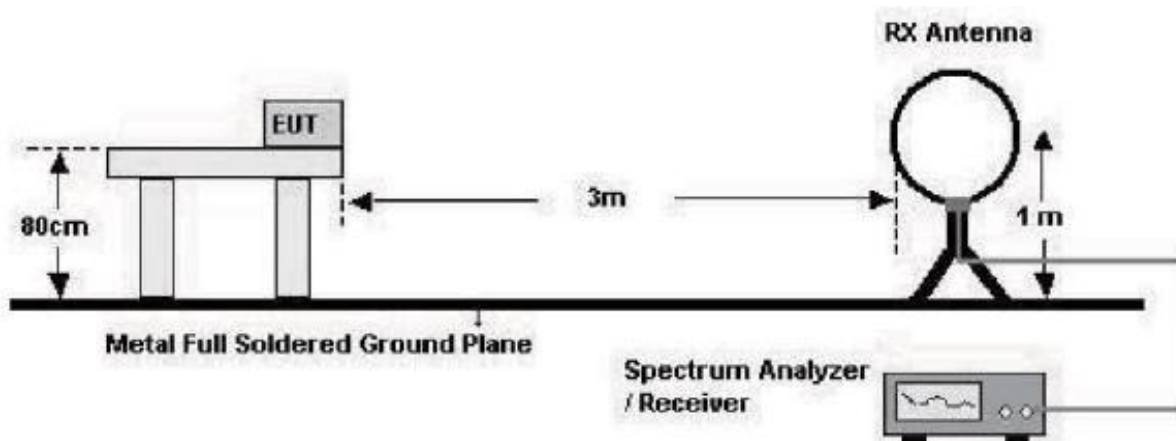

below 1 GHz (30 MHz to 1 GHz)

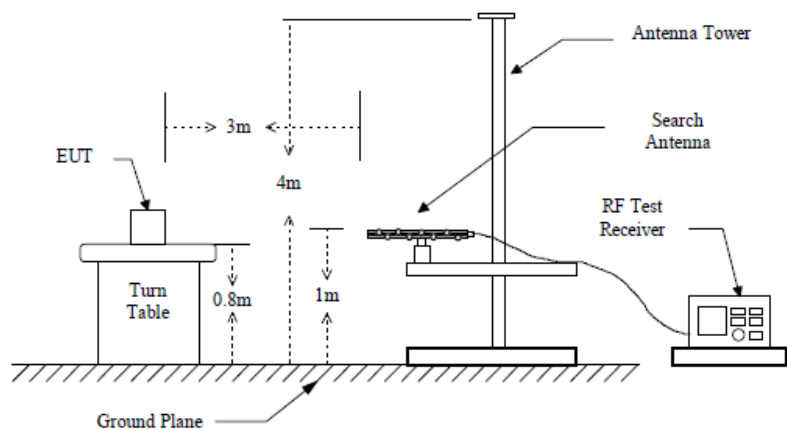

above 1 GHz

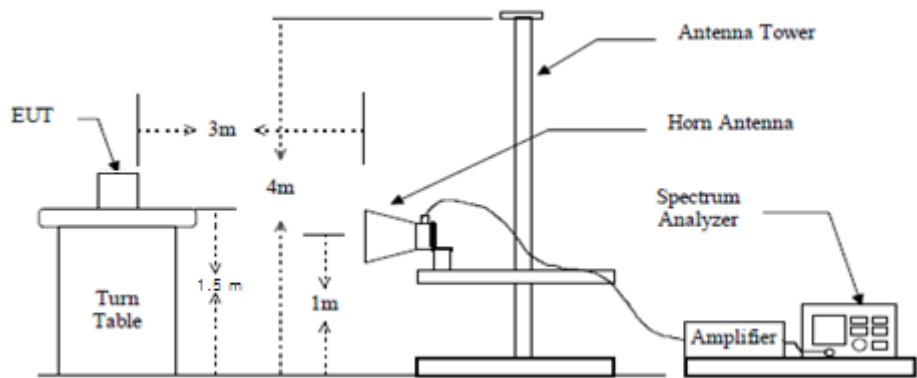

Measurement Data: **Complies**

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30 MHz.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data : Hopping Mode

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		D.C.F	Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable		AV/Peak		AV/Peak		AV / Peak	
4878.1	62.96	64.64	V	32.21	25.27	-53.60	54.0	74.0	16.30	18.0	37.7	56.0
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

- No other emissions were detected at a level greater than 20 dB below limit.

- D.C.F (Duty Cycle Correction Factor) = $20\log(\text{The worst Case DWELL Time}/100 \text{ ms})$

$$= 20\log(0.209 \text{ ms}/100 \text{ ms}) = -53.60$$

Radiated Emissions(below 1 GHz) – Wireless(LOW) mode

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: RX01-CC85A

TEST MODE: Wireless(LOW) mode


Temp Humi : 22 / 37

Tested by: SIN S U

Data: 66

Level (dBuV/m)

Date: 2016-04-25

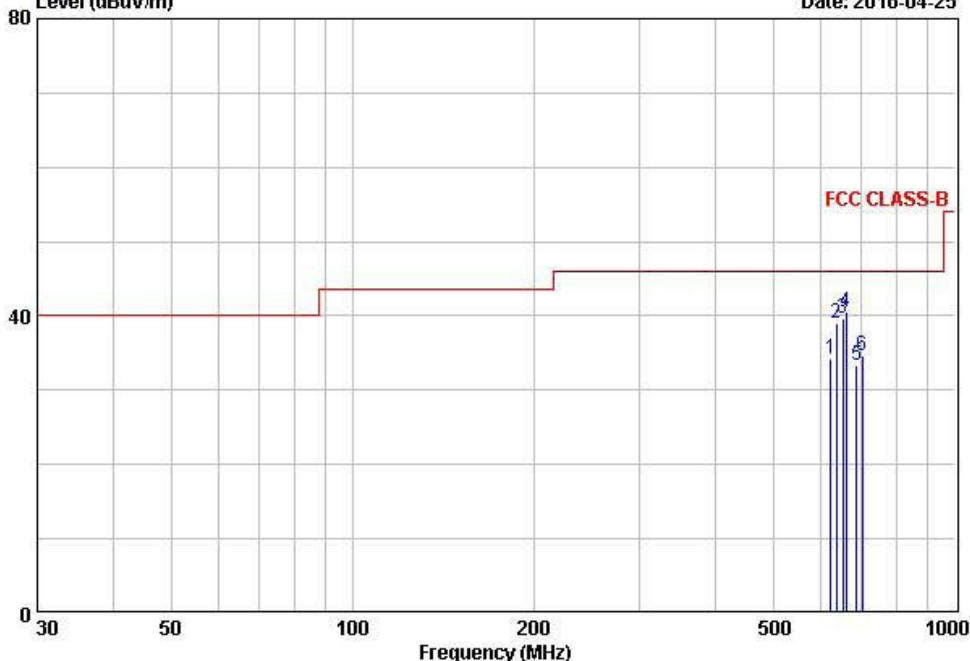

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 621.80	38.60	-4.32	34.28	46.00	11.72	297	112	HORIZONTAL
2 635.00	43.00	-3.95	39.05	46.00	6.95	255	189	HORIZONTAL
3 651.50	43.20	-3.51	39.69	46.00	6.31	305	19	HORIZONTAL
4 660.10	43.80	-3.28	40.52	46.00	5.48	296	123	HORIZONTAL
5 686.10	35.90	-2.62	33.28	46.00	12.72	400	347	HORIZONTAL
6 701.50	36.80	-2.22	34.58	46.00	11.42	100	311	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Wireless(MID) mode

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: RX01-CC85A

TEST MODE: Wireless(MID) mode


Temp Humi : 22 / 37

Tested by: SIN S U

Data: 65

Level (dBuV/m)

Date: 2016-04-25

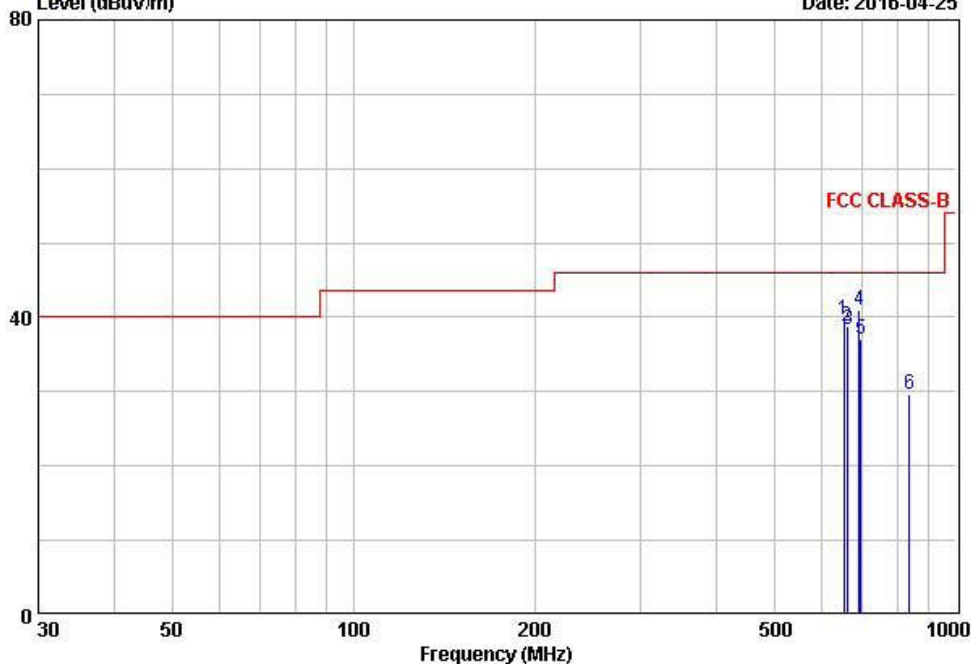

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	651.50	43.20	-3.51	39.69	46.00	6.31	267	77	HORIZONTAL
2	659.20	42.10	-3.31	38.79	46.00	7.21	150	200	HORIZONTAL
3	662.80	41.60	-3.21	38.39	46.00	7.61	400	101	HORIZONTAL
4	691.60	43.50	-2.49	41.01	46.00	4.99	326	335	HORIZONTAL
5	696.30	39.50	-2.37	37.13	46.00	8.87	300	287	HORIZONTAL
6	835.90	28.50	1.11	29.61	46.00	16.39	100	170	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Wireless(HIGH) mode

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: RX01-CC85A

TEST MODE: Wireless(HIGH) mode


Temp Humi : 22 / 37

Tested by: SIN S U

Data: 64

Level (dBuV/m)

Date: 2016-04-25

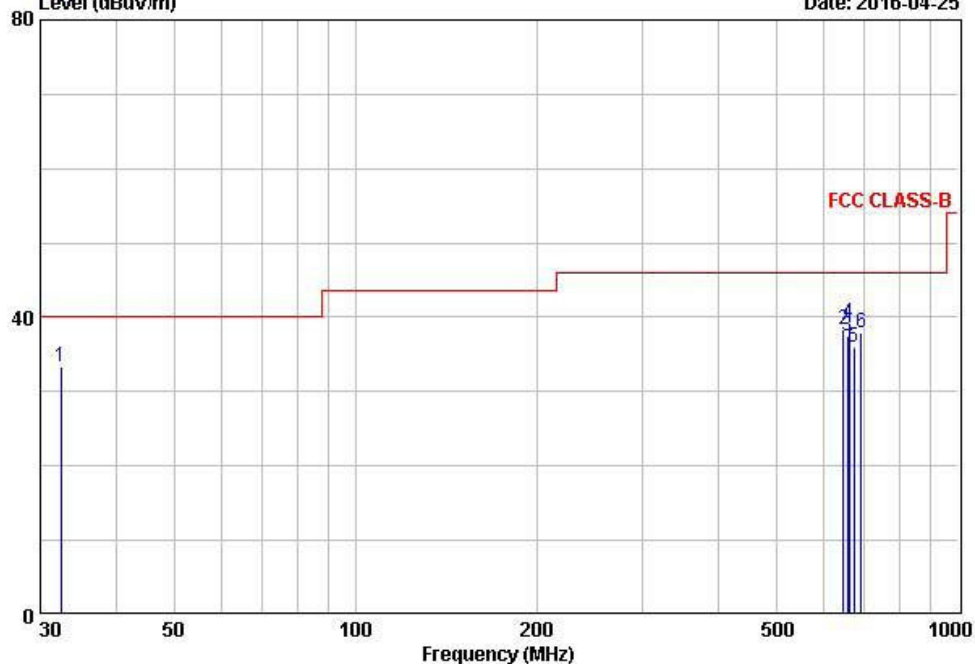

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV/m	dB/m	dBuV/m	QP	dB	cm	deg	
1	32.50	50.30	-16.96	33.34	40.00	6.66	100	167	VERTICAL
2	645.50	42.10	-3.67	38.43	46.00	7.57	400	148	HORIZONTAL
3	656.00	40.80	-3.39	37.41	46.00	8.59	400	36	HORIZONTAL
4	660.70	42.60	-3.27	39.33	46.00	6.67	400	164	HORIZONTAL
5	672.80	38.90	-2.96	35.94	46.00	10.06	397	360	HORIZONTAL
6	690.20	40.40	-2.52	37.88	46.00	8.12	300	258	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission(Above 1 GHz) – Wireless(LOW) mode

EMI Chamber of LTA CO.,LTD.
 4, Songju-ro236Beon-gil, Yangji-myeon,
 Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
 Tel :+82-31-3236008,9 www.ltalab.com
 Fax:+82-31-3236010


EUT/Model No.: RX01-CC85A

Test Mode: Wireless(LOW) mode

Tested by : SIN S U

Temp/Humi: 22 / 41

Data: 55 File: D:\LTA_e3\backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1604-1.EMI (55)
 Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

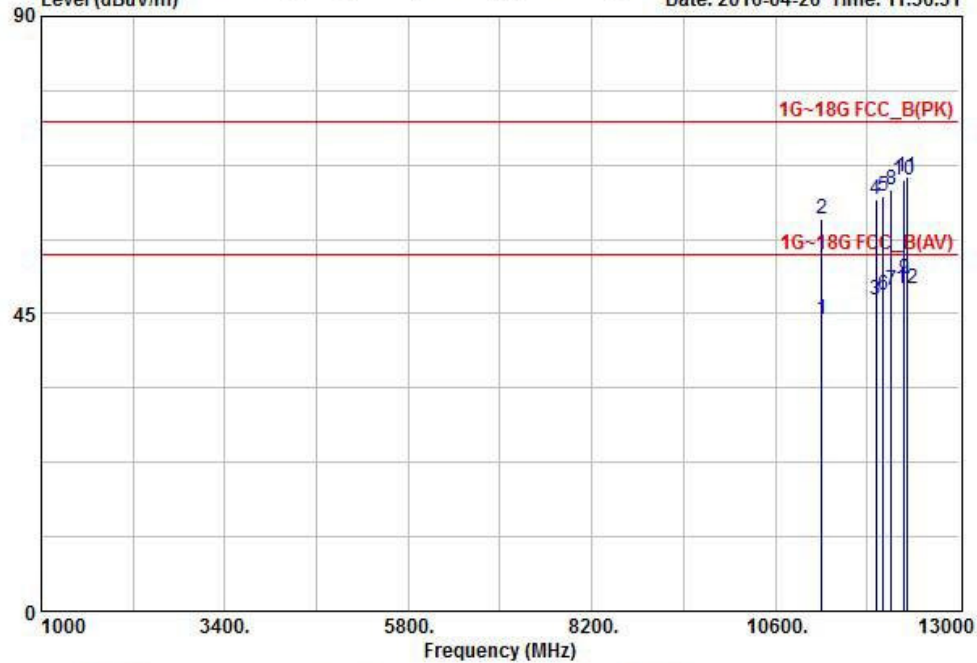

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
111204.40	10.10	34.08	44.18	54.00	9.82	VERTICAL
211204.40	25.20	34.08	59.28	74.00	14.72	VERTICAL
311910.10	10.20	36.99	47.19	54.00	6.81	HORIZONTAL
411910.10	25.20	36.99	62.19	74.00	11.81	HORIZONTAL
512008.00	25.30	37.56	62.86	74.00	11.14	VERTICAL
612008.00	10.30	37.56	47.86	54.00	6.14	VERTICAL
712117.40	10.20	38.44	48.64	54.00	5.36	HORIZONTAL
812117.40	25.30	38.44	63.74	74.00	10.26	HORIZONTAL
912285.90	10.40	39.81	50.21	54.00	3.79	HORIZONTAL
1012285.90	25.50	39.81	65.31	74.00	8.69	HORIZONTAL
1112322.50	25.50	40.10	65.60	74.00	8.40	HORIZONTAL
1212322.50	8.58	40.10	48.69	54.00	5.31	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Blue : Vertical Black : Horizontal



EMI Chamber of LTA CO., LTD.
4, Songju-ro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010


EUT/Model No.: RX01-CC85A

Test Mode: Wireless (LOW) mode

Tested by : SIN S U

Temp/Humi: 22 / 41

Data: 107 File: D:\LTA_e3\backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1604-1.EMI (109)
Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

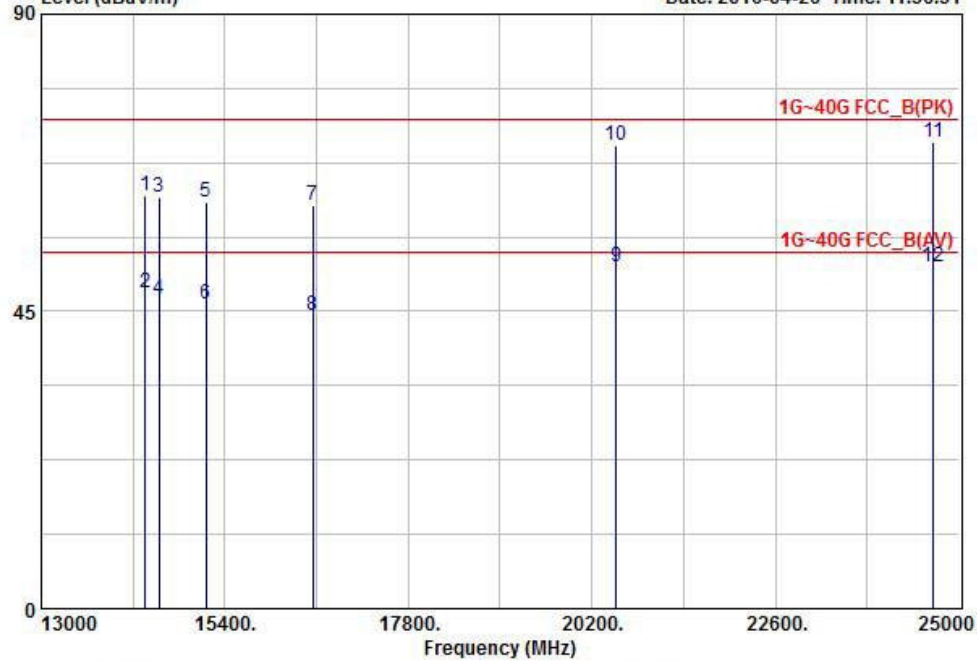

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
114358.60	19.80	42.74	62.54	74.00	11.46	HORIZONTAL
214358.60	5.00	42.74	47.74	54.00	6.26	HORIZONTAL
314543.80	20.30	42.05	62.35	74.00	11.65	HORIZONTAL
414543.80	4.90	42.05	46.95	54.00	7.05	HORIZONTAL
515154.00	20.60	40.86	61.46	74.00	12.54	HORIZONTAL
615154.00	5.20	40.86	46.06	54.00	7.94	HORIZONTAL
716546.00	20.30	40.79	61.09	74.00	12.91	HORIZONTAL
816546.00	3.60	40.79	44.39	54.00	9.61	HORIZONTAL
920516.90	0.10	51.64	51.74	54.00	2.26	VERTICAL
1020516.90	18.50	51.64	70.14	74.00	3.86	VERTICAL
1124665.40	19.70	50.86	70.56	74.00	3.44	HORIZONTAL
1224665.40	1.00	50.86	51.86	54.00	2.14	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

Wireless(MID) mode

EMI Chamber of LTA CO.,LTD.
 4, Songju-ro236Beon-gil, Yangji-myeon,
 Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
 Tel :+82-31-3236008,9 www.ltalab.com
 Fax:+82-31-3236010


EUT/Model No.: RX01-CC85A

Test Mode: Wireless(MID) mode

Tested by : SIN S U

Temp/Humi: 22 / 41

Data: 54 File: D:\LTA_e3\backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1604-1.EMI (55)
 Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

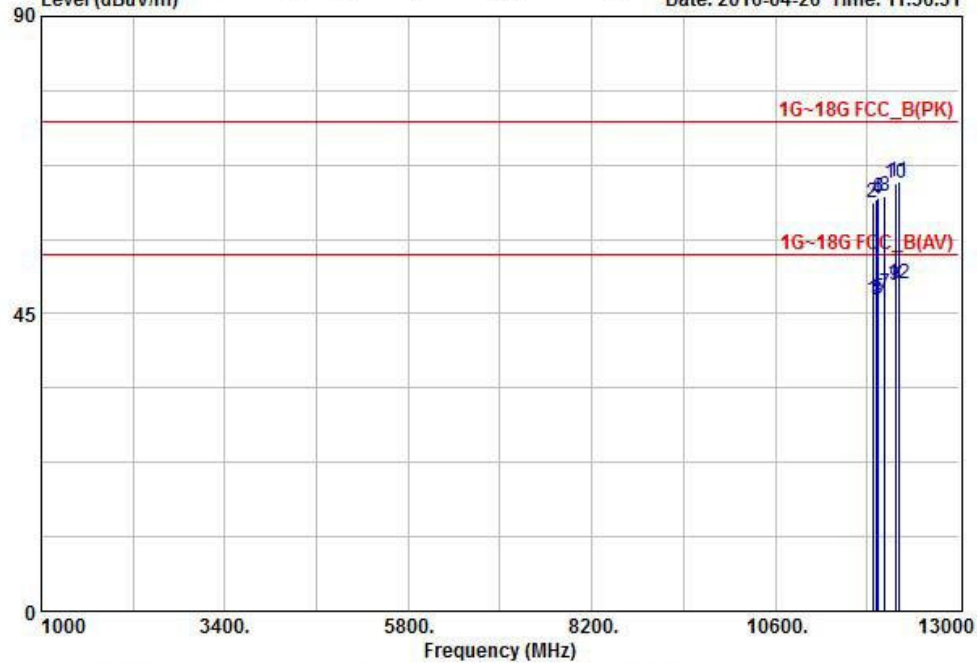

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
111871.20	10.20	36.78	46.98	54.00	7.02	HORIZONTAL
211871.20	24.90	36.78	61.68	74.00	12.32	HORIZONTAL
311923.20	10.10	37.07	47.17	54.00	6.83	VERTICAL
411923.20	25.10	37.07	62.17	74.00	11.83	VERTICAL
511948.80	10.20	37.21	47.41	54.00	6.59	VERTICAL
611948.80	25.30	37.21	62.51	74.00	11.49	VERTICAL
712032.50	10.30	37.76	48.06	54.00	5.94	HORIZONTAL
812032.50	25.10	37.76	62.86	74.00	11.14	HORIZONTAL
912166.00	10.50	38.84	49.34	54.00	4.66	HORIZONTAL
1012166.00	25.80	38.84	64.64	74.00	9.36	HORIZONTAL
1112208.20	25.70	39.18	64.88	74.00	9.12	HORIZONTAL
1212208.20	10.40	39.18	49.58	54.00	4.42	HORIZONTAL


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Blue : Vertical Black : Horizontal



EMI Chamber of LTA CO.,LTD.
4, Songju-ro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010

EUT/Model No.: RX01-CC85A
Test Mode: Wireless (MID) mode
Tested by : SIN S U
Temp/Humi: 22 / 41

Data: 108 File: D:\LTA_e3\backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1604-1.EMI (109)
Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

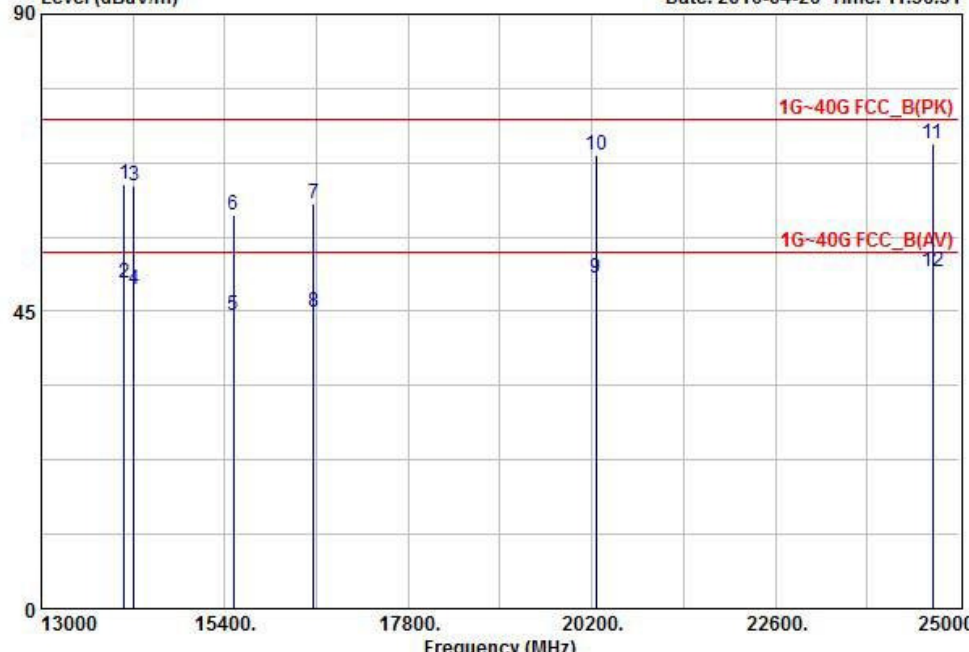

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
114084.40	20.20	44.01	64.21	74.00	9.79	HORIZONTAL
214084.40	5.30	44.01	49.31	54.00	4.69	HORIZONTAL
314213.70	20.50	43.41	63.91	74.00	10.09	HORIZONTAL
414213.70	4.80	43.41	48.21	54.00	5.79	HORIZONTAL
515513.90	5.40	39.09	44.49	54.00	9.51	HORIZONTAL
615513.90	20.40	39.09	59.49	74.00	14.51	HORIZONTAL
716558.00	20.40	40.84	61.24	74.00	12.76	HORIZONTAL
816558.00	4.10	40.84	44.94	54.00	9.06	HORIZONTAL
920254.30	0.12	49.89	50.01	54.00	3.99	VERTICAL
1020254.30	18.70	49.89	68.59	74.00	5.41	VERTICAL
1124660.40	19.50	50.86	70.36	74.00	3.64	HORIZONTAL
1224660.40	0.20	50.86	51.06	54.00	2.94	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

Wireless(HIGH) mode

EMI Chamber of LTA CO., LTD.
 4, Songju-ro236Beon-gil, Yangji-myeon,
 Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
 Tel :+82-31-3236008,9 www.ltalab.com
 Fax:+82-31-3236010


EUT/Model No.: RX01-CC85A

Test Mode: Wireless(HIGH) mode

Tested by : SIN S U

Temp/Humi: 22 / 41

Data: 53 File: D:\LTA_e3\backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1604-1.EMI (53)
 Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

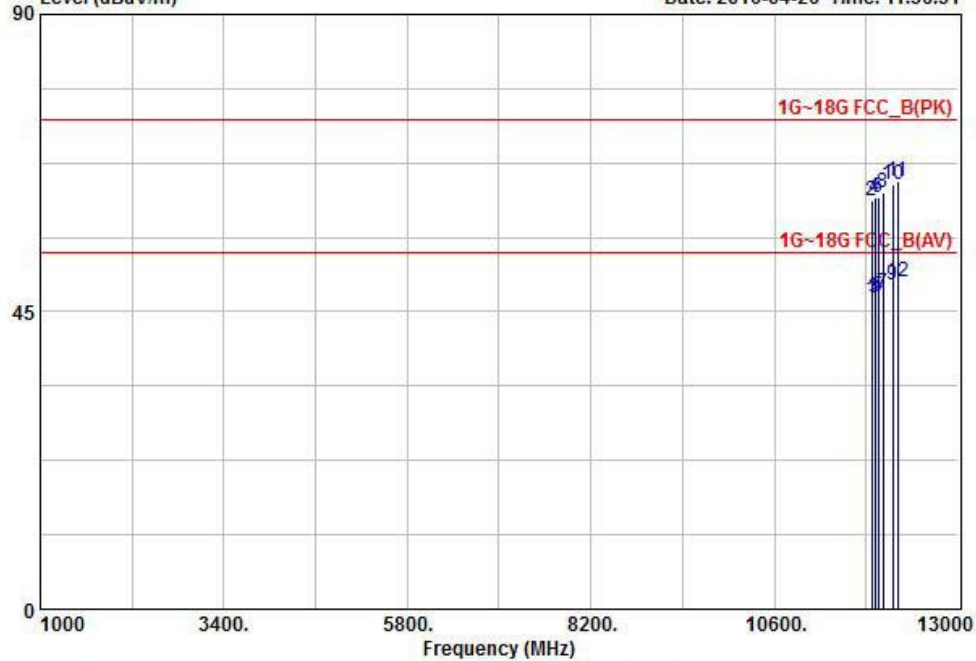

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
111873.50	10.10	36.79	46.89	54.00	7.11	HORIZONTAL
211873.50	25.00	36.79	61.79	74.00	12.21	HORIZONTAL
311911.70	10.10	37.00	47.10	54.00	6.90	VERTICAL
411911.70	25.20	37.00	62.20	74.00	11.80	VERTICAL
511952.80	10.20	37.23	47.43	54.00	6.57	VERTICAL
611952.80	25.10	37.23	62.33	74.00	11.67	VERTICAL
712026.00	10.10	37.70	47.80	54.00	6.20	HORIZONTAL
812026.00	25.20	37.70	62.90	74.00	11.10	HORIZONTAL
912152.50	10.40	38.73	49.13	54.00	4.87	HORIZONTAL
1012152.50	25.60	38.73	64.33	74.00	9.67	HORIZONTAL
1112215.00	25.50	39.23	64.73	74.00	9.27	HORIZONTAL
1212215.00	10.30	39.23	49.53	54.00	4.47	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Blue : Vertical Black : Horizontal



EMI Chamber of LTA CO., LTD.
4, Songju-ro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010


EUT/Model No.: RX01-CC85A

Test Mode: Wireless (HIGH) mode

Tested by : SIN S U

Temp/Humi: 22 / 41

Data: 109 File: D:\LTA_e3\backup\1GHz 이상\2016\CH1_ABOVE 1GHz_1604-1.EMI (109)
Level (dBuV/m) Date: 2016-04-26 Time: 11:36:31

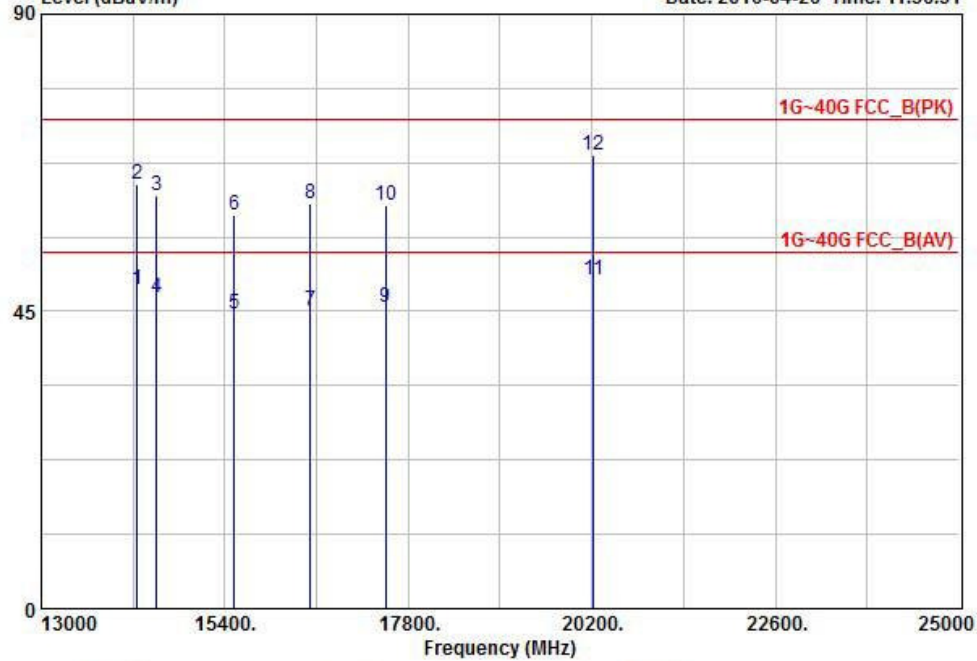

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
114254.00	5.20	43.23	48.43	54.00	5.57	HORIZONTAL
214254.00	21.00	43.23	64.23	74.00	9.77	HORIZONTAL
314513.00	20.40	42.08	62.48	74.00	11.52	HORIZONTAL
414513.00	5.10	42.08	47.18	54.00	6.82	HORIZONTAL
515521.30	5.50	39.11	44.61	54.00	9.39	HORIZONTAL
615521.30	20.60	39.11	59.71	74.00	14.29	HORIZONTAL
716521.80	4.40	40.68	45.08	54.00	8.92	HORIZONTAL
816521.80	20.60	40.68	61.28	74.00	12.72	HORIZONTAL
917503.50	1.48	44.12	45.60	54.00	8.40	HORIZONTAL
1017503.50	16.98	44.12	61.10	74.00	12.90	HORIZONTAL
1120221.80	0.20	49.65	49.85	54.00	4.15	VERTICAL
1220221.80	18.90	49.65	68.55	74.00	5.45	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

3.3.9 AC Conducted Emissions

Procedure:

AC power line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4:2014.

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: **Complies**

- Refer to the next page.
- No other emissions were detected at a level greater than 20 dB below limit
- It gave the worse case emissions

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Note: The limits will decrease with the frequency logarithmically within 0.15 MHz to 0.5 MHz

Conducted Emissions - Wireless(LOW) mode + LINE


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A Phase : LINE
Test Mode : Wireless(LOW) mode Test Power : 120 / 60
Temp. / Humi. : 19 / 40 Test Engineer : SIN S U

Data: 1565

File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_04.EM6 (1565)

Date: 2016-04-23

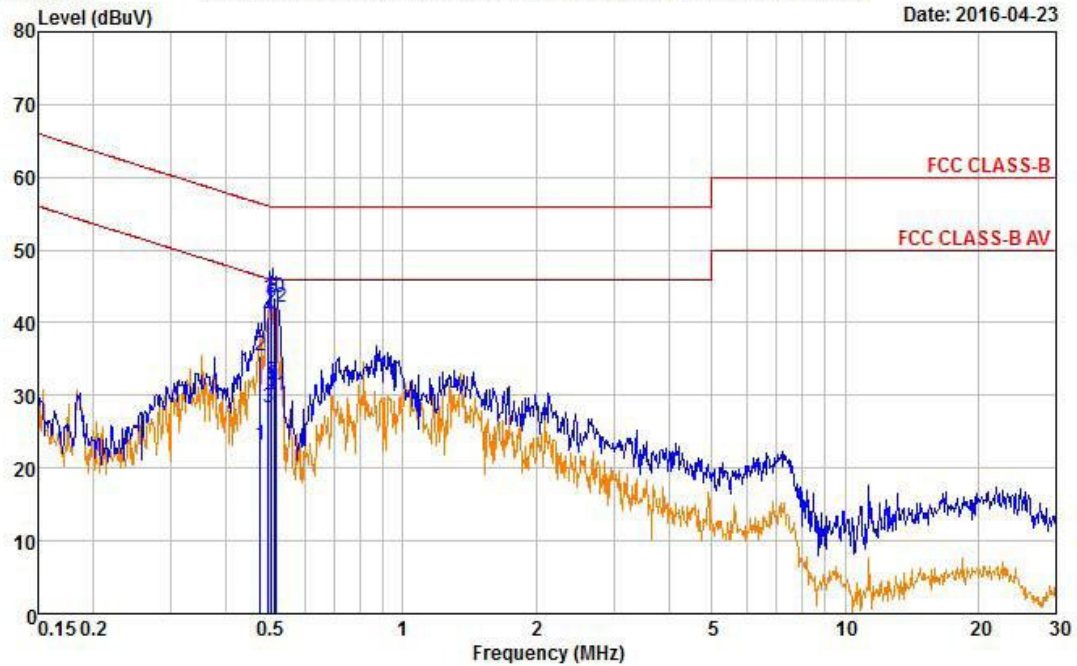

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.476	25.30	13.10	10.09	35.39	23.19	56.41	46.41	21.02	23.22
0.497	30.66	18.33	10.08	40.74	28.41	56.05	46.05	15.31	17.64
0.505	32.80	20.42	10.09	42.89	30.51	56.00	46.00	13.11	15.49
0.512	33.42	21.77	10.09	43.51	31.86	56.00	46.00	12.49	14.14
0.513	33.30	21.30	10.10	43.40	31.40	56.00	46.00	12.60	14.60
0.519	31.95	19.88	10.10	42.05	29.98	56.00	46.00	13.95	16.02

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter


Wireless(MID) mode + LINE



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A	Phase : LINE
Test Mode : Wireless(MID) mode	Test Power : 120 / 60
Temp. / Humi. : 19 / 40	Test Engineer : SIN S U

Data: 1553 File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_04.EM6 (1553) Date: 2016-04-23

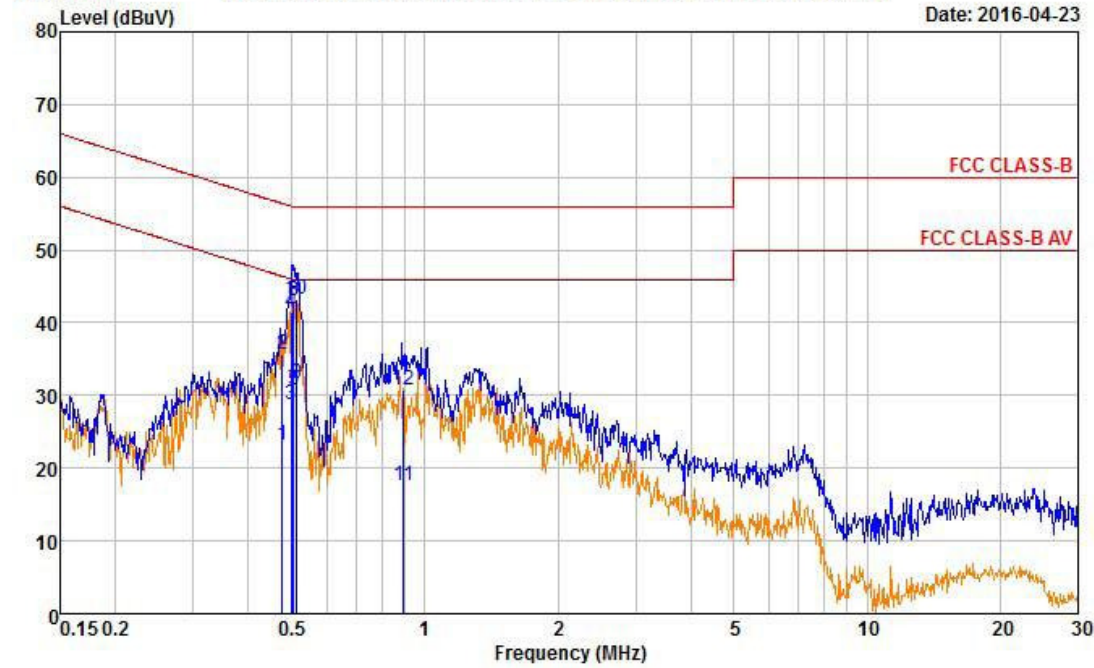

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.476	25.47	13.02	10.09	35.56	23.11	56.41	46.41	20.85	23.30
0.499	31.42	18.73	10.08	41.50	28.81	56.02	46.02	14.52	17.21
0.507	33.03	20.63	10.09	43.12	30.72	56.00	46.00	12.88	15.28
0.507	32.99	20.75	10.09	43.08	30.84	56.00	46.00	12.92	15.16
0.514	33.23	21.63	10.10	43.33	31.73	56.00	46.00	12.67	14.27
0.897	20.49	7.34	10.36	30.85	17.70	56.00	46.00	25.15	28.30

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Wireless(HIGH) mode + LINE


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A Phase : LINE
Test Mode : Wireless(HIGH) mode Test Power : 120 / 60
Temp. / Humi. : 19 / 40 Test Engineer : SIN S U

Data: 1549

File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_04.EM6 (1549)

Date: 2016-04-23

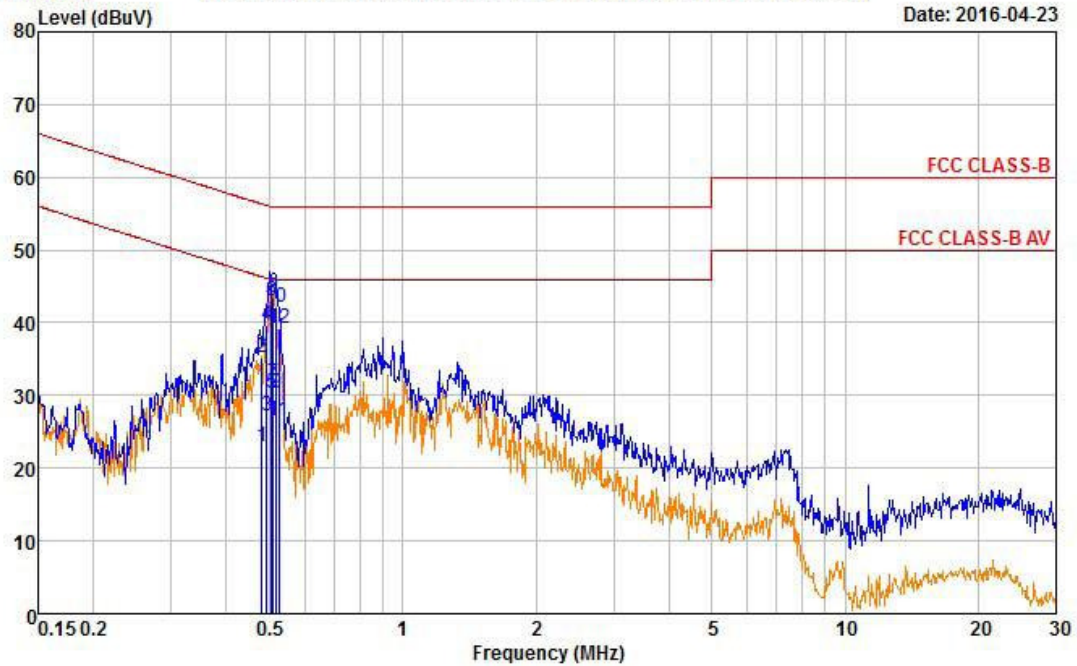

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.480	25.16	12.96	10.08	35.24	23.04	56.34	46.34	21.10	23.30
0.494	29.59	17.09	10.08	39.67	27.17	56.10	46.10	16.43	18.93
0.506	32.94	20.33	10.09	43.03	30.42	56.00	46.00	12.97	15.58
0.510	33.33	21.56	10.09	43.42	31.65	56.00	46.00	12.58	14.35
0.519	32.01	20.24	10.10	42.11	30.34	56.00	46.00	13.89	15.66
0.525	29.18	16.49	10.11	39.29	26.60	56.00	46.00	16.71	19.40

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter


Conducted Emissions – Wireless(LOW) mode + NEUTRAL



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A	Phase : NEUTRAL
Test Mode : Wireless(LOW) mode	Test Power : 120 / 60
Temp. / Humi. : 19 / 40	Test Engineer : SIN S U

Data: 1561 File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_04.EM6 (1561) Date: 2016-04-23

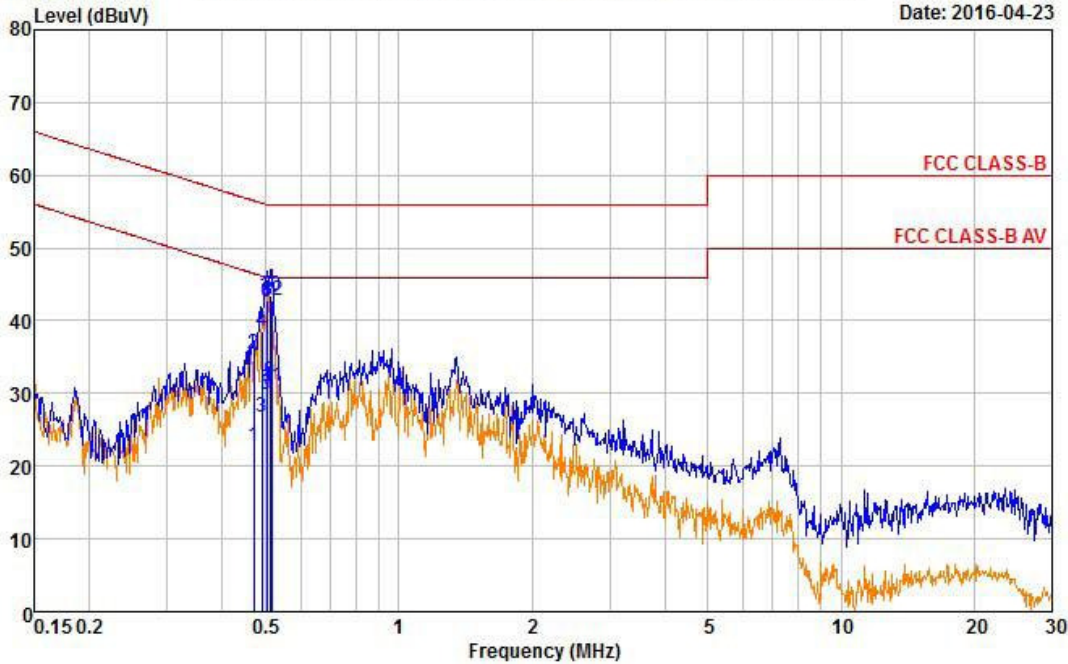

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.471	25.41	12.62	10.01	35.42	22.63	56.49	46.49	21.07	23.86
0.491	28.54	16.65	10.00	38.54	26.65	56.15	46.15	17.61	19.50
0.504	32.62	19.83	10.00	42.62	29.83	56.00	46.00	13.38	16.17
0.506	32.69	20.55	10.01	42.70	30.56	56.00	46.00	13.30	15.44
0.512	33.38	21.59	10.01	43.39	31.60	56.00	46.00	12.61	14.40
0.517	32.67	20.90	10.02	42.69	30.92	56.00	46.00	13.31	15.08

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Wireless(MID) mode + NEUTRAL


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A	Phase : NEUTRAL
Test Mode : Wireless(MID) mode	Test Power : 120 / 60
Temp. / Humi. : 19 / 40	Test Engineer : SIN S U

Data: 1557

File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_04.EM6 (1557)

Date: 2016-04-23

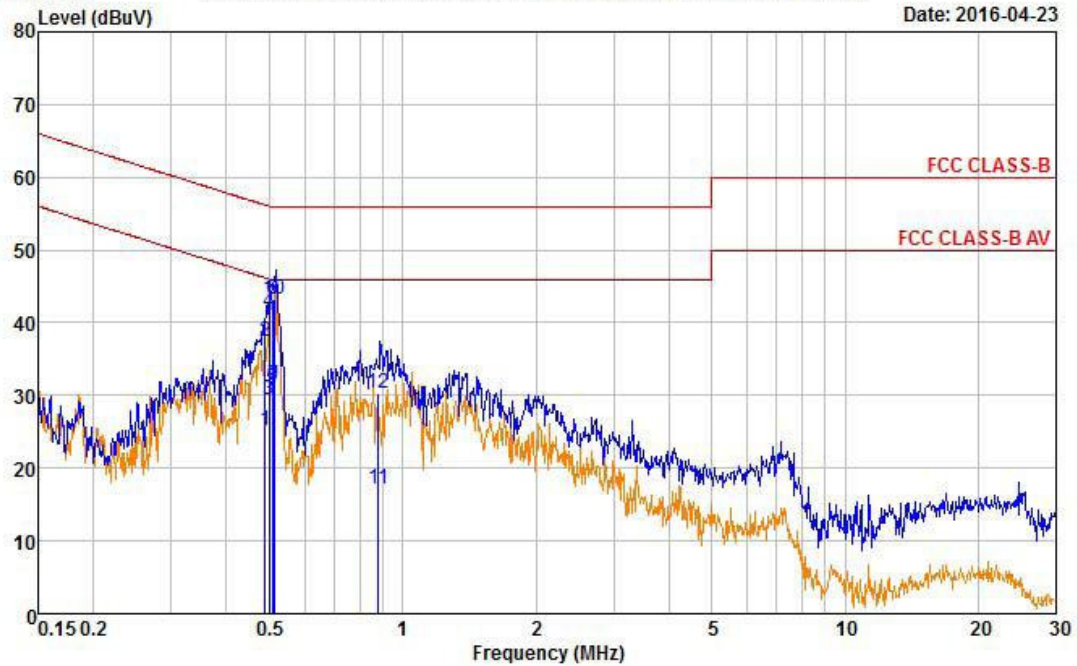

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.488	27.45	15.25	10.00	37.45	25.25	56.19	46.19	18.74	20.94
0.499	31.35	19.34	10.00	41.35	29.34	56.02	46.02	14.67	16.68
0.507	33.14	21.02	10.01	43.15	31.03	56.00	46.00	12.85	14.97
0.511	33.20	21.41	10.01	43.21	31.42	56.00	46.00	12.79	14.58
0.512	33.23	21.43	10.01	43.24	31.44	56.00	46.00	12.76	14.56
0.882	20.14	6.85	10.27	30.41	17.12	56.00	46.00	25.59	28.88

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Wireless(HIGH) mode + NEUTRAL


4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : RX01-CC85A	Phase : NEUTRAL
Test Mode : Wireless(HIGH) mode	Test Power : 120 / 60
Temp. / Humi. : 19 / 40	Test Engineer : SIN S U

Data: 1545

File: D:\Conducted Data\2015\2016\LTA_Conduction_2016_04.EM6 (1545)

Date: 2016-04-23

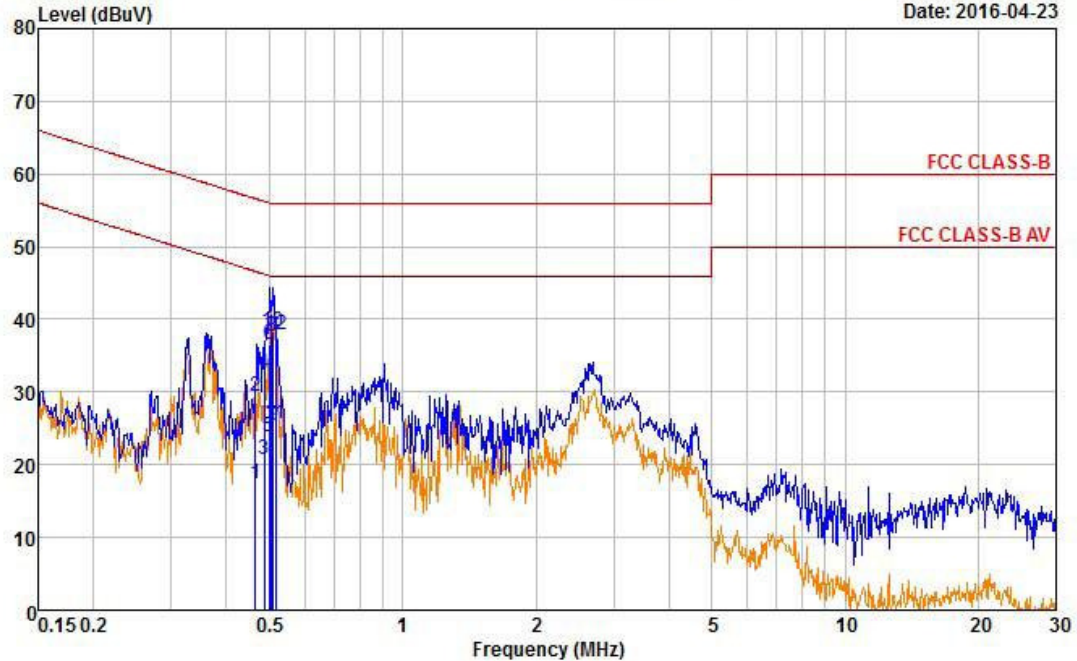

Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
0.466	19.36	7.43	10.01	29.37	17.44	56.59	46.59	27.22	29.15
0.487	22.53	10.71	10.00	32.53	20.71	56.21	46.21	23.68	25.50
0.498	26.51	13.91	10.00	36.51	23.91	56.03	46.03	19.52	22.12
0.506	27.75	15.40	10.01	37.76	25.41	56.00	46.00	18.24	20.59
0.509	28.29	15.41	10.01	38.30	25.42	56.00	46.00	17.70	20.58
0.516	27.93	15.53	10.02	37.95	25.55	56.00	46.00	18.05	20.45

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2016-03-22
2	Signal Generator (~ 3.2 GHz)	8648C	3623A02597	HP	1 year	2016-03-21
3	SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2016-03-21
4	Attenuator (3 dB)	8491A	37822	HP	1 year	2015-09-14
5	Attenuator (10 dB)	8491A	63196	HP	1 year	2015-09-14
6	Test Receiver (~ 30 MHz)	ESHS10	828404/009	R&S	1 year	2016-03-21
7	EMI Test Receiver (~ 7 GHz)	ESCI7	100722	R&S	1 year	2015-09-15
8	RF Amplifier (~ 1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2015-09-14
9	RF Amplifier (1 ~ 26.5 GHz)	8449B	3008A02126	HP	1 year	2016-03-22
10	Horn Antenna (1 ~ 18 GHz)	3115	00114105	ETS	1 year	2016-04-21
11	DRG Horn (Small)	3116B	81109	ETS-Lindgren	1 year	2016-02-26
12	DRG Horn (Small)	3116B	133350	ETS-Lindgren	1 year	2016-02-26
13	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2015-04-21
14	Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2015-05-04
15	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
16	Power Divider	11636A	06243	HP	1 year	2015-09-14
17	DC Power Supply	6674A	3637A01657	Agilent	-	-
18	Frequency Counter	5342A	2826A12411	HP	1 year	2016-03-21
19	Power Meter	EPM-441A	GB32481702	HP	1 year	2016-03-22
20	Power Sensor	8481A	3318A94972	HP	1 year	2016-01-05
21	Audio Analyzer	8903B	3729A18901	HP	1 year	2015-09-14
22	Modulation Analyzer	8901B	3749A05878	HP	1 year	2015-09-15
23	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2015-09-14
24	Stop Watch	HS-3	812Q08R	CASIO	2 year	2016-03-22
25	LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2015-09-14
26	Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2016-03-21
27	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2016-03-21
28	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2016-03-21
29	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2016-03-21
30	Active Loop Antenna	FMZB1519	1519-031	SCHWARZBECK	2 year	2016-01-12
31	OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2016-03-22
32	Signal Generator(100 kHz ~ 40 GHz)	SMB100A	177621	R&S	1 year	2016-03-22
33	Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2016-03-22