

# CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telefon: +49 (0)681 598-9100

Telefax: -9075

---

RSC11

issue test report consist of 64 Pages

Page 1 (64)

---

## **Accredited Testing Laboratory**

**DAR-Registration number:  
TTI-P-G 166/98-00**

**Test report no.: 2-2329-A/00  
FCC Part 15.247  
1130101-BV**

## Table of Contents

### **1 General information**

#### **1.1 Notes**

#### **1.2 Testing laboratory**

#### **1.3 Details of applicant**

#### **1.4 Application details**

#### **1.5 Test item**

#### **1.6 Test standards**

### **2 Technical test**

#### **2.1 Summary of test results**

#### **2.2 Test report**

### **1 General information**

#### **1.1 Notes**

**The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.**

#### **1.2 Testing laboratory**

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone: + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom.de

**Accredited testing laboratory**

**DAR-registration number : TTI-P-G 166/98-00**

# CETECOM ICT Services GmbH

---

Test report nr.:2-2329-A/00

Issue date:28.11.2000

Page 3 (64)

---

## 1.3 Details of applicant

**Name** : Ericsson Mobile Communications AB  
**Street** : Nya Vattentorget  
**City** : S-22183 Lund  
**Country** : Sweden  
**Telephone** : +46-46-19 3000  
**Telefax** : +46-46-19 3295  
**Contact** : Mr. Bo Johansson  
**Telephone** : +46-46-19 3000

## 1.4 Application details

Date of receipt of application : 14.11.00  
Date of receipt of test item : 17.11.00  
Date of test : 17.-22.11.00

## 1.5 Test item

Type of equipment : **GSM 900/1800/1900 Mobile Phone with integrated Bluetooth Module**  
Type designation : **1130101-BV**  
Manufacturer : applicant  
Street :  
City :  
Country :  
Serial number :  
**Additional informations:**  
Frequency : 2400 – 2483.5 MHz  
Type of modulation : 1M00FXD / 79M8FXD (FHSS)  
Number of channels : 79  
Antenna : integral antenna  
Power supply : 3.6 VDC powered by the mobile accu  
Output power : 0,455mW EIRP  
Type of equipment : Temperature range : -20°C - +55°C

**1.6 Test standards:** **FCC Part 15 §15.247**

# CETECOM ICT Services GmbH

---

Test report nr.:2-2329-A/00

Issue date:28.11.2000

Page 4 (64)

---

## 2 Technical test

### 2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

Technical responsibility for area of testing :

29.11.00 RSC 8411 Berg M.




---

Date	Section	Name	Signature
------	---------	------	-----------

Technical responsibility for area of testing :

29.11.00 RSC8412 Hausknecht



---

Date	Section	Name	Signature
------	---------	------	-----------

## 2.2 Testreport

**TEST REPORT**

**Testreport no. : 2-2329-A/00**

## TEST REPORT REFERENCE

## LIST OF MEASUREMENTS

<b>Paragraph</b>	<b>PARAMETER TO BE MEASURED</b>	<b>PAGE</b>
	<b>Transmitter parameters</b>	
§ 15.204	Antenna gain	7
§ 15.247 (a)	Carrier frequency separation	8
§ 15.247 (a)	Number of hopping channels	9
§ 15.247 (a)	Time of occupancy (dwell time)	13
§ 15.247 (a)(1)	Spectrum Bandwith of a FHSS System	16
§ 15.247 (b)(2)	Maximum peak output power	20
§15.247	Band edge compliance	25
§ 15.247 (c)(1)	Emission limitations	29
§ 15.107/207	low frequency emissions	48
	<b>Receiver parameters</b>	
§ 15.209	Spurious radiations - Radiated	49
	<b>Test equipment listing</b>	<b>54</b>
	<b>Photographs of the equipment</b>	<b>56</b>

# CETECOM ICT Services GmbH

---

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 7 (64)

---

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

**Antenna Gain**

**SUBCLAUSE § 15.204**

**The gain is -5.65 dBi**

**(measured effective radiated power – measured conducted power with a temporary RF-connector)**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
**(for reference numbers see test equipment listing)**

-

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 8 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C


Relative humidity : 31%

Carrier frequency separation

§15.247(a)



Ref Lvl	Marker 3 [T1]	RBW	30 kHz	RF Att	40 dB
14 dBm	-0.44 dBm	VBW	100 kHz		
	2.44201303 GHz	SWT	8.5 ms	Unit	dBm

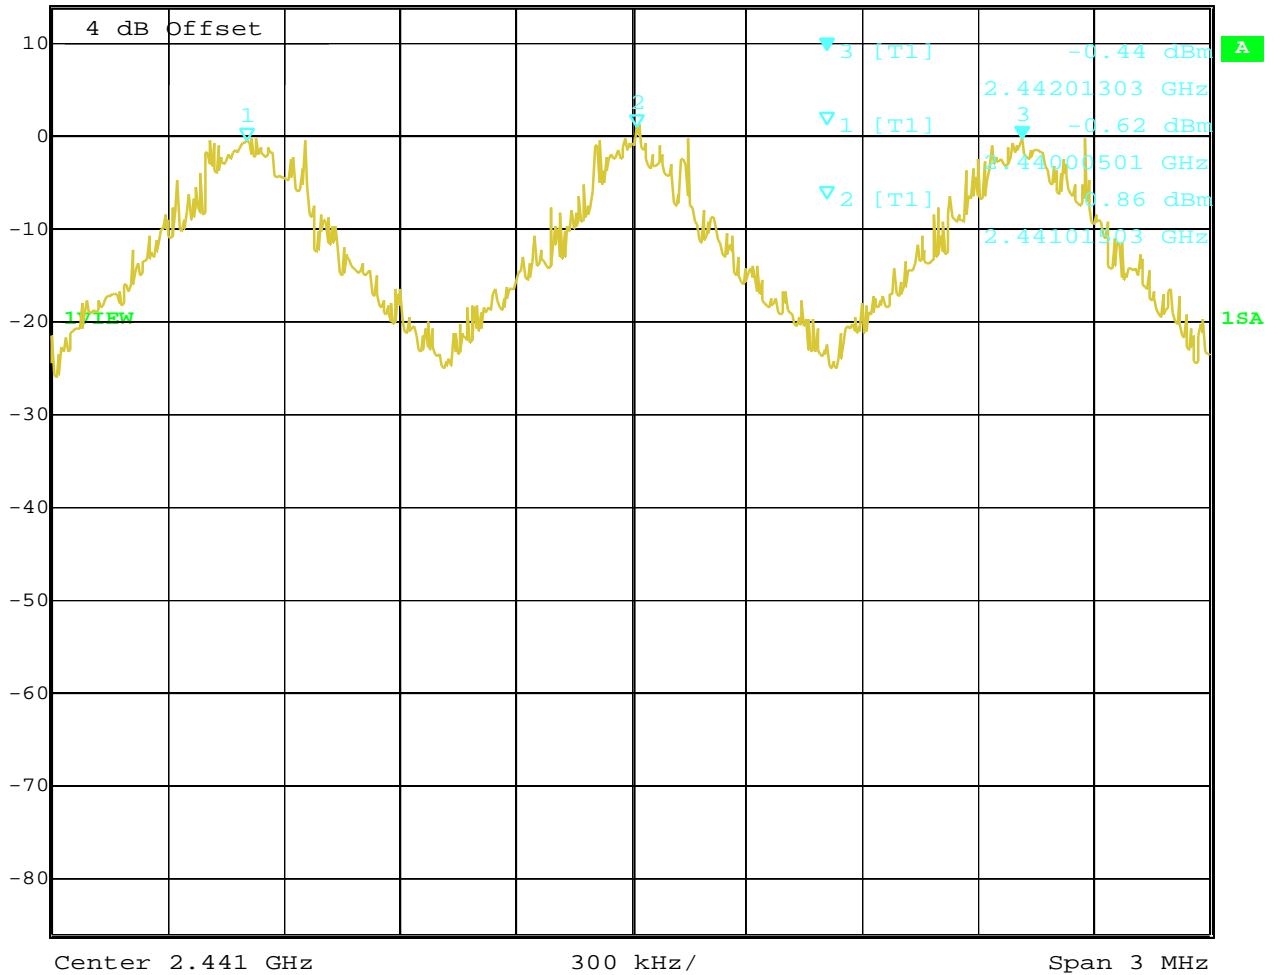

Date: 17.NOV.2000 08:14:14

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)



# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 9 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

Number of hopping channels


§15.247(a)

The number of hopping channels is 79.

The next 4 plots shows the number.

The right red line corresponds to the left red line from the next plot.

## Plot 1:

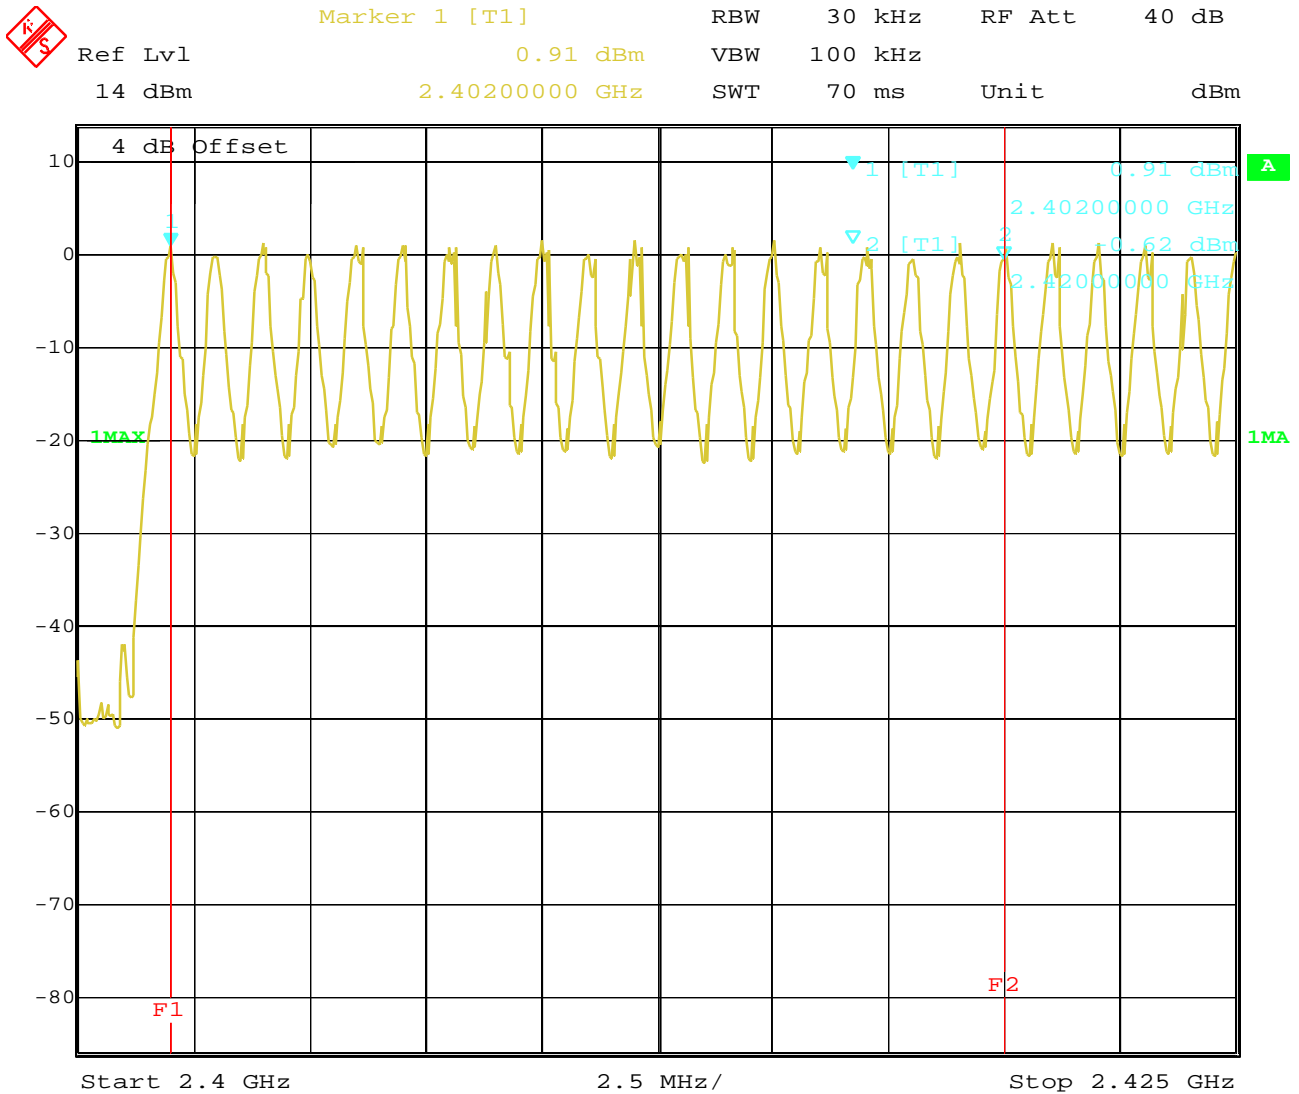

Date: 17.NOV.2000 08:20:44

4 dB Offset : Cable loss

## REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000


Page 10 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

## Plot 2:

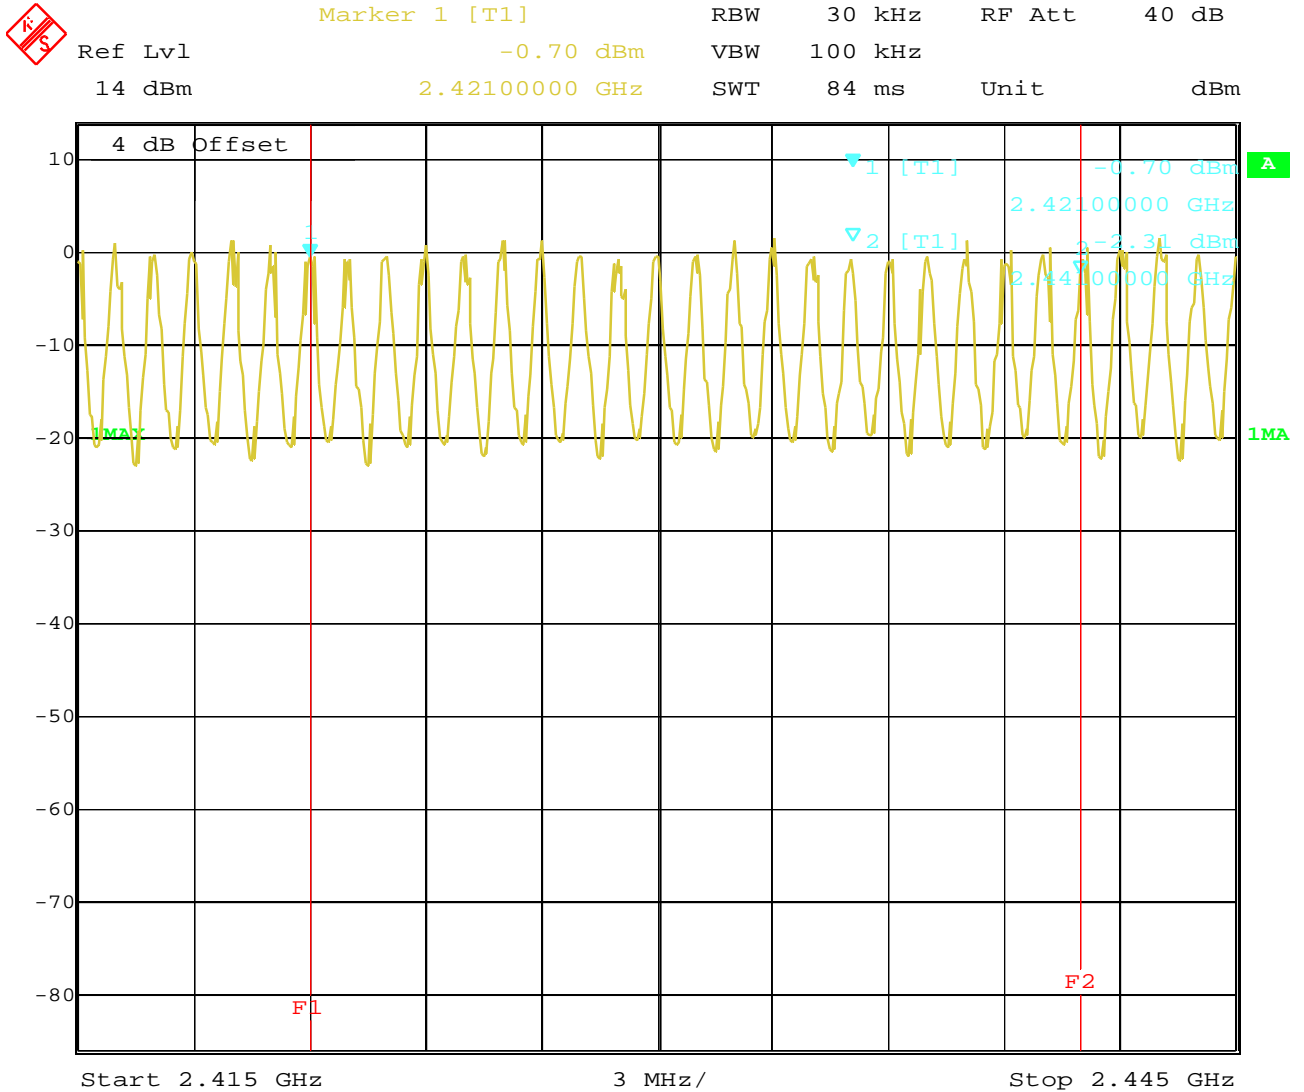

Date: 17.NOV.2000 08:23:56

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000


Page 11 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

## Plot 3:

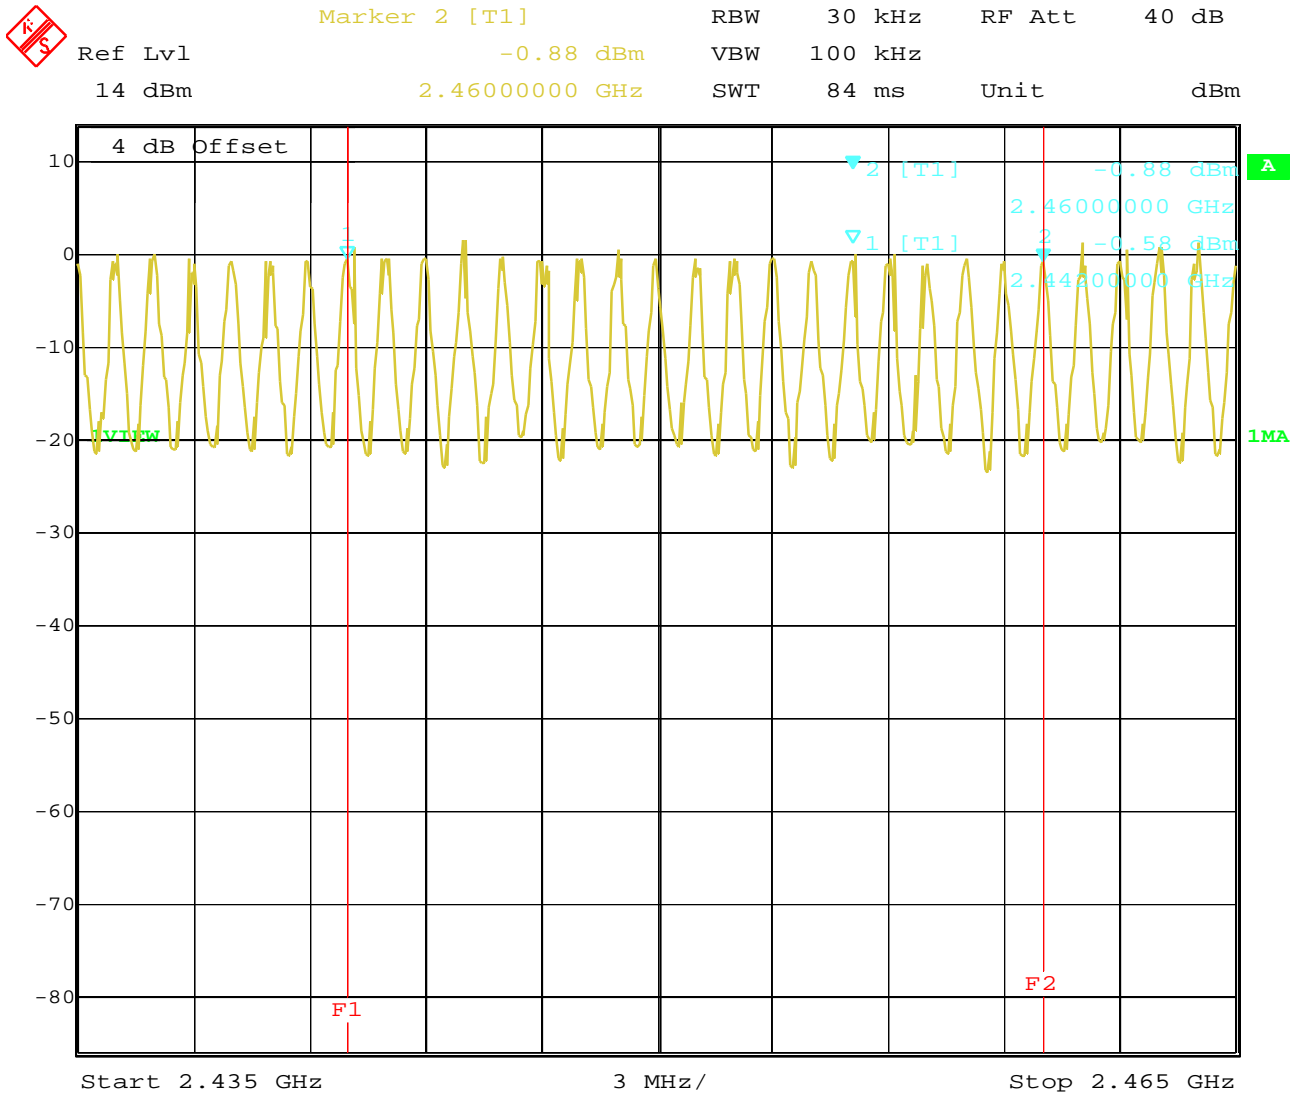

Date: 17.NOV.2000 08:26:12

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000


Page 12 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

## Plot 4:

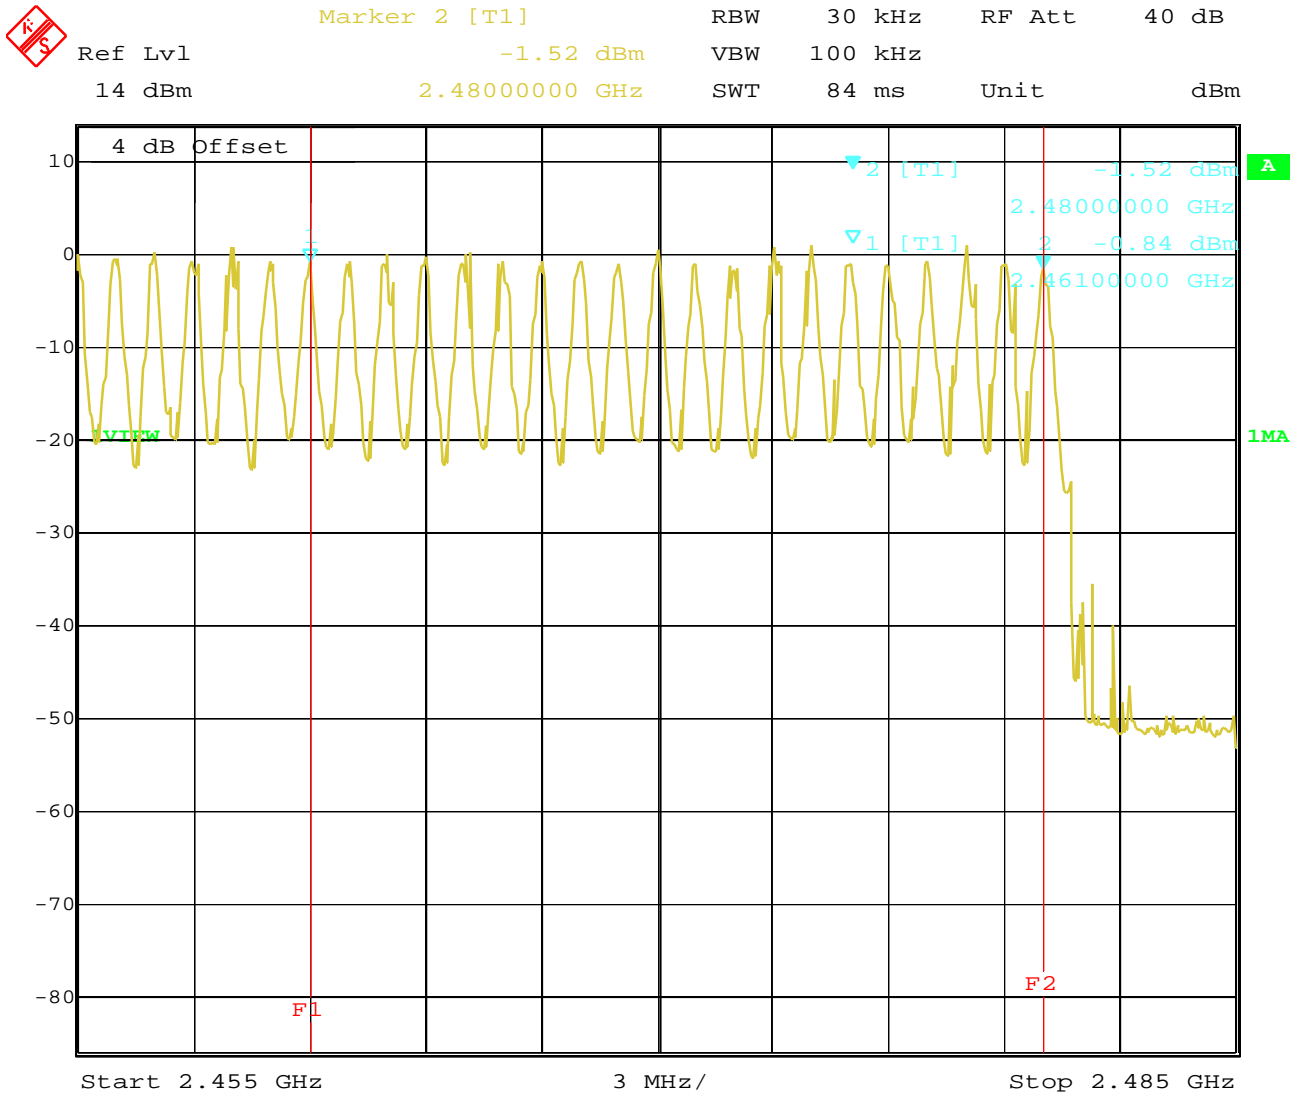

Date: 17.NOV.2000 08:30:20

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 13 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


**Time of occupancy (dwell time) for DH1**

**§15.247(a)**

The system makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So you have each channel 10.13 times per second and so for 30 seconds you have 303.9 times of appearance .

Each tx-time per appearance is 475 µs.

**So we have 303.9 \* 475 µs = 144.4 ms per 30 seconds.**

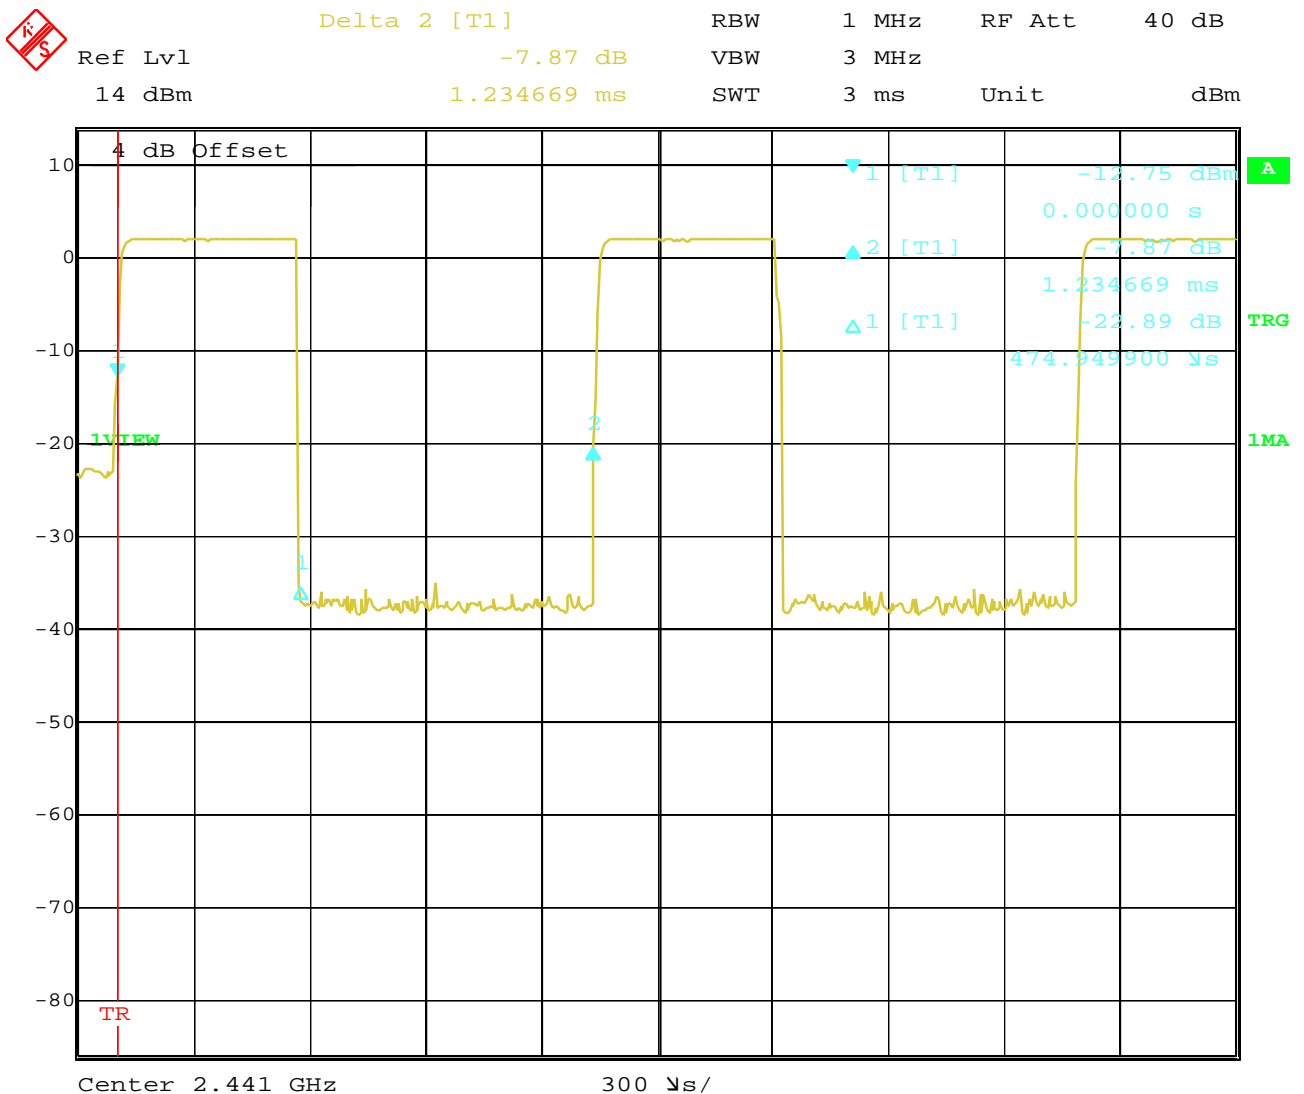

Date: 17.NOV.2000 09:04:31

4 dB Offset : Cable loss

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 14 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


Time of occupancy (dwell time) for DH3

§15.247(a)

A DH3 Packets need 3 time slots for transmit and 1 for receiving, then the system makes worst case 400 hops per second with 79 channels. So you have each channel 5.1 times per second and so for 30 seconds you have 153 times of appearance .

Each tx-time per appearance is 1.73 ms.

So we have  $153 * 1.73 \text{ ms} = 264.7 \text{ ms}$  per 30 seconds.

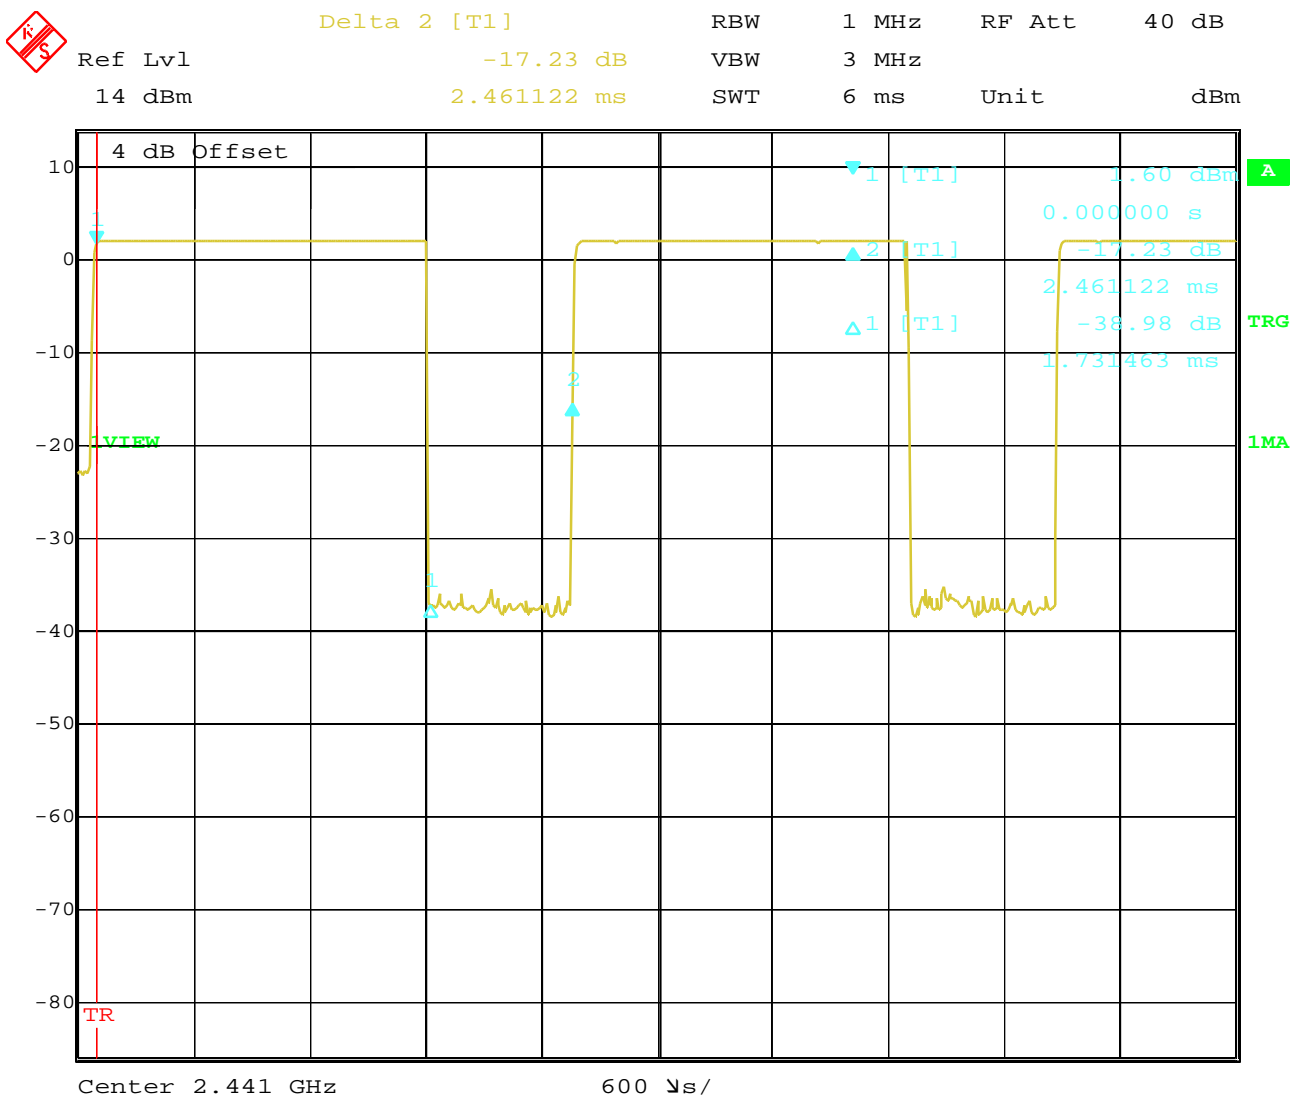

Date: 17.NOV.2000 09:02:00

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 15 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


Time of occupancy (dwell time) for DH5

§15.247(a)

At DH5 Packets you need 5 time slots for transmit and 1 for receiving, then the system makes worst case 266,7 hops per second with 79 channels. So you have each channel 3.36 times per second and so for 30 seconds you have 100,8 times of appearance .

Each tx-time per appearance is 3.7 ms.

So we have  $100,8 * 3.7\text{ms} = 372.96\text{ ms}$  per 30 seconds.

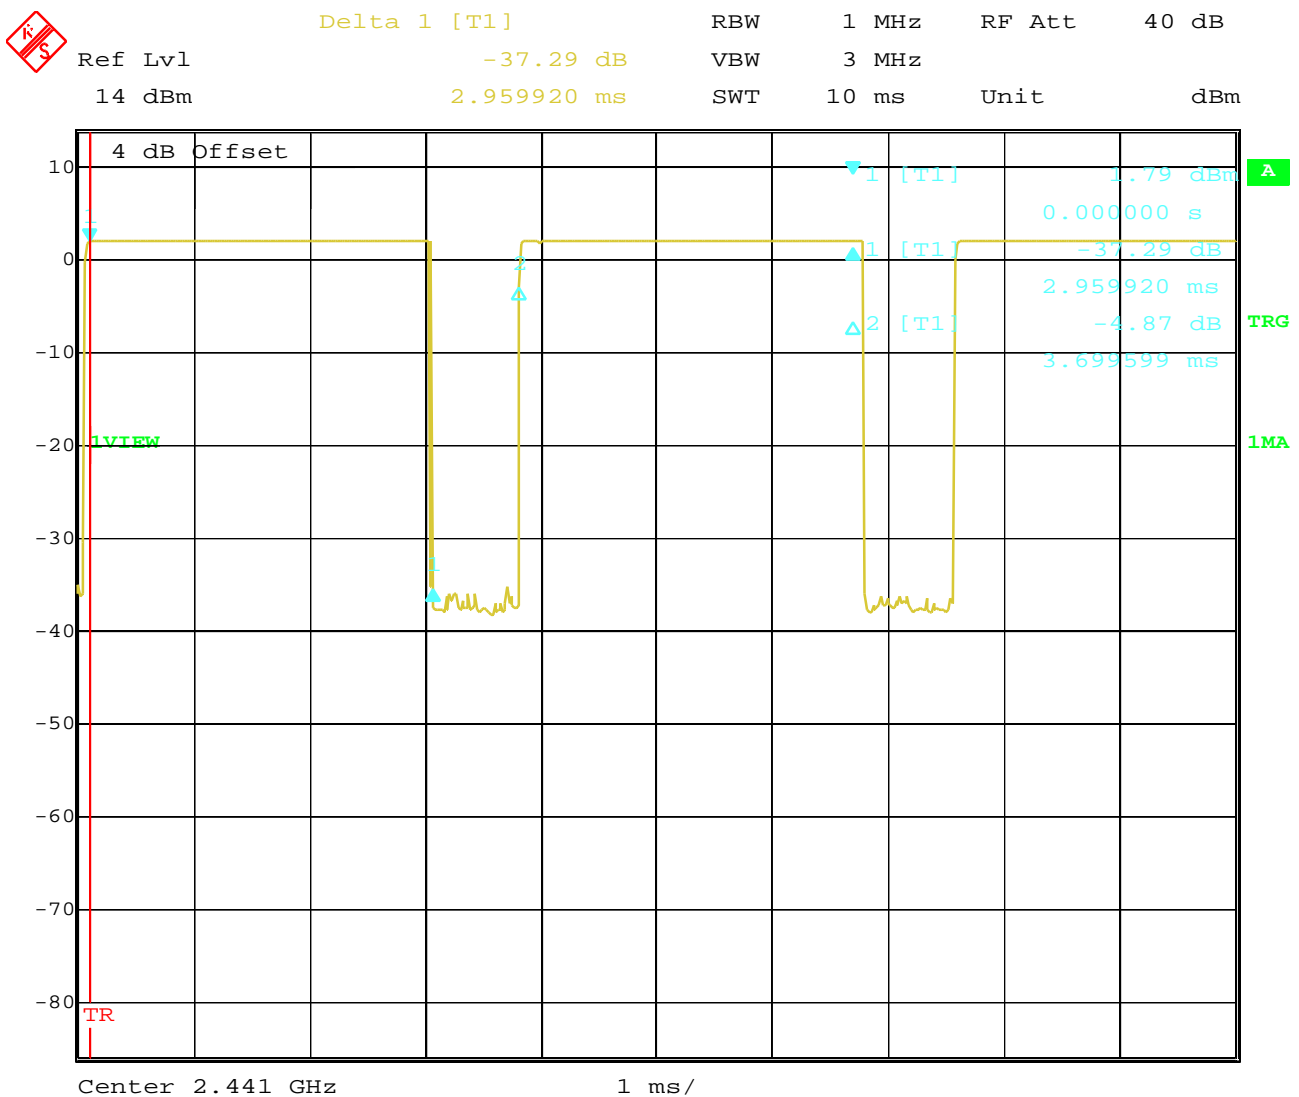

Date: 17.NOV.2000 09:13:47

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 16 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

Spectrum Bandwith of a FHSS System  
20 dB bandwidth

§15.247(a)

TEST CONDITIONS		20 dB BANDWIDTH ( kHz )		
Frequency (MHz)		2402	2442	2481
$T_{nom}( 23 )^{\circ}C$	$V_{nom}( 3.6 )V$	769.5	757.5	895.8
Measurement uncertainty		±3dB		

RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)

LIMIT

SUBCLAUSE §15.247(a) (1)

The maximum 20dB bandwith shall be at maximum 1000 KHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)



# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 17 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


Spectrum Bandwidth of a FHSS System  
20 dB bandwidth

§15.247(a)

## Channel 1



Delta 1 [T1]	RBW	10 kHz	RF Att	20 dB
Ref Lvl	0.19 dB	VBW	30 kHz	
-0.8 dBm	769.53907816 kHz	SWT	76 ms	Unit dBm

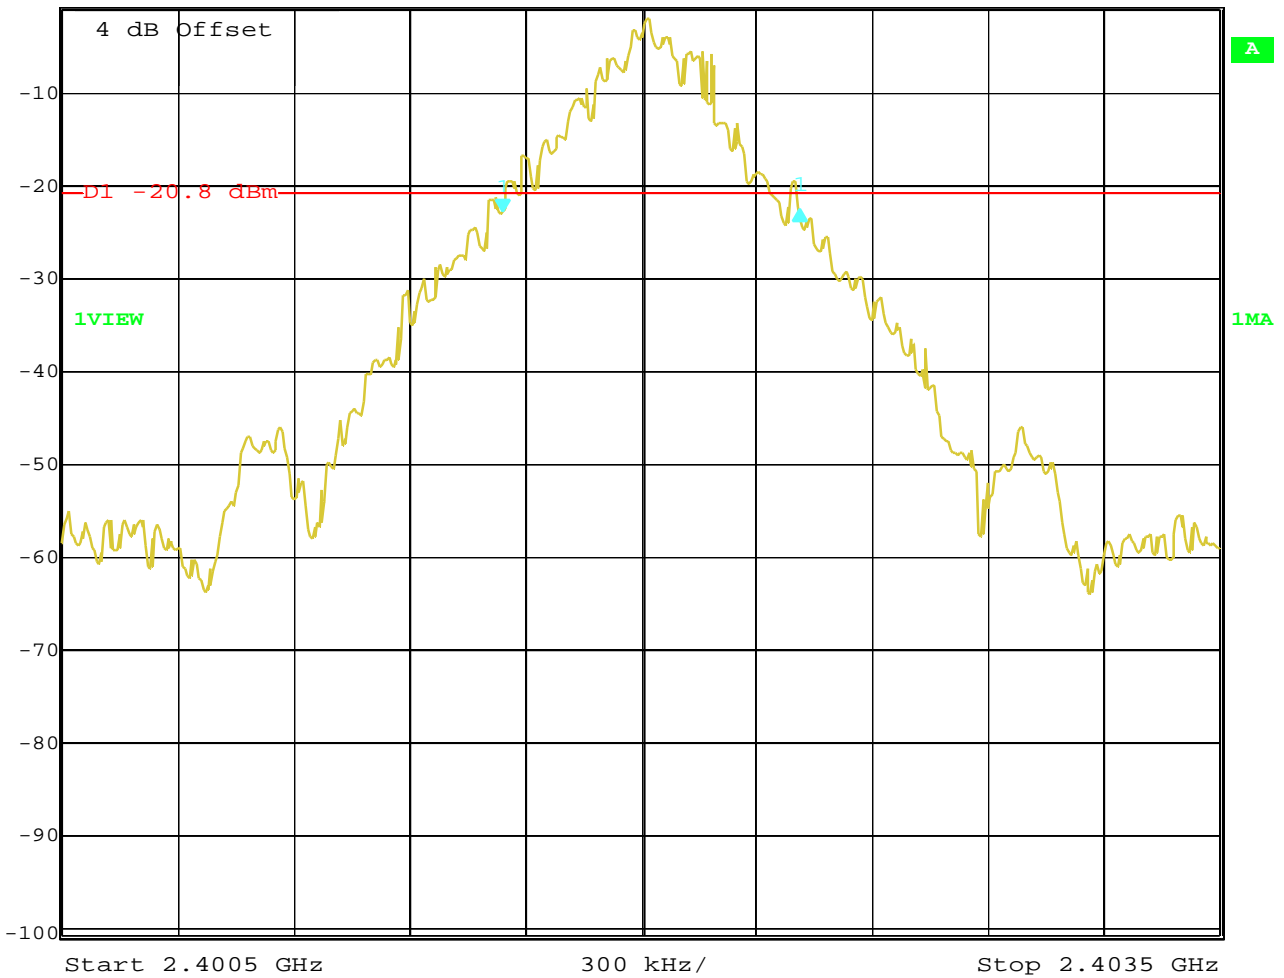

Date: 17.NOV.2000 09:26:22

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 18 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


Spectrum Bandwidth of a FHSS System  
20 dB bandwidth

§15.247(a)

## Channel 2



Delta 1 [T1]	RBW	10 kHz	RF Att	20 dB
Ref Lvl	0.60 dB	VBW	30 kHz	
-0.4 dBm	757.51503006 kHz	SWT	76 ms	Unit dBm

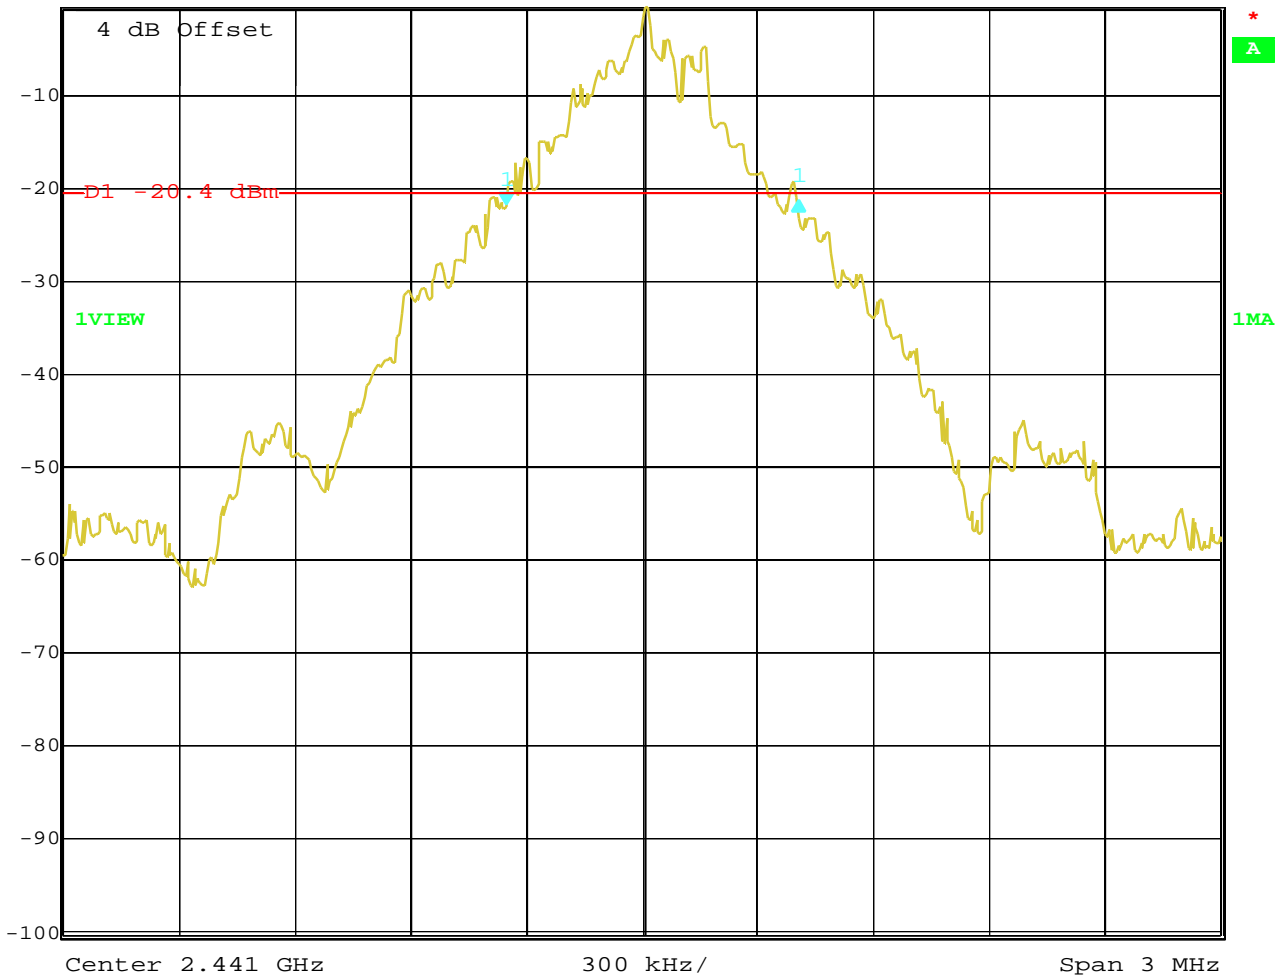

Date: 17.NOV.2000 09:23:59

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 19 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


Spectrum Bandwidth of a FHSS System  
20 dB bandwidth

§15.247(a)

## Channel 3:



Delta 1 [T1]	RBW	10 kHz	RF Att	20 dB
Ref Lvl	-1.12 dB	VBW	30 kHz	
-1.7 dBm	895.79158317 kHz	SWT	76 ms	Unit dBm

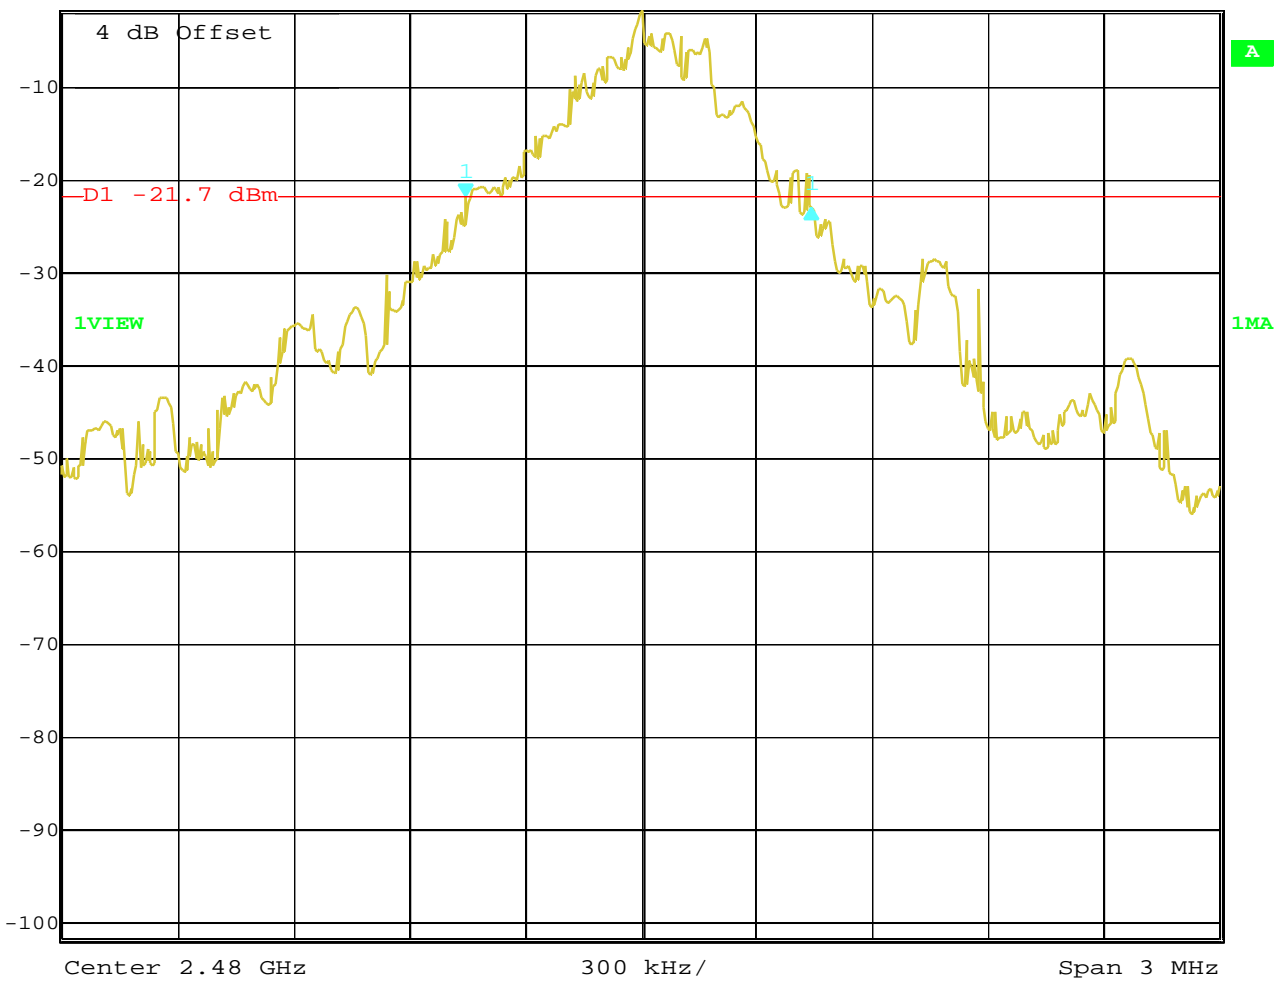

Date: 17.NOV.2000 09:29:26

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 20 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

**MAXIMUM PEAK OUTPUT POWER  
(conducted)**

**SUBCLAUSE § 15.247 (b) (1)**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (mW)			
		2402	2442	2481	
Frequency (MHz)	T <sub>nom</sub> ( 23 )°C	PK	1.64	1.67	1.60
		AV	1.53	1.56	1.49
V <sub>nom</sub> ( 3.6 )V					
Maximum deviation from output power under extreme test conditions (dBc)		+0.71 / -0.88	+0.49 / -0.79	+0.52 / -0.71	
Measurement uncertainty		±3dB			

**RBW / VBW : 3 MHz**

**LIMIT**

**SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)**

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 21 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

Peak output power (conducted)


§15.247 (b)

Channel 1: +2.15 dBm at 2402 MHz

De facto EIRP with – 5.65 dbI max. antenna gain is – 3.50 dBm



Ref Lvl	Marker 1 [T1]	RBW	3 MHz	RF Att	40 dB
14 dBm	2.15 dBm	VBW	3 MHz		
	2.40223046 GHz	SWT	5 ms	Unit	dBm

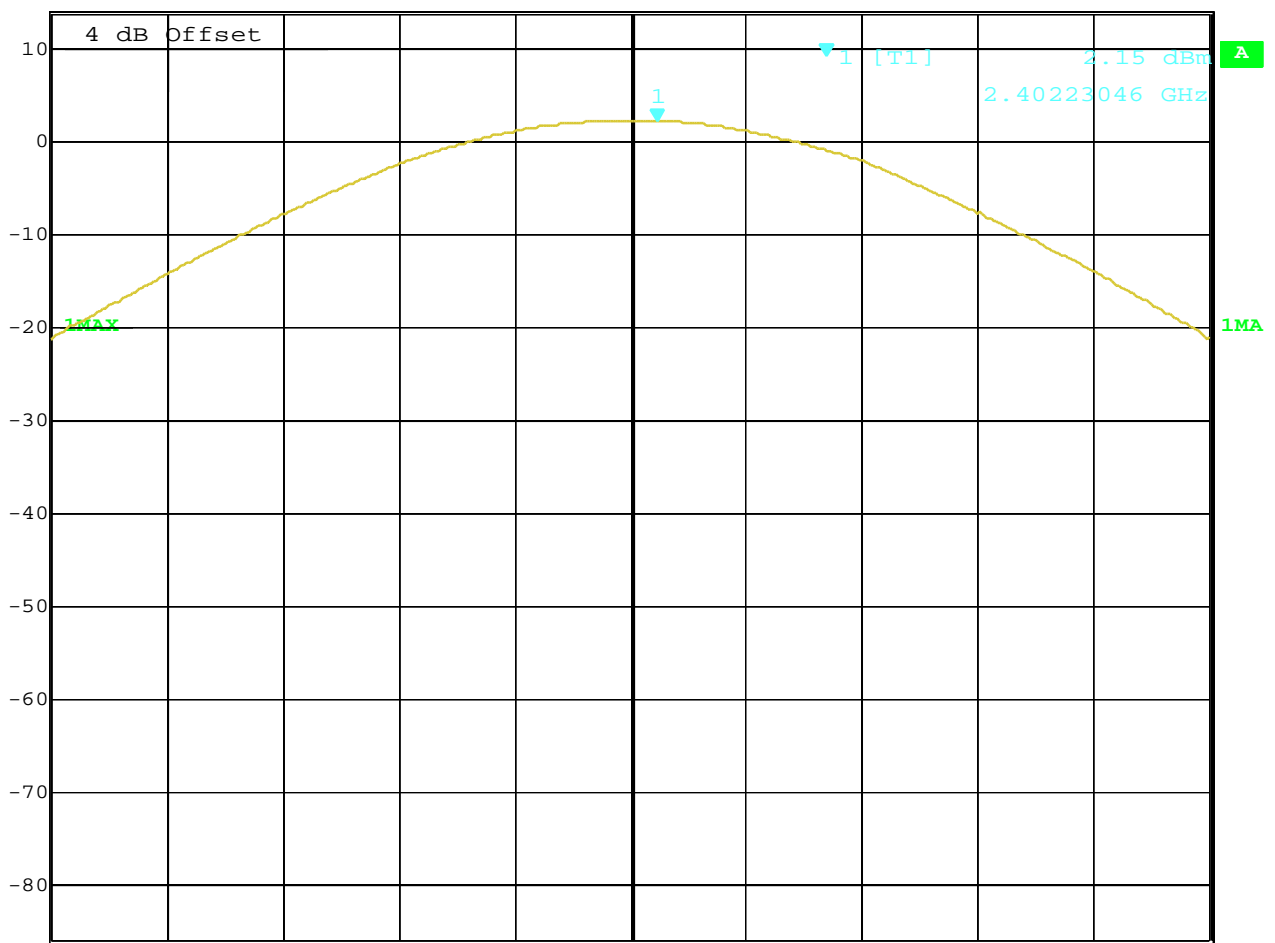

Center 2.402 GHz

1 MHz/

Span 10 MHz

Date: 17.NOV.2000 08:32:39

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 22 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C


Relative humidity : 31%


Peak output power (conducted)

§15.247 (b)

Channel 2: 2.23dBm at 2441 MHz

De facto EIRP with -5.65 dbI max. antenna gain is -3.42 dBm

	Marker 1 [T1]	RBW	3 MHz	RF Att	40 dB
	Ref Lvl	2.23 dBm	VBW	3 MHz	
	14 dBm	2.44090982 GHz	SWT	5 ms	Unit

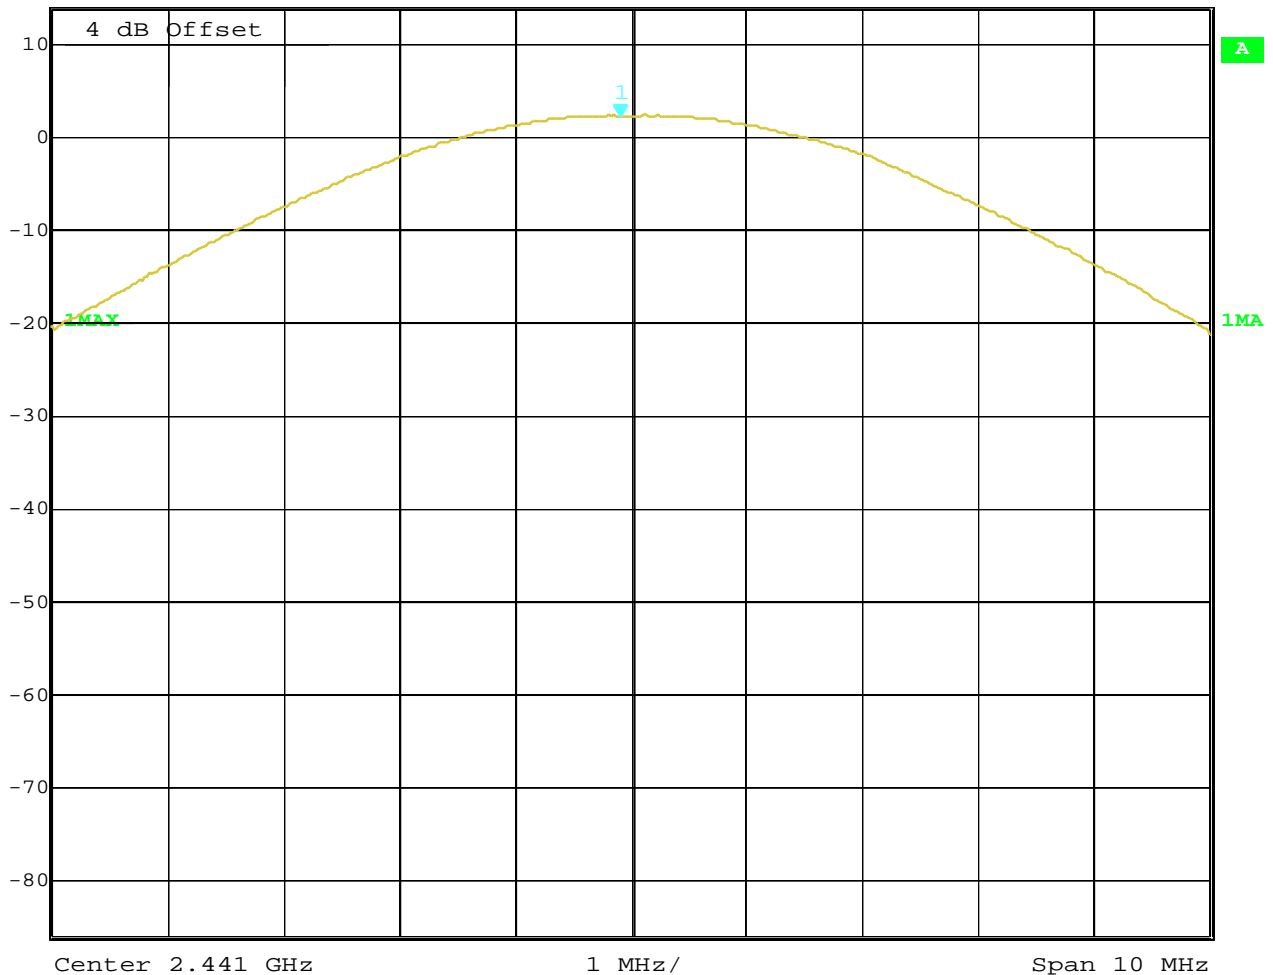

Date: 17.NOV.2000 07:57:54

4 dB Offset : Cable loss

Peak output power (conducted)

§15.247 (b)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 23 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C


Relative humidity : 31%

Channel 3: 2.04 dBm at 2481 MHz

De facto EIRP with -5.65 dbI max. antenna gain is -3.61 dBm



Marker 1 [T1] RBW 3 MHz RF Att 40 dB  
Ref Lvl 2.04 dBm VBW 3 MHz  
14 dBm 2.48015030 GHz SWT 5 ms Unit dBm

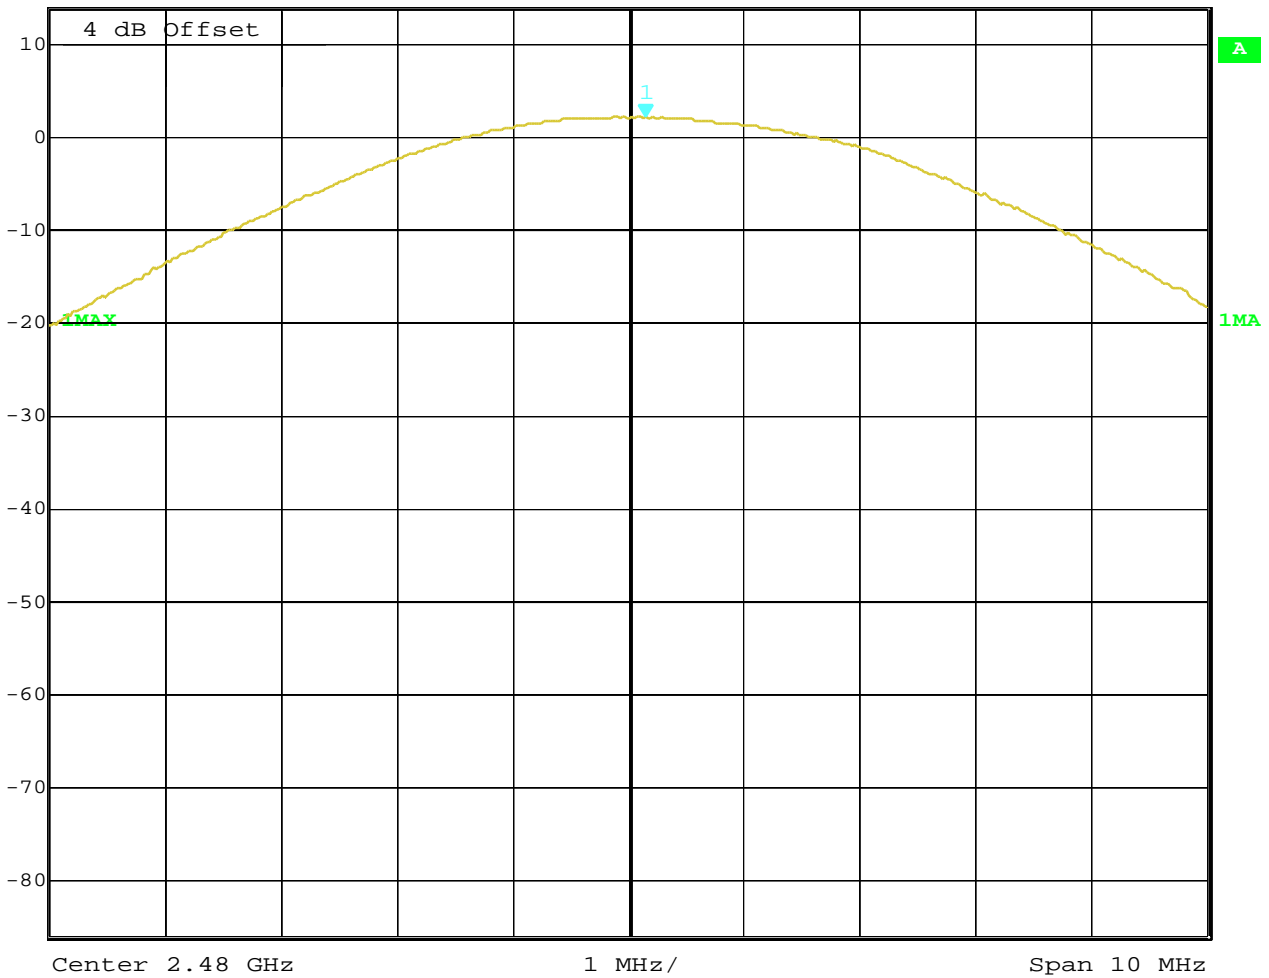

Date: 17.NOV.2000 07:46:36

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 24 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

**MAXIMUM PEAK OUTPUT POWER  
(RADIATED)**

**SUBCLAUSE § 15.247 (b) (1)**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (mW)		
		2402	2442	2481
Frequency (MHz)				
$T_{nom}(23)^\circ C$	$V_{nom}(3.6)V$	0,447	0,455	0,436
Maximum deviation from output power under extreme test conditions (dBc)		+0.71 / -0.88	+0.49 / -0.79	+0.52 / -0.71
Measurement uncertainty		±3dB		

**RBW/VBW : 3 MHz**

**Measured at a distance of 3m**

**LIMIT**

**SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)**

17 - 24



# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 25 (64)

Equipment under test : 1130101-BV


Ambient temperature : 24,5°C


Relative humidity : 31%

## Band-edge compliance of conducted emissions

§15.247 (c)

### Low frequency section (hopping off)

 Delta 1 [T1] RBW 10 kHz RF Att 20 dB  
Ref Lvl -43.88 dB VBW 20 kHz Mixer -20 dB  
8.3 dBm -3.00601202 MHz SWT 250 ms Unit dBm

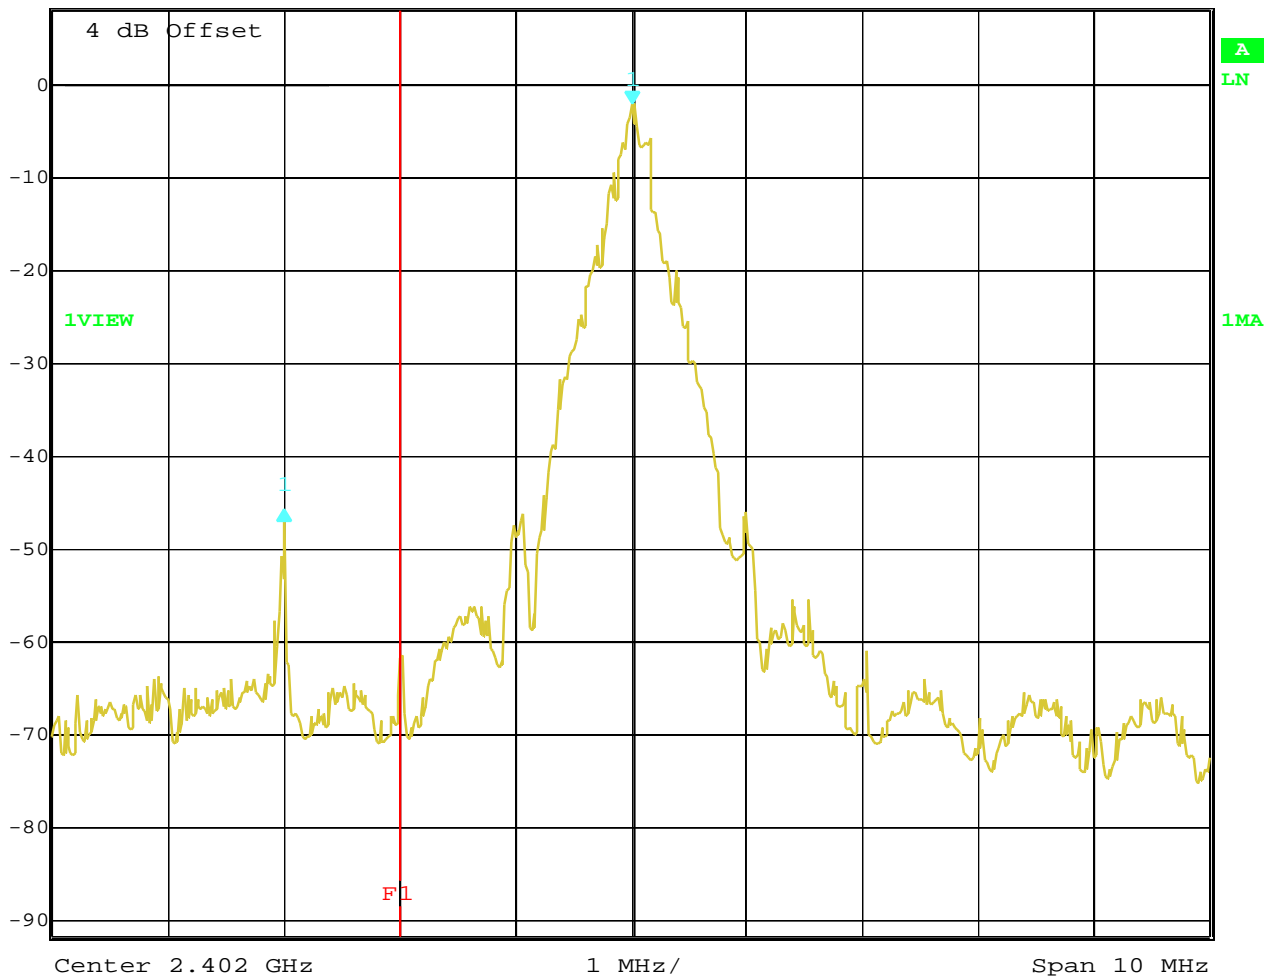

Date: 17.NOV.2000 09:59:14

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 26 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


## Band-edge compliance of conducted emissions

§15.247 (c)

### Low frequency section (hopping on)



Delta 1 [T1]	RBW	10 kHz	RF Att	20 dB
Ref Lvl	VBW	20 kHz	Mixer	-20 dBm
8.3 dBm	SWT	250 ms	Unit	dBm

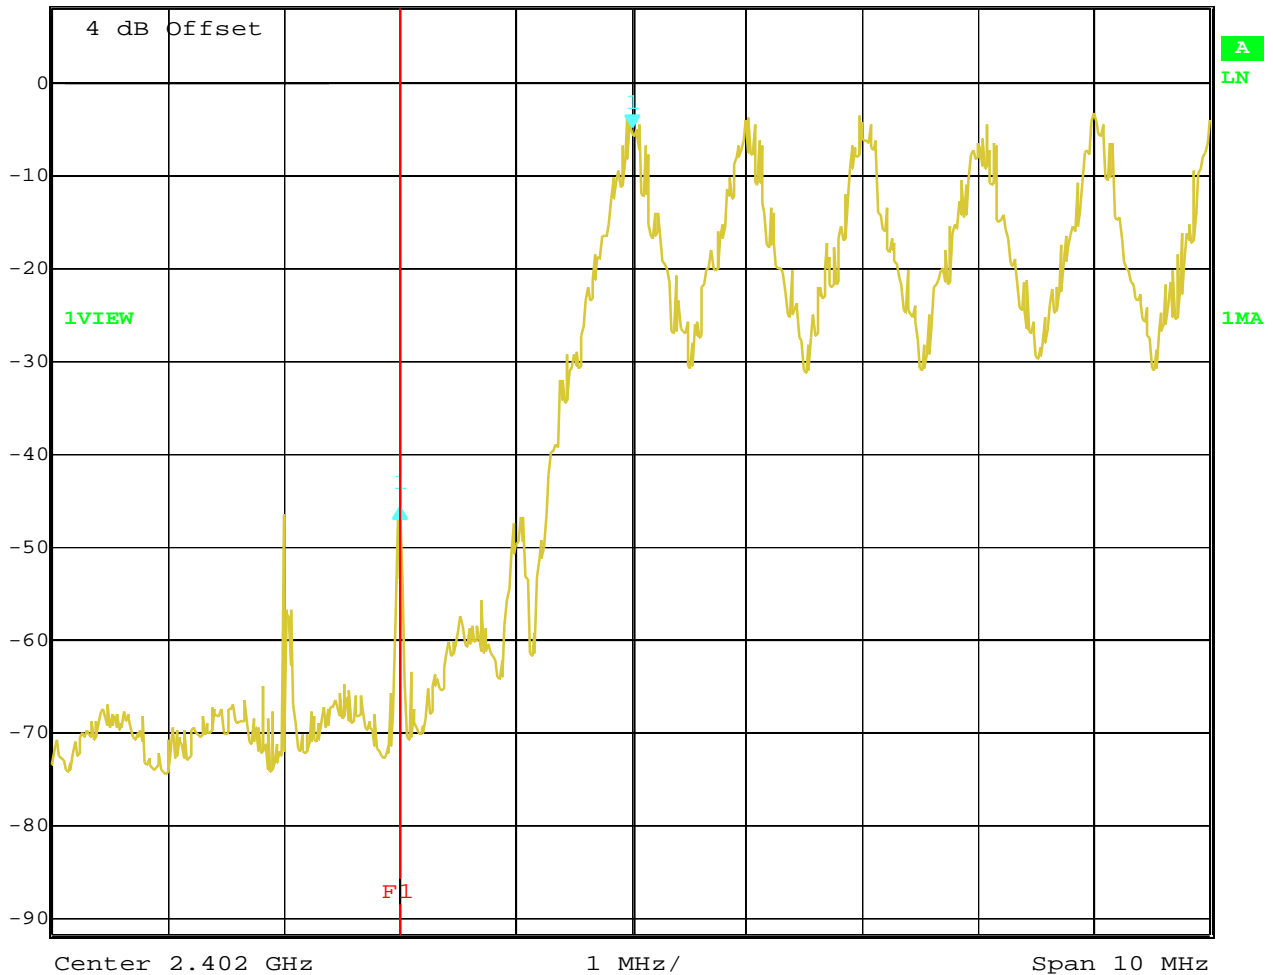

Date: 17.NOV.2000 10:02:23

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 27 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


## Band-edge compliance of conducted emissions

§15.247 (c)

### high frequency section (hopping off)



	Marker 1 [T1]	RBW	50 kHz	RF Att	20 dB
Ref Lvl	108.43 dBµV	VBW	100 kHz	Mixer	-20 dBm
115.3 dBµV	2.48016032 GHz	SWT	25 ms	Unit	dBµV

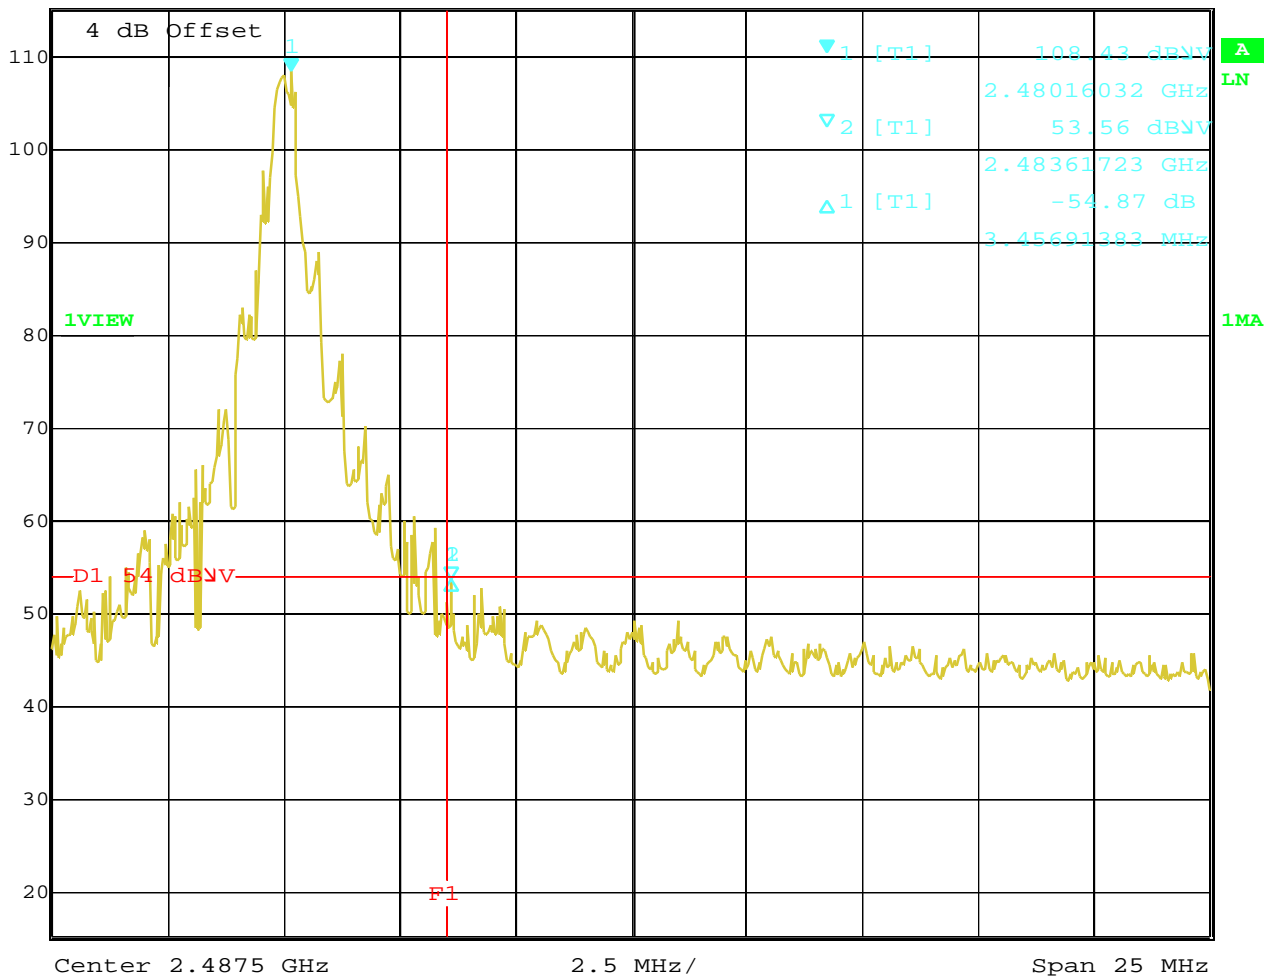

Date: 17.NOV.2000 10:16:44

4 dB Offset : Cable loss

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 28 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


## Band-edge compliance of conducted emissions

§15.247 (c)

### high frequency section (hopping on)



	Delta 1 [T1]	RBW	50 kHz	RF Att	20 dB
Ref Lvl	-56.25 dB	VBW	100 kHz	Mixer	-20 dBm
115.3 dBµV	3.80761523 MHz	SWT	25 ms	Unit	dBµV

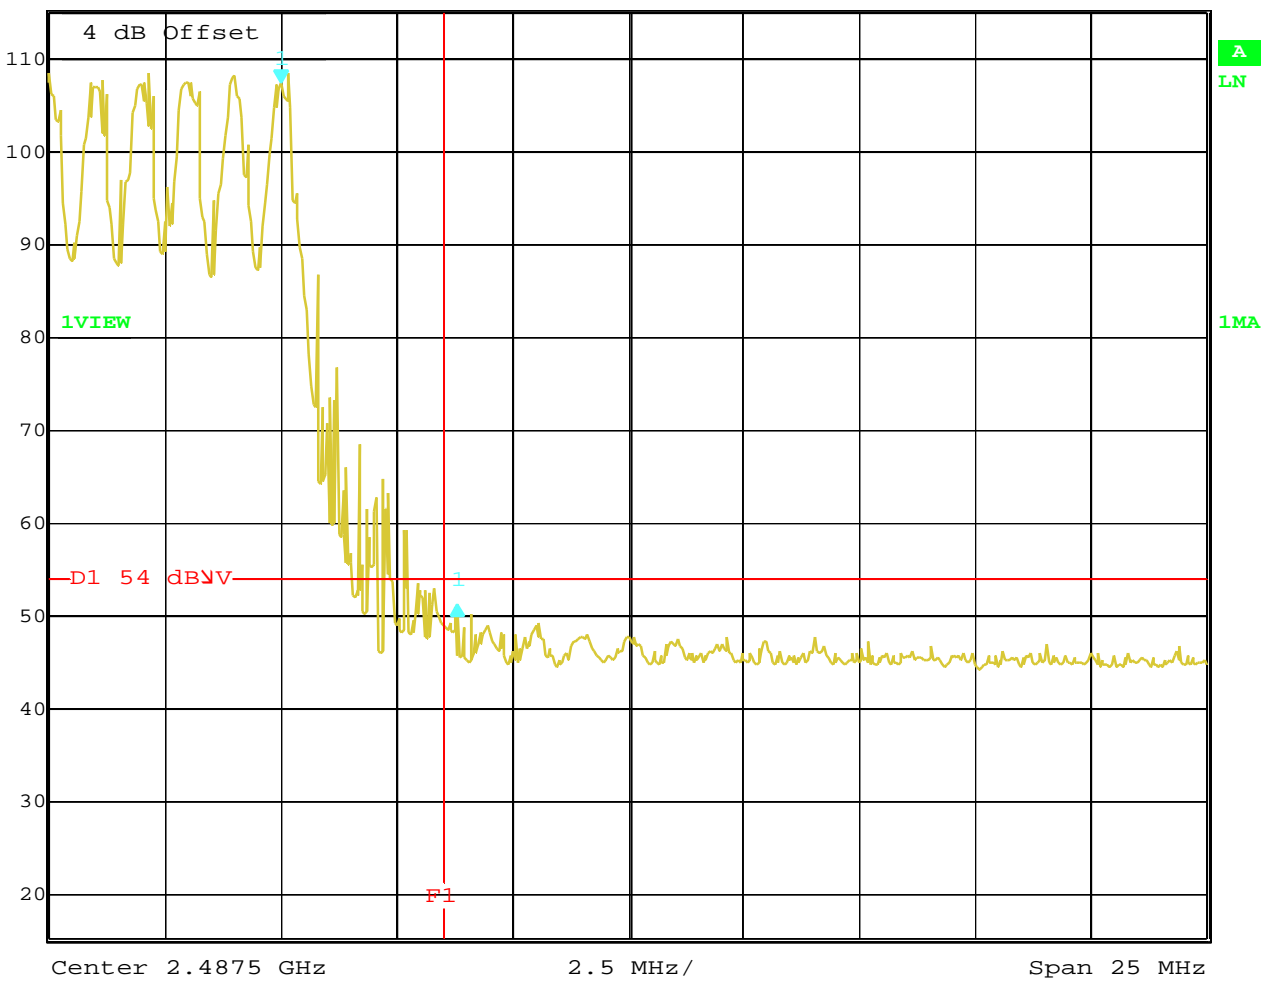

Date: 17.NOV.2000 10:08:48

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 29 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

EMISSION LIMITATIONS- Conducted (Transmitter)

§ 15.247 (c) (1)

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power	actual attenuation below frequency of operation (dB)	results
2402		-3.50	30 dBm	-	Operating frequency
		all peaks <<limit		see plot	complies
2441		-3.42	30 dBm	-	Operating frequency
		all peaks <<limit		see plot	complies
2480		-3.61	30 dBm		Operating frequency
		all peaks <<limit		see plot	complies
Measurement uncertainty		± 3dB			

RBW : 100 kHz VBW: 1 MHz

## LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 30 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


## EMISSION LIMITATIONS- Conducted (Transmitter) Channel 1: 30 MHz - 2 GHz

§ 15.247 (c) (1)



Ref Lvl  
105.3 dBμV

RBW	100 kHz	RF Att	10 dB
VBW	1 MHz	Mixer	-20 dBm
SWT	245 ms	Unit	dBμV

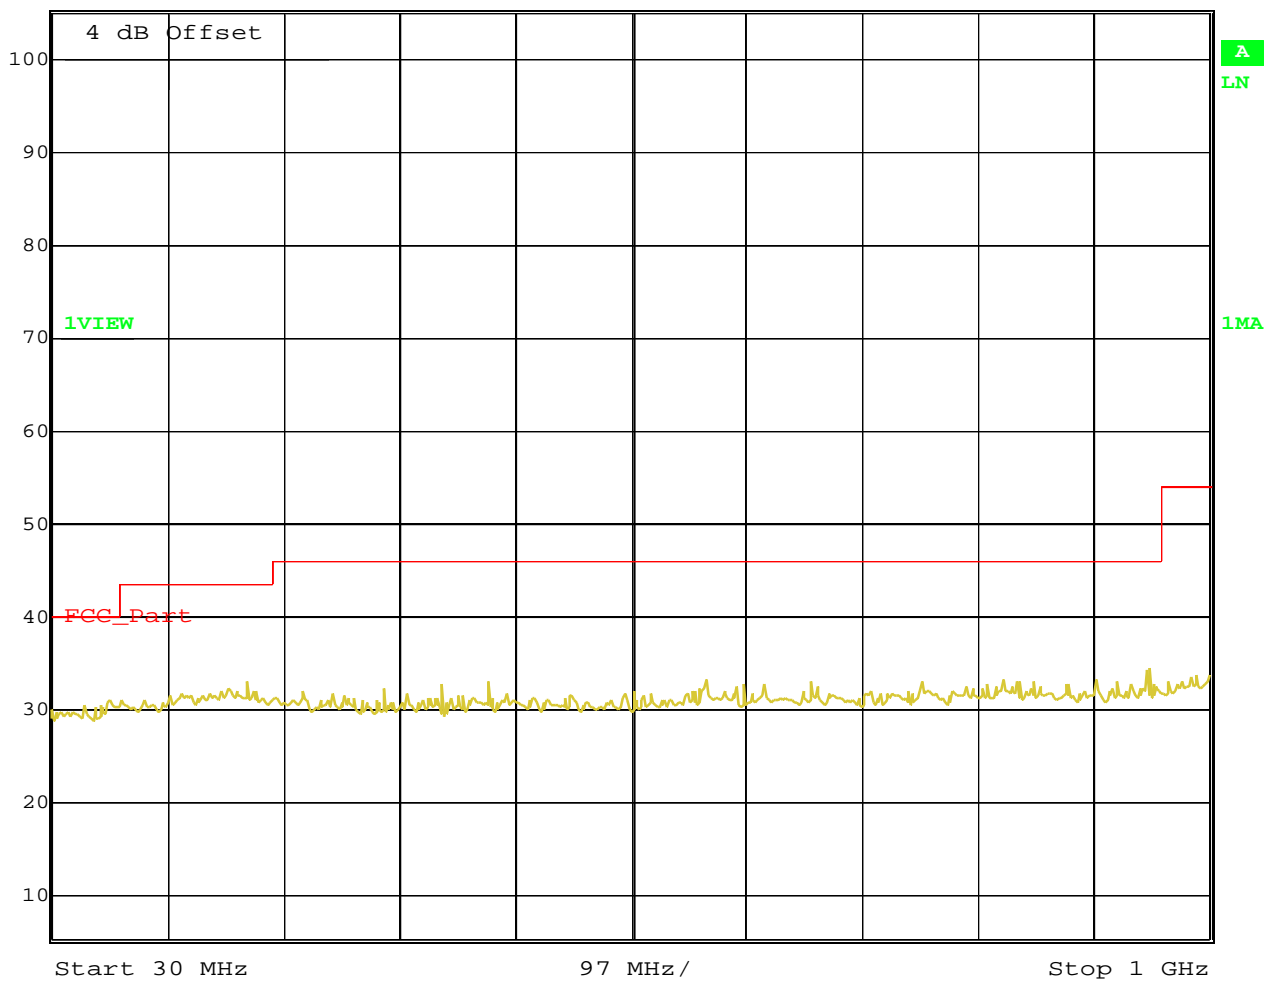

Date: 17.NOV.2000 10:28:23

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 31 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C


Relative humidity : 31%

## EMISSION LIMITATIONS- Conducted (Transmitter) Channel 1: 2 – 12 GHz

§ 15.247 (c) (1)



	Marker 2 [T1]	RBW	100 kHz	RF Att	20 dB
Ref Lvl	47.04 dBµV	VBW	1 MHz	Mixer	-20 dBm
115.3 dBµV	6.96993988 GHz	SWT	2.5 s	Unit	dBµV

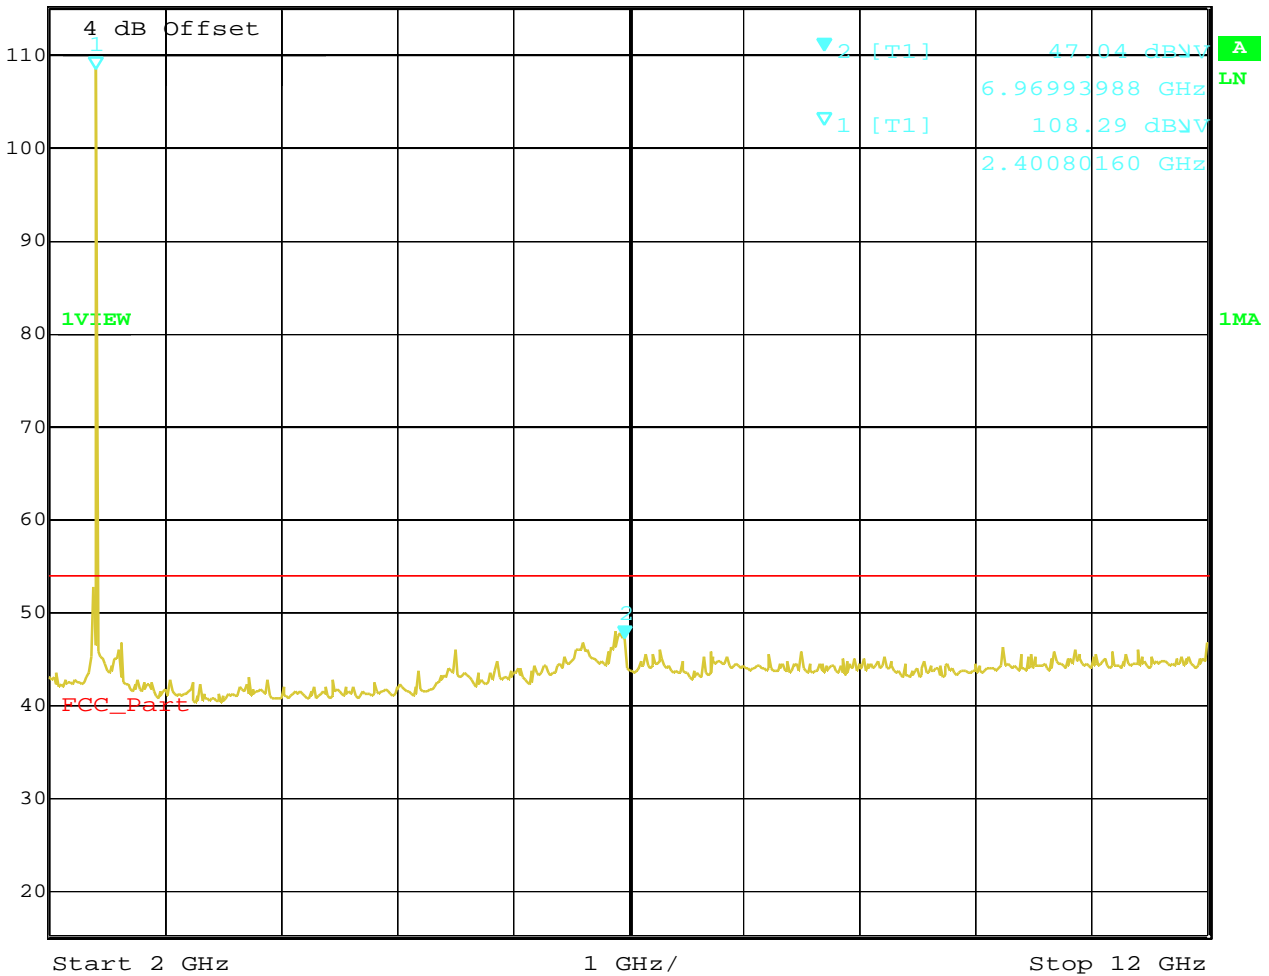

Date: 17.NOV.2000 10:41:59

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)







# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 34 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


## EMISSION LIMITATIONS- Conducted (Transmitter)

§ 15.247 (c) (1)

Channel 2: 2 –12 GHz



Ref Lvl	108.28 dBµV	RBW	100 kHz	RF Att	20 dB
115.3 dBµV	2.44088176 GHz	VBW	1 MHz	Mixer	-20 dBm
		SWT	2.5 s	Unit	dBµV

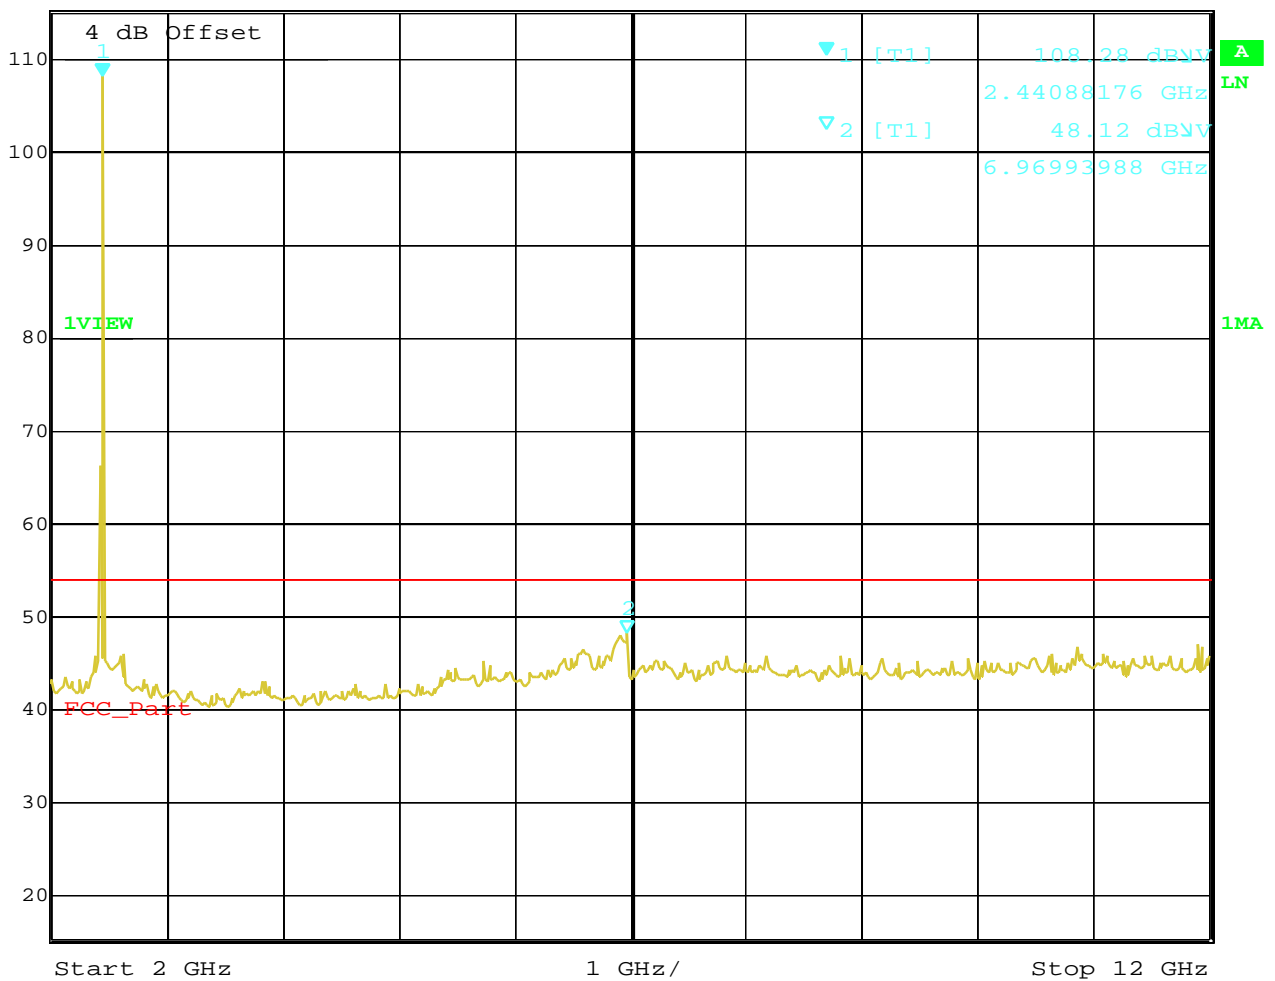

Date: 17.NOV.2000 10:40:54

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 35 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C


Relative humidity : 31%

## EMISSION LIMITATIONS- Conducted (Transmitter) Channel 2: 12 – 25 GHz

§ 15.247 (c) (1)



Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	20 dB
115.3 dBμV	47.66 dBμV	VBW	1 MHz	Mixer	-20 dBm
	14.55310621 GHz	SWT	3.3 s	Unit	dBμV

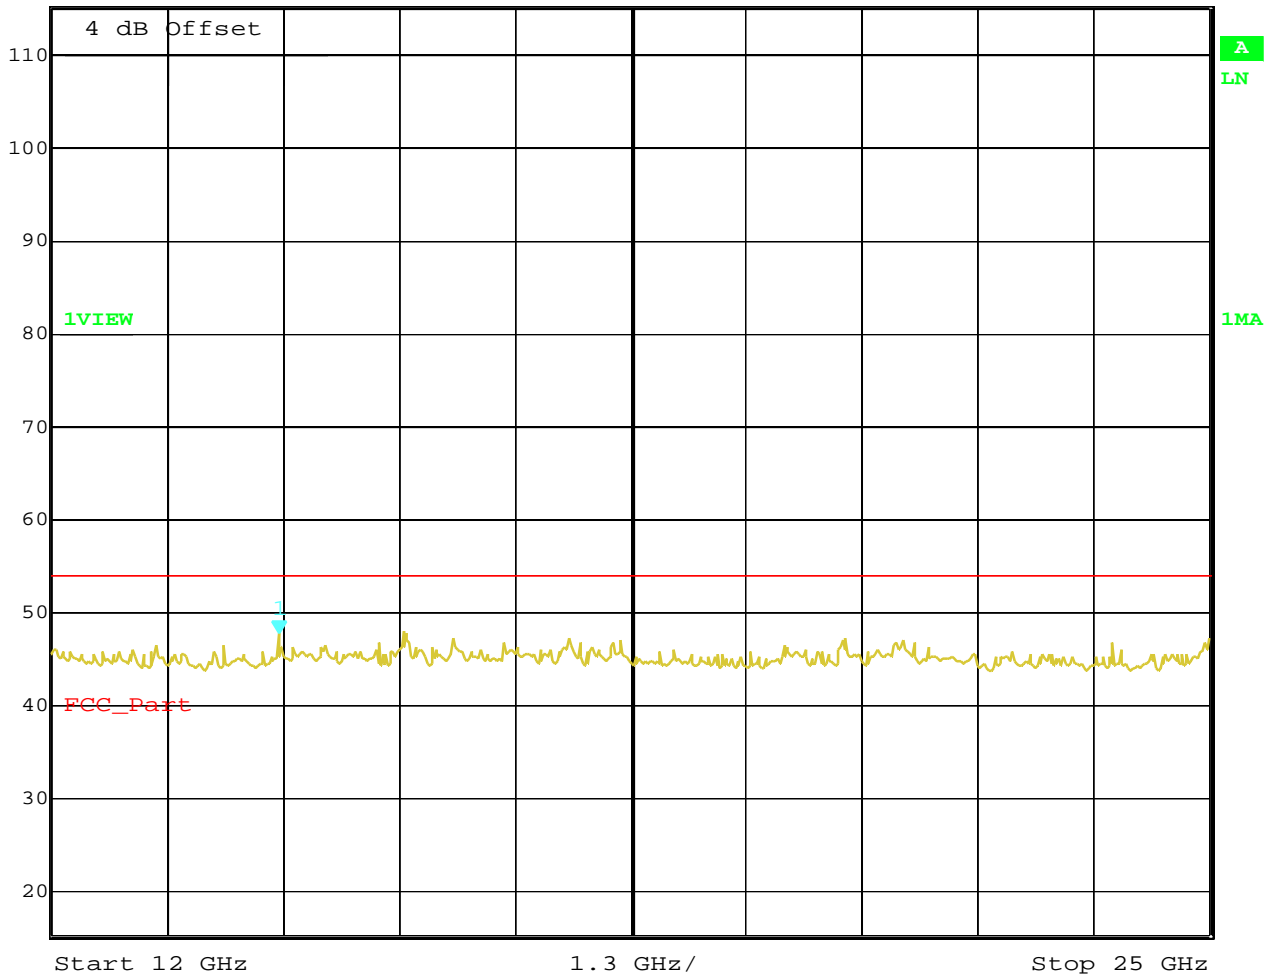

Date: 17.NOV.2000 10:44:36

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 36 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%


## EMISSION LIMITATIONS- Conducted (Transmitter) Channel 3: 30 MHz - 2 GHz

§ 15.247 (c) (1)



Ref Lvl  
105.3 dBµV

RBW	100 kHz	RF Att	10 dB
VBW	1 MHz	Mixer	-20 dBm
SWT	245 ms	Unit	dBµV

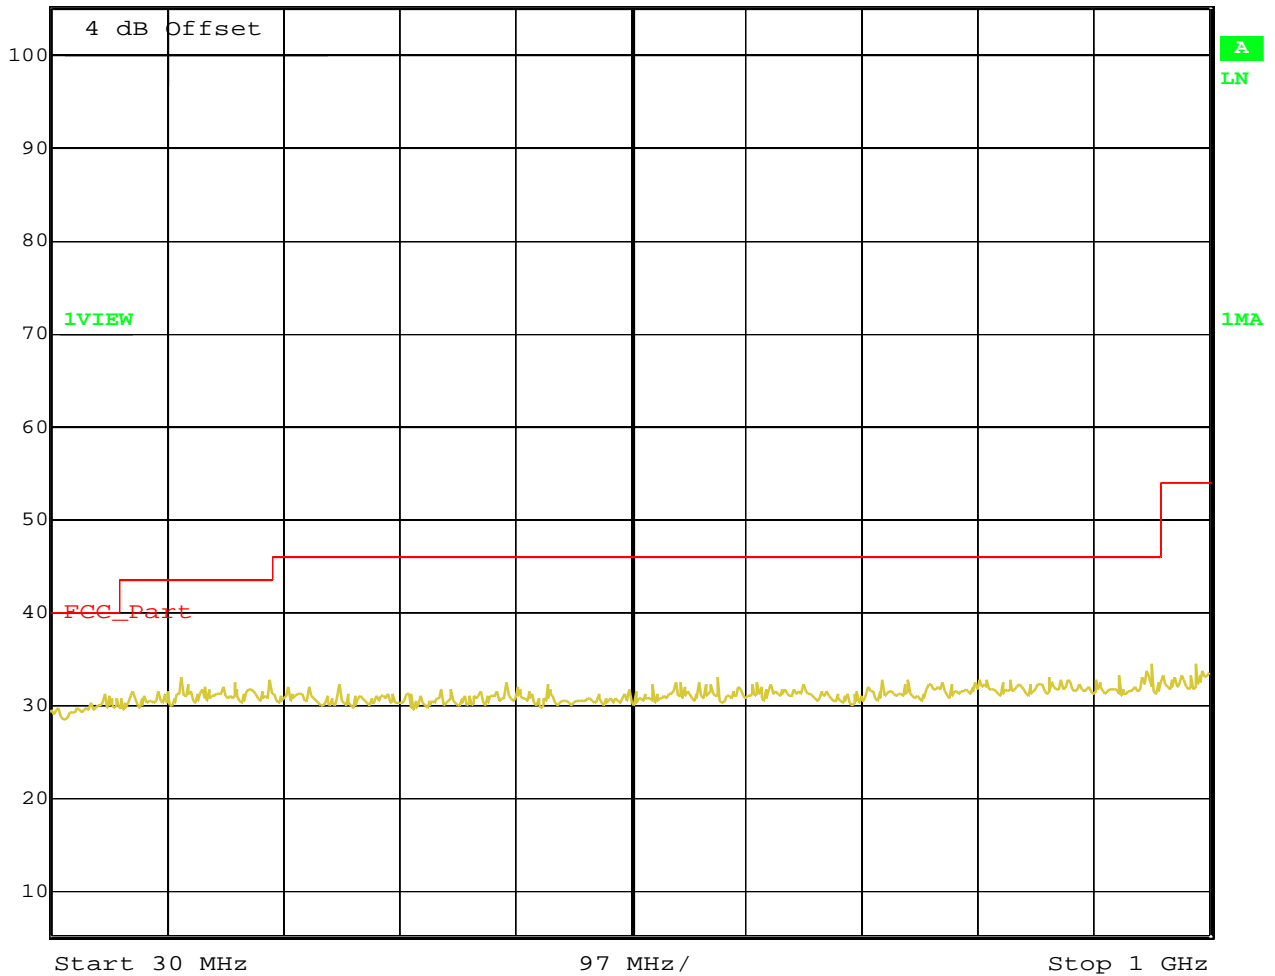

Date: 17.NOV.2000 10:29:05

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)



# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 38 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C


Relative humidity : 31%

## EMISSION LIMITATIONS- Conducted (Transmitter) Channel 3: 12 - 25 GHz

§ 15.247 (c) (1)



Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	20 dB
115.3 dBμV	47.79 dBμV	VBW	1 MHz	Mixer	-20 dBm
	16.03807615 GHz	SWT	3.3 s	Unit	dBμV

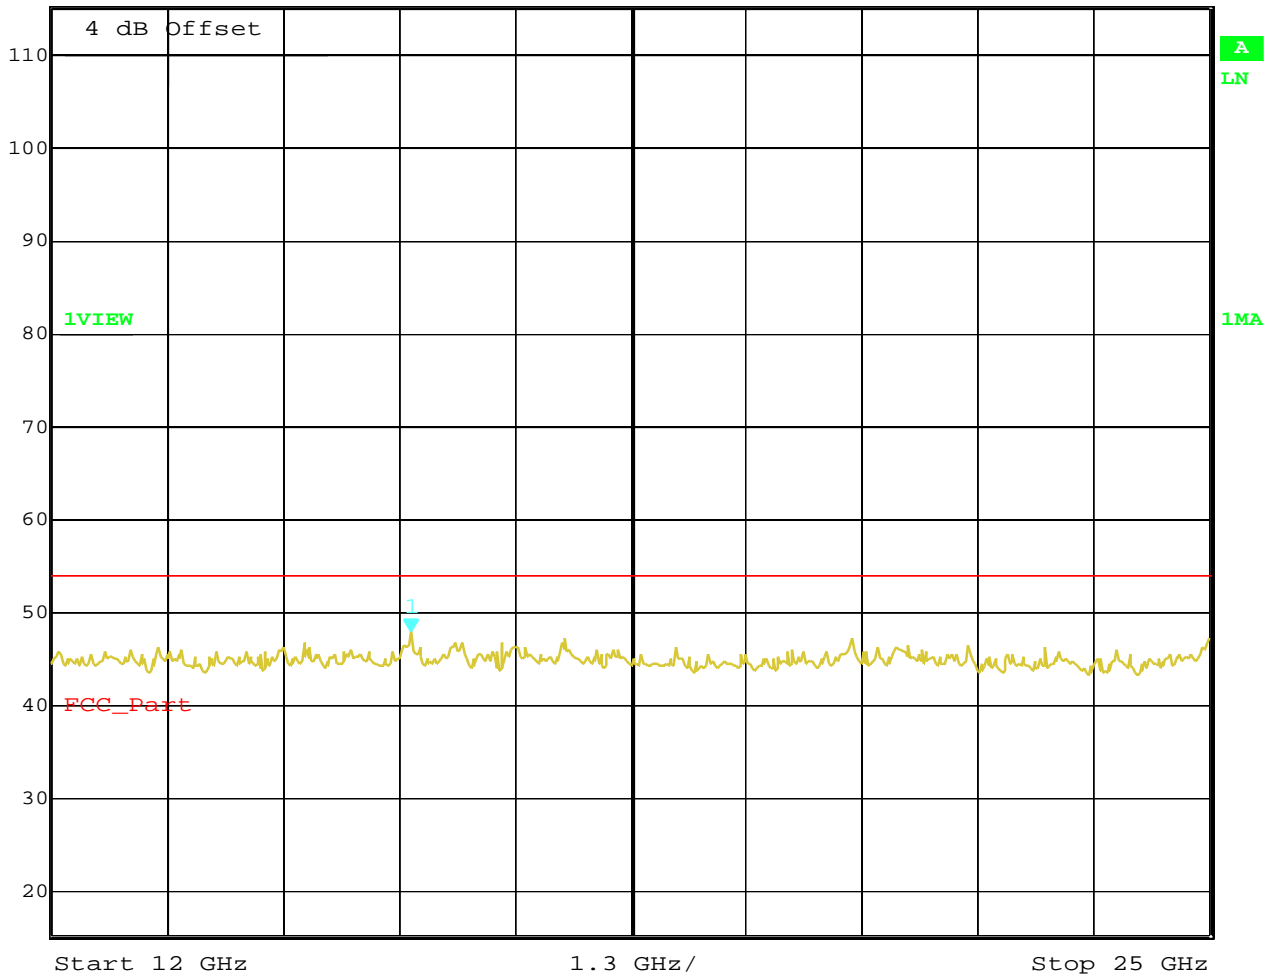

Date: 17.NOV.2000 10:45:42

4 dB Offset : Cable loss

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 39 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

## SPURIOUS RADIATED EMISSION

§ 15.247 (c) (1)

EMISSION LIMITATIONS					
f (MHz)	polarization	amplitude of emission (dBµV/m) PEAK	amplitude of emission (dBµV/m) QUASI PEAK	limit max. allowed emmission power (dBµV/m)	results
<b>CH 1</b>					
30.29	vertical	36.9	32.8	40.0	complies
144.06	vertical	32.6	30.6	43.5	complies
158.08	vertical	30.8	29.3	43.5	complies
186.66	vertical	34.2	32.1	43.5	complies
262.82	vertical	30.2	25.2	46.0	complies
381.05	vertical	36.6	28.4	46.0	complies
<b>CH 2</b>					
30.29	vertical	36.9	32.8	40.0	complies
100.34	vertical	37.7	33.4	43.5	complies
109.56	vertical	35.1	29.0	43.5	complies
120.23	vertical	37.8	34.9	43.5	complies
186.66	vertical	32.6	29.9	43.5	complies
215.09	vertical	33.8	32.3	43.5	complies
220.41	vertical	32.7	29.6	46.0	complies
240.68	vertical	31.2	27.9	46.0	complies
373.68	vertical	35.4	27.3	46.0	complies
<b>CH 3</b>					
100.34	vertical	37.2	33.2	43.5	complies
110.10	vertical	34.5	29.1	43.5	complies
120.23	vertical	37.5	35.1	43.5	complies
158.08	vertical	31.3	29.1	43.5	complies
186.66	vertical	33.3	30.4	43.5	complies
215.09	vertical	32.0	31.2	43.5	complies
222.57	vertical	31.8	28.6	46.0	complies
240.68	vertical	30.8	26.2	46.0	complies
261.53	vertical	34.5	25.1	46.0	complies
Measurement uncertainty		± 3dB			

**Horizontal measurments were more than 12 dB lower**

### LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 40 (64)


Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

## EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

2402 MHz

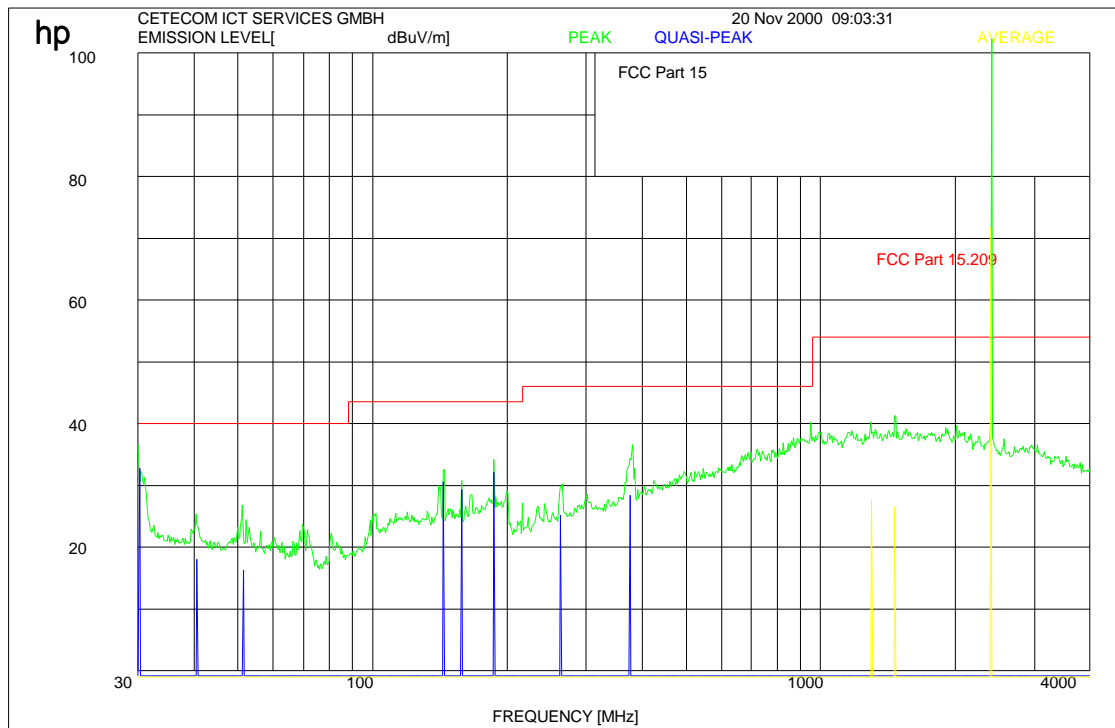

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

### LIMITS

### SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)



# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 41 (64)


Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

## EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

2442 MHz

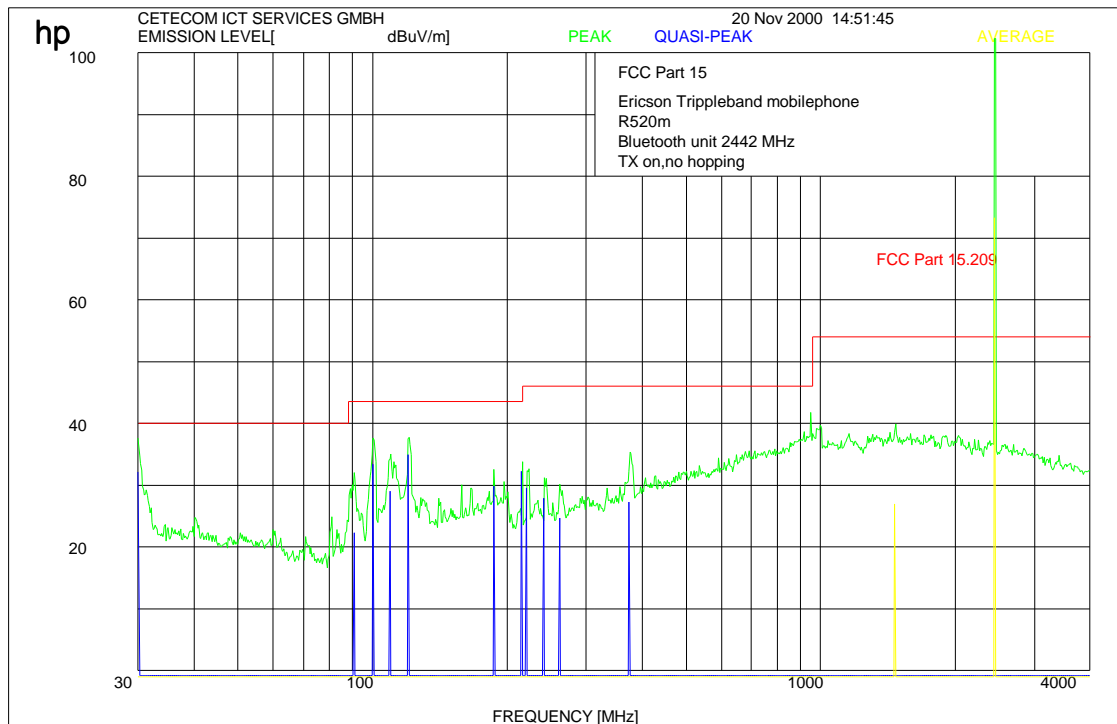

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

### LIMITS

### SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 42 (64)


Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

## EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

2481 MHz

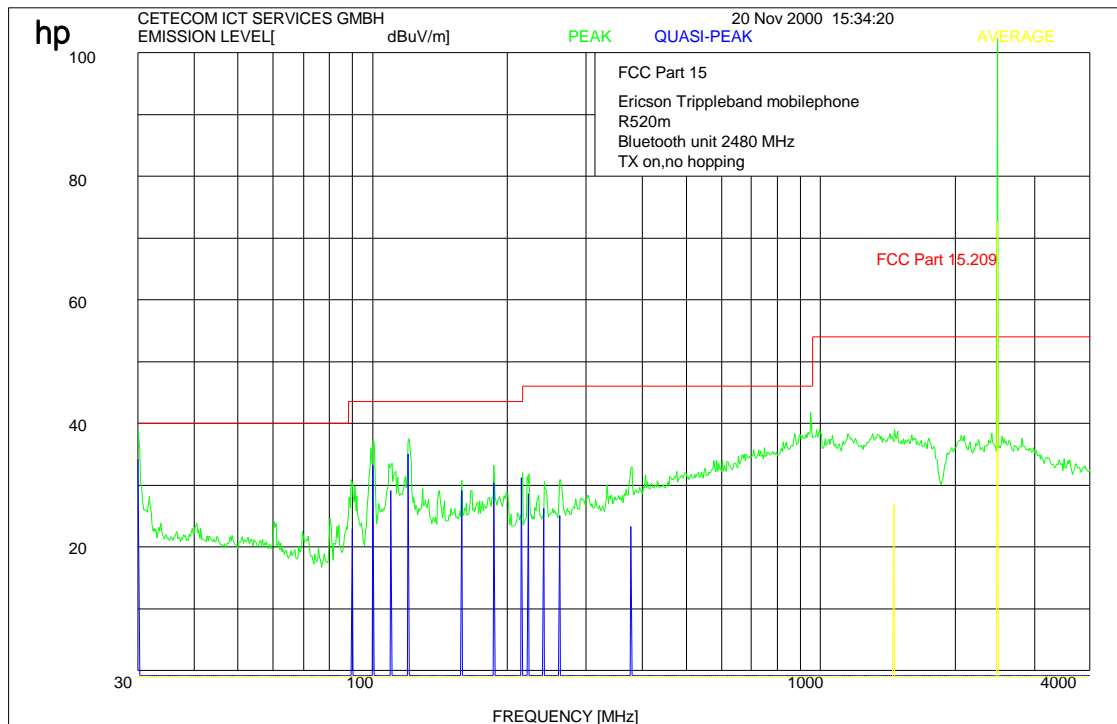

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

### LIMITS

### SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 43 (64)

Equipment under test : 1130101-BV


Ambient temperature : 24,5°C

Relative humidity : 31%

EMISSION LIMITATIONS (Transmitter)

CLAUSE § 15.247 (c) (1)

Channel 1

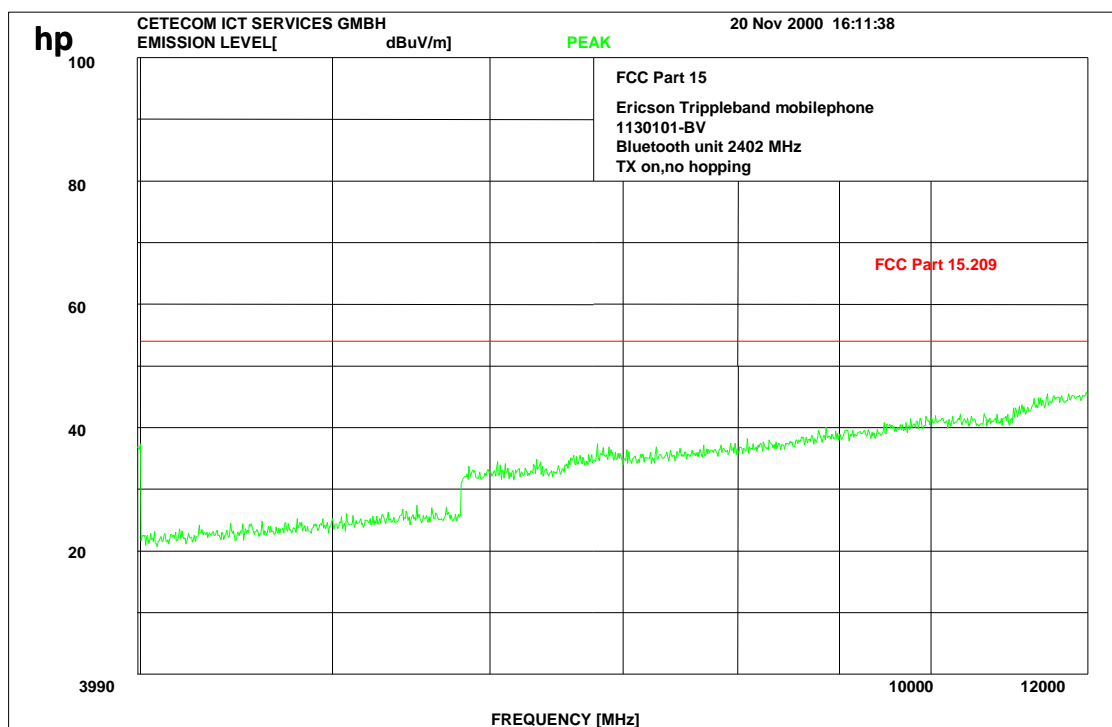

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW: } 1 \text{ MHz}$

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 44 (64)

Equipment under test : 1130101-BV


Ambient temperature : 24,5°C

Relative humidity : 31%

EMISSION LIMITATIONS (Transmitter)

CLAUSE § 15.247 (c) (1)

Channel 2

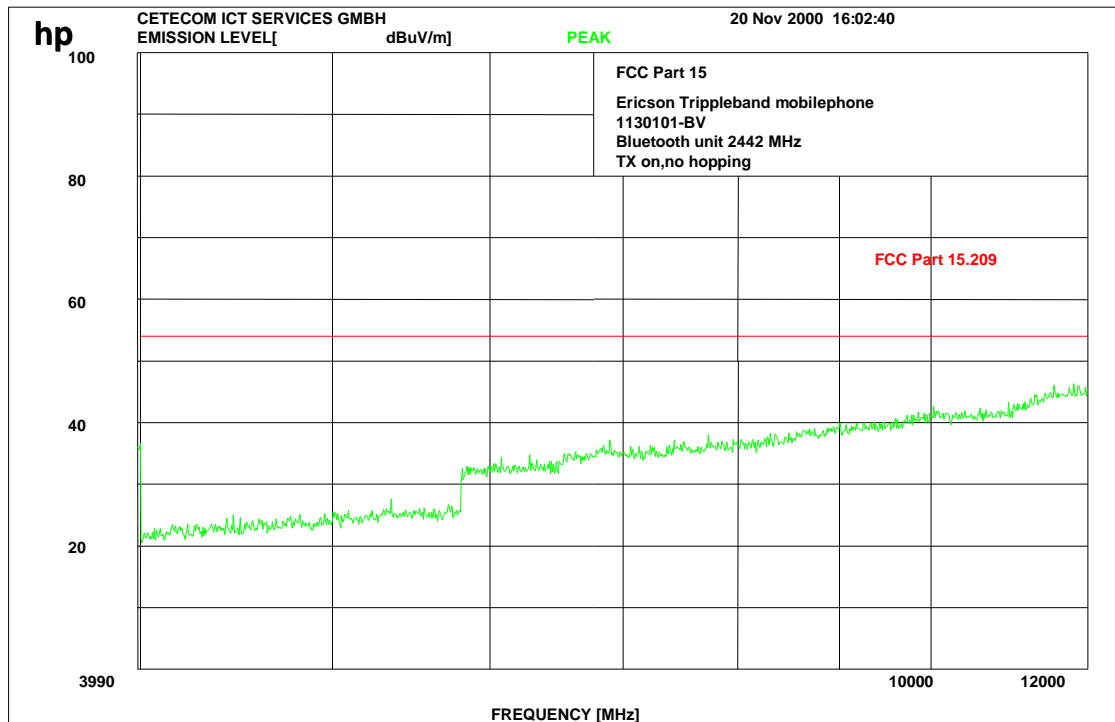

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW: } 1 \text{ MHz}$

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 45 (64)

Equipment under test : 1130101-BV


Ambient temperature : 24,5°C

Relative humidity : 31%

EMISSION LIMITATIONS (Transmitter)

CLAUSE § 15.247 (c) (1)

Channel 3

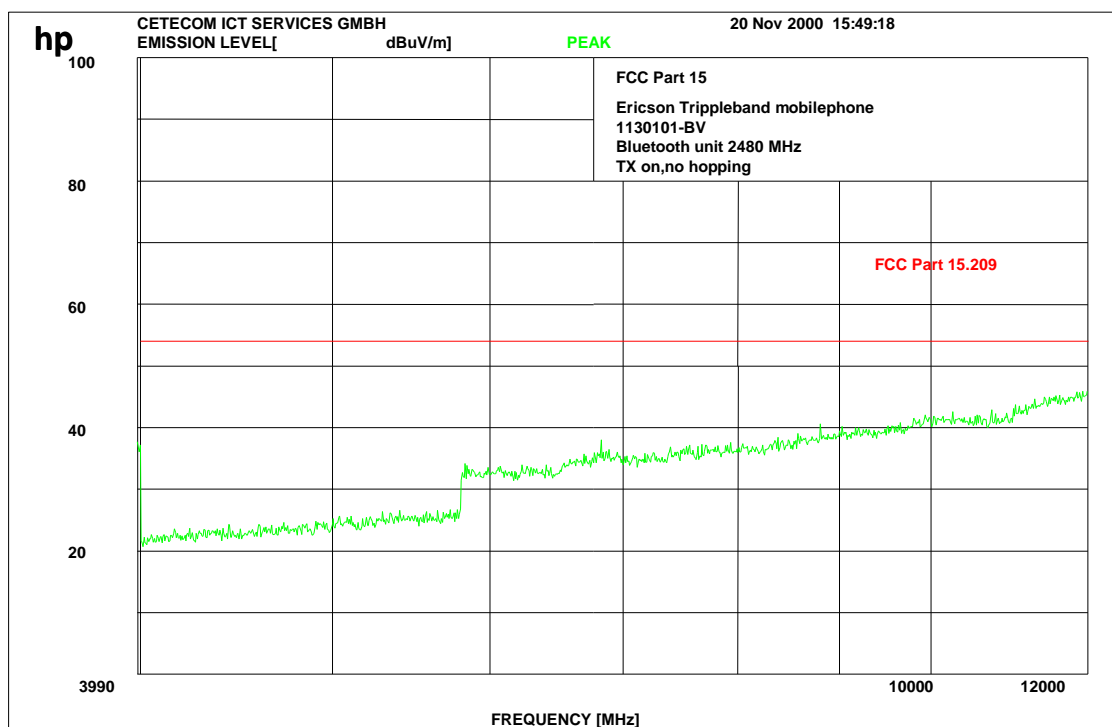

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW: } 1 \text{ MHz}$

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)



# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 47 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C


Relative humidity : 31%

EMISSION LIMITATIONS (Transmitter)

CLAUSE § 15.247 (c) (1)

Channel 1-3 (this is valid for all 3 channels)

Average

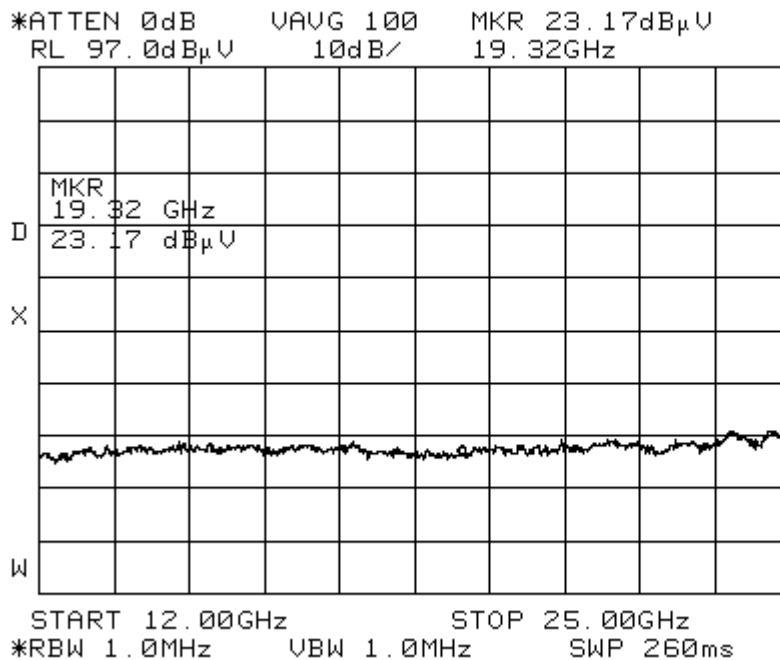

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 48 (64)

Equipment under test : 1130101-BV


Ambient temperature : 24,5°C

Relative humidity : 31%


Conducted emissions

§ 15.107/207

Measured with AC/DC power adapter

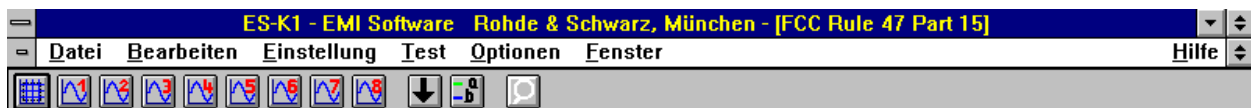

Pegel [dBµV]

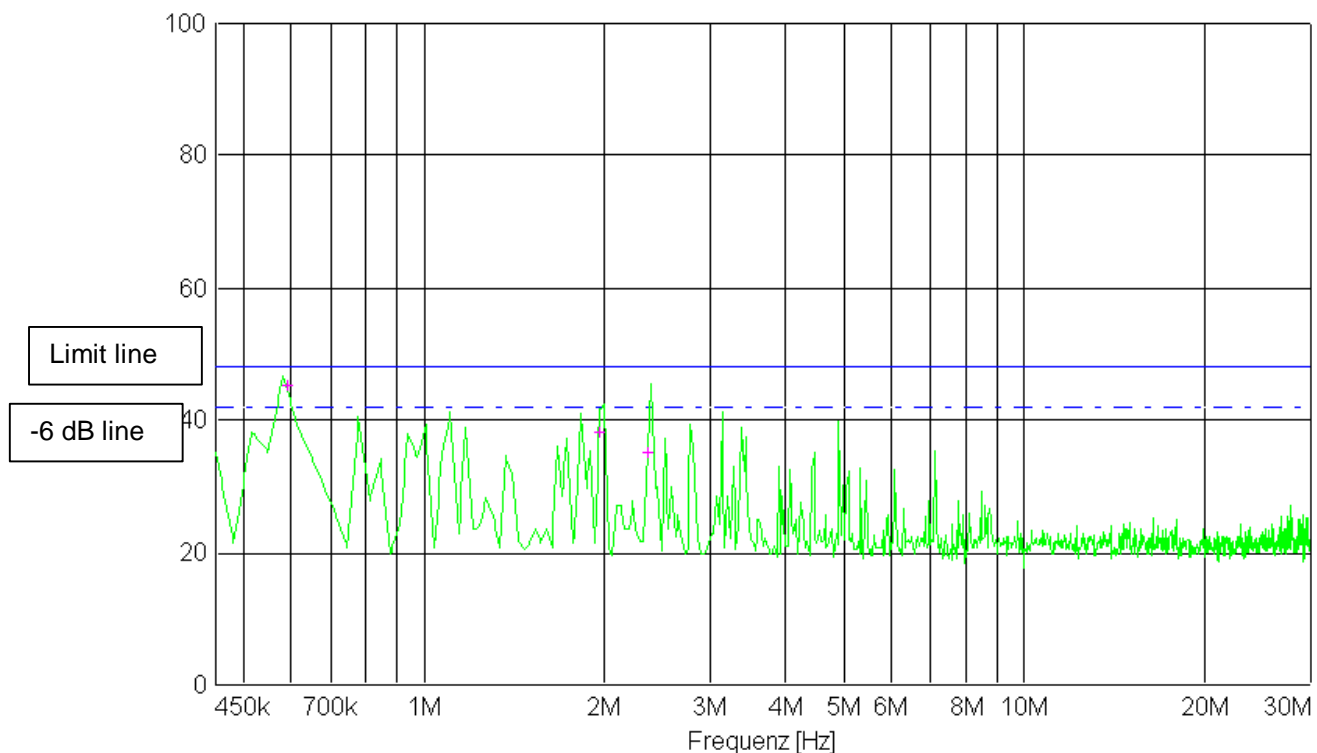

Frequency (MHz)	Level QP (dBµV)	Limit (dBµV)	Exceeding (dB)	Phase	PE
0.59400	45.20	47.96	-2.76	N	FLO
1.96800	38.33	47.96	-9.63	N	FLO
2.36400	35.13	47.96	-12.83	N	FLO

Technical specification : 15.207 (Revised as of October 1, 1991 )

Limit

0.45 to 30 MHz	250 µV / 47.96 dBµV
----------------	---------------------

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)



# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 49 (64)

Equipment under test : 1130101-BV

Ambient temperature : 24,5°C

Relative humidity : 31%

## RECEIVER SPURIOUS RADIATION

§ 15.209

### Radiated

SPURIOUS EMISSIONS LEVEL (µV/m)								
2402 MHz			2442 MHz			2481 MHz		
f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)
all peaks <<limit								
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Measurement distance see table

### Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 50 (64)

Equipment under test : 1130101-BV


Ambient temperature : 24,5°C

Relative humidity : 31%

## RECEIVER SPURIOUS RADIATION

§ 15.209

2402 MHz

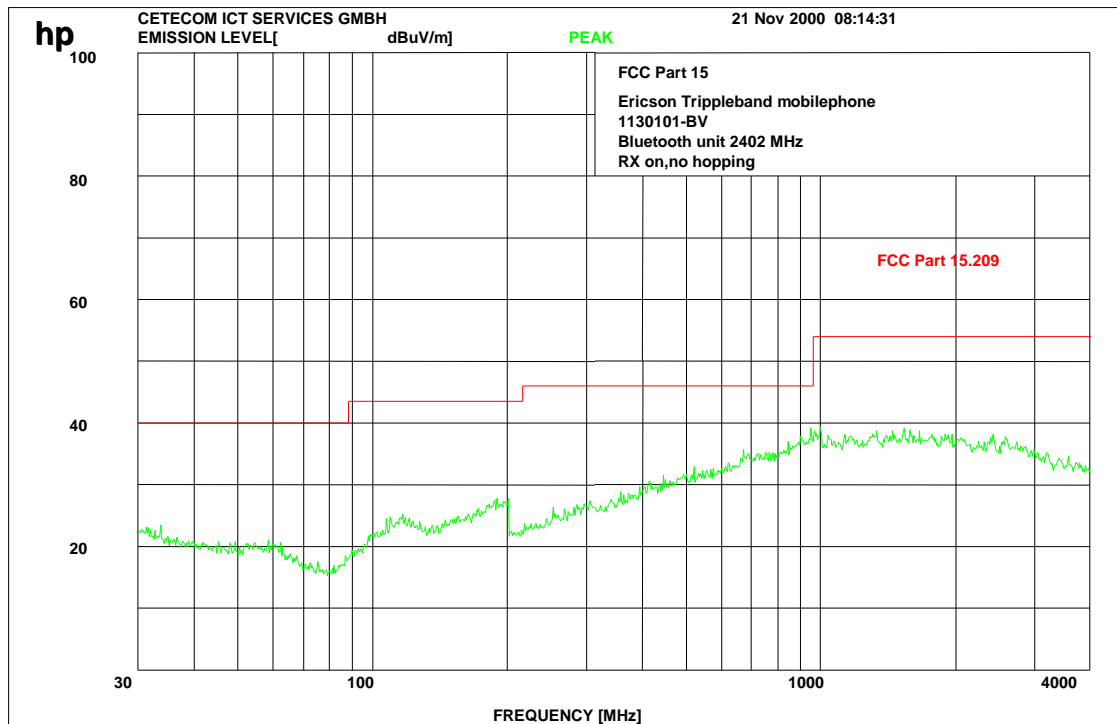

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW: } 1 \text{ MHz}$

### Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

## RECEIVER SPURIOUS RADIATION

§ 15.209

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 51 (64)

Equipment under test : 1130101-BV


Ambient temperature : 24,5°C

Relative humidity : 31%

## RECEIVER SPURIOUS RADIATION

§ 15.209

2442 MHz

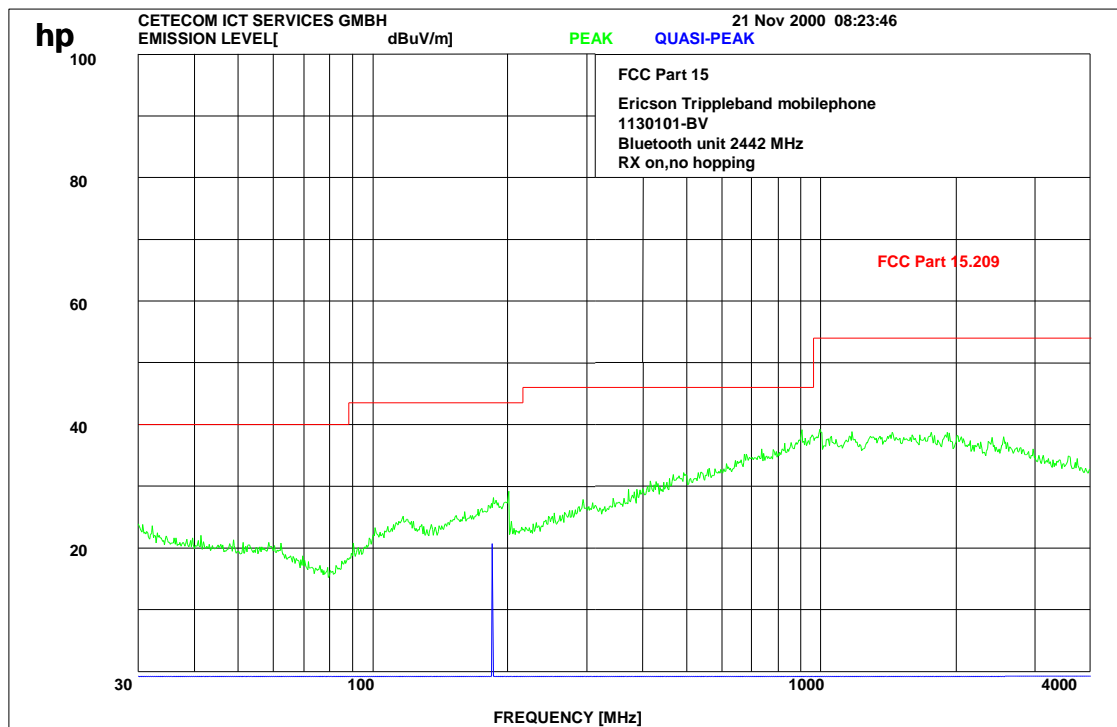

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW: } 1 \text{ MHz}$

### Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 52 (64)

Equipment under test : 1130101-BV


Ambient temperature : 24,5°C

Relative humidity : 31%

## RECEIVER SPURIOUS RADIATION

§ 15.209

2481 MHz

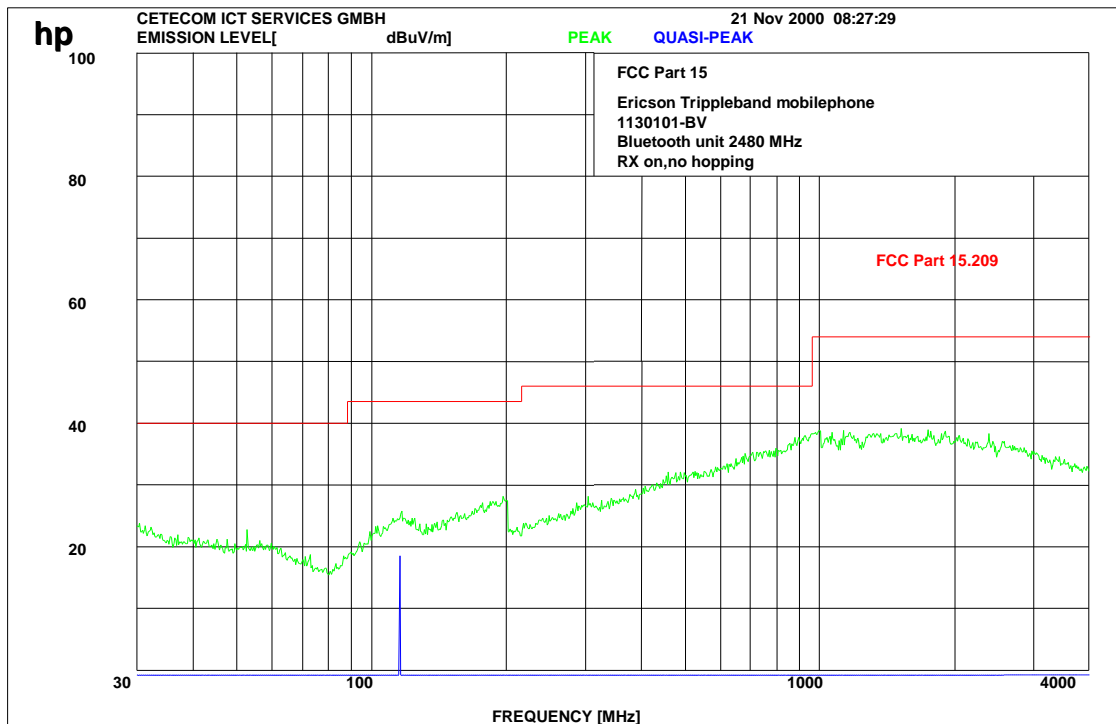

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

### Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 28.11.2000

Page 53 (64)

Equipment under test : 1130101-BV


Ambient temperature : 24,5°C

Relative humidity : 31%

## RECEIVER SPURIOUS RADIATION

§ 15.209

This plot is valid for all three channels up to 12 GHz.

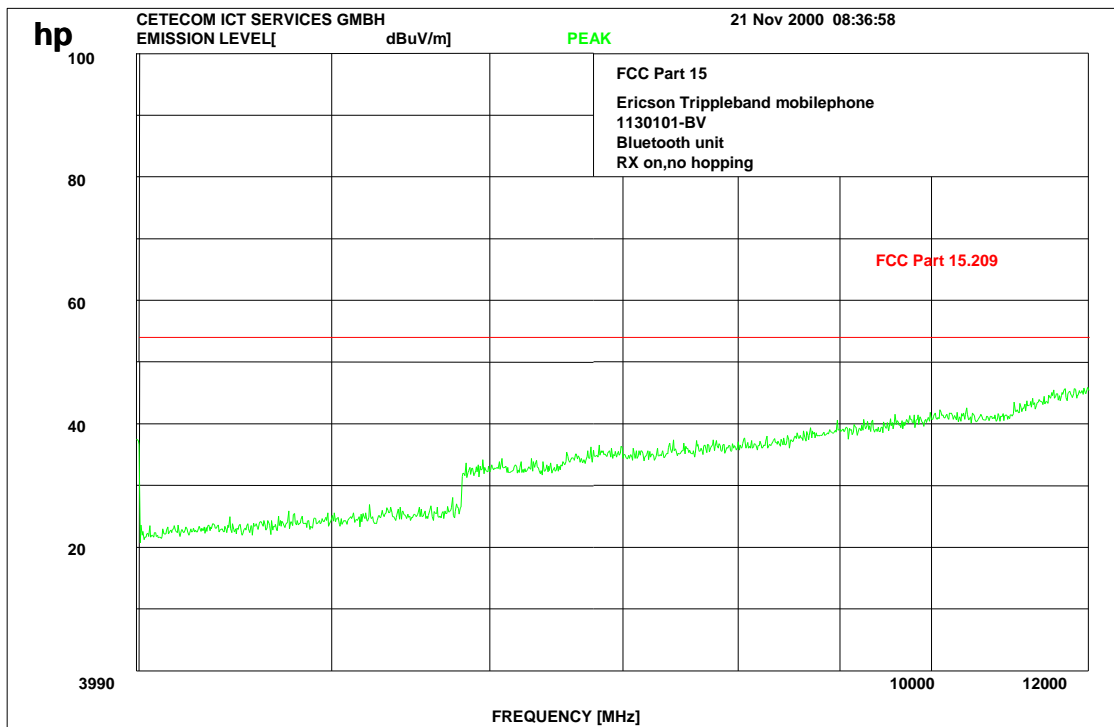

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW: } 1 \text{ MHz}$

The measurements were performed up to 25 GHz with a supplementary preamplifier.

There were no peaks found

### Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 21.11.2000

Page 54 (64)

## TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Funktionsgenerator	AFGU	Rohde & Schwarz	862 480/032
09	Regeltrenntrafo	MPL	Erfi	91350
10	Netznachbildung	NNLA 8120	Schwarzbeck	8120331
11	Relais-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulationsmeter	9008	Racal-Dana	2647
16	Frequenzzähler	5340 A	Hewlett-Packard	1532A03899
17	Absorber Schirmkabine	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenne	3104	Emco	3758
23	Log. Per. Antenne	3146	Emco	2130
24	Double Ridge Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenne	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenne	HL 223	Rohde & Schwarz	825 584/002
29	Relais-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Absorber Schirmkabine		Frankonia	
33	Steuerrechner	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Reciever	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

# CETECOM ICT Services GmbH

Test report nr.: 2-2329-A/00

Issue Date: 21.11.2000

Page 55 (64)

## TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Controler	HD 100	Deisel	100/322/93
37	Relais Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relais Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spektrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Meßempfänger	ESH 3	Rohde & Schwarz	890 174/002
43	Meßempfänger	ESVP	Rohde & Schwarz	891 752/005
44	Biconi Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisationsnetzwerk	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridge G Horn Antenne 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Steuerrechner	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phasen V-Netzwerk	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Stromversorgung	6032A	Rohde & Schwarz	2933A05441
59	HF-Test Empfänger	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	HF-Test Empfänger	ESH3	Rohde & Schwarz	881 515/002
62	Relais Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relais Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				
67				
68				