

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008	
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A
		File H:\RR\SAR_FCC Report\T39m.doc	

EN

## SAR Test Report: T39m

**Date of test:** February 01, 05 and 06, 2001

**Laboratory:** Electromagnetic Near Field and Radio Frequency Dosimetry Laboratory  
Ericsson Mobile Communications AB  
Nya Vattentorget,  
SE-221 83 LUND, Sweden

**Test Responsible:** Ramadan Plicanic, M.Sc.EE  
Senior Staff Engineer, Terminal Antennas  
Ramadan.Plicanic@ecs.ericsson.se  
+46 46 19 38 62

### Statement of Compliance

Ericsson Mobile Communications AB declares under its sole responsibility that the that the product

#### Ericsson Type 1130102-BV (T39m)

to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(none)

© Ericsson Mobile Communications AB, 2001

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Ericsson encourages all feedback, both positive and negative, on this test report.

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008		
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A	File H:\RR\SAR_FCC Report\T39m.doc

EN

## Table of Contents

1. Introduction	3
2. Device Under Test	3
2.1 Antenna description	3
2.2 Device description	3
3. Test equipment	3
3.1 Dosimetric system	3
3.2 Additional equipment	4
4. Electrical parameters of the tissue simulating liquid	4
5. System accuracy verification	4
6. Test results	5
References	6
Appendix 1: SAR distribution comparison for system accuracy verification	7
Appendix 2: SAR distribution plots	9
Appendix 3: Photographs of the device under test	11
Appendix 4: Position of device on Generic Twin Phantom	13
Appendix 5: Probe calibration parameters for ET3DV5 SN:1101	15

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008	
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A
		File H:\RR\SAR_FCC Report\T39m.doc	

EN

## 1. Introduction

In this test report, compliance of the Ericsson T39m portable telephone with RF safety guidelines is demonstrated (applicable RF safety guidelines are given in [1]). The device was tested in accordance with the latest available test guidelines [1]. Detailed procedures of the test are described in the *Ericsson SAR Measurement Specification* [2].

## 2. Device Under Test

### 2.1 Antenna description

<b>Type</b>	Fixed stub	
<b>Location</b>	Left side	
<b>Dimensions</b>	length	25 mm
	width at base	12/15 mm
<b>Configuration</b>	Meander	

### 2.2 Device description

<b>Device model</b>	T39m
<b>Serial number</b>	A5103JL3SK
<b>Mode</b>	1900 TDMA
<b>Multiple Access Scheme</b>	TDMA
<b>Maximum Output Power Setting<sup>1</sup></b>	29.0 dBm
<b>Factory Tolerance in Power Setting</b>	± 0.5dB
<b>Maximum Peak Output Power<sup>2</sup></b>	29.5 dBm
<b>Duty Cycle</b>	1 / 8
<b>Transmitting Frequency Range</b>	1850 – 1910 MHz
<b>Prototype or Production Unit</b>	Prototype

## 3. Test equipment

### 3.1 Dosimetric system

SAR measurements were made using the DASY3 professional system (software version 3.1c), manufactured by Schmid & Partner Engineering AG and installed Juny, 1996. The total SAR assessment uncertainty ( $K = 1$ ) of the system is  $\pm 16\%$  and includes a  $+15\%$  offset (overestimation). The extended uncertainty ( $K = 2$ ) is  $\pm 32\%$  with a  $+15\%$  offset. This results in a total uncertainty range of  $-1\%$  to  $+31\%$  for  $K = 1$ , or  $-17\%$  to  $+47\%$  for  $K = 2$ . The equipment list is given below.

<b>Description</b>	<b>Serial Number</b>	<b>Due Date</b>
DASY3 DAE V2	215	5/01
E-field probe ETDV4	1101	5/01
Dipole Validation Kit, D1800V2	228	5/02

<sup>1</sup> This is the conducted power measured at the antenna port when the device is set to its highest power setting. It is measured at the middle of the transmit frequency band. Note that the output power may be different at other frequencies.

<sup>2</sup> This equals the maximum output power setting plus the factory tolerance.

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008	
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A
		File H:\RR\SAR_FCC Report\T39m.doc	

EN

### 3.2 Additional equipment

Description	Serial Number	Due Date
Signal Generator ESG-D4000A	INV 562935	4/01
Dielectric probe kit HP 85070B	INV 443029	7/02
Network analyzer HP 8753C	INV 421670	6/01
Power meter R&S NRVD	INV 483920	12/01
Power sensor R&S NRV-Z5	INV 2334	12/01
Wavetek 4106GPP	INV 462991	7/01

### 4. Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity,  $\epsilon_r$ , and the conductivity,  $\sigma$ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density,  $\rho$ , entered into the DASY3 program is also given. Recommended limits for maximum permittivity, minimum conductivity and maximum mass density are also shown [3]. It is seen that the measured parameters result in an overestimation of SAR compared to the recommended values.

$f$ (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			$\epsilon_r$	$\sigma$ (S/m)	$\rho$ (g/cm <sup>3</sup> )
1800	Head	Measured, 01/31/01	38.1	1.68	1.00
		Recommended Limits[3]	43.5	1.15	1.03
	Muscle	Measured, 01/31/01	38.1	1.68	1.00
		Recommended Limits [3]	54.4	1.39	1.04

### 5. System accuracy verification

A system accuracy verification of the DASY3 was performed using the dipole validation kit listed in Section 3.1. The system verification test was conducted on the same day as the measurement of the DUT. The obtained results are displayed in the table below. It is seen that the system is operating within its specification, as the results are within  $\pm 5\%$  of the reference values. At 1800 MHz, reference values are provided by the manufacturer [4]. The distributions of SAR compare well with those of the reference measurements (see Appendix 1).

$f$ (MHz)	Tissue type	Measured / Reference	SAR (W/kg), 1 gram	Dielectric Parameters			Temp. (°C)
				$\epsilon_r$	$\sigma$ (S/m)	$\rho$ (g/cm <sup>3</sup> )	
1800	Head / Muscle	Measured, 01/31/01	37.1	38.1	1.68	1.00	23.9
		Reference [4]	38.84	39.4	1.69	1.00	?

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008	
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A
		File H:\RR\SAR_FCC Report\T39m.doc	

EN

## 6. Test results

The measured 1-gram averaged SAR values of the device are provided in Tables 1 and 2. Also shown are the measured conducted output powers and the temperature of the test facility during the test. The depth of the tissue simulating liquid was 13 cm. A base station simulator was used to control the device during the SAR measurements. The phone was supplied with a fully-charged battery for the tests.

SAR measured against the head is presented in Table 1. The device was tested on the right-hand phantom (corresponding to the right side of the head) and the left-hand phantom. For 1900 TDMA modes, the device was tested at the lowest, middle and highest frequencies of the transmit band.

Mode	Chamber Temp. (°C)	f (MHz)	Output Power (dBm)	SAR, 1g (W/kg)			
				left-hand		right-hand	
				measured	calculated to max. power	measured	calculate to max. power
1900 TDMA	24.2	1850	29.0	0.539	0.6	0.633	0.71
		1880	29.0	0.544	0.61	0.647	0.72
		1910	28.7	0.537	0.64	0.647	<b>0.78</b>

**Table 1: SAR measurement results for the Ericsson T39m telephone at highest possible output power. Measured against the head.**

For body-worn measurements, the device was tested against a flat phantom representing the user's body, using designated carry case. Under measurement was Bluetooth transmitter on. In Table 2, SAR values are provided for the carry case that bring the phone closest to the body (product # SXX 10972/01, R1B).

Mode	Chamber Temp. (°C)	f (MHz)	Output Power (dBm)	SAR, 1g (W/kg)	
				SXX10972/01 R1B	
				measured	calculated to max. power
1900 TDMA	24.0	1850	29.0	0.381	0.43
		1880	29.0	0.413	<b>0.46</b>
		1910	28.7	0.275	0.33

**Table 2: SAR measurement results for the Ericsson T39m telephone at highest possible output power. Measured against the body.**

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008	
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A
		File H:\RR\SAR_FCC Report\T39m.doc	

EN

## References

- [1] C. Törnevik, "Ericsson SAR measurement specification, part 1: Introduction and Purpose," Internal Document ERA/T/U-98:446, February, 1999.
- [2] C. Törnevik, M. Siegbahn, T. Persson, M. Douglas, and R. Plicanic, "Ericsson SAR measurement specification", Internal Document ERA/T/U-98:442, February 1999.
- [3] Federal Communications Commission, "Tissue Dielectric Properties," <http://www.fcc.gov/fcc-bin/dielec.sh>.
- [4] Schmid and Partner Engineering AG, "DASY Dipole Validation Kit," Type: D1800V2, S/N: 217, February, 2000.

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008			
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A	File H:\RR\SAR_FCC Report\T39m.doc	

EN


## Appendix 1: SAR distribution comparison for system accuracy verification



**1800 MHz SAR distribution of validation dipole antenna from system accuracy verification test. Measured with head/muscle simulating tissue on 01/31/01.**

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008	
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A
		File H:\RR\SAR_FCC Report\T39m.doc	

EN

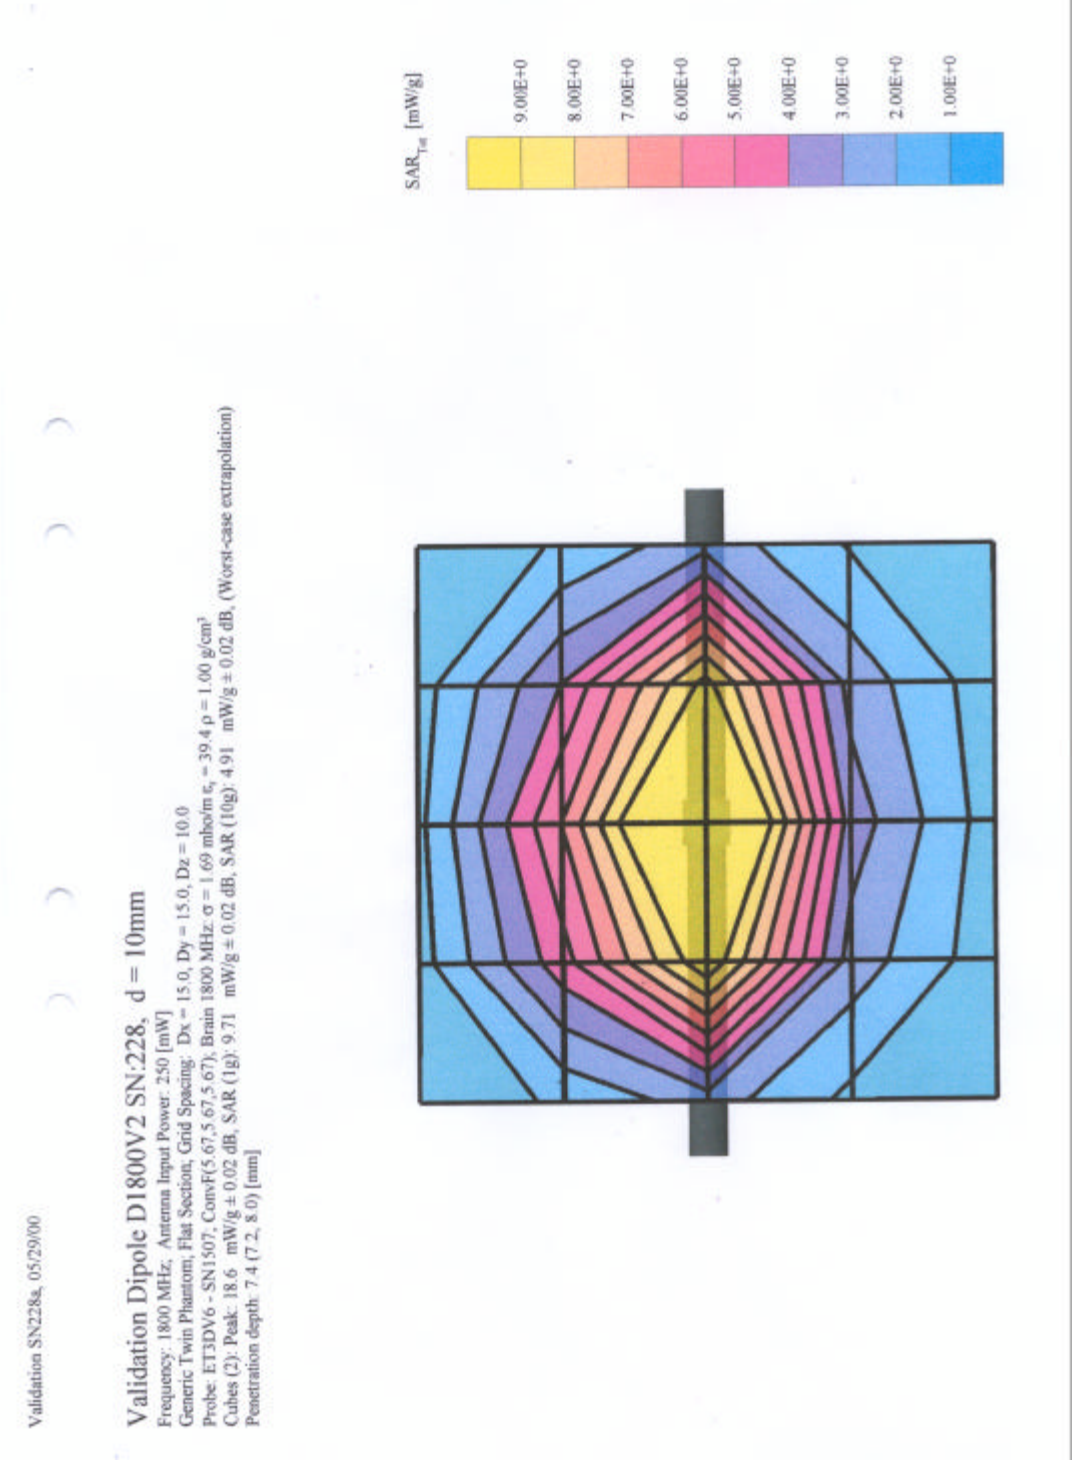


1800 MHz SAR distribution of validation dipole antenna from reference measurement.



Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008	
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A
		File H:\RR\SAR_FCC Report\T39m.doc	

EN


## Appendix 2: SAR distribution plots

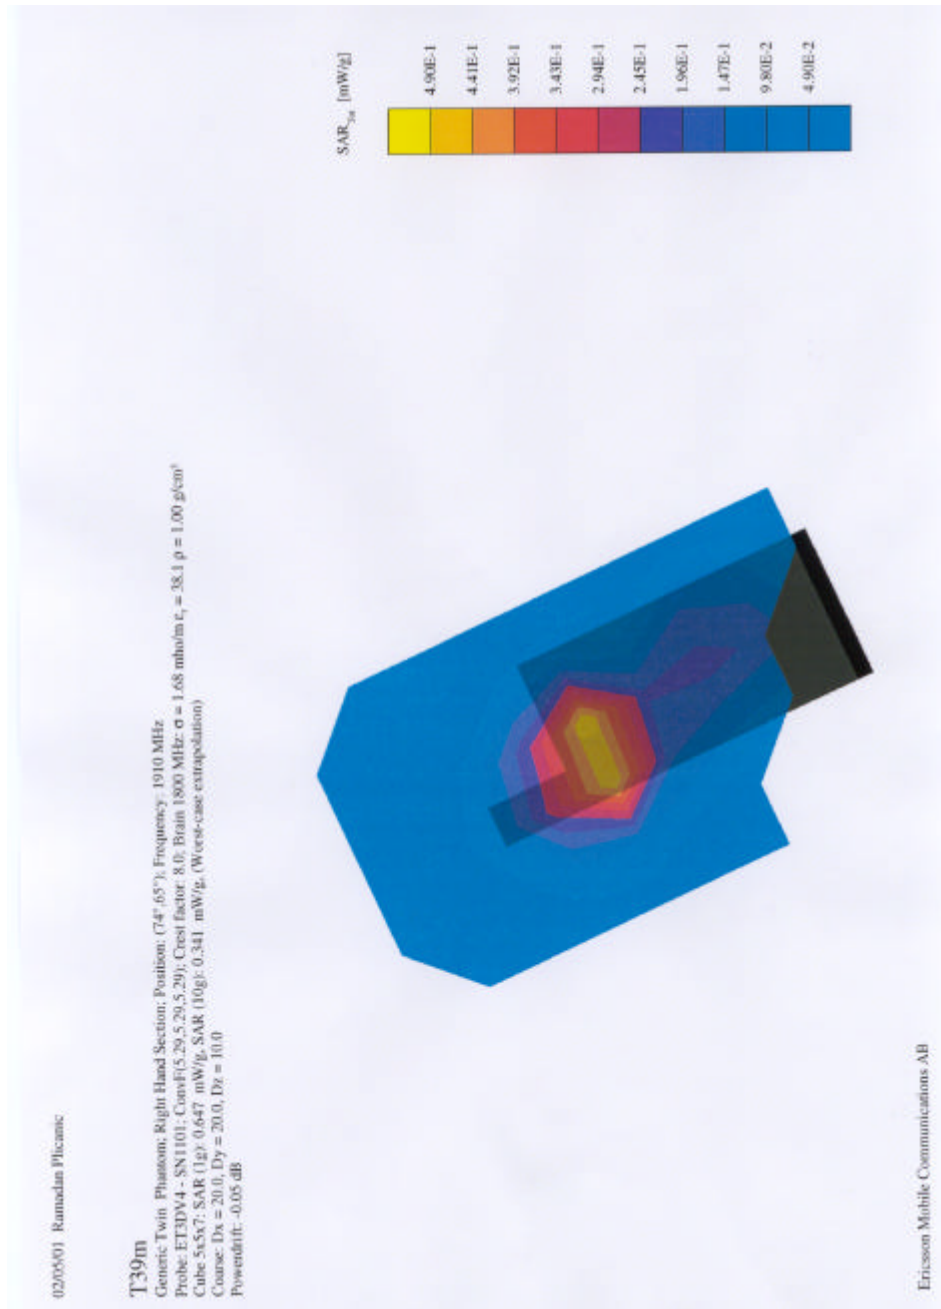

Distribution of maximum SAR in 1900 TDMA mode (at 1910 MHz). Measured against the head.

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008	
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A
		File H:\RR\SAR_FCC Report\T39m.doc	

EN

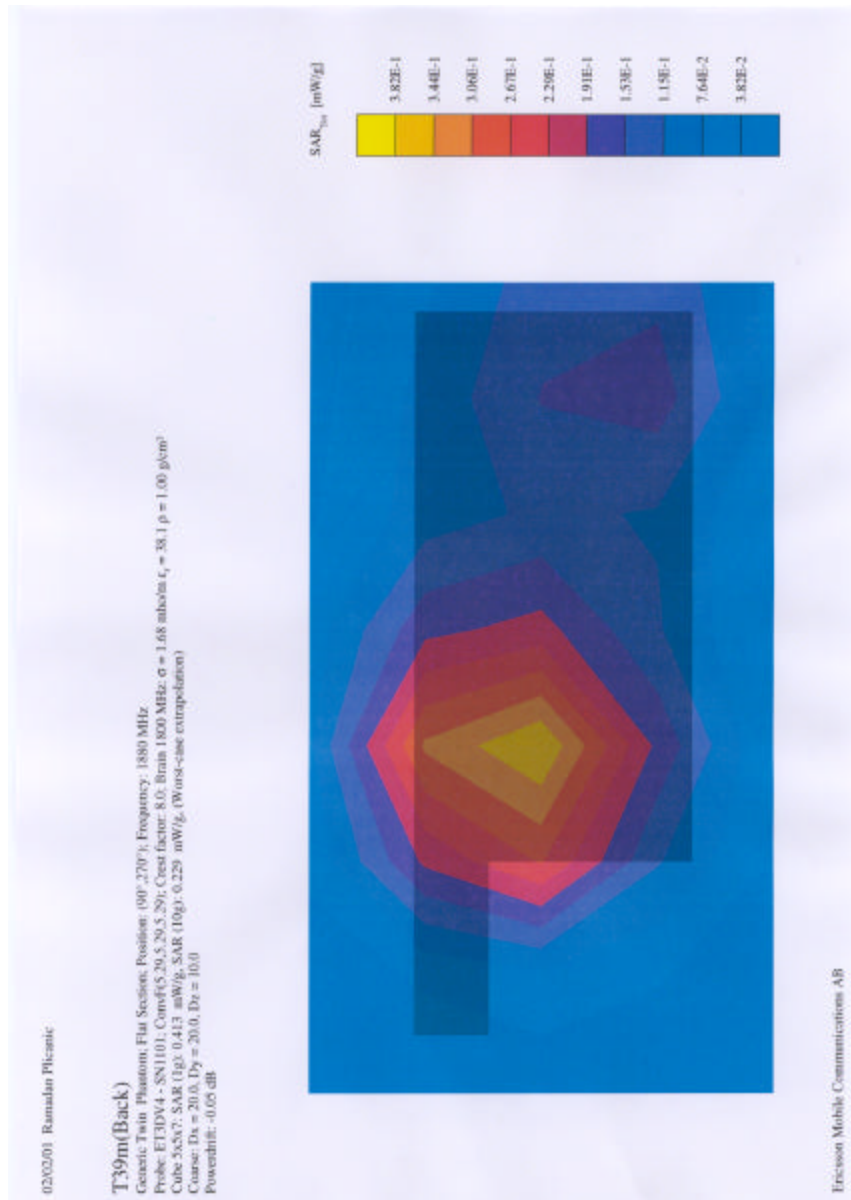

Distribution of maximum SAR in 1900 TDMA mode. Measured against the body.

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008		
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A	File H:\RR\SAR_FCC Report\T39m.doc

EN

**Appendix 3: Photographs of the device under test****Front view of device.**


Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008		
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A	File H:\RR\SAR_FCC Report\T39m.doc

EN

**Side view of device.**

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008		
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A	File H:\RR\SAR_FCC Report\T39m.doc

EN

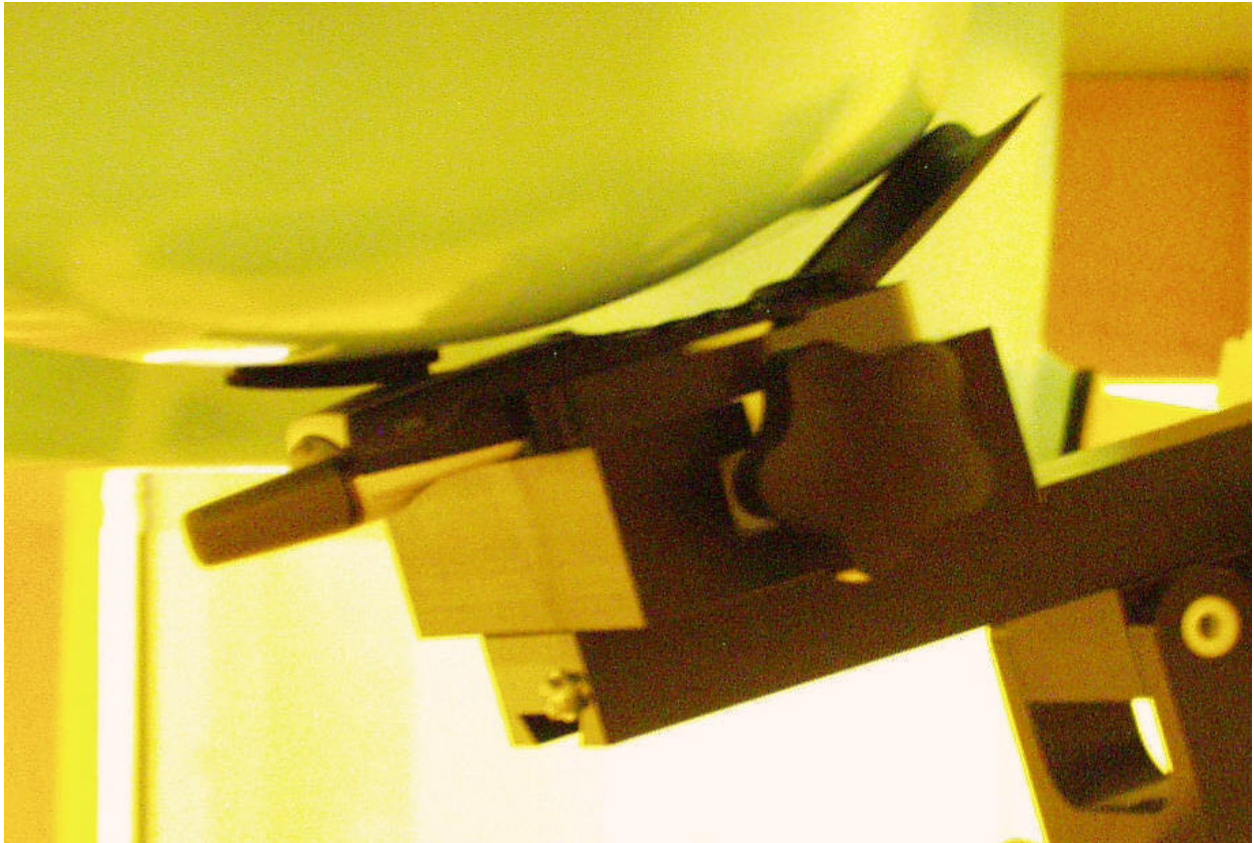**Appendix 4: Position of device on Generic Twin Phantom****Device position against the head.**



Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008	
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A
		File H:\RR\SAR_FCC Report\T39m.doc	

EN



**Device position against the body with accessory SXK 10972/01, R1B.**

Prepared (also subject responsible if other) LD/ECS/GTX/FG Ramadan Plicanic		No. GTX/FG 01:008	
Approved GTX/FG Ramadan Plicanic	Checked ECSRAPL	Date 2001-02-08	Rev A
		File H:\RRISAR_FCC Report\T39m.doc	

EN

## Appendix 5: Probe calibration parameters for ET3DV4 SN:1101

ET3DV4 SN:1101

### DAE2 - Parameters of Probe: ET3DV4 SN:1101

#### Sensitivity in Free Space

NormX	1.23 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.36 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.17 $\mu\text{V}/(\text{V}/\text{m})^2$

#### Diode Compression

DCP X	80 mV
DCP Y	80 mV
DCP Z	80 mV

#### Sensitivity in Tissue Simulating Liquid

Brain	450 MHz	$\epsilon_r = 48 \pm 5\%$	$\sigma = 0.50 \pm 10\% \text{ mho/m}$
ConvF X	5.98	extrapolated	Boundary effect:
ConvF Y	5.98	extrapolated	Alpha 0.46
ConvF Z	5.98	extrapolated	Depth 1.78
Brain	900 MHz	$\epsilon_r = 42.5 \pm 5\%$	$\sigma = 0.86 \pm 10\% \text{ mho/m}$
ConvF X	5.75	$\pm 7\%$ (k=2)	Boundary effect:
ConvF Y	5.75	$\pm 7\%$ (k=2)	Alpha 0.51
ConvF Z	5.75	$\pm 7\%$ (k=2)	Depth 1.92
Brain	1500 MHz	$\epsilon_r = 41 \pm 5\%$	$\sigma = 1.32 \pm 10\% \text{ mho/m}$
ConvF X	5.44	interpolated	Boundary effect:
ConvF Y	5.44	interpolated	Alpha 0.58
ConvF Z	5.44	interpolated	Depth 2.10
Brain	1800 MHz	$\epsilon_r = 41 \pm 5\%$	$\sigma = 1.69 \pm 10\% \text{ mho/m}$
ConvF X	5.29	$\pm 7\%$ (k=2)	Boundary effect:
ConvF Y	5.29	$\pm 7\%$ (k=2)	Alpha 0.61
ConvF Z	5.29	$\pm 7\%$ (k=2)	Depth 2.19

#### Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.9 $\pm$ 0.2	mm