


SK TECH CO., LTD.

Page 1 of 13

Certificate of Compliance

Test Report No.:	SKTOS-01053				
NVLAP CODE :	200220-0				
Applicant:	GTT CO., LTD.				
Applicant Address:	Suite 509, Pungsan Apt. Factory, 1141-2, Baeksuk-dong, Ilsan-gu, Koyang-shi, Kyounggi-do, 411-360, Korea				
Product:	LCD Monitor				
FCC ID:	PC3GM-160	Model No.:	GM-160		
Receipt No.:	SKE20010404-263	Date of receipt:	Apr. 04, 2001		
Date of Issue:	Apr. 17, 2001				
Testing location:	SK TECH CO., LTD. 820-2, Wolmoon-Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea				
Test Standards:	ANSI C63.4 / 1992				
Rule Parts:	FCC part 15 Subpart B				
Equipment Class :	Class B Digital Device Peripheral				
Test Result:	The above mentioned product has been tested and passed.				
Prepared by: E.K.Seong	Tested by: K.W.Song/Engineer	Approved by: J.Y.Hyun /Lab.Manager			
<hr/> Signature	<hr/> Date	<hr/> Signature	<hr/> Date	<hr/> Signature	<hr/> Date
Other Aspects :					
Abbreviations :	· OK, Pass = passed · Fail = failed · N/A = not applicable				

☞

- This test report is not permitted to copy partly without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of one sample of the above mentioned.
- This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.
- We certify that this test report has been based on the measurement standards that is traceable to the national or International standards.

NVLAP Lab. Code: 200220-0



» » **Contents** « «

Contents	2
List of Tables	2
List of Figures	2
List of Photographs	2
1. General	3
2. Test Site	3
2.1 Location	3
2.2 List of Test and Measurement Instruments	4
2.3 Test Date	4
2.4 Test Environment	4
3. Description of the tested samples	5
3.1 Rating and Physical Characteristics	5
3.2 Submitted Documents	5
4. Measurement Conditions	6
4.1 Modes of Operation	6
4.2 List of Peripherals	6
4.3 Type of Used cables	7
4.4 Test Setup	7
4.5 Uncertainty	7
5. EMISSION Test	8
5.1 Conducted Emissions	8
5.2 Radiated Emissions	12

» **List of Tables**

Table 1	List of test and measurement Equipment	4
Table 2	Test Data, Conducted Emissions	11
Table 3	Test Data, Radiated Emissions	13

» **List of Figures**

Figure 1	Spectral Diagram, LINE-PE	9
Figure 2	Spectral Diagram, Neutral-PE	10



1. General

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. All measurements reported herein were performed by SK Tech Co., Ltd. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. Test Site

SK TECH Co., Ltd.

2.1 Location

820-2, Wolmoon Ri, Wabu-Up, Namyangju-Si, Kyunggi-Do, Korea

The test site is in compliance with ANSI C63.4/1992 for measurement of radio interference.



2.2 List of Test and Measurement Instruments

Table 1 : List of Test and Measurement Equipment

- **Conducted Emissions**

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESHS10	862970/019	04.2001
Artificial Mains Network	KNW-407	M63284	07.2001
EMI Receiver	ESHS10	385871/002	11.2001
Artificial Mains Network	ESH3-Z5	836679/018	11.2001
Conducted Cable	N/A	N/A	07.2001

- **Radiated Emissions**

Kind of Equipment	Type	S/N	Calibrated until
EMI Receiver	ESVS 10	825120/013	04.2001
Spectrum Analyzer	R3361A	11730187	07.2001
Amplifier	8447F	3113A05153	05.2001
Log Periodic Antenna	UHALP9107	91071238	04.2001
Biconical Antenna	BBA9106	N/A	04.2001
Open Site Cable	N/A	N/A	07.2001
Antenna Mast	5907	N/A	N/A
Antenna & Turntable controller	5906	91X519	N/A
Amp & Receiver connection cable	N/A	N/A	07.2001
Amp & Spectrum connection cable	N/A	N/A	07.2001
50Ω Switcher	MP59B	M93083	07.2001

2.3 Test Date

Date of Application : Apr. 04, 2001

Date of Test : Apr. 14, 2001

2.4 Test Environment

See each test item's description.



3. Description of the tested samples

The EUT is LCD MONITOR.

3.1 Rating and Physical Characteristics

Panel	Type	Amorphous active matrix TFT-LCD
	Active area	15.7" diagonal
	Pixel format	1280(H) x 1024(V)
	Pixel pitch	0.243mm x 0.243mm
	Color depth	8 bit, 16M colors
	Brightness	200cd/ m ²
	Display size	311.040mm x 248.832mm
	Viewing angle	U/D: 45° /45° , R/L : 60° /60°
	Interface	LVDS
	Backlight	2CCFT
	Contrast ratio	250:1(Typ.)
Resolution Support		SXGA 1280 x 1024(max)
Power Consumption	On working Off	<30 watt <4watt
Plug & Play		DDC1/DDC2B
Power Saving		VESA DMPS
Power Supply Adapter	Input Output	AC 100V ~ 240V, 50~60Hz 12V DC

3.2 Submitted Documents

N/A



4. Measurement Conditions

Operating of EUT voltage is 12V DC supplied by the adaptor which is structural element for EUT.

(Adaptor Input Voltage : AC 120V, 60Hz)

4.1 Modes of Operation

The EUT was in the following operation mode during all testing;

EUT is connected with PC by video interface cable.

Test is made on the mode of scrolling "H" and playing audio file.

4.2 List of Peripherals

Description	Manufacturer	Model Name	Serial No.	FCC ID
Printer	H.P	2225C	3245S12493	DSI6XU2225
Keyboard	LG-IBM	LKB-0107	90602892	N/A
Mouse 1	Logitech	M-S48	LZA91450139	DZL211153
Mouse 2	Logitech	M-BE55	LZE02551778	DoC
Mouse 3	A4 Tech	AM-5E	951237243	H8GAM555P
Speaker	FAN HAI DIAN	CMK660	N/A	DoC
Mic	LG Electronics	N/A	N/A	N/A
Adaptor (for EUT)	AULT INC	PW160	N/A	N/A

Personal Computer

Mother board	Micro-Star	MS-6161	96K6262664G1144716	DoC
Power supply	HIPRO	HP-235ATXA6	F3-9911252206	DoC
FDD Drive	Panasonic	JU-257A604P	62638	DoC
HDD	Quantum	Pro Drive LPS	9442203B	DoC
CD-ROM Drive	LG	GCD-R560B	6023002365	BEJGCD-R560B



4.3 Type of Used Cables

Description	Length	Type of shield	Manufacturer	Remark
PC power cable	1.5m	Non-shield	None	
Printer power cable	1.5m	Non-shield	None	
Printer interface cable	1.6m	Shield	None	
Video interface cable	1.5m	Shield	None	
USB Cable	1.2m	Non-shield	None	
Mouse 1 interface cable	1.2m	Shield	None	
Mouse 2 interface cable	1.2m	Shield	None	
Mouse 3 interface cable	1.2m	Shield	None	
Keyboard interface cable	1.2m	Shield	None	
Speaker power cable	1.8m	Non-shield	None	
Speaker interface cable	1.2m	Shield	None	
Mic interface cable	1.2m	Non-shield	None	
Adaptor cable	1.5m	Non-shield	None	

4.4 Test Setup

The test setup photographs showed the external supply connections and interfaces.

4.5 Uncertainty

1) Radiated disturbance

$$U_c \text{ (Combined standard Uncertainty)} = \pm 1.9 \text{ dB}$$

$$\text{Expanded uncertainty } U = K U_c$$

$$K = 2$$

$$\therefore U = \pm 3.8 \text{ dB}$$

2) Conducted disturbance

$$U_c = \pm 0.88 \text{ dB}$$

$$U = K U_c = 2 \times U_c = \pm 1.8 \text{ dB}$$



5. EMISSION Test

5.1 Conducted Emissions

Result:**Pass**

The line-conducted facility is located inside a 2.0M x 3.6M x 7.2M shielded enclosure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 604-05.

A 1m x 1.5m wooden table 80cm. high is placed 40cm. away from the vertical wall and 1.5m away from the side wall of the shielded room. ROHDE & SCHWARZ Model ESH3-Z5 (10kHz-30MHz) 50ohm/50 uH Line-Impedance Stabilization Networks(LISNs) are bonded to the shielded room. The EUT is powered from the ROHDE & SCHWARZ LISN and the support equipment is powered from the ROHDE & SCHWARZ LISN. Power to the LISNs are filtered by a high-current high-insertion loss Lindgren enclosures power line filters (100dB 14kHz-10GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2".

If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the ROHDE & SCHWARZ LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 450kHz to 30MHz with 100msec. sweep time.

The frequency producing the maximum level was reexamined using EMI/field Intensity Meter (ESHS 10) and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.

**SK TECH CO., LTD.**


Page 9 of 13

Figure 1 : Spectral Diagram, LINE - PE

LCD MONITOR
CONDUCTED DISTURBANCE
EUT: GM 160
Manuf:
Op Cond:
Operator:
Test Spec:
Comment: LINE-PE

14 Apr 2001 12:11

Scan Settings	(1 Range)	Receiver Settings
Start	Frequencies	
450kHz	Stop 30MHz	Step 10kHz
		IF BW 10kHz
		Detector PK
		M-Time 100msec
		Atten Auto
		Preamp OFF
		OpRge 60dB
Final Measurement:		
	Detector: X QP	
	Meas Time: 1sec	
	Peaks: 8	
	Acc Margin: 25 dB	

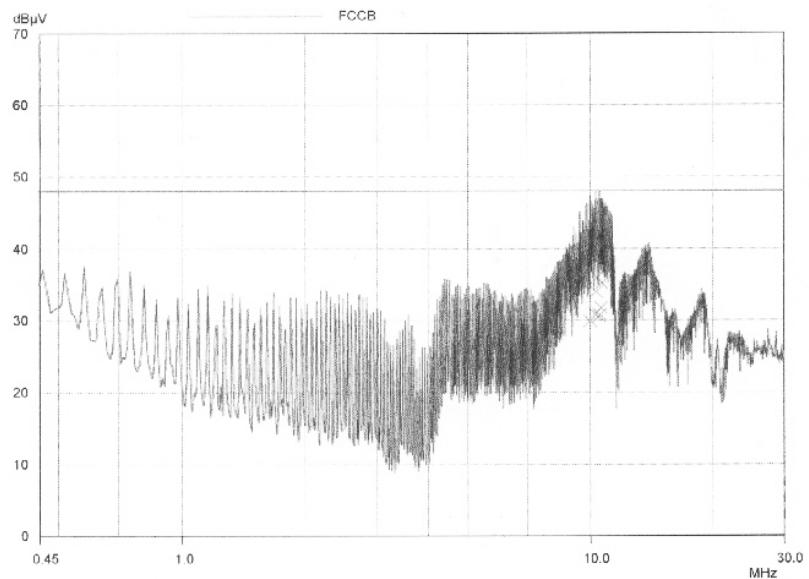

**SK TECH CO., LTD.**


Page 10 of 13

Figure 2 : Spectral Diagram, NEUTRAL – PE

LCD MONITOR
CONDUCTED DISTURBANCE
EUT: GM-160
Manuf:
Op Cond:
Operator:
Test Spec:
Comment: NEUTRAL-PE

14 Apr 2001 11:56

Scan Settings		(1 Range)			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M Time	Atten	Preamp	OpRge	
450kHz	30MHz	10kHz	10kHz	PK	100msec	Auto	OFF	60dB	
<hr/>									
Final Measurement:	Detector:	X QP							
	Meas Time:	1sec							
	Peaks:	8							
	Acc Margin:	25 dB							

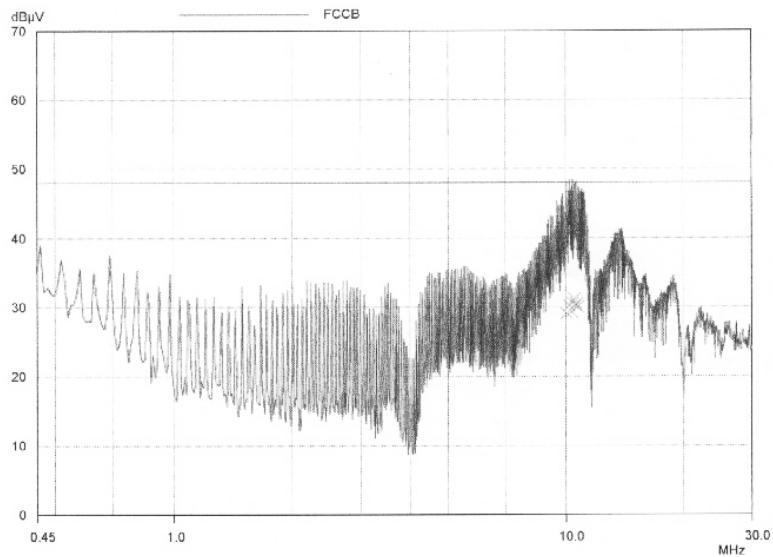

**Table 2: Test Data, Conducted Emissions**

Frequency (MHz)	(1)Reading (dB μ V)	Line	(2)C/F (dB)	(3)C/L (dB)	(4)Actual (dB μ V)	(5)Limit (dB μ V)	(6)Margin (dB)
0.463	39.4	A	0.1	0.1	39.6	48.0	8.4
0.577	38.8	A	0.1	0.1	39.0	48.0	9.0
11.057	42.2	B	0.3	0.5	43.0	48.0	5.0
13.032	35.0	A	0.4	0.6	36.0	48.0	12.0

NOTES:

1. All modes of operation were investigated and the worst-case emission are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. Line A = LINE-PE, Line B = NEUTRAL-PE
6. C/F = Correction Factor
7. C/L = Cable Loss

♠ Margin Calculation

$$(6)\text{Margin} = (5)\text{Limit} - (4)\text{Actual}$$

$$[(4)\text{Actual} = (1)\text{Reading} + (2)\text{C/F} + (3)\text{C/L}]$$



5.2 Radiated Emissions

Result :**Pass**

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME.

Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found.

The spectrum was scanned from 30 to 300 MHz using biconical antenna and from 300 to 1000 MHz using log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using SCHWARZBECK dipole antennas. The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with FRP.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter(ESVS 10) and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test.

Each EME reported was calibrated using self-calibrating mode.

**Table 3 : Test Data, Radiated Emissions**

Frequency (MHz)	Pol.	Height [m]	Angle [°]	(1) Reading (dB μ V)	(2) AFCL (dB/m)	(3) Actual (dB μ V/m)	(4) Limit (dB μ V/m)	(5) Margin (dB)
69.24	V	1.0	170	29.4	7.3	36.7	40.0	3.3
162.02	V	1.2	73	21.1	17.4	38.5	43.5	5.0
653.74	V	1.6	245	11.0	27.4	38.4	46.0	7.6
685.20	V	2.8	201	7.1	28.8	35.9	46.0	10.1
866.36	H	4.0	150	4.4	30.5	34.9	46.0	11.1
960.86	H	4.0	102	3.4	32.9	36.3	46.0	9.7

Table. Radiated Measurements at 3-meters

NOTES:

1. All modes of operation were investigated and the worst-case emission are reported.
2. All other emission are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. AFCL = Antenna factor and cable loss
6. H = Horizontal, V = Vertical Polarization

♠ Margin Calculation

$$(5) \text{Margin} = (4) \text{Limit} - (3) \text{Actual}$$

$$[(3) \text{Actual} = (1) \text{Reading} + (2) \text{AFCL}]$$