

Nemko Test Report: 2L0315RUS1

Applicant: Wavetronix
5314 North 250 West Suite # 110
Provo, Utah 84604

Equipment Under Test: SmartSensor 105
(E.U.T.)

In Accordance With: **FCC Part 15, Subpart C**
For Operation Within The Bands 902-928 MHz,
2435-2465 MHz, 5785-5815 MHz, 10500-10550 MHz,
24075-24175 MHz Intentional Radiators Used As
Field Disturbance Sensors Excluding Perimeter
Protection Systems

Tested By: Nemko Dallas Inc.
802 N. Kealy Ave
Lewisville, TX 75057

Authorized By:



ager

Date: 7/22/02

Total Number of Pages: 19

Table of Contents

| | |
|--|----|
| Table of Contents | 2 |
| Section 1. Summary of Test Results | 3 |
| Section 2. Equipment Under Test (E.U.T.) | 5 |
| Section 3. Equipment Configuration | 7 |
| Section 4. Radiated Emissions | 8 |
| Section 5. Block Diagrams | 12 |
| Section 6. Test Equipment List | 14 |
| RESTRICTED BANDS | 15 |
| Section A Restricted Bands of Operation | 16 |
| RADIATED EMISSION LIMITS | 17 |
| Radiated Emission Limits | 18 |

EQUIPMENT: SmartSensor 105**Section 1. Summary of Test Results**

Manufacturer: Wavetronics

Model No.: 105

Sample No.: S01

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.245. All tests were conducted using measurement procedure ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

☐

New Submission

☒

Production Unit

☒

Class II Permissive Change

☐

Pre-Production Unit

☐☐☐

Equipment Code

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST
SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".

**NVLAP LAB CODE: 100426-0**

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

*EQUIPMENT: SmartSensor 105***Summary Of Test Data**

| Name of Test | Paragraph Number | Results |
|-------------------------------|-------------------------|----------------|
| Radiated Emissions | 15.231(b) | Complies |
| Powerline Conducted Emissions | 15.207 | N/A |

Footnotes:

The device is DC powered. The power is supplied by an external DC source, typically a battery.

Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Frequency Range: 10.525 GHz +/- 0.5 MHz

Supply Power Requirement: 9-36 Vdc

EQUIPMENT: SmartSensor 105

Description of E.U.T.

The SmartSensor 105 is designed as a Field Disturbance Sensor to operate in the 10.50 GHz to 10.55 GHz band. The end user has no control over the RF set up of the device, but may adjust mounting height and angle to achieve optimum performance.

Description of Changes for Class II Permissive Change

A change was made to the RF Mixer, and Frequency control circuitry. The waveform generator was also modified slightly.

Refer to separate exhibit for further details.

Modifications Incorporated in E.U.T.

Not Applicable

EQUIPMENT: SmartSensor 105

Section 3. Equipment Configuration

Equipment Configuration List:

| Item | Description | Model No. | Serial. | Rev. |
|------|-------------|-----------|---------|------|
| (A) | SmartSensor | 105 | | |
| (B) | | | | |
| (C) | | | | |
| (D) | | | | |
| (E) | | | | |
| (F) | | | | |
| (G) | | | | |

Inter-connection Cables:

| Item | Description | Length (m) |
|------|-------------|------------|
| (1) | Power cable | Approx 2m |
| (2) | | |
| (3) | | |
| (4) | | |
| (5) | | |
| (6) | | |
| (7) | | |
| (8) | | |

EQUIPMENT: SmartSensor 105

Section 4. Radiated Emissions

| | |
|----------------------------------|-------------------|
| NAME OF TEST: Radiated Emissions | PARA. NO.: 15.245 |
| TESTED BY: David Light | DATE: 7/10/2002 |

Minimum Standard: See Annex B

Test Results: Complies

EQUIPMENT: SmartSensor 105



Nemko Dallas, Inc.

Dallas Headquarters:

802 N. Kealy
 Lewisville, TX 75057
 Tel: (972) 436-9600
 Fax: (972) 436-2667

| Page 1 of 1 | | Radiated Emissions | |
|---|-----------------|-----------------------|---------|
| Job No.: | 2L0315R | Date: | 7/10/02 |
| Specification: | CFR 47, Part 15 | Temperature(°C): | 24 |
| Tested By: | David Light | Relative Humidity(%): | 50 |
| E.U.T.: | 10 GHz FDS | | |
| Configuration: | Typical | | |
| Sample Number: | 1 | | |
| Location: | AC 3 | RBW: | 1 MHz |
| Detector Type: | Peak | VBW: | 1 MHz |
| Measurement distance: See Below | | | |
| Test Equipment Used | | | |
| Antenna: | 1304 | Directional Coupler: | #N/A |
| Pre-Amp: | #N/A | Cable #1: | 1484 |
| Filter: | #N/A | Cable #2: | 1485 |
| Receiver: | 1464 | Cable #3: | 1046 |
| Attenuator #1: | #N/A | Cable #4: | 1083 |
| Attenuator #2: | #N/A | Mixer: | 986 |
| Additional equipment used: 0984, 0985, 0990, 0991, 0989, 0986, 0987, 0988, 0983, 1629, 1628 | | | |
| Measurement Uncertainty: +/- 1.7 dB | | | |

| Frequency (GHz) | Peak Meter Reading (dBuV) | Average Meter Reading (dBuV) | Antenna Factor (dB) | Cable Loss (dB) | Pre-Amp Gain (dB) | Peak Corrected Reading (dBuV/m) | Average Corrected Reading (dBuV/m) | Comment |
|-----------------|---------------------------|------------------------------|---------------------|-----------------|-------------------|---------------------------------|------------------------------------|--|
| | | | | | | | | 3 Meters Limit 148 dBuV/M PEAK 128 dBuV/M AVG |
| 10.525 H | 67.2 | 17.7 | 38.3 | 6.8 | 0.0 | 112.3 | 62.8 | |
| 10.525 V | 42.2 | 29.1 | 38.3 | 6.8 | 0.0 | 87.3 | 74.2 | |
| | | | | | | | | 20 cm Limit 121 dBuV/M PEAK 101 dBuV/M AVG |
| 21.050 H | 51.3 | 41.7 | 40.3 | 8.3 | 50.2 | 49.7 | 33.0 | Noise floor |
| 21.050 V | 51.3 | 41.7 | 40.3 | 8.3 | 50.2 | 49.7 | 33.0 | Noise floor |
| | | | | | | | | |
| 31.575 H | 58.9 | 49.1 | 43.5 | 12 | 35.3 | 79.1 | 62.2 | Noise floor |
| 31.575 V | 58.9 | 49.1 | 43.5 | 12 | 35.3 | 79.1 | 62.2 | Noise floor |
| | | | | | | | | |
| 42.100 H | 37.8 | 28.1 | 39.7 | 0 | 0.0 | 77.5 | 60.7 | Noise floor |
| 42.100 V | 37.8 | 28.1 | 39.7 | 0 | 0.0 | 77.5 | 60.7 | Noise floor |
| | | | | | | | | |
| 52.625 H | 39 | 28 | 41.8 | 0 | 0.0 | 80.8 | 62.7 | Noise floor |
| 52.625 V | 39 | 28 | 41.8 | 0 | 0.0 | 80.8 | 62.7 | Noise floor |
| | | | | | | | | |
| 94.725 H | 53.3 | 43.8 | 46.3 | 0 | 0.0 | 99.6 | 83.0 | Noise floor |
| 94.725 V | 53.3 | 43.8 | 46.3 | 0 | 0.0 | 99.6 | 83.0 | Noise floor |
| | | | | | | | | |

Notes: Average readings were taken using 10 Hz VBW
 Spectrum was searched to the 10th harmonic of carrier. No emissions were detected above the noise floor which was at least 20 dB below the specification limit

Unit was tested at from 7.7-41 Vdc with no effect on carrier power.

EQUIPMENT: SmartSensor 105



Dallas Headquarters:

802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Nemko Dallas, Inc.

Data Plot

Page 1 of 1

20 dB BW

Complete X

Preliminary: _____

Job No.: 2L0315R Date: 7/10/2002

| | | | |
|----------------|-----------------|------------------|----|
| Specification: | FCC Part 15.247 | Temperature(°C): | 24 |
|----------------|-----------------|------------------|----|

| | | | |
|------------|-------------|----------------------|----|
| Tested By: | David Light | Relative Humidity(%) | 50 |
|------------|-------------|----------------------|----|

| | |
|---------|------------|
| E.U.T.: | 10 GHz FDS |
|---------|------------|

| | |
|----------------|-----------------|
| Configuration: | Normal Transmit |
|----------------|-----------------|

Sample Number: S01

Location: AC 3 RBW: 100 kHz

| | | |
|----------------|------|--------------|
| Detector Type: | Peak | VBW: 100 kHz |
|----------------|------|--------------|

Measurement
Distance: 3 m

Test Equipment Used

Antenna: 1304

Directional Coupler: _____

Pre-Amp: _____

| | |
|-----------|------|
| Cable #1: | 1484 |
|-----------|------|

Filter:

Cable #2: 1485

Receiver: 1464

Cable #3: _____

Attenuator #1


Cable #4:

Attenuator #2:

Mixer: _____

Additional equipment used: _____

| | |
|--------------------------|-----------|
| Measurement Uncertainty: | +/-1.7 dB |
|--------------------------|-----------|

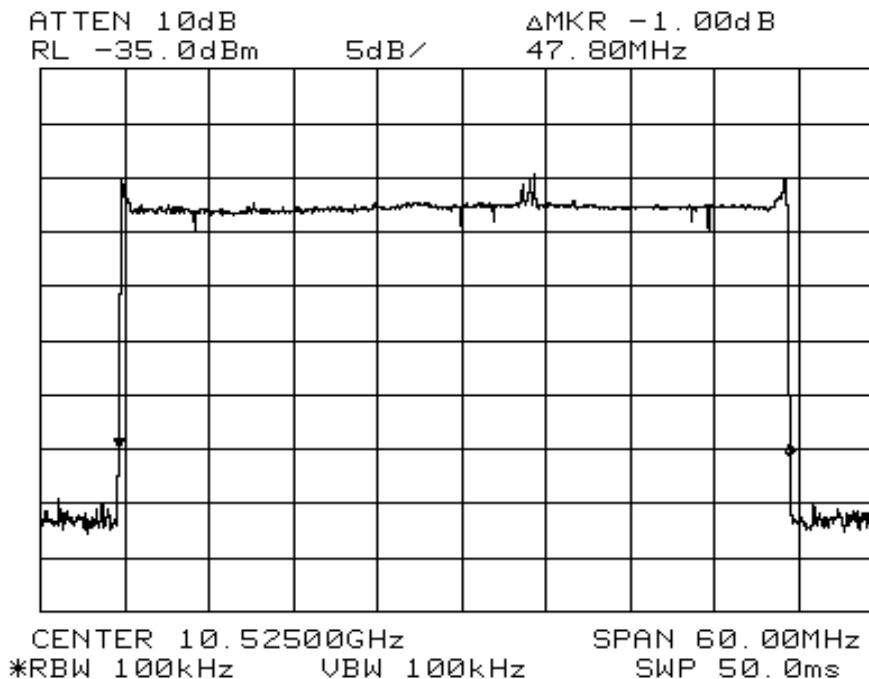

Notes:

EQUIPMENT: SmartSensor 105

Radiated Photographs (Worst Case Configuration)

FRONT VIEW




REAR VIEW




Section 5. Block Diagrams

Radiated Fundamental measurement

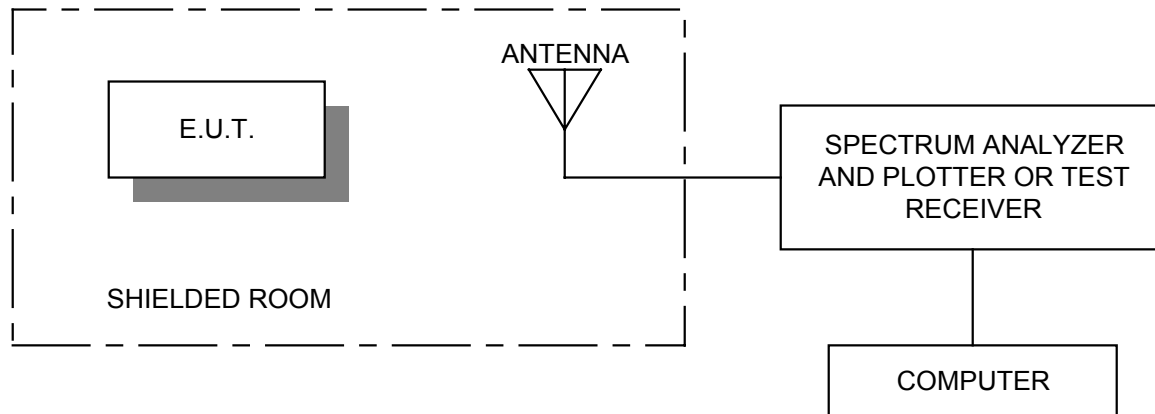

Measurement Setup for Harmonic Emissions

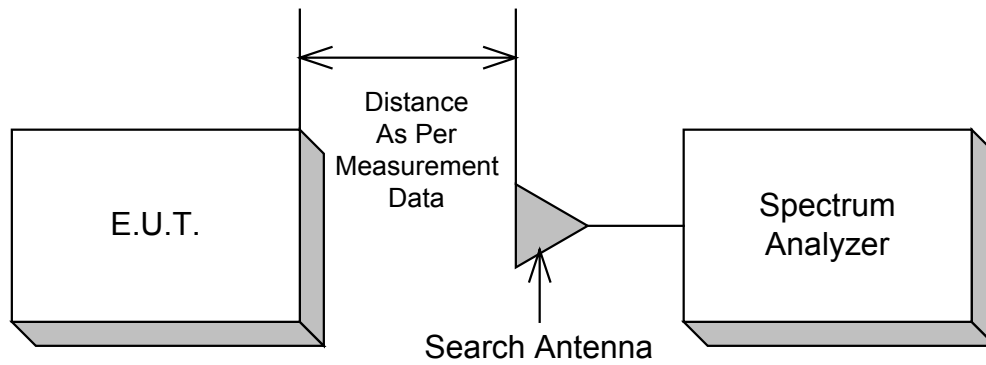

EQUIPMENT: SmartSensor 105**Section 6. Test Equipment List**

| Nemko ID | Description | Manufacturer Model Number | Serial Number | Calibration Date | Calibration Due |
|----------|--------------------|------------------------------------|---------------|---------------------|--------------------|
| 1016 | Pre-Amp | HEWLETT PACKARD 8449A | 2749A00159 | 07/15/02 | 07/15/03 |
| 1304 | HORN ANTENNA | ELECTRO METRICS RGA-60 | 6151 | 07/30/01 | 07/31/03 |
| 1464 | Spectrum analyzer | Hewlett Packard 8563E | 3551A04428 | 01/02/01 | 01/03/03 |
| 984 | HORN ANTENNA | MILLITECH NONE | NONE | CNR | N/A |
| 983 | PRE-AMP, 18-40 GHz | KTL BB1 | 1 | 01/18/02 | 01/18/03 |
| 990 | HORN ANTENNA | MILLITECH NONE | NONE | CNR | CNR |
| 991 | Horn antenna | EMCO 3160-10 | 9704-1049 | CNR | CNR |
| 989 | HARMONIC MIXER | Hewlett Packard 11970U | 2332A00116 | 01/00/00 | 01/00/03 |
| 986 | HARMONIC MIXER | Hewlett Packard 11970V | 2521A01222 | 01/00/00 | 01/00/03 |
| 987 | HARMONIC MIXER | Hewlett Packard 5356D | 2521A00583 | 01/00/00 | 01/00/03 |
| 988 | HARMONIC MIXER | Hewlett Packard 11970A | 2332A01929 | 01/00/00 | 01/00/03 |
| 1484 | Cable 2.0-18.0 Ghz | Storm PR90-010-072 | N/A | 07/15/02 | 07/15/03 |
| 1485 | Cable 2.0-18.0 Ghz | Storm PR90-010-216 | N/A | 07/15/02 | 07/15/03 |
| 1046 | Flex cable 1m | Astrolab Inc. 32022-2-29094K-1M | N/A | 01/18/02 | 01/18/03 |
| 986 | HARMONIC MIXER | Hewlett Packard 11970V | 2521A01222 | 01/00/00 | 01/00/03 |
| 1629 | CABLE, 6 ft | MEGAPHASE 10311 1GVT4 | N/A | CBU | N/A |
| 1628 | CABLE, 6 ft | MEGAPHASE TM26 S1S5 72 | N/A | CBU | N/A |

RESTRICTED BANDS

Section A Restricted Bands of Operation

(a) Except as shown in paragraph (d) of this section , only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|---------------------|---------------------|---------------|-------------|
| 0.090 - 0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.49 - 0.51 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735 - 2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 3.020 - 3.026 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.125 - 4.128 | 37.5-38.25 | 1435-1626.6 | 9.0-9.2 |
| 4.17725 - 4.17775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 4.20725 - 4.20775 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.215 - 6.218 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175 - 6.31225 | 123-138 | 2220-2300 | 14.47-14.5 |
| 8.291 - 8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362 - 8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625 - 8.38675 | 156.7-156.9 | 2655-2900 | 22.01-23.12 |
| 8.41425 - 8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29 - 12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975 - 12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675 - 12.57725 | 322-335.4 | 3600-4400 | Above 38.6 |
| 13.36 - 13.41 | | | |

RADIATED EMISSION LIMITS

Radiated Emission Limits**§15.245 Operation within the bands 902-928 MHz, 2435-2465 MHz, 5785-5815 MHz, 10500-10550 MHz and 24075-24175 MHz.**

- (a) Operation under the provision of this section is limited to intentional radiators used as field disturbance sensors, excluding perimeter protection systems.
- (b) The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental Frequency (MHz) | Field Strength Of Fundamental (millivolts/meter) | Field Strength of Harmonics (millivolts/meter) |
|--|---|---|
| 902-928 | 500 | 1.6 |
| 2435-2465 | 500 | 1.6 |
| 5785-5815 | 500 | 1.6 |
| 10500-10550 | 2500 | 25.0 |
| 24075-24175 | 2500 | 25.0 |

- (1) Regardless of the limits shown in the above table, harmonic emissions in the restricted bands below 17.7 GHz, as specified in §15.205, shall not exceed the field strength limits shown in §15.209. Harmonic emissions in the restricted bands at and above 17.7 GHz shall not exceed the following field strength limits:

- (i) For field disturbance sensors designed for use only within a building or to open building doors, 25 mV/m.
- (ii) For all other field disturbance sensors, 7.5 mV/m.
- (iii) Field disturbance sensors designed to be used in motor vehicles or aircraft must include features to prevent continuous operation unless their emissions in the restricted bands fully comply with the limits given in §15.209. Continuous operation of field disturbance sensors designed to be used in farm equipment; vehicles such as fork-lifts that are intended primarily for use indoors or for very specialized operations. Or railroad locomotives, railroad cars and other equipment which travel on fixed tracks is permitted. A field disturbance sensor will be considered not to be operating in a continuous mode if its operation is limited to specific activities of limited duration (e.g. putting a vehicle in reverse gear, activating a turn signal, etc.).

§15.245, continued

- (2) Field strength limits are specified at a distance of 3 meters.
- (3) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.
- (4) The emission limits shown above are based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

§15.209 Radiated Emission Limits, General Requirements

- (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (millivolts/meter) | Measurement Distance (meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009-0.490 | 2400/F (kHz) | 300 |
| 0.490-1.705 | 2400/F (kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |