

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : MP3 Player
MODEL/TYPE NO : DAH-1700
FCC ID : PCMDAH-1700
APPLICANT : Hyun Won Inc.
4th Floor, e-Venture Center, 74-2, Shinchon 3-Dong, Dong-Gu,
Daegu City, South Korea
Attn.: Jeong Hwan, Ma / Assistant Manager
FCC CLASSIFICATION : Class B personal computers and peripherals
FCC RULE PART(S) : FCC Part 15 Subpart B
FCC PROCEDURE : Certification
TRADE NAME : Hyun Won
TEST REPORT No. : E05.0415.FCC.220N
DATES OF TEST : April 13 – April 15, 2005
DATES OF ISSUE : April 15, 2005
TEST LABORATORY : ETL Inc. (FCC Registration Number : 95422)
#584 Sangwhal-ri, Kanam-myon, Yaju-kun, Kyunggi-do,
469-885, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074

This MP3 Player Model DAH-1700 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2001 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B :

I attest to the accuracy of data. All measurement herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Yo Han, Park

Yo Han, Park / Chief Engineer

ETL Inc.

**#584 Sangwhal-ri, Kanam-myon, Yaju-kun,
Kyunggi-do, 469-885, Korea**



Table of Contents

FCC Measurement Report

1. Introduction
2. Product Information
3. Description of Tests
4. Test Condition
5. Test Results
 - 5.1 Summary of Test Results
 - 5.2 Conducted Emissions Measurement
 - 5.3 Radiated Emissions Measurement
6. Sample Calculations
7. List of test Equipment used for Measurement

- Appendix A. FCC ID Label and Location
- Appendix B. Test Setup Photographs
- Appendix C. External Photographs
- Appendix D. Internal Photographs
- Appendix E. Block Diagram
- Appendix F. User Manual

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name : Hyun Won Inc.

Address : 4th Floor, e-Venture Center, 74-2, Shinchon 3-Dong,
Dong-Gu, Daegu City, South Korea

Attention : Jeong Hwan, Ma / Assistant Manager

- **EUT Type** : MP3 Player
- **Model Number** : DAH-1700
- **FCC ID** : PCMDAH-1700
- **S/N** : N/A
- **FCC Rule Part(s)** : FCC Part 15 Subpart B
- **Test Procedure** : ANSI C63.4-2001
- **FCC Classification** : Class B personal computers and peripherals
- **Dates of Tests** : April 15, 2005
ETL Inc.
EMC Testing Lab. (FCC Registration Number : 95422)
- **Place of Tests** : 584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,
Kyounggi-Do, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No.** : E05.0415.FCC.220N

1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyonggi-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2001 and CISPR publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2001 and registered to the Federal Communications Commission(Registration Number : 95422).

The measurement procedure described in the america national standard for method of measurement of radio-noise emission from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz (ANSI C.63.4-2001) was used in determining radiated and conducted emissions from the Hyun Won Inc., Model: DAH-1700.

2. PRODUCT INFORMATION

2.1 General Remark

The tested model name is DAH-1700. This model has memory chip-set of 128 MB, 256 MB, 512 MB and 1GB. Only, differences are capacity of memory chip-sets.

The tested memory is inside memory chip-set of 1GB. Because this memory chip-set is worst case investigated during the test.

2.2 Equipment Description

The Equipment Under Test (EUT) is the Hyun Won Inc., Model: DAH-1700.

2.3 General Specification

| Class | Items | Specification |
|-------------------------|--------------------------|--|
| FM Tuner | FM Frequency Range | 76 MHz – 108.0 MHz |
| | Headset Output | Left 7 mW + Right 7 mW (16) Max. Volume |
| | S/N ratio | 50 dB |
| | Antenna | Headset / Earphone code antenna |
| Audio | Frequency Characteristic | 20 Hz ~ 20 kHz |
| | Headset Output | Left 20 mW + Right 20 mW (16) Max. Volume |
| | S/N ratio | 90 dB |
| File | File Type | MP3, WMA, OGG, WAV, ASF, JPEG, MPEG4 |
| | Bit Rate | MP3 : 8 kbps – 320 kbps, VBR WMA : 32 – 192 kbps OGG : Q – 1 – Q10 WAV : MS – ADPCM |
| USB | Download Speed | 40 Mbps |
| Recording hours | | 1040 minutes for voice recording |
| Max. Playback hours | | Audio : approx. 12 hours Video : approx. 3 hours |
| Operational Temperature | | - 5 °C – 70 °C |
| Display | | 65000 Color OLED |
| Size (W * H * D mm) | | 58 * 28 * 22 |
| Weight(g) | | 35 (Battery inclusive) |
| Battery | | Lithium Polymer (built – in type) |

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with § 12.2 in ANSI C63.4-2001 "Measurement of information technology equipment ". The measurement were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 /50uH LISN as the input transducer to a spectrum analyzer or a field intensity meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

- Procedure of test

The line-conducted facility is located inside a shielded room 1 m X 1.5 m wooden table 80 cm high is placed 40 cm away from the vertical wall and 1.5 m away from the side wall of the shielded room. Ground of two EMCO 3825/2 LISN are bonded to the reference horizontal ground. The EUT is connected host PC which powered from the EMCO LISN and the support equipment is powered from the other EMCO LISN. Power to the LISN are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the ESHS30 EMI Test Receiver to determine the frequency producing the max. Emission from the EUT. The frequency producing the max. Level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

3. DESCRIPTION OF TESTS

3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-2001 " Measurement of information technology equipment ". The measurements were performed over the frequency range of 30 MHz to 1 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz.

- Procedure of test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determined the frequency producing the max. Emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000 MHz using SchwarzBeck Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10-meters. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. Emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the max emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 EUT operation

| Operating Mode | The worst operating condition |
|---|-------------------------------|
| Stand-by mode | X |
| Test program executed (Data comparison test program) | |

: Worst case investigated during the test.

4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

EUT – MP3 PLAYER

FCC ID : PCMDAH-1700
Model Name : DAH-1700
Serial No. : N/A
Manufacturer : Hyun Won Inc.
Power Supply Type : Lithium Polymer Battery
Power Cord : N/A
Data Cable : USB port : 1, Line-Input port : 1 Ear phone port : 1

Support Unit 1 – Personal computer (DELL)

FCC ID : N/A (DoC)
Model Name : DHM
Serial No. : H9MB71S
Manufacturer : DELL
Power Supply Type : Switching
Power Cord : Non-Shielded, Detachable: 1.2m
Data Port : RGB out:1, DVI out:1, Parallel:1, RS-232:1, PS/2: 2, USB: 4, RJ-45:1
Audio in:1, Audio out:1, MIC in:1

Support Unit 2 – LCD Monitor (ERAE)

FCC ID : OIOELM-150
Model Name : ELM-150B
Serial No. : N/A
Manufacturer : ERAE Electronics Industry Co., Ltd.
Power Supply Type : DC 12V From Adaptor
Power Cord : Non-shielded, Detachable: 1.2m
Data Cable : Shielded 15Pin D-sub, 1.5m

Support Unit 3 – Keyboard (COMPAQ)

FCC ID : N/A (DoC)
Model Name : KB-9963
Serial No. : B26960GBUKO13F
Manufacturer : COMPAQ
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, 1.5m

Support Unit 4 – Mouse (LOGITECH)

FCC ID : DZL211029
Model Name : M-S34
Serial No. : LZC01002314
Manufacturer : LOGITECH
Power Supply Type : N/A
Power Cord : N/A
Data Cable : None-Shielded, 1.2m

Support Unit 5 – Serial Mouse (PETRA)

FCC ID : JKGMUS5S01
Model Name : MUS5S
Serial No. : E183027
Manufacturer : PETRA
Power Supply Type : N/A
Power Cord : N/A
Data Cable : Shielded, 1.2m

Support Unit 6 – Printer (EPSON)

FCC ID : N/A
Model Name : PHOTO 750
Serial No. : 11-03098
Manufacturer : EPSON
Power Supply Type : AC 110V~220V
Power Cord : Non-Shield, 1.5m
Data Cable : Shielded, 1.5m

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

| Test Rule Parts | Measurement Required | Result |
|-----------------|---------------------------------|--------|
| 15.107 | Conducted emissions measurement | Passed |
| 15.109 | Radiated emissions measurement | Passed |

The data collected shows that the **Hyun Won Inc. / MP3 Player / DAH-1700** complies with technical requirements of above rules part 15.107 and 15.109 Class B Limits and CISPR Publication 22.

5. TEST RESULTS

5.2 Conducted Emissions Measurement

| | |
|-----------------------|--|
| EUT | MP3 Player / DAH-1700 (SN: N/A) |
| Limit apply to | FCC Part 15. 107(CISPR Pub.22 Class B) |
| Test Date | April 13, 2005 |
| Operating Condition | Test program executed (Data Comparison Test Program) |
| Environment Condition | Humidity Level : 36 %RH, Temperature : 18 |
| Result | Passed by 13.0 dB |

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.
Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth : 9 kHz)

| Frequency [MHz] | Reading [dBμV] | | Phase (*H/**N) | Limit [dBμV] | | Margin [dB] | |
|--------------------|-------------------|---------|-------------------|-----------------|---------|----------------|---------|
| | Quasi-peak | Average | | Quasi-peak | Average | Quasi-peak | Average |
| 0.188 | 50.7 | — | N | 64.1 | 54.1 | 13.4 | — |
| 0.248 | 39.9 | — | H | 61.8 | 51.8 | 21.9 | — |
| 0.313 | 42.1 | — | H | 59.9 | 49.9 | 17.8 | — |
| 0.377 | 44.0 | — | H | 58.4 | 48.4 | 14.4 | — |
| 0.440 | 42.0 | — | H | 57.1 | 47.1 | 15.1 | — |
| 0.631 | 43.0 | — | H | 56.0 | 46.0 | 13.0 | — |
| 0.876 | 42.6 | — | H | | | 13.4 | — |
| 1.121 | 41.8 | — | H | | | 14.2 | — |
| 1.372 | 42.4 | — | H | | | 13.6 | — |
| 1.630 | 40.6 | — | H | | | 15.4 | — |
| 5.192 | 33.9 | — | H | 60.0 | 50.0 | 26.1 | — |
| 7.010 | 33.6 | — | H | | | 26.4 | — |
| 8.202 | 32.1 | — | H | | | 27.9 | — |
| 14.707 | 35.0 | — | H | | | 25.0 | — |
| 19.352 | 32.4 | — | H | | | 27.6 | — |

NOTES : * H : HOT Line , **N : Neutral Line


1. Margin value = Limit – Reading
2. Measurement were performed at the AC power line of PC inlet in the frequency band of 150 kHz ~ 30 MHz according to the CISPR 22 Class B and it's same as FCC Part 15.107.
3. If the reading Quasi-Peak value is bellowed the average limit, do not test average mode.

Jae Young Kwon

Test Engineer: Jae Young, Kwon


5. TEST RESULTS

Line: HOT Line

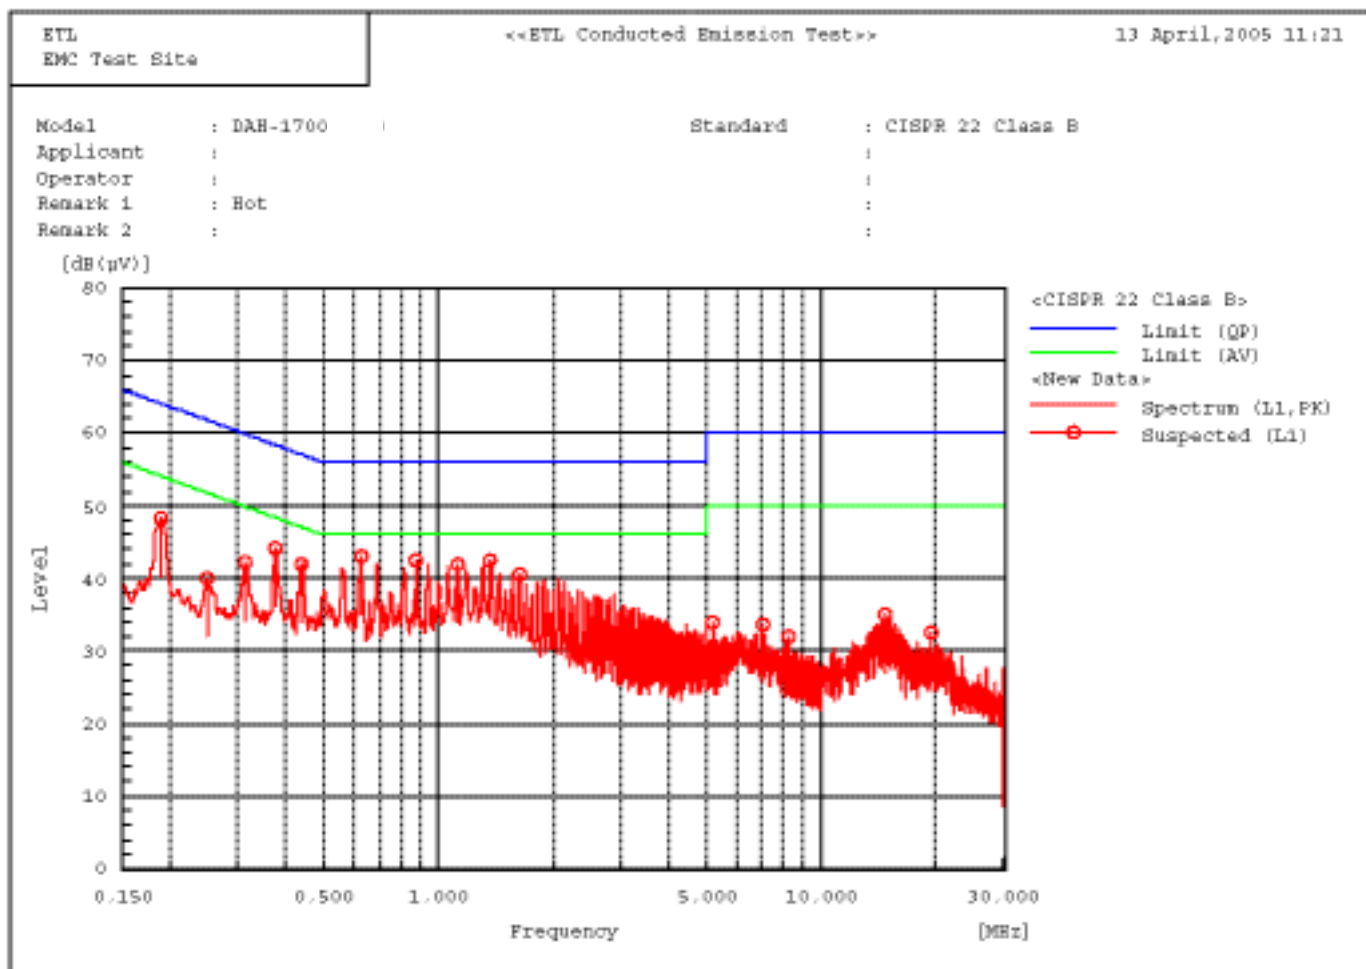

5. TEST RESULTS

Line: Neutral Line

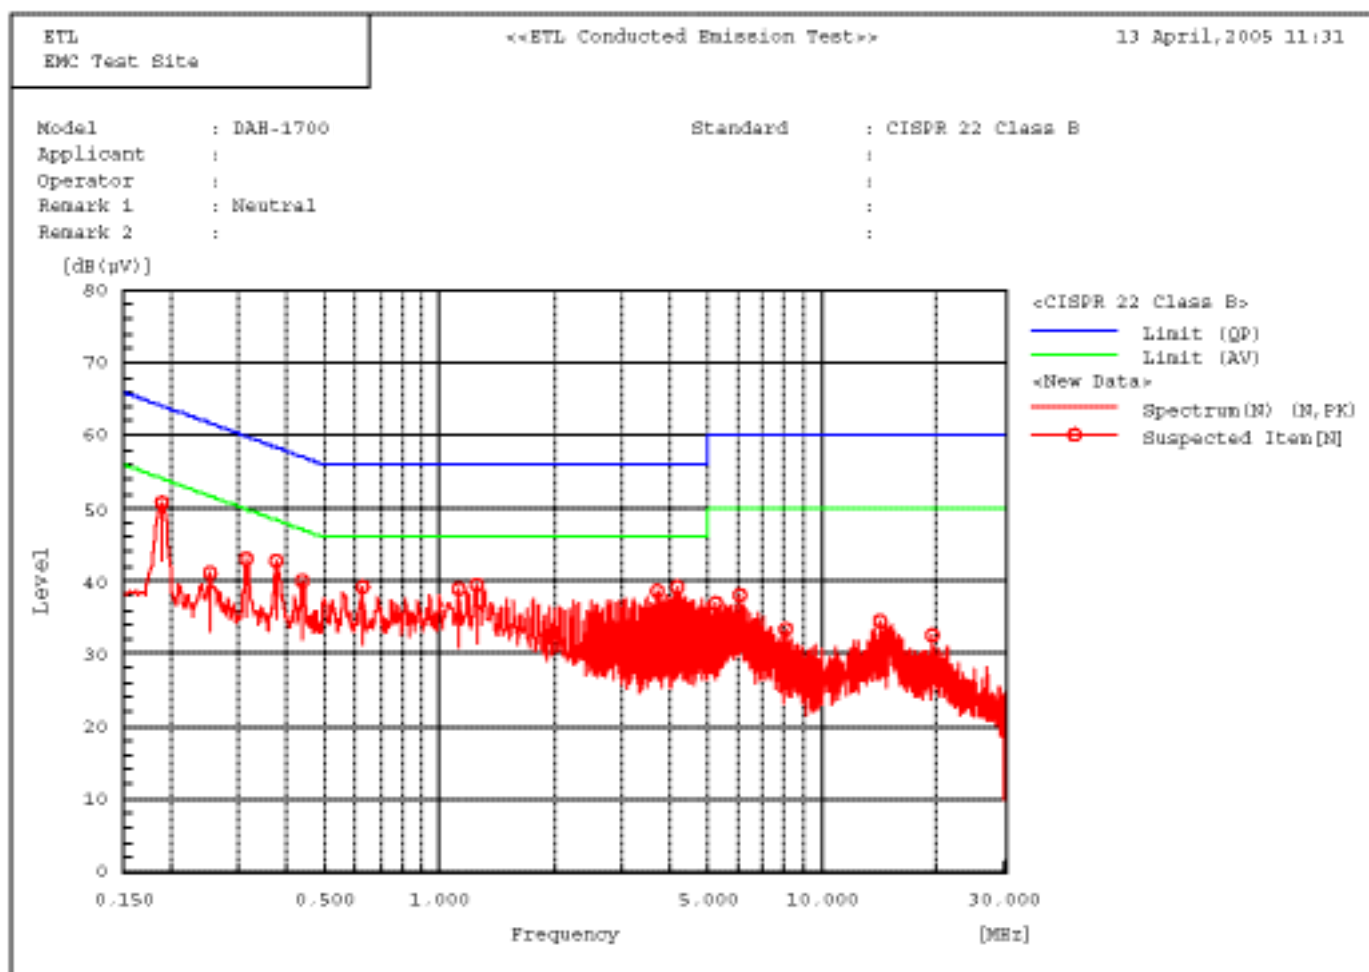

5. TEST RESULTS

5.3 Radiated Emissions Measurement

| | |
|------------------------------|--|
| EUT | MP3 Player / DAH-1700 (SN: N/A) |
| Limit apply to | FCC Part 15. 107(CISPR Pub.22 Class B) |
| Test Date | April 13, 2005 |
| Operating Condition | Test program executed (Data Comparison Test Program) |
| Environment Condition | Humidity Level : 31 %RH, Temperature : 17 |
| Result | Passed by 3.10 dB |

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.
Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 120 kHz)

| Frequency [MHz] | Reading [dBμV] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB] | Result [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------------|-----------------------|--------------------|-----------------|-----------------|----------------|-------------|
| 119.78 | 5.05 | V | 12.06 | 3.10 | 20.20 | 30.0 | 9.80 |
| 123.83 | 5.70 | H | 12.34 | 3.16 | 21.20 | 30.0 | 8.80 |
| 166.35 | 10.55 | V | 12.58 | 3.76 | 26.90 | 30.0 | 3.10 |
| 196.73 | 5.82 | V | 10.29 | 3.98 | 20.10 | 30.0 | 9.90 |
| 216.98 | 9.06 | V | 10.52 | 4.42 | 24.00 | 30.0 | 6.00 |
| 225.75 | 10.12 | V | 10.72 | 4.56 | 25.40 | 30.0 | 4.60 |
| 239.93 | 10.67 | H | 11.03 | 4.70 | 26.40 | 37.0 | 10.60 |
| 333.25 | 6.60 | H | 13.81 | 5.90 | 26.30 | 37.0 | 10.70 |
| 399.75 | 5.24 | H | 15.26 | 6.60 | 27.10 | 37.0 | 9.90 |
| 420.75 | 5.48 | H | 16.07 | 6.85 | 28.40 | 37.0 | 8.60 |
| 480.25 | 4.93 | H | 17.23 | 7.44 | 29.60 | 37.0 | 7.40 |
| 539.75 | 7.55 | H | 17.22 | 8.24 | 33.00 | 37.0 | 4.00 |

NOTES : * H : Horizontal polarization , ** V : Vertical polarization

1. Result = Reading + Antenna factor + Cable loss
2. Margin value = Limit - Result
3. The measurement was performed for the frequency range 30 MHz ~ 1000 MHz according to the CISPR 22 Class B

Jae Young Kwon

Test Engineer: Jae Young, Kwon

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V/m) = 20 \log_{10} (\mu V / m) : \text{Equation 1}$$

$$dB\mu V = dBm + 107 : \text{Equation 2}$$

Example : @ 166.35MHz

$$\text{Class B Limit} = 31.63 \mu V/m = 30 \text{ dB } \mu V/m$$

$$\text{Reading} = 10.55 \text{ dB } \mu V$$

$$\text{Antenna Factor + Cable Loss} = 12.58 + 3.76 = 16.34 \text{ dB/m}$$

$$\text{Total} = 26.90 \text{ dB/m}$$

$$\text{Margin} = 30 - 26.90 = 3.1 \text{ dB}$$

$$= 3.1 \text{ dB below Limit}$$

7. TEST EQUIPMENT LIST

List of Used Test Equipments for Measurements

| | Test Equipment | Model | Mfg. | Serial No. | Cal. Due Date |
|-------------------------------------|-------------------------|------------|-----------------|-------------|---------------|
| <input checked="" type="checkbox"/> | Spectrum Analyzer | E7402A | H.P | US39110107 | 05-10-18 |
| <input type="checkbox"/> | Receiver | ESVS 10 | R & S | 835165/001 | 06-04-07 |
| <input checked="" type="checkbox"/> | EMI TEST Receiver | ESHS30 | Rohde & Schwarz | 0401901/002 | 05-10-18 |
| <input type="checkbox"/> | Preamplifier | HP 8347A | HP | 2834A00544 | 06-04-07 |
| <input checked="" type="checkbox"/> | LISN | 3825/2 | EMCO | 9208-1995 | 06-04-07 |
| <input checked="" type="checkbox"/> | LISN | 3825/2 | EMCO | 9006-1669 | 06-04-07 |
| <input checked="" type="checkbox"/> | Log-Bicon Antenna | VULB9160 | Schwarz Beck | 3082 | 05-07-27 |
| <input type="checkbox"/> | Log-Bicon Antenna | VULB9165 | Schwarz Beck | 2023 | 05-07-06 |
| <input type="checkbox"/> | Dipole Antenna | VHAP | Schwarz Beck | 964 | 05-06-10 |
| <input type="checkbox"/> | Dipole Antenna | VHAP | Schwarz Beck | 965 | 05-07-09 |
| <input type="checkbox"/> | Dipole Antenna | UHAP | Schwarz Beck | 949 | 05-07-09 |
| <input type="checkbox"/> | Dipole Antenna | UHAP | Schwarz Beck | 950 | 05-06-10 |
| <input type="checkbox"/> | Broad band Horn Antenna | BBHA 9120D | Schwarz Beck | 227 | 05-05-02 |
| <input checked="" type="checkbox"/> | Turn-Table | DETT-03 | Daeil EMC | - | N/A |
| <input checked="" type="checkbox"/> | Antenna Master | DEAM-03 | Daeil EMC | - | N/A |
| <input type="checkbox"/> | Plotter | 7440A | H.P | 2725A 75722 | N/A |
| <input checked="" type="checkbox"/> | Chamber | DTEC01 | DAETONG | - | N/A |
| <input checked="" type="checkbox"/> | Thermo Hygrograph | 3-3122 | ISUZU | 3312201 | 06-04-07 |
| <input checked="" type="checkbox"/> | BaroMeter | - | Regulus | - | - |