


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3m Radiated**

EUT: Wireless remote handset M/N:JLDK.18.01.XX  
 Manufacturer: OKIN Refined Electric Technology Co., Ltd.  
 Operating Condition: TX 2431.793833MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: DC 4.5V  
 Comment: Y  
 Start of Test: 2016-04-05 /

**SCAN TABLE: "LFRE Fin"**

Short Description:			_SUB STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

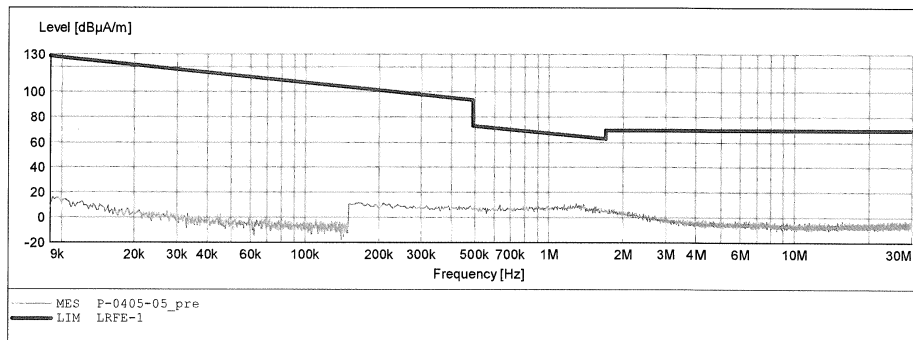


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3m Radiated**

EUT: Wireless remote handset M/N:JLDK.18.01.XX  
 Manufacturer: OKIN Refined Electric Technology Co., Ltd.  
 Operating Condition: TX 2431.793833MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: DC 4.5V  
 Comment: Z  
 Start of Test: 2016-04-05 /

**SCAN TABLE: "LFRE Fin"**

Short Description:		_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

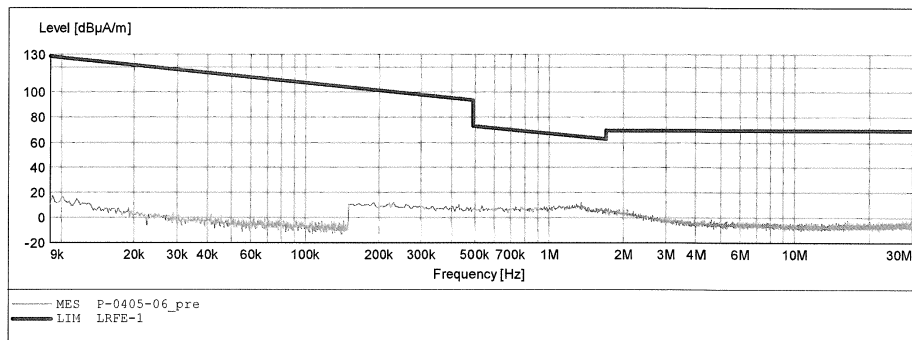


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3m Radiated**

EUT: Wireless remote handset M/N:JLDK.18.01.XX  
 Manufacturer: OKIN Refined Electric Technology Co., Ltd.  
 Operating Condition: TX 2457.387561MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: DC 4.5V  
 Comment: X  
 Start of Test: 2016-04-05 /

**SCAN TABLE: "LFRE Fin"**

Short Description:			_SUB STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

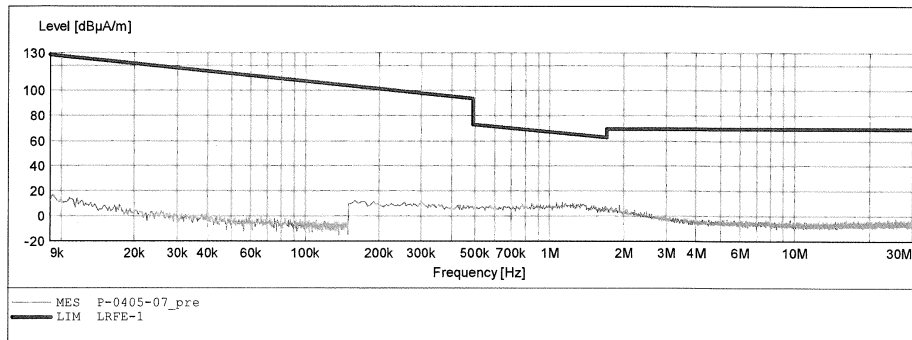


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3m Radiated**

EUT: Wireless remote handset M/N:JLDK.18.01.XX  
 Manufacturer: OKIN Refined Electric Technology Co., Ltd.  
 Operating Condition: TX 2457.387561MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: DC 4.5V  
 Comment: Y  
 Start of Test: 2016-04-05 /

**SCAN TABLE: "LFRE Fin"**

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

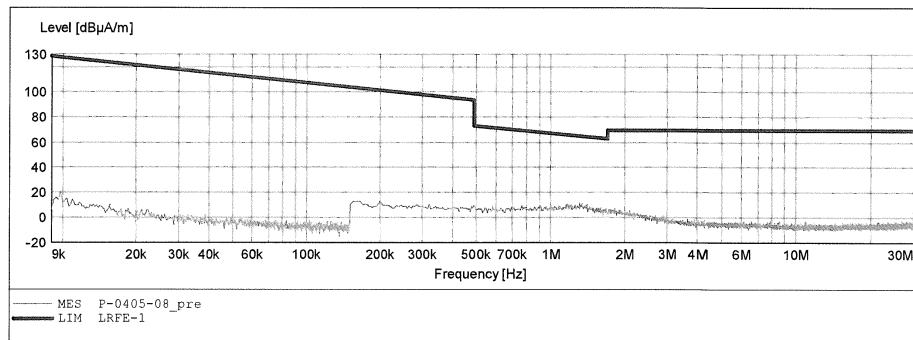


**ACCURATE TECHNOLOGY CO., LTD**
**FCC Class B 3m Radiated**

EUT: Wireless remote handset M/N:JLDK.18.01.XX  
 Manufacturer: OKIN Refined Electric Technology Co., Ltd.  
 Operating Condition: TX 2457.387561MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: DC 4.5V  
 Comment: Z  
 Start of Test: 2016-04-05 /

**SCAN TABLE: "LFRE Fin"**

Short Description:			_SUB STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

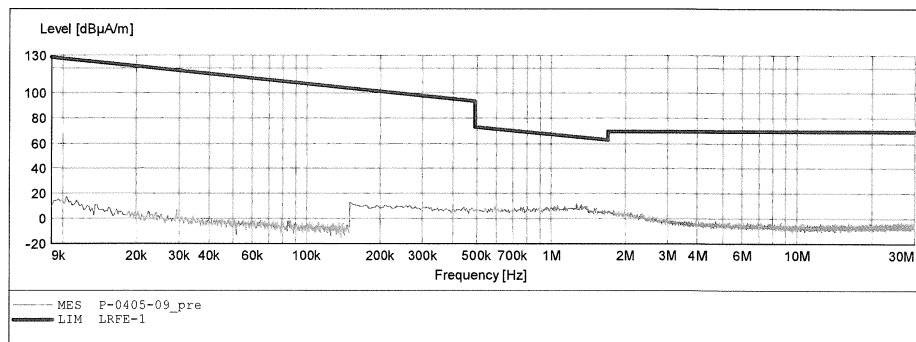


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1395	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

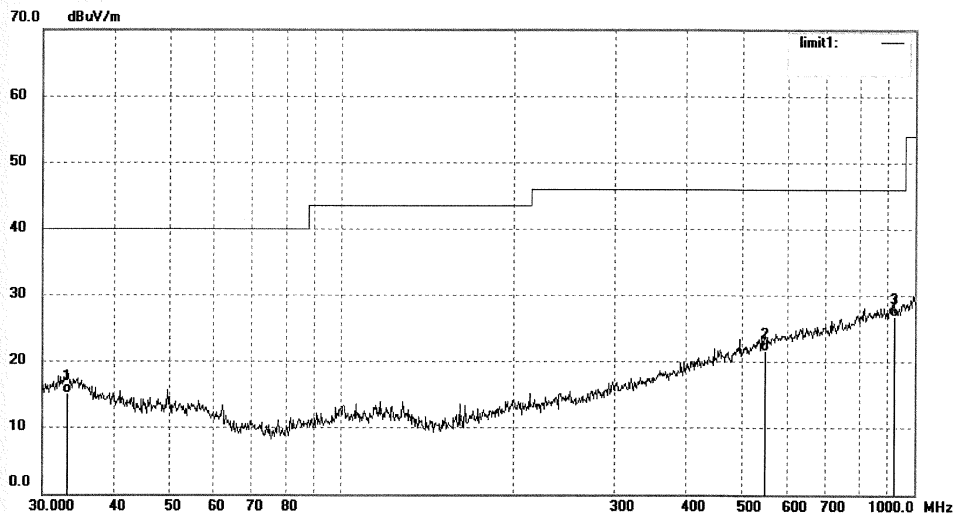


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.0949	24.58	-9.39	15.19	40.00	-24.81	QP			
2	550.9479	25.19	-3.59	21.60	46.00	-24.40	QP			
3	919.2866	25.26	1.57	26.83	46.00	-19.17	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1396	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

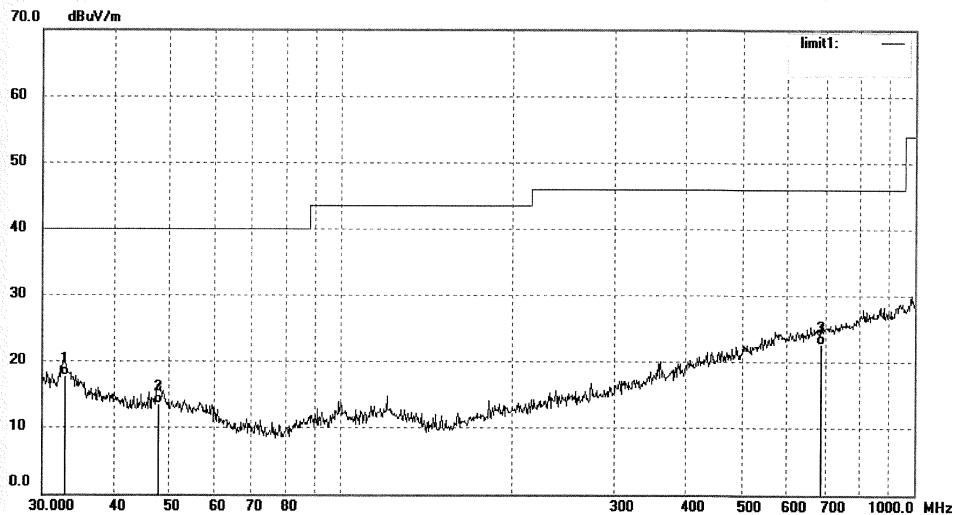

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.8637	26.63	-8.94	17.69	40.00	-22.31	QP			
2	47.8260	25.40	-11.87	13.53	40.00	-26.47	QP			
3	684.7454	24.71	-1.97	22.74	46.00	-23.26	QP			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1398	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2431.793833MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

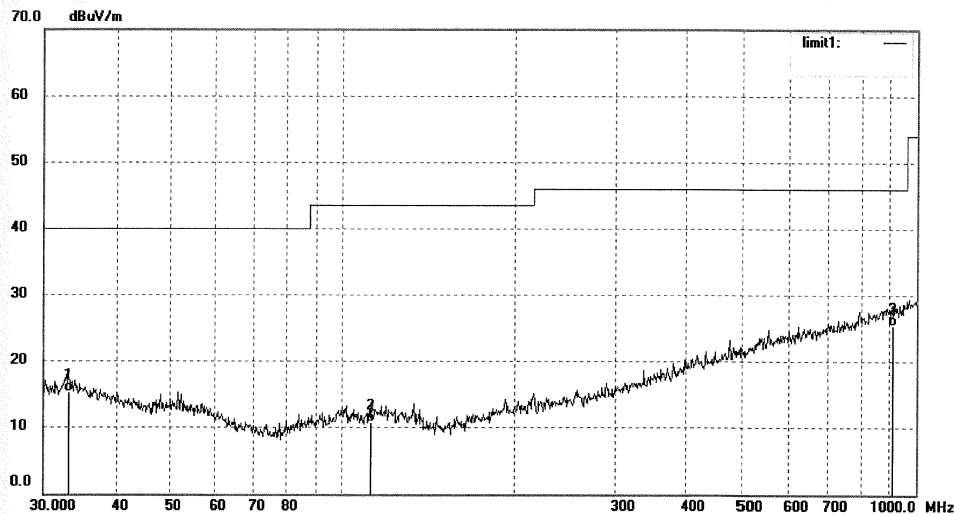

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.0949	24.67	-9.39	15.28	40.00	-24.72	QP			
2	112.1303	23.93	-13.20	10.73	43.50	-32.77	QP			
3	909.6666	24.09	1.34	25.43	46.00	-20.57	QP			





**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1397	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2431.793833MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

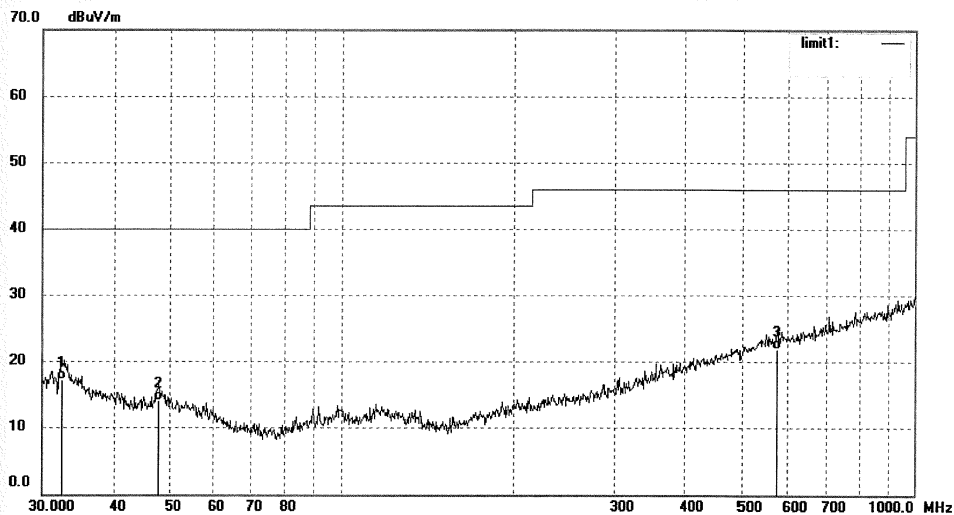


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.4059	26.02	-8.80	17.22	40.00	-22.78	QP			
2	47.8260	25.91	-11.87	14.04	40.00	-25.96	QP			
3	574.6258	25.08	-3.19	21.89	46.00	-24.11	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1399	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2457.387561MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

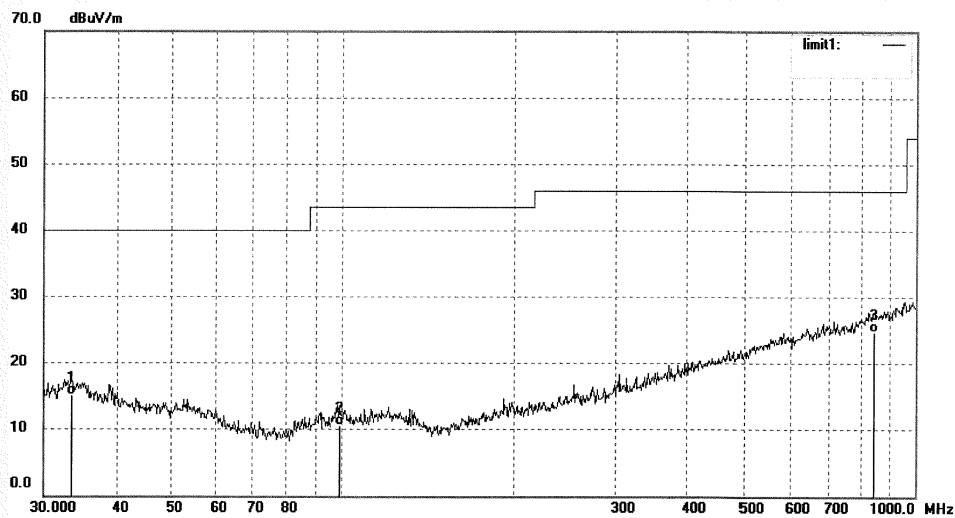


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.4448	24.59	-9.42	15.17	40.00	-24.83	QP			
2	98.8324	23.75	-13.11	10.64	43.50	-32.86	QP			
3	842.1295	24.08	0.66	24.74	46.00	-21.26	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1400	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2457.387561MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

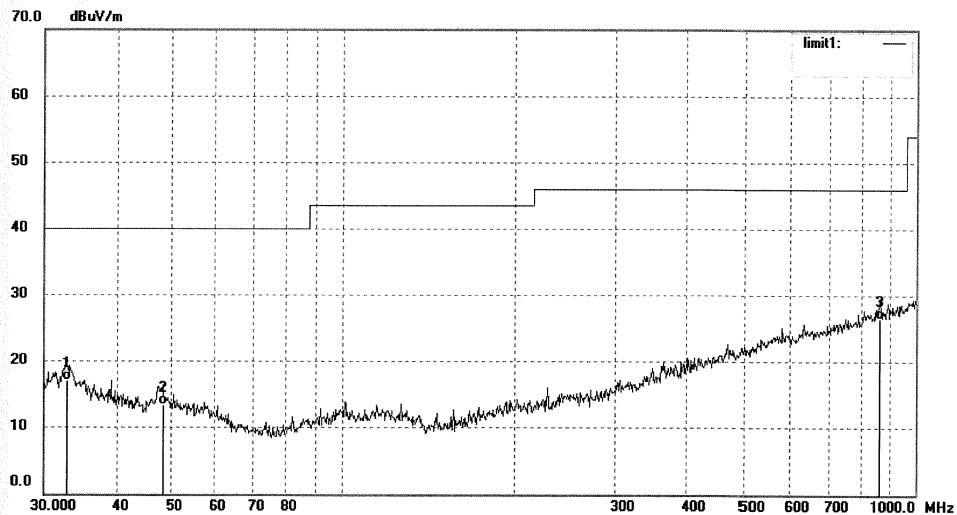

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.8637	25.98	-8.94	17.04	40.00	-22.96	QP			
2	48.3318	25.31	-11.87	13.44	40.00	-26.56	QP			
3	863.0561	25.50	0.96	26.46	46.00	-19.54	QP			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1379	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

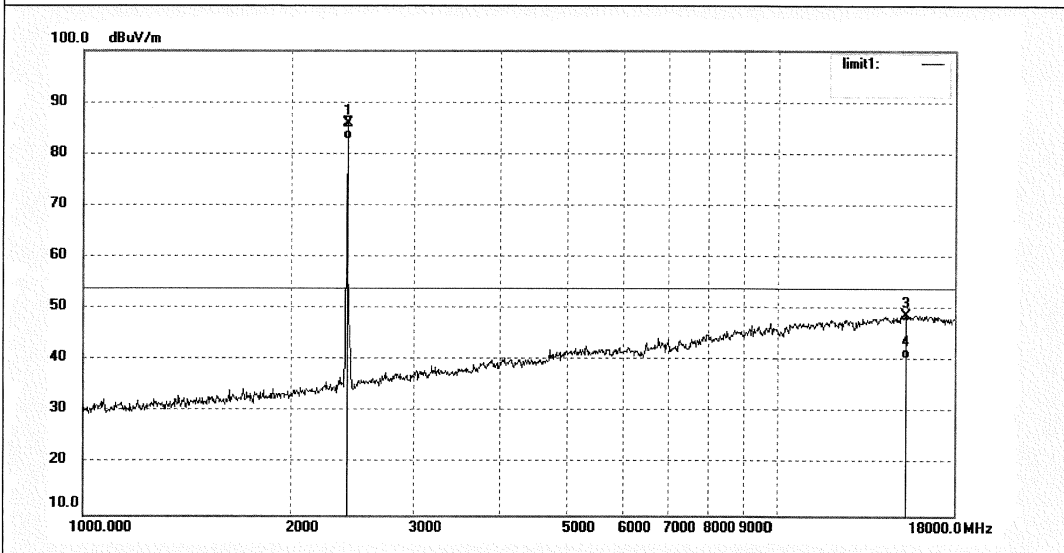


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2406.999	93.33	-7.44	85.89	114.00	-28.11	peak			
2	2406.999	90.22	-7.44	82.78	94.00	-11.22	AVG			
3	15265.885	8.33	40.57	48.90	74.00	-25.10	peak			
4	15265.885	-0.01	40.57	40.56	54.00	-13.44	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1380	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

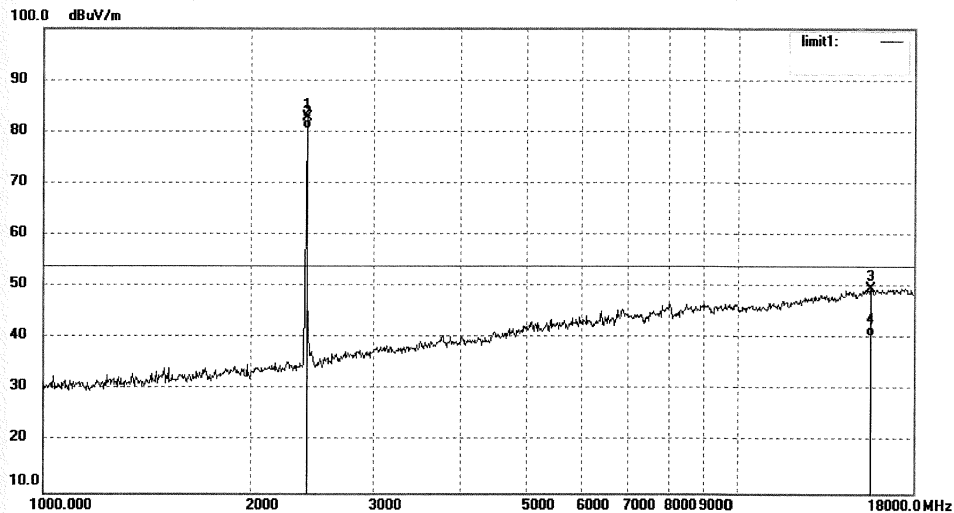


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2406.999	90.28	-7.44	82.84	114.00	-31.16	peak			
2	2406.999	87.89	-7.44	80.45	94.00	-13.55	AVG			
3	15577.899	9.53	40.08	49.61	74.00	-24.39	peak			
4	15577.899	0.50	40.08	40.58	54.00	-13.42	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1382	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2457.387561MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

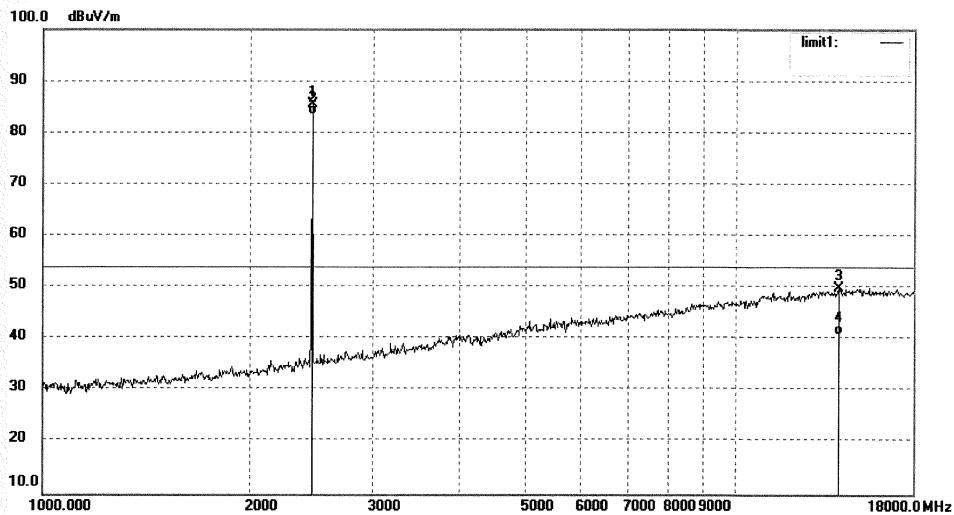

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2457.387	92.79	-7.34	85.45	114.00	-28.55	peak			
2	2457.387	90.90	-7.34	83.56	94.00	-10.44	AVG			
3	13957.529	9.51	40.33	49.84	74.00	-24.16	peak			
4	13957.529	0.63	40.33	40.96	54.00	-13.04	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1381	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2457.387561MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

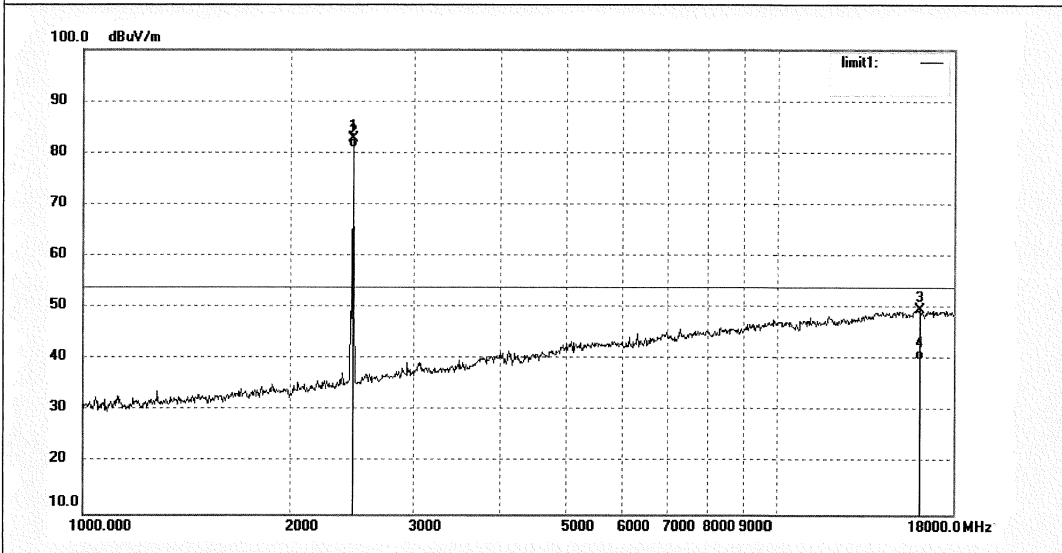

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2457.387	90.20	-7.34	82.86	114.00	-31.14	peak			
2	2457.387	88.31	-7.34	80.97	94.00	-13.03	AVG			
3	16081.142	9.71	40.05	49.76	74.00	-24.24	peak			
4	16081.142	0.07	40.05	40.12	54.00	-13.88	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1383	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2431.793833MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

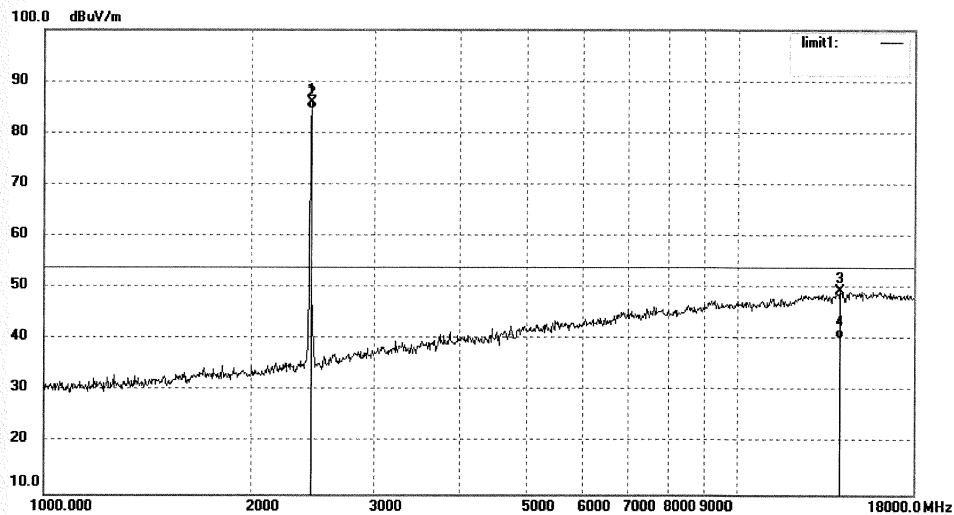

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2431.793	93.39	-7.38	86.01	114.00	-27.99	peak			
2	2431.793	92.03	-7.38	84.65	94.00	-9.35	AVG			
3	14038.447	8.87	40.57	49.44	74.00	-24.56	peak			
4	14038.447	-0.34	40.57	40.23	54.00	-13.77	AVG			





**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1384	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2431.793833MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

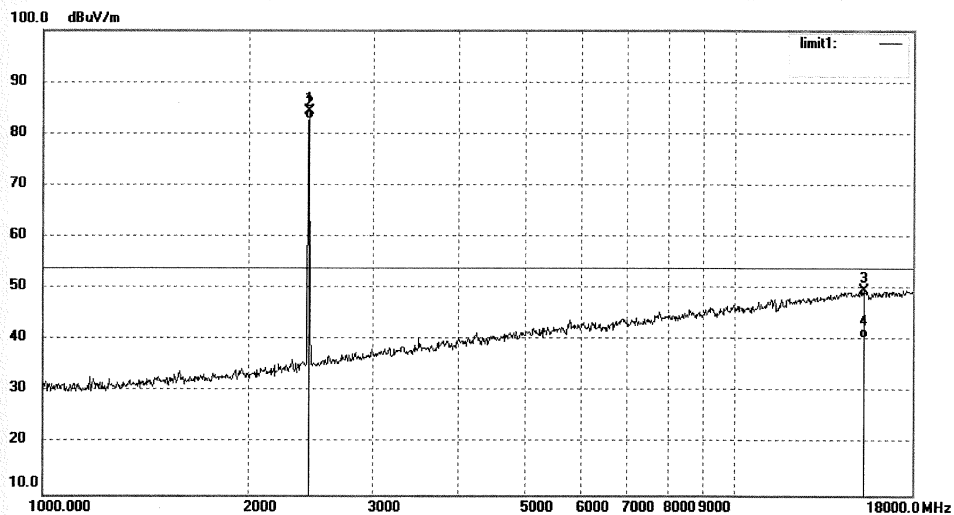

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2431.793	91.84	-7.38	84.46	114.00	-29.54	peak			
2	2431.793	90.24	-7.38	82.86	94.00	-11.14	AVG			
3	15265.885	9.19	40.57	49.76	74.00	-24.24	peak			
4	15265.885	0.01	40.57	40.58	54.00	-13.42	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1390	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

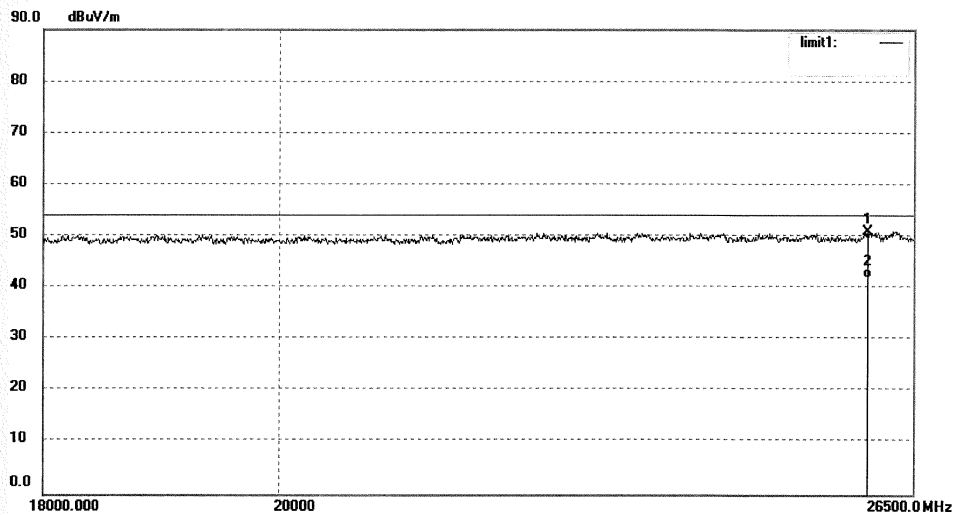


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25962.307	34.37	16.50	50.87	74.00	-23.13	peak			
2	25962.307	25.45	16.50	41.95	54.00	-12.05	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1389	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

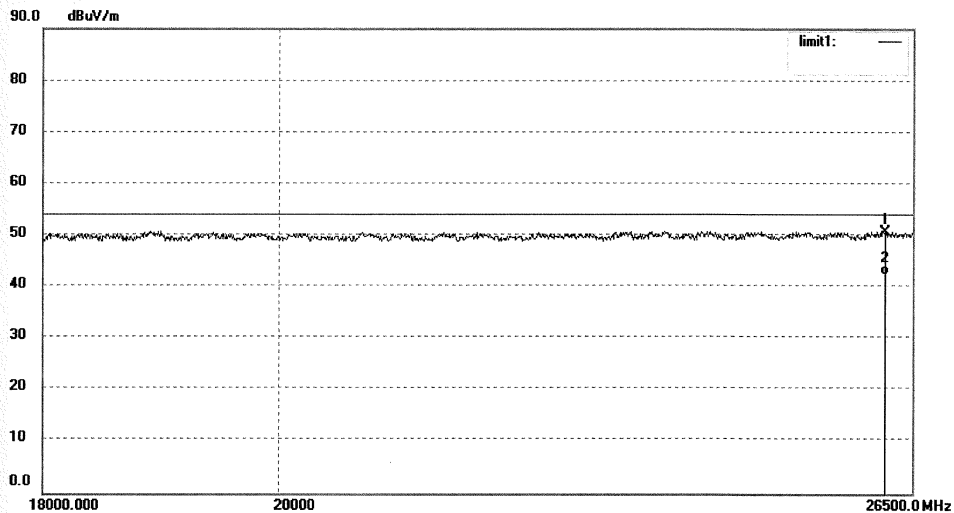


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26184.163	33.69	17.11	50.80	74.00	-23.20	peak			
2	26184.163	25.34	17.11	42.45	54.00	-11.55	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1391	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2431.793833MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

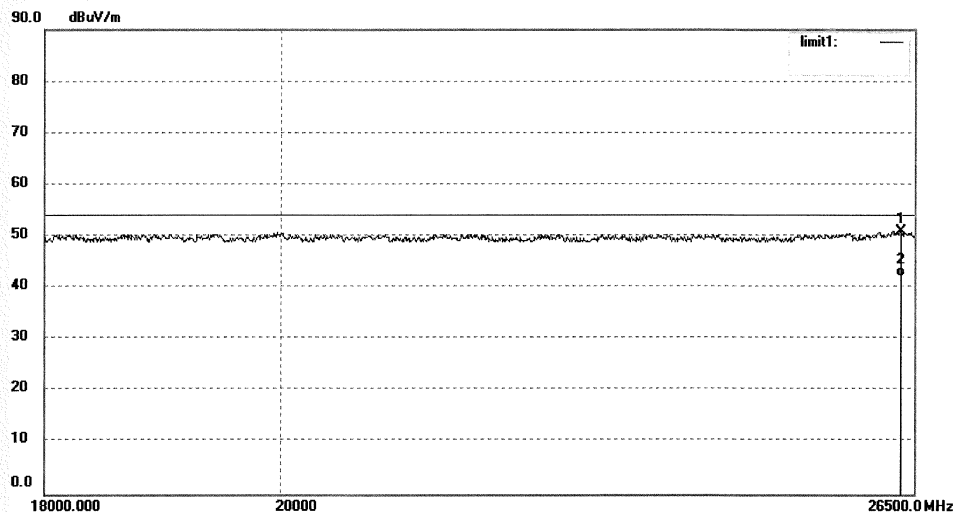


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26346.703	34.47	16.50	50.97	74.00	-23.03	peak			
2	26346.703	25.78	16.50	42.28	54.00	-11.72	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1392	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2431.793833MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

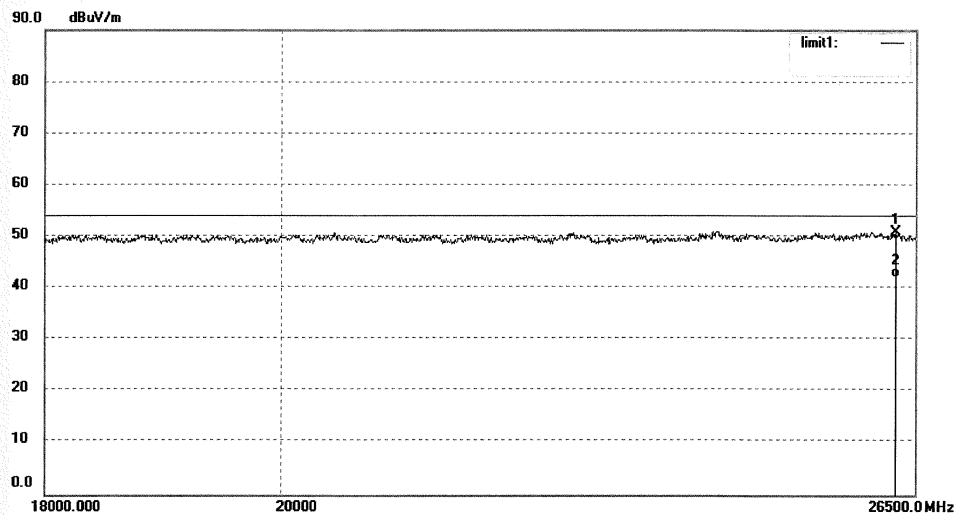

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26275.468	34.39	16.50	50.89	74.00	-23.11	peak			
2	26275.468	25.78	16.50	42.28	54.00	-11.72	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1394	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2457.387561MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

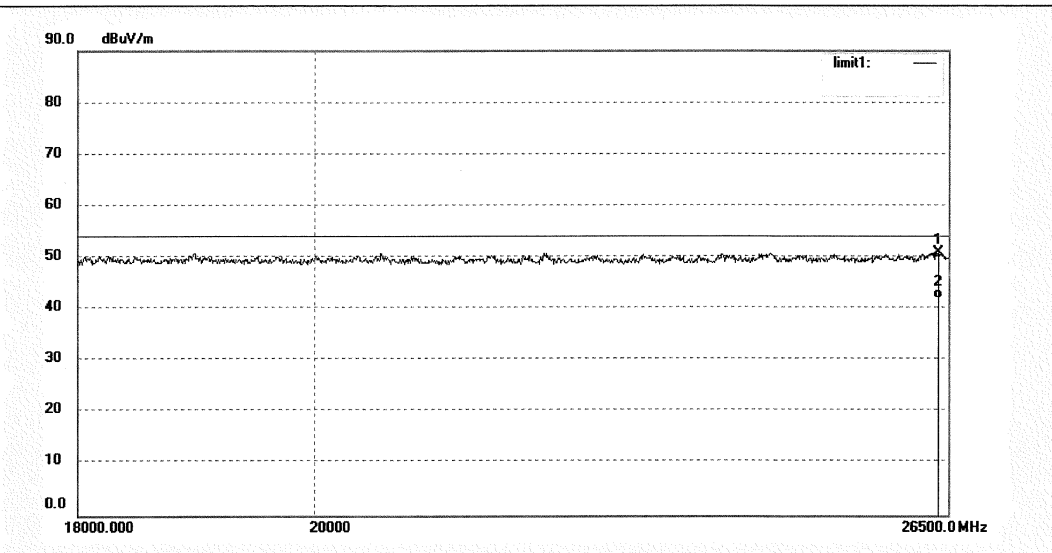

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26377.291	34.44	16.50	50.94	74.00	-23.06	peak			
2	26377.291	25.57	16.50	42.07	54.00	-11.93	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1393	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2457.387561MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

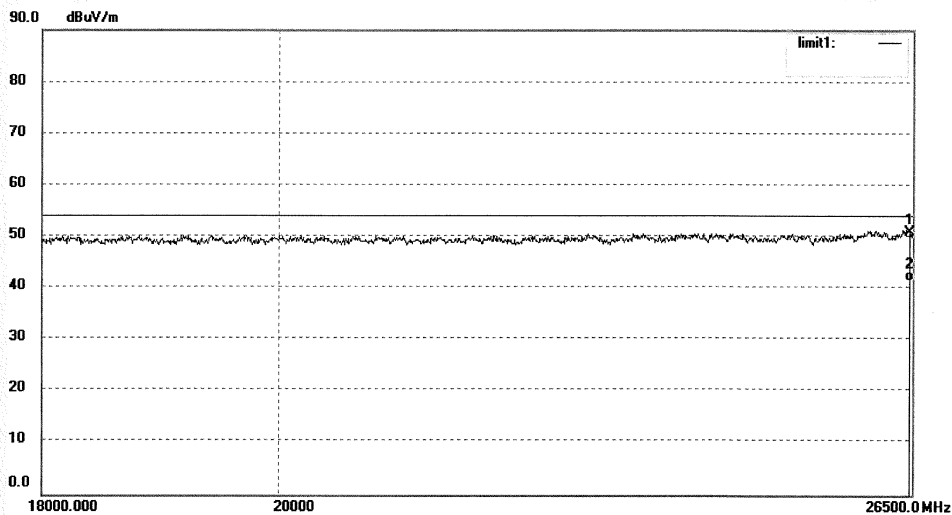

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26459.034	34.48	16.50	50.98	74.00	-23.02	peak			
2	26459.034	25.12	16.50	41.62	54.00	-12.38	AVG			



**Prüfbericht - Nr.: 50041388 001**  
*Test Report No.*
**Seite 53 von 60**  
*Page 53 of 60*


### Test Plot of Frequency Band Edge


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1387	Polarization: Horizontal
Standard: FCC Part 15 (Band Edge)	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

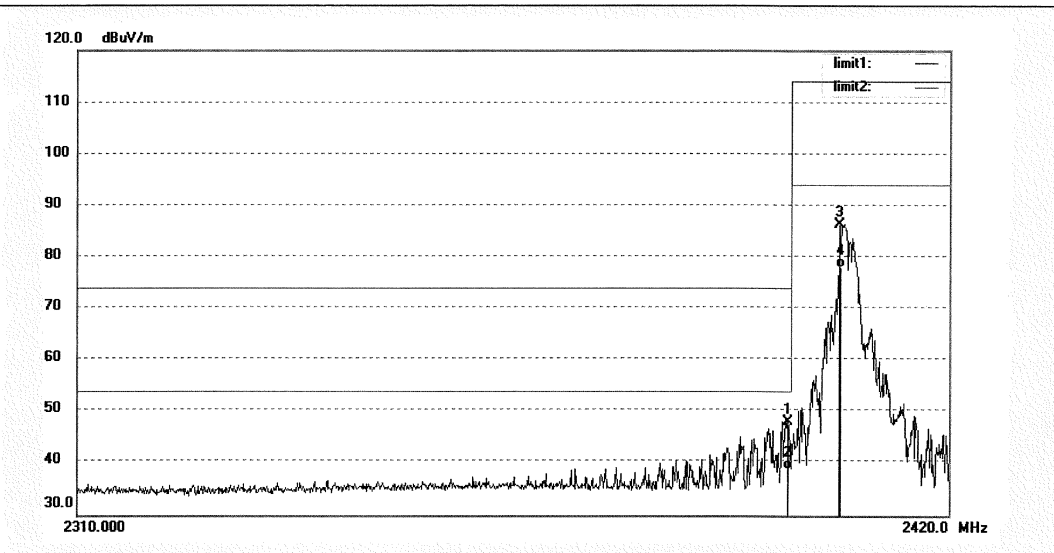

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2399.540	55.59	-7.46	48.13	74.00	-25.87	peak			
2	2399.540	46.24	-7.46	38.78	54.00	-15.22	AVG			
3	2406.000	93.90	-7.44	86.46	114.00	-27.54	peak			
4	2406.000	85.57	-7.44	78.13	94.00	-15.87	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Igwade #1388	Polarization: Vertical
Standard: FCC Part 15 (Band Edge)	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2406.999080MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

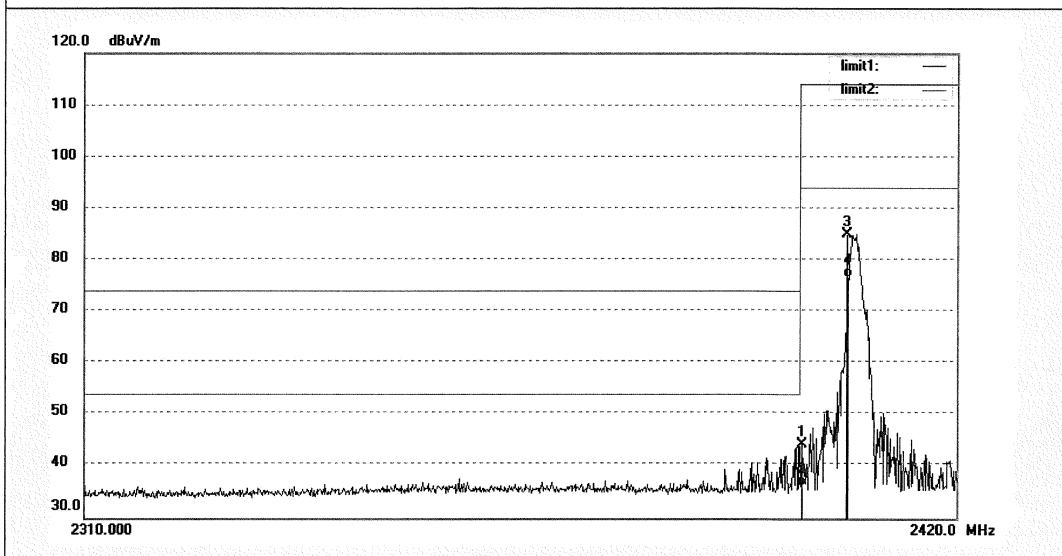

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.310	51.82	-7.46	44.36	114.00	-69.64	peak			
2	2400.310	43.57	-7.46	36.11	94.00	-57.89	AVG			
3	2406.000	92.38	-7.44	84.94	114.00	-29.06	peak			
4	2406.000	84.24	-7.44	76.80	94.00	-17.20	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1386	Polarization: Horizontal
Standard: FCC Part 15 (Band Edge)	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2457.387561MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

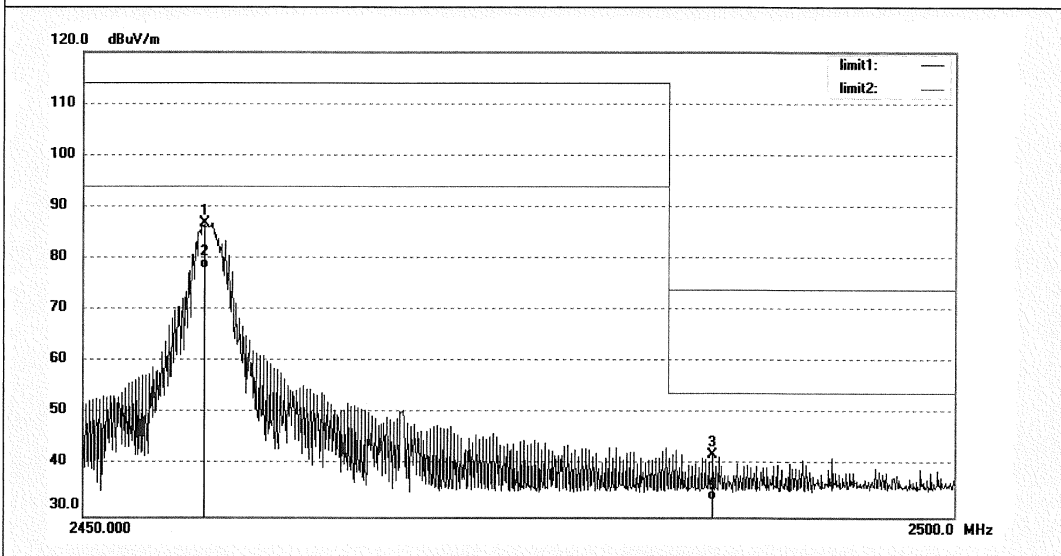

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2457.000	94.12	-7.34	86.78	114.00	-27.22	peak			
2	2457.000	85.35	-7.34	78.01	94.00	-15.99	AVG			
3	2486.150	49.34	-7.38	41.96	74.00	-32.04	peak			
4	2486.150	40.65	-7.38	33.27	54.00	-20.73	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: Igwade #1385	Polarization: Vertical
Standard: FCC Part 15 (Band Edge)	Power Source: DC 4.5V
Test item: Radiation Test	Date: 16/03/30/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Wireless remote handset	Engineer Signature: LGWADE
Mode: TX 2457.387561MHz	Distance:
Model: JLDK.18.01.XX	
Manufacturer: OKIN Refined Electric Technology Co., Ltd.	

Note:

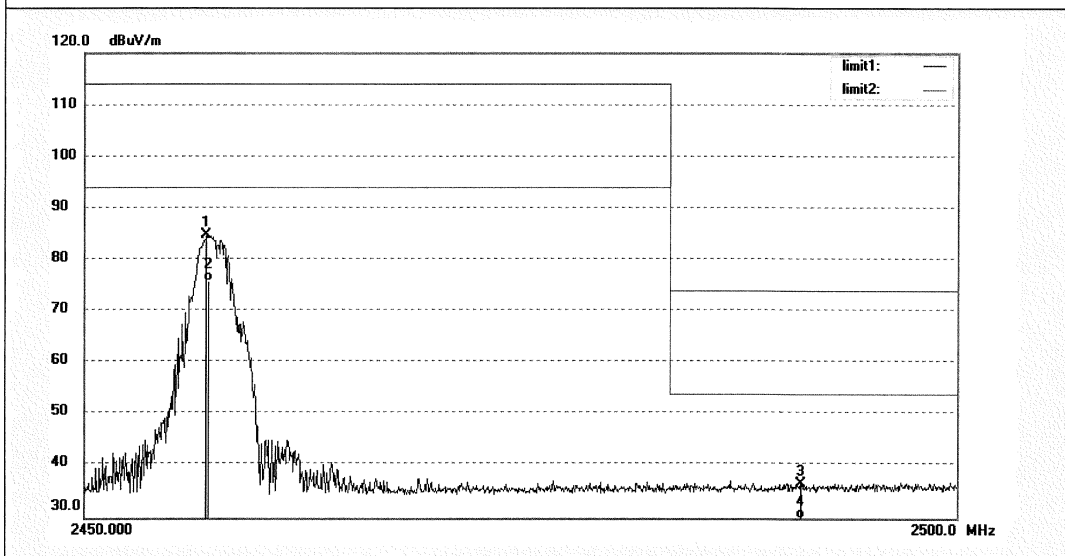

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2457.000	92.14	-7.34	84.80	114.00	-29.20	peak			
2	2457.000	83.23	-7.34	75.89	94.00	-18.11	AVG			
3	2491.050	44.05	-7.38	36.67	74.00	-37.33	peak			
4	2491.050	37.35	-7.38	29.97	54.00	-24.03	AVG			

## 6. Safety Human exposure

### 6.1 Radio Frequency Exposure Compliance

#### 6.1.1 Electromagnetic Fields

**RESULT:****Pass**

Test standard : FCC KDB Publication 447498 D01 v06

Since maximum radiated power of the transmitter is  $0.25\text{mW} < 10\text{mW}$ , and the distance from EUT to human is 5mm, hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01 General RF Exposure Guidance v06.

## 8. List of Tables

Table 1: List of Test and Measurement Equipment .....	5
Table 2: Measurement Uncertainty .....	6
Table 3: Technical Specification of EUT .....	7
Table 4: Test result of 20dB & 99% Bandwidth.....	13
Table 5: Polarization of the measurement for the larger power level channel 2431.794MHz: Horizontal.....	18

## 9. List of Photographs

Photograph 1: Set-up for Spurious Emissions below 30MHz .....	58
Photograph 2: Set-up for Spurious Emissions of 30MHz – 1GHz.....	58
Photograph 3: Set-up for Spurious Emissions of 1 – 18GHz.....	59
Photograph 4: Set-up for Spurious Emissions of 18 – 26.5GHz .....	59