

## FCC Test Report

**Report No.:** RF191025C12

**FCC ID:** PD5-DVW-W01I2-E1

**Test Model:** DVW-W01I2-E1

**Series Model:** DVW-W01I2-E1-CN, DVW-W01I2-E1-EU (Refer to item 3.1 for more details)

**Received Date:** Oct. 25, 2019

**Test Date:** Oct. 31 ~ Nov. 04, 2019

**Issued Date:** Nov. 14, 2019

**Applicant:** Delta Electronics, Inc.

**Address:** No. 18, Xinglong Rd., Taoyuan Dist., Taoyuan City 330, Taiwan (R.O.C.)

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal.....	11
3.4 Description of Support Units.....	12
3.4.1 Configuration of System under Test.....	12
3.5 General Description of Applied Standards and References.....	12
<b>4 Test Types and Results</b> .....	<b>13</b>
4.1 Radiated Emission and Bandedge Measurement.....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	13
4.1.2 Test Instruments.....	14
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard.....	16
4.1.5 Test Setup.....	16
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results.....	18
4.2 Conducted Emission Measurement.....	32
4.2.1 Limits of Conducted Emission Measurement.....	32
4.2.2 Test Instruments.....	32
4.2.3 Test Procedures.....	33
4.2.4 Deviation from Test Standard.....	33
4.2.5 Test Setup.....	33
4.2.6 EUT Operating Conditions.....	33
4.2.7 Test Results.....	34
4.3 6dB Bandwidth Measurement.....	36
4.3.1 Limits of 6dB Bandwidth Measurement.....	36
4.3.2 Test Setup.....	36
4.3.3 Test Instruments.....	36
4.3.4 Test Procedure.....	36
4.3.5 Deviation from Test Standard.....	36
4.3.6 EUT Operating Conditions.....	36
4.3.7 Test Result.....	37
4.4 Conducted Output Power Measurement.....	39
4.4.1 Limits of Conducted Output Power Measurement.....	39
4.4.2 Test Setup.....	39
4.4.3 Test Instruments.....	39
4.4.4 Test Procedures.....	39
4.4.5 Deviation from Test Standard.....	39
4.4.6 EUT Operating Conditions.....	39
4.4.7 Test Results.....	40
4.5 Power Spectral Density Measurement.....	41
4.5.1 Limits of Power Spectral Density Measurement.....	41
4.5.2 Test Setup.....	41
4.5.3 Test Instruments.....	41
4.5.4 Test Procedure.....	41
4.5.5 Deviation from Test Standard.....	41
4.5.6 EUT Operating Condition.....	41

4.5.7 Test Results .....	42
4.6 Conducted Out of Band Emission Measurement.....	44
4.6.1 Limits of Conducted Out of Band Emission Measurement .....	44
4.6.2 Test Setup.....	44
4.6.3 Test Instruments .....	44
4.6.4 Test Procedure .....	44
4.6.5 Deviation from Test Standard .....	45
4.6.6 EUT Operating Condition .....	45
4.6.7 Test Results .....	45
<b>5 Pictures of Test Arrangements.....</b>	<b>54</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>55</b>

### Release Control Record

Issue No.	Description	Date Issued
RF191025C12	Original release.	Nov. 14, 2019

## 1 Certificate of Conformity

**Product:** Wireless AP/Client/Gateway

**Brand:** Delta

**Test Model:** DVW-W01I2-E1

**Series Model:** DVW-W01I2-E1-CN, DVW-W01I2-E1-EU (Refer to item 3.1 for more details)

**Sample Status:** Engineering sample

**Applicant:** Delta Electronics, Inc.

**Test Date:** Oct. 31 ~ Nov. 04, 2019

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Nov. 14, 2019  
Polly Chien / Specialist

**Approved by :**  , **Date:** Nov. 14, 2019  
Bruce Chen / Senior Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -5.31dB at 0.15000MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.0dB at 2390.00MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is R-SMA not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Wireless AP/Client/Gateway
Brand	Delta
Test Model	DVW-W01I2-E1
Series Model	DVW-W01I2-E1-CN, DVW-W01I2-E1-EU
Model Difference	Refer to note for more details
Sample Status	Engineering sample
Power Supply rating	12 ~ 48Vdc
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps
Operating Frequency	2412~2462MHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7
Output Power	269.483mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Cable Supplied	NA

Note:

1. The following models are provided to this EUT.

Brand	Model	Description
Delta	DVW-W01I2-E1	For marketing purpose.
	DVW-W01I2-E1-CN	
	DVW-W01I2-E1-EU	

\* The model of the DVW-W01I2-E1 was chosen for final test.

2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function
802.11b	2TX
802.11g	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX

3. The following antennas were provided to the EUT.

Type	Gain(dBi)		Connector
	2400~2500MHz	5150~5850MHz	
Dipole	2.78	3.21	R-SMA

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE<1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.
2. Radiated emission (below 1GHz) and power line conducted emission test items chosen the worst maximum power.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Remark
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	-
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5	

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Remark
-	802.11b	1 to 11	6	DSSS	DBPSK	1.0	-

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Remark
-	802.11b	1 to 11	6	DSSS	DBPSK	1.0	-

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Remark
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	-
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5	

Test Condition:

Applicable to	Environmental Conditions	Input Power (System)	Tested by
RE $\geq$ 1G	23 deg. C, 67% RH	12Vdc	Adair Peng
RE<1G	23 deg. C, 67% RH	12Vdc	Titan Hsu
PLC	25 deg. C, 75% RH	12Vdc	Jones Chang
APCM	25 deg. C, 60% RH	12Vdc	Ted Chang

### 3.3 Duty Cycle of Test Signal

Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.


Duty cycle of test signal is  $< 98\%$ , duty factor is required.

802.11b: Duty cycle of test signal is 100 %, duty factor is not required.

802.11g: Duty cycle =  $2.058/2.163 = 0.951$ , Duty factor =  $10 * \log(1/0.951) = 0.22$

802.11n (HT20): Duty cycle =  $4.997/5.095 = 0.981$

802.11n (HT40): Duty cycle =  $2.425/2.515 = 0.964$ , Duty factor =  $10 * \log(1/0.964) = 0.16$

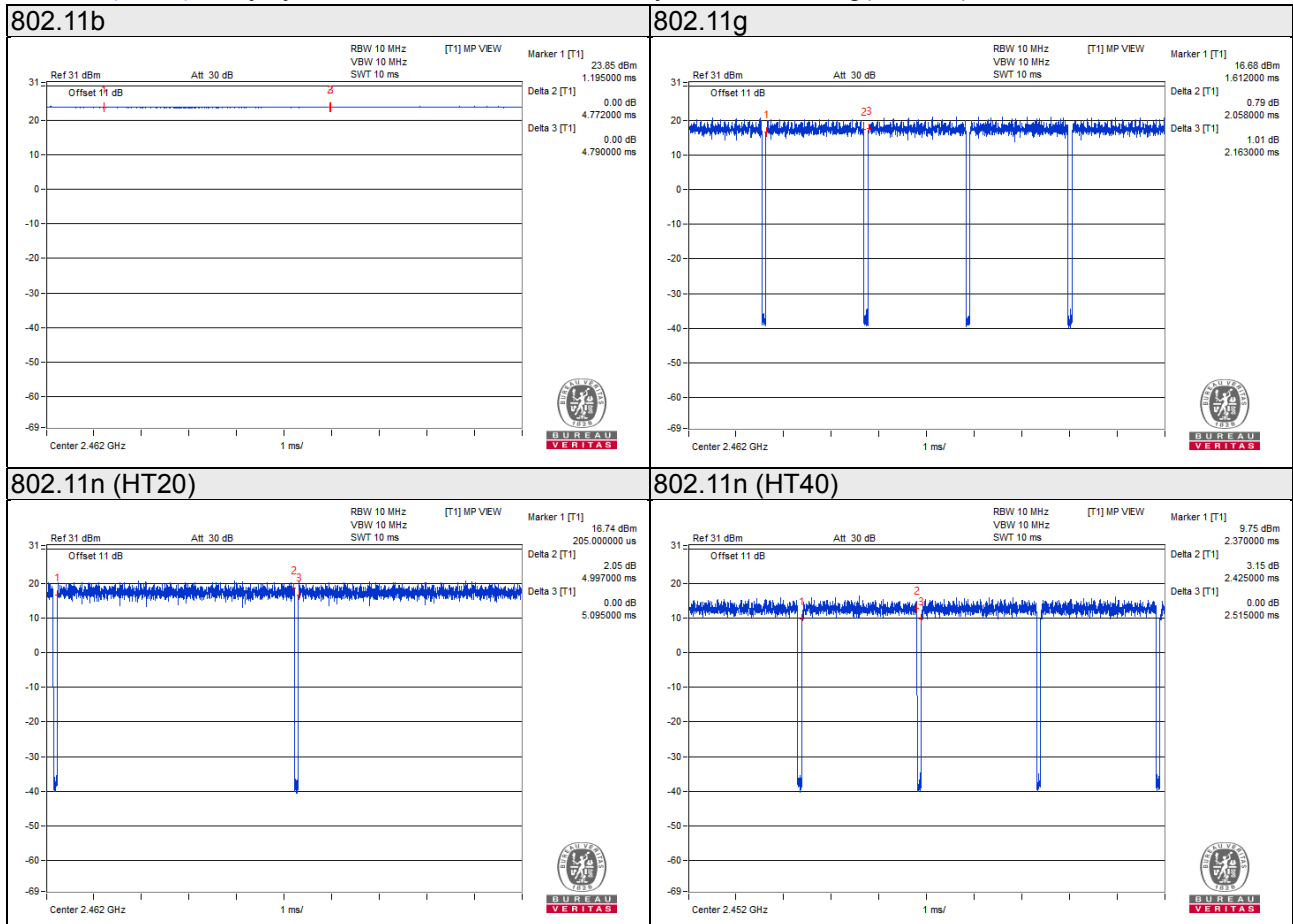

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	DC Power Supply	Twintex	TP-3305D	11T35D0801027	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN cable	1	5	N	0	RJ45, Cat5e
2.	DC cable	1	2	N	0	-

#### 3.4.1 Configuration of System under Test

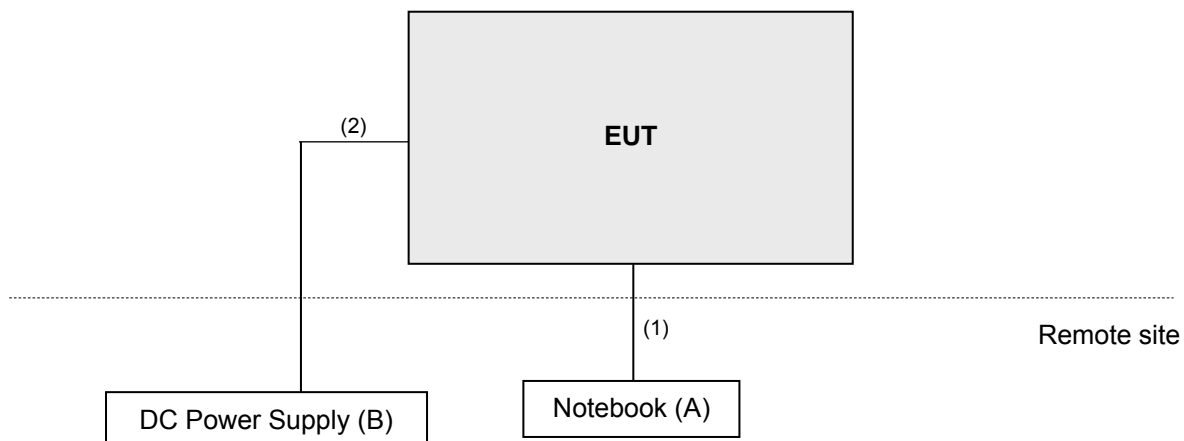

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test standard:**

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	May 30, 2019	May 29, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 10, 2019	Jun. 09, 2020
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 22, 2018	Nov. 21, 2019
HORN Antenna SCHWARZBECK	9120D	209	Nov. 25, 2018	Nov. 24, 2019
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 25, 2018	Nov. 24, 2019
Loop Antenna TESEQ	HLA 6121	45745	Jul. 01, 2019	Jun. 30, 2020
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 20, 2019	Aug. 19, 2020
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 27, 2019	Mar. 26, 2020
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH3-01	Aug. 20, 2019	Aug. 19, 2020
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 20, 2019	Aug. 19, 2020
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM-SM-8 000	Cable-CH3-03 (309224+170907)	Aug. 20, 2019	Aug. 19, 2020
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY5519 0004/MY55190007/MY 55210005	Jul. 15, 2019	Jul. 14, 2020

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Chamber 3.

### 4.1.3 Test Procedures

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.  
(11b: RBW = 1 MHz, VBW = 10 Hz ; 11g: RBW = 1 MHz, VBW = 1 kHz ; 11n (HT20): RBW = 1 MHz, VBW = 10 Hz ; 11n (HT40): RBW = 1 MHz, VBW = 1 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup

##### For Radiated emission below 30MHz

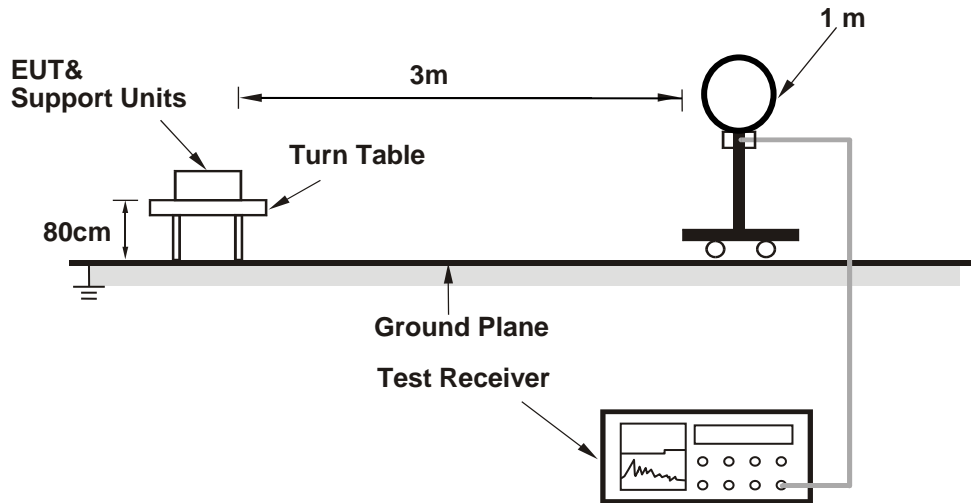


##### For Radiated emission 30MHz to 1GHz

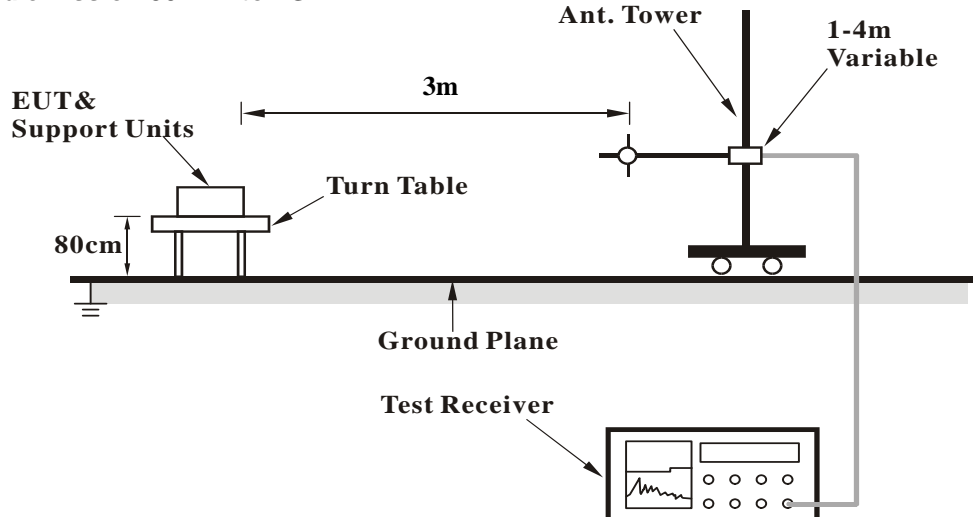



### For Radiated emission above 1GHz

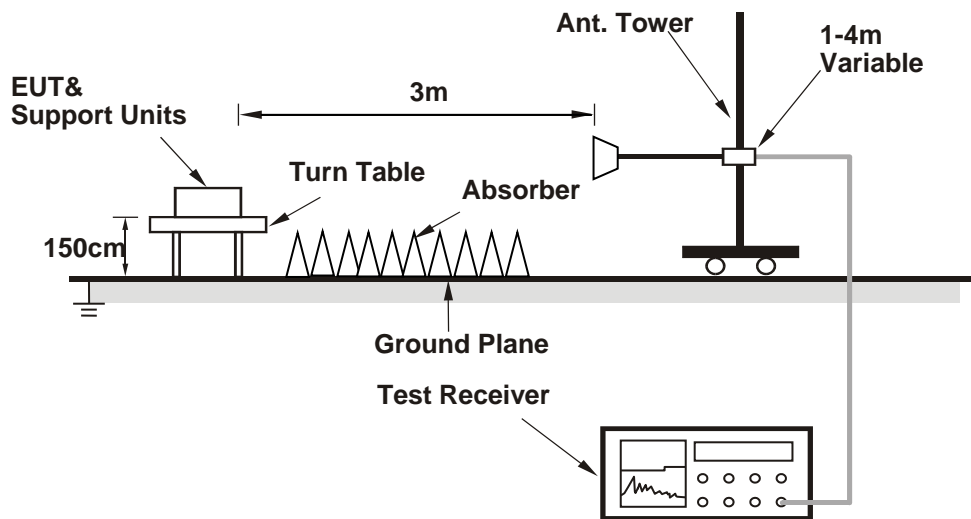

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".

#### 4.1.7 Test Results

Above 1GHz worst-Case data:

802.11b

CHANNEL	TX Channel 1	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.8 PK	74.0	-16.2	3.41 H	97	25.3	32.5
2	2390.00	45.7 AV	54.0	-8.3	3.41 H	97	13.2	32.5
3	*2412.00	100.4 PK			3.62 H	86	67.9	32.5
4	*2412.00	98.2 AV			3.62 H	86	65.7	32.5
5	4824.00	46.7 PK	74.0	-27.3	2.84 H	133	43.3	3.4
6	4824.00	35.9 AV	54.0	-18.1	2.84 H	133	32.5	3.4
7	14472.00	67.5 PK	74.0	-6.5	1.66 H	153	43.0	24.5
8	14472.00	52.6 AV	54.0	-1.4	1.66 H	153	28.1	24.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.85 V	111	25.2	32.5
2	2390.00	45.8 AV	54.0	-8.2	1.85 V	111	13.3	32.5
3	*2412.00	108.9 PK			2.02 V	107	76.4	32.5
4	*2412.00	106.5 AV			2.02 V	107	74.0	32.5
5	4824.00	47.9 PK	74.0	-26.1	1.27 V	332	44.5	3.4
6	4824.00	38.7 AV	54.0	-15.3	1.27 V	332	35.3	3.4
7	14472.00	67.7 PK	74.0	-6.3	3.87 V	157	43.2	24.5
8	14472.00	52.9 AV	54.0	-1.1	3.87 V	157	28.4	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.0 PK			3.61 H	100	73.6	32.4
2	*2437.00	104.0 AV			3.61 H	100	71.6	32.4
3	4874.00	54.4 PK	74.0	-19.6	2.84 H	129	50.7	3.7
4	4874.00	49.4 AV	54.0	-4.6	2.84 H	129	45.7	3.7
5	12185.00	60.5 PK	74.0	-13.5	1.31 H	81	43.2	17.3
6	12185.00	50.4 AV	54.0	-3.6	1.31 H	81	33.1	17.3

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	114.4 PK			1.67 V	102	82.0	32.4
2	*2437.00	112.2 AV			1.67 V	102	79.8	32.4
3	4874.00	55.4 PK	74.0	-18.6	1.30 V	337	51.7	3.7
4	4874.00	52.0 AV	54.0	-2.0	1.30 V	337	48.3	3.7
5	12185.00	61.1 PK	74.0	-12.9	1.33 V	336	43.8	17.3
6	12185.00	51.8 AV	54.0	-2.2	1.33 V	336	34.5	17.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.6 PK			3.50 H	92	74.1	32.5
2	*2462.00	103.1 AV			3.50 H	92	70.6	32.5
3	2483.50	57.9 PK	74.0	-16.1	3.47 H	101	25.3	32.6
4	2483.50	46.4 AV	54.0	-7.6	3.47 H	101	13.8	32.6
5	4924.00	50.8 PK	74.0	-23.2	2.91 H	135	47.0	3.8
6	4924.00	45.5 AV	54.0	-8.5	2.91 H	135	41.7	3.8
7	12310.00	60.7 PK	74.0	-13.3	1.20 H	85	43.0	17.7
8	12310.00	48.9 AV	54.0	-5.1	1.20 H	85	31.2	17.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.2 PK			1.03 V	101	82.7	32.5
2	*2462.00	111.4 AV			1.03 V	101	78.9	32.5
3	2483.50	61.7 PK	74.0	-12.3	1.48 V	107	29.1	32.6
4	2483.50	52.5 AV	54.0	-1.5	1.48 V	107	19.9	32.6
5	4924.00	51.8 PK	74.0	-22.2	1.15 V	333	48.0	3.8
6	4924.00	47.0 AV	54.0	-7.0	1.15 V	333	43.2	3.8
7	12310.00	60.9 PK	74.0	-13.1	1.71 V	358	43.2	17.7
8	12310.00	50.3 AV	54.0	-3.7	1.71 V	358	32.6	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.0 PK	74.0	-14.0	1.55 H	170	27.5	32.5
2	2390.00	46.6 AV	54.0	-7.4	1.55 H	170	14.1	32.5
3	*2412.00	103.8 PK			1.41 H	165	71.3	32.5
4	*2412.00	93.5 AV			1.41 H	165	61.0	32.5
5	4824.00	46.1 PK	74.0	-27.9	2.99 H	122	42.7	3.4
6	4824.00	32.1 AV	54.0	-21.9	2.99 H	122	28.7	3.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.89 V	135	38.9	32.5
2	<b>2390.00</b>	<b>53.0 AV</b>	<b>54.0</b>	<b>-1.0</b>	<b>1.89 V</b>	<b>135</b>	<b>20.5</b>	<b>32.5</b>
3	*2412.00	114.0 PK			1.61 V	103	81.5	32.5
4	*2412.00	103.4 AV			1.61 V	103	70.9	32.5
5	4824.00	47.3 PK	74.0	-26.7	1.32 V	325	43.9	3.4
6	4824.00	33.9 AV	54.0	-20.1	1.32 V	325	30.5	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* " : Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.6 PK			1.54 H	161	74.2	32.4
2	*2437.00	96.4 AV			1.54 H	161	64.0	32.4
3	4874.00	47.5 PK	74.0	-26.5	3.01 H	130	43.8	3.7
4	4874.00	33.6 AV	54.0	-20.4	3.01 H	130	29.9	3.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	116.7 PK			1.69 V	105	84.3	32.4
2	*2437.00	106.5 AV			1.69 V	105	74.1	32.4
3	4874.00	48.8 PK	74.0	-25.2	1.39 V	330	45.1	3.7
4	4874.00	35.3 AV	54.0	-18.7	1.39 V	330	31.6	3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.3 PK			1.50 H	159	68.8	32.5
2	*2462.00	90.6 AV			1.50 H	159	58.1	32.5
3	2483.50	60.5 PK	74.0	-13.5	1.59 H	160	27.9	32.6
4	2483.50	46.7 AV	54.0	-7.3	1.59 H	160	14.1	32.6
5	4924.00	46.1 PK	74.0	-27.9	2.87 H	129	42.3	3.8
6	4924.00	31.9 AV	54.0	-22.1	2.87 H	129	28.1	3.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.3 PK			1.47 V	133	78.8	32.5
2	*2462.00	100.9 AV			1.47 V	133	68.4	32.5
3	2483.50	70.2 PK	74.0	-3.8	1.44 V	112	37.6	32.6
4	2483.50	52.6 AV	54.0	-1.4	1.44 V	112	20.0	32.6
5	4924.00	47.7 PK	74.0	-26.3	1.40 V	341	43.9	3.8
6	4924.00	33.7 AV	54.0	-20.3	1.40 V	341	29.9	3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	1.57 H	166	28.2	32.5
2	2390.00	46.8 AV	54.0	-7.2	1.57 H	166	14.3	32.5
3	*2412.00	102.9 PK			1.50 H	169	70.4	32.5
4	*2412.00	92.8 AV			1.50 H	169	60.3	32.5
5	4824.00	45.8 PK	74.0	-28.2	2.87 H	133	42.4	3.4
6	4824.00	32.0 AV	54.0	-22.0	2.87 H	133	28.6	3.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.0 PK	74.0	-3.0	1.15 V	50	38.5	32.5
2	2390.00	52.9 AV	54.0	-1.1	1.15 V	50	20.4	32.5
3	*2412.00	113.0 PK			1.17 V	12	80.5	32.5
4	*2412.00	102.9 AV			1.17 V	12	70.4	32.5
5	4824.00	47.1 PK	74.0	-26.9	1.57 V	299	43.7	3.4
6	4824.00	33.7 AV	54.0	-20.3	1.57 V	299	30.3	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	112.9 PK			1.61 H	162	80.5	32.4
2	*2437.00	92.9 AV			1.61 H	162	60.5	32.4
3	4874.00	46.2 PK	74.0	-27.8	3.04 H	143	42.5	3.7
4	4874.00	32.6 AV	54.0	-21.4	3.04 H	143	28.9	3.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.1 PK			1.56 V	103	80.7	32.4
2	*2437.00	103.2 AV			1.56 V	103	70.8	32.4
3	4874.00	47.3 PK	74.0	-26.7	1.40 V	313	43.6	3.7
4	4874.00	34.6 AV	54.0	-19.4	1.40 V	313	30.9	3.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.2 PK			1.54 H	161	68.7	32.5
2	*2462.00	91.2 AV			1.54 H	161	58.7	32.5
3	2483.50	60.8 PK	74.0	-13.2	1.68 H	169	28.2	32.6
4	2483.50	46.8 AV	54.0	-7.2	1.68 H	169	14.2	32.6
5	4924.00	46.3 PK	74.0	-27.7	2.89 H	139	42.5	3.8
6	4924.00	31.9 AV	54.0	-22.1	2.89 H	139	28.1	3.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.2 PK			1.70 V	111	78.7	32.5
2	*2462.00	101.3 AV			1.70 V	111	68.8	32.5
3	2483.50	71.1 PK	74.0	-2.9	1.46 V	102	38.5	32.6
4	2483.50	52.8 AV	54.0	-1.2	1.46 V	102	20.2	32.6
5	4924.00	47.6 PK	74.0	-26.4	1.34 V	323	43.8	3.8
6	4924.00	33.5 AV	54.0	-20.5	1.34 V	323	29.7	3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.57 H	159	25.9	32.5
2	2390.00	46.7 AV	54.0	-7.3	1.57 H	159	14.2	32.5
3	*2422.00	97.1 PK			1.63 H	165	64.7	32.4
4	*2422.00	87.6 AV			1.63 H	165	55.2	32.4
5	4844.00	45.4 PK	74.0	-28.6	2.97 H	135	41.8	3.6
6	4844.00	31.5 AV	54.0	-22.5	2.97 H	135	27.9	3.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.33 V	106	35.6	32.5
2	2390.00	52.9 AV	54.0	-1.1	1.33 V	106	20.4	32.5
3	*2422.00	107.2 PK			1.70 V	104	74.8	32.4
4	*2422.00	97.6 AV			1.70 V	104	65.2	32.4
5	4844.00	46.5 PK	74.0	-27.5	1.41 V	343	42.9	3.6
6	4844.00	33.1 AV	54.0	-20.9	1.41 V	343	29.5	3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.1 PK			1.49 H	160	66.7	32.4
2	*2437.00	89.6 AV			1.49 H	160	57.2	32.4
3	2483.50	58.7 PK	74.0	-15.3	1.59 H	167	26.1	32.6
4	2483.50	46.7 AV	54.0	-7.3	1.59 H	167	14.1	32.6
5	4874.00	45.7 PK	74.0	-28.3	3.04 H	140	42.0	3.7
6	4874.00	31.9 AV	54.0	-22.1	3.04 H	140	28.2	3.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.3 PK			1.71 V	103	76.9	32.4
2	*2437.00	99.7 AV			1.71 V	103	67.3	32.4
3	2483.50	68.8 PK	74.0	-5.2	1.47 V	108	36.2	32.6
4	2483.50	52.8 AV	54.0	-1.2	1.47 V	108	20.2	32.6
5	4874.00	47.5 PK	74.0	-26.5	1.37 V	321	43.8	3.7
6	4874.00	33.8 AV	54.0	-20.2	1.37 V	321	30.1	3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	97.5 PK			1.54 H	163	65.0	32.5
2	*2452.00	87.6 AV			1.54 H	163	55.1	32.5
3	2483.50	58.1 PK	74.0	-15.9	1.43 H	160	25.5	32.6
4	2483.50	46.4 AV	54.0	-7.6	1.43 H	160	13.8	32.6
5	4904.00	45.8 PK	74.0	-28.2	2.94 H	143	42.0	3.8
6	4904.00	31.7 AV	54.0	-22.3	2.94 H	143	27.9	3.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	107.5 PK			1.95 V	102	75.0	32.5
2	*2452.00	97.7 AV			1.95 V	102	65.2	32.5
3	2483.50	68.1 PK	74.0	-5.9	1.42 V	28	35.5	32.6
4	2483.50	52.5 AV	54.0	-1.5	1.42 V	28	19.9	32.6
5	4904.00	46.9 PK	74.0	-27.1	1.40 V	339	43.1	3.8
6	4904.00	33.5 AV	54.0	-20.5	1.40 V	339	29.7	3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

Below 1GHz worst-case data:


802.11b

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.58	29.9 QP	40.0	-10.1	1.51 H	159	39.2	-9.3
2	70.74	29.0 QP	40.0	-11.0	1.99 H	253	40.2	-11.2
3	86.26	27.3 QP	40.0	-12.7	1.99 H	235	41.2	-13.9
4	125.06	31.4 QP	43.5	-12.1	1.51 H	93	41.9	-10.5
5	152.22	28.4 QP	43.5	-15.1	1.01 H	355	37.2	-8.8
6	249.22	26.8 QP	46.0	-19.2	1.01 H	54	36.0	-9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report

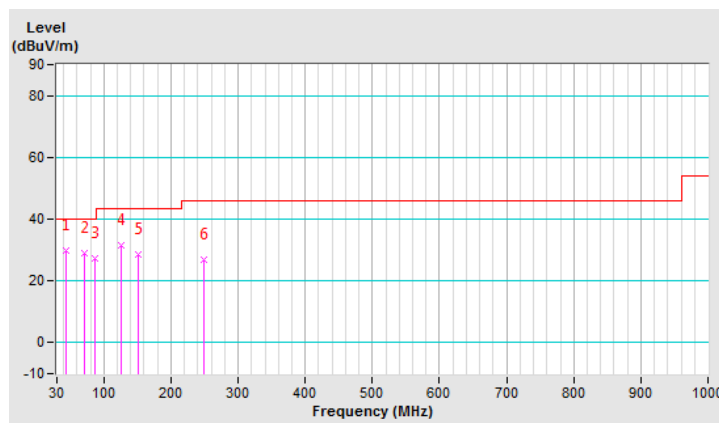


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	97.90	33.2 QP	43.5	-10.3	1.00 V	304	46.5	-13.3
2	125.06	28.1 QP	43.5	-15.4	1.00 V	11	38.6	-10.5
3	152.22	28.6 QP	43.5	-14.9	1.00 V	174	37.4	-8.8
4	249.22	25.7 QP	46.0	-20.3	1.00 V	249	34.9	-9.2
5	317.12	28.9 QP	46.0	-17.1	1.49 V	318	35.8	-6.9
6	361.74	32.9 QP	46.0	-13.1	1.49 V	13	38.7	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report

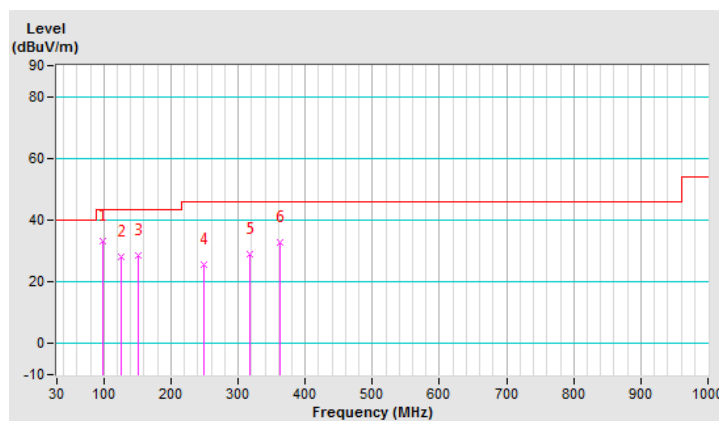

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note:** 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 10, 2018	Dec. 09, 2019
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 05, 2019	Sep. 04, 2020
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 21, 2019	Feb. 20, 2020
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 22, 2019	Aug. 21, 2020
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1.  
 3. The VCCI Site Registration No. is C-12040.



#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

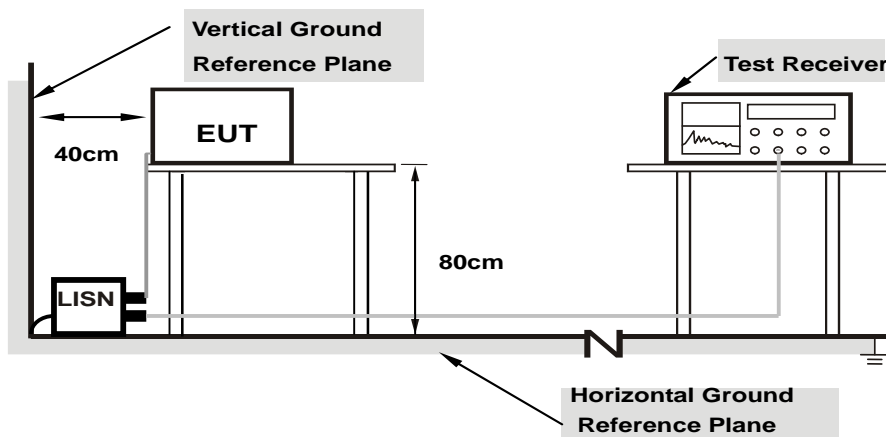

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.

#### 4.2.7 Test Results


Worst-case data: 802.11b

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.67	48.49	19.04	58.16	28.71	66.00	56.00	-7.84	-27.29
2	0.16200	9.67	46.25	17.09	55.92	26.76	65.36	55.36	-9.44	-28.60
3	0.20600	9.66	40.42	12.35	50.08	22.01	63.37	53.37	-13.29	-31.36
4	0.23000	9.66	44.03	13.07	53.69	22.73	62.45	52.45	-8.76	-29.72
5	0.25400	9.67	37.97	9.82	47.64	19.49	61.63	51.63	-13.99	-32.14
6	0.30200	9.68	37.38	9.32	47.06	19.00	60.19	50.19	-13.13	-31.19
7	0.37400	9.69	36.27	8.29	45.96	17.98	58.41	48.41	-12.45	-30.43
8	0.41800	9.69	36.04	8.04	45.73	17.73	57.49	47.49	-11.76	-29.76
9	0.46600	9.69	36.65	8.36	46.34	18.05	56.58	46.58	-10.24	-28.53
10	0.51400	9.70	36.64	8.34	46.34	18.04	56.00	46.00	-9.66	-27.96
11	0.56200	9.70	36.34	8.05	46.04	17.75	56.00	46.00	-9.96	-28.25
12	0.60600	9.70	38.10	8.82	47.80	18.52	56.00	46.00	-8.20	-27.48
13	0.65400	9.71	33.07	5.64	42.78	15.35	56.00	46.00	-13.22	-30.65
14	0.89000	9.72	26.48	1.48	36.20	11.20	56.00	46.00	-19.80	-34.80

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

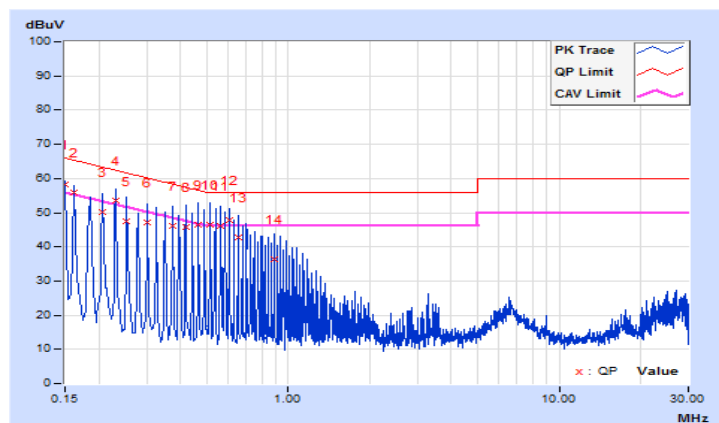


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	<b>0.15000</b>	<b>9.64</b>	<b>51.05</b>	<b>21.08</b>	<b>60.69</b>	<b>30.72</b>	<b>66.00</b>
2	0.17000	9.64	47.76	18.31	57.40	27.95	64.96	54.96	-7.56	-27.01
3	0.19400	9.64	44.52	15.43	54.16	25.07	63.86	53.86	-9.70	-28.79
4	0.24200	9.64	40.40	11.80	50.04	21.44	62.03	52.03	-11.99	-30.59
5	0.26221	9.65	37.90	9.90	47.55	19.55	61.36	51.36	-13.81	-31.81
6	0.28906	9.65	35.93	8.39	45.58	18.04	60.55	50.55	-14.97	-32.51
7	0.35800	9.66	34.37	7.02	44.03	16.68	58.77	48.77	-14.74	-32.09
8	0.45400	9.66	34.49	6.91	44.15	16.57	56.80	46.80	-12.65	-30.23
9	0.50200	9.67	34.34	6.73	44.01	16.40	56.00	46.00	-11.99	-29.60
10	0.59400	9.67	33.34	5.83	43.01	15.50	56.00	46.00	-12.99	-30.50
11	0.64200	9.68	31.70	4.81	41.38	14.49	56.00	46.00	-14.62	-31.51
12	0.68954	9.68	29.49	3.30	39.17	12.98	56.00	46.00	-16.83	-33.02
13	0.75800	9.68	26.52	1.57	36.20	11.25	56.00	46.00	-19.80	-34.75
14	0.85000	9.69	25.33	0.83	35.02	10.52	56.00	46.00	-20.98	-35.48

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

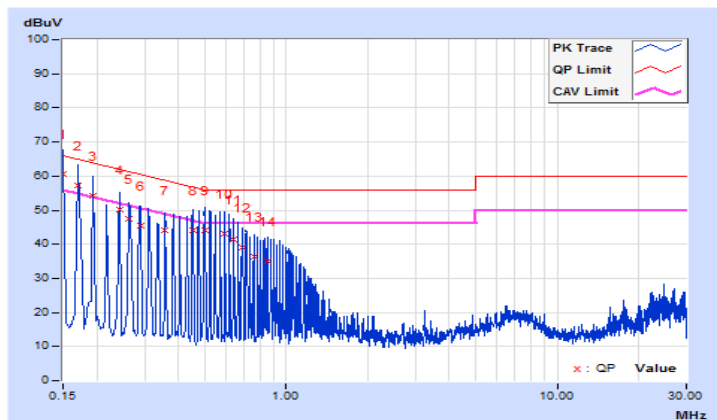


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup

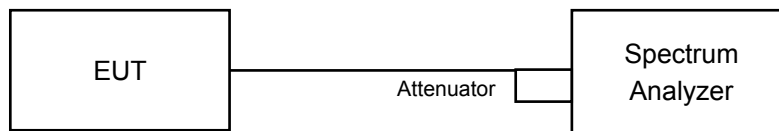

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	7.62	8.12	0.5	Pass
6	2437	9.57	8.13	0.5	Pass
11	2462	7.64	8.12	0.5	Pass

##### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.41	16.42	0.5	Pass
6	2437	16.36	16.36	0.5	Pass
11	2462	16.41	16.42	0.5	Pass

##### 802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.66	17.65	0.5	Pass
6	2437	17.62	17.58	0.5	Pass
11	2462	17.62	17.63	0.5	Pass

##### 802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	36.41	36.12	0.5	Pass
6	2437	36.42	36.09	0.5	Pass
9	2452	36.10	35.93	0.5	Pass

### Spectrum Plot of Worst Value


#### 802.11b

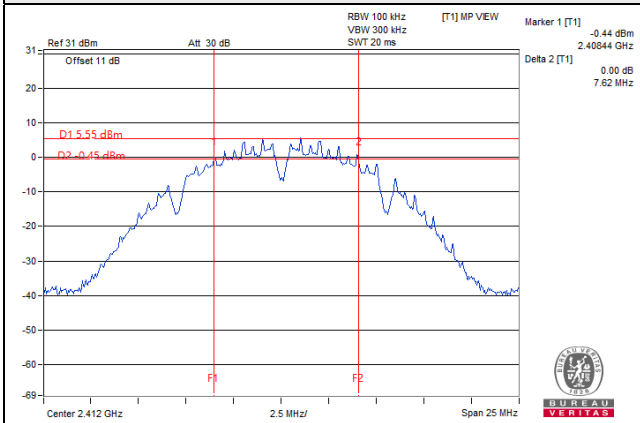


#### 802.11g

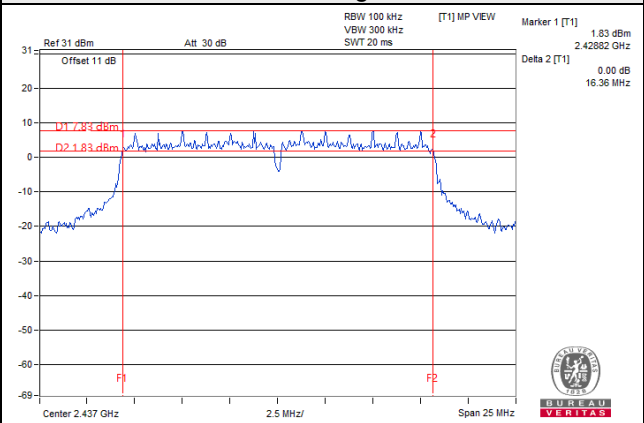

#### 802.11n (HT20)

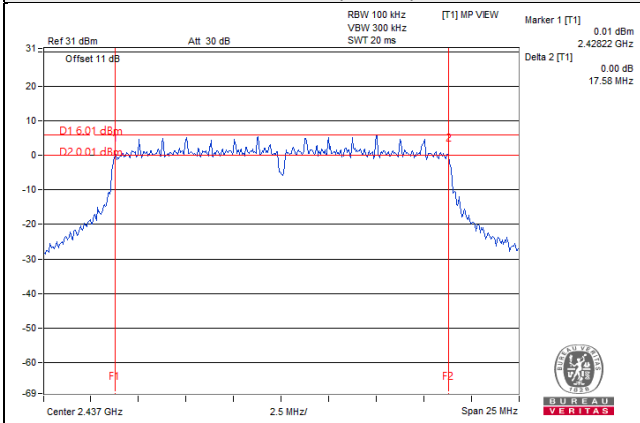

#### 802.11n (HT40)

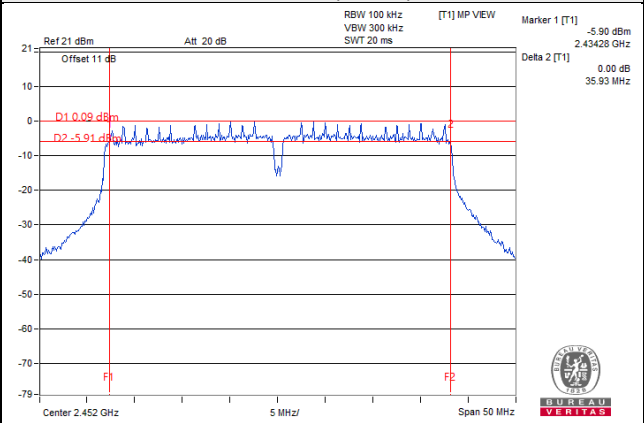

## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as item 4.3.6.

#### 4.4.7 Test Results

##### 802.11b

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	12.67	12.69	37.071	15.69	30	Pass
6	2437	21.28	21.31	<b>269.483</b>	24.31	30	Pass
11	2462	20.73	20.76	237.428	23.76	30	Pass

##### 802.11g

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.32	15.12	66.550	18.23	30	Pass
6	2437	18.48	18.17	136.084	21.34	30	Pass
11	2462	14.95	14.51	59.510	17.75	30	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.47	15.35	69.514	18.42	30	Pass
6	2437	16.43	16.25	86.124	19.35	30	Pass
11	2462	15.05	14.72	61.637	17.90	30	Pass

##### 802.11n (HT40)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	13.21	13.12	41.453	16.18	30	Pass
6	2437	15.72	15.52	72.970	18.63	30	Pass
9	2452	13.31	13.01	41.428	16.17	30	Pass




## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.5.2 Test Setup

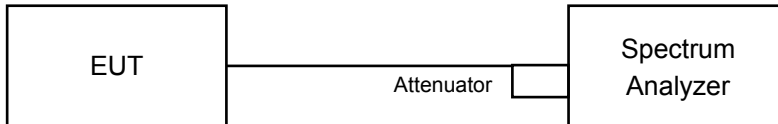

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

For Average Power (Duty cycle  $\geq 98\%$ )

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For Average Power (Duty cycle  $< 98\%$ )

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add  $10 \log(1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as item 4.3.6.

#### 4.5.7 Test Results

##### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/10kHz)	10 log (N=2) dB	Total PSD (dBm/10kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-13.11	3.01	-10.10	8.00	Pass
	6	2437	-5.49	3.01	-2.48	8.00	Pass
	11	2462	-5.96	3.01	-2.95	8.00	Pass
1	1	2412	-13.52	3.01	-10.51	8.00	Pass
	6	2437	-5.33	3.01	-2.32	8.00	Pass
	11	2462	-6.21	3.01	-3.20	8.00	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional Gain = 2.78dBi + 10log(2) = 5.79dBi < 6dBi, so the power spectral density limit is not reduced.

##### 802.11g

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/10kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-15.50	3.01	0.22	-12.27	8.00	Pass
	6	2437	-12.45	3.01	0.22	-9.22	8.00	Pass
	11	2462	-15.75	3.01	0.22	-12.52	8.00	Pass
1	1	2412	-14.94	3.01	0.22	-11.71	8.00	Pass
	6	2437	-12.32	3.01	0.22	-9.09	8.00	Pass
	11	2462	-15.21	3.01	0.22	-11.98	8.00	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional Gain = 2.78dBi + 10log(2) = 5.79dBi < 6dBi, so the power spectral density limit is not reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

##### 802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/10kHz)	10 log (N=2) dB	Total PSD (dBm/10kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-15.52	3.01	-12.51	8.00	Pass
	6	2437	-14.54	3.01	-11.53	8.00	Pass
	11	2462	-15.63	3.01	-12.62	8.00	Pass
1	1	2412	-14.62	3.01	-11.61	8.00	Pass
	6	2437	-14.45	3.01	-11.44	8.00	Pass
	11	2462	-15.76	3.01	-12.75	8.00	Pass

Note:


1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional Gain = 2.78dBi + 10log(2) = 5.79dBi < 6dBi, so the power spectral density limit is not reduced.

### 802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/10kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-20.63	3.01	0.16	-17.46	8.00	Pass
	6	2437	-18.25	3.01	0.16	-15.08	8.00	Pass
	9	2452	-20.41	3.01	0.16	-17.24	8.00	Pass
1	3	2422	-20.86	3.01	0.16	-17.69	8.00	Pass
	6	2437	-18.43	3.01	0.16	-15.26	8.00	Pass
	9	2452	-20.86	3.01	0.16	-17.69	8.00	Pass

**Note:**

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
- Directional Gain =  $2.78\text{dBi} + 10\log(2) = 5.79\text{dBi} < 6\text{dBi}$ , so the power spectral density limit is not reduced.
- Refer to section 3.3 for duty cycle spectrum plot.

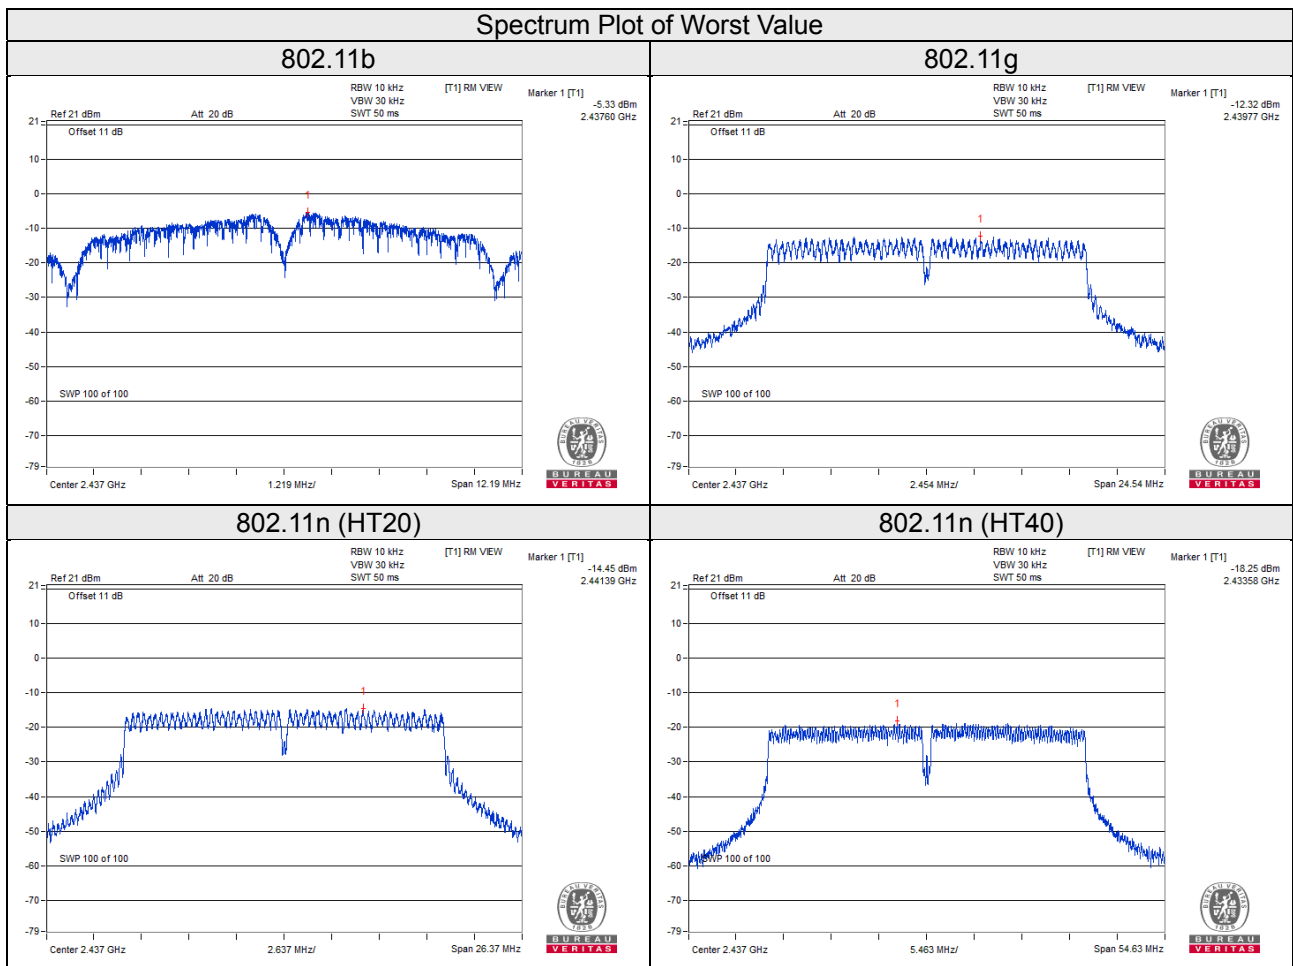


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

#### 4.6.5 Deviation from Test Standard

No deviation.

#### 4.6.6 EUT Operating Condition

Same as item 4.3.6.



#### 4.6.7 Test Results

The conducted emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit.



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b\_Chain 0



CH 1

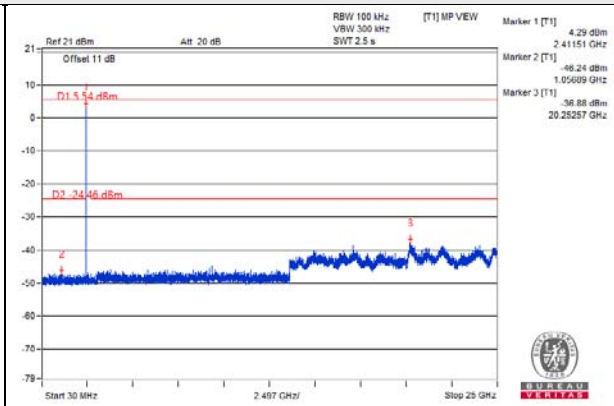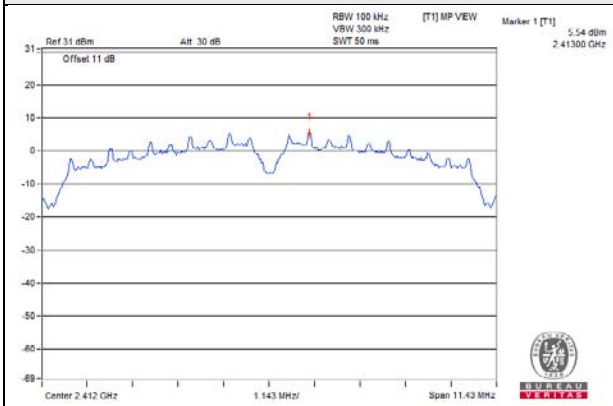


CH 6

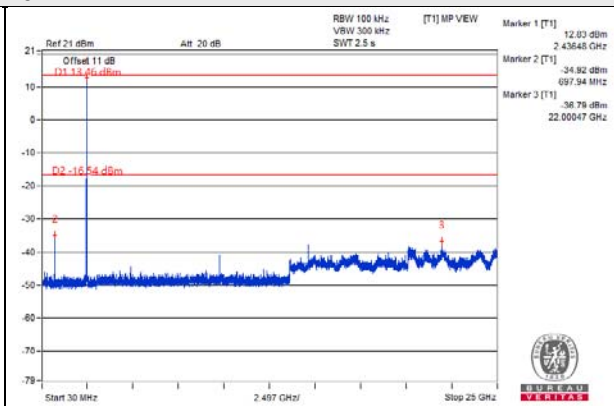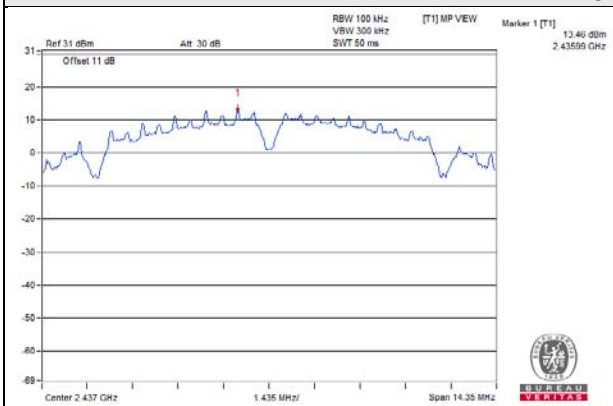


CH 11

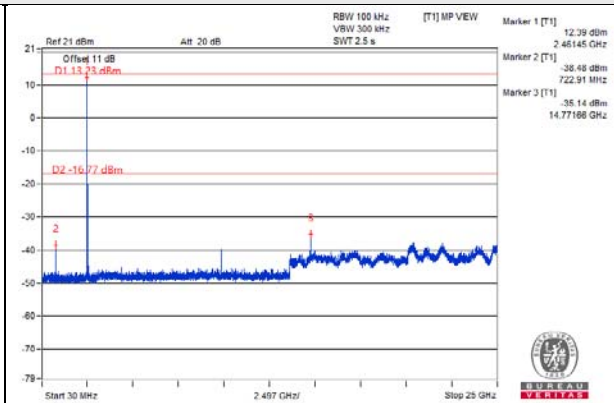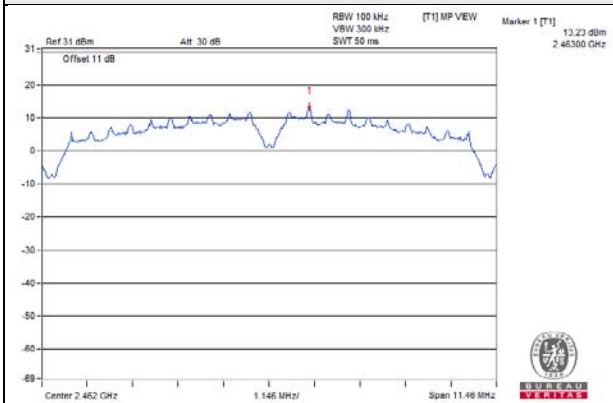

CH 1 Band edge


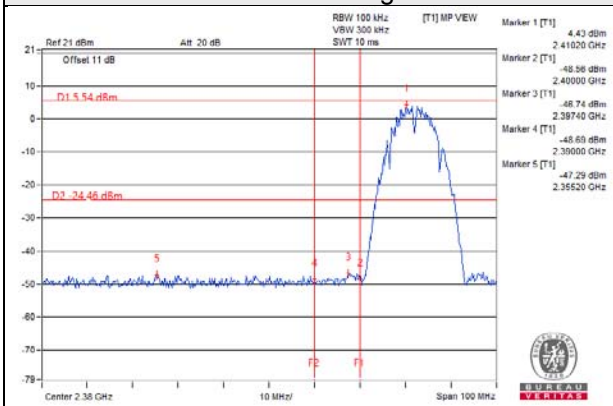


CH 11 Band edge


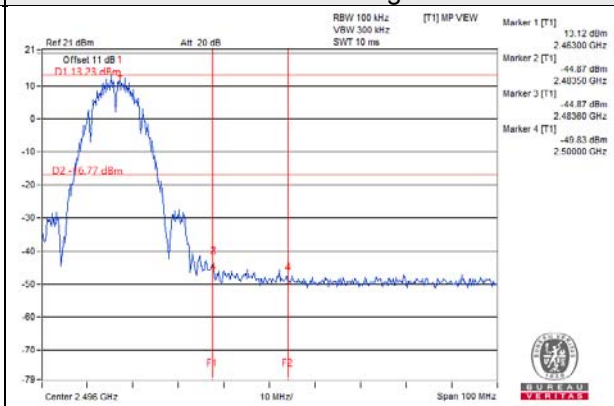


802.11b\_Chain 1



CH 1

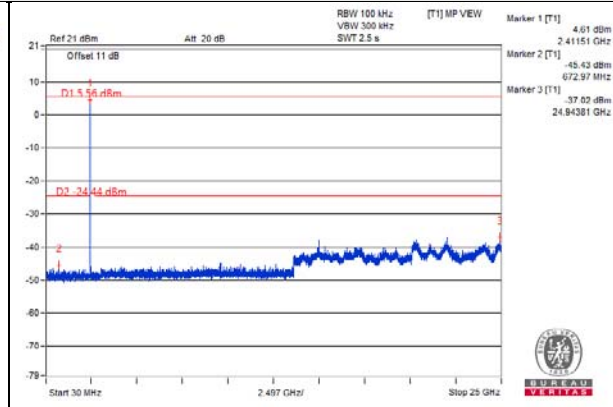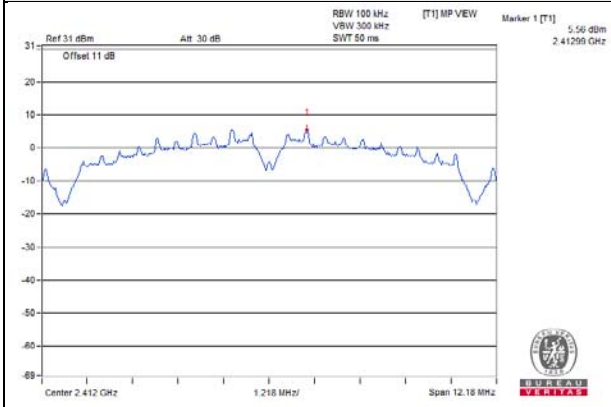


CH 6

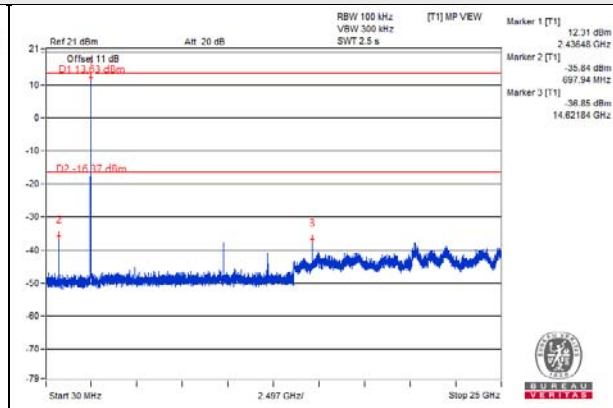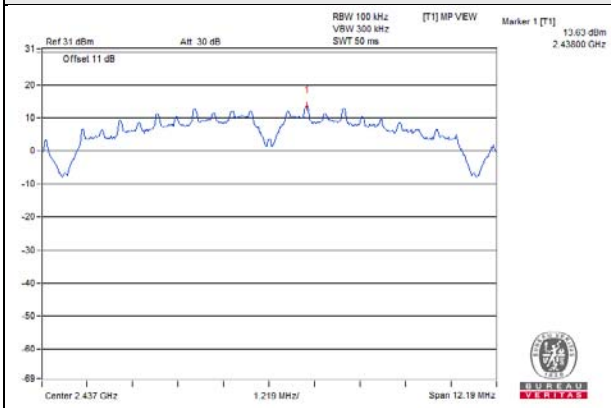


CH 11

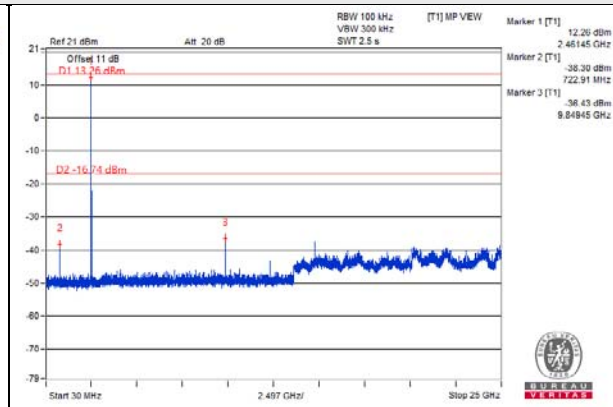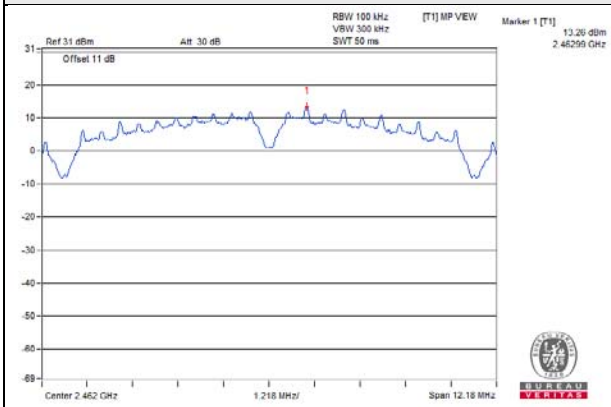

CH 1 Band edge


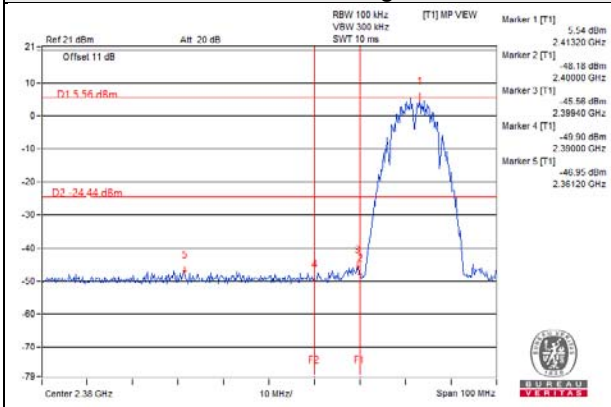


CH 11 Band edge


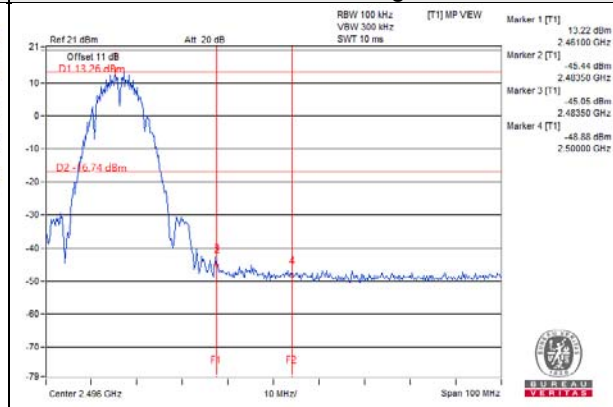


802.11g\_Chain 0



CH 1

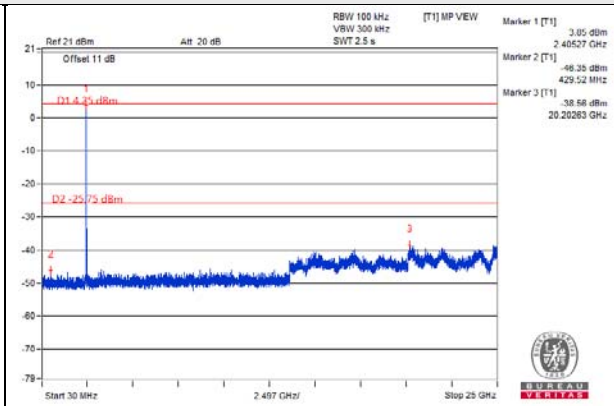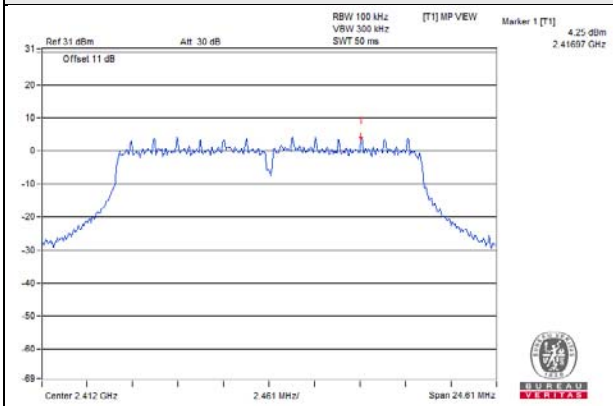


CH 6

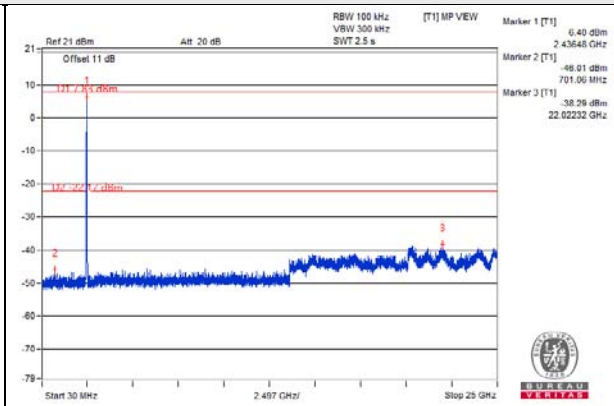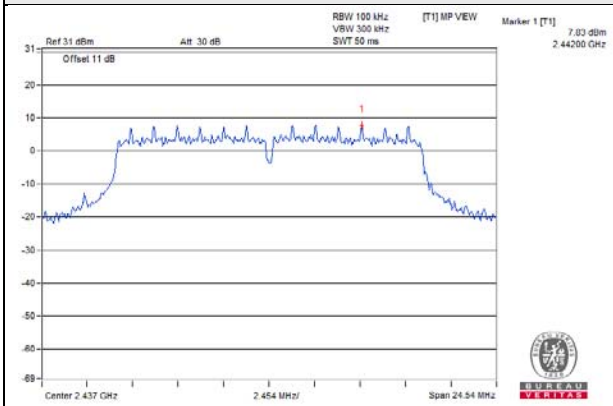


CH 11

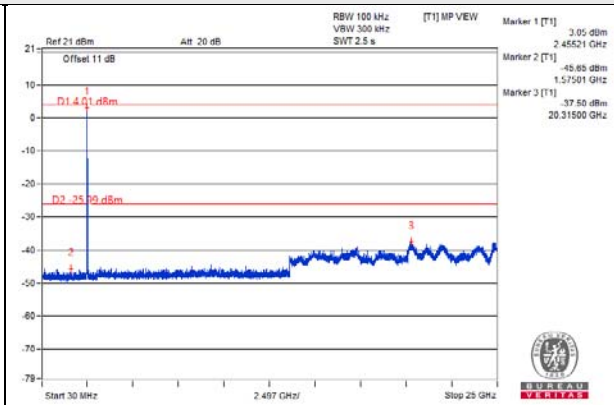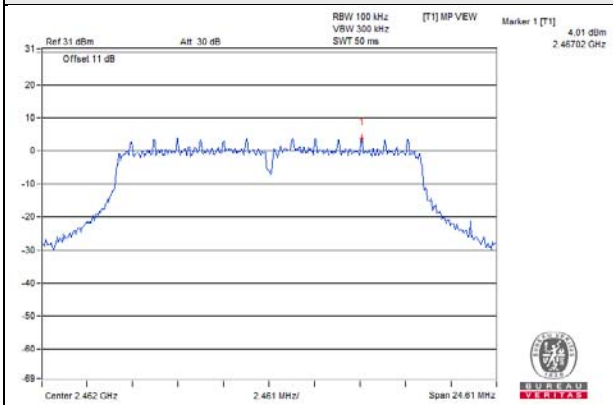

CH 1 Band edge

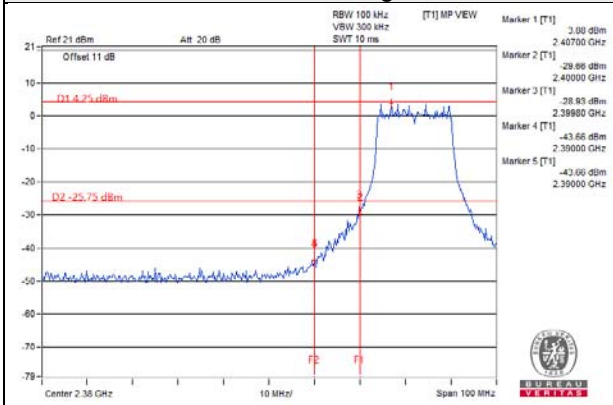



CH 11 Band edge

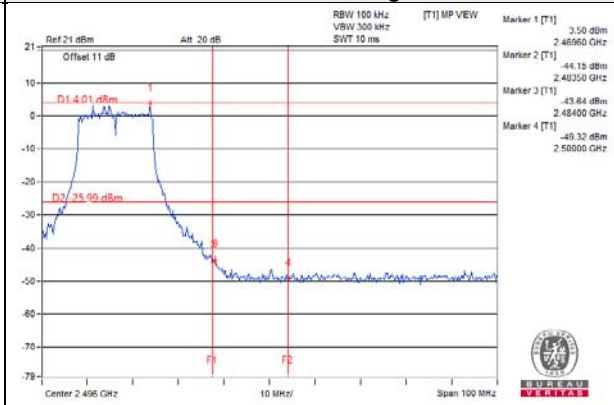





802.11g\_Chain 1



CH 1

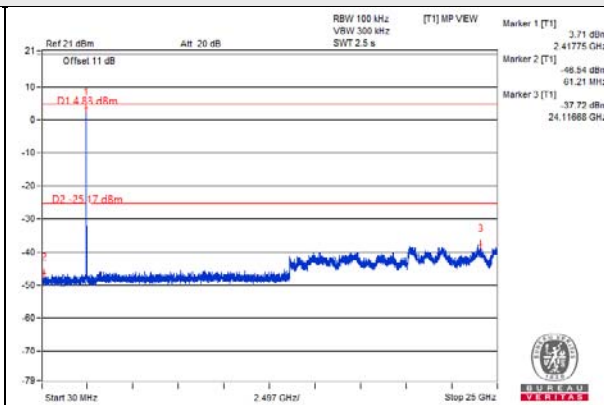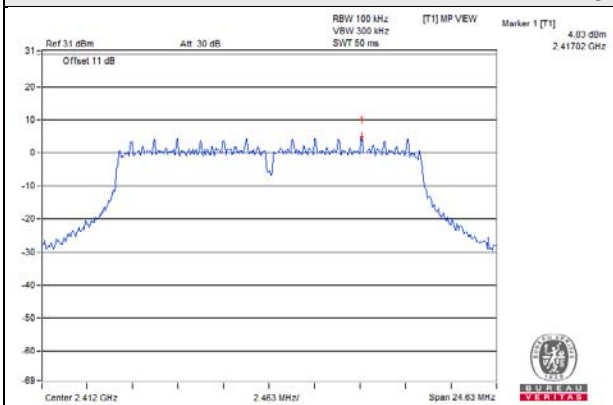


CH 6

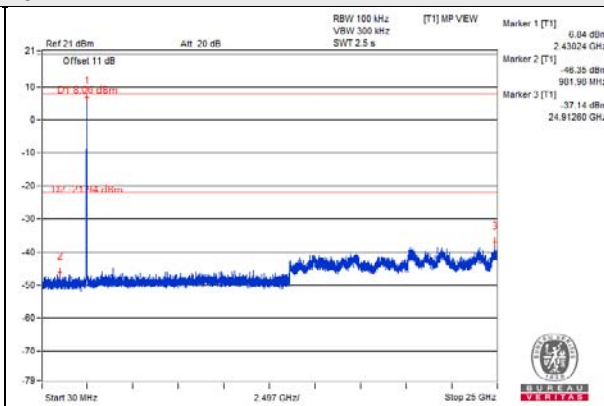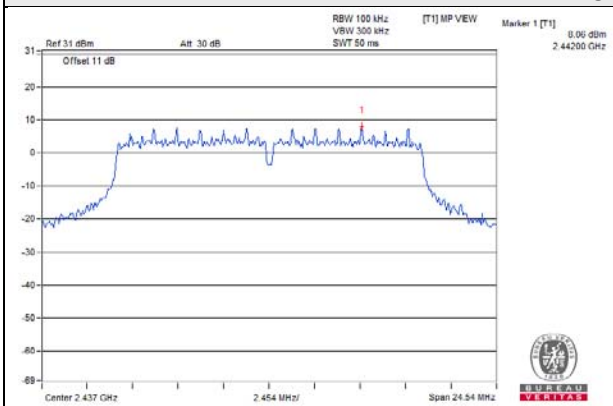


CH 11

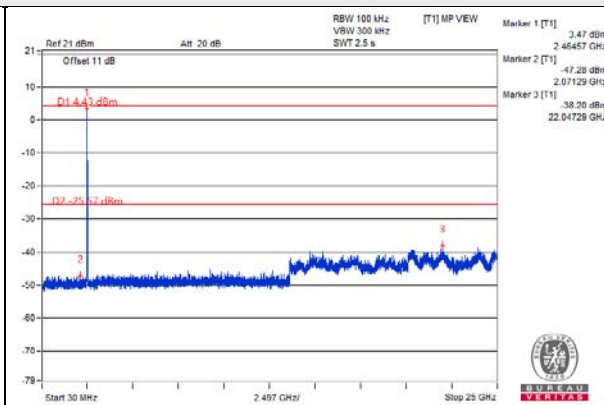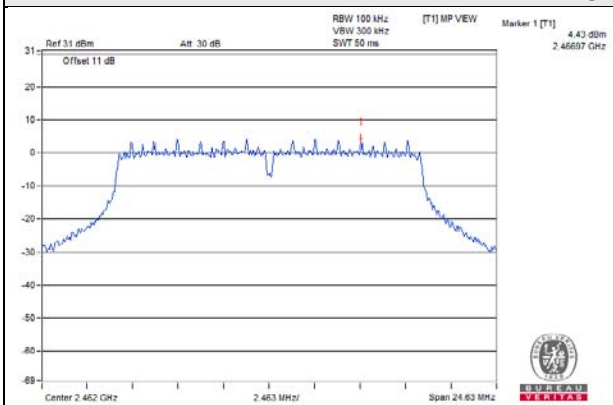

CH 1 Band edge


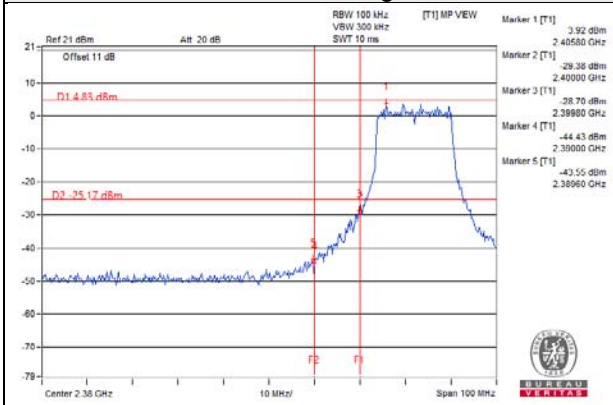


CH 11 Band edge


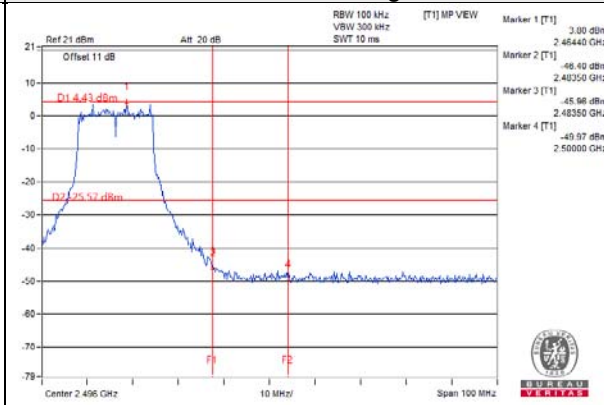


802.11n (HT20)\_Chain 0



CH 1

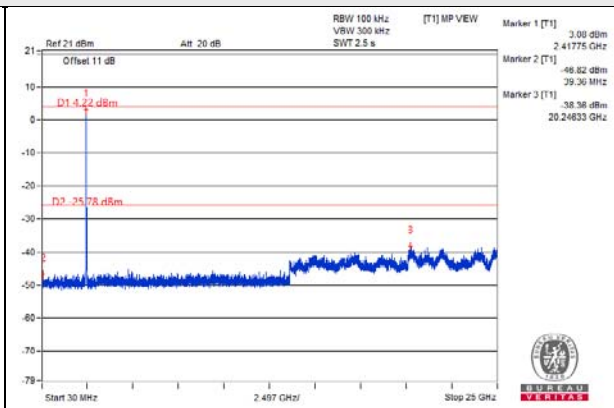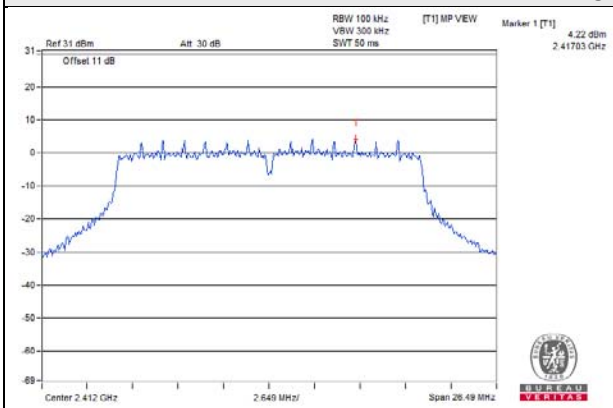


CH 6

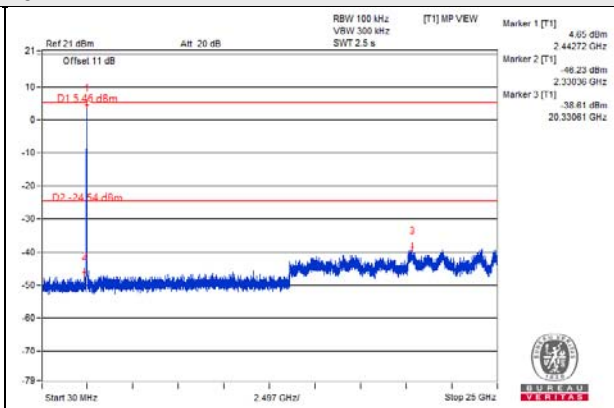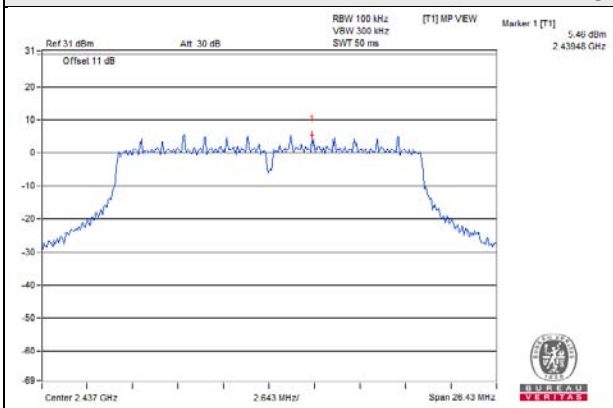


CH 11

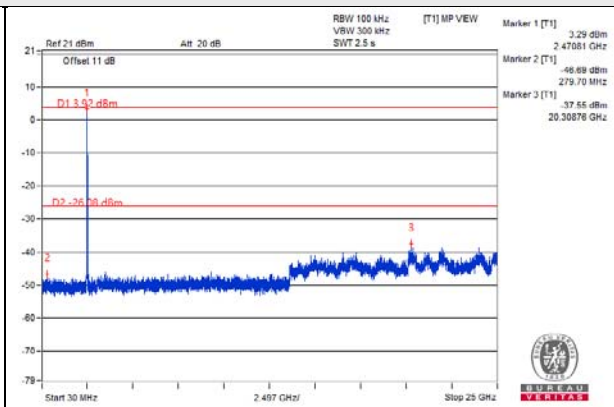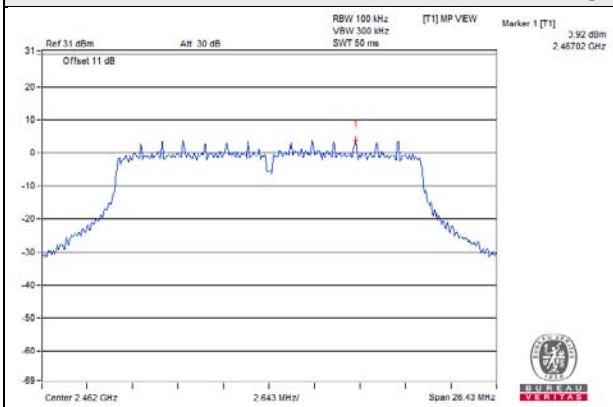

CH 1 Band edge


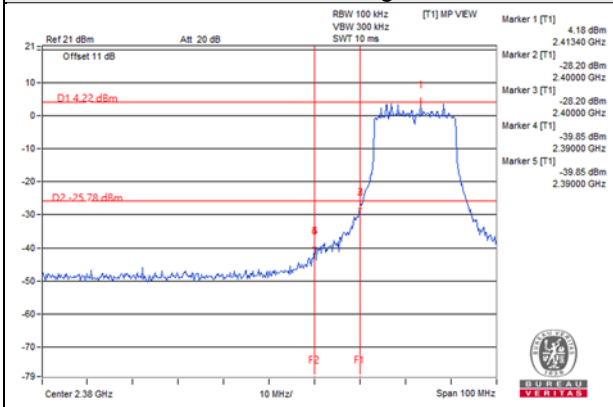


CH 11 Band edge


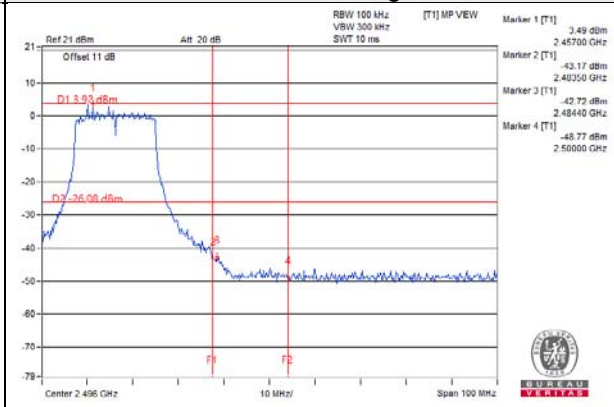


802.11n (HT20)\_Chain 1



CH 1

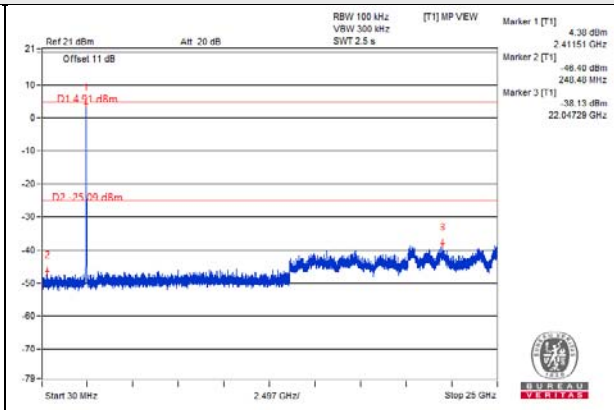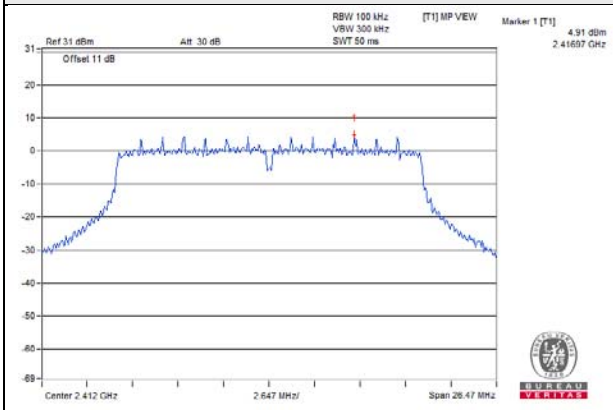


CH 6

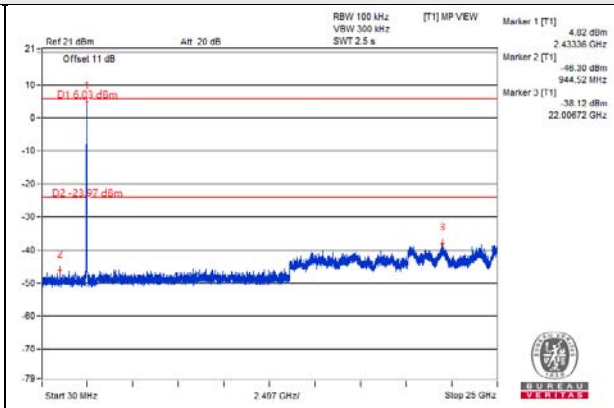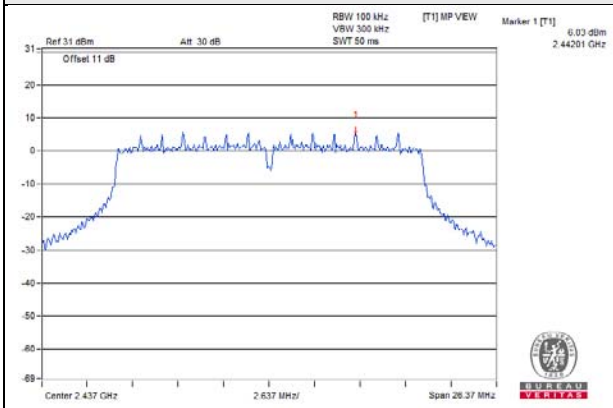


CH 11

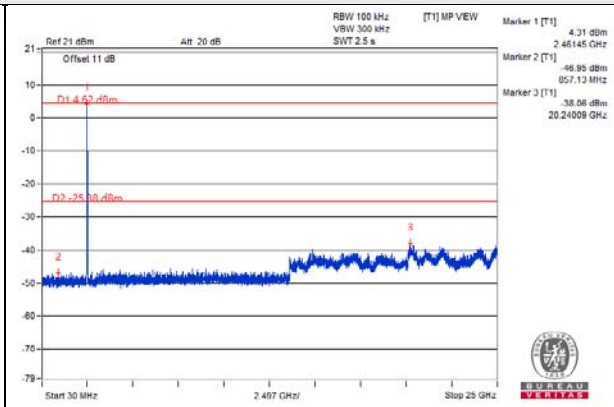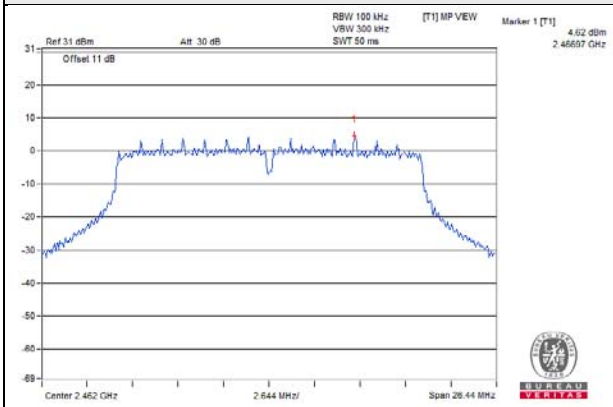

CH 1 Band edge


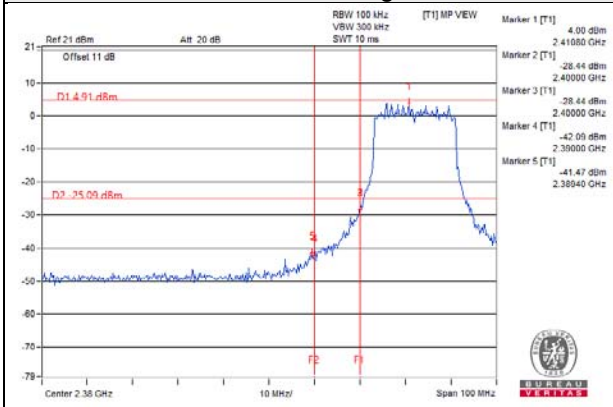


CH 11 Band edge


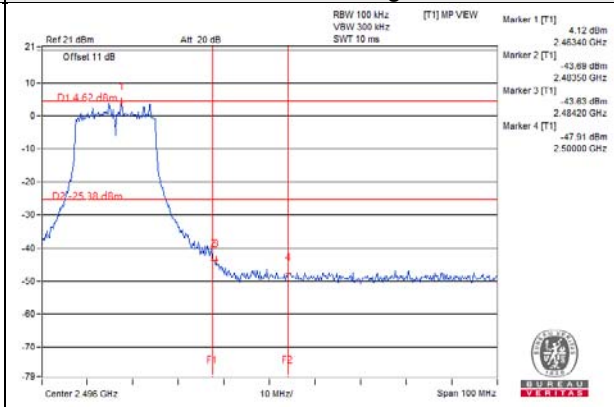


802.11n (HT40)\_Chain 0



CH 3

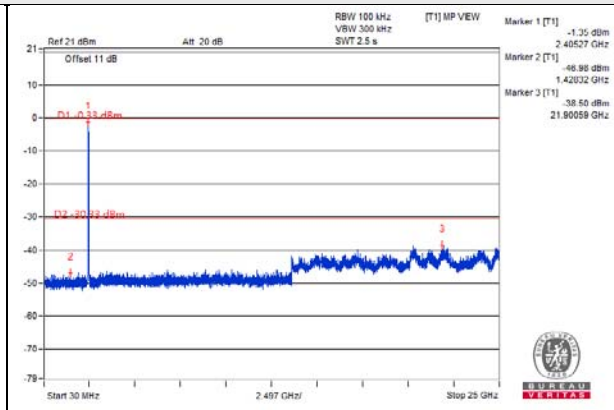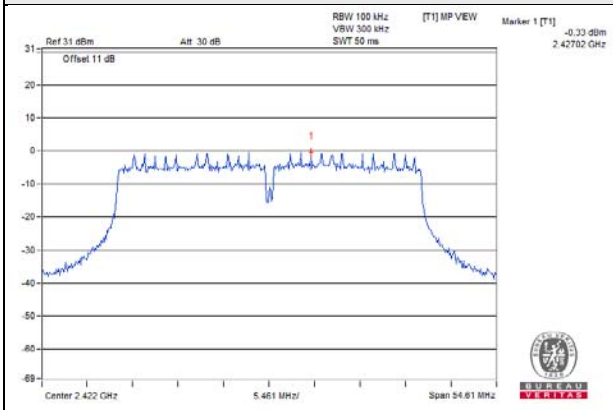


CH 6

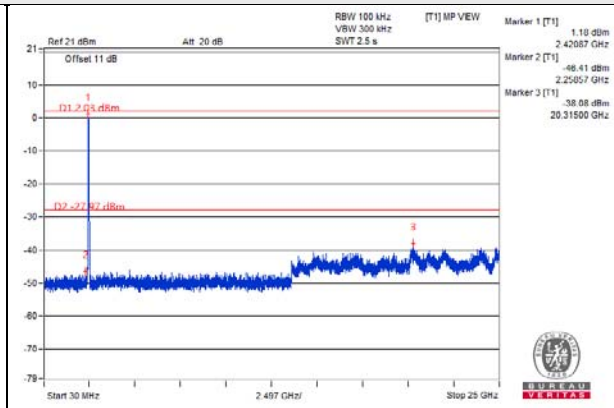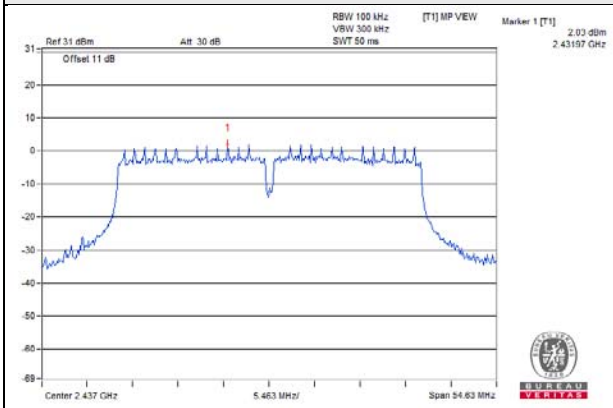


CH 9

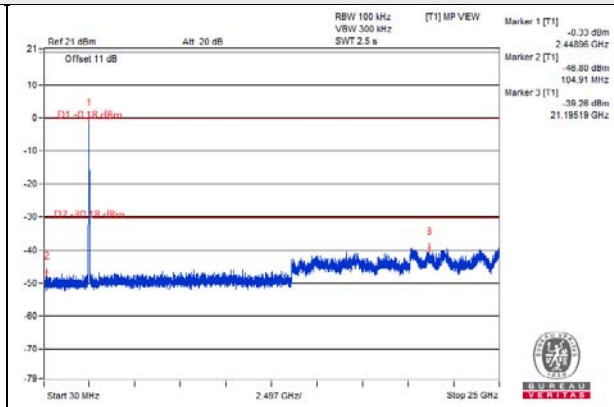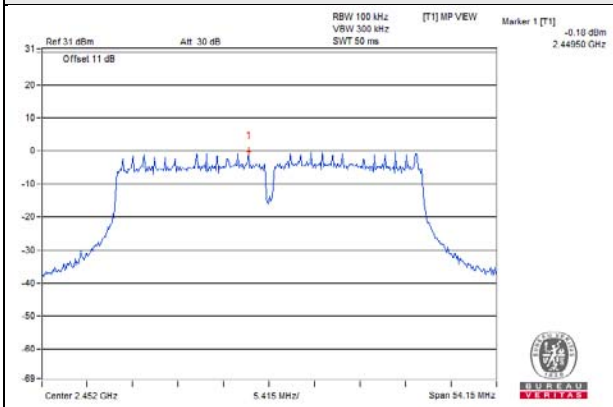

CH 3 Band edge


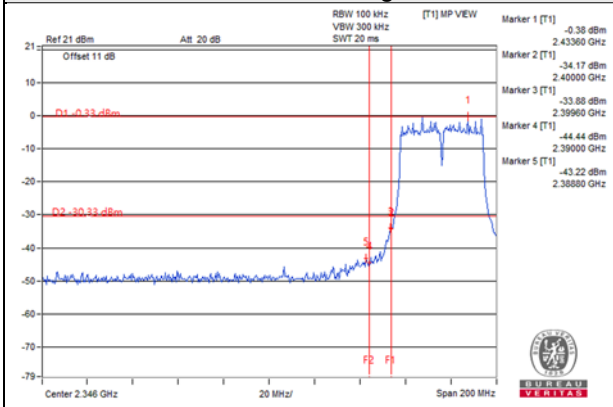


CH 9 Band edge


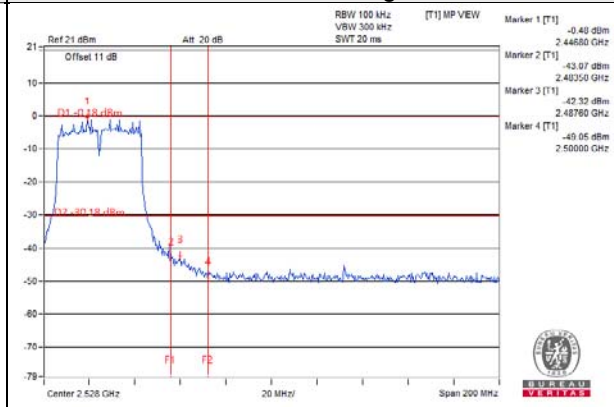


802.11n (HT40)\_Chain 1



CH 3

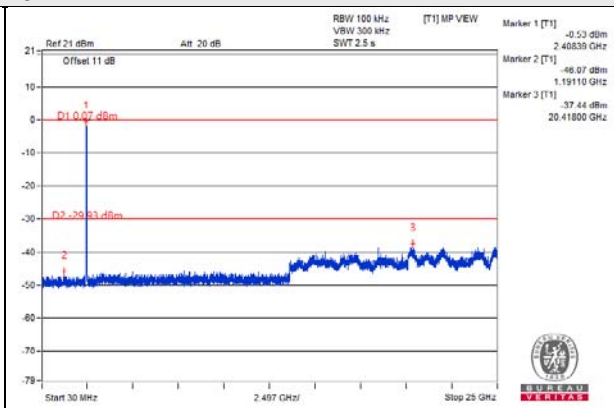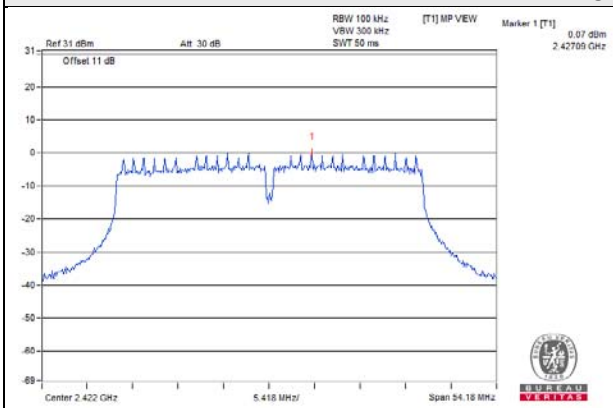


CH 6

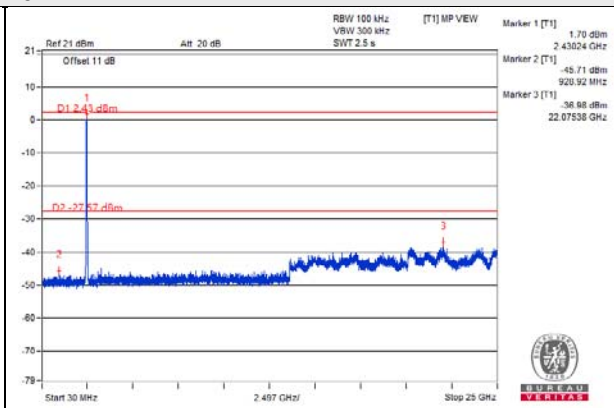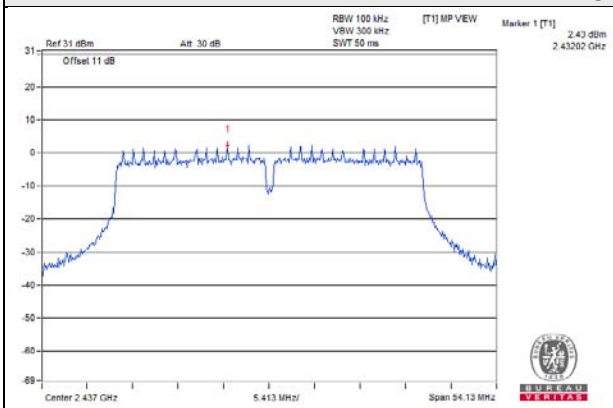


CH 9

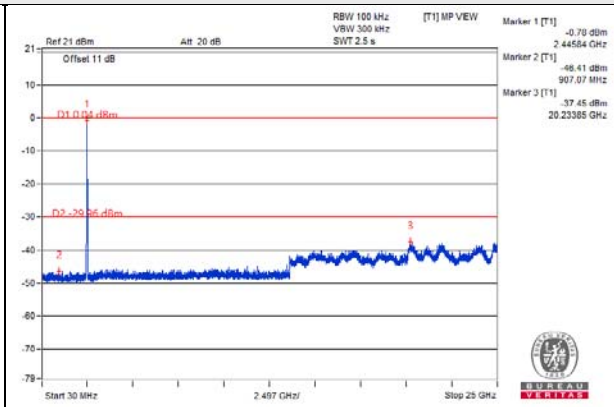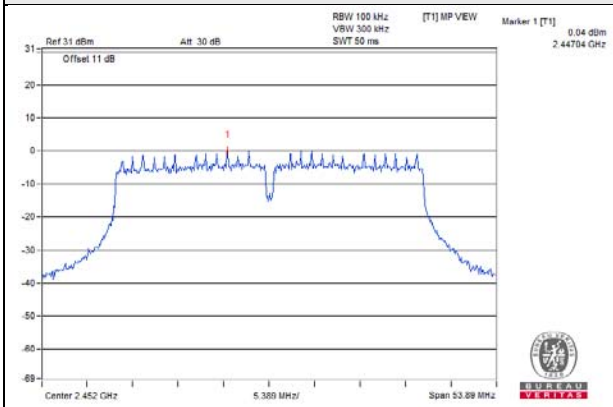

CH 3 Band edge

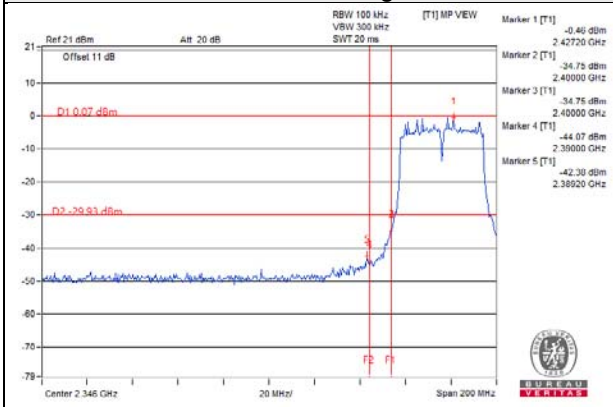

CH 9 Band edge

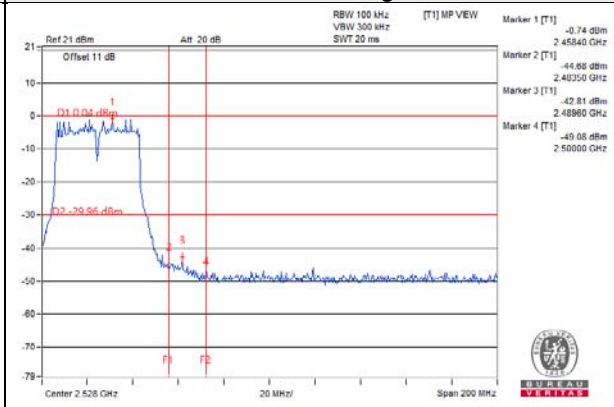

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---