



Test Certificate

A sample of the following product received on May 7, 2009 and tested on May 21, 2009 complied with the requirements of,

- Subpart B of Part 15 of FCC Rules for Class B digital devices.
- Industry Canada Interference Causing Equipment Standard ICES 003, dated February 2004 (Class B).

given the measurement uncertainties detailed in Elliott report R75552.

**Intel Corporation
Model 112BNHMW**

Mark Briggs
Staff Engineer

Intel Corporation

Printed Name



Testing Cert #2016-01

Elliott Laboratories is accredited by the A2LA, certificate number 2016-01, to perform the test(s) listed in this certificate. This certificate shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories

Elliott Laboratories
www.elliottlabs.com

684 West Maude Avenue
Sunnyvale, CA 94085-3518

408-245-7800 Phone
408-245-3499 Fax



EMC Test Report

Class B Digital Device

*FCC Part 15
Industry Canada ICES 003*

Model: 112BNHMMW

COMPANY: Intel Corporation
2111 N.E. 25th Avenue
Hillsborough, OR

TEST SITE(S): Elliott Laboratories
41039 Boyce Road.
Fremont, CA. 94538-2435

REPORT DATE: May 31, 2009

FINAL TEST DATES: May 21, 2009

AUTHORIZED SIGNATORY:

A handwritten signature in blue ink that reads "Mark Briggs".

Mark Briggs
Staff Engineer
Elliott Laboratories.



Testing Cert #2016-01

Elliott Laboratories is accredited by the A2LA, certificate number 2016-01, to perform the test(s) listed in this report, except where noted otherwise. This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories

REVISION HISTORY

Rev#	Date	Comments	Modified By
1	June 1, 2009	First release	

TABLE OF CONTENTS

COVER PAGE	1
REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE	4
OBJECTIVE	4
STATEMENT OF COMPLIANCE	5
DEVIATIONS FROM THE STANDARDS	5
INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS	6
CONDUCTED EMISSIONS (MAINS PORT)	6
RADIATED EMISSIONS	6
MEASUREMENT UNCERTAINTIES.....	6
EQUIPMENT UNDER TEST (EUT) DETAILS	7
GENERAL.....	7
OTHER EUT DETAILS.....	7
ENCLOSURE.....	7
MODIFICATIONS.....	7
SUPPORT EQUIPMENT	7
EUT INTERFACE PORTS	8
EUT OPERATION	8
EMISSIONS TESTING	9
GENERAL INFORMATION.....	9
CONDUCTED EMISSIONS CONSIDERATIONS	9
RADIATED EMISSIONS CONSIDERATIONS	9
MEASUREMENT INSTRUMENTATION	10
RECEIVER SYSTEM	10
INSTRUMENT CONTROL COMPUTER	10
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	10
IMPEDANCE STABILIZATION NETWORK (ISN)	11
FILTERS/ATTENUATORS	11
ANTENNAS.....	11
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	11
INSTRUMENT CALIBRATION.....	11
TEST PROCEDURES	12
EUT AND CABLE PLACEMENT	12
CONDUCTED EMISSIONS (MAINS)	12
CONDUCTED EMISSIONS (TELECOMMUNICATION PORTS)	12
RADIATED EMISSIONS (SEMI-ANECHOIC AND/OR OATS TEST ENVIRONMENT)	13
Preliminary Scan.....	13
Final Maximization.....	13
SAMPLE CALCULATIONS	14
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	14
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	14
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	1
APPENDIX B RADIATED AND CONDUCTED EMISSIONS TEST DATA	2
APPENDIX C TEST CONFIGURATION PHOTOGRAPHS	3
APPENDIX D PRODUCT LABELING REQUIREMENTS	5
APPENDIX E USER MANUAL REGULATORY STATEMENTS	6

SCOPE

Governments and standards organizations around the world have published requirements regarding the electromagnetic emissions of information technology equipment. Electromagnetic emissions testing has been performed on the Intel Corporation model 112BNHMW, to establish compliance with these requirements.

Electromagnetic emissions data has been taken pursuant to the following standards. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with these specifications, test procedures, and measurement guidelines as outlined in Elliott Laboratories test procedures.

Standard	Title	Standard Date
FCC Part 15, Subpart B	Radio Frequency Devices	October 2007 as Amended
ICES-003, Issue 4	Digital apparatus	2004

In order to demonstrate compliance with the requirements, the company or a contracted laboratory makes measurements and takes the necessary steps to ensure that the equipment complies with the appropriate technical standards.

OBJECTIVE

The objective of Intel Corporation is to verify compliance with FCC requirements for digital devices and Canada's requirements for digital devices;

STATEMENT OF COMPLIANCE

The tested sample of Intel Corporation model 112BNHMW complied with the requirements of:

Standard/Regulation	Equipment Type/Class	Standard Date
Subpart B of Part 15 of the FCC Rules (CFR title 47)	Class B	2007 as amended
ICES-003, Issue 4	Class B	2004

The test results recorded herein are based on a single type test of the Intel Corporation model 112BNHMW and therefore apply only to the tested sample. The sample was selected and prepared by Steve Hackett of Intel Corporation.

Maintenance of compliance is the responsibility of the company. Any modification of the product that could result in increased emissions or susceptibility should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different enclosure, different line filter or power supply, harnessing and/or interface cable changes, etc.).

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS

The following emissions tests were performed on the Intel Corporation model 112BNHMW. The measurements were extracted from the data recorded during testing and represent the highest amplitude emissions relative to the specification limits. The actual test results are contained in an appendix of this report.

CONDUCTED EMISSIONS (MAINS PORT)

Frequency Range Operating Voltage	Standard/Section	Requirement	Measurement	Margin	Status
0.15-30 MHz, 120V, 60Hz	FCC § 15.107(a) VCCI Table 4.2 (Class B)	0.15-0.5 MHz: 66-56 dB μ V QP 56-46 dB μ V Av 0.5-5.0 MHz: 56 dB μ V QP 46 dB μ V Av 5.0-30.0 MHz: 60 dB μ V QP 50 dB μ V Av	43.3dB μ V @ 1.929MHz	-12.7dB	Complied

RADIATED EMISSIONS

Frequency Range	Standard/Section	Requirement	Measurement	Margin	Status
30-1000 MHz	FCC §15.109(a)	30 – 88 MHz 40 dB μ V/m 88 – 216 MHz 43.5 dB μ V/m 216 – 960 MHz 46 dB μ V/m 960 – 1000 Mhz 54 dB μ V/m (3m limit)	42.7dB μ V/m @398.27 MHz	-3.3dB	Complied
Note 1 Testing above 1GHz against FCC 15.109(a) requirements was not required because the highest frequency generated in the EUT was declared to be less than 108 MHz (40MHz was the fastest clock for the digital device).					

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below were calculated using the approach described in CISPR 16-4-2:2003 using a coverage factor of k=2, which gives a level of confidence of approximately 95%. The levels were found to be below levels of U_{cispr} and therefore no adjustment of the data for measurement uncertainty is required.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
Conducted Emissions	dBuV or dBuA	150kHz – 30MHz	\pm 2.2 dB
Radiated Electric Field	dBuV/m	30 – 1000 MHz	\pm 3.6 dB
		1000 – 40,000 MHz	\pm 6.0 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Intel Corporation model 112BNHMW is a 1x2 802.11bgn Half-Mini PCIe card designed for use in laptop or other similar host systems. Testing for the digital device emissions was performed with the card installed inside a host laptop with antenna connections to the integrated antennas in the host system. The electrical rating of the EUT is 3.3Vdc (via PCIe bus).

The sample was received on May 7, 2009 and tested on May 21, 2009. The EUT consisted of the following component(s):

Company	Model	Description	MAC Address	FCC ID
Intel	112BNHM W	1x2 802.11bgn PCIe card	001E6400E9B 8	PD9112BNH PD9112BNHU

OTHER EUT DETAILS

The antenna system used with the Intel Corporation model 112BNHMW would typically be integrated into the display section of the host laptop. For the purposes of testing the device was tested with the Intel Universe Antenna (gain 3.2dBi in the 2.4GHz band) and the antennas were mounted to a glass fixture to simulate the laptop installation.

ENCLOSURE

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a host computer or system.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

The following equipment was used as support equipment:

Manufacturer	Model	Description	Serial Number	FCC ID
Toshiba	PSAG8U- 04001W	Laptop PC(Host)	49290792Q	DoC
Toshiba	ADP-75SB AB	Laptop AC Transformer	N/A	N/A
HP	ThinkJet 5650	Printer	MY3883K42P	DoC
Netgear	FS108	HUB(Fast Ethernet Switch)	FS18H2BCB092 554	N/A

The Ethernet Hub was located remotely; all other equipment was located locally.

EUT INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Laptop Ethernet	HUB(Remote)	Multiwire	Unshielded	10.0
Laptop DC	AC-DC adapter	integral to adapter	Unshielded	1.0
AC-DC adapter AC	AC power	3-wire	Unshielded	1.0
Laptop USB	Printer	USB	Shielded (With integrated Ferrite)	2.0
Printer	AC power Adapter	3-wire	Unshielded (With integrated Ferrite)	1.0

EUT OPERATION

During radiated emissions testing the EUT was being controlled by the CRTU tool to operate in a receive mode on the center channel. In addition the laptop was displaying a scrolling 'H' pattern on the screen and had link enabled to both the ethernet and USB peripherals.

During AC conducted emissions testing the EUT was being controlled by the CRTU tool to operate in a continuous transmit mode on the center channel. In addition the laptop was displaying a scrolling 'H' pattern on the screen and had link enabled to both the ethernet and USB peripherals.

EMISSIONS TESTING**GENERAL INFORMATION**

Final test measurements were taken at the Elliott Laboratories Anechoic Chambers and/or Open Area Test Site(s) listed below. The test sites contain separate areas for radiated and conducted emissions testing. The sites conform to the requirements of ANSI C63.4: 2003 *American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* and CISPR 16-1-4:2007 - *Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Ancillary equipment Radiated disturbances*. They are registered with the VCCI and are on file with the FCC and industry Canada.

Site	Registration Numbers			Location
	VCCI	FCC	Canada	
Chamber 4	R-1684 C-1796	211948	IC 2845B-4	41039 Boyce Road Fremont, CA 94538-2435

Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4 and CISPR 22. Mains port measurements are made with the EUT connected to the public power network through nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord. Telecommunication port measurements are made with the network cable connected through an ISN appropriate to the type of cable employed.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiated measurements made in a non-anechoic shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an Open Area Test Site or semi-anechoic chamber, as defined in ANSI C63.4. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1:2006 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7 GHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000 MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer runs automated data collection programs that control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted emission measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

IMPEDANCE STABILIZATION NETWORK (ISN)

Telecommunication port conducted emission measurements utilize an Impedance Stabilization Network with a 150 ohm termination impedance and specific longitudinal conversion loss as the voltage monitoring point. This network provides for calibrated radio frequency noise measurements by the design of the internal circuitry on the EUT and measurement ports, respectively. For current measurements, a current probe with a uniform frequency response and less than 1 ohm insertion impedance is used.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz frequency range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors that are programmed into the test receivers.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material up to 12 mm thick if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the company's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An appendix of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The standards require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst case orientation is used for final measurements.

CONDUCTED EMISSIONS (MAINS)

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord. Emissions that have peak values close to the specification limit are also measured in the quasi-peak and average detection modes to determine compliance except when the amplitude of the emission when measured with the quasi-peak detector is more than 10 dB below the specification limit for average measurements. In this case only quasi-peak measurements are performed.

CONDUCTED EMISSIONS (TELECOMMUNICATION PORTS)

Conducted emissions voltages are measured at a point 80 cm from the EUT. If conducted emission currents are measured, the current probe is located 70 cm from the EUT. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted. Emissions that have peak values close to the specification limit are also measured in the quasi-peak and average detection modes to determine compliance except when the amplitude of the emission when measured with the quasi-peak detector is more than 10 dB below the specification limit for average measurements. In this case only quasi-peak measurements are performed.

RADIATED EMISSIONS (SEMI-ANECHOIC and/or OATS TEST ENVIRONMENT)

Radiated emissions measurements in a semi-anechoic environment are performed in two phases (preliminary scan and final maximization). Final maximization may be performed on an OATS.

Preliminary Scan

A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulations specified on page 1. One or more of these is performed with the antenna polarized vertically and one or more of these is performed with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit. A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions if required. Other methods used during the preliminary scan for EUT emissions involve scanning with near-field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final Maximization

During final maximization, the highest-amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth that results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions that have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

For measurements above 1GHz every effort is made to ensure the EUT remains within the cone of radiation of the measurement antenna (i.e. 3dB beam-width of the antenna). This may include rotating the product and/or angling the measurement antenna.

When Testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5m. Maximum emissions are found within this restricted range because emission levels decrease over distance and as the antenna is raised above 2.5m, the distance from the EUT increases. As a result of the increased measurement distance, at antenna heights above 2.5m, lower emission levels are measured as compared to emissions levels measured at antenna heights at 2.5m and below.

SAMPLE CALCULATIONS**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form). The calculation is as follows:

$$R_r - S = M$$

where:

$$\begin{aligned} R_r &= \text{Receiver Reading in dBuV} \\ S &= \text{Specification Limit in dBuV} \\ M &= \text{Margin to Specification in +/- dB} \end{aligned}$$

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$\begin{aligned} F_d &= \text{Distance Factor in dB} \\ D_m &= \text{Measurement Distance in meters} \\ D_s &= \text{Specification Distance in meters} \end{aligned}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$\begin{aligned} R_r &= \text{Receiver Reading in dBuV/m} \\ F_d &= \text{Distance Factor in dB} \\ R_c &= \text{Corrected Reading in dBuV/m} \\ L_s &= \text{Specification Limit in dBuV/m} \\ M &= \text{Margin in dB Relative to Spec} \end{aligned}$$

Appendix A Test Equipment Calibration Data**Radiated Emissions, 30 - 1,000 MHz, 21-May-09**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1549	23-May-09
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	10-Feb-10
Hewlett Packard	Preamplifier, 100 kHz - 1.3 GHz	8447D OPT	2115	19-Nov-09

Conducted Emissions - AC Power Ports, 21-May-09

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Rohde& Schwarz	Pulse Limiter	ESH3 Z2	1401	06-Apr-10
Fischer Custom Comm.	LISN, 50uH, 25 Amps, Dual Line	FCC-LISN-50/250- 25-2-01	1575	30-Apr-10
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	10-Feb-10
Fischer Custom Comm	LISN, 25A, 150kHz to 30MHz, 25 Amp,	FCC-LISN-50-25-2- 09	2001	15-Oct-09

Appendix B Radiated and Conducted Emissions Test Data

T75387 7 Pages



EMC Test Data

Client:	Intel Corporation	Job Number:	J75343
Model:	112BNHMW (1x2 bgn Half-Mini Card)	T-Log Number:	T75387
		Account Manager:	Christine Vu Krebill
Contact:	Steve Hackett		Mark Briggs
Emissions Standard(s):	FCC 15.247, RSS 210, FCC 15B (PC Peripheral)	Class:	B
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Intel Corporation

Model

112BNHMW (1x2 bgn Half-Mini Card)

Date of Last Test: 5/21/2009

Client:	Intel Corporation	Job Number:	J75343
Model:	112BNHMW (1x2 bgn Half-Mini Card)	T-Log Number:	T75387
		Account Manager:	Christine Vu Krebill
Contact:	Steve Hackett		
Standard:	FCC 15.247, RSS 210, FCC 15B (PC Peripheral)	Class:	B

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 5/21/2009
Test Engineer: Mehran Birgani

Config. Used: #2 - make sure we have full details
Config Change: EUT installed inside host system, minimum system per ANSI for PC peripheral
Host Unit Voltage 120V/60Hz

Test Location: FT Chamber #4

General Test Configuration

The host system was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment where routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

Ambient Conditions: Temperature: 18-23 °C
Rel. Humidity: 30-45 %

Summary of Results

MAC Address: 001E6400E9B8 CRTU Tool Version 5.10.24.0000 Driver version 12.5.0.41

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120V/60Hz	FCC Class B	Pass	43.3dBµV @ 1.929MHz (-12.7dB)

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Intel Corporation	Job Number: J75343
Model: 112BNHMW (1x2 bgn Half-Mini Card)	T-Log Number: T75387
	Account Manager: Christine Vu Krebill
Contact: Steve Hackett	
Standard: FCC 15.247, RSS 210, FCC 15B (PC Peripheral)	Class: B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

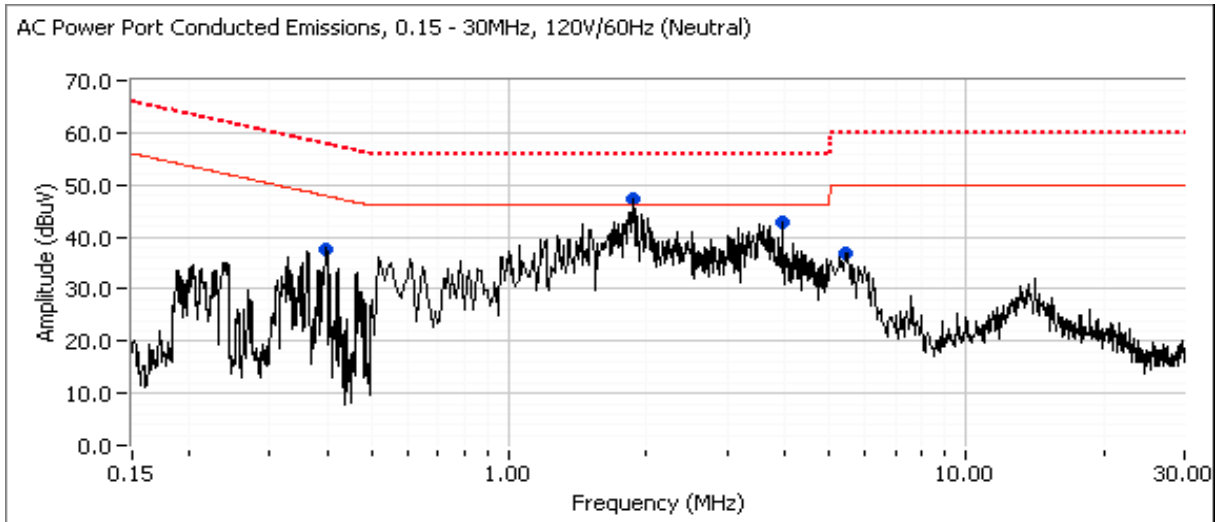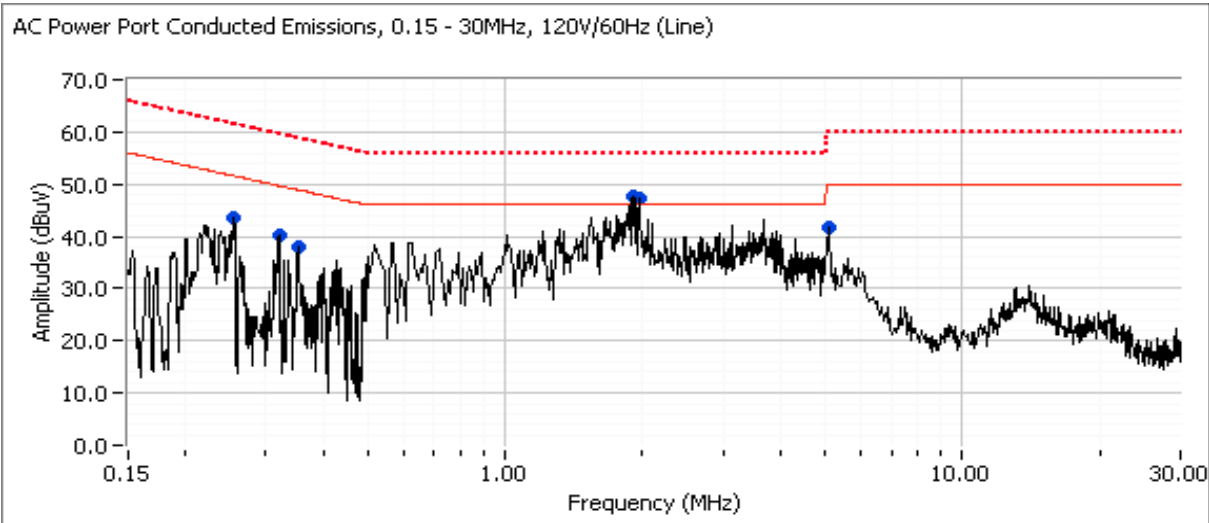

Client:	Intel Corporation	Job Number:	J75343
Model:	112BNHMW (1x2 bgn Half-Mini Card)	T-Log Number:	T75387
		Account Manager:	Christine Vu Krebill
Contact:	Steve Hackett		
Standard:	FCC 15.247, RSS 210, FCC 15B (PC Peripheral)	Class:	B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	FCC Class B		Detector QP/Ave	Comments
			Limit	Margin		
1.929	47.5	Line	46.0	1.5	Peak	
1.951	47.4	Line	46.0	1.4	Peak	
1.865	47.3	Neutral	46.0	1.3	Peak	
3.963	42.7	Neutral	46.0	-3.3	Peak	
0.257	43.6	Line	51.6	-8.0	Peak	
5.026	41.6	Line	50.0	-8.4	Peak	
0.319	40.2	Line	49.7	-9.5	Peak	
0.398	37.7	Neutral	47.9	-10.2	Peak	
0.353	37.8	Line	48.9	-11.1	Peak	
5.327	37.0	Neutral	50.0	-13.0	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	FCC Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.257	19.0	Line	51.5	-32.5	AVG	AVG (0.10s)
0.319	19.1	Line	49.7	-30.6	AVG	AVG (0.10s)
0.353	17.6	Line	48.9	-31.3	AVG	AVG (0.10s)
0.398	15.9	Neutral	47.9	-32.0	AVG	AVG (0.10s)
1.865	30.2	Neutral	46.0	-15.8	AVG	AVG (0.10s)
1.929	31.0	Line	46.0	-15.0	AVG	AVG (0.10s)
1.951	29.6	Line	46.0	-16.4	AVG	AVG (0.10s)
3.963	24.1	Neutral	46.0	-21.9	AVG	AVG (0.10s)
5.026	21.4	Line	50.0	-28.6	AVG	AVG (0.10s)
5.327	21.4	Neutral	50.0	-28.6	AVG	AVG (0.10s)
0.257	38.6	Line	61.5	-22.9	QP	QP (1.00s)
0.319	36.1	Line	59.7	-23.6	QP	QP (1.00s)
0.353	34.7	Line	58.9	-24.2	QP	QP (1.00s)
0.398	31.9	Neutral	57.9	-26.0	QP	QP (1.00s)
1.865	42.5	Neutral	56.0	-13.5	QP	QP (1.00s)
1.929	43.3	Line	56.0	-12.7	QP	QP (1.00s)
1.951	42.6	Line	56.0	-13.4	QP	QP (1.00s)
3.963	33.5	Neutral	56.0	-22.5	QP	QP (1.00s)
5.026	31.1	Line	60.0	-28.9	QP	QP (1.00s)
5.327	29.7	Neutral	60.0	-30.3	QP	QP (1.00s)

Client:	Intel Corporation	Job Number:	J75343
Model:	112BNHMW (1x2 bgn Half-Mini Card)	T-Log Number:	T75387
		Account Manager:	Christine Vu Krebill
Contact:	Steve Hackett		
Standard:	FCC 15.247, RSS 210, FCC 15B (PC Peripheral)	Class:	B

Radiated Emissions
(Digital Device, Module Installed in FCC-approved Laptop)
(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 5/21/2009
 Test Engineer: Mehran Birgani

Config. Used: #2 - make sure we have full details
 Config Change: EUT installed inside host system, minimum system per ANSI for PC peripheral

Test Location: FT Chamber #4

Host Unit Voltage 120V/60Hz

General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing. Any remote support equipment was located outside the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, **preliminary** testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. **Maximized** testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions:

Temperature: 18-23 °C
 Rel. Humidity: 30-45 %

Summary of Results

MAC Address: 001E6400E9B8 CRTU Tool Version 5.10.24.0000 Driver version 12.5.0.41

Run #	Test Performed	Limit	Result	Margin
1,2	RE, 30 - 1000 MHz Maximized Emissions	FCC Class B (Digital Device)	Pass	42.7dBµV/m @ 398.27MHz (-3.3dB)

Modifications Made During Testing

No modifications were made to the EUT during testing


Deviations From The Standard

No deviations were made from the requirements of the standard.

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
30 - 1000 MHz	3	3	0.0

Client: Intel Corporation	Job Number: J75343
Model: 112BNHMW (1x2 bgn Half-Mini Card)	T-Log Number: T75387
	Account Manager: Christine Vu Krebill
Contact: Steve Hackett	
Standard: FCC 15.247, RSS 210, FCC 15B (PC Peripheral)	Class: B

Run #1: Preliminary Radiated Emissions, 30 - 1000 MHz

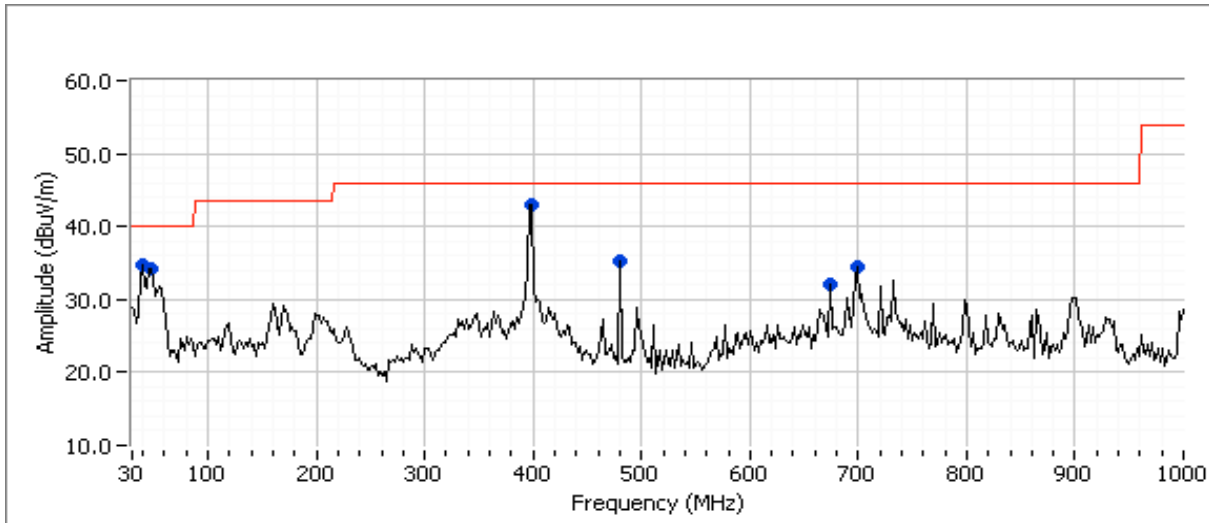

Preliminary peak readings captured during pre-scan

Frequency MHz	Level dB μ V/m	Pol V/H	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
398.266	43.0	H	46.0	-3.0	Peak	29	1.0	
40.966	34.7	V	40.0	-5.3	Peak	288	1.0	
47.076	34.3	V	40.0	-5.7	Peak	39	1.0	
479.993	35.2	H	46.0	-10.8	Peak	137	1.5	
698.900	34.5	H	46.0	-11.5	Peak	161	2.0	
671.989	32.1	H	46.0	-13.9	Peak	229	1.5	

Preliminary quasi-peak readings (no manipulation of EUT interface cables)


Frequency MHz	Level dB μ V/m	Pol V/H	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
398.266	42.2	H	46.0	-3.8	QP	0	1.0	
47.076	30.1	V	40.0	-9.9	QP	0	1.0	
40.966	29.9	V	40.0	-10.1	QP	259	1.0	
479.993	34.2	H	46.0	-11.8	QP	126	1.3	
671.989	29.8	H	46.0	-16.2	QP	169	2.0	
698.900	28.9	H	46.0	-17.1	QP	166	2.0	


Client:	Intel Corporation	Job Number:	J75343
Model:	112BNHMW (1x2 bgn Half-Mini Card)	T-Log Number:	T75387
		Account Manager:	Christine Vu Krebill
Contact:	Steve Hackett		
Standard:	FCC 15.247, RSS 210, FCC 15B (PC Peripheral)	Class:	B

Run #2: Maximized Readings From Run #1
Maximized quasi-peak readings (includes manipulation of EUT interface cables)

Frequency MHz	Level dB μ V/m	Pol V/H	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
40.966	29.9	V	40.0	-10.1	QP	259	1.0	QP (1.00s)
47.076	30.1	V	40.0	-9.9	QP	0	1.0	QP (1.00s)
398.266	42.7	H	46.0	-3.3	QP	0	1.0	QP (1.00s)
479.993	34.2	H	46.0	-11.8	QP	126	1.3	QP (1.00s)
671.989	29.8	H	46.0	-16.2	QP	169	2.0	QP (1.00s)
698.900	28.9	H	46.0	-17.1	QP	166	2.0	QP (1.00s)

Appendix C Test Configuration Photographs

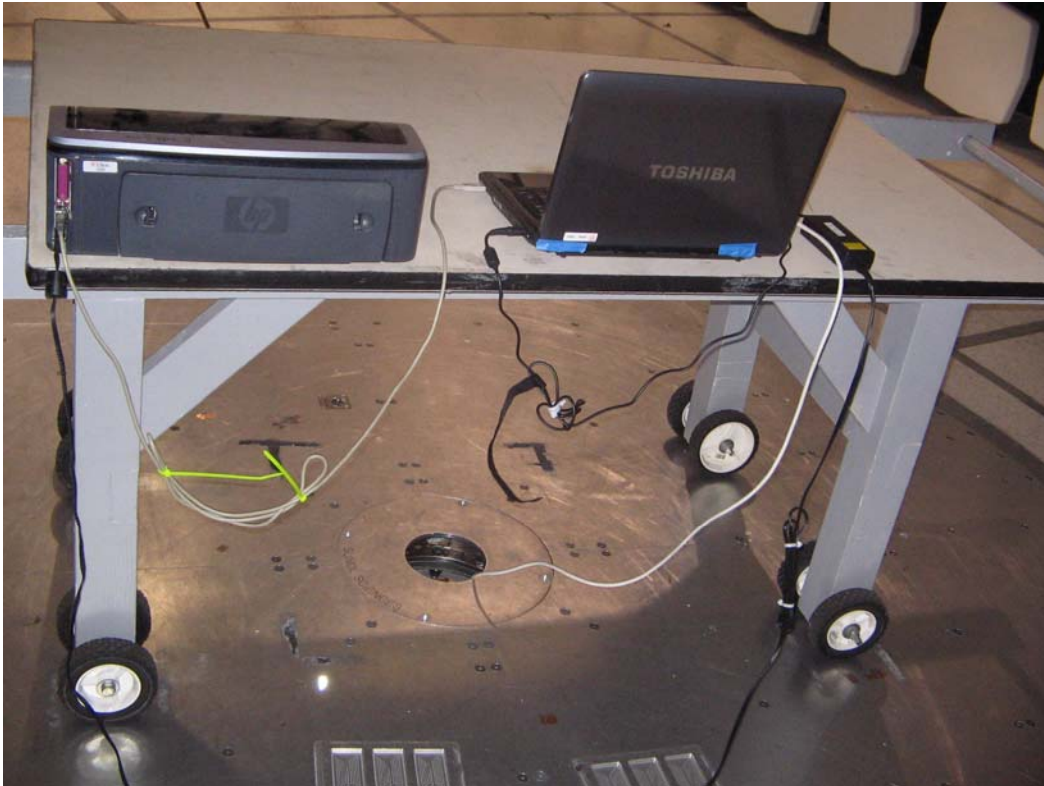

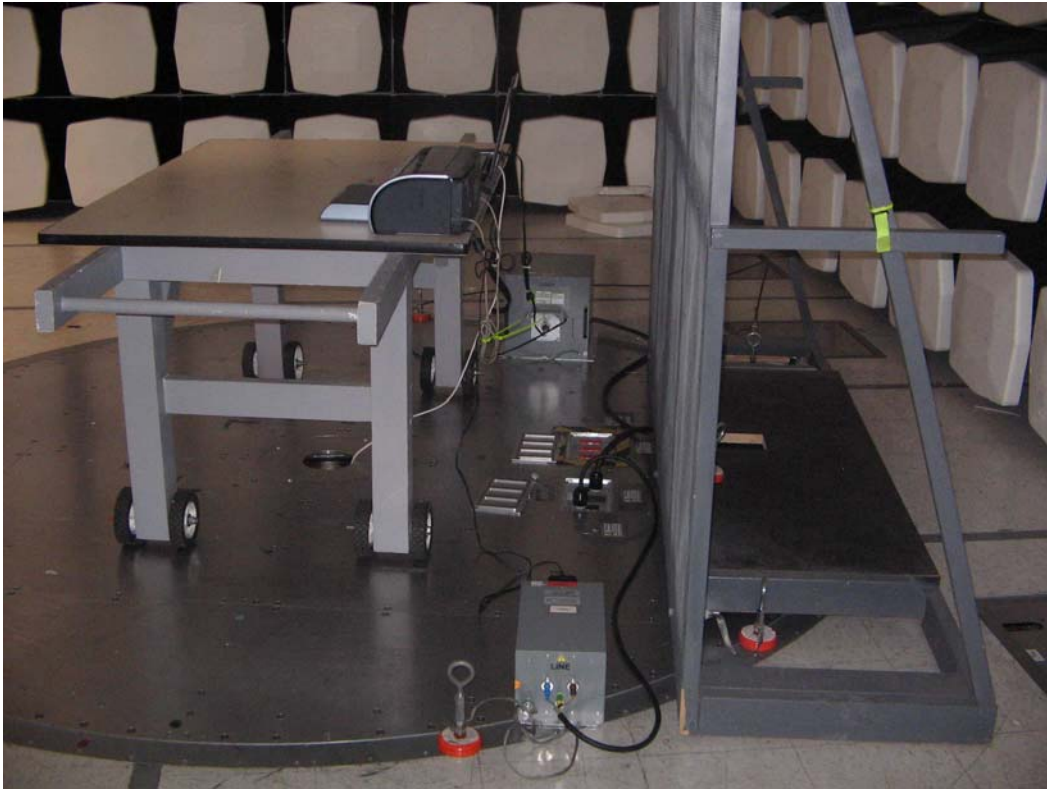

Appendix D Product Labeling Requirements

The following information has been provided to clarify notification, equipment labeling requirements and information that must be included in the operator's manual. These requirements may be found in the standards/regulations listed in the scope of this report.

Label Location

The required label(s) must be in a *conspicuous location* on the product, which is defined as any location readily visible to the user of the device without the use of tools.

Label Attachment

The label(s) must be *permanently attached* to the product, which is defined as attached such that it can normally be expected to remain fastened to the equipment during the equipment's expected useful life. A paper gum label will generally not meet this condition.

United States Class B Label

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: If the device is too small or for such use that it is not practicable to place the US label statement on it, the statement shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed

Industry Canada

For ICES-003 (digital apparatus), the product must be labeled with a notice indicating compliance e.g.

This Class B digital apparatus complies with Canadian ICES-003
Cet appareil numérique de la classe B est conforme à la norme NMB-003
du Canada

If there is limited space on the product then the text may be shortened (see below) but the complete text should be placed in the manual:

ICES-003 B
NMB-003 B

Appendix E User Manual Regulatory Statements

Where special accessories, such as shielded cables, are required in order to meet the emission limits, appropriate instructions regarding the need to use such accessories must be contained on the first page of text concerned with the installation of the device in the operator's manual.

A requirement by FCC regulations, and recommended for all regulatory markets, is a cautionary statement to the end user that changes or modifications to the device not expressly approved by you, the manufacturer, could void their right to operate the equipment.

United States Class B Manual Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: Additional information about corrective measures may also be provided to the user at the company's option.

The FCC has indicated that the radio interference statement be bound in the same manner as the operator's manual. Thus, a loose-leaf insert page in a bound or center-spine and stapled manual would not meet this condition.