



Test Certificate

A sample of the following product received on September 7, 2011 and tested on September 26 and 27, 2011 complied with the requirements of,

- Subpart B of Part 15 of FCC Rules for Class B digital devices
- Industry Canada Interference Causing Equipment Standard ICES 003, dated February 2004 (Class B)

given the measurement uncertainties detailed in Elliott report R84898.

Intel Corporation

Model Intel Centrino Wireless-N 135, model 135BNHMW and 135BNHU

David W. Bare
Chief Engineer

Intel Corporation

Printed Name



Testing Cert #2016.01

Elliott Laboratories is accredited by the A2LA, certificate number 2016.01, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

Elliott Laboratories
www.elliottlabs.com

41039 Boyce Road
Fremont, CA. 94538

510-578-3500 Phone
510-440-9525 Fax

EMC Test Report

*Information Technology Equipment
Class B Digital Device*

*FCC Part 15
Industry Canada ICES 003*

Model: Intel Centrino Wireless-N 135, model 135BNHMW and 135BNHU

COMPANY: Intel Corporation
100 Center Point Circle Suite 200
Columbia, SC 29210


TEST SITE(S): Elliott Laboratories
41039 Boyce Road
Fremont, CA. 94538-2435

REPORT DATE: October 7, 2011

FINAL TEST DATES: September 26 and 27, 2011


TOTAL NUMBER OF PAGES: 31

PROGRAM MGR /
TECHNICAL REVIEWER:

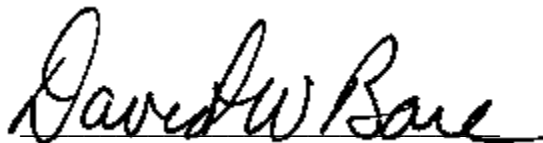

David W. Bare
Chief Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:

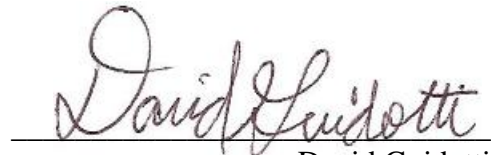

David Guidotti
Senior Technical Writer



Testing Cert #2016.01

Elliott Laboratories is accredited by the A2LA, certificate number 2016.01, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	10-7-2011	First release	

TABLE OF CONTENTS

REVISION HISTORY	3
TABLE OF CONTENTS	4
SCOPE.....	5
OBJECTIVE	5
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS	6
CONDUCTED EMISSIONS (MAINS PORT)	6
RADIATED EMISSIONS	6
MEASUREMENT UNCERTAINTIES.....	7
EQUIPMENT UNDER TEST (EUT) DETAILS.....	8
GENERAL.....	8
ANTENNA SYSTEM	8
ENCLOSURE.....	8
MODIFICATIONS.....	8
SUPPORT EQUIPMENT.....	9
EUT INTERFACE PORTS	9
EUT OPERATION	9
EMISSIONS TESTING	10
RADIATED AND CONDUCTED EMISSIONS.....	10
RADIATED EMISSIONS CONSIDERATIONS	10
CONDUCTED EMISSIONS CONSIDERATIONS	10
EMISSIONS MEASUREMENT INSTRUMENTATION.....	11
RECEIVER SYSTEM	11
INSTRUMENT CONTROL COMPUTER	11
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	11
IMPEDANCE STABILIZATION NETWORK (ISN)	11
FILTERS/ATTENUATORS	11
ANTENNAS.....	12
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	12
INSTRUMENT CALIBRATION.....	12
EMISSIONS TEST PROCEDURES	13
EUT AND CABLE PLACEMENT	13
CONDUCTED EMISSIONS (MAINS)	13
RADIATED EMISSIONS (SEMI-ANECHOIC AND/OR OATS TEST ENVIRONMENT)	14
Preliminary Scan.....	14
Final Maximization.....	14
SAMPLE CALCULATIONS	15
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	15
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	15
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	16
APPENDIX B TEST DATA	17
APPENDIX C PRODUCT LABELING REQUIREMENTS.....	28
APPENDIX D USER MANUAL REGULATORY STATEMENTS.....	29
APPENDIX E BASIC AND REFERENCE STANDARDS	30
SUBPART B OF PART 15 OF FCC RULES FOR DIGITAL DEVICES.	30
END OF REPORT	31

SCOPE

Governments and standards organizations around the world have published requirements regarding the electromagnetic compatibility (EMC) of electronic equipment. Testing has been performed on the Intel Corporation model Intel Centrino Wireless-N 135, model 135BNHMW and 135BNHU, pursuant to the following standards.

Standard	Title	Standard Date
FCC Part 15, Subpart B	Radio Frequency Devices	October 2010 as Amended
ICES-003, Issue 4	Digital apparatus	2004

All measurements and evaluations have been in accordance with these specifications, test procedures, and measurement guidelines as outlined in Elliott Laboratories test procedures, and in accordance with the standards referenced therein (refer to Appendix E).

OBJECTIVE

The objective of Intel Corporation is to verify compliance with FCC requirements for digital devices and Canada's requirements for digital devices;

STATEMENT OF COMPLIANCE

The tested sample of Intel Corporation model Intel Centrino Wireless-N 135, model 135BNHMW and 135BNHU complied with the requirements of:

Standard/Regulation	Equipment Type/Class	Standard Date
Subpart B of Part 15 of the FCC Rules (CFR title 47)	Class B	2010 as amended
ICES-003, Issue 4	Class B	2004

The test results recorded herein are based on a single type test of the Intel Corporation model Intel Centrino Wireless-N 135, model 135BNHMW and 135BNHU and therefore apply only to the tested sample(s). The sample was selected and prepared by Steve Hackett of Intel Corporation.

Maintenance of compliance is the responsibility of the company. Any modification of the product that could result in increased emissions or susceptibility should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different enclosure, different line filter or power supply, harnessing and/or interface cable changes, etc.).

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS

The following emissions tests were performed on the Intel Corporation model Intel Centrino Wireless-N 135, model 135BNHMW and 135BNHU. The measurements were extracted from the data recorded during testing and represent the highest amplitude emissions relative to the specification limits. The complete test data is provided in the appendices of this report.

CONDUCTED EMISSIONS (MAINS PORT)

Frequency Range Operating Voltage	Standard/Section	Requirement	Measurement	Margin	Status
0.15-30 MHz, 120V, 60Hz	FCC § 15.107(a) (Class B)	0.15-0.5 MHz: 66-56 dB μ V QP 56-46 dB μ V Av 0.5-5.0 MHz: 56 dB μ V QP 46 dB μ V Av 5.0-30.0 MHz: 60 dB μ V QP 50 dB μ V Av	62.4dB μ V @ 0.150MHz	-3.6dB	Complied

RADIATED EMISSIONS

Frequency Range	Standard/Section	Requirement	Measurement	Margin	Status
30-1000 MHz	FCC §15.109(g) Class B	30 – 230, 30 dB μ V/m 230 – 1000, 37 dB μ V/m (10m limit)	43.5dB μ V/m @398.31 MHz	-2.5dB	Complied
1000-40000 MHz Note 1	FCC §15.109(a) Class B	54.0 dB μ V/m Av 74.0 dB μ V/m Pk (3m limit)	N/A – Note 1		
Note 1 Testing above 1GHz against FCC 15.109(a) requirements was not required because the highest frequency generated in the EUT was declared to be less than 108 MHz.					

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below were calculated using the approach described in CISPR 16-4-2:2003 using a coverage factor of $k=2$, which gives a level of confidence of approximately 95%. The levels were found to be below levels of U_{cispr} and therefore no adjustment of the data for measurement uncertainty is required.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
Conducted Emissions	dBuV or dBuA	150kHz – 30MHz	± 2.2 dB
Radiated Electric Field	dBuV/m	30 – 1000 MHz	± 3.6 dB
		1000 – 40,000 MHz	± 6.0 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Intel Corporation model Intel Centrino Wireless-N 135, model 135BNHMW and 135BNHU is a PCIe Half Mini Card form factor IEEE 802.11b/g/n wireless network adapter that supports 1x1 (SISO) and a Bluetooth adapter that supports Basic Rate, Enhanced Data Rate and Low Energy modes of operation.

The card is sold under two different model numbers:

The device is sold under model numbers 135BNHMW and 135BNHU

Model numbers with FCC ID: PD9135BNHU and IC: 1000M-135BNHU are intended for end user installation and operate with a BIOS lock feature to ensure they can only be used in the appropriate host systems to prevent unauthorized operation. Other models are only intended for OEM factory installation.

For radio testing purposes the card was installed in a test fixture that exposed all sides of the card. For digital device testing for certification under equipment code JBP the card was installed inside a laptop PC.

The sample was received on September 7, 2011 and tested on September 26 and 27, 2011. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Intel Corporation	135BNHMW	PCIe Half Mini Card form factor Bluetooth / IEEE 802.11b/g/n wireless network adapter	JBP: 00150096B4F5 DTS: 00150096B40F	PD9135BNH PD9135BNHU 1000M-135BNH
	135BNHU			1000M-135BNHU

ANTENNA SYSTEM

The EUT antenna is a a two-antenna PIFA antenna system – Shanghai Universe Communication Electron Co., Ltd for both chains. There is also an option to use a trace antenna etched onto the board.

The antenna connects to the EUT via a non-standard antenna connector, thereby meeting the requirements of FCC 15.203.

Band	Antenna Gain		Comment
	PIFA	Trace	
200-2483.5	3.2 dBi	1dBi (To be confirmed)	

ENCLOSURE

The EUT has no enclosure. It is designed to be installed within the enclosure of a host computer.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

The following equipment was used as local support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Dell	Latitude	Laptop	-	-
Intel	-	Extender board	-	-
Agilent	E3610A	Power Supply	-	-

The following equipment was used as remote support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Netgear	GS108	Hub	GS16152CB035 447	-

EUT INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Port		Description	Cable(s) Shielded/Unshielded	Length(m)
From	To			
USB	Printer	USB	Shielded	2
Ethernet	Hub	CAT 5	Unshielded	10
USB / Test Fixture	Laptop	USB	Shielded	1
Ribbon / Test Fixture	Laptop	Multiwire	-	1
DC Power / Tes Fixture	Power supply	2wire	-	1

EUT OPERATION

During emissions testing the Laptop was connected to the wireless router. The laptop was running "H"Patterns.

EMISSIONS TESTING**RADIATED AND CONDUCTED EMISSIONS**

Final test measurements were taken at the Elliott Laboratories Anechoic Chambers listed below. The test sites contain separate areas for radiated and conducted emissions testing. The sites conform to the requirements of ANSI C63.4: 2003 *American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* and CISPR 16-1-4:2007 - *Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Ancillary equipment Radiated disturbances*. They are registered with the VCCI and are on file with the FCC and Industry Canada.

Site	Registration Numbers			Location
	VCCI	FCC	Canada	
Chamber 7	R-3389 G-235 C-3759 T-1915	A2LA accredited	IC 2845B-7	41039 Boyce Road Fremont, CA 94538-2435

RADIATED EMISSIONS CONSIDERATIONS

Radiated emissions measurements were made with the EUT powered from a supply voltage within the expected tolerances of each nominal operating voltage/frequency for each geographical regions covered by the scope of the standards referenced in this report.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4 and CISPR 22.

Mains port measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

Telecommunication port measurements are made with the unshielded network cable connected through an impedance stabilization network (ISN) appropriate to the type of cable employed. Where no suitable ISN is available measurements are made using a capacitive voltage probe (CVP) and a current probe. If shielded cables are specified for the port under test the measurement is made of the noise voltage on the shield of the cable via a 100 ohm resistor.

EMISSIONS MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1:2006 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7 GHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000 MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

Measurements are converted to the field strength at an antenna or voltage developed at the LISN (or ISN) measurement port, which is then compared directly with the appropriate specification limit under software control of the test receivers and spectrum analyzers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted emission measurements utilize a fifty micro-Henry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250-uH CISPR adapter. This network provides for calibrated radio-frequency noise measurements by the design of the internal low-pass and high-pass filters on the EUT and measurement ports, respectively.

IMPEDANCE STABILIZATION NETWORK (ISN)

Telecommunication port conducted emission measurements utilize an Impedance Stabilization Network with a 150-ohm termination impedance and specific longitudinal conversion loss as the voltage monitoring point. This network provides for calibrated radio-frequency noise measurements by the design of the internal circuitry on the EUT and measurement ports, respectively. For current measurements, a current probe with a uniform frequency response and less than 1-ohm insertion impedance is used.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high-amplitude transient events.

ANTENNAS

A bilog antenna or combination of biconnical and log periodic antennas are used to cover the range from 30 MHz to 1000 MHz. Narrowband tuned dipole antennas may be used over the entire 30 to 1000 MHz frequency range for precision measurements of field strength. Above 1000 MHz, horn antennas are used. The antenna calibration factors are included in site factors that are programmed into the test receivers or data collection software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor drive to vary the antenna height.

ANSI C63.4, CISPR 22 and KN22 specify that the test height above ground for table-mounted devices shall be 80 centimeters. Floor-mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material up to 12-mm thick if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the company's specifications. An appendix of this report contains the list of test equipment used and calibration information.

EMISSIONS TEST PROCEDURES

EUT AND CABLE PLACEMENT

The standards require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, CISPR 22 and KN22, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS (MAINS)

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest-amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak-mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord. Emissions that have peak values close to the specification limit are also measured in the quasi-peak and average detection modes to determine compliance except when the amplitude of the emission when measured with the quasi-peak detector is more than 10 dB below the specification limit for average measurements. In this case only quasi-peak measurements are performed.

RADIATED EMISSIONS (SEMI-ANECHOIC and/or OATS TEST ENVIRONMENT)

Radiated emissions measurements in a semi-anechoic environment are performed in two phases (preliminary scan and final maximization). Final maximization may be performed on an OATS.

Preliminary Scan

A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulations specified on page 1. One or more of these are performed with the antenna polarized vertically and one or more of these are performed with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit. A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions if required. Other methods used during the preliminary scan for EUT emissions involve scanning with near-field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final Maximization

During final maximization, the highest-amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth that results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions that have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

For measurements above 1GHz every effort is made to ensure the EUT remains within the cone of radiation of the measurement antenna (i.e. 3dB beam-width of the antenna). This may include rotating the product and/or angling the measurement antenna.

When Testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5m. Maximum emissions are found within this restricted range because emission levels decrease over distance and as the antenna is raised above 2.5m, the distance from the EUT increases. As a result of the increased measurement distance, at antenna heights above 2.5m, lower emission levels are measured as compared to emissions levels measured at antenna heights at 2.5m and below.

SAMPLE CALCULATIONS**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form). The calculation is as follows:

$$R_r - S = M$$

where:

$$\begin{aligned} R_r &= \text{Receiver Reading in dBuV} \\ S &= \text{Specification Limit in dBuV} \\ M &= \text{Margin to Specification in +/- dB} \end{aligned}$$

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$\begin{aligned} F_d &= \text{Distance Factor in dB} \\ D_m &= \text{Measurement Distance in meters} \\ D_s &= \text{Specification Distance in meters} \end{aligned}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$\begin{aligned} R_r &= \text{Receiver Reading in dBuV/m} \\ F_d &= \text{Distance Factor in dB} \\ R_c &= \text{Corrected Reading in dBuV/m} \\ L_s &= \text{Specification Limit in dBuV/m} \\ M &= \text{Margin in dB Relative to Spec} \end{aligned}$$

Appendix A Test Equipment Calibration Data**Radiated Emissions, 30 - 1,000 MHz, 26-Sep-11**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	EMC Spectrum Analyzer, 9 KHz - 22 GHz	8593EM	1319	11/22/2011
Rohde & Schwarz	Test Receiver, 9 kHz-2750 MHz	ESCS 30	1337	11/24/2011
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1548	6/24/2012
Com-Power Corp.	Preamplifier, 30-1000 MHz	PA-103	1632	4/29/2012

Conducted Emissions - AC Power Ports, 27-Sep-11

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	LISN, 10 kHz-100 MHz, 25A	3825/2	1292	3/1/2012
EMCO	LISN, 10 kHz-100 MHz	3825/2	1293	3/1/2012
Hewlett Packard	EMC Spectrum Analyzer, 9 KHz - 22 GHz	8593EM	1319	11/22/2011
Rohde & Schwarz	Test Receiver, 9 kHz-2750 MHz	ESCS 30	1337	11/24/2011
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1401	4/21/2012

Appendix B Test Data

T84548 Pages 18 - 27

Client:	Intel	Job Number:	J84264
Model:	135BNHMW & 135BNHU	T-Log Number:	T84548
		Account Manager:	Christine Krebill
Contact:	Steve Hackett		
Emissions Standard(s):	FCC 15 B, 15.247, RSS 210	Class:	B
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Intel

Model

135BNHMW & 135BNHU

Date of Last Test: 9/29/2011

Client:	Intel	Job Number:	J84264
Model:	135BNHMW & 135BNHU	T-Log Number:	T84548
		Account Manager:	Christine Krebill
Contact:	Steve Hackett		
Standard:	FCC 15 B, 15.247, RSS 210	Class:	B

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/26/2011
 Test Engineer: Vishal Narayan
 Test Location: Fremont Chamber #7

Config. Used: 1
 Config Change: None
 EUT Voltage: 230V/50Hz and 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

Ambient Conditions:
 Temperature: 20 °C
 Rel. Humidity: 41 %

Summary of Results

MAC: xxx DRTU BT Tool Version xxx BT Driver version 1.0.5.30040
 MAC: xxx DRTU Virtual Adapter BT Tool Version xxx Driver version 15.1.0.1
 MAC: xxx DRTU WiFi Tool Version xxx Driver version 15.0.0.63

2	CE, AC Power, 120V/60Hz	Class B	Pass	62.4dBµV @ 0.150MHz (-3.6dB)
---	-------------------------	---------	------	------------------------------

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Intel	Job Number: J84264
Model: 135BNHMW & 135BNHU	T-Log Number: T84548
	Account Manager: Christine Krebill
Contact: Steve Hackett	
Standard: FCC 15 B, 15.247, RSS 210	Class: B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

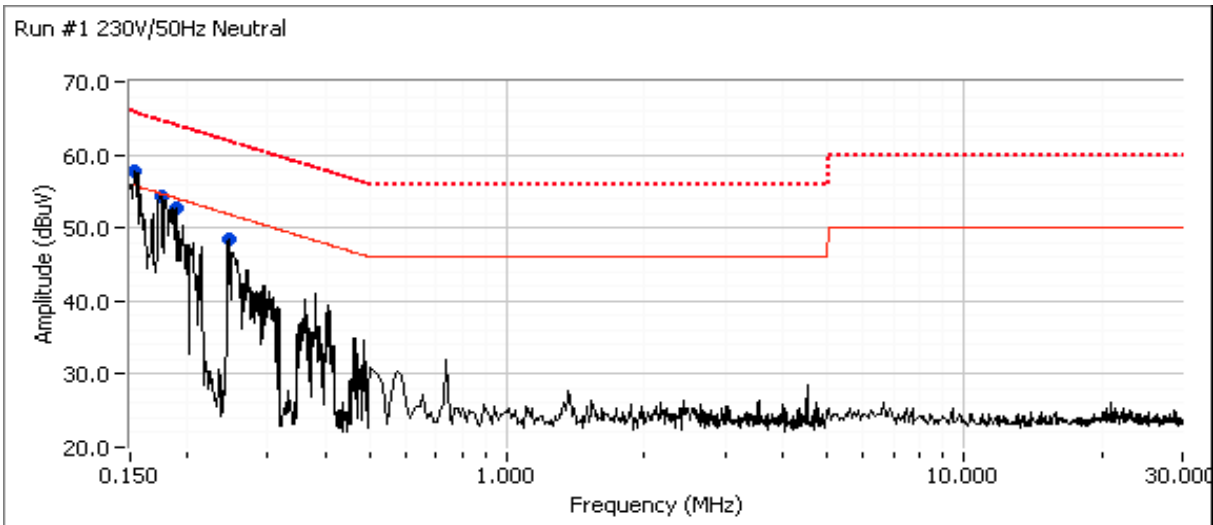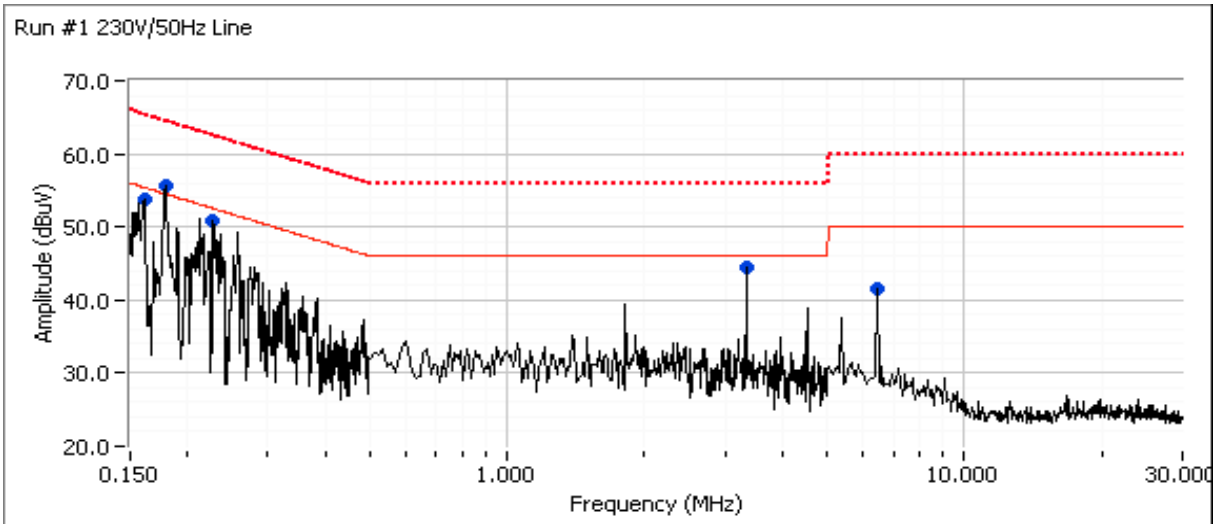

Client:	Intel	Job Number:	J84264
Model:	135BNHMW & 135BNHU	T-Log Number:	T84548
Contact:	Steve Hackett	Account Manager:	Christine Krebill
Standard:	FCC 15 B, 15.247, RSS 210	Class:	B

Continuation of Run #1

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)



Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.154	57.7	Neutral	55.8	1.9	Peak	
0.179	55.6	Line	54.5	1.1	Peak	
0.175	54.4	Neutral	54.7	-0.3	Peak	
0.189	52.8	Neutral	54.1	-1.3	Peak	
0.162	53.8	Line	55.4	-1.6	Peak	
0.228	50.9	Line	52.5	-1.6	Peak	
3.324	44.4	Line	46.0	-1.6	Peak	
0.246	48.4	Neutral	51.9	-3.5	Peak	
6.460	41.6	Line	50.0	-8.4	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.154	56.5	Neutral	65.8	-9.3	QP	QP (1.000s)
0.162	55.4	Line	65.4	-10.0	QP	QP (1.000s)
0.175	54.6	Neutral	64.7	-10.1	QP	QP (1.000s)
0.179	53.0	Line	64.5	-11.5	QP	QP (1.000s)
0.189	51.0	Neutral	64.1	-13.1	QP	QP (1.000s)
0.228	46.5	Line	62.5	-16.0	QP	QP (1.000s)
0.246	45.8	Neutral	61.9	-16.1	QP	QP (1.000s)
6.440	32.8	Line	50.0	-17.2	AVG	AVG (0.100s)
0.154	36.9	Neutral	55.8	-18.9	AVG	AVG (0.100s)
0.162	36.4	Line	55.4	-19.0	AVG	AVG (0.100s)
0.175	33.1	Neutral	54.7	-21.6	AVG	AVG (0.100s)
0.179	32.1	Line	54.5	-22.4	AVG	AVG (0.100s)
0.189	30.8	Neutral	54.1	-23.3	AVG	AVG (0.100s)
0.228	27.9	Line	52.5	-24.6	AVG	AVG (0.100s)
6.440	35.4	Line	60.0	-24.6	QP	QP (1.000s)
0.246	26.9	Neutral	51.9	-25.0	AVG	AVG (0.100s)
3.324	20.4	Line	46.0	-25.6	AVG	AVG (0.100s)
3.324	26.2	Line	56.0	-29.8	QP	QP (1.000s)

Client: Intel	Job Number: J84264
Model: 135BNHMW & 135BNHU	T-Log Number: T84548
Contact: Steve Hackett	Account Manager: Christine Krebill
Standard: FCC 15 B, 15.247, RSS 210	Class: B

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

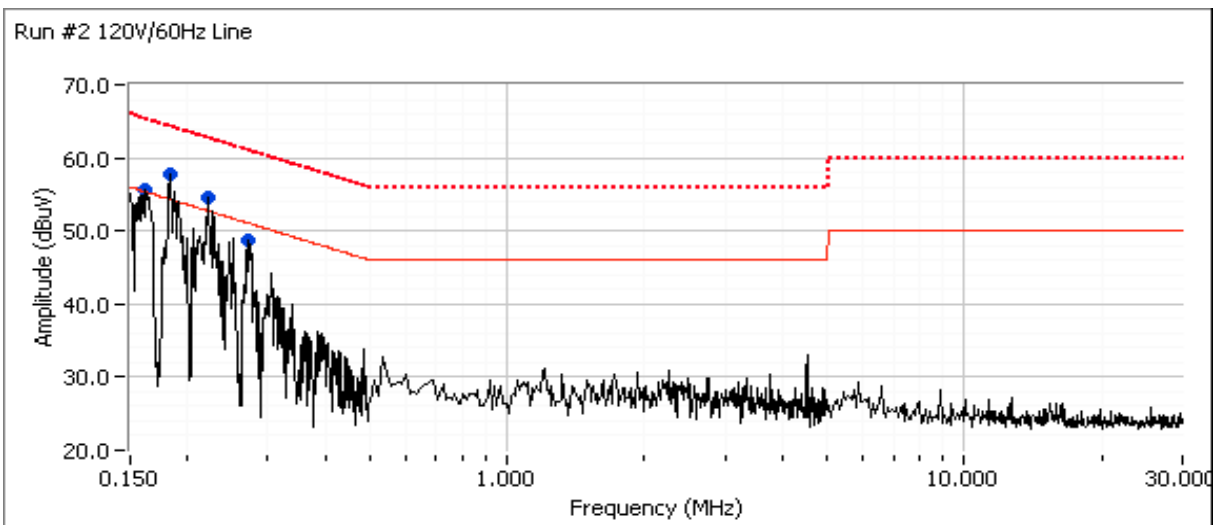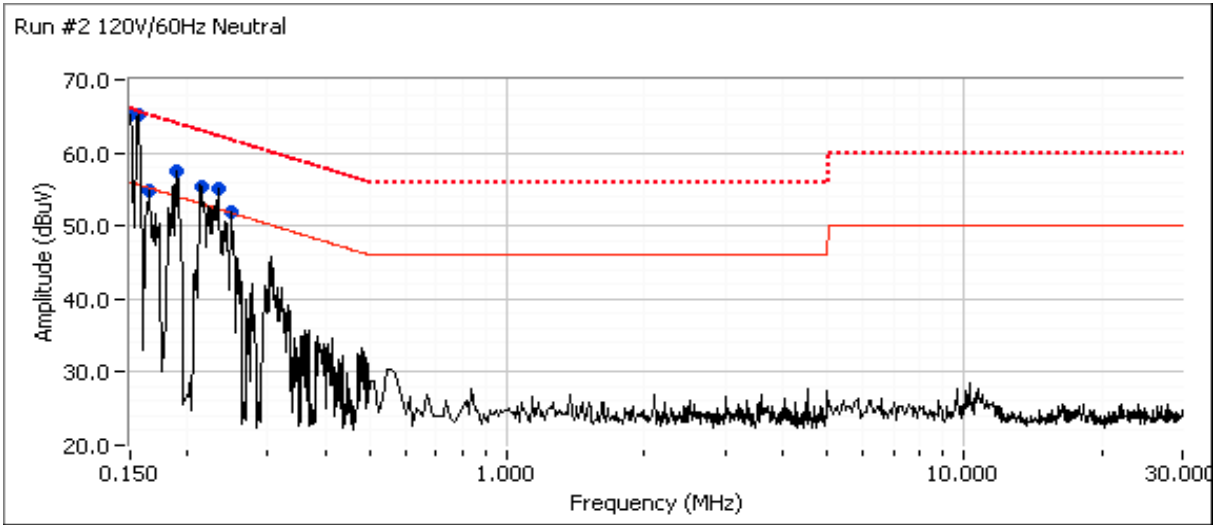

Client:	Intel	Job Number:	J84264
Model:	135BNHMW & 135BNHU	T-Log Number:	T84548
Contact:	Steve Hackett	Account Manager:	Christine Krebill
Standard:	FCC 15 B, 15.247, RSS 210	Class:	B

Continuation of Run #2

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.156	65.1	Neutral	55.7	9.4	Peak	
0.151	65.3	Neutral	56.0	9.3	Peak	
0.189	57.5	Neutral	54.1	3.4	Peak	
0.184	57.7	Line	54.3	3.4	Peak	
0.234	55.1	Neutral	52.3	2.8	Peak	
0.215	55.5	Neutral	53.0	2.5	Peak	
0.222	54.5	Line	52.8	1.7	Peak	
0.162	55.7	Line	55.3	0.4	Peak	
0.250	51.9	Neutral	51.8	0.1	Peak	
0.165	54.9	Neutral	55.2	-0.3	Peak	
0.273	48.6	Line	51.0	-2.4	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.150	62.4	Neutral	66.0	-3.6	QP	QP (1.000s)
0.150	62.1	Line	66.0	-3.9	QP	QP (1.000s)
0.150	61.3	Neutral	66.0	-4.7	QP	QP (1.000s)
0.156	60.5	Neutral	65.7	-5.2	QP	QP (1.000s)
0.162	58.6	Line	65.4	-6.8	QP	QP (1.000s)
0.170	56.9	Neutral	64.9	-8.0	QP	QP (1.000s)
0.165	56.9	Neutral	65.2	-8.3	QP	QP (1.000s)
0.181	56.0	Line	64.5	-8.5	QP	QP (1.000s)
0.215	51.0	Neutral	63.0	-12.0	QP	QP (1.000s)
0.222	49.7	Line	62.8	-13.1	QP	QP (1.000s)
0.234	48.5	Neutral	62.3	-13.8	QP	QP (1.000s)
0.150	42.1	Neutral	56.0	-13.9	AVG	AVG (0.100s)
0.150	41.0	Neutral	56.0	-15.0	AVG	AVG (0.100s)
0.150	40.3	Line	56.0	-15.7	AVG	AVG (0.100s)
0.250	45.8	Neutral	61.7	-15.9	QP	QP (1.000s)
0.156	39.0	Neutral	55.7	-16.7	AVG	AVG (0.100s)
0.165	37.3	Neutral	55.2	-17.9	AVG	AVG (0.100s)
0.162	37.4	Line	55.4	-18.0	AVG	AVG (0.100s)
0.273	42.5	Line	61.0	-18.5	QP	QP (1.000s)
0.181	35.7	Line	54.5	-18.8	AVG	AVG (0.100s)
0.170	35.2	Neutral	54.9	-19.7	AVG	AVG (0.100s)
0.215	32.3	Neutral	53.0	-20.7	AVG	AVG (0.100s)

Client:	Intel	Job Number:	J84264
Model:	135BNHMW & 135BNHU	T-Log Number:	T84548
		Account Manager:	Christine Krebill
Contact:	Steve Hackett		
Standard:	FCC 15 B, 15.247, RSS 210	Class:	B

Continuation of Run #2

0.222	31.5	Line	52.8	-21.3	AVG	AVG (0.100s)
0.234	29.4	Neutral	52.3	-22.9	AVG	AVG (0.100s)
0.250	28.8	Neutral	51.7	-22.9	AVG	AVG (0.100s)
0.273	24.8	Line	51.0	-26.2	AVG	AVG (0.100s)

Client:	Intel	Job Number:	J84264
Model:	135BNHMW & 135BNHU	T-Log Number:	T84548
Contact:	Steve Hackett	Account Manager:	Christine Krebill
Standard:	FCC 15 B, 15.247, RSS 210	Class:	B

Radiated Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/26/2011
 Test Engineer: Vishal Narayan
 Test Location: Fremont Chamber #7

Config. Used: 1
 Config Change: None
 EUT Voltage: 230V/50Hz

General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing. Any remote support equipment was located outside the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, preliminary testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. Maximized testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

Ambient Conditions:

Temperature: 20 °C
 Rel. Humidity: 41 %

Summary of Results

MAC: xxx DRTU BT Tool Version xxx BT Driver version 1.0.5.30040
 MAC: xxx DRTU Virtual Adapter BT Tool Version xxx Driver version 15.1.0.1
 MAC: xxx DRTU WiFi Tool Version xxx Driver version 15.0.0.63

Run #	Test Performed	Limit	Result	Margin
1	Radiated Emissions 30 - 1000 MHz, Preliminary	Class B	Pass	42.8dBµV/m @ 398.31MHz (-3.2dB)
2	Radiated Emissions 30 - 1000 MHz, Maximized	Class B	Pass	43.5dBµV/m @ 398.31MHz (-2.5dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard



No deviations were made from the requirements of the standard.

Client:	Intel	Job Number:	J84264
Model:	135BNHMW & 135BNHU	T-Log Number:	T84548
Contact:	Steve Hackett	Account Manager:	Christine Krebill
Standard:	FCC 15 B, 15.247, RSS 210	Class:	B

Run #1: Preliminary Radiated Emissions, 30 - 1000 MHz

EUT is a PC peripheral, Host PC configured with two external peripheral devices of different I/O protocols, FCC H-Pattern running

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
30 - 1000 MHz	3	3	0.0

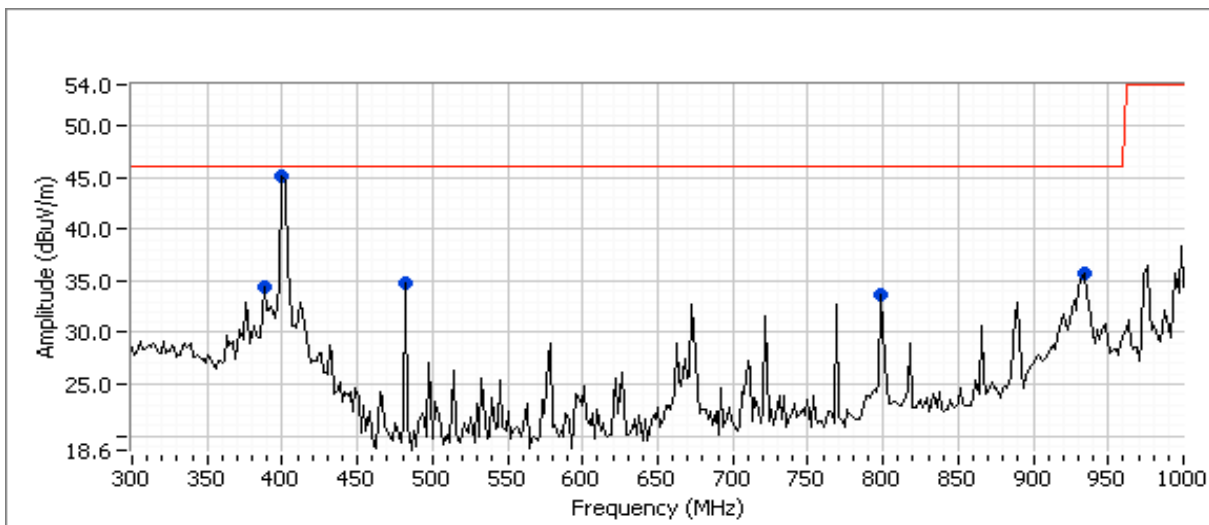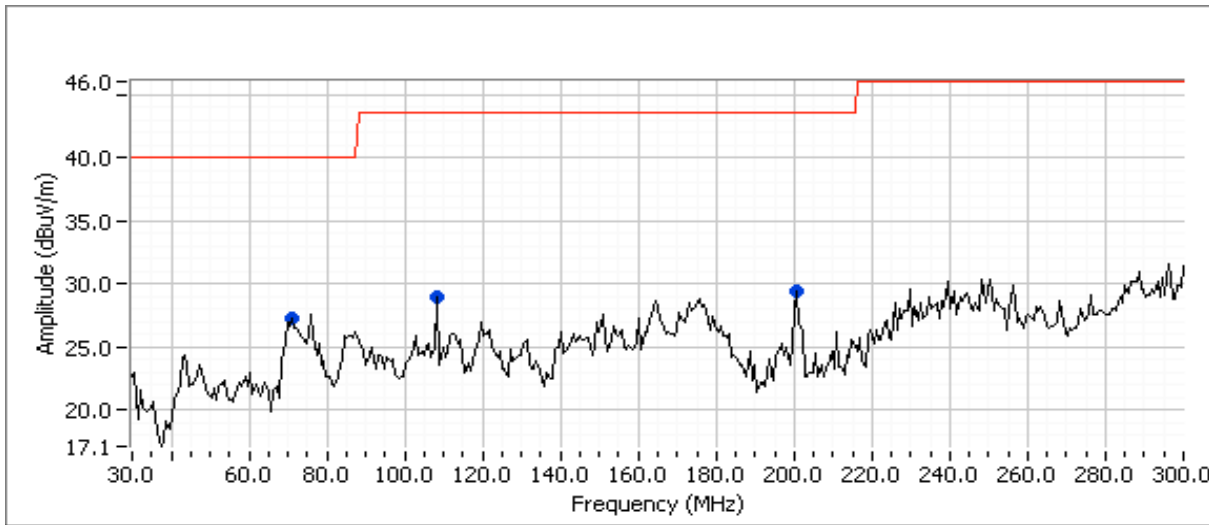

Client:	Intel	Job Number:	J84264
Model:	135BNHMW & 135BNHU	T-Log Number:	T84548
Contact:	Steve Hackett	Account Manager:	Christine Krebill
Standard:	FCC 15 B, 15.247, RSS 210	Class:	B

Continuation of Run #1

Preliminary peak readings captured during pre-scan

Frequency MHz	Level dB μ V/m	Pol v/h	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
398.310	45.1	H	46.0	-0.9	Peak	178	2.5	
932.540	35.8	H	46.0	-10.2	Peak	177	1.5	
480.036	34.8	V	46.0	-11.2	Peak	59	1.0	
388.678	34.5	H	46.0	-11.5	Peak	186	1.0	
799.012	33.7	H	46.0	-12.3	Peak	165	1.0	
72.000	27.3	V	40.0	-12.7	Peak	147	1.0	
200.775	29.4	H	43.5	-14.1	Peak	121	1.5	
108.300	28.9	H	43.5	-14.6	Peak	37	3.0	

Preliminary quasi-peak readings (no manipulation of EUT interface cables)

Frequency MHz	Level dB μ V/m	Pol v/h	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
398.310	42.8	H	46.0	-3.2	QP	178	2.5	QP (1.000s)
479.986	34.6	V	46.0	-11.4	QP	59	1.0	QP (1.000s)
72.000	23.4	V	40.0	-16.6	QP	147	1.0	QP (1.000s)
932.540	27.8	H	46.0	-18.2	QP	178	1.5	QP (1.000s)
200.775	21.9	H	43.5	-21.6	QP	121	1.5	QP (1.000s)
799.012	22.2	H	46.0	-23.8	QP	165	1.0	QP (1.000s)
108.300	17.1	H	43.5	-26.4	QP	37	3.0	QP (1.000s)
388.678	18.1	H	46.0	-27.9	QP	281	1.0	QP (1.000s)

Run #2: Maximized Readings From Run #1

Maximized quasi-peak readings (includes manipulation of EUT interface cables)

Frequency MHz	Level dB μ V/m	Pol v/h	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
398.310	43.5	H	46.0	-2.5	QP	177	2.3	QP (1.000s)
479.986	34.6	V	46.0	-11.4	QP	59	1.0	QP (1.000s)
72.000	23.4	V	40.0	-16.6	QP	147	1.0	QP (1.000s)
932.540	27.8	H	46.0	-18.2	QP	178	1.5	QP (1.000s)
200.775	21.9	H	43.5	-21.6	QP	121	1.5	QP (1.000s)
799.012	22.2	H	46.0	-23.8	QP	165	1.0	QP (1.000s)

Appendix C Product Labeling Requirements

The following information has been provided to clarify notification, equipment labeling requirements and information that must be included in the operator's manual. These requirements may be found in the standards/regulations listed in the scope of this report.

Label Location

The required label(s) must be in a *conspicuous location* on the product, which is defined as any location readily visible to the user of the device without the use of tools.

Label Attachment

The label(s) must be *permanently attached* to the product, which is defined as attached such that it can normally be expected to remain fastened to the equipment during the equipment's expected useful life. A paper gum label will generally not meet this condition.

United States Class B Label

FCC ID: ABC1234567

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The FCC Identifier is comprised of the grantee code (in the example above **ABC**) that was assigned by the FCC plus a unique alpha-numeric specific to the product being certified. The ID must appear on the device.

If the device is too small or for such use that it is not practicable to place the US label statement on it, the statement shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed

Industry Canada

For ICES-003 (digital apparatus), the product must be labeled with a notice indicating compliance e.g.

This Class B digital apparatus complies with Canadian ICES-003

Cet appareil numérique de la classe B est conforme à la norme NMB-003
du Canada

If there is limited space on the product then the text may be placed in the manual:

Appendix D User Manual Regulatory Statements

Where special accessories, such as shielded cables, are required in order to meet the emission limits, appropriate instructions regarding the need to use such accessories must be contained on the first page of text concerned with the installation of the device in the operator's manual.

A requirement by FCC regulations, and recommended for all regulatory markets, is a cautionary statement to the end user that changes or modifications to the device not expressly approved by you, the manufacturer, could void their right to operate the equipment.

United States Class B Manual Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: Additional information about corrective measures may also be provided to the user at the company's option.

The FCC has indicated that the radio interference statement be bound in the same manner as the operator's manual. Thus, a loose-leaf insert page in a bound or center-spine and stapled manual would not meet this condition.

Appendix E Basic and Reference Standards

Subpart B of Part 15 of FCC Rules for digital devices.

FCC Part 15 Subpart B references the use of ANSI C63.4–2003: “*Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz*” for the purposes of evaluating the radiated and conducted emissions from digital devices.

End of Report

This page is intentionally blank and marks the last page of this test report.