

**TEST REPORT CONCERNING THE COMPLIANCE
OF AN INTEL[®] TRI-BAND WIRELESS-AC 17265
LINK, BRAND INTEL, MODEL 17265NGW
(INCLUDING 17265NGW LC) WITH THE
STANDARD:
47 CFR PART 15: 2013 AND ICES-003: 2012
(CLASS B CERTIFICATION)**

FCC listed : 90828
Industry Canada : 2932G-2
R&TTE, LVD, EMC Notified Body : 1856

**TUV Rheinland Nederland B.V.
P.O. Box 37
9350 AA Leek (NL)
Eiberkamp 10
9351 VT Leek (NL)**

Telephone: +31 594 505005
Telefax: +31 594 504804

E-mail: info@nl.tuv.com
Web: www.tuv.com/nl

MEASUREMENT/TECHNICAL REPORT

Intel® Tri-Band Wireless-AC 17265 Link, brand Intel, model 17265NGW including 17265NGW LC

**FCC ID: PD913100NG (AUX), PD917265NG (EUT)
 IC ID: 1000M-13100NG (AUX), 1000M-17265NG (EUT)**

September 25, 2014

This report concerns: Original grant/certification Class 2 change Class B Certification			
Equipment type: Intel® Tri-Band Wireless Link			
Deferred grant requested per 47 CFR 0.457(d)(1)(ii) ?	Yes	No	n.a.
Report prepared by:	Name	: K.F. van der Molen	
	Company name	: TÜV Rheinland Nederland B.V.	
	Address	: Eiberkamp 10	
	Postal code/city	: 9351 VT Leek	
	Mailing address	: P.O. Box 37	
	Postal code/city	: 9350 AA Leek	
	Country	: The Netherlands	
	Telephone number	: + 31 594 505 005	
	Telefax number	: + 31 594 504 804	
	E-mail	: info@nl.tuv.com/nl	

The data taken for this test and report herein was done in accordance with 47 CFR Part 15: 2013, ICES-003: 2012 and the measurement procedures of ANSI C63.4-2009. TÜV Rheinland Nederland B.V. at Leek, The Netherlands, certifies that the data is accurate and contains a true representation of the emission profile of the Equipment under Test (EUT) on the date of the test as noted in the test report. I have reviewed the test report and find it to be an accurate description of the test(s) performed and the EUT so tested.

Date: September 25, 2014

Signature:



Ties E.T. Koning
Senior Engineer EMC

Description of test item

Test items : Intel® Tri-Band Wireless-AC 17265 Link
Manufacturer : Intel Mobile Communications S.A.
Brand : Intel
Models/Versions : 17265NGW including 17265NGW LC
Serial #/ID : See Clause 1.1. of this Report.
Receipt date : September 17, 2014

Applicant information

Applicant's representative : Mr. S.C. Hackett
Company : Intel Mobile Communications
Address : 100 Center Point Circle, Suite 200
Postal code : Columbia, South Carolina
City : 29310
PO-box : ---
Postal code : ---
City : ---
Country : United States of America
Telephone number : + 1 803-216-2344
Telefax number : + 1 803-216-2676
Email Address : Steven.c.hackett@intel.com

Test(s) performed

Location : Leek
Test(s) started : September 17, 2014
Test(s) completed : September 23, 2014
Purpose of test(s) : Compliance with relevant standards

Test specification(s) : 47 CFR Part 15: 2013 and ICES-003: 2012

Test engineer(s) : K.F. van der Molen 

Report written by : K.F. van der Molen

Report date : September 25, 2014

This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland Nederland B.V.
The test results relate only to the item(s) tested.

Table of contents

1	General information.....	5
1.1	Description of EUT.....	5
1.2	Related submittal(s) and/or Grant(s).....	6
1.2.1	General.....	6
1.2.2	Description of test configuration.....	6
1.2.3	Description of tested input and output ports.....	7
1.3	Test methodology.....	7
1.4	Test facility.....	7
1.5	Test conditions.....	7
2	System test configuration.....	8
2.1	Justification.....	8
2.2	EUT mode of operation.....	8
2.3	Special accessories.....	8
2.4	Equipment modifications.....	8
2.5	Product Labeling and other required texts.....	9
2.6	Block diagram of the EUT.....	9
2.7	Schematics of the EUT.....	9
2.8	Part list of the EUT.....	9
2.9	Radiated field strength measurements (30 MHz – 1 GHz, E-field).....	10
2.10	Radiated field strength measurements (1 GHz – 40 GHz, E-field).....	11
3	Conducted emission data (From Intel Laptop Power Supply).....	13
4	List of utilized test equipment.....	15

1 General information.

1.1 Description of EUT.

The Intel ® Tri-Band Wireless-AC 17265 Link, brand Intel, model 17265NGW including 17265NGW LC, will be referred to as EUT (tested in laptop) for the purpose of this test report. The version 17265NGW LC is using less channels for shipment to China and is further identical

Photo laptop with EUT inside (except antennas, they are outside): See Photo 1.1 in Photoreport 14050901.EMC.P01

Photo EUT: 17265NGW and 17265NGW LC back side: See Photo 1.2 in Photoreport 14050901.EMC.P01

Photo EUT: 17265NGW and 17265NGW LC front side: See Photo 1.3 in Photoreport 14050901.EMC.P01

1.2 Related submittal(s) and/or Grant(s).

1.2.1 General.

Not applicable

1.2.2 Description of test configuration.


Test item EUT *)	:	Intel ® Tri-Band Wireless-AC 17265 Link
Manufacturer	:	Intel Mobile Communications S.A.
Brand	:	Intel
Model	:	17265NGW including 17265NGW LC
Voltage input rating	:	230V / 50Hz via power supply Intel Laptop
Current input rating	:	n.a.

The EUT and the total tested system consists of the following parts:

- 1 Laptop brand Intel, model Ultrabook, model WSBUB-SDS **)
- 1 Monitor brand HP, model LA 2405xM
- 1 Laptop brand Dell, Model Latitude E5420
- 1 Intel Dock Station WIDOCK-SDS

*) Tested as built-in system in the Intel Ultrabook

**) with built-in EUT and antenna at rear side

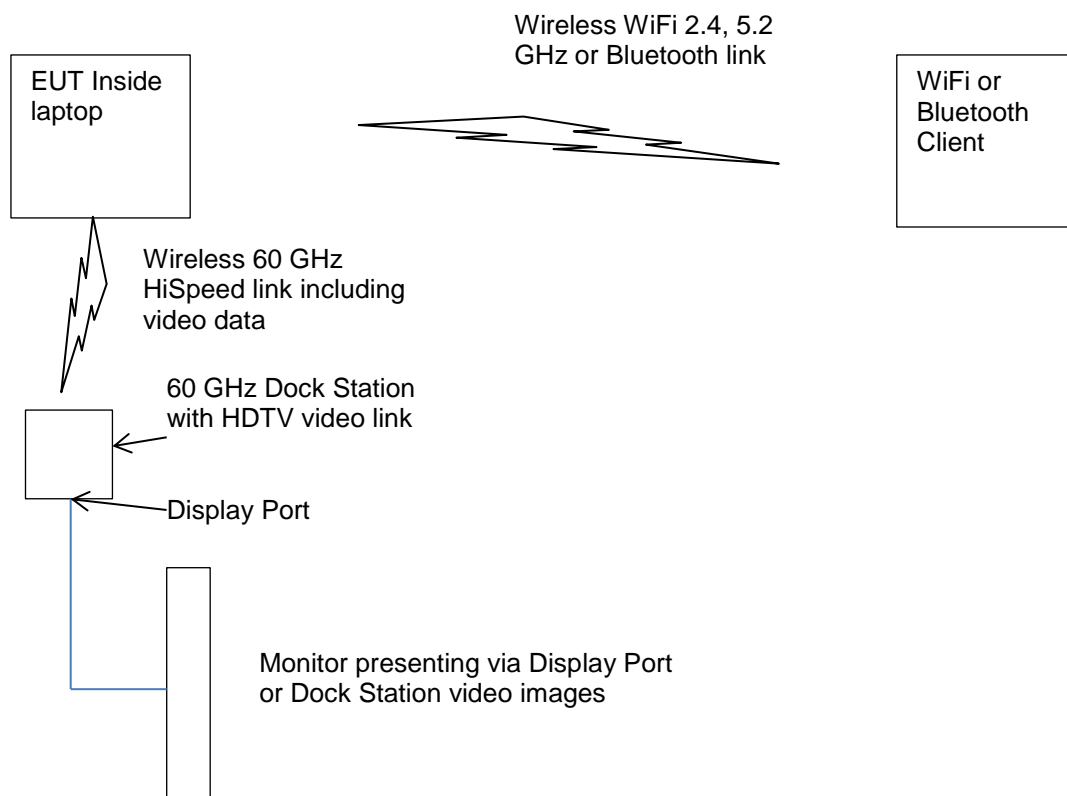

1.2.3 Description of tested input and output ports.

Number	Terminal	From	To	Length
1	Mains	Supply	EUT	< 3 m

Table 1

1.3 Test methodology.

The test methodology used is based on the requirements of 47 CFR Part 15 2013, sections 15.107 and 15.109 (Class A and B digital devices, Certification) and ICES-003: 2012

The test methods, which have been used, are based on ANSI C63.4: 2009.

Radiated emission tests above 30 MHz were performed at a measurement distance of 3 meters.

The receivers are switching automatically to the right bandwidth in accordance with CISPR 16. This is implemented in the receiver. The antenna factors are programmed in the test receiver. The receiver automatically calculates the appropriate correction factor for the utilized antenna and also the appropriate antenna factor for the cable loss. The total correction is automatically added to the measured value.

1.4 Test facility.

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland Nederland B.V. , located in Leek, 9351 VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15 and wit ICES-003: 2012.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

1.5 Test conditions.

Normal test conditions:

Temperature (*) : 18 - 23 °C
 Relative humidity(*) : 30 % to 50 %
 Supply voltage : 115 V AC/60 Hz to the Power Supply
 Air pressure : 950 – 1050 hPa

When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

2 System test configuration.

2.1 Justification.

The system was configured for testing in a typical fashion (as a customer would normally use it). Meaning: Building-up a link at 2.4, 5.2 GHz or Bluetooth to an access point and maintaining this link and transport maximum data and building-up a 60 GHz link where an HDTV video is presented via the Dock station and a monitor

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4: 2009.

2.2 EUT mode of operation.

Operation mode 1: Active. The EUT is in operational function

2.3 Special accessories.

No special accessories are used and/or needed to achieve compliance.

2.4 Equipment modifications.

No modifications have been made to the tested equipment in order to achieve compliance.

2.5 Product Labeling and other required texts

(3) All other devices shall bear the following statement in a conspicuous location on the device:
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.6 Block diagram of the EUT.

The block diagram is available at Intel Mobile Communications S.A.

2.7 Schematics of the EUT.

The schematics are available at Intel Mobile Communications S.A.

2.8 Part list of the EUT.

The part list is available at Intel Mobile Communications S.A.

2.9 Radiated field strength measurements (30 MHz – 1 GHz, E-field)

Measured results and limits			
Frequency (MHz)	Vertical Polarization (dB μ V/m)	Horizontal Polarization (dB μ V/m)	Limits (dB μ V/m)
30-88	<20.0	<20.0	39.5
88-216	<20.0	<20.0	43.5
216-960	<20.0	<20.0	46.0
> 960	<20.0	<20.0	54.0
38.8	20.9	10.6	39.5
76.72	32.8	23.7	39.5
77.16	33.4	25.9	39.5
100.88	32.6	20.5	43.5
146.7	28.3	21.5	43.5
250.56	35.0	35.5	46.0
255.68	36.7	35.9	46.0
304.0	33.5	28.6	46.0
302.88	32.9	28.5	46.0
347.16	33.0	37.2	46.0
529.04	28.1	30.2	46.0
531.48	29.6	32.6	46.0

Table 2 Results Radiated emission

Radiated emissions of the EUT. The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15: 2013 (Class B digital devices, Certification) and ICES-003: 2012 with the EUT operating in mode switched to generate maximum levels. Maximum level recorded of the total system being the laptop with the EUT inside and the Dock Stations with the 13100NGW WiGiG card inside.

Notes:

Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.

1. Measurement uncertainty is ± 5.0 dB
2. The reported field strength values are the worst case values at the indicated frequency. The receiving antenna was varied in horizontal and vertical orientations and also in height (between 1m and 4m).
3. A Quasi-Peak detector was used with a resolution bandwidth of 120 kHz.

Test engineer

Signature



Name

: K.F. van der Molen

Date

: September 25, 2014

2.10 Radiated field strength measurements (1 GHz – 40 GHz, E-field)

Measured results and limits Vertical Polarization				
Frequency (MHz)	Peak (dB μ V/m)	Average (dB μ V/m)	Limits (dB μ V/m)	
			Peak	Average
1060.0	59.1	44.8	70.0	50.0
1340.0	46.7	40.1	70.0	50.0
1810.0	49.1	37.5	70.0	50.0
2190.0	52.8	45.2	70.0	50.0
2690.0	49.5	43.1	70.0	50.0
3000.0	44.5	37.5	70.0	50.0
3590.0	45.1	32.3	70.0	50.0
10181.0	52.8	40.9	74.0	54.0
11717.0	56.3	45.9	74.0	54.0
12463.0	61.1	50.7	74.0	54.0
14208.0	57.8	46.8	74.0	54.0
17952.0	64.6	53.7	74.0	54.0
> 18 GHz:				
No levels recorded				

Table 3 Results Radiated emission

Radiated emissions of the EUT. The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15: 2013 (Class B digital devices, Certification) and ICES-003: 2012 with the EUT operating in mode switched to generate maximum levels. Maximum level recorded of the total system being the laptop with the EUT inside and the Dock Station with the 13100NGW card inside.

Notes:


Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.

Measurement uncertainty is ± 5.0 dB

The reported field strength values are the worst case values at the indicated frequency.

Test engineer

Signature :



Name :

K.F. van der Molen

Date :

September 25, 2014

Measured results and limits Horizontal Polarization				
Frequency (MHz)	Peak (dBµV/m)	Average (dBµV/m)	Limits (dBµV/m)	
			Peak	Average
1060.0	51.07	44.1	70.0	50.0
1140.0	47.8	36.6	70.0	50.0
1408.0	44.8	34.6	70.0	50.0
1810.0	45.4	37.8	70.0	50.0
2190.0	51.8	40.3	70.0	50.0
2690.0	49.6	46.2	70.0	50.0
3728.0	47.6	35.3	70.0	50.0
4080.0	46.1	35.1	70.0	50.0
10152.0	54.2	41.3	74.0	54.0
10976.0	65.1	53.1	74.0	54.0
11448.0	58.6	42.5	74.0	54.0
13800.0	57.1	46.9	74.0	54.0
26040.0	52.2	46.3	74.0	54.0
> 26 GHz:				
No levels recorded				

Table 4 Results Radiated emission

Radiated emissions of the EUT. The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15: 2013 (Class B digital devices, Certification) and ICES-003: 2012 with the EUT operating in mode switched to generate maximum levels. Maximum level recorded of the total system being the laptop with the EUT inside and the Dock Station with the 13100NGW card inside.


Notes:

Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.

Measurement uncertainty is ±5.0 dB

The reported field strength values are the worst case values at the indicated frequency.

Test engineer

Signature : 

Name : K.F. van der Molen

Date : September 25, 2014

Photo: Set-up RF Radiated emission upto 1 GHz: See Photo 1.4 in Photoreport 14050901.EMC.P01

Photo: Set-up RF Radiated emission > 1 GHz: See Photo 1.5 in Photoreport 14050901.EMC.P01

3 Conducted emission data (From Intel Laptop Power Supply).

Measured values and limits (QP)			
Frequency (MHz)	Results Line (dB μ V)	Results Neutral (dB μ V)	Limits (dB μ V)
0.15-0.5	< 20.0	< 20.0	66.0-56.0
0.5-5.0	< 20.0	< 20.0	56.0
5.0-30.0	< 20.0	< 20.0	60.0
0.165	50.8	49.9	65.3
0.189	49.5	48.0	64.0
0.230	42.0	37.0	62.2
0.541	35.0	37.0	56.0
2.933	25.1	26.7	56.0

Table 5

Conducted emission measurements. The results of the conducted emission tests, carried out in accordance with 47 CFR Part 15: 2009 section 15.109 (Class B digital devices, Certification) and ICES-003: 2012, at the AC mains connection terminals which were connected to the EUT, are depicted in table 3. Maximum values recorded. The system is tested as in whole, so with all equipment in place and functioning. Being the worst case situation. Maximum results are reported.

Notes:

1. Measurement uncertainty is ± 3.5 dB
2. The resolution bandwidth used was 9 kHz.

Measured values and limits (AV)			
Frequency (MHz)	Results Line (dB μ V)	Results Neutral (dB μ V)	Limits (dB μ V)
0.15-0.5	< 20.0	< 20.0	56.0-46.0
0.5-5.0	< 20.0	< 20.0	46.0
5.0-30.0	< 20.0	< 20.0	50.0
0.165	36.0	35.0	55.3
0.189	30.1	38.1	54.0
0.230	26.0	24.2	52.2
0.541	21.0	25.4	46.0
2.933	16.5	18.2	46.0

Table 6

Conducted emission measurements. The results of the conducted emission tests, carried out in accordance with 47 CFR Part 15: 2009 section 15.109 (Class B digital devices, Certification) and ICES-003: 2012, at the AC mains connection terminals which were connected to the EUT, are depicted in table 3. Maximum values recorded. The system is tested as in whole, so with all equipment in place and functioning. Being the worst case situation. Maximum results are reported.

Notes:

3. Measurement uncertainty is ± 3.5 dB
4. The resolution bandwidth used was 9 kHz.

Test engineer

Signature :



Name :

K.F. van der Molen

Date :

September 25, 2014

Photo: Set-up for Conducted Emission (Laptop power supply): See Photo 1.6 in Photoreport 14050901.EMC.P01

4 List of utilized test equipment.

Inventory number	Description	Brand	Model	Calibration information	
				Calibration date	Calibration due date
99608	Controller (mast)	EMCS	DOC202	n.a	n.a
99609	Antenna mast	EMCS	AP-4702C	n.a	n.a
99699	Measuring receiver	R&S	ESCI	March 3, 2014	March 3, 2015
99877	Biconilog antenna	Teseq	CBL6111D	June 11, 2014	June 11, 2015
99858	Low att coax cable	Gigalink	APGXXXX	January 1, 2014	January 1, 2015
99861	Turntable & controller	Maturo	SCU	n.a	n.a
99847	S-AR (FCC, IC and CE-EU)	Siepel	3 m	January 1, 2014	January 1, 2017
12512	Artificial mains network	EMCO	3725/2	January 18, 2014	January 18, 2015
13313	Impulse limiter	R&S	ESH3Z2.357...	January 3, 2014	January 3, 2015
15667	EMI test receiver	R&S	ESCS 30	September 24, 2013	September 24, 2014
99115	Probe	R&S	TK9416	April 13, 2014	April 13, 2015
99161	Variac 250V 6A	RFT	LTS006	n.a.	n.a.
99318	Digital multimeter	HP	34401A	September 27, 2013	September 2014
99606	Setup Radiated emission > 1 GHz, including 99714, 99710, 99174	Includes EMCS Controller, Power supply, Turntable control	RFS06S, B&K	August 30, 2014	August 30, 2015
99538	Spectrum Analyzer	R&S	FSP40	November 11, 2013	November 11, 2014
12484	Gainhorn	Emco	3115	April 14, 2014	April 14, 2015
99541	Gainhorn	Emco	3160-09	April 14, 2014	April 14, 2015
99542	Gainhorn	Emco	3160-10	April 14, 2014	April 14, 2015
99735	Cable RF > 1 GHz (99606)	H&S	Sucotest 18/Sucoflex102	April 22, 2014	April 22, 2015
99855	Temperature-Humiditymeter	Extech	SD500	March 12, 2014	March 12, 2015