



TESTING CERT #3478.01



# TEST REPORT

EUT Description	WiGig, WLAN and BT, 2x2 PCIe M.2 adapter card
Brand Name	Intel TRI-band Wireless-AC 18265
Model Name	18265NGW, 18265NGW LC
Serial Number	TA#: J30458-002 WF MAC: 3413E8346752 / 3413E8346752 BT MAC: 3413E8346756 / 3413E8346756 WG MAC: 3413E844B2FB / 3413E8346757 (see section 4)
FCC/IC ID	FCC ID: PD198265NG / IC ID: 1000M-18265NG
Antenna type	Intel ® Wireless Gigabit Antenna-M 10101R (Array Antenna Model No . 10101RRFW)
Hardware/Software Version	HW config: 33.1 Test SW: DRTU version 1.9.0-03738 / Driver ver.: 3.0.100088.12
Date of Sample Receipt	2016-08-30
Date of Test Start/End	2016-10-03 / 2016-10-21
Features	WiGig + 802.11 a/b/g/n/ac Wireless LAN + BDR/EDR 2.1 + BLE 4.2 (see section 5)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15C, Part 2.1091 IC RSS-210 Issue 9, IC RSS-Gen Issue 4, IC RSS-102 (see section 1)
---------------------	---

Test Report number	160830-01.TR42
Revision Control	Rev. 00

The test results relate only to the samples tested. The test report shall not be reproduced in full, without written approval of the laboratory.

Issued by

Reviewed by

Walid EL HAJJ  
( RF Test Lead )

Olivier FARGANT  
(Technical Manager)

Intel Mobile Communications France S.A.S – WRF Lab  
425 rue de Goa – Le Cargo B6 – 06600, Antibes, France  
Tel. +33493001400 / Fax +33493001401

# Table of Contents

---

<b>1. Standards, reference documents and applicable test methods .....</b>	<b>3</b>
<b>2. General conditions, competences and guarantees .....</b>	<b>3</b>
<b>3. Environmental Conditions.....</b>	<b>3</b>
<b>4. Test samples.....</b>	<b>4</b>
<b>5. EUT Features .....</b>	<b>5</b>
<b>6. Remarks and comments.....</b>	<b>5</b>
<b>7. Test Verdicts summary.....</b>	<b>6</b>
<b>8. Document Revision History .....</b>	<b>6</b>
<b>Annex A. Test &amp; System Description .....</b>	<b>7</b>
A.1 EUT DESCRIPTION.....	7
A.2 MEASUREMENT SYSTEM .....	8
A.3 TEST EQUIPMENT LIST.....	11
A.4 MEASUREMENT UNCERTAINTY EVALUATION.....	12
<b>Annex B. Tests Results.....</b>	<b>13</b>
B.1 EMISSION BANDWIDTH .....	13
B.2 PEAK AND AVERAGE POWER, RF DETECTOR .....	17
B.3 CONDUCTED PEAK OUTPUT POWER, RF DETECTOR.....	19
B.4 SPURIOUS EMISSIONS .....	20
B.5 FREQUENCY STABILITY .....	32
B.6 GROUP INSTALLATION .....	34
B.7 RF EXPOSURE.....	35
<b>Annex C. Photographs.....</b>	<b>37</b>
C.1 RADIATED TEST SETUP .....	37
C.2 TEST SAMPLE .....	38

## 1. Standards, reference documents and applicable test methods

1. FCC 47 CFR Part 15 - Subpart C – §15.255 Operation within the band 57-64 GHz.
2. ANSI C63.10-2013, Clause 9 – Procedures for testing millimeter-wave systems.
3. IC RSS-Gen Issue 4 – General Requirements for Compliance of Radio Apparatus.
4. IC RSS-210 Issue 9 – Licence-Exempt Radio Apparatus: Category I Equipment
5. FCC 47 CFR Part 2 – Subpart J – §2.1091 Radiofrequency radiation exposure evaluation: mobile devices.
6. IC RSS-102 Issue 5 – Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands).

## 2. General conditions, competences and guarantees

- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is a testing laboratory accredited by the American Association for Laboratory Accreditation (A2LA).
- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm listed by the FCC, with Designation Number FR0011.
- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by IC, with IC Assigned Code 1000Y.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

## 3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	21°C ± 4°C
Humidity	55% ± 5%

#### 4. Test samples

Sample	Control #	Description	Model	Serial #	Date of Receipt	Note
#01	160830-01.S14	RF Module	18265NGW	WGM: 3413E844B2FB WFM: 3413E8346752 BDM: 3413E8346756	2016-10-03	Used for spurious tests from 30 MHz to 1 GHz and for in band test
	160830-01.S39	Extender board	PCB00469	ASS00469-001 4694213-389	2016-09-07	
	160202-02.S69	Laptop	Dell - Latitude E5440	J4SYN32	2016-06-15	
	160830-01.S49	WiGig Antenna	RFEM3	-	2016-10-03	
#02	160830-01.S43	WiGig Antenna	RFEM3	-	2016-10-03	Used for Emission bandwidth test
	160830-01.S14	RF Module	18265NGW	WGM: 3413E844B2FB WFM: 3413E8346752 BDM: 3413E8346756	2016-10-03	
	160830-01.S39	Extender board	PCB00469	ASS00469-001 4694213-389	2016-09-07	
	160202-02.S69	Laptop	Dell - Latitude E5440	J4SYN32	2016-06-15	
#03	160830-01.S09	RF Module	18265NGW	WGM: 3413E8346757 WFM: 3413E8346752 BDM: 3413E8346756	2016-10-03	Used for spurious tests from 1 GHz to 200 GHz
	15100901.S01	Extender board	PCB00469	ASS00469-001 4694213-503	2015-10-09	
	160830-01.S47	WiGig Antenna	RFEM3	-	2016-10-03	
	160107-01.S28	Laptop	Dell - Latitude E5440	BJSYN32	2015-08-17	
#04	160830-01.S14	RF Module	18265NGW	WGM: 3413E844B2FB WFM: 3413E8346752 BDM: 3413E8346756	2016-10-03	Used for OBW test
	160830-01.S39	Extender board	PCB00469	ASS00469-001 4694213-389	2016-09-07	
	160830-01.S48	WiGig Antenna	RFEM3	-	2016-10-03	
	160202-02.S69	Laptop	Dell - Latitude E5440	J4SYN32	2016-06-15	

## 5. EUT Features

These are the detailed bands and modes supported by the equipment under Test:

WiGig	60GHz (57.24 – 63.72 GHz)
802.11b/g/n	2.4GHz (2400.0 – 2483.5 MHz)
802.11a/n/ac	5.2GHz (5150.0 – 5250.0 MHz) 5.3GHz (5250.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz)
BDR/EDR/BLE 4.2	2.4GHz (2400.0 – 2483.5 MHz)

## 6. Remarks and comments

N/A

## 7. Test Verdicts summary

FCC part	RSS part	Test name	Verdict
15.255 (e) (1)	RSS-210 Annex J.4	Emission & Occupied Bandwidth	P
15.255 (b) (1)	RSS-210 Annex J.2.1.a	Peak and Average Power, RF detector	P
15.255 (e) (1)	RSS-210 Annex J.4	Peak Output Power, RF detector	P
15.255 (c) (1) (2) (3) (4) 15.255 (d)	RSS-210 Annex J.3	Spurious Emissions	P
15.255 (f)	RSS-210 Annex J.6	Frequency Stability	P
15.255 (h)	RSS-210 Annex J.7	Group Installation	P
15.255 (g) 2.1091	RSS-102	RF Exposure	P

P: Pass  
 F: Fail  
 NM: Not Measured  
 NA: Not Applicable

## 8. Document Revision History

Revision #	Date	Modified by	Details
Rev. 00	2016-10-25	G.GERBAUD	First Issue

# Annex A. Test & System Description


## A.1 EUT Description

The EUT is a 60 GHz 802.11ad WiGig module adapter supporting one RFEM antenna array with typical application intended for portable platforms like Laptops, Tablets etc. :

Operation Frequencies	
Channel 1	58.32 GHz
Channel 2	60.48 GHz
Channel 3	62.64 GHz

Peak Antenna Gain	Channel 1: 11.7	Channel 2: 12.3	Channel 3 : 12.15	dBi
Highest EIRP	23.13			dBm
Highest Peak Output Power	13.90			mW


The EUT is formed by the tested RF module mounted on an extender board and connected to an antenna array via an Intermediate Frequency (IF) coaxial cable. The group is connected to a laptop via a PCIe cable.

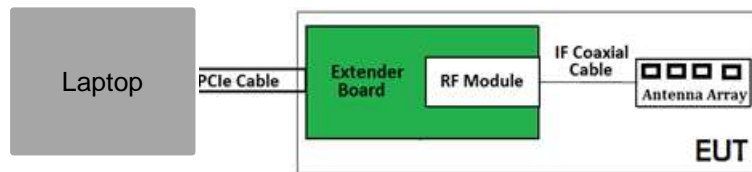


## A.2 Measurement system

Measurements were performed using the following setups, made in accordance to the general provisions of ANSI C63.10-2013, Clause 9 – Procedures for testing millimeter-wave systems.

### *Emission Bandwidth Measurement Setup (57 – 64 GHz)*

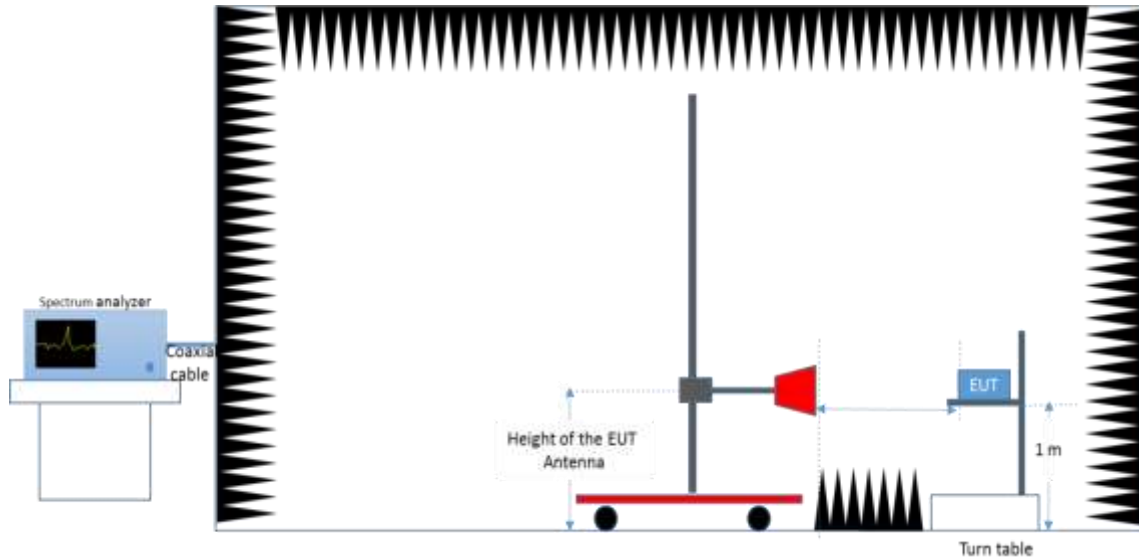


### *RF Detector Measurement Setup (57 – 64 GHz)*

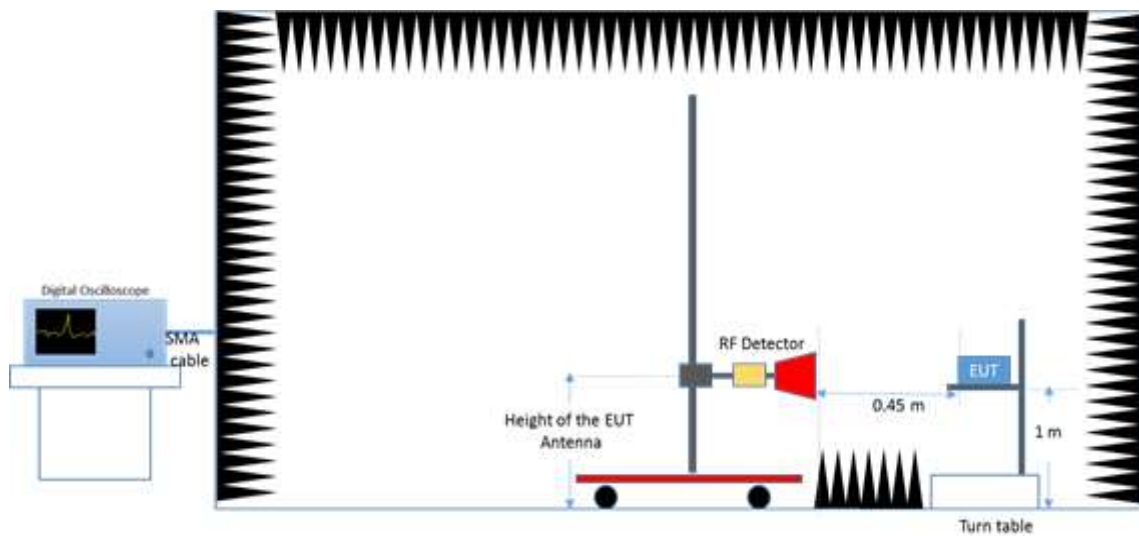





*Radiated Setup (30 MHz – 1 GHz)*

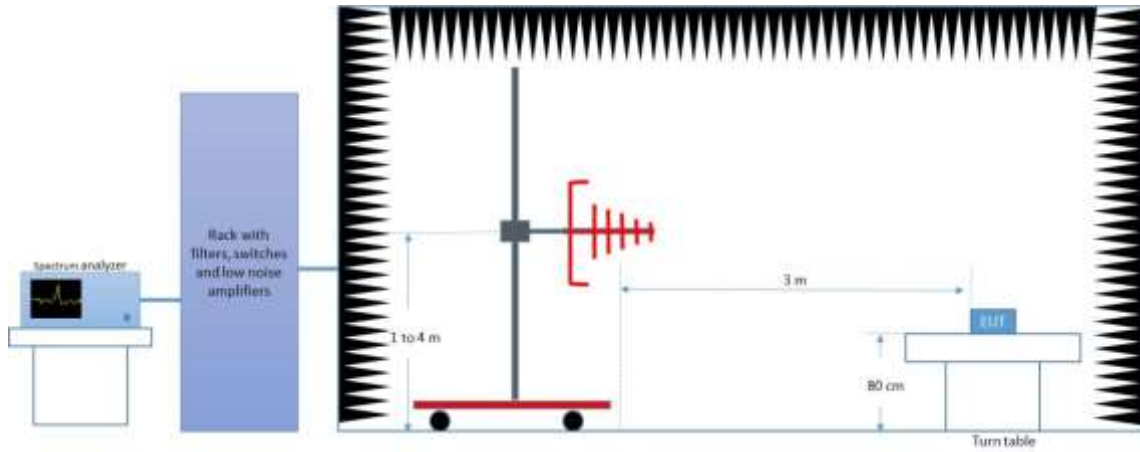


*Radiated Setup (1 GHz – 18 GHz)*

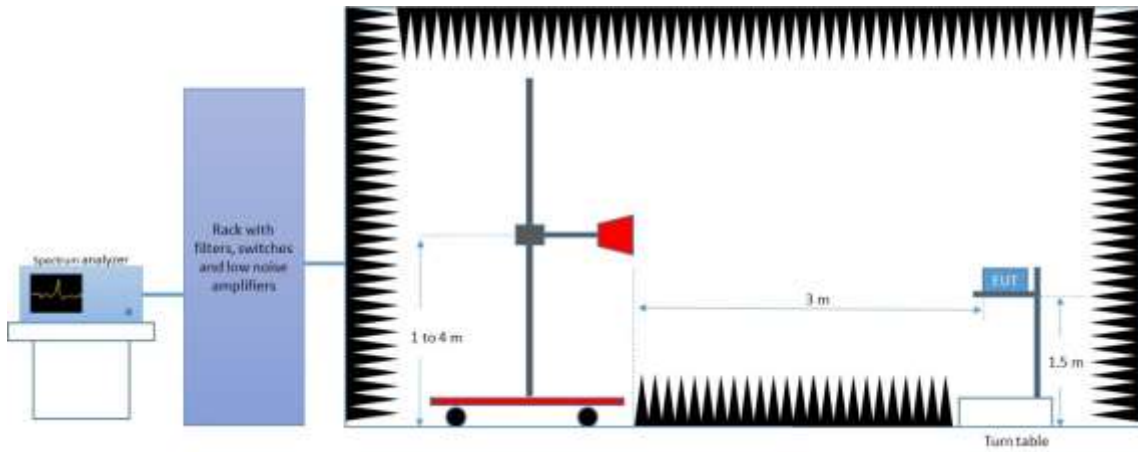


*Radiated Setup (18 GHz – 40 GHz)*

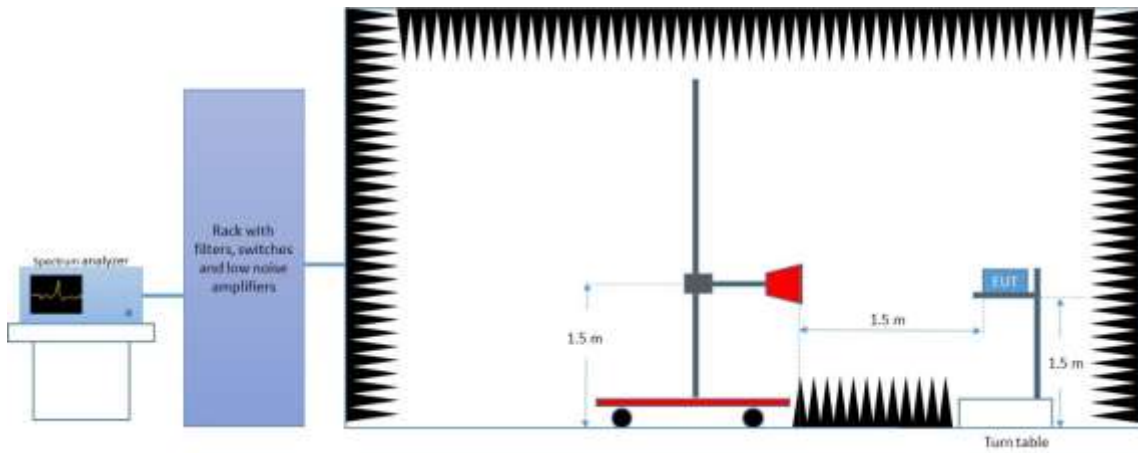

*Radiated Setup (40 GHz – 200 GHz)*

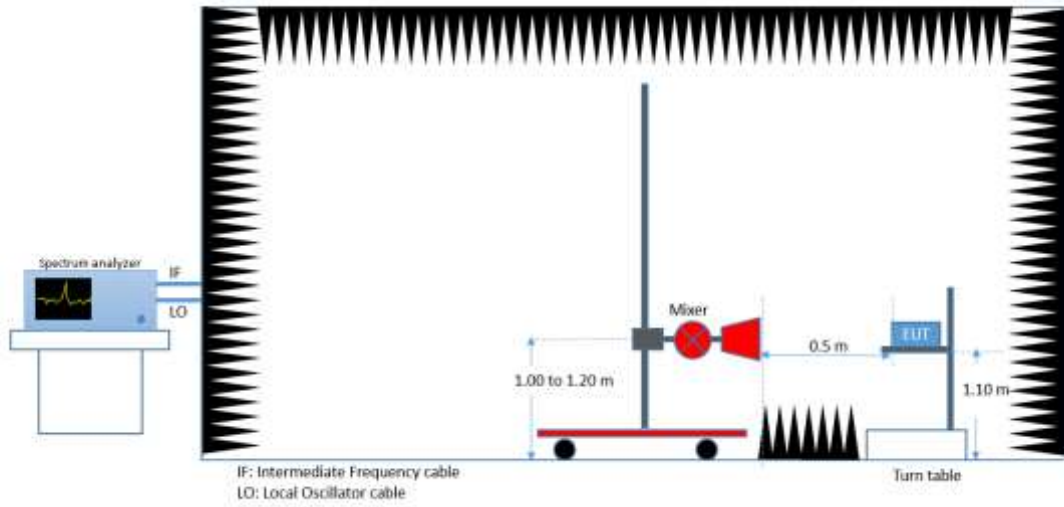

*Frequency Stability Measurement Setup (57 – 64 GHz)*

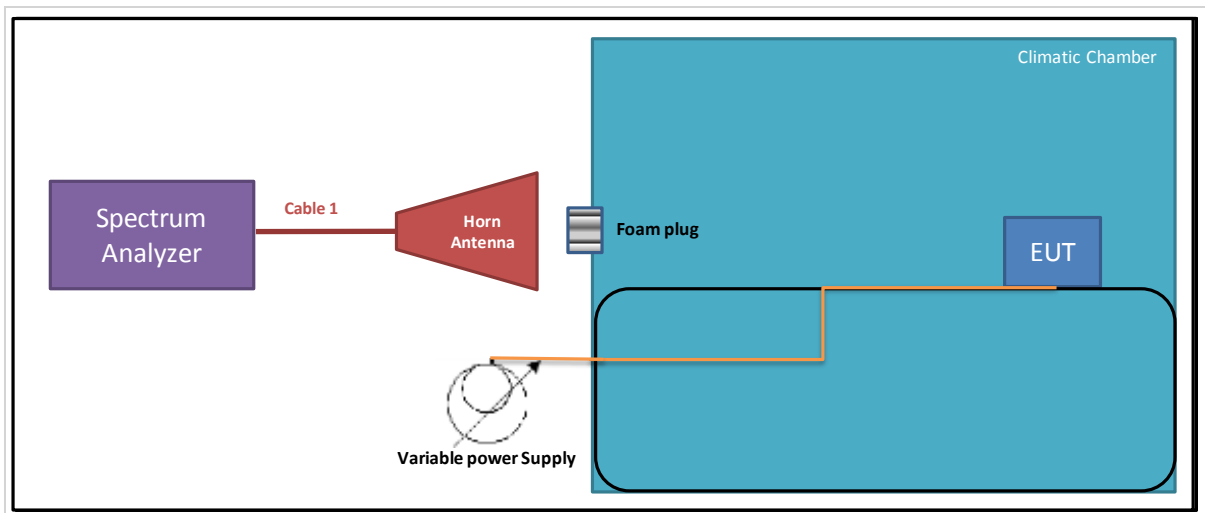

### A.3 Test Equipment List

ID#	Equipment	Model Name	Manufacturer	S/N	Calibration Date	Calibration Expiry
0015	Spectrum Analyzer	FSU67	R&S	100092	2016-07-31	2017-07-31
0419	Spectrum Analyzer	FSW67		103266	2016-05-18	2018-05-18
0420	Spectrum Analyzer	FSV40		101556	2016-04-15	2018-04-15
0133	Spectrum Analyzer	FSV40		101358	2016-04-15	2018-04-15
0309	Signal Generator	SMB100A		178217	2015-03-25	2017-03-25
0137	Log antenna 30 MHz – 1 GHz	3142E	ETS-L	00156946	2015-12-11	2017-12-11
0138	Horn antenna 1 GHz – 6.4 GHz	3117-PA		00157734	2016-03-14	2018-03-14
0343	Horn Antenna 6.4 GHz – 18 GHz	3117-PA		00201542	2015-07-16	2017-07-16
0334	Horn Antenna 10 GHz – 40 GHz	3116C		00169308	2015-07-15	2017-07-15
0064	Antenna (40-60 GHz)	FH-SG-060-25		20011	N/A	N/A
0066	Antenna (50-75 GHz)	FH-SG-075-25	20012	N/A	N/A	
0068	Antenna (60-90 GHz)	FH-SG-090-25	-	N/A	N/A	
0069	Antenna (75-110GHz)	FH-SG-110-25	-	N/A	N/A	
0070	Antenna (110 - 170 GHz)	FH-SG-170-25	-	N/A	N/A	
0071	Antenna (140 - 220 GHz)	FH-SG-220-25	RPG	-	N/A	N/A
0057	MIXER 40 - 60 GHz	FS-Z60	R&S	100130	2016-10-22	2017-10-22
0422	MIXER 60 - 90 GHz	FS-Z90		101646	2016-05-13	2018-05-13
0059	MIXER 75 - 110 GHz	FS-Z110		100069	2017-05-26	2017-05-26
0061	MIXER 110 - 170 GHz	SAM-170	RPG	20000	2016-06-03	2017-06-03
0062	MIXER 140 - 200 GHz	SAM-220	R&S	20012	2015-06-03	2017-06-03
0165	Anechoic chamber	FACT 3	ETS-L	5720	2016-04-28	2018-04-28
0381	Anechoic chamber	Screening Box Screen	Franconia	BD25001	N/A	N/A
0337	Anechoic chamber	RFD-FA-100	ETS Lindgren	5996	2016-04-28	2018-04-28
0329	Measurement Software	EMC32	R&S	1300.7027 .00	N/A	N/A
0027	Measurement Software	EMC32	R&S	1300.7010 .02	N/A	N/A
0530	Measurement Software	EMC32	R&S	100623	N/A	N/A
0014	Power Sensor	NRP-Z57	R&S	101280	2015-05-06	2017-05-06

ID#	Equipment	Model Name	Manufacturer	S/N	Calibration Date	Calibration Expiry
0346	Multimeter	34401A	US36054685	HP	2016-02-04	2018-02-04
0296	Power Supply	6673A	MY41000318	Agilent	N/A	N/A
0427	Frequency Multiplier, 50GHz-75GHz	SMZ75	R&S	101257	N/A	N/A
0312	Digital Oscilloscope	RTE1052	R&S	101135	2015-03-25	2017-03-25
0300	Climatic Chamber	SLT34/40	SECASI	56746020 930010	2015-03-09	2017-03-09
0251	RF Detector	DET-15	Millitech	-	N/A	N/A

NA: Not Applicable

#### A.4 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the below table:


Measurement type	Uncertainty [ ±dB]
Radiated tests for power Measurement (57-66G)	±3.4
Radiated spurious tests < 1GHz	±3.8
Radiated Spurious tests 1 GHz - 40GHz	±4.7
Radiated Spurious tests 40GHz - 200GHz	±4.7

# Annex B. Tests Results

## B.1 Emission Bandwidth

### Test procedure

The setup below was used to measure the 6dB & 99% Bandwidth. The measurement antenna covering the band (50-66GHz) is connected to the spectrum analyzer through a coaxial cable. The Spectrum analyzer is able to measure directly up to 66GHz. The EUT is configured to operate at the Modulation and Coding Scheme index (MCS) giving the maximum output power (MCS 1)<sup>1</sup>.

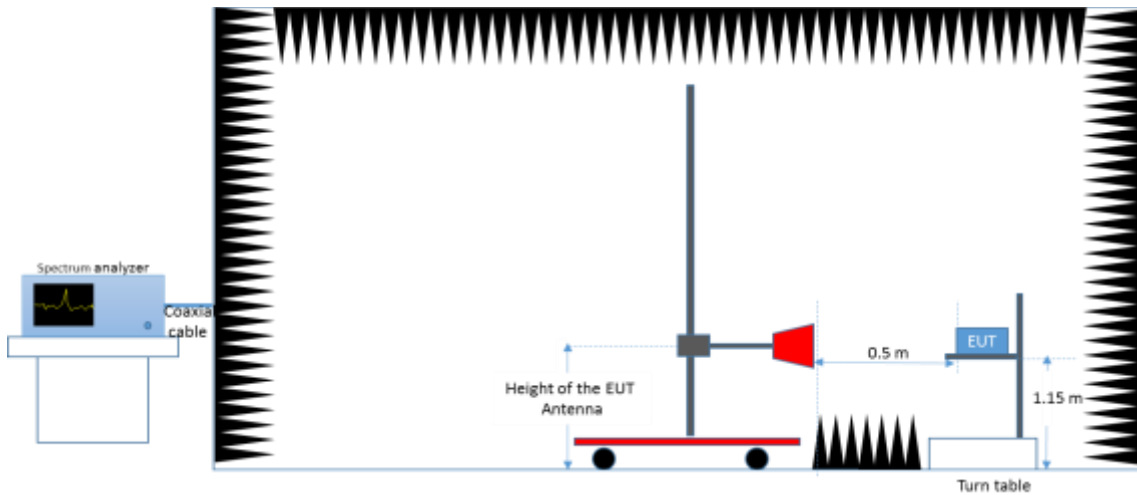



### Results tables



Emission Bandwidths					
Mode	MCS	Channel	Frequency (GHz)	6 dB Bandwidth (GHz)	99% Bandwidth (GHz)
WiGig	1	1	58.32	1.759	2.043
WiGig	1	2	60.48	1.684	1.948
WiGig	1	3	62.64	1.695	2.038

<sup>1</sup> MCS 1 corresponds to  $\pi/2$  BPSK Modulation type with each bit repeated twice and a coding rate of (1/2)

**Results screenshots**

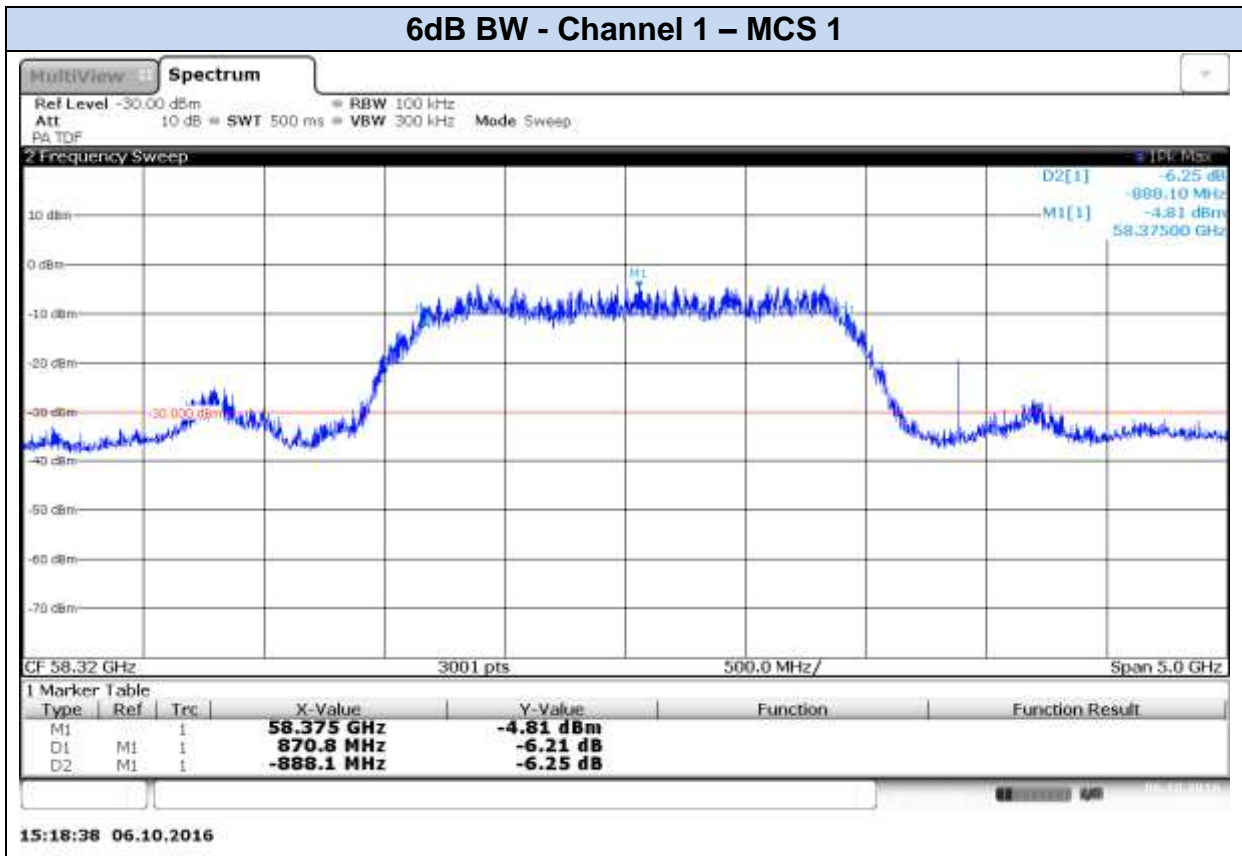

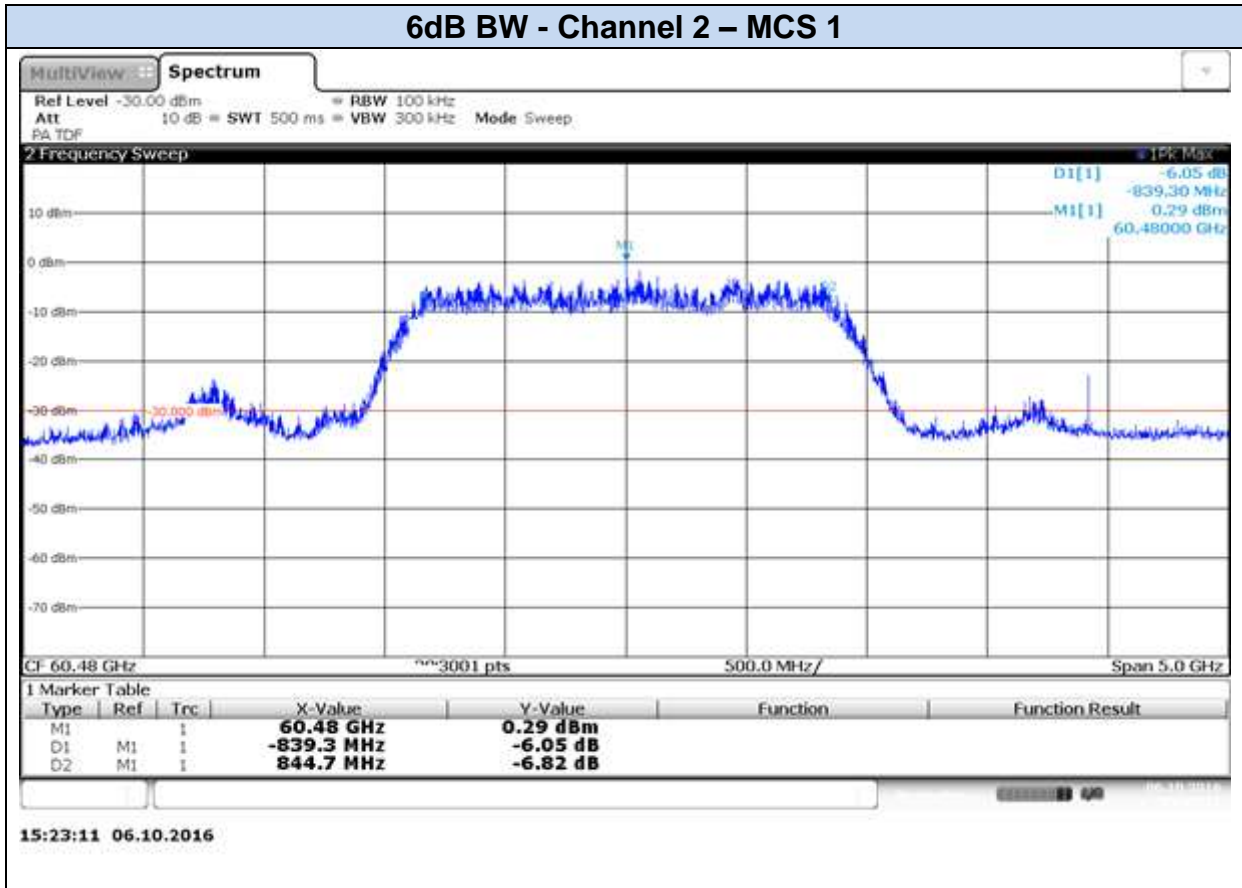

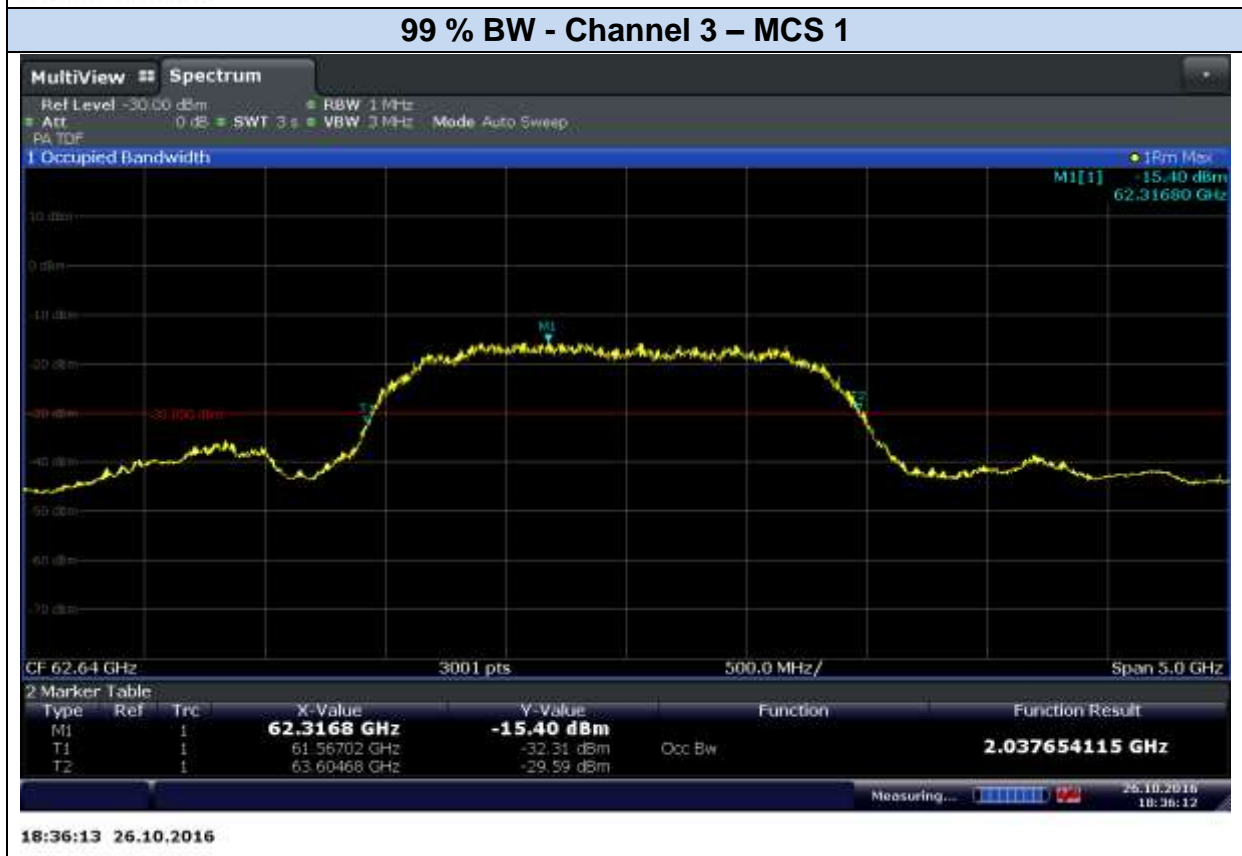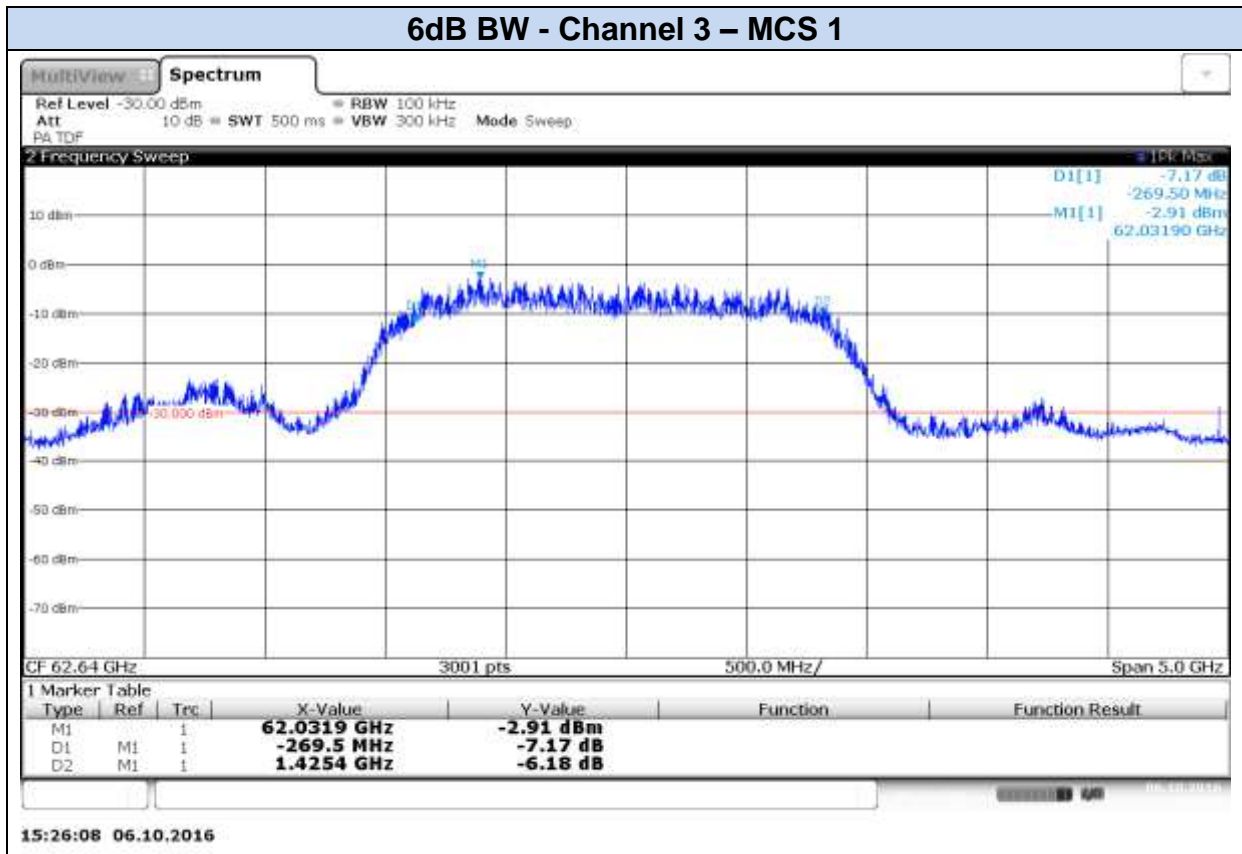



## B.2 Peak and Average Power, RF detector

### Test limits

FCC part	RSS part	Limits
15.255 (b) (1)	RSS-210 Annex J.2.1.a	Within the 57-64 GHz band, emission levels shall not exceed the following equivalent isotropically radiated power (EIRP): the average power of any emission shall not exceed 40 dBm (equivalent to 9 μW/cm <sup>2</sup> power density at 3m) and the peak power of any emission shall not exceed 43 dBm (equivalent to 18 μW/cm <sup>2</sup> power density at 3m)

### Test procedure

1. According to ANSI C63.10-2013, Clause 9, the measurement should be performed at a distance greater than or equal to the far field boundary distance. This later is given by

$$R_{(Far\ Field)} = \frac{2L^2}{\lambda}$$

Where

$L$  is the largest dimension of the transmit antenna in m  
 $\lambda$  is the wavelength in m

Far field boundary calculation			
Frequency (GHz)	Wavelength ( $\lambda$ ) (m)	L (m)	R far field (m)
58.32	0.0051	0.021	0.17
60.48	0.0050	0.021	0.18
62.64	0.0048	0.021	0.18

Our measurements are performed at a distance greater than **0.45m** >  $R_{far\ field}$ . The measurement distance is 0.45 m for all channels.


2. The EUT is configured to operate at the Modulation and Coding Scheme index (MCS) giving the maximum output power (MCS 1).
3. Referring to ANSI C63.10-2013, Clause 9, the equivalent Peak and Average Power obtained using the RF detector measured voltage\* (see setup below) are converted to EIRP using Friis equation and then compared to the limits.

$$EIRP(W) = \frac{P_R}{G_R} \cdot \left(\frac{4\pi D}{\lambda}\right)^2 \text{ and } EIRP(dBm) = 30 + 10 \text{Log}_{10}(EIRP(W))$$

Where:

$P_R$  is the equivalent power measured at the output of the test antenna, in W  
 $\lambda$  is the wavelength of the emission under investigation in m  
 $G_R$  is the linear gain of the test antenna  
 $D$  is the measurement distance in m

\* The conversion from the measured voltage to the equivalent power is done by a substitution measurement using the frequency multiplier (50-75G) and the power sensor (DC-67G) (see Test Equipment List in § A.3).

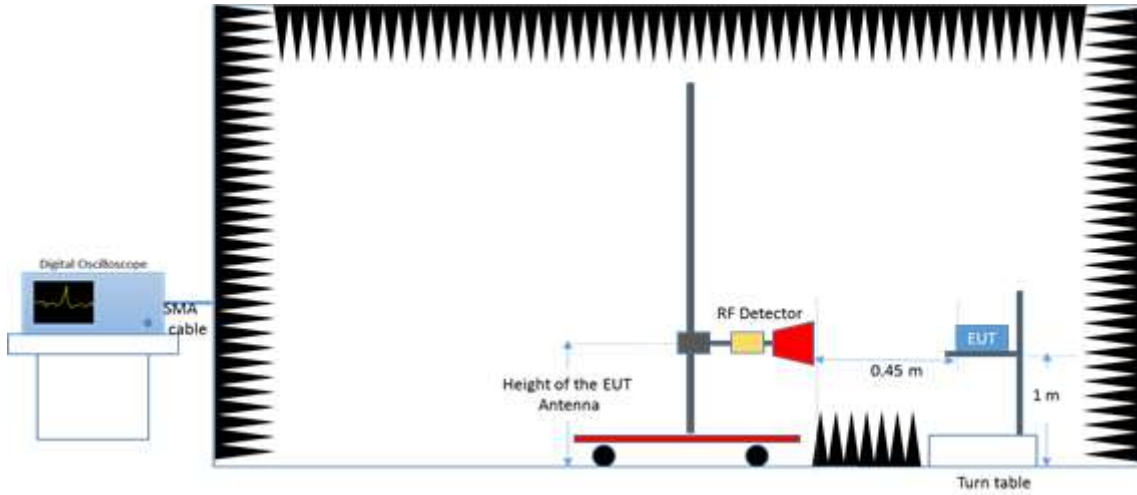

The measurement antenna is aligned with the maximum radiation direction issued from the EUT antenna in order to receive the maximum available power.

**Results tables:**

Peak EIRP									
Mode	MCS	Freq. (GHz)	D (m)	Measured Peak Voltage (mV)	P <sub>R</sub> (dBm)	Rx Antenna Gain G <sub>R</sub> (dBi)	EIRP (W)	EIRP (dBm)	Limit (dBm)
WiGig	1	58.32	0.450	2.68	-13.32	24.37	0.206	23.13	43
WiGig	1	60.48	0.450	2.49	-13.44	24.71	0.199	22.99	43
WiGig	1	62.64	0.450	2.68	-13.35	25.00	0.204	23.09	43

Average EIRP									
Mode	MCS	Freq. (GHz)	D (m)	Measured Peak Voltage (mV)	P <sub>R</sub> (dBm)	Rx Antenna Gain G <sub>R</sub> (dBi)	EIRP (W)	EIRP (dBm)	Limit (dBm)
WiGig	1	58.32	0.450	1.35	-14.82	24.37	0.146	21.63	40
WiGig	1	60.48	0.450	1.18	-15.16	24.71	0.134	21.27	40
WiGig	1	62.64	0.450	1.38	-14.73	25.00	0.148	21.71	40

### B.3 Conducted Peak Output Power, RF detector

#### Test limits

FCC part	RSS part	Limits
15.255 (e) (1)	RSS-210 Issue 9 Annex J.4	<p>The peak transmitter conducted output power shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the EIRP limits specified in paragraph (b) of this section.</p> <p>Transmitters with an emission bandwidth of less than 100 MHz must limit their peak transmitter conducted output power to the product of 500 mW times their emission bandwidth divided by 100 MHz. For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices).</p>

#### Test procedure

The conducted peak output power in dBm is calculated by subtracting the DUT gain in dBi from the Peak EIRP in dBm found in section B.2.

#### Results tables:

Peak Conducted Output Power								
Mode	MCS	Freq. (GHz)	EIRP (dBm)	EUT Antenna Gain (dBi)	Conducted Output Power (dBm)	Conducted Output Power (mW)	6 dB Bandwidth (MHz)	Limit (mW)
WiGig	1	58.32	23.13	11.70	11.43	13.90	1.758	500
WiGig	1	60.48	22.99	12.30	10.69	11.72	1.684	500
WiGig	1	62.64	23.09	12.15	10.94	12.42	1.694	500

## B.4 Spurious Emissions


### Test limits

FCC part	RSS part	Limits																																
15.255	RSS-210 Annex J.3	<p>(c) (1): The power density of any emissions outside the 57-64 GHz band shall consist solely of spurious emissions.</p> <p>(c) (2): Radiated emissions below 40 GHz shall not exceed the general limits in §15.209.</p> <p>(c) (3): Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm<sup>2</sup> at a distance of 3 meters.</p> <p>(c) (4): The levels of the spurious emissions shall not exceed the level of the fundamental emission.</p> <p>(d): Only spurious emissions and transmissions related to a publicly-accessible coordination channel, whose purpose is to coordinate operation between diverse transmitters with a view towards reducing the probability of interference throughout the 57-64 GHz band, are permitted in the 57-57.05 GHz band.</p> <p>Note to paragraph (d): The 57-57.05 GHz is reserved exclusively for a publicly-accessible coordination channel. The development of standards for this channel shall be performed pursuant to authorizations issued under part 5 of this chapter.</p>																																
15.209	RSS-Gen Clause 8.9	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1" data-bbox="678 1265 1390 1527"> <thead> <tr> <th>Freq Range (MHz)</th> <th>Field Strength (μV/m)</th> <th>Field Strength (dBμV/m)</th> <th>Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/f(kHz)</td> <td>-</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/f(kHz)</td> <td>-</td> <td>300</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>-</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100</td> <td>40</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>43.5</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>46</td> <td>3</td> </tr> <tr> <td>960-25000</td> <td>500</td> <td>54</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	0.009-0.490	2400/f(kHz)	-	300	0.490-1.705	24000/f(kHz)	-	300	1.705-30.0	30	-	30	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	960-25000	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																															
0.009-0.490	2400/f(kHz)	-	300																															
0.490-1.705	24000/f(kHz)	-	300																															
1.705-30.0	30	-	30																															
30-88	100	40	3																															
88-216	150	43.5	3																															
216-960	200	46	3																															
960-25000	500	54	3																															


### Test procedure

1. The spurious emissions are measured for the Modulation and Coding Scheme index (MCS) giving the maximum output power.
2. The setups presented below were used to measure the radiated spurious emissions.
  1. **From 30 MHz to 40 GHz:** Depending of the frequency range and bands being tested, different antennas and filters were used. The final measurement is done by varying the antenna height from 1 to 4 meters, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.
  2. **From 30MHz to 18GHz:** The measurements are done at the specification distance (3m) and the measured field strength is directly compared to the limit.
  3. **From 18GHz to 40GHz:** The measurements are done at a distance of (1.5m) then the measured field strength is extrapolated at the distance specified by the limit (3m) using an inverse distance correction factor (20 dB/decade of distance).
  4. **From 40 GHz to 200 GHz:** Depending of the frequency range and bands being tested, different antennas and mixers were used. The final measurement is done by varying the antenna height from 1.00 to 1.20 meters, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations. The EIRP(dBm) is measured, then the power density at 3m is calculated and compared to the limit.


#### *Radiated Setup (30 MHz – 1 GHz)*

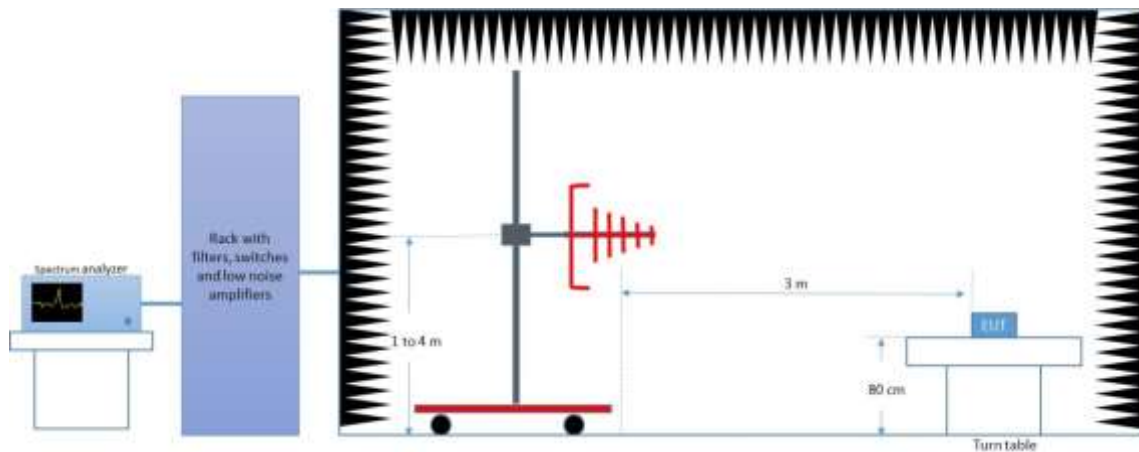


#### *Radiated Setup (1 GHz – 18 GHz)*

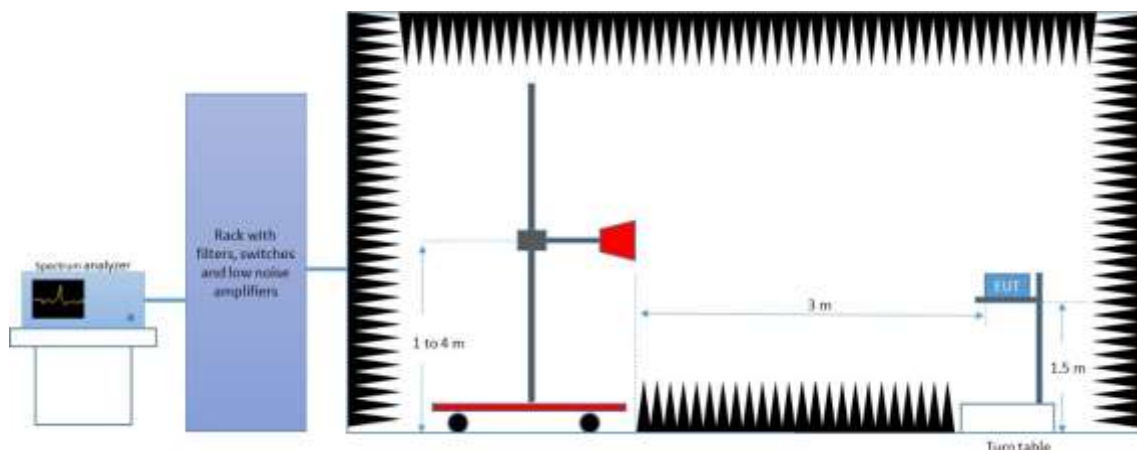

*Radiated Setup (18 GHz – 40 GHz)*

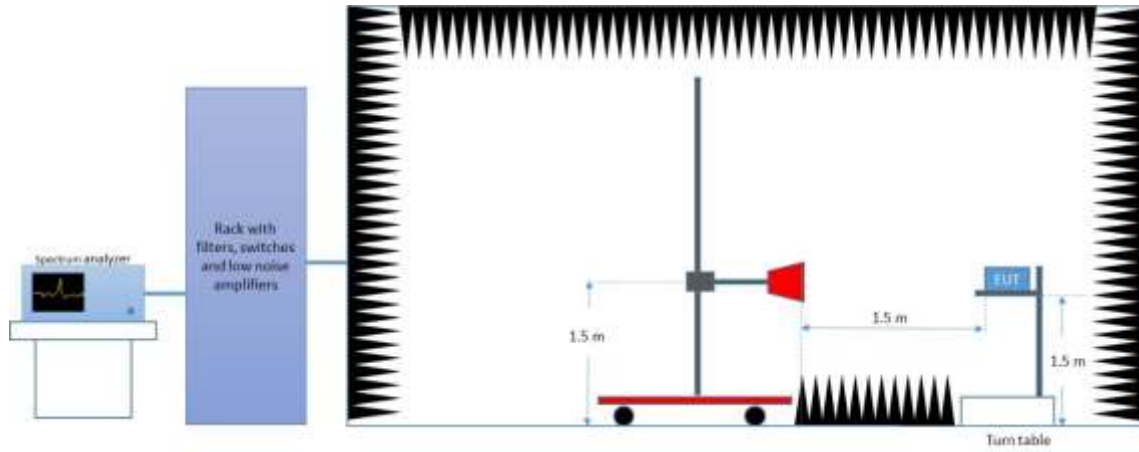


*Radiated Setup (40 GHz – 200 GHz)*

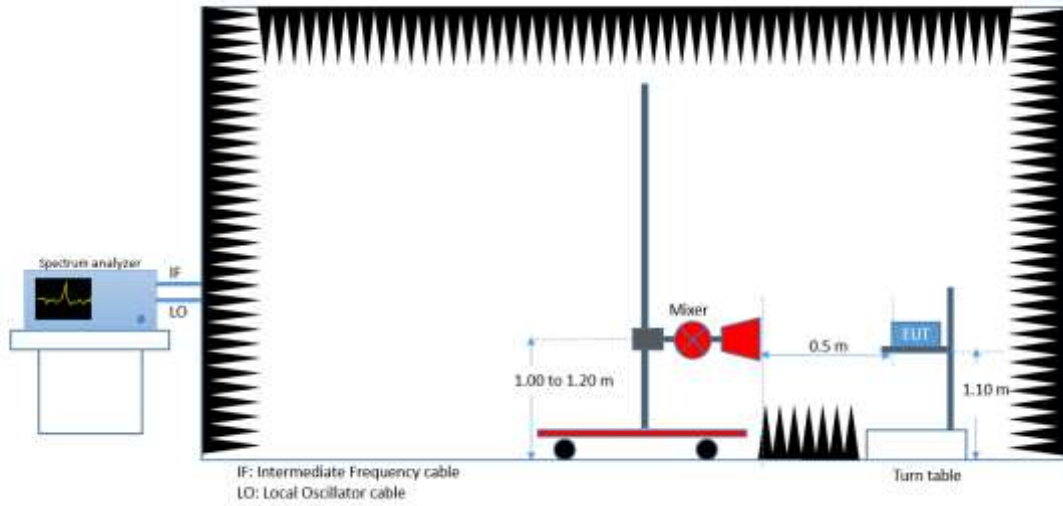

**Tests Results**


**30 MHz – 1 GHz**

**Radiated Spurious – CH1 – MCS1**

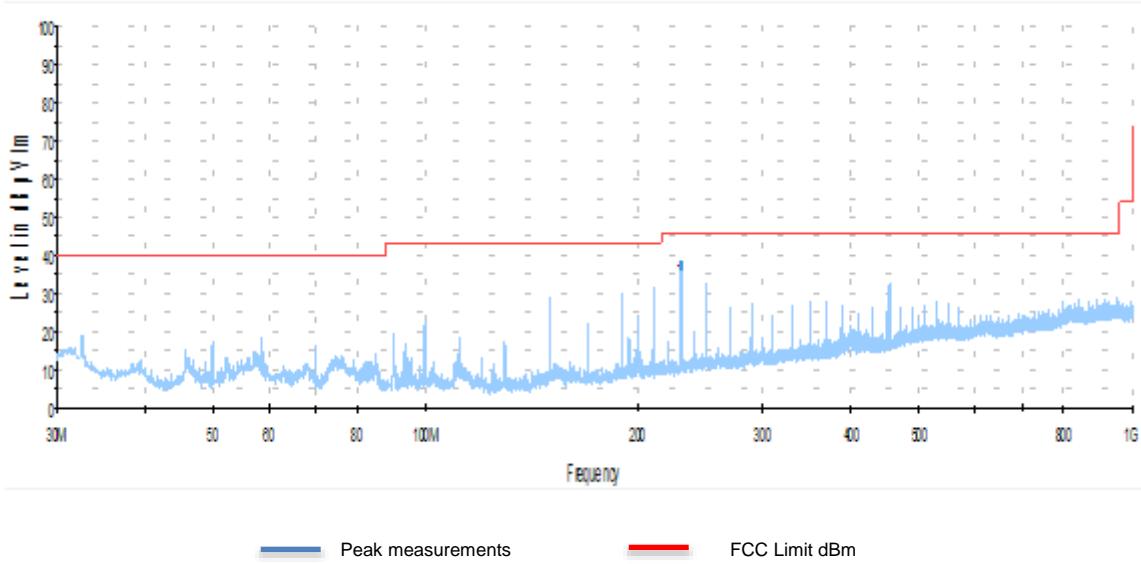


Frequency	MaxPeak	Limit	Margin
MHz	dBµV/m	dBµV/m	dB
229	37.2	46	8.8

### Radiated Spurious – CH2 – MCS1

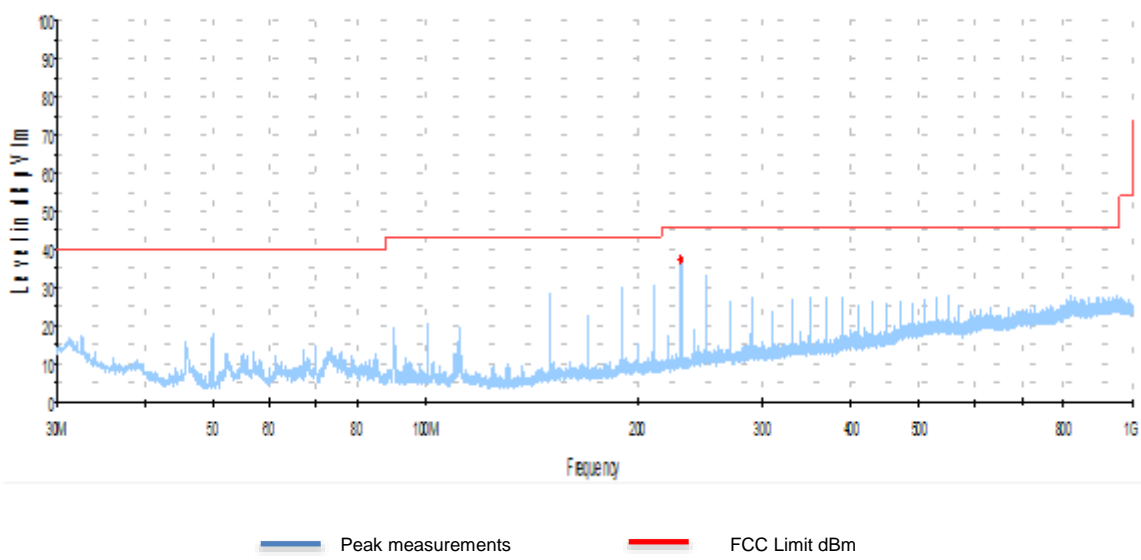

Frequency	MaxPeak	Limit	Margin
MHz	dBµV/m	dBµV/m	dB
230	37.3	46	8.7

### Radiated Spurious – CH3 – MCS1

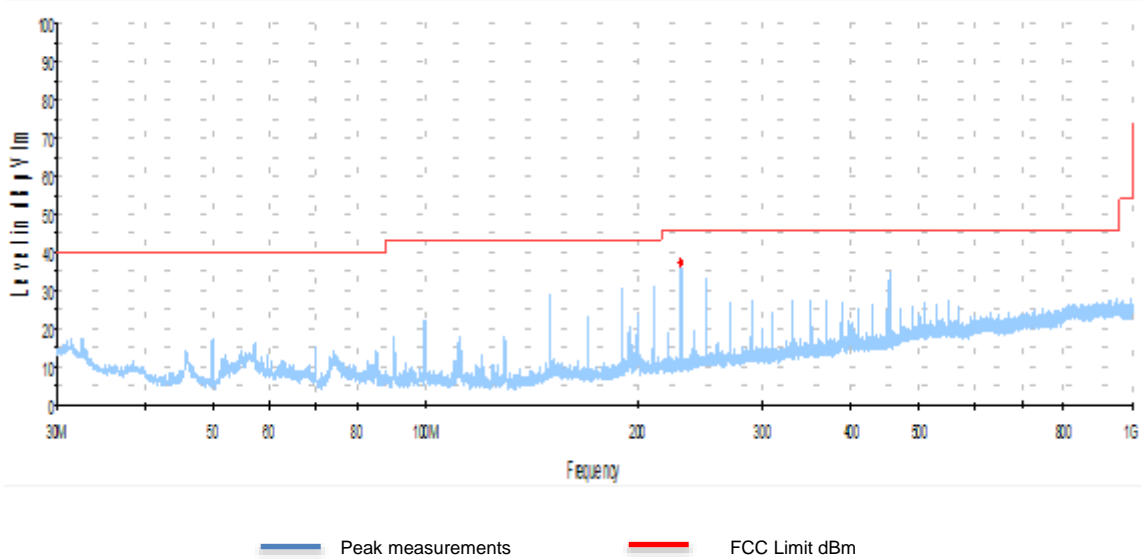


Frequency	MaxPeak	Limit	Margin
MHz	dBµV/m	dBµV/m	dB
229	37.1	46	8.9



# 1 GHz – 18 GHz


## Radiated Spurious – CH1 – MCS1

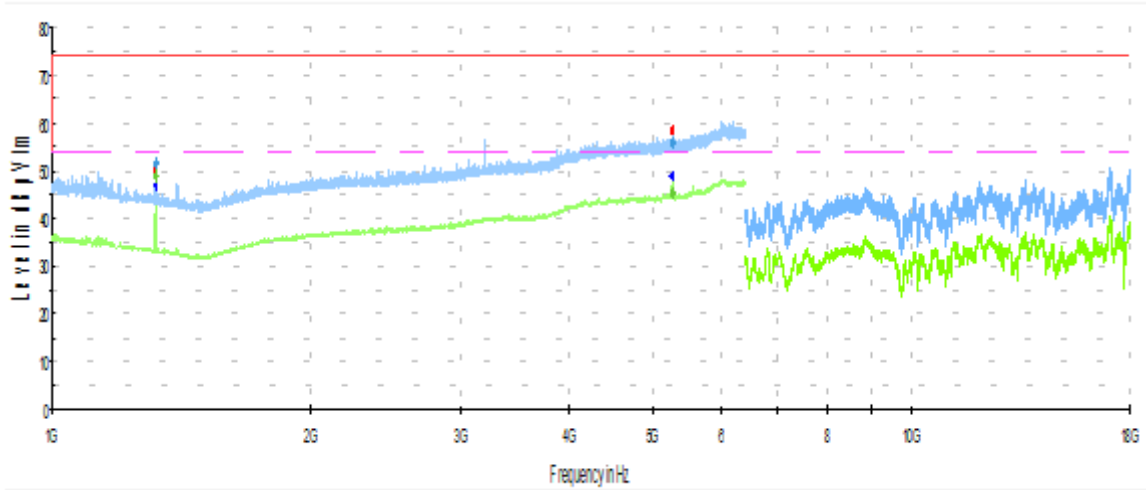

— Peak measurements     
 — Avg measurements     
 — Limit FCC Peak     
 - - - Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
1319	51.3	---	74	22.6
1319	---	48.9	54	5.0
5275	59.7	---	74	14.3
5275	---	49.2	54	4.8


### Radiated Spurious – CH2 – MCS1

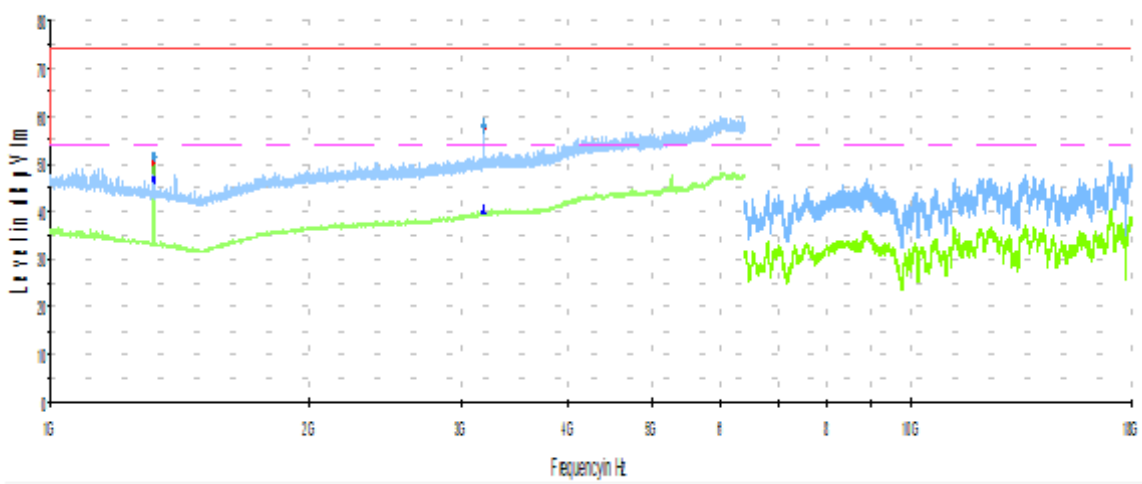

— Peak measurements     
 — Avg measurements     
 — Limit FCC Peak     
 - - - Limit FCC Avg

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
1319	50.2	---	74	23.7
1319	---	46.7	54	7.3
3187	57.8	---	74	16.1
3187	---	40.1	54	13.8

### Radiated Spurious – CH3 – MCS1

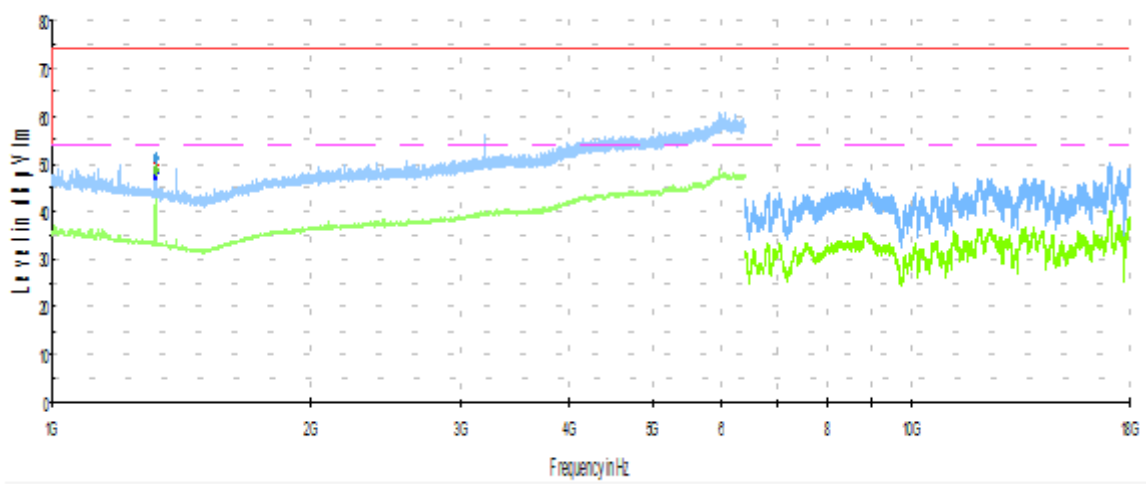


— Peak measurements     
 — Avg measurements     
 — Limit FCC Peak     
 - - - Limit FCC Avg


Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
1319	51.2	---	74	22.8
1319	---	48.53	54	5.47

# 18 MHz – 40 GHz

## Radiated Spurious – CH1 – MCS1

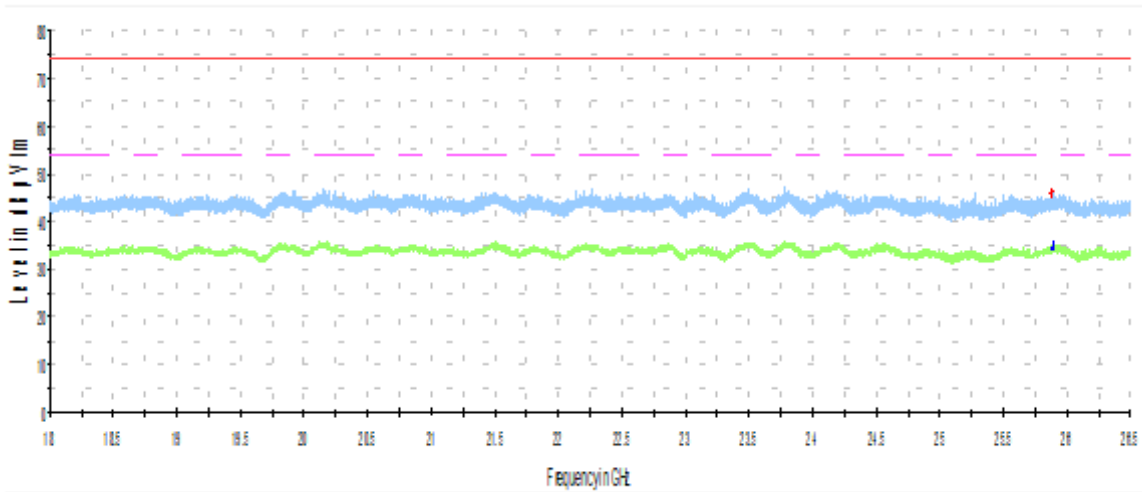


— Peak measurements    
 — AVG measurements    
 — FCC Peak    
 - - - FCC AVG

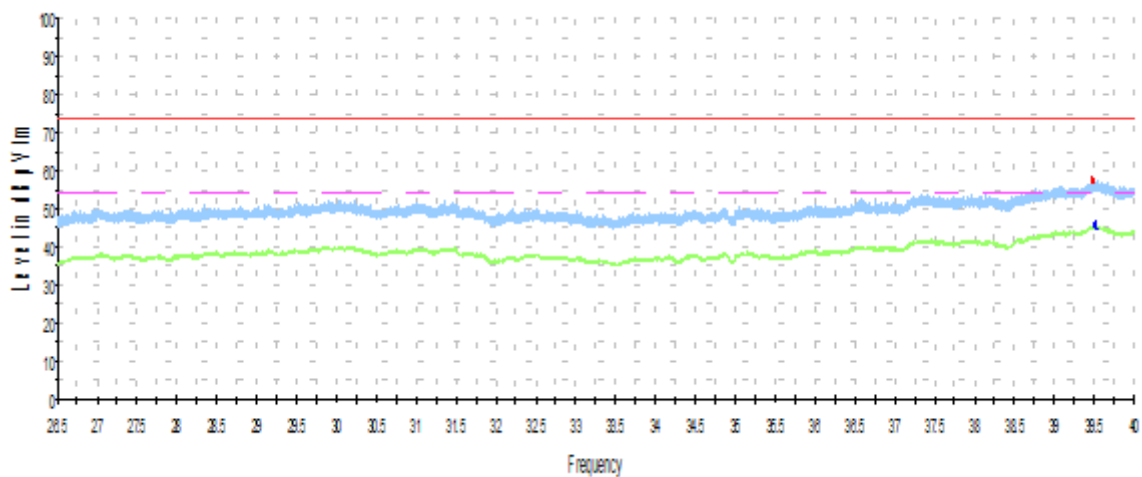


— Peak measurements    
 — AVG measurements    
 — FCC Peak    
 - - - FCC AVG

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
25878	---	34.7	54	19.3
25878	45.7	---	74	28.8
39479	---	45.6	54	8.4
39479	54.6	---	74	16.4

### Radiated Spurious – CH2 – MCS1

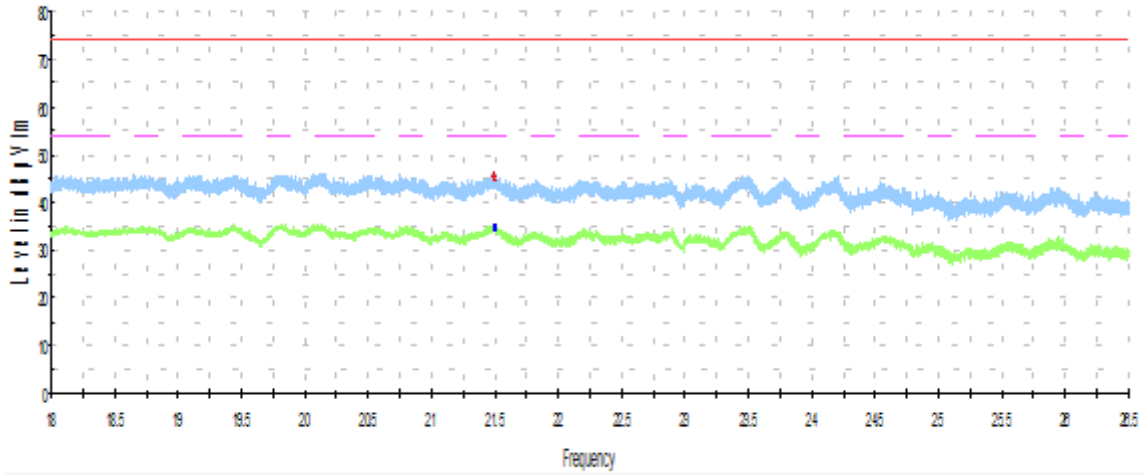


— Peak measurements    
 — AVG measurements    
 — FCC Peak    
 - - - FCC AVG

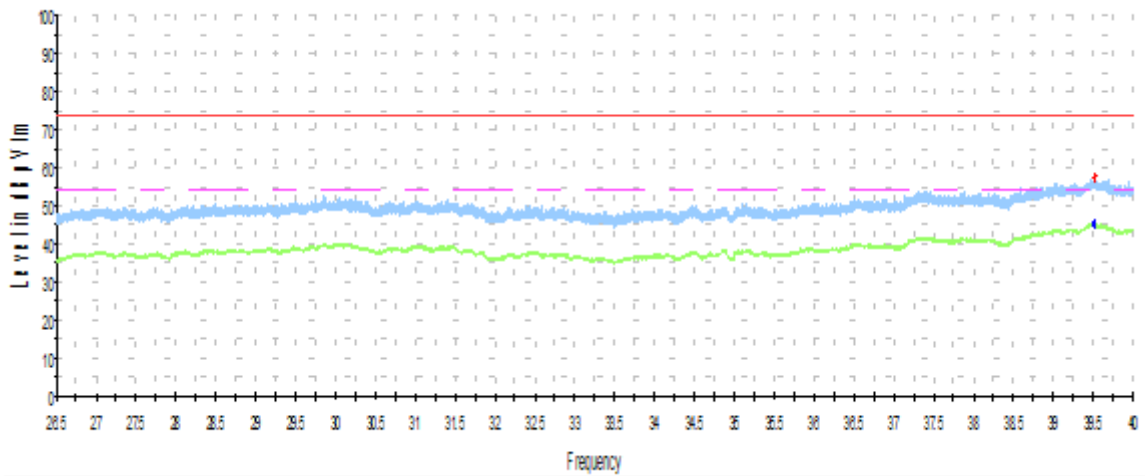


— Peak measurements    
 — AVG measurements    
 — FCC Peak    
 - - - FCC AVG

Frequency	MaxPeak	RMS	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
21491	---	34.7	54	19.3
21491	45.2	---	74	28.8
39515	---	45.4	54	8.6
39515	57.3	---	74	16.7

### Radiated Spurious – CH3 – MCS1

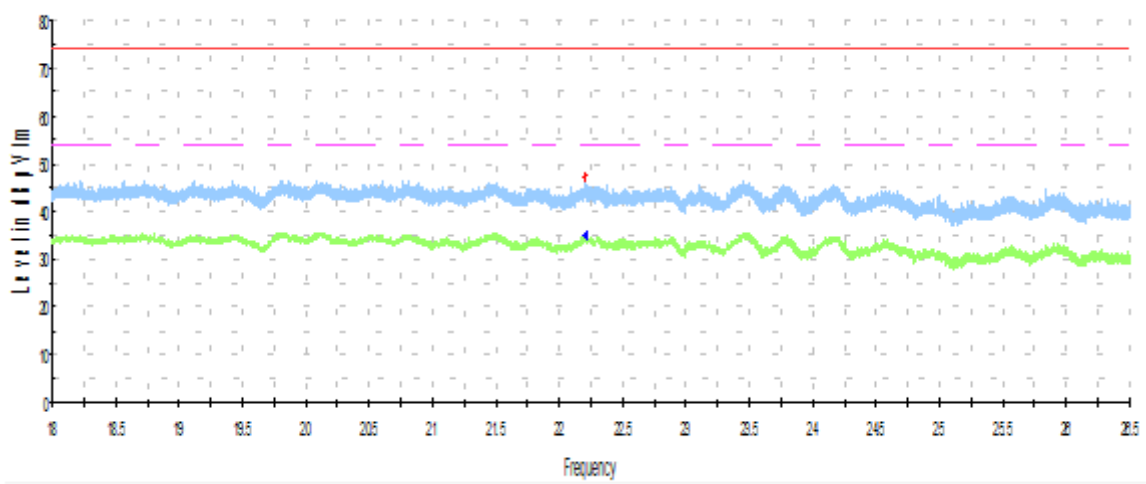

— Peak measurements    
 — AVG measurements    
 — FCC Peak    
 - - - FCC AVG

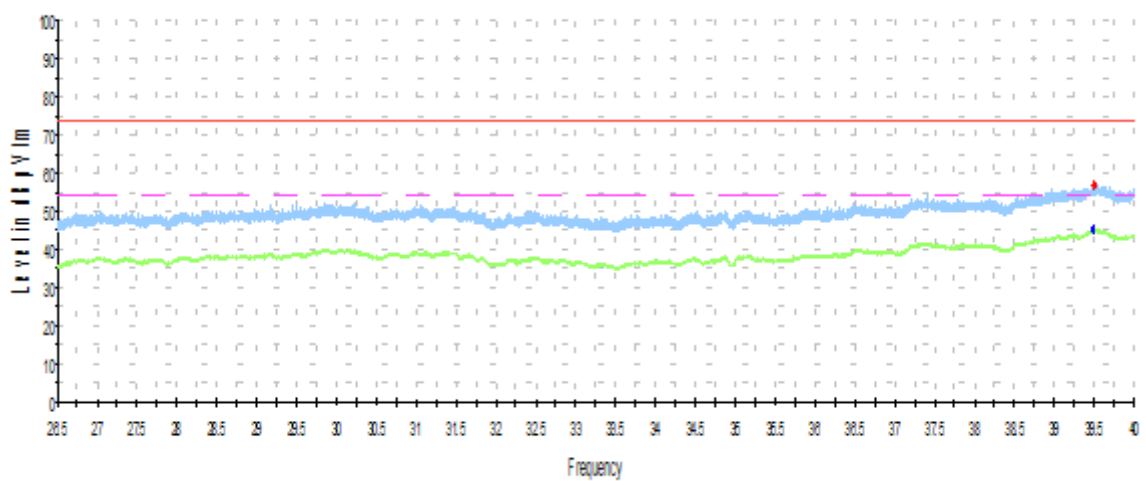

— Peak measurements    
 — AVG measurements    
 — FCC Peak    
 - - - FCC AVG

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
22202	---	34.8	54	19.2
22202	47.0	---	74	27.0
39491	---	45.3	54	8.7
39491	57.0	---	74	17

**40 GHz – 200 GHz****Radiated Spurious – CH1 – MCS1**

Freq. (GHz)	EIRP (dBm)	Meas. Dist (m)	Spec. Dist (m)	Power Density @ 3m (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
165.3	-23.33	0.5	3	4.11	90

No other upper level identified up to 200 GHz above the value reported in the table.

**Radiated Spurious – CH2– MCS1**

Freq. (GHz)	EIRP (dBm)	Meas. Dist (m)	Spec. Dist (m)	Power Density @ 3m (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
165.25	-23.10	0.5	3	4.33	90

No other upper level identified up to 200 GHz above the value reported in the table.

**Radiated Spurious – CH3 – MCS1**

Freq. (GHz)	EIRP (dBm)	Meas. Dist (m)	Spec. Dist (m)	Power Density @ 3m (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )
165.48	-23.17	0.5	3	4.26	90

No other upper level identified up to 200 GHz above the value reported in the table.


## B.5 Frequency Stability

### Test limits

FCC part	RSS part	Limits
15.255 (f)	RSS-210 Annex J.6	Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

### Test procedure

1. Measurements are performed for the highest and lowest frequency of operation and with the modulation that produces the widest emission bandwidth (MCS1) according to the setup below.
2. These measurements are repeated for each step of temperature variation from (-20 to 50 °C) at the nominal voltage.
3. These measurements are repeated for an input voltage variation of 85% to 110% at the reference temperature
4. The frequency excursion is recorded by checking at each time if the 20 dB bandwidth of the fundamental emission is contained within the frequency band over the temperature range -20 to +50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage.

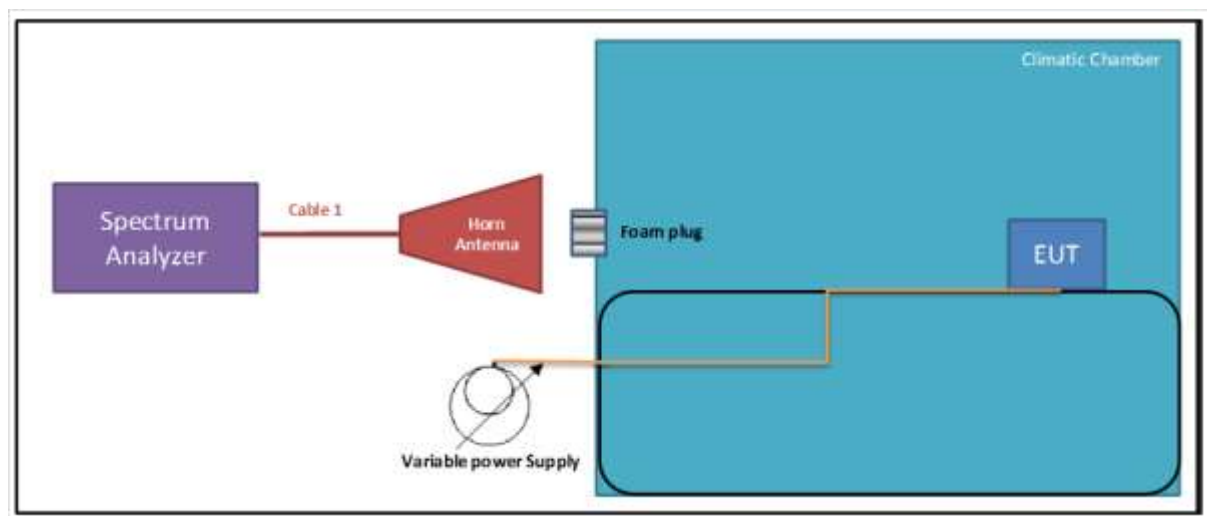



**Results tables**

<b>Lowest frequency of operation (Channel 1)</b>			
<b>Power Supply (VDC)</b>	<b>Environment Temperature (°C)</b>	<b>Min Frequency (GHz) @ 20dB BW</b>	<b>Limit</b>
3.3	50	57.14073	57 GHz
3.3	40	57.27123	57 GHz
3.3	30	57.21980	57 GHz
3.3	20	57.27793	57 GHz
3.3	10	57.26340	57 GHz
3.3	0	57.25780	57 GHz
3.3	-10	57.26820	57 GHz
3.3	-20	57.27847	57 GHz
2.805	20	57.26380	57 GHz
3.795	20	57.27113	57 GHz

<b>Highest frequency of operation (Channel 3)</b>			
<b>Power Supply (VDC)</b>	<b>Environment Temperature (°C)</b>	<b>Max Frequency (GHz) @ 20dB BW</b>	<b>Limit</b>
3.3	50	63.72233	64 GHz
3.3	40	63.72607	64 GHz
3.3	30	63.73300	64 GHz
3.3	20	63.66447	64 GHz
3.3	10	63.71953	64 GHz
3.3	0	63.65020	64 GHz
3.3	-10	63.63020	64 GHz
3.3	-20	63.71993	64 GHz
2.805	20	63.65740	64 GHz
3.795	20	63.66460	64 GHz

## B.6 Group Installation

### Test limits

FCC part	RSS part	Limits
15.255 (h)	RSS-210 Annex J.7	Any transmitter that has received the necessary FCC equipment authorization under the rules of this chapter may be mounted in a group installation for simultaneous operation with one or more other transmitter(s) that have received the necessary FCC equipment authorization, without any additional equipment authorization. However, no transmitter operating under the provisions of this section may be equipped with external phase-locking inputs that permit beam-forming arrays to be realized.

### Results

According to applicant's declaration, there is no external Phase-Locking input to realize a beamforming array.

## B.7 RF Exposure

### Limits

FCC part	Limits																																																																	
15.255 (g)	Regardless of the power density levels permitted under this section, devices operating under the provisions of this section are subject to the radiofrequency radiation exposure requirements specified in §§1.1307(b), 2.1091 and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.																																																																	
2.1091	<p>(b) For purposes of this section, a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons. In this context, the term "fixed location" means that the device is physically secured at one location and is not able to be easily moved to another location. Transmitting devices designed to be used by consumers or workers that can be easily re-located, such as wireless devices associated with a personal computer, are considered to be mobile devices if they meet the 20 centimeter separation requirement.</p> <p>(c)(2) Unlicensed personal communications service devices, unlicensed millimeter wave devices and unlicensed NII devices authorized under §§15.253(f), 15.255(g), 15.257(g), 15.319(i), and 15.407(f) of this chapter are also subject to routine environmental evaluation for RF exposure prior to equipment authorization or use if their ERP is 3 watts or more or if they meet the definition of a portable device as specified in §2.1093(b) requiring evaluation under the provisions of that section.</p>																																																																	
1.1310	<p>(e) Table 1 below sets forth limits for Maximum Permissible Exposure (MPE) to radiofrequency electromagnetic fields.</p> <p style="text-align: center;">TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)</p> <table border="1" data-bbox="427 1218 1329 1552"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Electric field strength (V/m)</th> <th>Magnetic field strength (A/m)</th> <th>Power density (mW/cm<sup>2</sup>)</th> <th>Averaging time (minutes)</th> </tr> </thead> <tbody> <tr> <td colspan="5" style="text-align: center;">(A) Limits for Occupational/Controlled Exposure</td> </tr> <tr> <td>0.3-3.0</td> <td>614</td> <td>1.63</td> <td>*100</td> <td>6</td> </tr> <tr> <td>3.0-30</td> <td>1842/f</td> <td>4.89/f</td> <td>*900/f<sup>2</sup></td> <td>6</td> </tr> <tr> <td>30-300</td> <td>61.4</td> <td>0.163</td> <td>1.0</td> <td>6</td> </tr> <tr> <td>300-1,500</td> <td></td> <td></td> <td>f/300</td> <td>6</td> </tr> <tr> <td>1,500-100,000</td> <td></td> <td></td> <td>5</td> <td>6</td> </tr> <tr> <td colspan="5" style="text-align: center;">(B) Limits for General Population/Uncontrolled Exposure</td> </tr> <tr> <td>0.3-1.34</td> <td>614</td> <td>1.63</td> <td>*100</td> <td>30</td> </tr> <tr> <td>1.34-30</td> <td>824/f</td> <td>2.19/f</td> <td>*180/f<sup>2</sup></td> <td>30</td> </tr> <tr> <td>30-300</td> <td>27.5</td> <td>0.073</td> <td>0.2</td> <td>30</td> </tr> <tr> <td>300-1,500</td> <td></td> <td></td> <td>f/1500</td> <td>30</td> </tr> <tr> <td>1,500-100,000</td> <td></td> <td></td> <td>1.0</td> <td>30</td> </tr> </tbody> </table>	Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)	(A) Limits for Occupational/Controlled Exposure					0.3-3.0	614	1.63	*100	6	3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6	30-300	61.4	0.163	1.0	6	300-1,500			f/300	6	1,500-100,000			5	6	(B) Limits for General Population/Uncontrolled Exposure					0.3-1.34	614	1.63	*100	30	1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30	30-300	27.5	0.073	0.2	30	300-1,500			f/1500	30	1,500-100,000			1.0	30
Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)																																																														
(A) Limits for Occupational/Controlled Exposure																																																																		
0.3-3.0	614	1.63	*100	6																																																														
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6																																																														
30-300	61.4	0.163	1.0	6																																																														
300-1,500			f/300	6																																																														
1,500-100,000			5	6																																																														
(B) Limits for General Population/Uncontrolled Exposure																																																																		
0.3-1.34	614	1.63	*100	30																																																														
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30																																																														
30-300	27.5	0.073	0.2	30																																																														
300-1,500			f/1500	30																																																														
1,500-100,000			1.0	30																																																														

RSS part	Limits																																																							
RSS-102	<p><b>3. Evaluation Methods</b>                      (...) Devices operating above 6 GHz regardless of the separation distance shall undergo an RF exposure evaluation.</p> <p><b>4. Exposure Limits</b>                      For the purpose of this standard, Industry Canada has adopted the SAR and RF field strength limits established in Health Canada's RF exposure guideline, Safety Code 6.</p> <p style="text-align: center;"><b>Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)</b></p> <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th> <th>Electric Field (V/m rms)</th> <th>Magnetic Field (A/m rms)</th> <th>Power Density (W/m<sup>2</sup>)</th> <th>Reference Period (minutes)</th> </tr> </thead> <tbody> <tr> <td>0.003-10<sup>21</sup></td> <td>83</td> <td>90</td> <td>-</td> <td>Instantaneous*</td> </tr> <tr> <td>0.1-10</td> <td>-</td> <td>0.73/ f</td> <td>-</td> <td>6**</td> </tr> <tr> <td>1.1-10</td> <td>87/ f<sup>0.5</sup></td> <td>-</td> <td>-</td> <td>6**</td> </tr> <tr> <td>10-20</td> <td>27.46</td> <td>0.0728</td> <td>2</td> <td>6</td> </tr> <tr> <td>20-48</td> <td>58.07/ f<sup>0.25</sup></td> <td>0.1540/ f<sup>0.25</sup></td> <td>8.944/ f<sup>0.5</sup></td> <td>6</td> </tr> <tr> <td>48-300</td> <td>22.06</td> <td>0.05852</td> <td>1.291</td> <td>6</td> </tr> <tr> <td>300-6000</td> <td>3.142 f<sup>0.3417</sup></td> <td>0.008335 f<sup>0.3417</sup></td> <td>0.02619 f<sup>0.6834</sup></td> <td>6</td> </tr> <tr> <td>6000-15000</td> <td>61.4</td> <td>0.163</td> <td>10</td> <td>6</td> </tr> <tr> <td>15000-150000</td> <td>61.4</td> <td>0.163</td> <td>10</td> <td>616000/ f<sup>1.2</sup></td> </tr> <tr> <td>150000-300000</td> <td>0.158 f<sup>0.5</sup></td> <td>4.21 x 10<sup>-4</sup> f<sup>0.5</sup></td> <td>6.67 x 10<sup>-3</sup> f</td> <td>616000/ f<sup>1.2</sup></td> </tr> </tbody> </table> <p><small>Note: f is frequency in MHz.                      *Based on nerve stimulation (NS).                      ** Based on specific absorption rate (SAR).</small></p>	Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m <sup>2</sup> )	Reference Period (minutes)	0.003-10 <sup>21</sup>	83	90	-	Instantaneous*	0.1-10	-	0.73/ f	-	6**	1.1-10	87/ f <sup>0.5</sup>	-	-	6**	10-20	27.46	0.0728	2	6	20-48	58.07/ f <sup>0.25</sup>	0.1540/ f <sup>0.25</sup>	8.944/ f <sup>0.5</sup>	6	48-300	22.06	0.05852	1.291	6	300-6000	3.142 f <sup>0.3417</sup>	0.008335 f <sup>0.3417</sup>	0.02619 f <sup>0.6834</sup>	6	6000-15000	61.4	0.163	10	6	15000-150000	61.4	0.163	10	616000/ f <sup>1.2</sup>	150000-300000	0.158 f <sup>0.5</sup>	4.21 x 10 <sup>-4</sup> f <sup>0.5</sup>	6.67 x 10 <sup>-3</sup> f	616000/ f <sup>1.2</sup>
	Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m <sup>2</sup> )	Reference Period (minutes)																																																			
0.003-10 <sup>21</sup>	83	90	-	Instantaneous*																																																				
0.1-10	-	0.73/ f	-	6**																																																				
1.1-10	87/ f <sup>0.5</sup>	-	-	6**																																																				
10-20	27.46	0.0728	2	6																																																				
20-48	58.07/ f <sup>0.25</sup>	0.1540/ f <sup>0.25</sup>	8.944/ f <sup>0.5</sup>	6																																																				
48-300	22.06	0.05852	1.291	6																																																				
300-6000	3.142 f <sup>0.3417</sup>	0.008335 f <sup>0.3417</sup>	0.02619 f <sup>0.6834</sup>	6																																																				
6000-15000	61.4	0.163	10	6																																																				
15000-150000	61.4	0.163	10	616000/ f <sup>1.2</sup>																																																				
150000-300000	0.158 f <sup>0.5</sup>	4.21 x 10 <sup>-4</sup> f <sup>0.5</sup>	6.67 x 10 <sup>-3</sup> f	616000/ f <sup>1.2</sup>																																																				

**Test procedure**

For the purpose of this evaluation, a minimum distance of 20cm was used to calculate the equivalent plan wave power density based on the Average EIRP values obtained in B.2, to be compared with the power density limit, according to following formula:

$$S_{eq} = \frac{P_{avg} \cdot G}{4 \cdot \pi \cdot R^2} \Rightarrow S_{eq} = \frac{EIRP}{4 \cdot \pi \cdot R^2}$$

Where:

$S_{eq}$  = Equivalent Plane Wave Power Density, in Watts per square meter.

$P_{avg}$  = Source-Based Average Power at antenna terminals, in Watts.

$EIRP$  = Equivalent Isotropically Radiated Power, in Watts.

$G$  = Gain of the Transmitting Antenna.

$R$  = Distance from the Transmitting Antenna, in meters.

**Results**

Power Density Calculation							
Mode	MCS	Frequency (GHz)	Average EIRP (dBm)	Average EIRP (W)	Separation Distance (m)	Power Density (W/m <sup>2</sup> )	Limit (W/m <sup>2</sup> )
WiGig	1	58.32	21.63	0.146	0.2	0.290	10
WiGig	1	60.48	21.27	0.134	0.2	0.267	10
WiGig	1	62.64	21.71	0.148	0.2	0.295	10