

EMC Test Report


*Information Technology Equipment
Class B Digital Device*

*FCC Part 15
Industry Canada ICES-003, Issue 5*

Model: 3160NGW

IC CERTIFICATION #: 1000M-3160NG
FCC ID: PD93160NG and PD93160NGU
COMPANY: Intel Mobile Communications
100 Center Point Circle, Suite 200
Columbia, SC 29210, USA
TEST SITE(S): National Technical Systems - Silicon Valley
41039 Boyce Road.
Fremont, CA. 94538-2435
REPORT DATE: June 17, 2013
FINAL TEST DATES: June 8, 2013
TOTAL NUMBER OF PAGES: 27

PROGRAM MGR /
TECHNICAL REVIEWER:



David W. Bare
Chief Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:



David Guidotti
Senior Technical Writer



National Technical Systems - Silicon Valley is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	06-17-2013	Initial release	-

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE	4
STATEMENT OF COMPLIANCE.....	4
DEVIATIONS FROM THE STANDARDS.....	5
INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS	5
CONDUCTED EMISSIONS (MAINS PORT)	5
RADIATED EMISSIONS	5
MEASUREMENT UNCERTAINTIES.....	5
EQUIPMENT UNDER TEST (EUT) DETAILS.....	6
GENERAL.....	6
HIGHEST EUT INTERNAL SOURCE.....	6
ENCLOSURE.....	7
MODIFICATIONS.....	7
SUPPORT EQUIPMENT.....	7
EUT INTERFACE PORTS	7
EUT OPERATION	7
EMISSIONS TESTING	8
RADIATED AND CONDUCTED EMISSIONS.....	8
<i>RADIATED EMISSIONS CONSIDERATIONS</i>	8
<i>CONDUCTED EMISSIONS CONSIDERATIONS</i>	8
EMISSIONS MEASUREMENT INSTRUMENTATION.....	9
RECEIVER SYSTEM	9
INSTRUMENT CONTROL COMPUTER	9
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	9
IMPEDANCE STABILIZATION NETWORK (ISN)	9
FILTERS/ATTENUATORS	9
ANTENNAS.....	10
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	10
INSTRUMENT CALIBRATION.....	10
EMISSIONS TEST PROCEDURES	11
EUT AND CABLE PLACEMENT	11
CONDUCTED EMISSIONS (MAINS)	11
CONDUCTED EMISSIONS (TELECOMMUNICATION PORTS)	11
RADIATED EMISSIONS	12
<i>General</i>	12
<i>Preliminary Scan</i>	12
<i>Final Maximization</i>	13
SAMPLE CALCULATIONS	14
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	14
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	14
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	15
APPENDIX B TEST DATA	16
APPENDIX C PRODUCT LABELING REQUIREMENTS.....	24
APPENDIX D USER MANUAL REGULATORY STATEMENTS	25
APPENDIX E BASIC AND REFERENCE STANDARDS	26
SUBPART B OF PART 15 OF FCC RULES FOR DIGITAL DEVICES.	26
END OF REPORT	27

SCOPE

Governments and standards organizations around the world have published requirements regarding the electromagnetic compatibility (EMC) of electronic equipment. Testing has been performed on the Intel Mobile Communications model 3160NGW, pursuant to the following standards.

Standard	Title	Standard Date
FCC Part 15, Subpart B	Radio Frequency Devices	October 2012 as Amended
ICES-003, Issue 5	Information Technology Equipment (ITE) – Limits and methods of measurement	August 2012

All measurements and evaluations have been in accordance with these specifications, test procedures, and measurement guidelines as outlined in National Technical Systems - Silicon Valley test procedures, and in accordance with the standards referenced therein (refer to Appendix E).

OBJECTIVE

The objective of Intel Mobile Communications is to verify compliance with FCC and Canada's requirements for digital devices.

STATEMENT OF COMPLIANCE

The tested sample of Intel Mobile Communications models 3160NGW complied with the requirements of:

Standard/Regulation	Equipment Type/Class	Standard Date
Subpart B of Part 15 of the FCC Rules (CFR title 47)	Class B	2012 as amended
ICES-003, Issue 5	Class B	2012

As specified in Section 15.101 of FCC Part 15, unintentional radiators shall be authorized prior to the initiation of marketing. Based on the description of the EUT, the following criteria per Section 15.101 of FCC Part 15 were applied to the EUT:

Type of device	Equipment authorization required
Class B personal computers and peripherals	Declaration of Conformity or Certification <i>[Certification is sought]</i>

The test results recorded herein are based on a single type test of the Intel Mobile Communications model 3160NGW and therefore apply only to the tested sample(s). The sample was selected and prepared by Stephen Hackett of Intel Mobile Communications.

Maintenance of compliance is the responsibility of the company. Any modification of the product that could result in increased emissions or susceptibility should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different enclosure, different line filter or power supply, harnessing and/or interface cable changes, etc.).

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS

The following emissions tests were performed on the Intel Mobile Communications model 3160NGW. The measurements were extracted from the data recorded during testing and represent the highest-amplitude emissions relative to the specification limits. The complete test data is provided in the appendices of this report.

CONDUCTED EMISSIONS (MAINS PORT)

Frequency Range Operating Voltage	Standard/Section	Requirement	Measurement	Margin	Status
0.15-30 MHz, 120 V, 60 Hz	FCC § 15.107(a) (Class B)	0.15-0.5 MHz: 66-56 dB μ V QP 56-46 dB μ V Av 0.5-5.0 MHz: 56 dB μ V QP 46 dB μ V Av 5.0-30.0 MHz: 60 dB μ V QP 50 dB μ V Av	40.9 dB μ V/m @ 338.70 MHz	-5.1 dB	Complied

RADIATED EMISSIONS

Frequency Range	Standard/Section	Requirement	Measurement	Margin	Status
30-1000 MHz	FCC §15.109(g) Class B	30-230 MHz, 30 dB μ V/m 230-1000 MHz, 37 dB μ V/m (10 m limit)	56.3 dB μ V @ 0.167 MHz	-8.8 dB	Complied

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below were calculated using the approach described in CISPR 16-4-2:2003 using a coverage factor of k=2, which gives a level of confidence of approximately 95%. The levels were found to be below levels of U_{cispr} and therefore no adjustment of the data for measurement uncertainty is required.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
Conducted Emissions	dB μ V or dB μ A	150 kHz – 30 MHz	\pm 2.2 dB
Radiated Electric Field	dB μ V/m	30-1000 MHz	\pm 3.6 dB
		1000-40,000 MHz	\pm 6.0 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Intel Mobile Communications model 3160NGW is M.2 (Next Generation Form Factor) IEEE 802.11a/b/g/n/ac wireless network adapter module that supports 1x1 (SISO) operation and Bluetooth operation in Basic Rate, Enhanced Data Rate and Low Energy modes.

The card is sold under two different FCC ID numbers (see table below). The ID ending in "U" is intended to allow user install conditions and host systems must be provided with a BIOS lock feature that prevents installation of unauthorized devices.

For radio testing purposes the card was installed in a test fixture that exposed all sides of the card. For digital device testing for certification under equipment code JBP the card was installed in a test fixture external to the PC.

The sample was received on May 20, 2013 and tested on June 8, 2013. The samples tested are as follows:

Company	Model	Description	Serial Number	FCC ID
Intel Mobile Communications	3160NGW	Bluetooth / IEEE 802.11a/b/g/n wireless network adapter module	BD5C54	PD93160NG PD93160NGU 1000M-3160NG

HIGHEST EUT INTERNAL SOURCE

The highest internal source of the EUT was declared as 40 MHz.

Based on the declared highest internal source, the upper frequency range of measurement for the current project were:

FCC Part 15, Subpart B

Highest Internal Source (MHz)	Upper Frequency Range of Measurement (MHz)	Applicability
Below 1.705	30	
1.705 – 108	1000	X
108 – 500	2000	
500 – 1000	5000	
Above 1000	5th harmonic of the highest internal source or 40 GHz, whichever is lower	

ENCLOSURE

The EUT has no enclosure. It is designed to be installed within the enclosure of a host computer.

MODIFICATIONS

No modifications were made to the EUT during testing. The test fixture cable had two ferrite clamps added.

SUPPORT EQUIPMENT

The following equipment was used as local support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Intel Mobile Communications	HMC-NGFF Extension REV.01	Extender board	-	N/A
Dell	Latitude E5400	Laptop	Unmarked	N/A

The following equipment was used as remote support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Asante	FH109TN	Ethernet Switch	320I0199	N/A

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

From	Port		Description	Cable(s) Shielded/Unshielded	Length(m)
	To				
Laptop Ethernet		Remote Switch	CAT5	Unshielded	20.0
Laptop Mini PCIe slot		Extender Board PCIe	Ribbon	Unshielded	0.8
EUT - RF ports (x2)		Antenna Fixture	coaxial (x2)	shielded	0.2

EUT OPERATION

During emissions testing the digital interface to the EUT was active, the laptop was showing a scrolling H pattern and the peripheral interfaces were enabled and active.

EMISSIONS TESTING**RADIATED AND CONDUCTED EMISSIONS**

Final test measurements were taken at the National Technical Systems - Silicon Valley Anechoic Chambers listed below. The test sites contain separate areas for radiated and conducted emissions testing. The sites conform to the requirements of ANSI C63.4: 2003 *American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* and CISPR 16-1-4:2007 - *Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Ancillary equipment Radiated disturbances*. They are registered with the VCCI and are on file with the FCC and Industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 4	211948	2845B-4	41039 Boyce Road Fremont, CA 94538-2435

RADIATED EMISSIONS CONSIDERATIONS

Radiated emissions measurements were made with the EUT powered from a supply voltage within the expected tolerances of each nominal operating voltage/frequency for each geographical regions covered by the scope of the standards referenced in this report.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions tests are performed in conformance with ANSI C63.4, and Subpart B of Part 15 of FCC Rules for Digital Devices.

Mains port measurements are made with the EUT connected to the public power network through nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

Telecommunication port measurements are made with the unshielded network cable connected through an impedance stabilization network (ISN) appropriate to the type of cable employed. Where no suitable ISN is available measurements are made using a capacitive voltage probe (CVP) and a current probe. If shielded cables are specified for the port under test the measurement is made of the noise voltage on the shield of the cable via a 100 ohm resistor.

EMISSIONS MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1:2006 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7 GHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000 MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

Measurements are converted to the field strength at an antenna or voltage developed at the LISN (or ISN) measurement port, which is then compared directly with the appropriate specification limit under software control of the test receivers and spectrum analyzers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted emission measurements utilize a fifty micro-Henry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250-uH CISPR adapter. This network provides for calibrated radio-frequency noise measurements by the design of the internal low-pass and high-pass filters on the EUT and measurement ports, respectively.

IMPEDANCE STABILIZATION NETWORK (ISN)

Telecommunication port conducted emission measurements utilize an Impedance Stabilization Network with a 150-ohm termination impedance and specific longitudinal conversion loss as the voltage monitoring point. This network provides for calibrated radio-frequency noise measurements by the design of the internal circuitry on the EUT and measurement ports, respectively. For current measurements, a current probe with a uniform frequency response and less than 1-ohm insertion impedance is used.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high-amplitude transient events.

ANTENNAS

A bilog antenna or combination of biconical and log periodic antennas are used to cover the range from 30 MHz to 1000 MHz. Narrowband tuned dipole antennas may be used over the entire 30 to 1000 MHz frequency range for precision measurements of field strength. Above 1000 MHz, horn antennas are used. The antenna calibration factors are included in site factors that are programmed into the test receivers or data collection software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor drive to vary the antenna height.

ANSI C63.4 specify that the test height above ground for table-mounted devices shall be 80 centimeters. Floor-mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material up to 12-mm thick if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the company's specifications. An appendix of this report contains the list of test equipment used and calibration information.

EMISSIONS TEST PROCEDURES

EUT AND CABLE PLACEMENT

The standards require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst-case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS (MAINS)

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest-amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak-mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord. Emissions that have peak values close to the specification limit are also measured in the quasi-peak and average detection modes to determine compliance except when the amplitude of the emission when measured with the quasi-peak detector is more than 10 dB below the specification limit for average measurements. In this case only quasi-peak measurements are performed.

CONDUCTED EMISSIONS (TELECOMMUNICATION PORTS)

Conducted emissions voltages are measured at a point 80 cm from the EUT. If conducted emission currents are measured, the current probe is located 70 cm from the EUT. Preliminary measurements are made to determine the highest-amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak-mode scan is then performed in the position and mode for which the highest emission was noted. Emissions that have peak values close to the specification limit are also measured in the quasi-peak and average detection modes to determine compliance except when the amplitude of the emission when measured with the quasi-peak detector is more than 10 dB below the specification limit for average measurements. In this case only quasi-peak measurements are performed.

RADIATED EMISSIONS*General*

FCC Part 15 references the test methods of ANSI C63.4-2003 (American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz) for emissions measurements. However FCC Public Notice DA 09-2478 (released on November 25, 2009) clarifies measurements made to determine compliance may be performed using the test methods of either the 2003 or 2009 version of the ANSI C63.4 document.

For the current project, the test methods of ANSI C63.4-2003 were used. As the two versions of ANSI C63.4 specify different usage of floor absorbers during radiated emissions testing, the table below has been included for clarification:

Frequency Range	ANSI C63.4-2003	ANSI C63.4-2009
30-1000 MHz	No floor absorbers used	No floor absorbers used
Above 1000 MHz	No floor absorbers used	"Free space" test environment with floor absorbers placed between antenna and EUT in accordance with CISPR 16-1-4

Radiated emissions measurements are performed in two phases, preliminary scan and final maximization.

Preliminary Scan

A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one or more of these with the antenna polarized vertically and one or more of these are performed with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied as necessary to determine the highest emission relative to the limit.

Note that for the frequency range of 1-6 GHz in the "free space" test environment, CISPR 22 allows the antenna to be set at fixed height equal to the center height of the EUT, except for cases where additional scans are necessary with the antenna height adjusted up and down to ensure the measurement antenna illuminates the entire height of the EUT. However, in cases where a single "free space" test is performed in the 1-6 GHz frequency to simultaneously meet the requirements of FCC Part 15 (ANSI C63.4-2009 test methods) and CISPR 22, the antenna height is by default varied since required by ANSI C63.4.

In the frequency range of 30-1000 MHz, a speaker (with demodulation) is provided in the receiver to aid in discriminating between EUT and ambient emissions if required. Other possible methods for discriminating between EUT and ambient emissions involve scanning with near-field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final Maximization

During final maximization, the highest-amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth that results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions that have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

Final measurements in the frequency range of 30-1000 MHz are made using a quasi-peak detector and compared to the quasi-peak limit. Final measurements above 1 GHz are made using average and peak detectors and compared to the average and peak limits respectively.

When testing above 1 GHz, the receive antenna is restricted to a maximum height of 2.5 m. Maximum emissions are found within this restricted range because emission levels decrease over distance and as the antenna is raised above 2.5 m, the distance from the EUT increases. As a result of the increased measurement distance, at antenna heights above 2.5 m, lower emission levels are measured as compared to emissions levels measured at antenna heights at 2.5 m and below. Final measurements are captured at 3 meters test distance except in cases where a closer test distance is required due to noise-floor considerations of the test-and-measurement equipment.

For measurements above 1 GHz every effort is made to ensure the EUT remains within the cone of radiation of the measurement antenna (i.e. 3 dB beam-width of the antenna). This may include rotating the product and/or angling the measurement antenna.

SAMPLE CALCULATIONS**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form). The calculation is as follows:

$$R_r - S = M$$

where:

- R_r = Receiver Reading in dBuV
- S = Specification Limit in dBuV
- M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

- F_d = Distance Factor in dB
- D_m = Measurement Distance in meters
- D_s = Specification Distance in meters

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

- R_r = Receiver Reading in dBuV/m
- F_d = Distance Factor in dB
- R_c = Corrected Reading in dBuV/m
- L_s = Specification Limit in dBuV/m
- M = Margin in dB Relative to Spec

Appendix A Test Equipment Calibration Data**Conducted Emissions - AC Power Ports, 08-Jun-13**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	LISN, 10 kHz-100 MHz, 25A	3825/2	1292	2/14/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/12/2013
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1594	5/15/2014

Radiated Emissions, 30 - 1,000 MHz, 08-Jun-13

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	12/12/2013
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1548	8/9/2014
Com-Power	Preamplifier, 30-1000 MHz	PA-103A	2359	2/20/2014

Appendix B Test Data

T92301 Pages 17 - 23



EMC Test Data

Client:	Intel	Job Number:	J91968
Model:	Intel Model 3160NGW Wireless Network Adapter	T-Log Number:	J92301
		Account Manager:	Christine Krebill
Contact:	Steve Hackett		
Emissions Standard(s):	FCC 15 B, 15.247, RSS 210	Class:	B
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Intel

Model

Intel Model 3160NGW Wireless Network Adapter

Date of Last Test: 6/10/2013




EMC Test Data

Client:	Intel	Job Number:	J91968
Model:	Intel Model 3160NGW Wireless Network Adapter	T-Log Number:	J92301
Contact:	Steve Hackett	Account Manager:	Christine Krebill
Standard:	FCC 15 B, 15.247, RSS 210	Class:	B

Run #: Preliminary Radiated Emissions, 30 - 1000 MHz

EUT is a PC peripheral, Host PC configured with two external peripheral devices of different I/O protocols, FCC H-Pattern running

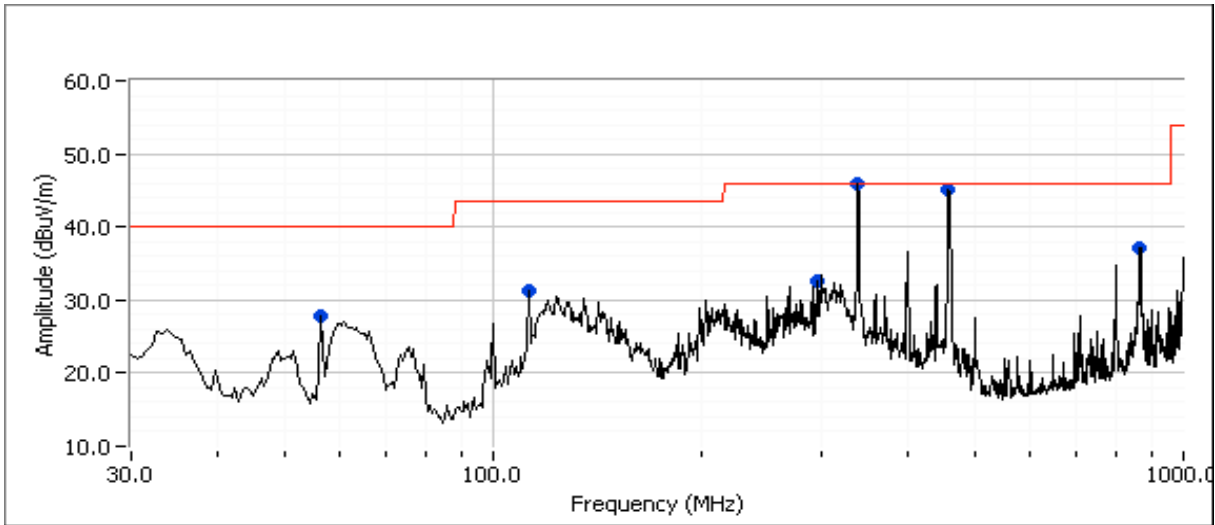

Preliminary peak readings captured during pre-scan

Frequency	Level	Pol	FCC 15B Class B		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
112.903	31.4	V	43.5	-12.1	Peak	8	1.0	
297.320	32.7	H	46.0	-13.3	Peak	67	1.0	
56.457	27.8	V	40.0	-12.2	Peak	238	1.0	
338.695	45.9	H	46.0	-0.1	Peak	284	1.0	
457.933	45.1	V	46.0	-0.9	Peak	200	2.0	
865.881	37.1	H	46.0	-8.9	Peak	173	1.0	

Preliminary quasi-peak readings (no manipulation of EUT interface cables)

Frequency	Level	Pol	FCC 15B Class B		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
338.695	40.9	H	46.0	-5.1	QP	251	0.9	QP (1.00s)
457.933	39.2	V	46.0	-6.8	QP	198	2.0	QP (1.00s)
112.903	31.8	V	43.5	-11.7	QP	23	1.0	QP (1.00s)
297.320	31.1	H	46.0	-14.9	QP	76	0.9	QP (1.00s)
865.881	29.4	H	46.0	-16.6	QP	171	1.0	QP (1.00s)
56.457	9.0	V	40.0	-31.0	QP	239	1.0	QP (1.00s)



EMC Test Data

Client:	Intel	Job Number:	J91968
Model:	Intel Model 3160NGW Wireless Network Adapter	T-Log Number:	J92301
Contact:	Steve Hackett	Account Manager:	Christine Krebill
Standard:	FCC 15 B, 15.247, RSS 210	Class:	B

Run #2: Maximized Readings From Run #1

Maximized quasi-peak readings (includes manipulation of EUT interface cables)

Frequency	Level	Pol	FCC 15B Class B		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
338.695	40.9	H	46.0	-5.1	QP	251	0.9	QP (1.00s)
457.933	39.2	V	46.0	-6.8	QP	198	2.0	QP (1.00s)
112.903	31.8	V	43.5	-11.7	QP	23	1.0	QP (1.00s)
297.320	31.1	H	46.0	-14.9	QP	76	0.9	QP (1.00s)
865.881	29.4	H	46.0	-16.6	QP	171	1.0	QP (1.00s)
56.457	9.0	V	40.0	-31.0	QP	239	1.0	QP (1.00s)



EMC Test Data

Client:	Intel	Job Number:	J91968
Model:	Intel Model 3160NGW Wireless Network Adapter	T-Log Number:	J92301
		Account Manager:	Christine Krebill
Contact:	Steve Hackett		
Standard:	FCC 15 B, 15.247, RSS 210	Class:	B

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 6/8/2013	Config. Used: 2
Test Engineer: Jack Liu	Config Change: None
Test Location: FT Chamber #4	Host Unit Voltage 120V/60Hz

General Test Configuration

The host system was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN.

Ambient Conditions:

Temperature:	24 °C
Rel. Humidity:	40 %

Summary of Results

WiFi MAC Address: 001500BD5C54 DRTU Tool Version 1.6.1-628 Driver version 16.0.0.49

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120V/60Hz	Class B	Pass	56.3 dBµV @ 0.167 MHz (-8.8 dB)

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Intel	Job Number: J91968
Model: Intel Model 3160NGW Wireless Network Adapter	T-Log Number: J92301
	Account Manager: Christine Krebill
Contact: Steve Hackett	
Standard: FCC 15 B, 15.247, RSS 210	Class: B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

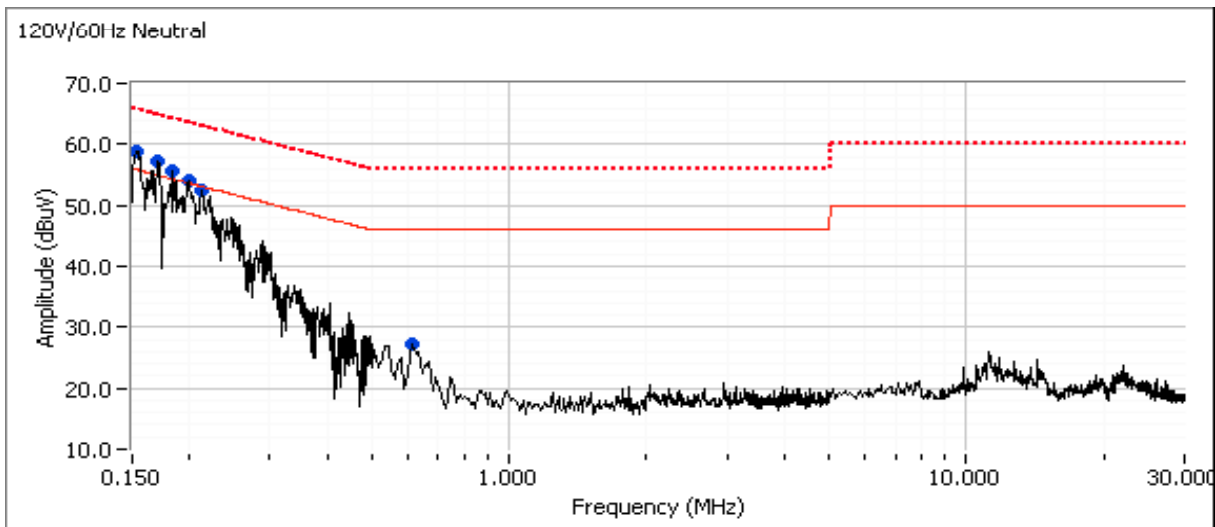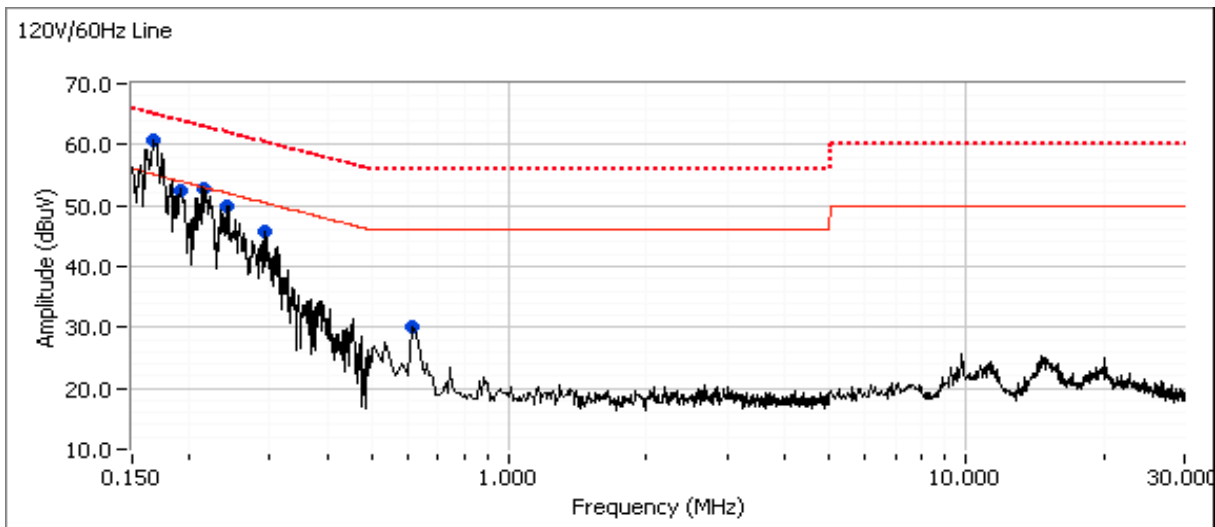



EMC Test Data

Client:	Intel	Job Number:	J91968
Model:	Intel Model 3160NGW Wireless Network Adapter	T-Log Number:	J92301
Contact:	Steve Hackett	Account Manager:	Christine Krebill
Standard:	FCC 15 B, 15.247, RSS 210	Class:	B

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.615	30.1	Line	46.0	-15.9	Peak	
0.167	60.9	Line	55.1	5.8	Peak	
0.192	52.5	Line	53.9	-1.4	Peak	
0.215	52.9	Line	53.0	-0.1	Peak	
0.244	50.0	Line	52.0	-2.0	Peak	
0.290	45.6	Line	50.4	-4.8	Peak	
0.622	27.1	Neutral	46.0	-18.9	Peak	
0.156	58.9	Neutral	55.8	3.1	Peak	
0.173	57.1	Neutral	54.9	2.2	Peak	
0.182	55.5	Neutral	54.3	1.2	Peak	
0.199	54.1	Neutral	53.6	0.5	Peak	
0.214	52.5	Neutral	53.1	-0.6	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.167	56.3	Line	65.1	-8.8	QP	QP (1.00s)
0.155	55.8	Neutral	65.7	-9.9	QP	QP (1.00s)
0.173	54.9	Neutral	64.8	-9.9	QP	QP (1.00s)
0.182	51.8	Neutral	64.4	-12.6	QP	QP (1.00s)
0.192	50.5	Line	63.9	-13.4	QP	QP (1.00s)
0.199	50.1	Neutral	63.7	-13.6	QP	QP (1.00s)
0.215	48.9	Line	63.0	-14.1	QP	QP (1.00s)
0.214	48.9	Neutral	63.0	-14.1	QP	QP (1.00s)
0.244	45.1	Line	62.0	-16.9	QP	QP (1.00s)
0.167	38.1	Line	55.1	-17.0	AVG	AVG (0.10s)
0.173	37.0	Neutral	54.8	-17.8	AVG	AVG (0.10s)
0.155	37.6	Neutral	55.7	-18.1	AVG	AVG (0.10s)
0.290	40.2	Line	60.5	-20.3	QP	QP (1.00s)
0.182	33.5	Neutral	54.4	-20.9	AVG	AVG (0.10s)
0.192	32.7	Line	53.9	-21.2	AVG	AVG (0.10s)
0.199	32.1	Neutral	53.7	-21.6	AVG	AVG (0.10s)
0.214	30.8	Neutral	53.0	-22.2	AVG	AVG (0.10s)
0.215	30.3	Line	53.0	-22.7	AVG	AVG (0.10s)
0.244	26.8	Line	52.0	-25.2	AVG	AVG (0.10s)
0.290	21.3	Line	50.5	-29.2	AVG	AVG (0.10s)
0.615	24.4	Line	56.0	-31.6	QP	QP (1.00s)
0.622	23.9	Neutral	56.0	-32.1	QP	QP (1.00s)
0.615	13.1	Line	46.0	-32.9	AVG	AVG (0.10s)
0.622	9.4	Neutral	46.0	-36.6	AVG	AVG (0.10s)

Appendix C Product Labeling Requirements

The following information has been provided to clarify notification, equipment labeling requirements and information that must be included in the operator's manual. These requirements may be found in the standards/regulations listed in the scope of this report.

Label Location

The required label(s) must be in a *conspicuous location* on the product, which is defined as any location readily visible to the user of the device without the use of tools.

Label Attachment

The label(s) must be *permanently attached* to the product, which is defined as attached such that it can normally be expected to remain fastened to the equipment during the equipment's expected useful life. A paper gum label will generally not meet this condition.

United States Class B Label

FCC ID: ABC1234567

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The FCC Identifier is comprised of the grantee code (in the example above **ABC**) that was assigned by the FCC plus a unique alpha-numeric specific to the product being certified. The ID must appear on the device.

If the device is too small or for such use that it is not practicable to place the US label statement on it, the statement shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed

Appendix D User Manual Regulatory Statements

Where special accessories, such as shielded cables, are required in order to meet the emission limits, appropriate instructions regarding the need to use such accessories must be contained on the first page of text concerned with the installation of the device in the operator's manual.

A requirement by FCC regulations, and recommended for all regulatory markets, is a cautionary statement to the end user that changes or modifications to the device not expressly approved by you, the manufacturer, could void their right to operate the equipment.

United States Class B Manual Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: Additional information about corrective measures may also be provided to the user at the company's option.

The FCC has indicated that the radio interference statement be bound in the same manner as the operator's manual. Thus, a loose-leaf insert page in a bound or center-spine and stapled manual would not meet this condition.

Appendix E Basic and Reference Standards

Subpart B of Part 15 of FCC Rules for digital devices.

FCC Part 15 Subpart B references the use of ANSI C63.4–2003: “*Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz*” for the purposes of evaluating the radiated and conducted emissions from digital devices.

End of Report

This page is intentionally blank and marks the last page of this test report.