

*EMC Test Report*

*Information Technology Equipment  
Class B Digital Device*

*FCC Part 15  
Industry Canada ICES-003, Issue 5*

*Model: 3160SDW*

IC CERTIFICATION #: 1000M-3160SD  
FCC ID: PD93160SD

APPLICANT: Intel Mobile Communications  
100 Center Point Circle Suite 200  
Columbia, SC 29210

TEST SITE(S): National Technical Systems - Silicon Valley  
41039 Boyce Road  
Fremont, CA. 94538-2435

REPORT DATE: January 23, 2014

FINAL TEST DATES: January 13 and 16, 2014


TOTAL NUMBER OF PAGES: 28

PROGRAM MGR /  
TECHNICAL REVIEWER:



Mark E Hill  
Staff Engineer

QUALITY ASSURANCE DELEGATE /  
FINAL REPORT PREPARER:

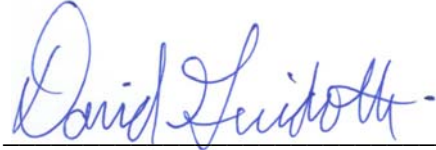

David Guidotti  
Senior Technical Writer



National Technical Systems - Silicon Valley is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

**REVISION HISTORY**

Rev#	Date	Comments	Modified By
-	01-23-2014	First release	

**TABLE OF CONTENTS**

**REVISION HISTORY .....2**  
**TABLE OF CONTENTS .....3**  
**SCOPE.....4**  
**OBJECTIVE .....4**  
**STATEMENT OF COMPLIANCE.....4**  
**DEVIATIONS FROM THE STANDARDS.....5**  
**INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS .....6**  
    CONDUCTED EMISSIONS (MAINS PORT) .....6  
    RADIATED EMISSIONS .....6  
**MEASUREMENT UNCERTAINTIES .....7**  
**EQUIPMENT UNDER TEST (EUT) DETAILS.....8**  
    GENERAL.....8  
    HIGHEST EUT INTERNAL SOURCE.....8  
    ENCLOSURE.....8  
    MODIFICATIONS .....8  
    SUPPORT EQUIPMENT .....9  
    EUT INTERFACE PORTS .....9  
    EUT OPERATION .....9  
**EMISSIONS TESTING .....10**  
    RADIATED AND CONDUCTED EMISSIONS .....10  
        RADIATED EMISSIONS CONSIDERATIONS .....10  
        CONDUCTED EMISSIONS CONSIDERATIONS .....10  
**EMISSIONS MEASUREMENT INSTRUMENTATION .....11**  
    RECEIVER SYSTEM .....11  
    INSTRUMENT CONTROL COMPUTER .....11  
    LINE IMPEDANCE STABILIZATION NETWORK (LISN).....11  
    IMPEDANCE STABILIZATION NETWORK (ISN) .....11  
    FILTERS/ATTENUATORS .....11  
    ANTENNAS.....12  
    ANTENNA MAST AND EQUIPMENT TURNTABLE.....12  
    INSTRUMENT CALIBRATION.....12  
**EMISSIONS TEST PROCEDURES .....13**  
    EUT AND CABLE PLACEMENT .....13  
    CONDUCTED EMISSIONS (MAINS) .....13  
    RADIATED EMISSIONS .....14  
        General .....14  
        Preliminary Scan.....14  
        Final Maximization.....15  
**SAMPLE CALCULATIONS .....16**  
    SAMPLE CALCULATIONS - CONDUCTED EMISSIONS .....16  
    SAMPLE CALCULATIONS - RADIATED EMISSIONS.....16  
**APPENDIX A TEST EQUIPMENT CALIBRATION DATA .....17**  
**APPENDIX B TEST DATA .....18**  
**END OF REPORT .....28**

**SCOPE**

Governments and standards organizations around the world have published requirements regarding the electromagnetic compatibility (EMC) of electronic equipment. Testing has been performed on the Intel Mobile Communications model 3160SDW, pursuant to the following standards.

Standard	Title	Standard Date
FCC Part 15, Subpart B	Radio Frequency Devices	October 2012 as Amended
ICES-003, Issue 5	Information Technology Equipment (ITE) – Limits and methods of measurement	August 2012

All measurements and evaluations have been in accordance with these specifications, test procedures, and measurement guidelines as outlined in National Technical Systems - Silicon Valley test procedures, and in accordance with the standards referenced therein.

**OBJECTIVE**

The objective of Intel Mobile Communications is to verify compliance with FCC and Canada's requirements for digital devices.

**STATEMENT OF COMPLIANCE**

The tested sample of Intel Mobile Communications model 3160SDW complied with the requirements of:

Standard/Regulation	Equipment Type/Class	Standard Date
Subpart B of Part 15 of the FCC Rules (CFR title 47)	Class B	2012 as amended
ICES-003, Issue 5	Class B	2012

As specified in Section 15.101 of FCC Part 15, unintentional radiators shall be authorized prior to the initiation of marketing. Based on the description of the EUT, the following criteria per Section 15.101 of FCC Part 15 were applied to the EUT:

Type of device	Equipment authorization required
Class B personal computers and peripherals	Declaration of Conformity or Certification [Certification was used]

The test results recorded herein are based on a single type test of the Intel Mobile Communications model 3160SDW and therefore apply only to the tested sample(s). The sample was selected and prepared by Steve Hackett of Intel Mobile Communications.

Maintenance of compliance is the responsibility of the company. Any modification of the product that could result in increased emissions or susceptibility should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different enclosure, different line filter or power supply, harnessing and/or interface cable changes, etc.).

***DEVIATIONS FROM THE STANDARDS***

No deviations were made from the published requirements listed in the scope of this report.

**INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS**

The following emissions tests were performed on the Intel Mobile Communications model 3160SDW. The measurements were extracted from the data recorded during testing and represent the highest-amplitude emissions relative to the specification limits. The complete test data is provided in the appendices of this report.

**CONDUCTED EMISSIONS (MAINS PORT)**

Frequency Range Operating Voltage	Standard/Section	Requirement	Measurement Margin	Status
0.15-30 MHz, 120 V, 60 Hz	FCC § 15.107(a) (Class B)	0.15-0.5 MHz: 66-56 dB $\mu$ V QP 56-46 dB $\mu$ V Av 0.5-5.0 MHz: 56 dB $\mu$ V QP 46 dB $\mu$ V Av 5.0-30.0 MHz: 60 dB $\mu$ V QP 50 dB $\mu$ V Av	49.0 dB $\mu$ V @ 0.264 MHz (-2.3 dB)	Complied

**RADIATED EMISSIONS**

Frequency Range	Standard/Section	Requirement	Measurement Margin	Status
30-1000 MHz	FCC §15.109(g) Class B	30-230 MHz, 30 dB $\mu$ V/m 230-1000 MHz, 37 dB $\mu$ V/m (10 m limit)	41.7 dB $\mu$ V/m @ 399.70 MHz (-4.3 dB)	Complied

**MEASUREMENT UNCERTAINTIES**

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below were calculated using the approach described in CISPR 16-4-2:2003 using a coverage factor of  $k=2$ , which gives a level of confidence of approximately 95%. The levels were found to be below levels of CISPR and therefore no adjustment of the data for measurement uncertainty is required.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
Conducted Emissions	dBuV or dBuA	150 kHz – 30 MHz	$\pm 2.2$ dB
Radiated Electric Field	dBuV/m	30-1000 MHz	$\pm 3.6$ dB
		1000-40,000 MHz	$\pm 6.0$ dB

**EQUIPMENT UNDER TEST (EUT) DETAILS****GENERAL**

The Intel Mobile Communications model 3160SDW is a wireless network adapter that is designed to be soldered down in host devices. For digital device testing for certification under equipment code JBP the card was installed in a test fixture external to the PC.

The sample was received on December 30, 2013 and tested on January 13 and 16, 2014. The EUT consisted of the following component(s):

Company	Model	Description	MAC Address:	FCC ID
Intel Mobile Communications	3160SDW	Wireless Network Adapter	001500E60B22	PD93160SD 1000M-3160SD

**HIGHEST EUT INTERNAL SOURCE**

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes. The highest internal source determines the frequency range of test for radiated emissions.

The highest internal source of the EUT was declared to be less than 108 MHz.

Based on the declared highest internal source, the upper frequency range of measurement for the current project were:

**FCC Part 15, Subpart B**

Highest Internal Source (MHz)	Upper Frequency Range of Measurement (MHz)	Applicability
Below 1.705	30	
1.705 – 108	1000	X
108 – 500	2000	
500 – 1000	5000	

**ENCLOSURE**

The EUT has no enclosure. It is designed to be installed within the enclosure of a host computer.

**MODIFICATIONS**

No modifications were made to the EUT during the time the product was at National Technical Systems - Silicon Valley.



**SUPPORT EQUIPMENT**

The following equipment was used as local support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Dell	Latitude E5400	Laptop	Unmarked	N/A
Dell	LA90PS3-00	AC/DC Adapter	CN-0FR613-71615-7CO-0058	N/A
Intel	-	Test Fixture	-	-

The following equipment was used as remote support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Airlink	101	802.11g router	-	-

**EUT INTERFACE PORTS**

The I/O cabling configuration during testing was as follows:

Port		Cable(s)		
From	To	Description	Shielded/Unshielded	Length(m)
Ethernet (laptop)	Router	Cat 5	Unshielded	10
DC power (laptop)	External power supply	2 wire	Unshielded	2
AC input (power supply)	AC mains	2 wire	Unshielded	2
PCIe Internal Port	Test Fixture	Ribbon Cable	Unshielded (Shielded for radiated emissions)	0.8
EUT – RF ports (x2)	Antenna Fixture	coaxial (x2)	Shielded	0.2

**EUT OPERATION**

During emissions testing the digital interface to the EUT was active, the laptop was showing a scrolling H pattern and the peripheral interfaces were enabled and active.

**EMISSIONS TESTING****RADIATED AND CONDUCTED EMISSIONS**

Final test measurements were taken at the National Technical Systems - Silicon Valley Anechoic Chambers listed below. The test sites contain separate areas for radiated and conducted emissions testing. The sites conform to the requirements of ANSI C63.4: 2009 *American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* and CISPR 16-1-4:2007 - *Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Ancillary equipment Radiated disturbances*. They are registered with the VCCI and are on file with the FCC and Industry Canada.

Site	Registration Numbers			Location
	VCCI	FCC	Canada	
Chamber 4	A-0169	211948	IC 2845B-4	41039 Boyce Road Fremont, CA 94538-2435
Chamber 5		211948	IC 2845B-5	

**RADIATED EMISSIONS CONSIDERATIONS**

Radiated emissions measurements were made with the EUT powered from a supply voltage within the expected tolerances of each nominal operating voltage/frequency for each geographical regions covered by the scope of the standards referenced in this report.

**CONDUCTED EMISSIONS CONSIDERATIONS**

Conducted emissions tests are performed in conformance with ANSI C63.4 and Subpart B of Part 15 of FCC Rules for Digital Devices.

Mains port measurements are made with the EUT connected to the public power network through nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

## **EMISSIONS MEASUREMENT INSTRUMENTATION**

### **RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1-1:2006 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7 GHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000 MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

### **INSTRUMENT CONTROL COMPUTER**

Measurements are converted to the field strength at an antenna or voltage developed at the LISN (or ISN) measurement port, which is then compared directly with the appropriate specification limit under software control of the test receivers and spectrum analyzers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

### **LINE IMPEDANCE STABILIZATION NETWORK (LISN)**

Line conducted emission measurements utilize a fifty micro-Henry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250-uH CISPR adapter. This network provides for calibrated radio-frequency noise measurements by the design of the internal low-pass and high-pass filters on the EUT and measurement ports, respectively.

### **IMPEDANCE STABILIZATION NETWORK (ISN)**

Telecommunication port conducted emission measurements utilize an Impedance Stabilization Network with a 150-ohm termination impedance and specific longitudinal conversion loss as the voltage monitoring point. This network provides for calibrated radio-frequency noise measurements by the design of the internal circuitry on the EUT and measurement ports, respectively. For current measurements, a current probe with a uniform frequency response and less than 1-ohm insertion impedance is used.

### **FILTERS/ATTENUATORS**

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high-amplitude transient events.

### *ANTENNAS*

A bilog antenna or combination of biconical and log periodic antennas are used to cover the range from 30 MHz to 1000 MHz. Narrowband tuned dipole antennas may be used over the entire 30 to 1000 MHz frequency range for precision measurements of field strength. Above 1000 MHz, horn antennas are used. The antenna calibration factors are included in site factors that are programmed into the test receivers or data collection software.

### *ANTENNA MAST AND EQUIPMENT TURNTABLE*

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table-mounted devices shall be 80 centimeters. Floor-mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material up to 12-mm thick if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

### *INSTRUMENT CALIBRATION*

All test equipment is regularly checked to ensure that performance is maintained in accordance with the company's specifications. An appendix of this report contains the list of test equipment used and calibration information.

## ***EMISSIONS TEST PROCEDURES***

### ***EUT AND CABLE PLACEMENT***

The standards require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst-case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst-case orientation is used for final measurements.

### ***CONDUCTED EMISSIONS (MAINS)***

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest-amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak-mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord. Emissions that have peak values close to the specification limit are also measured in the quasi-peak and average detection modes to determine compliance except when the amplitude of the emission when measured with the quasi-peak detector is more than 10 dB below the specification limit for average measurements. In this case only quasi-peak measurements are performed.

**RADIATED EMISSIONS**

## General

FCC Part 15 references the test methods of ANSI C63.4-2003 (American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz) for emissions measurements. However FCC Public Notice DA 09-2478 (released on November 25, 2009) clarifies measurements made to determine compliance may be performed using the test methods of either the 2003 or 2009 version of the ANSI C63.4 document.

For the current project, the test methods of ANSI C63.4-2009 were used. As the two versions of ANSI C63.4 specify different usage of floor absorbers during radiated emissions testing, the table below has been included for clarification:

Frequency Range	ANSI C63.4-2003	ANSI C63.4-2009
30-1000 MHz	No floor absorbers used	No floor absorbers used
Above 1000 MHz	No floor absorbers used	"Free space" test environment with floor absorbers placed between antenna and EUT in accordance with CISPR 16-1-4

Radiated emissions measurements are performed in two phases, preliminary scan and final maximization.

## Preliminary Scan

A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one or more of these with the antenna polarized vertically and one or more of these are performed with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied as necessary to determine the highest emission relative to the limit.

Note that for the frequency range of 1-6 GHz in the "free space" test environment, CISPR 22 allows the antenna to be set at fixed height equal to the center height of the EUT, except for cases where additional scans are necessary with the antenna height adjusted up and down to ensure the measurement antenna illuminates the entire height of the EUT. However, in cases where a single "free space" test is performed in the 1-6 GHz frequency to simultaneously meet the requirements of FCC Part 15 (ANSI C63.4-2009 test methods) and CISPR 22, the antenna height is by default varied since required by ANSI C63.4.

In the frequency range of 30-1000 MHz, a speaker (with demodulation) is provided in the receiver to aid in discriminating between EUT and ambient emissions if required. Other possible methods for discriminating between EUT and ambient emissions involve scanning with near-field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

## Final Maximization

During final maximization, the highest-amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth that results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions that have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

Final measurements in the frequency range of 30-1000 MHz are made using a quasi-peak detector and compared to the quasi-peak limit. Final measurements above 1 GHz are made using average and peak detectors and compared to the average and peak limits respectively.

When testing above 1 GHz, the receive antenna is restricted to a maximum height of 2.5 m. Maximum emissions are found within this restricted range because emission levels decrease over distance and as the antenna is raised above 2.5 m, the distance from the EUT increases. As a result of the increased measurement distance, at antenna heights above 2.5 m, lower emission levels are measured as compared to emissions levels measured at antenna heights at 2.5 m and below. Final measurements are captured at 3 meters test distance except in cases where a closer test distance is required due to noise-floor considerations of the test-and-measurement equipment.

For measurements above 1 GHz every effort is made to ensure the EUT remains within the cone of radiation of the measurement antenna (i.e. 3 dB beam-width of the antenna). This may include rotating the product and/or angling the measurement antenna.

**SAMPLE CALCULATIONS****SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form). The calculation is as follows:

$$R_r - S = M$$

where:

$$\begin{aligned} R_r &= \text{Receiver Reading in dBuV} \\ S &= \text{Specification Limit in dBuV} \\ M &= \text{Margin to Specification in +/- dB} \end{aligned}$$

**SAMPLE CALCULATIONS - RADIATED EMISSIONS**

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m / D_s)$$

where:

$$\begin{aligned} F_d &= \text{Distance Factor in dB} \\ D_m &= \text{Measurement Distance in meters} \\ D_s &= \text{Specification Distance in meters} \end{aligned}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$\begin{aligned} R_r &= \text{Receiver Reading in dBuV/m} \\ F_d &= \text{Distance Factor in dB} \\ R_c &= \text{Corrected Reading in dBuV/m} \\ L_s &= \text{Specification Limit in dBuV/m} \\ M &= \text{Margin in dB Relative to Spec} \end{aligned}$$



**Appendix A Test Equipment Calibration Data****Conducted Emissions - AC Power Ports, 13-Jan-14**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1401	5/15/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	6/8/2014
Fischer Custom Comm	LISN, 25A, 150kHz to 30MHz, 25 Amp,	FCC-LISN-50-25-2- 09	2001	4/4/2014

**Radiated Emissions (JBP), 30 - 1,000 MHz, 16-Jan-14**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Com-Power	Preamplifier, 30-1000 MHz	PA-103	1632	7/6/2014
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	2197	2/7/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-40 GHz	ESIB40 (1088.7490.40)	2493	1/18/2014

## *Appendix B Test Data*

T94177 Pages 19 - 27



## *EMC Test Data*

Client:	Intel Mobile Communications	Job Number:	J94122
Product:	3160SDW	T-Log Number:	T94177
		Project Manager:	Christine Krebill
Contact:	Steve Hackett	Project Coordinator:	-
Emissions Standard(s):	FCC Part 15, RSS-210	Class:	B
Immunity Standard(s):	-	Environment:	Radio

# **EMC Test Data**

For The

## **Intel Mobile Communications**

Product

**3160SDW**

Date of Last Test: 1/16/2014



# EMC Test Data

Client:	Intel Mobile Communications	Job Number:	J94122
Model:	3160SDW	T-Log Number:	T94177
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15, RSS-210	Project Coordinator:	-
		Class:	B

## Radiated Emissions

*(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)*

### Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/16/2014  
 Test Engineer: Mark Hill  
 Test Location: Fremont Chamber #5

Config. Used: 2  
 Config Change: Shielded ribbon cable  
 Host Unit Voltage 120V/60Hz

### General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing. Any remote support equipment was located outside the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, preliminary testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. Maximized testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

### Ambient Conditions:

Temperature: 22 °C  
 Rel. Humidity: 30 %

### Summary of Results (ANSI C63.4:2009)

Run #	Test Performed	Limit	Result	Margin
1	Radiated Emissions 30 - 1000 MHz, Preliminary	Class B	Eval	Refer to individual runs
2	Radiated Emissions 30 - 1000 MHz, Maximized	Class B	Pass	41.7 dBµV/m @ 399.70 MHz (-4.3 dB)

### Modifications Made During Testing

The following modifications were made to the EUT during testing in order to comply with the requirements of the standard:  
 The PCIe ribbon cable from the host laptop to the test fixture was shielded with aluminum foil to simulate installation of the EUT module into a typical host.

### Deviations From The Standard


No deviations were made from the requirements of the standard.

Client:	Intel Mobile Communications	Job Number:	J94122
Model:	3160SDW	T-Log Number:	T94177
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15, RSS-210	Project Coordinator:	-
		Class:	B

### Run #1: Preliminary Radiated Emissions, 30 - 1000 MHz

EUT is a PC peripheral, Host PC configured with two external peripheral devices of different I/O protocols, FCC H-Pattern running

Test Parameters for Preliminary Scan(s)			
Frequency Range (MHz)	Prescan Distance (meters)	Limit Distance (meters)	Extrapolation Factor (dB, applied to data)
30 - 1000	3	3	0.0

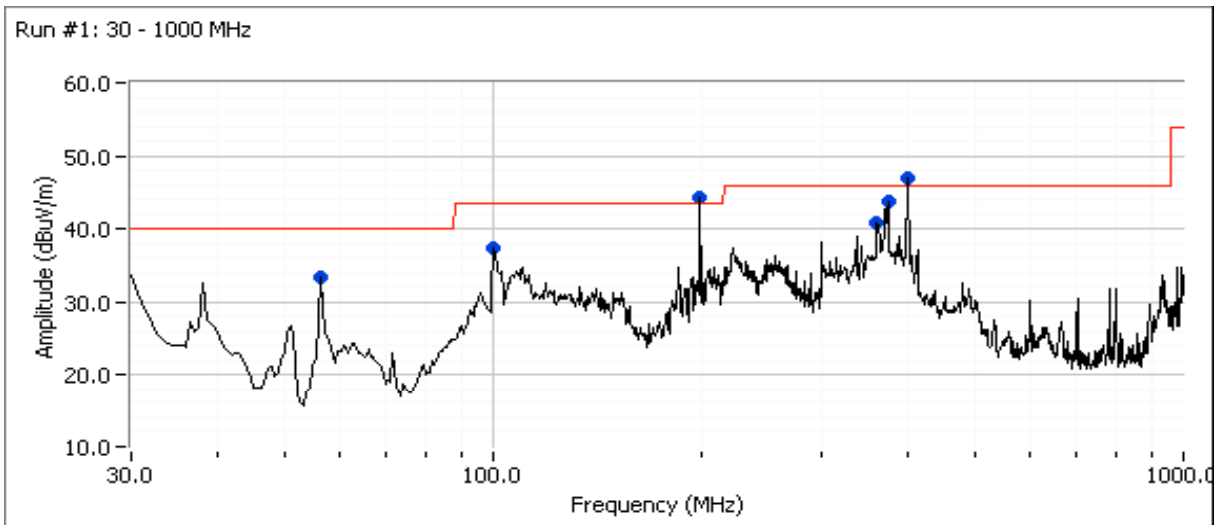

### Preliminary peak readings captured during pre-scan

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	FCC B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
399.203	47.0	H	46.0	1.0	Peak	107	3.0	
373.819	43.7	H	46.0	-2.3	Peak	84	1.0	
361.188	40.8	H	46.0	-5.2	Peak	89	1.0	
56.451	33.3	H	40.0	-6.7	Peak	167	4.0	
100.568	37.4	V	43.5	-6.1	Peak	291	1.0	
199.711	44.2	H	43.5	0.7	Peak	326	1.0	



# EMC Test Data

Client:	Intel Mobile Communications	Job Number:	J94122
Model:	3160SDW	T-Log Number:	T94177
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15, RSS-210	Project Coordinator:	-
		Class:	B

### Preliminary quasi-peak readings (no manipulation of EUT interface cables)

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	FCC B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
399.203	38.4	H	46.0	-7.6	QP	149	2.5	QP (1.00s)
372.300	32.9	H	46.0	-13.1	QP	75	1.0	QP (1.00s)
361.188	40.5	H	46.0	-5.5	QP	88	1.0	QP (1.00s)
199.711	36.0	H	43.5	-7.5	QP	276	1.5	QP (1.00s)
100.568	36.8	V	43.5	-6.7	QP	297	1.1	QP (1.00s)
56.451	32.1	H	40.0	-7.9	QP	166	4.0	QP (1.00s)

### Run #2: Maximized Readings From Run #1

Test Parameters for Maximized Reading(s)			
Frequency Range (MHz)	Test Distance (meters)	Limit Distance (meters)	Extrapolation Factor (dB, applied to data)
30 - 1000	3	3	0.0

### Maximized quasi-peak readings (includes manipulation of EUT interface cables)

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	FCC B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
<b>399.700</b>	<b>41.7</b>	H	46.0	<b>-4.3</b>	QP	149	2.5	QP (1.00s)
361.188	40.7	H	46.0	-5.3	QP	88	1.0	QP (1.00s)
100.568	36.8	V	43.5	-6.7	QP	297	1.1	QP (1.00s)
199.711	36.2	H	43.5	-7.3	QP	276	1.5	QP (1.00s)
56.451	32.1	H	40.0	-7.9	QP	166	4.0	QP (1.00s)
372.300	32.9	H	46.0	-13.1	QP	75	1.0	QP (1.00s)



# EMC Test Data

Client: Intel Mobile Communications	Job Number: J94122
Model: 3160SDW	T-Log Number: T94177
	Project Manager: Christine Krebill
Contact: Steve Hackett	Project Coordinator: -
Standard: FCC Part 15, RSS-210	Class: B

## Conducted Emissions (Digital Device) *(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)*

### Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/13/2014	Config. Used: 2
Test Engineer: Joseph Cadigal	Config Change: none
Test Location: FT Chamber#4	Host Voltage: 120V / 60Hz

### General Test Configuration

For tabletop equipment, the EUT host system was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

**Ambient Conditions:**

Temperature:	20 °C
Rel. Humidity:	38 %

### Summary of Results

MAC Address: 001500E60B22 DRTU Tool Version 1.7.4-855 Driver version 16.8.0.3

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120V/60Hz	Class B	Pass	49.0 dBµV @ 0.264 MHz (-2.3 dB)

### Modifications Made During Testing

No modifications were made to the EUT during testing

### Deviations From The Standard



No deviations were made from the requirements of the standard.



# EMC Test Data

Client: Intel Mobile Communications	Job Number: J94122
Model: 3160SDW	T-Log Number: T94177
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15, RSS-210	Project Coordinator: -
	Class: B

## Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

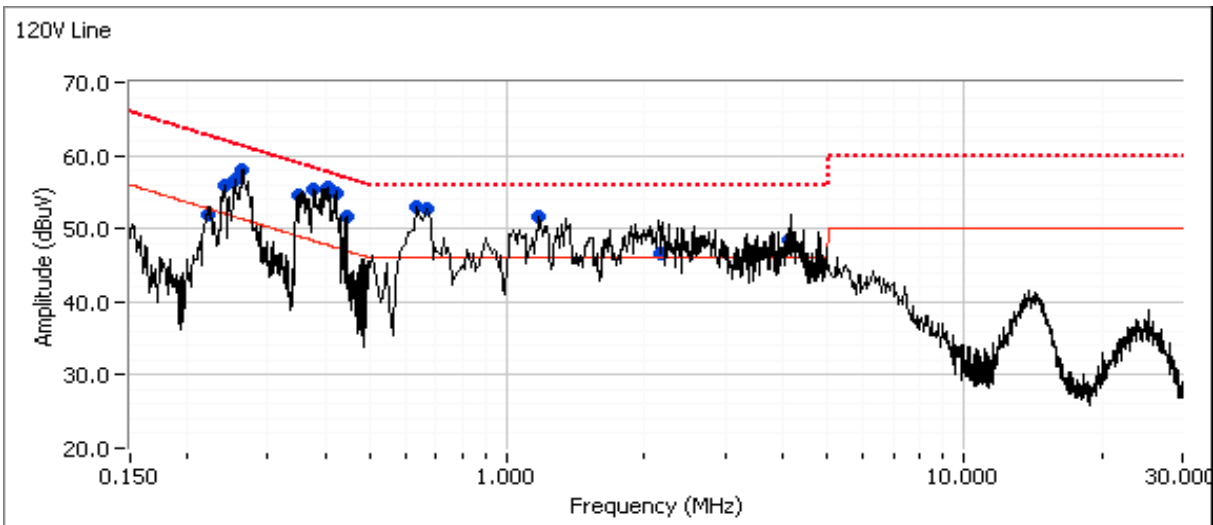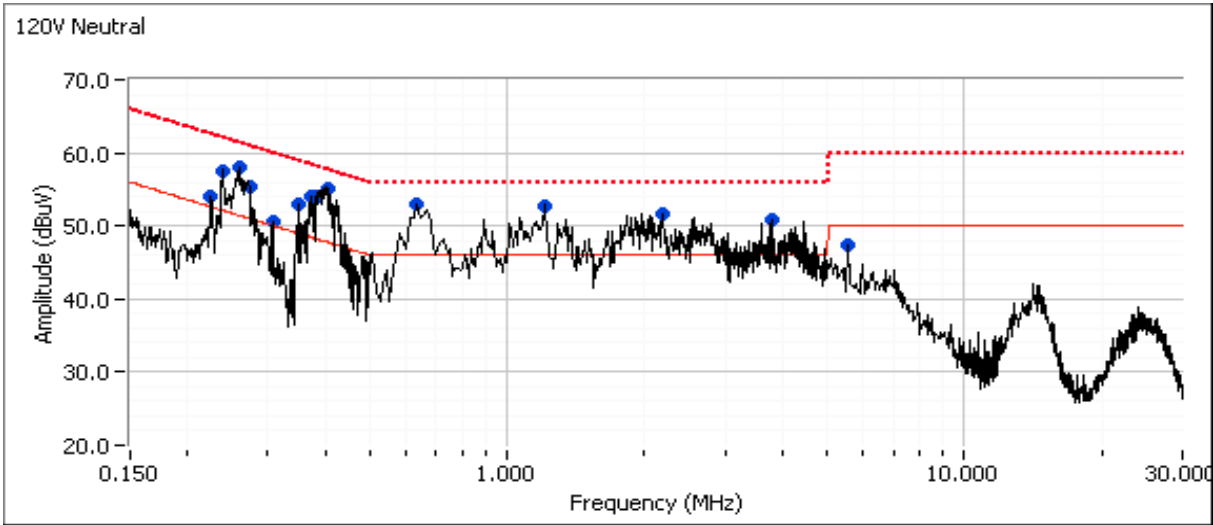





# EMC Test Data

Client:	Intel Mobile Communications	Job Number:	J94122
Model:	3160SDW	T-Log Number:	T94177
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15, RSS-210	Project Coordinator:	-
		Class:	B

**Preliminary peak readings captured during pre-scan (peak readings vs. average limit)**

Frequency MHz	Level dB $\mu$ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.260	57.9	Neutral	51.4	6.5	Peak	
0.238	57.5	Neutral	52.2	5.3	Peak	
0.273	55.3	Neutral	51.0	4.3	Peak	
0.404	55.2	Neutral	47.8	7.4	Peak	
0.386	54.1	Neutral	48.2	5.9	Peak	
0.350	53.1	Neutral	49.0	4.1	Peak	
0.372	54.0	Neutral	48.4	5.6	Peak	
0.225	54.1	Neutral	52.6	1.5	Peak	
0.307	50.5	Neutral	50.0	0.5	Peak	
0.640	52.9	Neutral	46.0	6.9	Peak	
1.205	52.7	Neutral	46.0	6.7	Peak	
2.191	51.6	Neutral	46.0	5.6	Peak	
3.789	50.9	Neutral	46.0	4.9	Peak	
0.264	58.0	Line 1	51.3	6.7	Peak	
0.254	56.7	Line 1	51.6	5.1	Peak	
0.241	55.9	Line 1	52.1	3.8	Peak	
0.222	51.9	Line 1	52.7	-0.8	Peak	
0.353	54.7	Line 1	48.9	5.8	Peak	
0.379	55.4	Line 1	48.3	7.1	Peak	
0.405	55.6	Line 1	47.7	7.9	Peak	
0.422	54.9	Line 1	47.4	7.5	Peak	
0.444	51.6	Line 1	47.0	4.6	Peak	
0.638	53.1	Line 1	46.0	7.1	Peak	
0.667	52.8	Line 1	46.0	6.8	Peak	
1.169	51.6	Line 1	46.0	5.6	Peak	
2.163	46.7	Line 1	46.0	0.7	Peak	
4.122	48.4	Line 1	46.0	2.4	Peak	



# EMC Test Data

Client:	Intel Mobile Communications	Job Number:	J94122
Model:	3160SDW	T-Log Number:	T94177
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15, RSS-210	Project Coordinator:	-
		Class:	B

## Final quasi-peak and average readings

Frequency MHz	Level dB $\mu$ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.264	49.0	Line 1	51.3	-2.3	AVG	AVG (0.10s)
0.405	44.3	Line 1	47.8	-3.5	AVG	AVG (0.10s)
0.405	54.3	Line 1	57.8	-3.5	QP	QP (1.00s)
0.259	47.9	Neutral	51.5	-3.6	AVG	AVG (0.10s)
0.404	44.2	Neutral	47.8	-3.6	AVG	AVG (0.10s)
0.404	53.9	Neutral	57.8	-3.9	QP	QP (1.00s)
0.386	53.6	Neutral	58.1	-4.5	QP	QP (1.00s)
0.667	41.1	Line 1	46.0	-4.9	AVG	AVG (0.10s)
0.379	53.2	Line 1	58.3	-5.1	QP	QP (1.00s)
0.422	52.3	Line 1	57.4	-5.1	QP	QP (1.00s)
0.386	42.8	Neutral	48.1	-5.3	AVG	AVG (0.10s)
0.264	56.0	Line 1	61.3	-5.3	QP	QP (1.00s)
0.254	46.0	Line 1	51.6	-5.6	AVG	AVG (0.10s)
0.254	56.0	Line 1	61.6	-5.6	QP	QP (1.00s)
0.638	50.4	Line 1	56.0	-5.6	QP	QP (1.00s)
0.259	55.6	Neutral	61.5	-5.9	QP	QP (1.00s)
0.353	53.0	Line 1	58.9	-5.9	QP	QP (1.00s)
0.372	52.3	Neutral	58.5	-6.2	QP	QP (1.00s)
0.667	49.8	Line 1	56.0	-6.2	QP	QP (1.00s)
0.640	49.5	Neutral	56.0	-6.5	QP	QP (1.00s)
0.379	41.3	Line 1	48.3	-7.0	AVG	AVG (0.10s)
0.241	55.0	Line 1	62.1	-7.1	QP	QP (1.00s)
1.205	48.8	Neutral	56.0	-7.2	QP	QP (1.00s)
0.422	39.9	Line 1	47.4	-7.5	AVG	AVG (0.10s)
0.638	38.5	Line 1	46.0	-7.5	AVG	AVG (0.10s)
1.205	38.3	Neutral	46.0	-7.7	AVG	AVG (0.10s)
0.273	43.2	Neutral	51.0	-7.8	AVG	AVG (0.10s)
2.191	48.2	Neutral	56.0	-7.8	QP	QP (1.00s)
2.191	38.1	Neutral	46.0	-7.9	AVG	AVG (0.10s)
0.273	52.7	Neutral	61.0	-8.3	QP	QP (1.00s)
0.238	53.8	Neutral	62.2	-8.4	QP	QP (1.00s)
1.169	47.6	Line 1	56.0	-8.4	QP	QP (1.00s)
0.350	50.5	Neutral	59.0	-8.5	QP	QP (1.00s)
0.640	37.3	Neutral	46.0	-8.7	AVG	AVG (0.10s)
0.241	43.2	Line 1	52.1	-8.9	AVG	AVG (0.10s)
0.372	39.3	Neutral	48.5	-9.2	AVG	AVG (0.10s)
2.163	36.3	Line 1	46.0	-9.7	AVG	AVG (0.10s)
1.169	35.9	Line 1	46.0	-10.1	AVG	AVG (0.10s)



# EMC Test Data

Client:	Intel Mobile Communications	Job Number:	J94122
Model:	3160SDW	T-Log Number:	T94177
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15, RSS-210	Project Coordinator:	-
		Class:	B

4.122	35.8	Line 1	46.0	-10.2	AVG	AVG (0.10s)
0.238	41.9	Neutral	52.2	-10.3	AVG	AVG (0.10s)
0.444	46.3	Line 1	57.0	-10.7	QP	QP (1.00s)
2.163	45.3	Line 1	56.0	-10.7	QP	QP (1.00s)
0.353	37.4	Line 1	48.9	-11.5	AVG	AVG (0.10s)
3.789	34.1	Neutral	46.0	-11.9	AVG	AVG (0.10s)
4.122	43.2	Line 1	56.0	-12.8	QP	QP (1.00s)
0.350	35.6	Neutral	49.0	-13.4	AVG	AVG (0.10s)
0.444	33.6	Line 1	47.0	-13.4	AVG	AVG (0.10s)
3.789	41.8	Neutral	56.0	-14.2	QP	QP (1.00s)
0.222	48.4	Line 1	62.7	-14.3	QP	QP (1.00s)
0.225	47.7	Neutral	62.6	-14.9	QP	QP (1.00s)
0.222	36.1	Line 1	52.7	-16.6	AVG	AVG (0.10s)
0.225	35.9	Neutral	52.6	-16.7	AVG	AVG (0.10s)
0.307	43.4	Neutral	60.1	-16.7	QP	QP (1.00s)
0.307	30.8	Neutral	50.1	-19.3	AVG	AVG (0.10s)

*End of Report*

This page is intentionally blank and marks the last page of this test report.