



Modular Approval
Test Report
And Application for Grant of Equipment Authorization

TEST REPORT PERTAINING TO:

Equipment Under Test	Model Number(s)
Intel WiFi Link 5300	533AN_HMW

CONFIGURATION

IEEE 802.11a / 802.11b / 802.11g / 802.11n with a set of
Ethertronics & Wistron Neweb Corp. Antennas

MEASUREMENTS PERFORMED IN ACCORDANCE WITH THE FOLLOWING STANDARD (S)

Regulatory Standard(s)

47 CFR Part 15, Subpart C Section 15.247

Test Method:

ANSI C63.4: 2003 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



Certificate Number: 1111.01

PREPARED FOR:

Intel Corporation
2111 NE 25th Avenue
Hillsboro, Oregon 97124
Contact(s): Mr. Robert Paxman

PREPARED BY:

Aegis Labs, Inc.
8 Rancho Circle
Lake Forest, CA 92630
Agent(s): Mr. Rick Candelas
Mr. Johnny Candelas



Test Report #: INTEL-080317F

Test Report Revision: A3

	REPORT BODY	APPENDICES		TOTAL PAGES
		A	B	
PAGES	31	335	1	367

The contents of this report shall not be reproduced except in full, without the written approval of Aegis Labs, Inc.
The Intel logo is used for identification purposes only and is a registered trademark of Intel Corporation



TABLE OF CONTENTS

SECTION	TITLE	PAGE
	COVER SHEET.....	01
	TABLE OF CONTENTS.....	02
1.0	REGULATORY COMPLIANCE GUIDELINES.....	03
1.1	Guidelines For Testing To Emissions Standards.....	03
2.0	SUMMARY OF REGULATORY LIMITS.....	04
3.0	ADMINISTRATIVE DATA AND TEST DESCRIPTION.....	25
4.0	DESCRIPTION OF EUT CONFIGURATION.....	26
4.1	EUT Description	26
4.2	EUT Configuration.....	27
4.3	List of EUT Sub-Assemblies and Host Equipment.....	27
4.4	I/O Cabling Diagram and Description	28
4.5	EMC Test Hardware and Software Measurement Equipment.....	29
5.0	CONDITIONS DURING EMISSIONS MEASUREMENTS.....	30
5.1	General.....	30
5.2	Conducted Emissions Test Setup.....	30
5.3	Radiated Emissions Test Setup.....	31

APPENDICES

A	Test Data
B	Modifications And Recommendations



1.0 REGULATORY COMPLIANCE GUIDELINES

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual. Testing and engineering functions provided by Aegis Labs were furnished by RF technicians and engineers with accredited qualifications and training credentials to carry out their duties.

The object of this report was to publish verifiable test results of an EUT subjected to the tests outlined in the standard listed on the cover page of this report.

1.1 Guidelines For Testing To Emissions Standards

This standard for EMC emission requirements apply to electrical equipment for Information Technology Equipment (ITE). Compliance to these standards and in combination with the other standards listed in this test report can be used to demonstrate presumption of compliance with the protection requirements of the appropriate agency standard.

The purpose of this standard is to specify minimum requirements for emissions regarding electromagnetic compatibility (EMC) and protect the radio frequency spectrum 9 kHz. – 400 GHz. from unwanted interference generated from electrical/digital systems that intentionally or unintentionally generated RF energy. The emissions standards, normative documents and/or publications were used to conduct all tests performed on the equipment herein referred to as “Equipment Under Test”.



2.0 SUMMARY OF TEST RESULTS

802.11a Mode (5745-5825 MHz) Chain A

EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5745 MHz = 16.50 MHz 5785 MHz = 16.50 MHz 5825 MHz = 16.58 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5745 MHz = 24.04 dBm = 253.73 mW 5785 MHz = 24.04 dBm = 253.73 mW 5825 MHz = 23.94 dBm = 247.95 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5745 MHz = -8.50 dB 5785 MHz = -9.50 dB 5825 MHz = -9.17 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11a Mode (5745-5825 MHz) Chain B

EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5745 MHz = 16.00 MHz 5785 MHz = 16.50 MHz 5825 MHz = 16.58 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5745 MHz = 24.34 dBm = 271.87 mW 5785 MHz = 24.34 dBm = 271.87 mW 5825 MHz = 24.44 dBm = 278.20 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5745 MHz = -9.00 dB 5785 MHz = -8.83 dB 5825 MHz = -9.33 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11a Mode (5745-5825 MHz) Chain C

EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5745 MHz = 16.50 MHz 5785 MHz = 16.50 MHz 5825 MHz = 16.58 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5745 MHz = 24.44 dBm = 278.20 mW 5785 MHz = 24.54 dBm = 284.69 mW 5825 MHz = 24.34 dBm = 271.87 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5745 MHz = -8.17 dB 5785 MHz = -8.17 dB 5825 MHz = -8.67 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11b Mode (2400-2483.5 MHz) Chain A

EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 9.83 MHz 2437 MHz = 10.25 MHz 2462 MHz = 10.83 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 19.70 dBm = 93.33 mW 2437 MHz = 19.15 dBm = 82.22 mW 2462 MHz = 19.25 dBm = 84.14 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -6.67 dB 2437 MHz = -7.33 dB 2462 MHz = -5.67 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11b Mode (2400-2483.5 MHz) Chain B

EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 9.92 MHz 2437 MHz = 10.25 MHz 2462 MHz = 10.25 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 19.60 dBm = 91.20 mW 2437 MHz = 19.50 dBm = 89.13 mW 2462 MHz = 19.30 dBm = 85.11 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -8.50 dB 2437 MHz = -7.00 dB 2462 MHz = -8.83 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11b Mode (2400-2483.5 MHz) Chain C

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 10.17 MHz 2437 MHz = 10.17 MHz 2462 MHz = 10.25 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 19.10 dBm = 81.28 mW 2437 MHz = 19.50 dBm = 89.13 mW 2462 MHz = 19.50 dBm = 89.13 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -9.33 dB 2437 MHz = -7.33 dB 2462 MHz = -8.50 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

2.0 Summary of Test Results (Continued)

802.11g Mode (2400-2483.5 MHz) Chain A

EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 16.42 MHz 2437 MHz = 16.50 MHz 2462 MHz = 16.50 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 21.44 dBm = 139.43 mW 2437 MHz = 23.74 dBm = 236.79 mW 2462 MHz = 21.34 dBm = 136.26 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -9.50 dB 2437 MHz = -8.00 dB 2462 MHz = -10.17 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11g Mode (2400-2483.5 MHz) Chain B

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 16.42 MHz 2437 MHz = 16.50 MHz 2462 MHz = 16.50 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 21.24 dBm = 133.16 mW 2437 MHz = 23.74 dBm = 236.79 mW 2462 MHz = 21.14 dBm = 130.13 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -11.17 dB 2437 MHz = -8.33 dB 2462 MHz = -11.17 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11g Mode (2400-2483.5 MHz) Chain C

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 16.50 MHz 2437 MHz = 16.50 MHz 2462 MHz = 16.50 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 21.04 dBm = 127.16 mW 2437 MHz = 23.84 dBm = 242.31 mW 2462 MHz = 21.04 dBm = 127.16 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -10.50 dB 2437 MHz = -8.67 dB 2462 MHz = -10.83 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

2.0 Summary of Test Results (Continued)

802.11n Mode 20MHz Wide (2400-2483.5 MHz) Chain A

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 17.42 MHz 2437 MHz = 17.75 MHz 2462 MHz = 17.58 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 21.04 dBm = 127.16 mW 2437 MHz = 23.84 dBm = 242.31 mW 2462 MHz = 20.94 dBm = 124.27 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -10.33 dB 2437 MHz = -8.17 dB 2462 MHz = -10.67 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11n Mode 20MHz Wide (2400-2483.5 MHz) Chain B

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 17.42 MHz 2437 MHz = 17.75 MHz 2462 MHz = 17.58 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 20.94 dBm = 124.27 mW 2437 MHz = 23.54 dBm = 226.13 mW 2462 MHz = 21.04 dBm = 127.16 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -10.83 dB 2437 MHz = -8.17 dB 2462 MHz = -11.00 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11n Mode 20MHz Wide (2400-2483.5 MHz) Chain C

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 17.67 MHz 2437 MHz = 17.75 MHz 2462 MHz = 17.58 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 21.24 dBm = 133.16 mW 2437 MHz = 23.74 dBm = 236.79 mW 2462 MHz = 21.24 dBm = 133.16 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -10.50 dB 2437 MHz = -8.67 dB 2462 MHz = -10.83 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11n Mode 40MHz Wide (2400-2483.5 MHz) Chain A

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2422 MHz = 36.25 MHz 2437 MHz = 36.00 MHz 2452 MHz = 36.25 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2422 MHz = 22.54 dBm = 179.62 mW 2437 MHz = 22.64 dBm = 183.81 mW 2452 MHz = 22.54 dBm = 179.62 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2422 MHz = -14.50 dB 2437 MHz = -13.00 dB 2452 MHz = -14.67 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11n Mode 40MHz Wide (2400-2483.5 MHz) Chain B

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2422 MHz = 35.75 MHz 2437 MHz = 35.75 MHz 2452 MHz = 35.92 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2422 MHz = 23.04 dBm = 201.54 mW 2437 MHz = 22.94 dBm = 196.95 mW 2452 MHz = 22.84 dBm = 192.47 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2422 MHz = -13.50 dB 2437 MHz = -9.33 dB 2452 MHz = -14.33 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11n Mode 40MHz Wide (2400-2483.5 MHz) Chain C

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2422 MHz = 36.17 MHz 2437 MHz = 35.67 MHz 2452 MHz = 35.83 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2422 MHz = 22.94 dBm = 196.95 mW 2437 MHz = 22.74 dBm = 188.09 mW 2452 MHz = 23.04 dBm = 201.54 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2422 MHz = -14.17 dB 2437 MHz = -12.83 dB 2452 MHz = -14.00 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11n Mode 20MHz Wide (5745-5825 MHz) Chain A

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5745 MHz = 17.33 MHz 5785 MHz = 17.33 MHz 5825 MHz = 17.75 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5745 MHz = 23.94 dBm = 247.95 mW 5785 MHz = 23.99 dBm = 250.82 mW 5825 MHz = 23.94 dBm = 247.95 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5745 MHz = -8.83 dB 5785 MHz = -8.83 dB 5825 MHz = -9.00 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11n Mode 20MHz Wide (5745-5825 MHz) Chain B

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5745 MHz = 17.75 MHz 5785 MHz = 17.75 MHz 5825 MHz = 17.75 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5745 MHz = 24.54 dBm = 284.69 mW 5785 MHz = 24.64 dBm = 291.32 mW 5825 MHz = 24.44 dBm = 278.20 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5745 MHz = -8.67 dB 5785 MHz = -8.83 dB 5825 MHz = -9.00 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11n Mode 20MHz Wide (5745-5825 MHz) Chain C

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5745 MHz = 17.75 MHz 5785 MHz = 17.75 MHz 5825 MHz = 17.75 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5745 MHz = 24.34 dBm = 271.87 mW 5785 MHz = 24.44 dBm = 278.20 mW 5825 MHz = 24.04 dBm = 253.73 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5745 MHz = -8.67 dB 5785 MHz = -8.67 dB 5825 MHz = -9.17 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11n Mode 40MHz Wide (5745-5825 MHz) Chain A

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5755 MHz = 35.83 MHz 5795 MHz = 35.58 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5755 MHz = 24.10 dBm = 256.91 mW 5795 MHz = 24.15 dBm = 259.88 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5755 MHz = -9.67 dB 5795 MHz = -10.00 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11n Mode 40MHz Wide (5745-5825 MHz) Chain B

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5755 MHz = 36.00 MHz 5795 MHz = 35.75 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5755 MHz = 24.77 dBm = 299.76 mW 5795 MHz = 24.64 dBm = 290.92 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5755 MHz = -10.33 dB 5795 MHz = -10.67 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	



2.0 Summary of Test Results (Continued)

802.11n Mode 40MHz Wide (5745-5825 MHz) Chain C


EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5755 MHz = 35.25 MHz 5795 MHz = 35.33 MHz
15.247(b)(3)	The maximum peak output power of the intentional radiator shall not exceed 1 watt. The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5755 MHz = 24.41 dBm = 275.91 mW 5795 MHz = 24.43 dBm = 277.19 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5755 MHz = -10.50 dB 5795 MHz = -10.67 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets
15.209	Radiated Emissions (30-1000 MHz)	PASSED	(Appendix A)

ANALYSIS AND CONCLUSIONS


Based upon the measurement results we find that this equipment is within the limits of the global standards listed on the cover page of this test report. All results are based on a test of one sample. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

Approval Signatories

Test and Report Completed By:


Johnny Candelas **06/06/08**
 Test Technician **Date:**
 Aegis Labs, Inc.

Report Approved By:


Rick Candelas **06/12/08**
 Quality Assurance & EMC Lab Manager **Date:**
 Aegis Labs, Inc.



3.0 ADMINISTRATIVE DATA AND TEST DESCRIPTION

DEVICE TESTED:	ITE Type: Intel WiFi Link 5300 Model Number(s): 533AN_HMW Serial Number: 0016EA038A16 FCC ID: PD9533ANH
DATE EUT RECEIVED:	March 17 th , 2008
TEST DATE(S):	March 17 th – June 6 th , 2008
ORIGIN OF TEST SAMPLE(S):	Production
EQUIPMENT CLASS:	EUT tested as CLASS B device
RESPONSIBLE PARTY:	Intel Corporation 2111 NE 25 th Avenue Hillsboro, Oregon 97124
CLIENT CONTACT:	Mr. Robert Paxman
MANUFACTURER:	Intel Corporation
TEST LOCATION:	Aegis Labs, Inc. 32231 Trabuco Creek Road Trabuco Canyon, CA 92678 Open Area Test Site #1 & #2
ACCREDITATION CERTIFICATE(S):	A2LA Certificate Number: 1111.01, Valid through June 30, 2008
PURPOSE OF TEST:	To demonstrate compliance with the standards as described in Sections 1.0 & 2.0 of this report.
UNCERTAINTY BUDGET:	Proficiency Testing and Uncertainty Calculations for all tests indicated in this report have been conducted in accordance with ISO 17025: 2005 requirements Section 5.4.6, and 5.9. Uncertainty Budgets and Proficiency Test results available upon request.
STATEMENT OF CALIBRATION:	All accredited equipment calibrations were performed by Liberty Labs, Inc. and World Cal. with typical calibration uncertainty estimates derived from ISO Guide to the determination of uncertainties with a Coverage Factor of k=2 for 95% level of confidence.

4.0 DESCRIPTION OF EUT CONFIGURATION

4.1 EUT Description

Equipment Under Test (EUT)		
Trade Name:	Intel WiFi Link 5300	
Model Number:	533AN_HMW	
Frequency Range:	802.11a = 5745 – 5825 MHz 802.11b/g = 2412 – 2462MHz 802.11n = 2412 – 2462MHz & 5745 – 5825 MHz	
Type of Transmission:	Direct Sequence Spread Spectrum	
Transfer Rate:	1/5.5/11 Mbps for 802.11b mode 6/36/54 Mbps for 802.11g and 802.11a modes Up to 450 Mbps for 802.11n mode	
Number of Channels:	802.11a mode (5725-5850 MHz) = 5 802.11b mode (2400-2483.5 MHz) = 11 802.11g mode (2400-2483.5 MHz) = 11 802.11n mode (5725-5850 MHz) = 5 802.11n mode (2400-2483.5 MHz) = 11	
Modulation Type:	DBPSK, DQPSK, CCK, OFDM	
Antenna Type:	<u>Ethertronics Antennas:</u> Magnetic Dipole	<u>Wistron Neweb Corp Antennas:</u> PIFA
Antenna Gain (See Note 2):	5.00dBi @ 5 GHz / 3.00dBi @ 2.4 GHz	4.87dBi @ 5 GHz / 4.96dBi @ 2.4 GHz
Transmit Output Power:	Please see Appendix A (Data Sheets) for actual output power.	
Power Supply:	3.3VDC from external source	
Number of External Test Ports Exercised:	3 Antenna Ports (Chain A, B, & C)	

The Intel WiFi Link 5300 is an embedded IEEE 802.11a/b/g/n wireless network adapter that operates in the 2.4 GHz and 5.0 GHz spectrum. The adapter is capable of delivering up to 450 Mbps Tx/Rx.

NOTE 1: For a more detailed description, please refer to the manufacture’s specifications or User’s Manual.

NOTE 2: The EUT was tested with a set of Ethertronics & Wistron NeWeb Corp. Antennas. (Refer to the antenna information exhibits).

4.2 EUT Configuration

The EUT was tested installed in the Mini PCI-E slot of an extender board which is then connected to the host computer. The EUT was then connected to a set of antennas via its Chain A, B, & C antenna ports. Data for a set of Ethertronics & Wistron NeWeb Corp. Antennas can be found in Appendix A (Data Sheets)

The low, middle, and high channels were tested in 802.11a, b, g, & n modes. Also, the EUT was tested once transmitting from each chain individually (Chain A, B, then C) and then tested with all chains transmitting simultaneously (Chain ABC). The EUT was placed in continuous transmit mode by a program provided by the manufacturer (*CRTU Version 5.0.51.0000*).

4.3 List of EUT, Sub-Assemblies and Host Equipment


Equipment Under Test			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Intel Corporation	Intel WiFi Link 5300	533AN_HMW	0016EA038A16

EUT Sub Assemblies			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Ethertronics	Chain A Antenna	MPCI01001	N/A
	Chain B Antenna	MPCI01001	N/A
	Chain C Antenna	MPCI01001	N/A
Wistron Neweb Corp.	Chain A Antenna	81.EBJ15.006	N/A
	Chain B Antenna	81.EBJ15.006	N/A
	Chain C Antenna	81.EBJ15.006	N/A

HOST EQUIPMENT LIST			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Generic	Host Laptop	ENG001	None
Protek	DC Power Source	3006B	AC2018
Logitech	Keyboard	Y-BF37	MCT25200581
Logitech	Mouse	M-BJ58	LNA22802012

NOTE: All the power cords of the above support equipment are standard and non-shielded.

4.4 I/O Cabling Diagram and Description

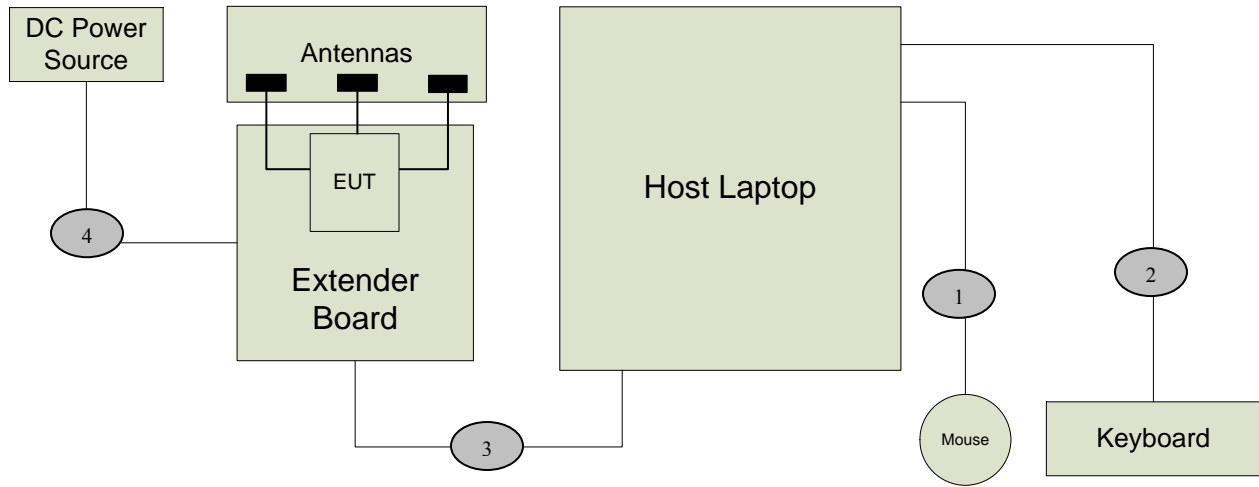

Signal Line Cable Description

Cable	Length	Construction	Source Connector	Destination Connector	Bundled Length	Ferrite Attached	Note
1	1.5m	Round, Braid & Foil Shielded	Host Computer: USB Port	Keyboard: Hardwired	N/A	N/A	N/A
2	1.5m	Round, Braid & Foil Shielded	Host Computer: USB Port	Mouse: Hardwired	N/A	N/A	N/A
3	0.5m	Flat, Braid & Foil Shielded	Extender Board: Mini PCIe slot	Host Laptop: Mini PCIe slot	N/A	N/A	N/A
4	0.5m	Round Un-shielded	Extender Board: Power Input	DC Power Source: Power Output	N/A	N/A	N/A



4.5 EMC Test Hardware and Software Measurement Equipment

TEST EQUIPMENT LIST - Emissions					
Equipment Name	Manufacturer	Model Number	Serial Number	Calibration Due Date	Maintenance Calibration Cycle
Spectrum Analyzer	Agilent	8565EC	3946A00245	07/24/08	1 Year
Antenna – Horn	ETS	3117	00057423	03/28/09	1 Year
Preamp	Miteq	JS42-01001800-25-10P	815980	09/21/08	1 Year
28 Foot Coax	Semflex	S1L29BFS1348	608	07/26/08	1 Year
2.4 GHz Notch Filter	Micro-Tronics	BRM50702-02	003	NCR	NCR
5.725-5.850 GHz Notch Filter	Microwave Circuits	N0257881	3173-01	NCR	NCR
Antenna - 18-26.5 GHz Pre-amplified Horn	Aegis Labs, Inc.	H042	SLK-35-3W	02/08/09	1 Year
Antenna - 26.5-40 GHz Pre-amplified Horn	Aegis Labs, Inc.	H028	GM1260-10	02/08/09	1 Year
EMI Receiver - RF Section	Hewlett Packard	8546A	3325A00137	04/26/09	1 Year
EMI Receiver - RF Filter Section	Hewlett Packard	85460A	3330A00138	04/26/09	1 Year
10 dB Attenuator	Pasternack	PE7014-10	N/A	09/05/08	1 Year
LISN (EUT)	Fisher Custom Communications	FCC-LISN-50-25-2	9931	03/30/09	1 Year
LISN (Access)	EMCO	3825/2	9108-1848	03/30/09	1 Year
Antenna - Biconical	EMCO	3110B	3383	03/20/09	1 Year
Antenna - Log Periodic	EMCO	3148	47943	03/20/09	1 Year
Power Meter	Anritsu	ML2487A	6K00001785	05/29/09	1 Year
Wide Bandwidth Sensor	Anritsu	MA2491A	31193	05/29/09	1 Year
12dB Attenuator	Narda	4779-12	203	06/09/08	1 Year
Temperature/Humidity Monitor	Dickson	TH550	7255185	04/13/09	1 Year

NCR – No Calibration Required.

5.0 CONDITIONS DURING EMISSIONS MEASUREMENTS

5.1 General

All measurements were made according to the procedures defined in or referred to by the standard listed on the cover page of this report. The measurements were made in the operating mode producing the largest emissions consistent with normal operation and connected to the minimum configuration of auxiliary devices.

5.2 Conducted Emissions Test Setup


The following was the test configuration.

EUT signal cables that hung closer than 40 cm to the horizontal metal ground plane were folded back and forth forming a bundle 30 cm to 40 cm long. The power cord of the EUT was also bundled in the center and plugged into one of the artificial mains network (AMN). All peripheral equipment was powered from a second AMN via a multiple outlet strip placed at a distance on 10cm from each other. The AMN and ISN were positioned 80cm from the EUT. Signal cables that were not connected to an AE were terminated using the correct termination. If applicable, the current probe was placed at 0.1 m from the ISN.

Peak, quasi-peak and/or average detectors were used for testing performed between 150 kHz and 30 MHz. A swept frequency scan was performed for both Line 1 and Line 2. The six highest readings were compared against the limit and recorded in the data sheet along with a snapshot image of the sweep scan. The graphical scans in Appendix A only reflect peak readings while the tabulated data sheets reflect peak, average, and/or quasi-peak measurements.

Climatic Conditions:

The EUT was tested within its intended operating and climatic conditions.

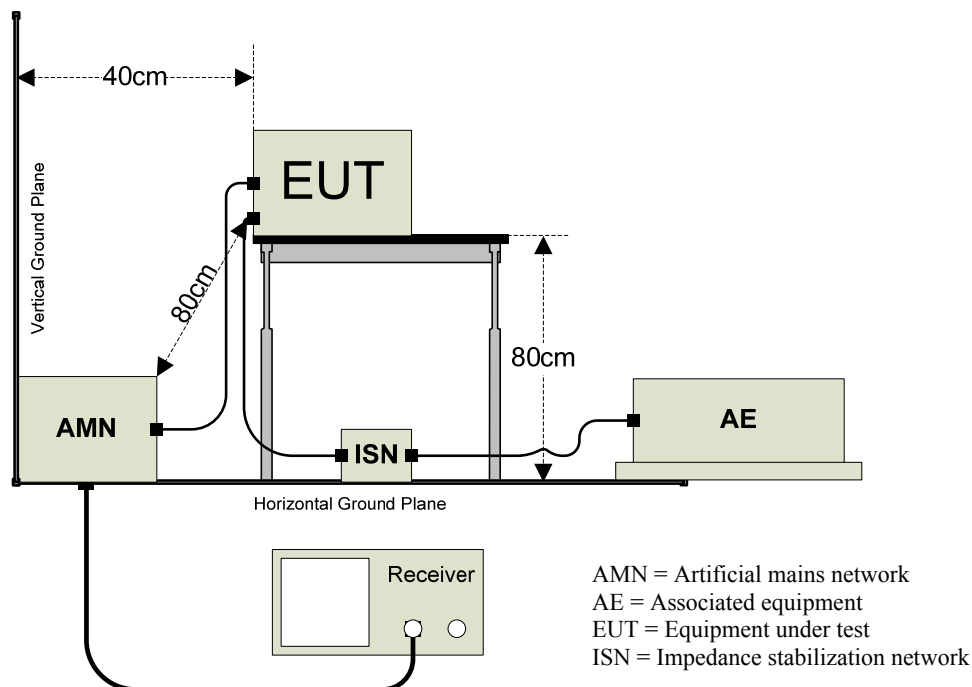


5.3 Radiated Emissions Test Setup

The Open Area Test Site (OATS) was used for radiated emission testing. The receiving (Rx) antenna(s) was placed 10m from the nearest side of the EUT facing the Rx antenna. The EUT (if floor-standing) was placed directly on the flush-mounted 360 degree rotating turntable. The EUT (if table-top) was placed directly on an 80cm high non-metallic table, and the table was placed on the rotating turntable. During the initial EMI scan, all the suspect frequencies, i.e.; harmonics, broadband signals were checked with the Rx broadband antennas in both vertical and horizontal polarities. The biconical Rx, log periodic Rx, and horn Rx antennas were used from 30MHz – 299.99MHz, 300MHz – 1000MHz, and 1GHz – 18GHz respectively.

Upon completion of all harmonic and broadband measurements, the balance of any remaining frequencies was checked between 30MHz – 18GHz. Any signals appearing within 20 dB of the classification limit was measured. Each signal was maximized by first rotating the turntable at least 360 degrees and recording the azimuth in the data sheet. Lastly, the Rx antenna was raised and/or lowered to maximize the signal elevation. If the measured signal was obtained using the peak detector and that signal appeared within 3 dB of the regulatory limit line, then the same signal was re-measured using the quasi-peak detector on the EMI receiver. Both meter readings if necessary were recorded on the data sheet.

Climatic Conditions:

The EUT was tested within its intended operating and climatic conditions.

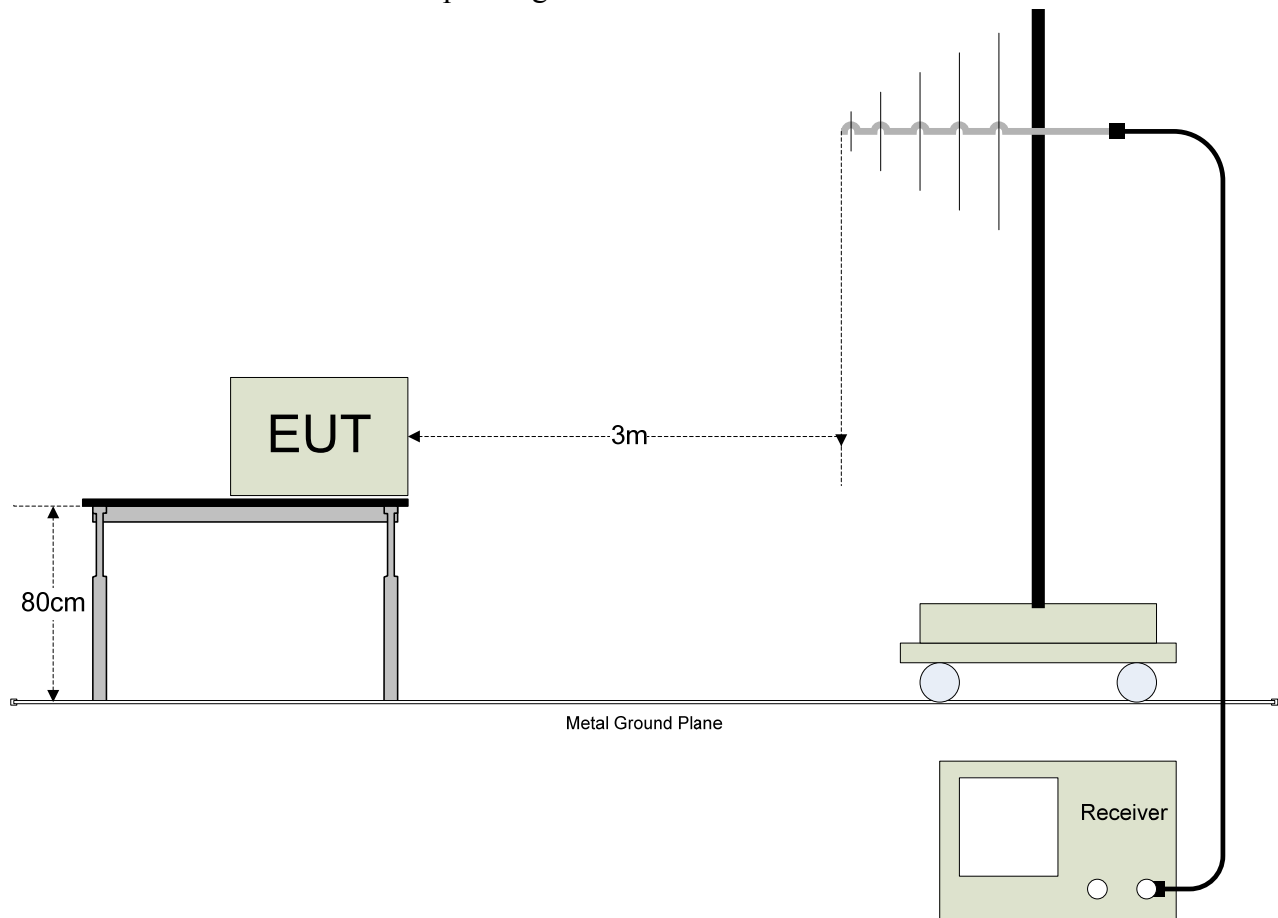



APPENDIX A

TEST DATA

**AC POWER PORT - CONDUCTED EMISSIONS TEST RESULTS**

CLIENT:	Intel Corporation	DATE:	04/02/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	RC
SERIAL NUMBER:	0016EA038A16	SITE #:	1
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot	TEMPERATURE:	22 deg. C
		HUMIDITY:	49%
		TIME:	2:15 PM

Description:	Conducted Power RF Emissions (150 kHz – 30 MHz)
Results:	PASSED LINE 1 and LINE 2 Limits
Note:	Conducted Emissions Measurements were performed on the EUT with the power supply set at the following voltage and frequency. <ul style="list-style-type: none">• 120VAC / 60 Hz

Conducted Limits		
Frequency (MHz)	Quasi-Peak Limit (dBuV)	Average Limit (dBuV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.




AC Power Port – Conducted Emissions Test Results (Continued)

Continuously Transmitting @ 120VAC/60Hz (INTEL-080317-63)

FCC CLASS B CONDUCTED EMISSIONS – LINE 1

Freq. (MHz)	Meter Reading (dBuV)	Detector (PK/QP/AV)	Average Limit (dBuV)	Average Delta(dB)	Quasi-Peak Limit (dBuV)	Quasi-Peak Delta(dB)
3.9000	35.33	PK	46.00	-10.67	56.00	-20.67
4.1300	34.16	PK	46.00	-11.84	56.00	-21.84
4.9600	36.25	PK	46.00	-9.75	56.00	-19.75
8.1800	42.32	PK	50.00	-7.68	60.00	-17.68
13.0000	39.30	PK	50.00	-10.70	60.00	-20.70
16.6200	39.65	PK	50.00	-10.35	60.00	-20.35

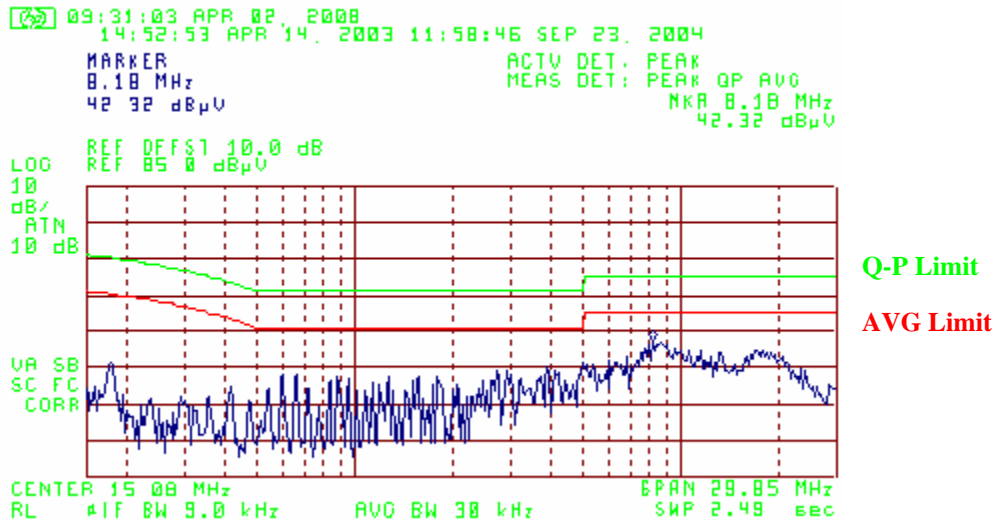




AC Power Port – Conducted Emissions Test Results (Continued)

Continuously Transmitting @ 120VAC/60Hz (INTEL-080317-63)

FCC CLASS B CONDUCTED EMISSIONS - LINE 2

Freq. (MHz)	Meter Reading (dBuV)	Detector (PK/QP/AV)	Average Limit (dBuV)	Average Delta(dB)	Quasi-Peak Limit (dBuV)	Quasi-Peak Delta(dB)
2.6600	30.92	PK	46.00	-15.08	56.00	-25.08
2.9700	31.51	PK	46.00	-14.49	56.00	-24.49
3.9000	31.39	PK	46.00	-14.61	56.00	-24.61
8.4300	42.36	PK	50.00	-7.64	60.00	-17.64
17.8300	40.07	PK	50.00	-9.93	60.00	-19.93
23.1500	34.23	PK	50.00	-15.77	60.00	-25.77

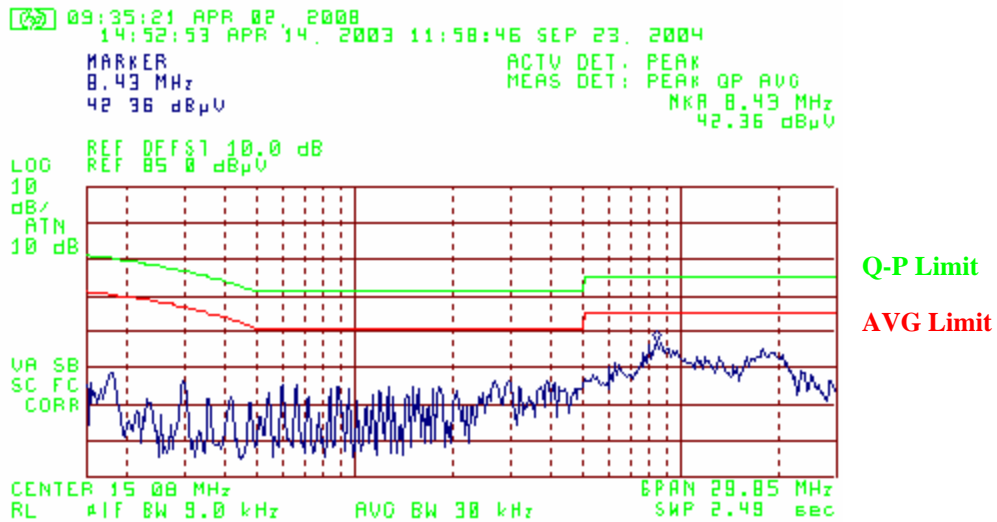



RADIATED EMISSIONS TEST RESULTS

CLIENT:	Intel Corporation	DATE:	04/02/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	RC
SERIAL NUMBER:	0016EA038A16	SITE #:	1
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot	TEMPERATURE:	22 deg. C
		HUMIDITY:	49%
		TIME:	2:15 PM

Description:	Radiated RF Emissions (30 MHz – 1000 MHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with the power supply set at the following voltage and frequency. <ul style="list-style-type: none">• 120VAC / 60 Hz.

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

Continuously Transmitting @ 120VAC/60Hz (INTEL-080317-64)

Horizontal Open Field Maximized Data											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>
48.02	8.58	400	45			2.65	10.32	10.46	32.01	40.00	-7.99
120.00	14.23	400	90	11.03	Q	2.39	11.20	10.46	35.08	43.50	-8.42
250.01	10.96	350	90			2.91	17.40	10.46	41.73	46.00	-4.27
305.09	11.32	300	270			3.07	14.49	10.46	39.33	46.00	-6.67
375.00	10.53	250	45			3.35	15.10	10.46	39.44	46.00	-6.57
386.00	11.63	225	45			3.39	15.54	10.46	41.02	46.00	-4.98

Vertical Open Field Maximized Data											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>
48.01	11.12	100	45			2.65	10.52	10.46	34.75	40.00	-5.25
119.98	18.40	100	90	14.65	Q	2.39	10.80	10.46	38.30	43.50	-5.20
250.03	8.51	100	45			2.91	18.30	10.46	40.18	46.00	-5.82
306.35	13.06	100	45			3.07	14.78	10.46	41.37	46.00	-4.63
358.01	7.94	100	0			3.27	15.44	10.46	37.11	46.00	-8.89
375.05	8.85	100	90			3.35	15.30	10.46	37.96	46.00	-8.04
386.01	15.71	100	180	13.62	Q	3.39	15.61	10.46	43.08	46.00	-2.92

**RADIATED EMISSIONS TEST RESULTS**

CLIENT:	Intel Corporation	DATE:	04/08/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	KN/RC
SERIAL NUMBER:	0016EA038A16	SITE #:	2
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot in 802.11a (5745-5825 MHz) mode.	TEMPERATURE:	22° C
		HUMIDITY:	39% RH
		TIME:	8:00 AM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11a mode (5745-5825 MHz)
Channels 149, 157, & 165
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5745.00	62.33	100	90			3.98	35.09	101.41			Ch. 149
5745.00				52.33	A	3.98	35.09	91.41			
5785.00	62.50	100	90			4.00	35.16	101.65			Ch. 157
5785.00				52.33	A	4.00	35.16	91.48			
5825.00	63.17	100	90			4.01	35.22	102.40			Ch. 165
5825.00				52.50	A	4.01	35.22	91.73			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5745.00	68.50	100	225			3.98	34.94	107.42			Ch. 149
5745.00				57.83	A	3.98	34.94	96.75			
5785.00	66.00	100	225			4.00	35.01	105.01			Ch. 157
5785.00				56.33	A	4.00	35.01	95.34			
5825.00	64.00	100	180			4.01	35.09	103.10			Ch. 165
5825.00				54.50	A	4.01	35.09	93.60			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5745-5825 MHz)
Channels 149 & 165
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	32.67	100	90		3.98	35.06	71.71	81.41	-9.70	Ch. 149
5850.00	31.33	100	90		4.02	35.26	70.61	82.40	-11.79	Ch. 165

RADIATED EMISSIONS - Vertical Antenna Polarization										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	36.33	100	225		3.98	34.91	75.21	87.42	-12.21	Ch. 149
5850.00	31.83	100	180		4.02	35.13	70.98	83.10	-12.12	Ch. 165

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11a mode (5745-5825 MHz)
Channels 149, 157, & 165
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5745.00	63.83	100	135			3.98	35.09	102.91			Ch. 149
5745.00				53.50	A	3.98	35.09	92.58			
5785.00	62.83	100	135			4.00	35.16	101.98			Ch. 157
5785.00				53.00	A	4.00	35.16	92.15			
5825.00	62.67	100	135			4.01	35.22	101.90			Ch. 165
5825.00				52.50	A	4.01	35.22	91.73			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5745.00	70.00	100	225			3.98	34.94	108.92			Ch. 149
5745.00				59.50	A	3.98	34.94	98.42			
5785.00	69.17	100	225			4.00	35.01	108.18			Ch. 157
5785.00				59.00	A	4.00	35.01	98.01			
5825.00	67.67	100	225			4.01	35.09	106.77			Ch. 165
5825.00				57.17	A	4.01	35.09	96.27			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5745-5825 MHz)
Channels 149 & 165
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5725.00	31.83	100	135		3.98	35.06	70.87	82.91	-12.04	Ch. 149
5850.00	30.83	100	135		4.02	35.26	70.11	81.90	-11.79	Ch. 165

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5725.00	35.00	100	225		3.98	34.91	73.88	88.92	-15.04	Ch. 149
5850.00	32.00	100	225		4.02	35.13	71.15	86.77	-15.62	Ch. 165

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = F_m - \Delta_m$$

Where

BE = Band Edge Field Strength

F_m = Measured Fundamental (Peak or Average)

Δ_m = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11a mode (5745-5825 MHz)
Channels 149, 157, & 165
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5745.00	68.67	100	180			3.98	35.09	107.75			Ch. 149
5745.00				58.50	A	3.98	35.09	97.58			
5785.00	70.00	100	180			4.00	35.16	109.15			Ch. 157
5785.00				59.00	A	4.00	35.16	98.15			
5825.00	68.50	100	180			4.01	35.22	107.73			Ch. 165
5825.00				58.50	A	4.01	35.22	97.73			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5745.00	65.00	100	315			3.98	34.94	103.92			Ch. 149
5745.00				55.00	A	3.98	34.94	93.92			
5785.00	64.50	100	315			4.00	35.01	103.51			Ch. 157
5785.00				54.67	A	4.00	35.01	93.68			
5825.00	63.50	100	315			4.01	35.09	102.60			Ch. 165
5825.00				52.67	A	4.01	35.09	91.77			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5745-5825 MHz)
Channels 149 & 165
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	34.17	100	180		3.98	35.06	73.21	87.75	-14.54	Ch. 149
5850.00	31.33	100	180		4.02	35.26	70.61	87.73	-17.12	Ch. 165

RADIATED EMISSIONS - Vertical Antenna Polarization										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	33.67	100	315		3.98	34.91	72.55	83.92	-11.37	Ch. 149
5850.00	32.67	100	315		4.02	35.13	71.82	82.60	-10.78	Ch. 165

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5745-5825 MHz)
 Channels 149, 157, & 165
 Continuous TX at Chain A, B, & C Antenna ports with Ethertronics Antennas
 Aegis Labs, Inc. File #: INTEL-080317-45*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +/-FAIL	Channel/ Chain Tested
3856.66	64.33	100	135			46.44	3.22	33.23	54.34	74.00	-19.66	Ch. 157/
3856.66				51.59	A	46.44	3.22	33.23	41.60	54.00	-12.40	A
7713.29	60.33	100	135			44.79	4.67	36.04	56.25	74.00	-17.75	
7713.29				45.50	A	44.79	4.67	36.04	41.42	54.00	-12.58	
11570.00	59.00	100	135			44.73	5.93	38.73	58.92	74.00	-15.08	
11570.00				44.71	A	44.73	5.93	38.73	44.63	54.00	-9.37	
3856.66	60.67	100	135			46.44	3.22	33.23	50.68	74.00	-23.32	Ch. 157/
3856.66				46.10	A	46.44	3.22	33.23	36.11	54.00	-17.89	B
7713.29	57.17	100	90			44.79	4.67	36.04	53.09	74.00	-20.91	
7713.29				44.30	A	44.79	4.67	36.04	40.22	54.00	-13.78	
11570.00	60.00	100	135			44.73	5.93	38.73	59.92	74.00	-14.08	
11570.00				45.29	A	44.73	5.93	38.73	45.21	54.00	-8.79	
3856.66	65.67	100	135			46.44	3.22	33.23	55.68	74.00	-18.32	Ch.157/
3856.66				52.42	A	46.44	3.22	33.23	42.43	54.00	-11.57	C
7713.29	51.83	100	135			44.79	4.67	36.04	47.75	74.00	-26.25	
7713.29				40.28	A	44.79	4.67	36.04	36.20	54.00	-17.80	
11570.00	54.50	100	270			44.73	5.93	38.73	54.42	74.00	-19.58	
11570.00				40.83	A	44.73	5.93	38.73	40.75	54.00	-13.25	
3830.00	53.50	100	135			46.47	3.23	33.20	43.46	74.00	-30.54	Ch. 149/
3830.00				43.73	A	46.47	3.23	33.20	33.69	54.00	-20.31	B
7660.00	53.33	100	135			44.85	4.65	36.03	49.17	74.00	-24.83	
7660.00				45.30	A	44.85	4.65	36.03	41.14	54.00	-12.86	
11490.00	52.50	100	180			44.61	5.90	38.68	52.48	74.00	-21.52	
11490.00				40.25	A	44.61	5.90	38.68	40.23	54.00	-13.77	
3883.33	53.17	100	135			46.42	3.22	33.26	43.23	74.00	-30.77	Ch.165/
3883.33				43.38	A	46.42	3.22	33.26	33.44	54.00	-20.56	B
7766.66	52.83	100	135			44.73	4.68	36.05	48.83	74.00	-25.17	
7766.66				41.77	A	44.73	4.68	36.05	37.77	54.00	-16.23	
11650.00	52.33	100	135			44.88	5.95	38.76	52.15	74.00	-21.85	
11650.00				40.00	A	44.88	5.95	38.76	39.82	54.00	-14.18	



Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/ Chain Tested
3856.66	53.00	100	90			46.44	3.22	33.26	43.04	74.00	-30.96	Ch. 157/
3856.66				42.99	A	46.44	3.22	33.26	33.03	54.00	-20.97	A
7713.32	53.17	100	45			44.79	4.67	36.14	49.19	74.00	-24.81	
7713.32				45.64	A	44.79	4.67	36.14	41.66	54.00	-12.34	
11570.00	53.67	100	135			44.73	5.93	38.50	53.36	74.00	-20.64	
11570.00				41.04	A	44.73	5.93	38.50	40.73	54.00	-13.27	
3856.66	53.67	100	90			46.44	3.22	33.26	43.71	74.00	-30.29	Ch. 157/
3856.66				46.08	A	46.44	3.22	33.26	36.12	54.00	-17.88	B
7713.32	53.00	100	45			44.79	4.67	36.14	49.02	74.00	-24.98	
7713.32				44.62	A	44.79	4.67	36.14	40.64	54.00	-13.36	
11570.00	58.33	100	135			44.73	5.93	38.50	58.02	74.00	-15.98	
11570.00				45.06	A	44.73	5.93	38.50	44.75	54.00	-9.25	
3856.66	53.00	100	90			46.44	3.22	33.26	43.04	74.00	-30.96	Ch.157/
3856.66				43.88	A	46.44	3.22	33.26	33.92	54.00	-20.08	C
7713.32	52.50	100	45			44.79	4.67	36.14	48.52	74.00	-25.48	
7713.32				43.03	A	44.79	4.67	36.14	39.05	54.00	-14.95	
11570.00	54.67	100	180			44.73	5.93	38.50	54.36	74.00	-19.64	
11570.00				42.27	A	44.73	5.93	38.50	41.96	54.00	-12.04	
3830.00	54.17	100	135			46.47	3.23	33.23	44.16	74.00	-29.84	Ch. 149/
3830.00				44.84	A	46.47	3.23	33.23	34.83	54.00	-19.17	B
7660.00	55.50	100	225			44.85	4.65	36.13	51.44	74.00	-22.56	
7660.00				49.46	A	44.85	4.65	36.13	45.40	54.00	-8.60	
11490.00	53.17	100	135			44.61	5.90	38.39	52.85	74.00	-21.15	
11490.00				40.89	A	44.61	5.90	38.39	40.57	54.00	-13.43	
3883.33	53.50	100	135			46.42	3.22	33.28	43.58	74.00	-30.42	Ch.165/
3883.33				43.10	A	46.42	3.22	33.28	33.18	54.00	-20.82	B
7766.66	56.17	100	225			44.73	4.68	36.15	52.27	74.00	-21.73	
7766.66				50.63	A	44.73	4.68	36.15	46.73	54.00	-7.27	
11650.00	58.33	100	135			44.88	5.95	38.61	58.00	74.00	-16.00	
11650.00				45.19	A	44.88	5.95	38.61	44.86	54.00	-9.14	



Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11a mode (5745-5825 MHz)
Channels 149, 157, & 165
Continuous TX at Chain A, B, & C Antenna ports with Wistron Neweb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-74

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/ Chain Tested
3856.66	59.33	100	135			46.53	2.58	32.71	48.09	74.00	-25.91	Ch. 157/
3856.66				47.51	A	46.53	2.58	32.71	36.27	54.00	-17.73	A
7713.32	56.17	100	45			44.86	3.70	34.96	49.97	74.00	-24.03	
7713.32				44.48	A	44.86	3.70	34.96	38.28	54.00	-15.72	
11570.00	60.17	100	45			44.95	4.65	36.90	56.77	74.00	-17.23	
11570.00				47.56	A	44.95	4.65	36.90	44.16	54.00	-9.84	
3856.66	59.33	100	45			46.53	2.58	32.71	48.09	74.00	-25.91	Ch. 157/
3856.66				50.42	A	46.53	2.58	32.71	39.18	54.00	-14.82	B
7713.32	56.33	100	270			44.86	3.70	34.96	50.13	74.00	-23.87	
7713.32				46.00	A	44.86	3.70	34.96	39.80	54.00	-14.20	
11570.00	63.67	100	315			44.95	4.65	36.90	60.27	74.00	-13.73	
11570.00				50.36	A	44.95	4.65	36.90	46.96	54.00	-7.04	
3856.66	59.00	100	270			46.53	2.58	32.71	47.76	74.00	-26.24	Ch.157/
3856.66				47.15	A	46.53	2.58	32.71	35.91	54.00	-18.09	C
7713.32	56.33	100	315			44.86	3.70	34.96	50.13	74.00	-23.87	
7713.32				44.78	A	44.86	3.70	34.96	38.58	54.00	-15.42	
11570.00	59.83	100	270			44.95	4.65	36.90	56.43	74.00	-17.57	
11570.00				47.29	A	44.95	4.65	36.90	43.89	54.00	-10.11	
3830.00	59.67	100	135			46.53	2.57	32.66	48.36	74.00	-25.64	Ch. 149/
3830.00				50.71	A	46.53	2.57	32.66	39.40	54.00	-14.60	B
7660.00	55.83	100	45			44.86	3.69	34.97	49.62	74.00	-24.38	
7660.00				44.48	A	44.86	3.69	34.97	38.27	54.00	-15.73	
11490.00	60.33	100	135			45.02	4.63	36.79	56.73	74.00	-17.27	
11490.00				47.46	A	45.02	4.63	36.79	43.86	54.00	-10.14	
3883.33	59.50	100	90			46.52	2.59	32.77	48.33	74.00	-25.67	Ch.165/
3883.33				48.29	A	46.52	2.59	32.77	37.12	54.00	-16.88	B
7766.66	56.50	100	90			44.86	3.72	34.95	50.30	74.00	-23.70	
7766.66				43.10	A	44.86	3.72	34.95	36.90	54.00	-17.10	
11650.00	61.83	100	315			44.86	4.66	37.01	58.64	74.00	-15.36	
11650.00				48.63	A	44.86	4.66	37.01	45.44	54.00	-8.56	



Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/ Chain Tested
3856.66	61.83	100	315			46.53	2.58	31.48	49.37	74.00	-24.63	Ch. 157/
3856.66				54.56	A	46.53	2.58	31.48	42.10	54.00	-11.90	A
7713.32	60.50	100	45			44.86	3.70	34.06	53.40	74.00	-20.60	
7713.32				54.59	A	44.86	3.70	34.06	47.49	54.00	-6.51	
11570.00	64.83	100	45			44.95	4.65	36.41	60.94	74.00	-13.06	
11570.00				51.68	A	44.95	4.65	36.41	47.79	54.00	-6.21	
3856.66	61.33	100	315			46.53	2.58	31.48	48.87	74.00	-25.13	Ch. 157/
3856.66				53.59	A	46.53	2.58	31.48	41.13	54.00	-12.87	B
7713.32	59.00	100	45			44.86	3.70	34.06	51.90	74.00	-22.10	
7713.32				51.46	A	44.86	3.70	34.06	44.36	54.00	-9.64	
11570.00	68.50	100	45			44.95	4.65	36.41	64.61	74.00	-9.39	
11570.00				55.43	A	44.95	4.65	36.41	51.54	54.00	-2.46	
3856.66	62.00	100	315			46.53	2.58	31.48	49.54	74.00	-24.46	Ch.157/
3856.66				55.39	A	46.53	2.58	31.48	42.93	54.00	-11.07	C
7713.32	59.17	100	45			44.86	3.70	34.06	52.07	74.00	-21.93	
7713.32				52.40	A	44.86	3.70	34.06	45.30	54.00	-8.70	
11570.00	65.00	100	0			44.95	4.65	36.41	61.11	74.00	-12.89	
11570.00				52.15	A	44.95	4.65	36.41	48.26	54.00	-5.74	
3830.00	62.00	100	315			46.53	2.57	31.43	49.46	74.00	-24.54	Ch. 149/
3830.00				54.97	A	46.53	2.57	31.43	42.43	54.00	-11.57	B
7660.00	58.50	100	45			44.86	3.69	34.07	51.39	74.00	-22.61	
7660.00				51.30	A	44.86	3.69	34.07	44.19	54.00	-9.81	
11490.00	64.50	100	45			45.02	4.63	36.29	60.41	74.00	-13.60	
11490.00				50.07	A	45.02	4.63	36.29	45.98	54.00	-8.03	
3883.33	61.17	100	315			46.52	2.59	31.54	48.78	74.00	-25.22	Ch.165/
3883.33				54.24	A	46.52	2.59	31.54	41.85	54.00	-12.15	B
7766.66	57.83	100	45			44.86	3.72	34.05	50.73	74.00	-23.27	
7766.66				50.08	A	44.86	3.72	34.05	42.98	54.00	-11.02	
11650.00	65.83	100	45			44.86	4.66	36.54	62.17	74.00	-11.83	
11650.00				51.94	A	44.86	4.66	36.54	48.28	54.00	-5.72	

**RADIATED EMISSIONS TEST RESULTS**

CLIENT:	Intel Corporation	DATE:	04/08/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	KN/RC
SERIAL NUMBER:	0016EA038A16	SITE #:	2
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot in 802.11b (2400-2483.5 MHz) mode.	TEMPERATURE:	22° C
		HUMIDITY:	39% RH
		TIME:	8:00 AM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11b mode (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
2412.00	69.67	100	135			2.53	32.19	104.39			Ch. 1
2412.00				66.67	A	2.53	32.19	101.39			
2437.00	71.33	100	45			2.54	32.22	106.09			Ch. 6
2437.00				68.00	A	2.54	32.22	102.76			
2462.00	70.67	100	45			2.55	32.25	105.48			Ch. 11
2462.00				67.67	A	2.55	32.25	102.48			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
2412.00	70.83	100	180			2.53	31.92	105.28			Ch. 1
2412.00				67.33	A	2.53	31.92	101.78			
2437.00	70.50	100	180			2.54	31.97	105.01			Ch. 6
2437.00				67.33	A	2.54	31.97	101.84			
2462.00	69.67	100	45			2.55	32.02	104.25			Ch. 11
2462.00				66.50	A	2.55	32.02	101.08			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11b mode (2400-2483.5 MHz)
Channels 1 & 11
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
2390.00							52.23	74.00	-21.77	Ch. 1
2390.00					A		42.39	54.00	-11.61	
2400.00	35.50	100	135		2.52	32.18	70.20	84.39	-14.19	
2483.50							54.15	74.00	-19.85	Ch. 11
2483.50					A		42.98	54.00	-11.02	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
2390.00							53.12	74.00	-20.88	Ch. 1
2390.00					A		42.78	54.00	-11.22	
2400.00	32.33	100	45		2.52	31.90	66.75	85.28	-18.53	
2483.50							52.92	74.00	-21.09	Ch. 11
2483.50					A		41.58	54.00	-12.43	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength



Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)
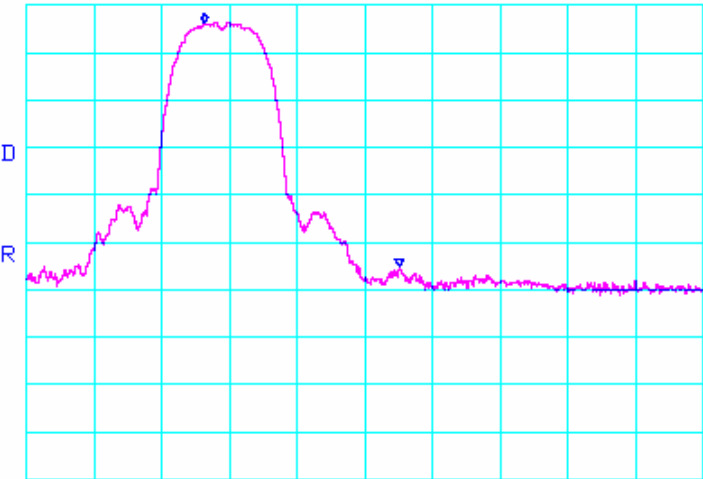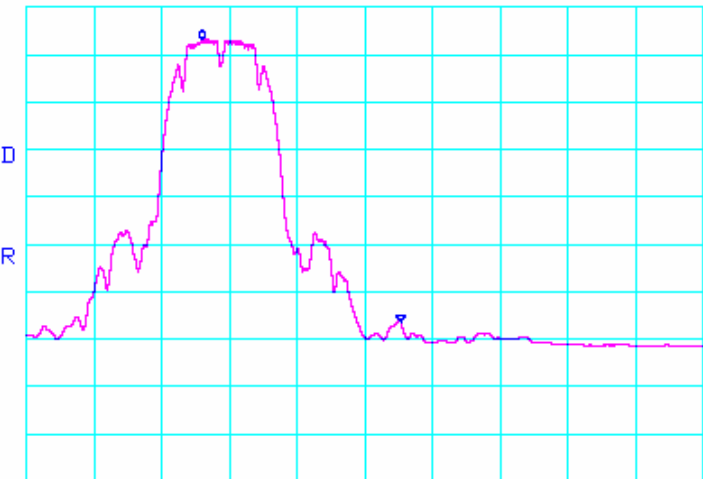
<i>Test Date</i>	<i>Data</i>	<i>Test Eng.</i>
04/08/08	2.462 GHz band edge PEAK DELTA	RC
<p data-bbox="337 432 954 478">*ATTEN 20dB ΔMKR 51.33dB RL 10.0dBm 10dB/ -28.8MHz</p>  <p data-bbox="337 961 1019 1016">CENTER 2.4835GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>		
<i>Test Date</i>	<i>Data</i>	<i>Test Eng.</i>
04/08/08	2.462 GHz band edge AVERAGE DELTA	RC
<p data-bbox="337 1148 954 1194">*ATTEN 20dB ΔMKR 59.50dB RL 10.0dBm 10dB/ -29.3MHz</p>  <p data-bbox="337 1680 1019 1734">CENTER 2.4835GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 10Hz SWP 37.0sec</p>		



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11b mode (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	70.83	100	225			2.53	32.19	105.55			Ch. 1
2412.00				67.67	A	2.53	32.19	102.39			
2437.00	70.50	100	225			2.54	32.22	105.26			Ch. 6
2437.00				67.00	A	2.54	32.22	101.76			
2462.00	67.33	100	225			2.55	32.25	102.14			Ch. 11
2462.00				64.17	A	2.55	32.25	98.98			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	69.83	100	180			2.53	31.92	104.28			Ch. 1
2412.00				66.67	A	2.53	31.92	101.12			
2437.00	70.00	100	180			2.54	31.97	104.51			Ch. 6
2437.00				66.83	A	2.54	31.97	101.34			
2462.00	68.67	100	180			2.55	32.02	103.25			Ch. 11
2462.00				65.83	A	2.55	32.02	100.41			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11b mode (2400-2483.5 MHz)
Channels 1 & 11
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							52.88	74.00	-21.12	Ch. 1
2390.00					A		42.89	54.00	-11.11	
2400.00	35.33	100	225		2.52	32.18	70.03	85.55	-15.52	
2483.50							51.30	74.00	-22.70	Ch. 11
2483.50					A		42.31	54.00	-11.69	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							51.61	74.00	-22.39	Ch. 1
2390.00					A		41.62	54.00	-12.38	
2400.00	34.83	100	180		2.52	31.90	69.25	84.28	-15.03	
2483.50							52.41	74.00	-21.60	Ch. 11
2483.50					A		43.74	54.00	-10.27	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

<i>Test Date</i>	<i>Data</i>	<i>Test Eng.</i>
04/08/08	2.412 GHz band edge PEAK DELTA	RC
<p>*ATTEN 20dB ΔMKR 52.67dB RL 10.0dBm 10dB/ 24.3MHz</p> <p>CENTER 2.3900GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>		
<i>Test Date</i>	<i>Data</i>	<i>Test Eng.</i>
04/08/08	2.412 GHz band edge AVERAGE DELTA	RC
<p>*ATTEN 20dB ΔMKR 59.50dB RL 10.0dBm 10dB/ 24.5MHz</p> <p>CENTER 2.3900GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 10Hz SWP 37.0sec</p>		

Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11b mode (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
2412.00	69.50	100	45			2.53	32.19	104.22			Ch. 1
2412.00				66.17	A	2.53	32.19	100.89			
2437.00	69.17	100	45			2.54	32.22	103.93			Ch. 6
2437.00				66.17	A	2.54	32.22	100.93			
2462.00	71.17	100	135			2.55	32.25	105.98			Ch. 11
2462.00				68.00	A	2.55	32.25	102.81			

RADIATED EMISSIONS - Vertical Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
2412.00	71.83	100	180			2.53	31.92	106.28			Ch. 1
2412.00				69.00	A	2.53	31.92	103.45			
2437.00	71.33	100	180			2.54	31.97	105.84			Ch. 6
2437.00				68.33	A	2.54	31.97	102.84			
2462.00	70.17	100	180			2.55	32.02	104.75			Ch. 11
2462.00				67.00	A	2.55	32.02	101.58			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11b mode (2400-2483.5 MHz)
Channels 1 & 11
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							48.72	74.00	-25.28	Ch. 1
2390.00					A		38.89	54.00	-15.11	
2400.00	33.67	100	45		2.52	32.18	68.37	84.22	-15.85	
2483.50							55.15	74.00	-18.85	Ch. 11
2483.50					A		46.15	54.00	-7.85	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							50.78	74.00	-23.22	Ch. 1
2390.00					A		41.45	54.00	-12.55	
2400.00	35.33	100	180		2.52	31.90	69.75	86.28	-16.53	
2483.50							53.92	74.00	-20.09	Ch. 11
2483.50					A		44.92	54.00	-9.08	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11b mode (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous TX at Chain A, B, & C Antenna ports with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-45*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamplifier Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.32	51.83	100	135			46.49	2.94	32.70	40.98	74.00	-33.02	Ch. 6/
4874.00	58.17	100	135			44.35	3.64	34.18	51.63	74.00	-22.37	A
4874.00				53.98	A	44.35	3.64	34.18	47.44	54.00	-6.56	
6498.57	52.50	100	180			44.49	4.22	35.60	47.82	74.00	-26.18	
9747.96	50.67	100	180			45.67	5.31	36.90	47.21	74.00	-26.79	
3249.32	53.50	100	180			46.49	2.94	32.70	42.65	74.00	-31.35	Ch. 6/
4874.00	56.50	100	225			44.35	3.64	34.18	49.96	74.00	-24.04	B
4874.00				51.18	A	44.35	3.64	34.18	44.64	54.00	-9.36	
6498.84	53.33	100	225			44.49	4.22	35.60	48.65	74.00	-25.35	
9747.96	51.33	100	135			45.67	5.31	36.90	47.87	74.00	-26.13	
3249.32	53.00	100	135			46.49	2.94	32.70	42.15	74.00	-31.85	Ch. 6/
4874.00	59.50	100	135			44.35	3.64	34.18	52.96	74.00	-21.04	C
4874.00				55.95	A	44.35	3.64	34.18	49.41	54.00	-4.59	
6498.64	51.83	100	135			44.49	4.22	35.60	47.15	74.00	-26.85	
9747.96	51.17	100	180			45.67	5.31	36.90	47.71	74.00	-26.29	
3216.00	53.67	100	180			46.46	2.91	32.69	42.81	74.00	-31.19	Ch. 1/
4824.00	54.67	100	225			44.70	3.59	34.21	47.77	74.00	-26.23	C
4824.00				47.10	A	44.70	3.59	34.21	40.20	54.00	-13.80	
6498.64	52.67	100	180			44.49	4.22	35.60	47.99	74.00	-26.01	
3282.66	53.83	100	135			46.52	2.97	32.71	42.99	86.68	-43.69	Ch. 11/
4924.00	56.67	100	225			44.17	3.67	34.15	50.32	74.00	-23.68	C
4924.00				53.56	A	44.17	3.67	34.15	47.21	54.00	-6.79	



Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.32	51.83	100	135			46.49	2.94	32.75	41.03	74.00	-32.97	Ch. 6/
4873.99	56.00	100	135			44.35	3.64	34.23	49.51	74.00	-24.49	A
4873.99				49.87	A	44.35	3.64	34.23	43.38	54.00	-10.62	
6498.64	53.17	100	180			44.49	4.22	35.60	48.49	74.00	-25.51	
9748.00	53.17	100	180			45.67	5.31	36.90	49.71	74.00	-24.29	
3249.32	53.00	100	270			46.49	2.94	32.75	42.20	74.00	-31.80	Ch. 6/
4873.99	56.67	100	180			44.35	3.64	34.23	50.18	74.00	-23.82	B
4873.99				50.32	A	44.35	3.64	34.23	43.83	54.00	-10.17	
6498.64	54.83	100	180			44.49	4.22	35.60	50.15	74.00	-23.85	
9748.00	52.00	100	180			45.67	5.31	36.90	48.54	74.00	-25.46	
3249.32	54.33	100	180			46.49	2.94	32.75	43.53	74.00	-30.47	Ch. 6/
4873.99	59.50	100	135				3.64	34.23	53.01	74.00	-20.99	C
4873.99				55.94	A	44.35	3.64	34.23	49.45	54.00	-4.55	
6498.64	54.50	100	225			44.49	4.22	35.60	49.82	74.00	-24.18	
9748.00	52.33	100	0			45.67	5.31	36.90	48.87	74.00	-25.13	
3216.00	52.33	100	225			46.46	2.91	32.73	41.51	85.86	-44.35	Ch. 1/
4824.01	53.17	100	225			44.70	3.59	34.24	46.30	74.00	-27.70	C
4824.01				43.37	A	44.70	3.59	34.24	36.50	54.00	-17.50	
6432.00	52.17	100	135			44.48	4.20	35.57	47.46	74.00	-26.54	
9648.00	52.17	100	45			45.70	5.27	36.78	48.52	74.00	-25.48	
3282.66	53.00	100	135			46.52	2.97	32.77	42.21	88.03	-45.82	Ch. 11/
4924.00	55.83	100	180			44.17	3.67	34.22	49.55	74.00	-24.45	C
4924.00				49.74	A	44.17	3.67	34.22	43.46	54.00	-10.54	
6565.32	50.50	100	180			44.58	4.25	35.60	45.77	74.00	-28.23	



Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11b mode (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous TX at Chain A, B, & C Antenna ports with Wistron NeWeb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-74

RADIATED EMISSIONS - Horizontal Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Channel/Chain Tested</i>
3249.32	58.33	100	225			46.61	2.34	32.10	46.15	74.00	-27.85	Ch. 6/
4874.00	62.17	100	180			46.31	2.89	33.70	52.45	74.00	-21.55	A
4874.00				56.81	A	46.31	2.89	33.70	47.09	54.00	-6.91	
6498.57	58.67	100	180			45.85	3.34	34.80	50.96	74.00	-23.04	
9747.96	57.50	100	0			44.53	4.18	35.85	53.00	74.00	-21.00	
3249.32	59.83	100	0			46.61	2.34	32.10	47.65	74.00	-26.35	Ch. 6/
4874.00	61.00	100	180			46.31	2.89	33.70	51.28	74.00	-22.72	B
4874.00				53.76	A	46.31	2.89	33.70	44.04	54.00	-9.96	
6498.57	59.17	100	135			45.85	3.34	34.80	51.46	74.00	-22.54	
9747.96	57.17	100	0			44.53	4.18	35.85	52.67	74.00	-21.33	
3249.32	59.67	100	0			46.61	2.34	32.10	47.49	74.00	-26.51	Ch. 6/
4874.00	60.67	100	135			46.31	2.89	33.70	50.95	74.00	-23.05	C
4874.00				57.83	A	46.31	2.89	33.70	48.11	54.00	-5.89	
6498.64	58.17	100	225			45.85	3.34	34.80	50.46	74.00	-23.54	
9747.96	55.83	100	0			44.53	4.18	35.85	51.33	74.00	-22.67	
3216.00	57.50	100	0			46.62	2.32	32.11	45.32	74.00	-28.68	Ch. 1/
4824.00	64.83	100	180			46.31	2.87	33.66	55.05	74.00	-18.95	C
4824.00				60.36	A	46.31	2.87	33.66	50.58	54.00	-3.42	
6432.00	58.83	100	0			45.94	3.33	34.75	50.97	74.00	-23.03	
9648.00	57.50	100	315			44.57	4.15	35.71	52.78	74.00	-21.22	
3282.66	59.83	100	315			46.61	2.35	32.09	47.65	74.00	-26.35	Ch. 11/
4924.00	59.50	100	180			46.31	2.90	33.74	49.83	74.00	-24.17	C
4924.00				56.67	A	46.31	2.90	33.74	47.00	54.00	-7.00	
6565.32	57.83	100	0			45.74	3.37	34.81	50.27	74.00	-23.73	



Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamplifier Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.32	60.50	100	45			46.61	2.34	30.85	47.07	74.00	-26.93	Ch. 6/
4873.99	65.17	100	270			46.31	2.89	32.57	54.32	74.00	-19.68	A
4873.99				60.40	A	46.31	2.89	32.57	49.55	54.00	-4.45	
6498.64	60.17	100	180			45.85	3.34	33.80	51.46	74.00	-22.54	
9748.00	58.17	100	0			44.53	4.18	35.15	52.97	74.00	-21.03	
3249.32	59.83	100	0			46.61	2.34	30.85	46.40	74.00	-27.60	Ch. 6/
4873.99	62.67	100	315			46.31	2.89	32.57	51.82	74.00	-22.18	B
4873.99				56.38	A	46.31	2.89	32.57	45.53	54.00	-8.47	
6498.64	61.00	100	45			45.85	3.34	33.80	52.29	74.00	-21.71	
9748.00	58.67	100	0			44.53	4.18	35.15	53.47	74.00	-20.53	
3249.32	59.33	100	0			46.61	2.34	30.85	45.90	74.00	-28.10	Ch. 6/
4873.99	66.83	100	315				2.89	32.57	55.98	74.00	-18.02	C
4873.99				63.63	A	46.31	2.89	32.57	52.78	54.00	-1.22	
6498.64	60.83	100	0			45.85	3.34	33.80	52.12	74.00	-21.88	
9748.00	60.17	100	0			44.53	4.18	35.15	54.97	74.00	-19.03	
3216.00	58.33	100	270			46.62	2.32	30.87	44.91	74.00	-29.09	Ch. 1/
4824.01	60.17	100	315			46.31	2.87	32.52	49.26	74.00	-24.74	C
4824.01				56.50	A	46.31	2.87	32.52	45.59	54.00	-8.41	
6432.00	60.33	100	135			45.94	3.33	33.73	51.45	74.00	-22.55	
9648.00	60.00	100	0			44.57	4.15	35.01	54.58	74.00	-19.42	
3282.66	59.50	100	0			46.61	2.35	30.83	46.07	74.00	-27.93	Ch. 11/
4924.00	58.50	100	315			46.31	2.90	32.62	47.71	74.00	-26.29	C
4924.00				54.17	A	46.31	2.90	32.62	43.38	54.00	-10.62	
6565.32	58.33	100	315			45.74	3.37	33.83	49.78	74.00	-24.22	
9484.81	55.67	100	0			44.63	4.11	34.79	49.93	74.00	-24.07	

**RADIATED EMISSIONS TEST RESULTS**

CLIENT:	Intel Corporation	DATE:	04/08/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	KN/RC
SERIAL NUMBER:	0016EA038A16	SITE #:	2
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot in 802.11g (2400-2483.5 MHz) mode.	TEMPERATURE:	22° C
		HUMIDITY:	39% RH
		TIME:	8:00 AM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11g mode (2400-2483.5 MHz)
Channels 1, 2, 6, 10, & 11
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
2412.00	73.50	100	315			2.53	32.19	108.22			Ch. 1
2412.00				63.37	A	2.53	32.19	98.09			
2417.00	74.17	100	135			2.53	32.20	108.90			Ch. 2
2417.00				64.83	A	2.53	32.20	99.56			
2437.00	74.33	100	135			2.54	32.22	109.09			Ch. 6
2437.00				63.33	A	2.54	32.22	98.09			
2457.00	74.33	100	135			2.55	32.25	109.13			Ch. 10
2457.00				62.67	A	2.55	32.25	97.47			
2462.00	74.33	125	225			2.55	32.25	109.14			Ch. 11
2462.00				64.10	A	2.55	32.25	98.91			

RADIATED EMISSIONS - Vertical Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
2412.00	73.33	100	225			2.53	31.92	107.78			Ch. 1
2412.00				63.82	A	2.53	31.92	98.27			
2417.00	74.33	100	180			2.53	31.93	108.79			Ch. 2
2417.00				64.50	A	2.53	31.93	98.96			
2437.00	74.17	100	180			2.54	31.97	108.68			Ch. 6
2437.00				64.33	A	2.54	31.97	98.84			
2457.00	74.67	100	90			2.55	32.01	109.23			Ch. 10
2457.00				65.00	A	2.55	32.01	99.56			
2462.00	73.00	145	225			2.55	32.02	107.58			Ch. 11
2462.00				64.04	A	2.55	32.02	98.62			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11g mode (2400-2483.5 MHz)
Channels 1, 2, 10, & 11
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							72.55	74.00	-1.45	Ch. 1
2390.00				A			50.42	54.00	-3.58	
2400.00	47.97	100	225		2.52	32.18	82.67	88.22	-5.55	
2390.00							68.07	74.00	-5.93	Ch. 2
2390.00				A			50.56	54.00	-3.44	
2400.00	43.33	100	135		2.52	32.18	78.03	88.90	-10.87	
2483.50							71.46	74.00	-2.54	Ch. 10
2483.50				A			50.97	54.00	-3.03	
2483.50							73.64	74.00	-0.36	Ch. 11
2483.50				A			50.58	54.00	-3.42	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							72.11	74.00	-1.89	Ch. 1
2390.00				A			50.60	54.00	-3.40	
2400.00	38.83	100	180		2.52	31.90	73.25	87.78	-14.53	
2390.00							67.96	74.00	-6.04	Ch. 2
2390.00				A			49.96	54.00	-4.04	
2400.00	41.33	100	180		2.52	31.90	75.75	88.79	-13.04	
2483.50							71.56	74.00	-2.44	Ch. 10
2483.50				A			53.06	54.00	-0.94	
2483.50							72.08	74.00	-1.93	Ch. 11
2483.50				A			50.29	54.00	-3.71	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11g mode (2400-2483.5 MHz)
Channels 1, 2, 6, 10, & 11
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	75.00	100	225			2.53	32.19	109.72			Ch. 1
2412.00				65.84	A	2.53	32.19	100.56			
2417.00	76.00	100	135			2.53	32.20	110.73			Ch. 2
2417.00				67.33	A	2.53	32.20	102.06			
2437.00	76.17	100	135			2.54	32.22	110.93			Ch. 6
2437.00				66.50	A	2.54	32.22	101.26			
2457.00	76.67	100	135			2.55	32.25	111.47			Ch. 10
2457.00				66.17	A	2.55	32.25	100.97			
2462.00	74.67	100	225			2.55	32.25	109.48			Ch. 11
2462.00				65.35	A	2.55	32.25	100.16			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	72.17	100	135			2.53	31.92	106.62			Ch. 1
2412.00				62.82	A	2.53	31.92	97.27			
2417.00	73.50	100	180			2.53	31.93	107.96			Ch. 2
2417.00				63.00	A	2.53	31.93	97.46			
2437.00	74.67	100	180			2.54	31.97	109.18			Ch. 6
2437.00				64.17	A	2.54	31.97	98.68			
2457.00	73.50	100	90			2.55	32.01	108.06			Ch. 10
2457.00				63.33	A	2.55	32.01	97.89			
2462.00	70.00	100	135			2.55	32.02	104.58			Ch. 11
2462.00				60.68	A	2.55	32.02	95.26			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11g mode (2400-2483.5 MHz)
Channels 1, 2, 10, & 11
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							72.39	74.00	-1.61	Ch. 1
2390.00				A			50.22	54.00	-3.78	
2400.00	36.50	100	135		2.52	32.18	71.20	89.72	-18.52	
2390.00							66.90	74.00	-7.10	Ch. 2
2390.00				A			50.56	54.00	-3.44	
2400.00	44.00	100	135		2.52	32.18	78.70	90.73	-12.03	
2483.50							68.80	74.00	-5.20	Ch. 10
2483.50				A			50.14	54.00	-3.86	
2483.50							70.31	74.00	-3.69	Ch. 11
2483.50				A			49.83	54.00	-4.17	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							69.29	74.00	-4.71	Ch. 1
2390.00				A			46.93	54.00	-7.07	
2400.00	35.17	100	180		2.52	31.90	69.59	86.62	-17.03	
2390.00							64.13	74.00	-9.87	Ch. 2
2390.00				A			45.96	54.00	-8.04	
2400.00	39.67	100	180		2.52	31.90	74.09	87.96	-13.87	
2483.50							65.39	74.00	-8.61	Ch. 10
2483.50				A			47.06	54.00	-6.94	
2483.50							65.41	74.00	-8.60	Ch. 11
2483.50				A			44.93	54.00	-9.08	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = F_m - \Delta_m$$

Where

BE = Band Edge Field Strength

F_m = Measured Fundamental (Peak or Average)

Δ_m = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11g mode (2400-2483.5 MHz)
Channels 1, 2, 6, 10, & 11
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	73.83	100	225			2.53	32.19	108.55			Ch. 1
2412.00				64.52	A	2.53	32.19	99.24			
2417.00	74.17	100	135			2.53	32.20	108.90			Ch. 2
2417.00				64.00	A	2.53	32.20	98.73			
2437.00	74.50	100	135			2.54	32.22	109.26			Ch. 6
2437.00				63.67	A	2.54	32.22	98.43			
2457.00	74.50	100	135			2.55	32.25	109.30			Ch. 10
2457.00				63.50	A	2.55	32.25	98.30			
2462.00	75.17	100	135			2.55	32.25	109.98			Ch. 11
2462.00				65.92	A	2.55	32.25	100.73			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	74.50	100	135			2.53	31.92	108.95			Ch. 1
2412.00				63.83	A	2.53	31.92	98.28			
2417.00	75.17	100	180			2.53	31.93	109.63			Ch. 2
2417.00				64.83	A	2.53	31.93	99.29			
2437.00	75.67	100	180			2.54	31.97	110.18			Ch. 6
2437.00				64.17	A	2.54	31.97	98.68			
2457.00	75.17	100	225			2.55	32.01	109.73			Ch. 10
2457.00				64.67	A	2.55	32.01	99.23			
2462.00	74.17	125	135			2.55	32.02	108.75			Ch. 11
2462.00				63.83	A	2.55	32.02	98.41			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11g mode (2400-2483.5 MHz)
Channels 1, 2, 10, & 11
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							69.72	74.00	-4.28	Ch. 1
2390.00				A			48.41	54.00	-5.59	
2400.00	43.00	100	135		2.52	32.18	77.70	88.55	-10.85	
2390.00							66.90	74.00	-7.10	Ch. 2
2390.00				A			52.73	54.00	-1.27	
2400.00	41.67	100	135		2.52	32.18	76.37	88.90	-12.53	
2483.50							68.64	74.00	-5.36	Ch. 10
2483.50				A			51.80	54.00	-2.20	
2483.50							72.65	74.00	-1.35	Ch. 11
2483.50				A			49.23	54.00	-4.77	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							70.12	74.00	-3.88	Ch. 1
2390.00				A			47.45	54.00	-6.55	
2400.00	45.00	100	135		2.52	31.90	79.42	88.95	-9.53	
2390.00							67.63	74.00	-6.37	Ch. 2
2390.00				A			53.29	54.00	-0.71	
2400.00	48.33	100	180		2.52	31.90	82.75	89.63	-6.88	
2483.50							69.07	74.00	-4.93	Ch. 10
2483.50				A			52.73	54.00	-1.27	
2483.50							71.42	74.00	-2.58	Ch. 11
2483.50				A			46.91	54.00	-7.10	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11g mode (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous TX at Chain A, B, & C Antenna ports with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-45*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Channel/Chain Tested</i>
3249.32	55.00	100	135			46.61	2.34	31.80	42.52	74.00	-31.48	Ch. 6/
4874.00	58.17	100	225			46.31	2.89	34.02	48.77	74.00	-25.23	A
4874.00				53.19	A	46.31	2.89	34.02	43.79	54.00	-10.21	
3249.32	53.50	100	135			46.61	2.34	31.80	41.02	74.00	-32.98	Ch. 6/
4874.00	55.33	100	225			46.31	2.89	34.02	45.93	74.00	-28.07	B
4874.00				52.14	A	46.31	2.89	34.02	42.74	54.00	-11.26	
3249.67	52.17	100	90			46.49	2.94	32.70	41.32	74.00	-32.68	Ch. 6/
4874.00	55.50	100	90			44.35	3.64	34.18	48.96	74.00	-25.04	C
4874.00				43.05	A	44.35	3.64	34.18	36.51	54.00	-17.49	
6498.73	51.17	100	45			44.49	4.22	35.60	46.49	74.00	-27.51	
3216.00	53.67	100	180			46.62	2.32	31.72	41.10	74.00	-32.90	Ch. 1/
4824.00	54.67	100	225			46.31	2.87	33.91	45.15	74.00	-28.85	A
4824.00				47.10	A	46.31	2.87	33.91	37.58	54.00	-16.42	
3282.66	53.83	100	135			46.61	2.35	31.88	41.45	86.68	-45.23	Ch. 11/
4924.00	56.67	100	225			46.31	2.90	34.13	47.39	74.00	-26.61	A
4924.00				53.56	A	46.31	2.90	34.13	44.28	54.00	-9.72	



Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamplifier Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.32	53.33	100	135			46.61	2.34	31.35	40.40	74.00	-33.60	Ch. 6/
4873.99	56.50	100	225			46.31	2.89	33.87	46.95	74.00	-27.05	A
4873.99				49.80	A	46.31	2.89	33.87	40.25	54.00	-13.75	
9748.00	54.00	100	315			44.53	4.18	38.15	51.80	74.00	-22.20	
3249.32	53.83	100	315			46.61	2.34	31.35	40.90	74.00	-33.10	Ch. 6/
4873.99	55.00	100	135			46.31	2.89	33.87	45.45	74.00	-28.55	B
4873.99				48.44	A	46.31	2.89	33.87	38.89	54.00	-15.11	
9748.00	50.17	100	180			44.53	4.18	38.15	47.97	74.00	-26.03	
3249.20	53.17	100	0			46.49	2.94	32.75	42.37	74.00	-31.63	Ch. 6/
4873.69	53.83	100	270			44.36	3.64	34.23	47.33	74.00	-26.67	C
4873.69				41.91	A	44.36	3.64	34.23	35.41	54.00	-18.59	
6498.74	52.67	100	225			44.49	4.22	35.60	47.99	74.00	-26.01	
3216.00	52.33	100	225			46.62	2.32	31.28	39.31	85.86	-46.55	Ch. 1/
4824.01	53.17	100	225			46.31	2.87	33.78	43.52	74.00	-30.48	A
4824.01				43.37	A	46.31	2.87	33.78	33.72	54.00	-20.28	
9648.00	52.17	100	45			44.57	4.15	38.09	49.83	74.00	-24.17	
3282.66	53.00	100	135			46.61	2.35	31.42	40.16	88.03	-47.87	Ch. 11/
4924.00	55.83	100	180			46.31	2.90	33.96	46.38	74.00	-27.62	A
4924.00				49.74	A	46.31	2.90	33.96	40.29	54.00	-13.71	
6565.32	50.50	100	180			45.74	3.37	35.55	43.67	74.00	-30.33	



Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11g mode (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous TX at Chain A, B, & C Antenna ports with Wistron NeWeb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-74

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamplifier Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.32	59.83	100	0			46.61	2.34	32.10	47.65	74.00	-26.35	Ch. 6/
4873.99	63.67	100	180			46.31	2.89	33.70	53.95	74.00	-20.05	C
4873.99				50.67	A	46.31	2.89	33.70	40.95	54.00	-13.05	
6498.64	58.00	100	0			45.85	3.34	34.80	50.29	74.00	-23.71	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamplifier Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.20	59.50	100	45			46.61	2.34	30.85	46.07	74.00	-27.93	Ch. 6/
4873.99	62.00	100	90			46.31	2.89	32.57	51.15	74.00	-22.85	C
4873.99				49.44	A	46.31	2.89	32.57	38.59	54.00	-15.41	
6498.64	59.50	100	315			45.85	3.34	33.80	50.79	74.00	-23.21	

Only tested mid channel because that was worst case from other 2.4GHz range.



RADIATED EMISSIONS TEST RESULTS

CLIENT:	Intel Corporation	DATE:	04/08/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	KN/RC
SERIAL NUMBER:	0016EA038A16	SITE #:	2
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot in 802.11n (2400-2483.5 MHz) mode 20MHz Wide.	TEMPERATURE:	22° C
		HUMIDITY:	39% RH
		TIME:	8:00 AM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)
Channels 1, 2, 6, 10, & 11
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	74.17	100	180			2.53	32.19	108.89			Ch. 1
2412.00				64.46	A	2.53	32.19	99.18			
2417.00	75.17	100	135			2.53	32.20	109.90			Ch. 2
2417.00				65.00	A	2.53	32.20	99.73			
2437.00	75.83	100	135			2.54	32.22	110.59			Ch. 6
2437.00				65.00	A	2.54	32.22	99.76			
2457.00	74.67	100	135			2.55	32.25	109.47			Ch. 10
2457.00				64.17	A	2.55	32.25	98.97			
2462.00	74.33	100	225			2.55	32.25	109.14			Ch. 11
2462.00				64.20	A	2.55	32.25	99.01			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	73.17	100	225			2.53	31.92	107.62			Ch. 1
2412.00				63.46	A	2.53	31.92	97.91			
2417.00	74.50	100	180			2.53	31.93	108.96			Ch. 2
2417.00				64.83	A	2.53	31.93	99.29			
2437.00	74.50	100	180			2.54	31.97	109.01			Ch. 6
2437.00				64.83	A	2.54	31.97	99.34			
2457.00	74.67	100	90			2.55	32.01	109.23			Ch. 10
2457.00				64.00	A	2.55	32.01	98.56			
2462.00	73.67	145	225			2.55	32.02	108.25			Ch. 11
2462.00				61.67	A	2.01	29.19	92.87			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)
Channels 1, 2, 10, & 11
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							72.89	74.00	-1.11	Ch. 1
2390.00				A			51.68	54.00	-2.32	
2400.00	39.50	100	135		2.52	32.18	74.20	88.89	-14.69	
2390.00							71.57	74.00	-2.43	Ch. 2
2390.00				A			51.57	54.00	-2.43	
2400.00	43.33	100	135		2.52	32.18	78.03	89.90	-11.87	
2483.50							72.97	74.00	-1.03	Ch. 10
2483.50				A			53.80	54.00	-0.20	
2483.50							72.47	74.00	-1.53	Ch. 11
2483.50				A			50.51	54.00	-3.49	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							71.62	74.00	-2.38	Ch. 1
2390.00				A			50.41	54.00	-3.59	
2400.00	40.00	100	180		2.52	31.90	74.42	87.62	-13.20	
2390.00							70.63	74.00	-3.37	Ch. 2
2390.00				A			51.13	54.00	-2.87	
2400.00	40.17	100	180		2.52	31.90	74.59	88.96	-14.37	
2483.50							72.73	74.00	-1.27	Ch. 10
2483.50				A			53.39	54.00	-0.61	
2483.50							71.58	74.00	-2.43	Ch. 11
2483.50				A			48.42	54.00	-5.58	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = F_m - \Delta_m$$

Where

BE = Band Edge Field Strength

F_m = Measured Fundamental (Peak or Average)

Δ_m = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)
Channels 1, 2, 6, 10, & 11
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	72.33	100	225			2.53	32.19	107.05			Ch. 1
2412.00				65.33	A	2.53	32.19	100.05			
2417.00	74.50	100	135			2.53	32.20	109.23			Ch. 2
2417.00				65.83	A	2.53	32.20	100.56			
2437.00	74.00	100	135			2.54	32.22	108.76			Ch. 6
2437.00				64.33	A	2.54	32.22	99.09			
2457.00	74.50	100	135			2.55	32.25	109.30			Ch. 10
2457.00				64.00	A	2.55	32.25	98.80			
2462.00	72.67	100	225			2.55	32.25	107.48			Ch. 11
2462.00				64.93	A	2.55	32.25	99.74			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	72.00	100	45			2.53	31.92	106.45			Ch. 1
2412.00				62.65	A	2.53	31.92	97.10			
2417.00	73.17	100	180			2.53	31.93	107.63			Ch. 2
2417.00				63.17	A	2.53	31.93	97.63			
2437.00	73.50	100	180			2.54	31.97	108.01			Ch. 6
2437.00				74.67	A	2.54	31.97	109.18			
2457.00	73.83	100	90			2.55	32.01	108.39			Ch. 10
2457.00				64.17	A	2.55	32.01	98.73			
2462.00	72.17	150	45			2.55	32.02	106.75			Ch. 11
2462.00				62.46	A	2.55	32.02	97.04			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".



Radiated Emissions Test Results (Continued)

Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)
Channels 1, 2, 10, & 11
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							68.05	74.00	-5.95	Ch. 1
2390.00				A			51.72	54.00	-2.28	
2400.00	37.67	100	135		2.52	32.18	72.37	87.05	-14.68	
2390.00							68.40	74.00	-5.60	Ch. 2
2390.00				A			49.56	54.00	-4.44	
2400.00	39.67	100	135		2.52	32.18	74.37	89.23	-14.86	
2483.50							68.14	74.00	-5.86	Ch. 10
2483.50				A			49.46	54.00	-4.54	
2483.50							68.65	74.00	-5.35	Ch. 11
2483.50				A			50.24	54.00	-3.76	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							67.45	74.00	-6.55	Ch. 1
2390.00				A			48.77	54.00	-5.23	
2400.00	38.83	100	180		2.52	31.90	73.25	86.45	-13.20	
2390.00							66.80	74.00	-7.20	Ch. 2
2390.00				A			46.63	54.00	-7.37	
2400.00	39.00	100	180		2.52	31.90	73.42	87.63	-14.21	
2483.50							67.23	74.00	-6.77	Ch. 10
2483.50				A			49.39	54.00	-4.61	
2483.50							67.92	74.00	-6.08	Ch. 11
2483.50				A			47.54	54.00	-6.47	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = F_m - \Delta_m$$

Where

BE = Band Edge Field Strength

F_m = Measured Fundamental (Peak or Average)

Δ_m = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)
Channels 1, 2, 6, 10, & 11
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +/-FAIL	Comments
2412.00	72.50	125	135			2.53	32.19	107.22			Ch. 1
2412.00				62.41	A	2.53	32.19	97.13			
2417.00	73.33	100	135			2.53	32.20	108.06			Ch. 2
2417.00				63.00	A	2.53	32.20	97.73			
2437.00	74.17	100	135			2.54	32.22	108.93			Ch. 6
2437.00				63.00	A	2.54	32.22	97.76			
2457.00	74.17	100	135			2.55	32.25	108.97			Ch. 10
2457.00				63.83	A	2.55	32.25	98.63			
2462.00	73.00	100	135			2.55	32.25	107.81			Ch. 11
2462.00				62.01	A	2.55	32.25	96.82			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +/-FAIL	Comments
2412.00	74.67	100	135			2.53	31.92	109.12			Ch. 1
2412.00				62.80	A	2.53	31.92	97.25			
2417.00	75.33	100	180			2.53	31.93	109.79			Ch. 2
2417.00				63.67	A	2.53	31.93	98.13			
2437.00	75.67	100	180			2.54	31.97	110.18			Ch. 6
2437.00				63.17	A	2.54	31.97	97.68			
2457.00	75.17	100	225			2.55	32.01	109.73			Ch. 10
2457.00				64.17	A	2.55	32.01	98.73			
2462.00	74.17	100	150			2.55	32.02	108.75			Ch. 11
2462.00				63.00	A	2.55	32.02	97.58			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)
Channels 1, 2, 10, & 11
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							69.22	74.00	-4.78	Ch. 1
2390.00					A		47.80	54.00	-6.20	
2400.00	35.67	100	135		2.52	32.18	70.37	87.22	-16.85	
2390.00							68.72	74.00	-5.28	Ch. 2
2390.00					A		52.89	54.00	-1.11	
2400.00	42.17	100	135		2.52	32.18	76.87	88.06	-11.19	
2483.50							66.14	74.00	-7.86	Ch. 10
2483.50					A		52.63	54.00	-1.37	
2483.50							71.64	74.00	-2.36	Ch. 11
2483.50					A		46.16	54.00	-7.84	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							71.12	74.00	-2.88	Ch. 1
2390.00					A		47.92	54.00	-6.08	
2400.00	45.67	100	180		2.52	31.90	80.09	89.12	-9.03	
2390.00							70.45	74.00	-3.55	Ch. 2
2390.00					A		53.29	54.00	-0.71	
2400.00	47.50	100	180		2.52	31.90	81.92	89.79	-7.87	
2483.50							66.90	74.00	-7.10	Ch. 10
2483.50					A		52.73	54.00	-1.27	
2483.50							72.58	74.00	-1.43	Ch. 11
2483.50					A		46.92	54.00	-7.08	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous TX at Chain A, B, & C Antenna ports with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-46*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamplifier Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.32	53.17	100	135			50.79	2.94	32.70	38.02	74.00	-35.98	Ch. 6/
4873.99	52.50	100	135			51.15	3.64	34.18	39.16	74.00	-34.84	A
4873.99				40.74	A	51.15	3.64	34.18	27.40	54.00	-26.60	
6498.64	51.83	100	225			50.83	4.22	35.60	40.82	74.00	-33.18	
3249.32	52.67	100	90			50.79	2.94	32.70	37.52	74.00	-36.48	Ch. 6/
6498.64	52.83	100	90			50.83	4.22	35.60	41.82	74.00	-32.18	B
3249.32	52.50	100	90			50.79	2.94	32.70	37.35	74.00	-36.65	Ch. 6/
4873.99	55.67	100	135			51.15	3.64	34.18	42.33	74.00	-31.67	C
4873.99				43.43	A	51.15	3.64	34.18	30.09	54.00	-23.91	
6498.64	54.00	100	180			50.83	4.22	35.60	42.99	74.00	-31.01	
3216.00	52.50	100	135			50.80	2.91	32.69	37.30	74.00	-36.70	Ch. 1/
4824.00	53.00	100	135			51.18	3.59	34.21	39.62	74.00	-34.38	A
4824.00				41.35	A	51.18	3.59	34.21	27.97	54.00	-26.03	
6498.64	52.17	100	180			50.83	4.22	35.60	41.16	74.00	-32.84	
3282.66	52.67	100	135			50.77	2.97	32.71	37.58	74.00	-36.42	Ch. 11/
												A

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamplifier Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.32	53.33	100	135			50.79	2.94	32.75	38.23	74.00	-35.77	Ch. 6/
4873.99	54.67	100	90			51.15	3.64	34.23	41.38	74.00	-32.62	A
4873.99				42.68	A	51.15	3.64	34.23	29.39	54.00	-24.61	
6498.64	53.17	100	135			50.83	4.22	35.60	42.16	74.00	-31.84	
3249.32	53.00	100	135			50.79	2.94	32.75	37.90	74.00	-36.10	Ch. 6/
6498.64	55.33	100	135			50.83	4.22	35.60	44.32	74.00	-29.68	B
3249.32	52.67	100	45			50.79	2.94	32.75	37.57	74.00	-36.43	Ch. 6/
4873.99	56.00	100	135			51.15	3.64	34.23	42.71	74.00	-31.29	C
4873.99				42.89	A	51.15	3.64	34.23	29.60	54.00	-24.40	
6498.64	53.33	100	135			50.83	4.22	35.60	42.32	74.00	-31.68	
3216.00	52.17	100	135			50.80	2.91	32.73	37.01	74.00	-36.99	Ch. 1/
4824.01	52.17	100	180			51.18	3.59	34.24	38.82	74.00	-35.18	A
4824.01				40.71	A	51.18	3.59	34.24	27.36	54.00	-26.64	
6432.00	53.00	100	225			50.90	4.20	35.57	41.87	74.00	-32.13	
3282.66	52.83	100	0			50.77	2.97	32.77	37.80	74.00	-36.20	Ch. 11/
4924.00	52.50	100	180			51.16	3.67	34.22	39.23	74.00	-34.77	A
4924.00				41.88	A	51.16	3.67	34.22	28.61	54.00	-25.39	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous TX at Chain A, B, & C Antenna ports with Wistron NeWeb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-75*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.32	60.33	100	315			46.61	2.34	32.10	48.15	74.00	-25.85	Ch. 6/
4873.99	59.00	100	270			46.31	2.89	33.70	49.28	74.00	-24.72	A
4873.99				45.93	A	46.31	2.89	33.70	36.21	54.00	-17.79	
6498.64	58.83	100	225			45.85	3.34	34.80	51.12	74.00	-22.88	
3249.32	61.33	100	180			46.61	2.34	32.10	49.15	74.00	-24.85	Ch. 6/
6498.64	59.50	100	225			45.85	3.34	34.80	51.79	74.00	-22.21	B
3249.32	58.50	100	0			46.61	2.34	32.10	46.32	74.00	-27.68	Ch. 6/
4873.99	60.50	100	180			46.31	2.89	33.70	50.78	74.00	-23.22	C
4873.99				46.59	A	46.31	2.89	33.70	36.87	54.00	-17.13	
6498.64	59.17	100	225			45.85	3.34	34.80	51.46	74.00	-22.54	
3216.00	59.83	100	315			46.62	2.32	32.11	47.65	74.00	-26.35	Ch. 1/
4824.00	61.67	100	180			46.31	2.87	33.66	51.89	74.00	-22.11	C
4824.00				46.74	A	46.31	2.87	33.66	36.96	54.00	-17.04	
3282.66	60.00	100	315			46.61	2.35	32.09	47.82	74.00	-26.18	Ch. 11/
4924.00	58.67	100	180			46.31	2.90	33.74	49.00	74.00	-25.00	C
4924.00				45.74	A	46.31	2.90	33.74	36.07	54.00	-17.93	
6565.33	57.50	100	270			45.74	3.37	34.81	49.94	74.00	-24.06	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.32	59.83	100	0			46.61	2.34	30.85	46.40	74.00	-27.60	Ch. 6/
4873.99	60.17	100	270			46.31	2.89	32.57	49.32	74.00	-24.68	A
4873.99				49.17	A	46.31	2.89	32.57	38.32	54.00	-15.68	
6498.64	59.83	100	180			45.85	3.34	33.80	51.12	74.00	-22.88	
3249.32	60.00	100	0			46.61	2.34	30.85	46.57	74.00	-27.43	Ch. 6/
6498.64	61.83	100	180			45.85	3.34	33.80	53.12	74.00	-20.88	B
3249.32	60.00	100	0			46.61	2.34	30.85	46.57	74.00	-27.43	Ch. 6/
4873.99	60.50	100	315			46.31	2.89	32.57	49.65	74.00	-24.35	C
4873.99				49.37	A	46.31	2.89	32.57	38.52	54.00	-15.48	
6498.64	60.50	100	0			45.85	3.34	33.80	51.79	74.00	-22.21	
3216.00	61.83	100	270			46.62	2.32	30.87	48.41	74.00	-25.59	Ch. 1/
4824.01	60.17	100	270			46.31	2.87	32.52	49.26	74.00	-24.74	A
4824.01				49.63	A	46.31	2.87	32.52	38.72	54.00	-15.28	
6432.00	60.83	100	315			45.94	3.33	33.73	51.95	74.00	-22.05	
3282.66	59.33	100	135			46.61	2.35	30.83	45.90	74.00	-28.10	Ch. 11/
4924.00	58.50	100	90			46.31	2.90	32.62	47.71	74.00	-26.29	A
4924.00				46.68	A	46.31	2.90	32.62	35.89	54.00	-18.11	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous TX at Triple Chain ABC Antenna ports with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-46*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Channel/Chain Tested</i>
3216.00	52.50	100	135			50.80	2.91	32.69	37.30	74.00	-36.70	Ch. 1
4824.00	53.00	100	135			51.18	3.59	34.21	39.62	74.00	-34.38	
4824.00				41.35	A	51.18	3.59	34.21	27.97	54.00	-26.03	
6498.64	52.17	100	180			50.83	4.22	35.60	41.16	74.00	-32.84	
3249.09	52.83	100	45			50.79	2.94	32.70	37.68	74.00	-36.32	Ch. 6
4874.12	54.33	100	135			51.15	3.64	34.18	40.99	74.00	-33.01	
4874.12				41.65	A	51.15	3.64	34.18	28.31	54.00	-25.69	
6498.54	53.33	100	135			50.83	4.22	35.60	42.32	74.00	-31.68	
3282.66	52.67	100	135			50.77	2.97	32.71	37.58	74.00	-36.42	Ch. 11

RADIATED EMISSIONS - Vertical Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Channel/Chain Tested</i>
3216.00	52.17	100	135			50.80	2.91	32.73	37.01	74.00	-36.99	Ch. 1
4824.01	52.17	100	180			51.18	3.59	34.24	38.82	74.00	-35.18	
4824.01				40.71	A	51.18	3.59	34.24	27.36	54.00	-26.64	
6432.00	53.00	100	225			50.90	4.20	35.57	41.87	74.00	-32.13	
3249.46	53.33	100	315			50.79	2.94	32.75	38.23	74.00	-35.77	Ch. 6
4873.93	51.83	100	225			51.15	3.64	34.23	38.54	74.00	-35.46	
4873.93				41.18	A	51.15	3.64	34.23	27.89	54.00	-26.11	
6498.85	53.83	100	225			50.83	4.22	35.60	42.82	74.00	-31.18	
3282.66	52.83	100	0			50.77	2.97	32.77	37.80	74.00	-36.20	Ch. 11
4924.00	52.50	100	180			51.16	3.67	34.22	39.23	74.00	-34.77	
4924.00				41.88	A	51.16	3.67	34.22	28.61	54.00	-25.39	



Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)
Channels 1, 6, & 11
Continuous TX at Triple Chain ABC Antenna ports with Wistron NeWeb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-75

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamplifier Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3216.00	52.67	100	315			36.73	2.32	32.11	50.38	74.00	-23.62	Ch. 1
4824.00	51.33	100	270			36.32	2.87	33.66	51.55	74.00	-22.45	
4824.00				39.30	A	36.32	2.87	33.66	39.52	54.00	-14.48	
6432.00	51.17	100	315			36.39	3.33	34.75	52.86	74.00	-21.14	
3249.33	52.17	100	315			36.72	2.34	32.10	49.89	74.00	-24.11	Ch. 6
4874.00	51.17	100	270			36.31	2.89	33.70	51.45	74.00	-22.55	
4874.00				39.58	A	36.31	2.89	33.70	39.86	54.00	-14.14	
6498.66	51.67	100	315			36.39	3.34	34.80	53.42	74.00	-20.58	
3282.66	52.00	100	90			36.71	2.35	32.09	49.72	74.00	-24.28	Ch. 11
4924.00	50.67	100	270			36.30	2.90	33.74	51.01	74.00	-22.99	
4924.00				37.88	A	36.30	2.90	33.74	38.22	54.00	-15.78	
6565.33	51.33	100	315			36.42	3.37	34.81	53.09	74.00	-20.91	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamplifier Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3216.00	53.00	100	0			36.73	2.32	30.87	49.47	74.00	-24.53	Ch. 1
4824.00	52.00	100	45			36.32	2.87	32.52	51.08	74.00	-22.92	
4824.00				40.67	A	36.32	2.87	32.52	39.75	54.00	-14.25	
6432.00	53.33	100	0			36.39	3.33	33.73	54.00	74.00	-20.00	
3249.33	53.17	100	270			36.72	2.34	30.85	49.64	74.00	-24.36	Ch. 6
4874.00	51.83	100	315			36.31	2.89	32.57	50.98	74.00	-23.02	
4874.00				40.60	A	36.31	2.89	32.57	39.75	54.00	-14.25	
6498.66	54.50	100				36.39	3.34	33.80	55.25	74.00	-18.75	
3282.66	51.50	100	90			36.71	2.35	30.83	47.97	74.00	-26.03	Ch. 11
4924.00	51.67	100	315			36.30	2.90	32.62	50.89	74.00	-23.11	
4924.00				43.76	A	36.30	2.90	32.62	42.98	54.00	-11.02	
6565.33	53.00	100	315			36.42	3.37	33.83	53.77	74.00	-20.23	



RADIATED EMISSIONS TEST RESULTS

CLIENT:	Intel Corporation	DATE:	04/08/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	KN/RC
SERIAL NUMBER:	0016EA038A16	SITE #:	2
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot in 802.11n (2400-2483.5 MHz) mode 40MHz Wide.	TEMPERATURE:	22° C
		HUMIDITY:	39% RH
		TIME:	8:00 AM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3, 6, & 9
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	68.33	100	225			2.53	32.21	103.07			Ch. 3
2422.00				58.32	A	2.53	32.21	93.06			
2437.00	69.67	100	135			2.54	32.22	104.43			Ch. 6
2437.00				58.50	A	2.54	32.22	93.26			
2452.00	70.00	100	315			2.55	32.24	104.79			Ch. 9
2452.00				60.41	A	2.55	32.24	95.20			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	70.67	100	225			2.53	31.94	105.15			Ch. 3
2422.00				60.01	A	2.53	31.94	94.49			
2437.00	70.17	100	90			2.54	31.97	104.68			Ch. 6
2437.00				60.67	A	2.54	31.97	95.18			
2452.00	69.67	145	225			2.55	32.00	104.22			Ch. 9
2452.00				60.80	A	2.55	32.00	95.35			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3 & 9**

**Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54**

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							67.40	74.00	-6.60	Ch. 3
2390.00					A		51.39	54.00	-2.61	
2400.00	39.33	100	135		2.52	32.18	74.03	83.07	-9.04	
2483.50							70.62	74.00	-3.38	Ch. 9
2483.50					A		51.20	54.00	-2.80	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							69.48	74.00	-4.52	Ch. 3
2390.00					A		52.82	54.00	-1.19	
2400.00	37.17	100	180		2.52	31.90	71.59	85.15	-13.56	
2483.50							70.05	74.00	-3.95	Ch. 9
2483.50					A		51.35	54.00	-2.65	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3, 6, & 9
Continuous TX at Chain A Antenna port with Wistron Neweb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-71*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	71.50	100	90			2.53	32.21	106.24			Ch. 3
2422.00				60.33	A	2.53	32.21	95.07			
2437.00	74.83	100	90			2.54	32.22	109.59			Ch. 6
2437.00				63.00	A	2.54	32.22	97.76			
2452.00	71.83	100	90			2.55	32.24	106.62			Ch. 9
2452.00				61.00	A	2.55	32.24	95.79			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	65.67	100	90			2.53	31.94	100.15			Ch. 3
2422.00				54.83	A	2.53	31.94	89.31			
2437.00	69.17	100	315			2.54	31.97	103.68			Ch. 6
2437.00				57.00	A	2.54	31.97	91.51			
2452.00	69.00	100	315			2.55	32.00	103.55			Ch. 9
2452.00				56.67	A	2.55	32.00	91.22			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3 & 9**

**Continuous TX at Chain A Antenna port with Wistron Neweb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-71**

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							70.57	74.00	-3.43	Ch. 3
2390.00				A			53.40	54.00	-0.60	
2400.00	41.67	100	90		2.52	32.18	76.37	86.24	-9.87	
2483.50							72.45	74.00	-1.55	Ch. 9
2483.50				A			51.79	54.00	-2.21	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							64.48	74.00	-9.52	Ch. 3
2390.00				A			47.64	54.00	-6.36	
2400.00	37.50	100	90		2.52	31.90	71.92	80.15	-8.23	
2483.50							69.38	74.00	-4.62	Ch. 9
2483.50				A			47.22	54.00	-6.78	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3, 6, & 9
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	67.17	125	225			2.53	32.21	101.91			Ch. 3
2422.00				56.17	A	2.53	32.21	90.91			
2437.00	68.33	100	135			2.54	32.22	103.09			Ch. 6
2437.00				57.17	A	2.54	32.22	91.93			
2452.00	66.83	100	135			2.55	32.24	101.62			Ch. 9
2452.00				58.67	A	2.55	32.24	93.46			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	66.17	100	45			2.53	31.94	100.65			Ch. 3
2422.00				56.64	A	2.53	31.94	91.12			
2437.00	67.67	100	180			2.54	31.97	102.18			Ch. 6
2437.00				57.00	A	2.54	31.97	91.51			
2452.00	66.17	100	45			2.55	32.00	100.72			Ch. 9
2452.00				55.95	A	2.55	32.00	90.50			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3 & 9
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							69.08	74.00	-4.92	Ch. 3
2390.00				A			50.91	54.00	-3.09	
2400.00	35.17	100	135		2.52	32.18	69.87	81.91	-12.04	
2483.50							69.45	74.00	-4.55	Ch. 9
2483.50				A			49.63	54.00	-4.37	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							67.82	74.00	-6.18	Ch. 3
2390.00				A			51.12	54.00	-2.88	
2400.00	34.50	100	180		2.52	31.90	68.92	80.65	-11.73	
2483.50							68.55	74.00	-5.45	Ch. 9
2483.50				A			46.67	54.00	-7.33	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3, 6, & 9
Continuous TX at Chain B Antenna port with Wistron Neweb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-72*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
2422.00	66.50	100	90			2.53	32.21	101.24			Ch. 3
2422.00				56.17	A	2.53	32.21	90.91			
2437.00	70.00	100	90			2.54	32.22	104.76			Ch. 6
2437.00				58.67	A	2.54	32.22	93.43			
2452.00	68.17	100	90			2.55	32.24	102.96			Ch. 9
2452.00				56.50	A	2.55	32.24	91.29			

RADIATED EMISSIONS - Vertical Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
2422.00	66.17	100	45			2.53	31.94	100.65			Ch. 3
2422.00				56.64	A	2.53	31.94	91.12			
2437.00	67.67	100	180			2.54	31.97	102.18			Ch. 6
2437.00				57.00	A	2.54	31.97	91.51			
2452.00	66.17	100	45			2.55	32.00	100.72			Ch. 9
2452.00				55.95	A	2.55	32.00	90.50			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3 & 9
Continuous TX at Chain B Antenna port with Wistron Neweb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-72*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							68.41	74.00	-5.59	Ch. 3
2390.00				A			50.91	54.00	-3.09	
2400.00	37.83	100	90		2.52	32.18	72.53	81.24	-8.71	
2483.50							70.79	74.00	-3.21	Ch. 9
2483.50				A			47.46	54.00	-6.54	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							67.82	74.00	-6.18	Ch. 3
2390.00				A			51.12	54.00	-2.88	
2400.00	34.50	100	180		2.52	31.90	68.92	80.65	-11.73	
2483.50							68.55	74.00	-5.45	Ch. 9
2483.50				A			46.67	54.00	-7.33	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3, 6, & 9
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	68.50	100	135			2.53	32.21	103.24			Ch. 3
2422.00				58.83	A	2.53	32.21	93.57			
2437.00	72.00	100	135			2.54	32.22	106.76			Ch. 6
2437.00				61.00	A	2.54	32.22	95.76			
2452.00	72.67	100	135			2.55	32.24	107.46			Ch. 9
2452.00				63.10	A	2.55	32.24	97.89			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	69.00	125	225			2.53	31.94	103.48			Ch. 3
2422.00				59.90	A	2.53	31.94	94.38			
2437.00	72.50	100	180			2.54	31.97	107.01			Ch. 6
2437.00				61.50	A	2.54	31.97	96.01			
2452.00	69.00	150	135			2.55	32.00	103.55			Ch. 9
2452.00				59.64	A	2.55	32.00	94.19			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3 & 9
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							70.91	74.00	-3.09	Ch. 3
2390.00				A			51.74	54.00	-2.26	
2400.00	35.33	100	135		2.52	32.18	70.03	83.24	-13.21	
2483.50							73.29	74.00	-0.71	Ch. 9
2483.50				A			51.56	54.00	-2.44	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							71.15	74.00	-2.86	Ch. 3
2390.00				A			52.55	54.00	-1.46	
2400.00	42.33	100	180		2.52	31.90	76.75	83.48	-6.72	
2483.50							69.38	74.00	-4.62	Ch. 9
2483.50				A			47.86	54.00	-6.14	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3, 6, & 9
Continuous TX at Chain C Antenna port with Wistron Neweb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-73*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	69.83	100	135			2.53	32.21	104.57			Ch. 3
2422.00				59.50	A	2.53	32.21	94.24			
2437.00	69.83	100	135			2.54	32.22	104.59			Ch. 6
2437.00				59.17	A	2.54	32.22	93.93			
2452.00	70.67	100	225			2.55	32.24	105.46			Ch. 9
2452.00				59.33	A	2.55	32.24	94.12			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	68.67	100	45			2.53	31.94	103.15			Ch. 3
2422.00				57.17	A	2.53	31.94	91.65			
2437.00	68.67	100	0			2.54	31.97	103.18			Ch. 6
2437.00				58.17	A	2.54	31.97	92.68			
2452.00	68.00	100	0			2.55	32.00	102.55			Ch. 9
2452.00				56.83	A	2.55	32.00	91.38			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3 & 9
Continuous TX at Chain C Antenna port with Wistron Neweb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-73*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							72.24	74.00	-1.76	Ch. 3
2390.00				A			52.41	54.00	-1.59	
2400.00	35.17	100	135		2.52	32.18	69.87	84.57	-14.70	
2483.50							71.29	74.00	-2.71	Ch. 9
2483.50				A			47.79	54.00	-6.21	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							70.82	74.00	-3.18	Ch. 3
2390.00				A			49.82	54.00	-4.18	
2400.00	37.33	100	45		2.52	31.90	71.75	83.15	-11.40	
2483.50							68.38	74.00	-5.62	Ch. 9
2483.50				A			45.05	54.00	-8.95	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3, 6, & 9
Continuous TX at Chain A, B, & C Antenna ports with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-46*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Channel/Chain Tested</i>
3249.32	54.00	100	180			50.79	2.94	32.70	38.85	74.00	-35.15	Ch. 6/
6498.64	51.83	100	135			50.83	4.22	35.60	40.82	74.00	-33.18	A
3249.32	53.17	100	90			50.79	2.94	32.70	38.02	74.00	-35.98	Ch. 6/
6498.64	53.83	100	180			50.83	4.22	35.60	42.82	74.00	-31.18	B
3249.32	52.67	100	315			50.79	2.94	32.70	37.52	74.00	-36.48	Ch. 6/
4873.98	55.17	100	135			51.15	3.64	34.18	41.83	74.00	-32.17	C
4873.98				42.65	A	51.15	3.64	34.18	29.31	54.00	-24.69	
6498.64	52.67	100	180			50.83	4.22	35.60	41.66	74.00	-32.34	
3229.32	66.00	100	225			50.80	2.92	32.69	50.82	74.00	-23.18	Ch. 3/
4843.98	64.67	100	225			51.17	3.61	34.19	51.31	74.00	-22.69	C
4843.98				52.30	A	51.17	3.61	34.19	38.94	54.00	-15.06	
6498.64	63.17	100	225			50.83	4.22	35.60	52.16	74.00	-21.84	
3269.32	74.33	100	270			50.78	2.96	32.71	59.22	74.00	-14.78	Ch. 9/
4903.98	64.83	100	225			51.14	3.66	34.16	51.51	74.00	-22.49	C
4903.98				51.50	A	51.14	3.66	34.16	38.18	74.00	-35.82	
6538.64	64.33	100	135			50.80	4.24	35.61	53.37	74.00	-20.63	



Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Channel/Chain Tested</i>
3249.32	53.83	100	90			50.79	2.94	32.75	38.73	74.00	-35.27	Ch. 6/
4873.98	52.33	100	90			51.15	3.64	34.23	39.04	74.00	-34.96	A
4873.98				41.29	A	51.15	3.64	34.23	28.00	74.00	-46.00	
6498.64	54.67	100	90			50.83	4.22	35.60	43.66	74.00	-30.34	
3249.32	53.33	100	180			50.79	2.94	32.75	38.23	54.00	-15.77	Ch. 6/
4873.98	52.67	100	180			51.15	3.64	34.23	39.38	74.00	-34.62	B
4873.98				40.53	A	51.15	3.64	34.23	27.24	54.00	-26.76	
6498.64	55.00	100	180			50.83	4.22	35.60	43.99	74.00	-30.01	
3249.32	53.67	100	90			50.79	2.94	32.75	38.57	74.00	-35.43	Ch. 6/
4873.98	53.50	100	270			51.15	3.64	34.23	40.21	74.00	-33.79	C
4873.98				40.68	A	51.15	3.64	34.23	27.39	74.00	-46.61	
6498.64	54.17	100	180			50.83	4.22	35.60	43.16	74.00	-30.84	
3229.32	66.50	100	315			50.80	2.92	32.74	51.37	54.00	-2.63	Ch. 3/
4843.98	64.67	100	315			51.17	3.61	34.23	51.34	74.00	-22.66	B
4843.98				52.43	A	51.17	3.61	34.23	39.10	74.00	-34.90	
6458.64	68.00	100	315			50.87	4.21	35.58	56.92	74.00	-17.08	
3269.32	66.00	100	315			50.78	2.96	32.76	50.94	54.00	-3.06	Ch. 9/
4903.98	64.17	100	315			51.14	3.66	34.22	50.91	74.00	-23.09	B
4903.98				52.60	A	51.14	3.66	34.22	39.34	74.00	-34.66	
6538.64	66.00	100	315			50.80	4.24	35.60	55.04	74.00	-18.96	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)
Channels 3, 6, & 9
Continuous TX at Chain A, B, & C Antenna ports with Wistron Neweb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-75*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Channel/ Chain Tested</i>
3249.32	60.33	100	270			46.61	2.34	32.10	48.15	74.00	-25.85	Ch. 6/
4873.98	57.67	100	315			46.31	2.89	33.70	47.95	74.00	-26.05	A
4873.98				44.40	A	46.31	2.89	33.70	34.68	54.00	-19.32	
6498.64	58.33	100	0			45.85	3.34	34.80	50.62	74.00	-23.38	
3249.32	62.50	100	0			46.61	2.34	32.10	50.32	74.00	-23.68	Ch. 6/
4873.98	57.83	100	0			46.31	2.89	33.70	48.11	74.00	-25.89	B
4873.98				44.52	A	46.31	2.89	33.70	34.80	54.00	-19.20	
6498.64	58.83	100	225			45.85	3.34	34.80	51.12	74.00	-22.88	
3249.32	60.50	100	227			46.61	2.34	32.10	48.32	74.00	-25.68	Ch. 6/
6498.64	58.33	100	0			45.85	3.34	34.80	50.62	74.00	-23.38	C
3229.32	61.67	100	45			46.61	2.33	32.11	49.49	74.00	-24.51	Ch. 3/
4843.98	57.50	100	45			46.31	2.88	33.68	47.75	74.00	-26.25	B
4843.98				44.82	A	46.31	2.88	33.68	35.07	54.00	-18.93	
3269.32	60.67	100	0			46.61	2.34	32.09	48.49	74.00	-25.51	Ch. 9/
4903.98	57.33	100	0			46.31	2.90	33.72	47.64	74.00	-26.36	B
4903.98				44.20	A	46.31	2.90	33.72	34.51	54.00	-19.49	



Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Channel/Chain Tested</i>
3249.32	58.67	100	45			46.61	2.34	30.85	45.24	74.00	-28.76	Ch. 6/
4873.98	58.83	100	90			46.31	2.89	32.57	47.98	74.00	-26.02	A
4873.98				47.91	A	46.31	2.89	32.57	37.06	54.00	-16.94	
6498.64	59.33	100	180			45.85	3.34	33.80	50.62	74.00	-23.38	
3249.32	60.33	100	0			46.61	2.34	30.85	46.90	74.00	-27.10	Ch. 6/
4873.98	58.33	100	45			46.31	2.89	32.57	47.48	74.00	-26.52	B
4873.98				44.97	A	46.31	2.89	32.57	34.12	54.00	-19.88	
6498.64	61.50	100	135			45.85	3.34	33.80	52.79	74.00	-21.21	
3249.32	57.67	100	45			46.61	2.34	30.85	44.24	74.00	-29.76	Ch. 6/
4873.98	59.00	100	90			46.31	2.89	32.57	48.15	74.00	-25.85	C
4873.98				47.83	A	46.31	2.89	32.57	36.98	54.00	-17.02	
6498.64	60.67	100	0			45.85	3.34	33.80	51.96	74.00	-22.04	
3229.32	60.00	100	0			46.61	2.33	30.86	46.58	74.00	-27.42	Ch. 3/
4843.98	58.67	100	315			46.31	2.88	32.54	47.78	74.00	-26.22	B
4843.98				47.29	A	46.31	2.88	32.54	36.40	54.00	-17.60	
6458.64	60.33	100	0			45.90	3.34	33.76	51.52	74.00	-22.48	
3269.32	59.83	100	0			46.61	2.34	30.84	46.40	74.00	-27.60	Ch. 9/
4903.98	57.33	100	315			46.31	2.90	32.60	46.52	74.00	-27.48	B
4903.98				46.41	A	46.31	2.90	32.60	35.60	54.00	-18.40	
6538.64	61.17	100	270			45.79	3.36	33.82	52.56	74.00	-21.44	

**RADIATED EMISSIONS TEST RESULTS**

CLIENT:	Intel Corporation	DATE:	04/08/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	KN/RC
SERIAL NUMBER:	0016EA038A16	SITE #:	2
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot in 802.11n (5745-5825 MHz) mode 20MHz Wide.	TEMPERATURE:	22° C
		HUMIDITY:	39% RH
		TIME:	8:00 AM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)
Channels 149, 157, & 165
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5745.00	61.33	100	135			3.98	35.09	100.41			Ch. 149
5745.00				51.33	A	3.98	35.09	90.41			
5785.00	62.17	100	135			4.00	35.16	101.32			Ch. 157
5785.00				51.67	A	4.00	35.16	90.82			
5825.00	62.00	100	135			4.01	35.22	101.23			Ch. 165
5825.00				51.83	A	4.01	35.22	91.06			

RADIATED EMISSIONS - Vertical Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5745.00	65.83	100	225			3.98	34.94	104.75			Ch. 149
5745.00				55.83	A	3.98	34.94	94.75			
5785.00	65.00	100	225			4.00	35.01	104.01			Ch. 157
5785.00				54.33	A	4.00	35.01	93.34			
5825.00	63.50	100	225			4.01	35.09	102.60			Ch. 165
5825.00				53.17	A	4.01	35.09	92.27			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)
Channels 149 & 165
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5725.00	31.50	100	135		3.98	35.06	70.54	80.41	-9.87	Ch. 149
5850.00	32.33	100	135		4.02	35.26	71.61	81.23	-9.62	Ch. 165

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5725.00	34.17	100	225		3.98	34.91	73.05	84.75	-11.70	Ch. 149
5850.00	30.67	100	225		4.02	35.13	69.82	82.60	-12.78	Ch. 165

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)
 Channels 149, 157, & 165
 Continuous TX at Chain B Antenna port with Ethertronics Antennas
 Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5745.00	62.00	100	135			3.98	35.09	101.08			Ch. 149
5745.00				52.00	A	3.98	35.09	91.08			
5785.00	61.83	100	135			4.00	35.16	100.98			Ch. 157
5785.00				51.50	A	4.00	35.16	90.65			
5825.00	62.17	100	135			4.01	35.22	101.40			Ch. 165
5825.00				57.17	A	4.01	35.22	96.40			

RADIATED EMISSIONS - Vertical Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5745.00	70.00	100	225			3.98	34.94	108.92			Ch. 149
5745.00				59.50	A	3.98	34.94	98.42			
5785.00	68.00	100	225			4.00	35.01	107.01			Ch. 157
5785.00				58.17	A	4.00	35.01	97.18			
5825.00	67.33	100	225			4.01	35.09	106.43			Ch. 165
5825.00				57.17	A	4.01	35.09	96.27			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)
Channels 149 & 165
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	31.33	100	135		3.98	35.06	70.37	81.08	-10.71	Ch. 149
5850.00	31.33	100	135		4.02	35.26	70.61	81.40	-10.79	Ch. 165

RADIATED EMISSIONS - Vertical Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	34.50	100	225		3.98	34.91	73.38	88.92	-15.54	Ch. 149
5850.00	31.50	100	225		4.02	35.13	70.65	86.43	-15.78	Ch. 165

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = F_m - \Delta m$$

Where

BE = Band Edge Field Strength

F_m = Measured Fundamental (Peak or Average)

Δ_m = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)
Channels 149, 157, & 165
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5745.00	70.00	100	135			3.98	35.09	109.08			Ch. 149
5745.00				59.67	A	3.98	35.09	98.75			
5785.00	69.67	100	135			4.00	35.16	108.82			Ch. 157
5785.00				59.33	A	4.00	35.16	98.48			
5825.00	69.17	100	135			4.01	35.22	108.40			Ch. 165
5825.00				58.33	A	4.01	35.22	97.56			

RADIATED EMISSIONS - Vertical Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5745.00	63.67	100	315			3.98	34.94	102.59			Ch. 149
5745.00				53.67	A	3.98	34.94	92.59			
5785.00	64.50	100	315			4.00	35.01	103.51			Ch. 157
5785.00				53.67	A	4.00	35.01	92.68			
5825.00	62.00	100	315			4.01	35.09	101.10			Ch. 165
5825.00				52.50	A	4.01	35.09	91.60			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)
Channels 149 & 165
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	37.17	100	135		3.98	35.06	76.21	89.08	-12.87	Ch. 149
5850.00	32.67	100	135		4.02	35.26	71.95	88.40	-16.45	Ch. 165

RADIATED EMISSIONS - Vertical Antenna Polarization										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	32.50	100	315		3.98	34.91	71.38	82.59	-11.21	Ch. 149
5850.00	31.67	100	315		4.02	35.13	70.82	81.10	-10.28	Ch. 165

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)
 Channels 149, 157, & 165
 Continuous TX at Chain A, B, & C Antenna ports with Ethertronics Antennas
 Aegis Labs, Inc. File #: INTEL-080317-46*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/ Chain Tested
3856.66	52.00	100	270			50.79	3.22	33.23	37.66	74.00	-36.34	Ch.157/
3856.66				40.10	A	50.79	3.22	33.23	25.76	54.00	-28.24	A
7713.29	51.83	100	135			50.14	4.67	36.04	42.40	74.00	-31.60	
7713.29				39.29	A	50.14	4.67	36.04	29.86	54.00	-24.14	
3856.66	51.67	100	270			50.79	3.22	33.23	37.33	74.00	-36.67	Ch.157/
3856.66				40.98	A	50.79	3.22	33.23	26.64	54.00	-27.36	B
7713.29	51.17	100	180			50.14	4.67	36.04	41.74	74.00	-32.26	
7713.29				39.93	A	50.14	4.67	36.04	30.50	54.00	-23.50	
11569.85	54.50	100	225			50.58	5.93	38.73	48.57	74.00	-25.43	
11569.85				41.21	A	50.58	5.93	38.73	35.28	54.00	-18.72	
3856.66	52.00	100	180			50.79	3.22	33.23	37.66	74.00	-36.34	Ch.157/
3856.66				41.91	A	50.79	3.22	33.23	27.57	54.00	-26.43	C
7713.29	51.00	100	180			50.14	4.67	36.04	41.57	74.00	-32.43	
7713.29				39.00	A	50.14	4.67	36.04	29.57	54.00	-24.43	
3830.00	53.17	100	135			50.74	3.23	33.20	38.86	74.00	-35.14	Ch.149/
3830.00				42.39	A	50.74	3.23	33.20	28.08	54.00	-25.92	B
7660.00	52.83	100	135			50.15	4.65	36.03	43.36	74.00	-30.64	
7660.00				42.19	A	50.15	4.65	36.03	32.72	54.00	-21.28	
3883.33	52.50	100	135			50.85	3.22	33.26	38.13	74.00	-35.87	Ch.165/
3883.33				41.32	A	50.85	3.22	33.26	26.95	54.00	-27.05	B
7766.66	52.33	100	135			50.13	4.68	36.05	42.93	74.00	-31.07	
7766.66				41.81	A	50.13	4.68	36.05	32.41	54.00	-21.59	



Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +/-FAIL	Channel/Chain Tested
3856.66	52.17	100	90			50.79	3.22	33.26	37.86	74.00	-36.14	Ch. 157/
3856.66				42.68	A	50.79	3.22	33.26	28.37	54.00	-25.63	A
7713.32	53.00	100	45			50.14	4.67	36.14	43.67	74.00	-30.33	
7713.32				44.95	A	50.14	4.67	36.14	35.62	54.00	-18.38	
11569.88	53.17	100	135			50.58	5.93	38.50	47.01	74.00	-26.99	
11569.88				40.68	A	50.58	5.93	38.50	34.52	54.00	-19.48	
3856.66	53.83	100	90			50.79	3.22	33.26	39.52	74.00	-34.48	Ch. 157/
3856.66				45.71	A	50.79	3.22	33.26	31.40	54.00	-22.60	B
7713.32	52.83	100	90			50.14	4.67	36.14	43.50	74.00	-30.50	
7713.32				43.98	A	50.14	4.67	36.14	34.65	54.00	-19.35	
11569.88	56.83	100	135			50.58	5.93	38.50	50.67	74.00	-23.33	
11569.88				43.69	A	50.58	5.93	38.50	37.53	54.00	-16.47	
3856.66	52.17	100	90			50.79	3.22	33.26	37.86	74.00	-36.14	Ch.157/
3856.66				42.19	A	50.79	3.22	33.26	27.88	54.00	-26.12	C
7713.32	52.33	100	45			50.14	4.67	36.14	43.00	74.00	-31.00	
7713.32				43.41	A	50.14	4.67	36.14	34.08	54.00	-19.92	
11569.88	55.33	100	135			50.58	5.93	38.50	49.17	74.00	-24.83	
11569.88				41.94	A	50.58	5.93	38.50	35.78	54.00	-18.22	
3830.00	55.00	100	225			50.74	3.23	33.23	40.72	74.00	-33.28	Ch. 149/
3830.00				47.59	A	50.74	3.23	33.23	33.31	54.00	-20.69	A
7660.00	55.17	100	180			50.15	4.65	36.13	45.80	74.00	-28.20	
7660.00				49.00	A	50.15	4.65	36.13	39.63	54.00	-14.37	
3883.33	52.67	100	180			50.85	3.22	33.28	38.32	74.00	-35.68	Ch.165/
3883.33				43.73	A	50.85	3.22	33.28	29.38	54.00	-24.62	A
7766.66	53.50	100	180			50.13	4.68	36.15	44.20	74.00	-29.80	
7766.66				43.71	A	50.13	4.68	36.15	34.41	54.00	-19.59	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)
Channels 149, 157, & 165
Continuous TX at Chain A, B, & C Antenna ports with Wistron Neweb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-75*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3856.66	58.33	100	45			46.53	2.58	32.71	47.09	74.00	-26.91	Ch. 157/
3856.66				45.50	A	46.53	2.58	32.71	34.26	54.00	-19.74	A
7713.29	56.67	100	0			44.86	3.70	34.96	50.47	74.00	-23.53	
7713.29				45.22	A	44.86	3.70	34.96	39.02	54.00	-14.98	
3856.66	59.50	100	0			46.53	2.58	32.71	48.26	74.00	-25.74	Ch. 157/
3856.66				51.07	A	46.53	2.58	32.71	39.83	54.00	-14.17	B
7713.29	57.17	100	0			44.86	3.70	34.96	50.97	74.00	-23.03	
7713.29				46.77	A	44.86	3.70	34.96	40.57	54.00	-13.43	
3856.66	58.50	100	315			46.53	2.58	32.71	47.26	74.00	-26.74	Ch.157/
3856.66				46.83	A	46.53	2.58	32.71	35.59	54.00	-18.41	C
7713.29	57.33	100	0			44.86	3.70	34.96	51.13	74.00	-22.87	
7713.29				43.84	A	44.86	3.70	34.96	37.64	54.00	-16.36	
3830.00	58.83	100	45			46.53	2.57	32.66	47.52	74.00	-26.48	Ch. 149/
3830.00				47.67	A	46.53	2.57	32.66	36.36	54.00	-17.64	B
7660.00	57.00	100	315			44.86	3.69	34.97	50.79	74.00	-23.21	
7660.00				45.22	A	44.86	3.69	34.97	39.01	54.00	-14.99	
3883.33	60.50	100	45			46.52	2.59	32.77	49.33	74.00	-24.67	Ch.165/
3883.33				52.35	A	46.52	2.59	32.77	41.18	54.00	-12.82	B
7766.66	56.33	100	0			44.86	3.72	34.95	50.13	74.00	-23.87	
7766.66				46.03	A	44.86	3.72	34.95	39.83	54.00	-14.17	



Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +/-FAIL	Channel/Chain Tested
3856.66	61.17	100	0			46.53	2.58	31.48	48.71	74.00	-25.29	Ch. 157/
3856.66				52.27	A	46.53	2.58	31.48	39.81	54.00	-14.19	A
7713.32	60.67	100	45			44.86	3.70	34.06	53.57	74.00	-20.43	
7713.32				54.86	A	44.86	3.70	34.06	47.76	54.00	-6.24	
11569.88	58.83	100	315			44.95	4.65	36.41	54.94	74.00	-19.06	
11569.88				45.46	A	44.95	4.65	36.41	41.57	54.00	-12.43	
3856.66	60.50	100	315			46.53	2.58	31.48	48.04	74.00	-25.96	Ch. 157/
3856.66				52.25	A	46.53	2.58	31.48	39.79	54.00	-14.21	B
7713.32	59.50	100	45			44.86	3.70	34.06	52.40	74.00	-21.60	
7713.32				52.30	A	44.86	3.70	34.06	45.20	54.00	-8.80	
11569.88	59.00	100	45			44.95	4.65	36.41	55.11	74.00	-18.89	
11569.88				47.32	A	44.95	4.65	36.41	43.43	54.00	-10.57	
3856.66	60.67	100	0			46.53	2.58	31.48	48.21	74.00	-25.79	Ch.157/
3856.66				52.44	A	46.53	2.58	31.48	39.98	54.00	-14.02	C
7713.32	60.67	100	45			44.86	3.70	34.06	53.57	74.00	-20.43	
7713.32				52.92	A	44.86	3.70	34.06	45.82	54.00	-8.18	
11569.88	62.33	100	0			44.95	4.65	36.41	58.44	74.00	-15.56	
11569.88				48.22	A	44.95	4.65	36.41	44.33	54.00	-9.67	
3830.00	61.67	100	0			46.53	2.57	31.43	49.13	74.00	-24.87	Ch. 149/
3830.00				54.32	A	46.53	2.57	31.43	41.78	54.00	-12.22	A
7660.00	60.33	100	45			44.86	3.69	34.07	53.22	74.00	-20.78	
7660.00				54.13	A	44.86	3.69	34.07	47.02	54.00	-6.98	
3883.33	59.67	100	0			46.52	2.59	31.54	47.28	74.00	-26.72	Ch.165/
3883.33				50.52	A	46.52	2.59	31.54	38.13	54.00	-15.87	A
7766.66	60.00	100	45			44.86	3.72	34.05	52.90	74.00	-21.10	
7766.66				53.67	A	44.86	3.72	34.05	46.57	54.00	-7.43	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)
Channels 149, 157, & 165
Continuous TX at Triple Chain ABC Antenna ports with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-46*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +/-FAIL	Channel/Chain Tested
3830.00	53.17	100	135			50.74	3.23	33.20	38.86	74.00	-35.14	Ch. 149/
3830.00				42.39	A	50.74	3.23	33.20	28.08	54.00	-25.92	ABC
7660.00	52.83	100	135			50.15	4.65	36.03	43.36	74.00	-30.64	
7660.00				42.19	A	50.15	4.65	36.03	32.72	54.00	-21.28	
3856.66	51.83	100	180			50.79	3.22	33.23	37.49	74.00	-36.51	Ch. 157/
3856.66				40.77	A	50.79	3.22	33.23	26.43	54.00	-27.57	ABC
7713.29	51.83	100	225			50.14	4.67	36.04	42.40	74.00	-31.60	
7713.29				40.22	A	50.14	4.67	36.04	30.79	54.00	-23.21	
11569.85	54.00	100	270			50.58	5.93	38.73	48.07	74.00	-25.93	
11569.85				41.62	A	50.58	5.93	38.73	35.69	54.00	-18.31	
3883.33	52.50	100	135			50.85	3.22	33.26	38.13	74.00	-35.87	Ch.165/
3883.33				41.32	A	50.85	3.22	33.26	26.95	54.00	-27.05	ABC
7766.66	52.33	100	135			50.13	4.68	36.05	42.93	74.00	-31.07	
7766.66				41.81	A	50.13	4.68	36.05	32.41	54.00	-21.59	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +/-FAIL	Channel/Chain Tested
3830.00	55.00	100	225			50.74	3.23	33.23	40.72	74.00	-33.28	Ch. 149/
3830.00				47.59	A	50.74	3.23	33.23	33.31	54.00	-20.69	ABC
7660.00	55.17	100	180			50.15	4.65	36.13	45.80	74.00	-28.20	
7660.00				49.00	A	50.15	4.65	36.13	39.63	54.00	-14.37	
3856.66	53.67	100	90			50.79	3.22	33.26	39.36	74.00	-34.64	Ch. 157/
3856.66				44.19	A	50.79	3.22	33.26	29.88	54.00	-24.12	ABC
7713.32	52.50	100	90			50.14	4.67	36.14	43.17	74.00	-30.83	
7713.32				43.94	A	50.14	4.67	36.14	34.61	54.00	-19.39	
11569.88	55.50	100	135			50.58	5.93	38.50	49.34	74.00	-24.66	
11569.88				43.15	A	50.58	5.93	38.50	36.99	54.00	-17.01	
3883.33	52.67	100	180			50.85	3.22	33.28	38.32	74.00	-35.68	Ch.165/
3883.33				43.73	A	50.85	3.22	33.28	29.38	54.00	-24.62	ABC
7766.66	53.50	100	180			50.13	4.68	36.15	44.20	74.00	-29.80	
7766.66				43.71	A	50.13	4.68	36.15	34.41	54.00	-19.59	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)
Channels 149, 157, & 165
Continuous TX at Triple Chain ABC Antenna ports with Wistron Neweb Corp. Antennas
Aegis Labs, Inc. File #: INTEL-080317-75*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/ Chain Tested
3830.00	52.00	100	0			36.36	2.57	32.66	50.87	74.00	-23.13	Ch. 149/
3830.00				43.63	A	36.36	2.57	32.66	42.50	54.00	-11.50	ABC
7660.00	50.83	100	45			36.66	3.69	34.97	52.82	74.00	-21.18	
7660.00				39.17	A	36.66	3.69	34.97	41.16	54.00	-12.84	
11490.00	50.83	100	0			36.52	4.63	36.79	55.74	74.00	-18.26	
11490.00				37.81	A	36.52	4.63	36.79	42.72	54.00	-11.28	
3856.66	51.33	100	0			36.33	2.58	32.71	50.29	74.00	-23.71	Ch. 157/
3856.66				41.10	A	36.33	2.58	32.71	40.06	54.00	-13.94	ABC
7713.33	51.00	100	315			36.69	3.70	34.96	52.97	74.00	-21.03	
7713.33				38.39	A	36.69	3.70	34.96	40.36	54.00	-13.64	
11570.00	51.17	100	45			36.54	4.65	36.90	56.17	74.00	-17.83	
11570.00				39.86	A	36.54	4.65	36.90	44.86	54.00	-9.14	
3883.33	52.00	100	0			36.31	2.59	32.77	51.04	74.00	-22.96	Ch.165/
3883.33				43.06	A	36.31	2.59	32.77	42.10	54.00	-11.90	ABC
7766.66	49.83	100	0			36.71	3.72	34.95	51.79	74.00	-22.21	
7766.66				38.32	A	36.71	3.72	34.95	40.28	54.00	-13.72	
11650.00	51.83	100	45			36.57	4.66	37.01	56.93	74.00	-17.07	
11650.00				40.42	A	36.57	4.66	37.01	45.52	54.00	-8.48	



Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Channel/ Chain Tested</i>
3830.00	53.33	100	0			36.36	2.57	31.43	50.96	74.00	-23.04	Ch. 149/
3830.00				46.10	A	36.36	2.57	31.43	43.73	54.00	-10.27	ABC
7660.00	52.50	100	315			36.66	3.69	34.07	53.59	74.00	-20.41	
7660.00				45.70	A	36.66	3.69	34.07	46.79	54.00	-7.21	
11490.00	52.33	100	0			36.52	4.63	36.29	56.74	74.00	-17.26	
11490.00				42.05	A	36.52	4.63	36.29	46.46	54.00	-7.54	
3856.66	52.83	100	0			36.33	2.58	31.48	50.56	74.00	-23.44	Ch. 157/
3856.66				45.67	A	36.33	2.58	31.48	43.40	54.00	-10.60	ABC
7713.33	52.67	100	45			36.69	3.70	34.06	53.74	74.00	-20.26	
7713.33				45.57	A	36.69	3.70	34.06	46.64	54.00	-7.36	
11570.00	53.17	100	45			36.54	4.65	36.41	57.69	74.00	-16.32	
11570.00				42.73	A	36.54	4.65	36.41	47.25	54.00	-6.76	
3883.33	53.17	100	0			36.31	2.59	31.54	50.99	74.00	-23.01	Ch.165/
3883.33				45.43	A	36.31	2.59	31.54	43.25	54.00	-10.75	ABC
7766.66	51.50	100	45			36.71	3.72	34.05	52.56	74.00	-21.44	
7766.66				43.32	A	36.71	3.72	34.05	44.38	54.00	-9.62	
11650.00	54.67	100	45			36.57	4.66	36.54	59.30	74.00	-14.70	
11650.00				41.35	A	36.57	4.66	36.54	45.98	54.00	-8.02	

**RADIATED EMISSIONS TEST RESULTS**

CLIENT:	Intel Corporation	DATE:	04/08/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	KN/RC
SERIAL NUMBER:	0016EA038A16	SITE #:	2
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot in 802.11n (5745-5825 MHz) mode 40MHz Wide.	TEMPERATURE:	22° C
		HUMIDITY:	39% RH
		TIME:	8:00 AM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> • 120VAC / 60 Hz.

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)
Channels 151 & 159
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5755.00	61.17	100	315			3.99	35.11	100.26			Ch. 151
5755.00				50.83	A	3.99	35.11	89.92			
5795.00	59.83	100	315			4.00	35.17	99.00			Ch. 159
5795.00				49.00	A	4.00	35.17	88.17			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5755.00	62.67	100	225			3.99	34.96	101.62			Ch. 151
5755.00				52.33	A	3.99	34.96	91.28			
5795.00	62.00	100	225			4.00	35.03	101.03			Ch. 159
5795.00				51.17	A	4.00	35.03	90.20			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)
Channels 151 & 159
Continuous TX at Chain A Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-54

RADIATED EMISSIONS - Horizontal Antenna Polarization										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	34.00	100	315		3.98	35.06	73.04	80.26	-7.23	Ch. 151
5850.00	30.33	100	315		4.02	35.26	69.61	79.00	-9.39	Ch. 159

RADIATED EMISSIONS - Vertical Antenna Polarization										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	34.00	100	225		3.98	34.91	72.88	81.62	-8.74	Ch. 151
5850.00	31.83	100	225		4.02	35.13	70.98	81.03	-10.05	Ch. 159

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)
Channels 151 & 159
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5755.00	60.83	100	315			3.99	35.11	99.92			Ch. 151
5755.00				50.50	A	3.99	35.11	89.59			
5795.00	59.17	100	315			4.00	35.17	98.34			Ch. 159
5795.00				49.67	A	4.00	35.17	88.84			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5755.00	65.00	100	180			3.99	34.96	103.95			Ch. 151
5755.00				54.67	A	3.99	34.96	93.62			
5795.00	63.50	100	180			4.00	35.03	102.53			Ch. 159
5795.00				54.00	A	4.00	35.03	93.03			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".



Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)
Channels 151 & 159
Continuous TX at Chain B Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-55*

RADIATED EMISSIONS - Horizontal Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	35.33	100	315		3.98	35.06	74.37	79.92	-5.56	Ch. 151
5850.00	31.33	100	315		4.02	35.26	70.61	78.34	-7.73	Ch. 159

RADIATED EMISSIONS - Vertical Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	32.33	100	180		3.98	34.91	71.21	83.95	-12.74	Ch. 151
5850.00	31.67	100	180		4.02	35.13	70.82	82.53	-11.71	Ch. 159

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = F_m - \Delta m$$

Where

BE = Band Edge Field Strength

F_m = Measured Fundamental (Peak or Average)

Δ_m = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)
Channels 151 & 159
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5755.00	64.83	100	135			3.99	35.11	103.92			Ch. 151
5755.00				54.33	A	3.99	35.11	93.42			
5795.00	64.17	100	135			4.00	35.17	103.34			Ch. 159
5795.00				53.33	A	4.00	35.17	92.50			

RADIATED EMISSIONS - Vertical Antenna Polarization											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5755.00	60.67	100	225			3.99	34.96	99.62			Ch. 151
5755.00				49.67	A	3.99	34.96	88.62			
5795.00	57.17	100	225			4.00	35.03	96.20			Ch. 159
5795.00				47.50	A	4.00	35.03	86.53			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)
Channels 151 & 159
Continuous TX at Chain C Antenna port with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-56

RADIATED EMISSIONS - Horizontal Antenna Polarization										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	33.67	100	135		3.98	35.06	72.71	83.92	-11.22	Ch. 151
5850.00	32.17	100	225		4.02	35.26	71.45	83.34	-11.89	Ch. 159

RADIATED EMISSIONS - Vertical Antenna Polarization										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	30.00	100	225		3.98	34.91	68.88	79.62	-10.74	Ch. 151
5850.00	30.83	100	225		4.02	35.13	69.98	76.20	-6.22	Ch. 159

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

Δm = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)
Channels 151 & 159
Continuous TX at Chain A, B, & C Antenna ports with Ethertronics Antennas
Aegis Labs, Inc. File #: INTEL-080317-46*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3856.66	53.33	100	135			46.53	2.58	33.18	42.57	74.00	-31.43	Ch. 151/
3856.66				42.66	A	46.53	2.58	33.18	31.90	54.00	-22.10	A
7713.29	53.67	100	135			44.86	3.70	37.43	49.94	74.00	-24.06	
7713.29				44.60	A	44.86	3.70	37.43	40.87	54.00	-13.13	
3856.66	54.17	100	225			46.53	2.58	33.18	43.41	74.00	-30.59	Ch. 151/
3856.66				45.24	A	46.53	2.58	33.18	34.48	54.00	-19.52	B
7713.29	52.67	100	135			44.86	3.70	37.43	48.94	74.00	-25.06	
7713.29				43.67	A	44.86	3.70	37.43	39.94	54.00	-14.06	
3856.66	54.83	100	225			46.53	2.58	33.18	44.07	74.00	-29.93	Ch.151/
3856.66				44.75	A	46.53	2.58	33.18	33.99	54.00	-20.01	C
7713.29	53.00	100	135			44.86	3.70	37.43	49.27	74.00	-24.73	
7713.29				43.15	A	44.86	3.70	37.43	39.42	54.00	-14.58	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3856.66	54.17	100	180			46.53	2.58	32.83	43.05	74.00	-30.95	Ch. 159/
3856.66				45.63	A	46.53	2.58	32.83	34.51	54.00	-19.49	A
7713.32	56.50	100	135			44.86	3.70	37.29	52.62	74.00	-21.38	
7713.32				51.02	A	44.86	3.70	37.29	47.14	54.00	-6.86	
3856.66	53.67	100	180			46.53	2.58	32.83	42.55	74.00	-31.45	Ch. 159/
3856.66				45.13	A	46.53	2.58	32.83	34.01	54.00	-19.99	B
7713.32	55.33	100	225			44.86	3.70	37.29	51.45	74.00	-22.55	
7713.32				49.39	A	44.86	3.70	37.29	45.51	54.00	-8.49	
3856.66	54.17	100	225			46.53	2.58	32.83	43.05	74.00	-30.95	Ch.159/
3856.66				44.80	A	46.53	2.58	32.83	33.68	54.00	-20.32	C
7713.32	56.00	100	135			44.86	3.70	37.29	52.12	74.00	-21.88	
7713.32				51.01	A	44.86	3.70	37.29	47.13	54.00	-6.87	

**PEAK TRANSMIT POWER**

CLIENT:	Intel Corporation	DATE:	04/07/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	RC/KN
SERIAL NUMBER:	0016EA038A16	SITE #:	1
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot	TEMPERATURE:	25 deg. C
		HUMIDITY:	29% RH
		TIME:	9:00 AM

Description:	The maximum peak output power of the intentional radiator shall not exceed 1 watt.
Results:	Passed (See Data Sheet)
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none">• 120VAC / 60 Hz.

Peak Transmit Power Limits	
Frequency (MHz)	Output Power (W)
5745-5825	1
2412-2462	1



Peak Transmit Power (Continued)

Mode	Channel	Frequency (MHz)	Chain	Data Rate (Mbps)	Average Power (dBm)	Average Power (mW)	Peak Power (dBm)	Peak Power (mW)
802.11a	149	5745	A	6	16.14	41.15	24.04	253.73
802.11a	157	5785	A	6	16.14	41.15	24.04	253.73
802.11a	165	5825	A	6	16.04	40.21	23.94	247.95
802.11a	149	5745	B	6	16.34	43.09	24.34	271.87
802.11a	157	5785	B	6	16.34	43.09	24.34	271.87
802.11a	165	5825	B	6	16.44	44.09	24.44	278.20
802.11a	149	5745	C	6	16.24	42.11	24.44	278.20
802.11a	157	5785	C	6	16.54	45.12	24.54	284.69
802.11a	165	5825	C	6	16.14	41.15	24.34	271.87
802.11b	1	2412	A	1	16.50	44.67	19.70	93.33
802.11b	6	2437	A	1	16.15	41.21	19.15	82.22
802.11b	11	2462	A	1	16.30	42.66	19.25	84.14
802.11b	1	2412	B	1	16.50	44.67	19.60	91.20
802.11b	6	2437	B	1	16.40	43.65	19.50	89.13
802.11b	11	2462	B	1	16.20	41.69	19.30	85.11
802.11b	1	2412	C	1	16.10	40.74	19.10	81.28
802.11b	6	2437	C	1	16.50	44.67	19.50	89.13
802.11b	11	2462	C	1	16.50	44.67	19.50	89.13
802.11g	1	2412	A	6	14.64	29.13	21.44	139.43
802.11g	2	2417	A	6	16.54	45.12	23.54	226.13
802.11g	6	2437	A	6	16.64	46.17	23.74	236.79
802.11g	10	2457	A	6	16.64	46.17	23.69	234.08
802.11g	11	2462	A	6	14.44	27.82	21.34	136.26
802.11g	1	2412	B	6	14.24	26.57	21.24	133.16
802.11g	2	2417	B	6	16.54	45.12	23.84	242.31
802.11g	6	2437	B	6	16.44	44.09	23.74	236.79
802.11g	10	2457	B	6	16.24	42.11	23.54	226.13
802.11g	11	2462	B	6	14.14	25.96	21.14	130.13
802.11g	1	2412	C	6	14.14	25.96	21.04	127.16
802.11g	2	2417	C	6	16.64	46.17	24.04	253.73
802.11g	6	2437	C	6	16.44	44.09	23.84	242.31
802.11g	10	2457	C	6	16.24	42.11	23.64	231.40
802.11g	11	2462	C	6	14.14	25.96	21.04	127.16



Peak Transmit Power (Continued)

Mode	Channel	Frequency (MHz)	Chain	Data Rate (Mbps)	Average Power (dBm)	Average Power (mW)	Peak Power (dBm)	Peak Power (mW)
802.11n	1	2412	A	HT0	14.14	25.96	21.04	127.16
802.11n	2	2417	A	HT0	16.24	42.11	23.64	231.40
802.11n	6	2437	A	HT0	16.54	45.12	23.84	242.31
802.11n	10	2457	A	HT0	16.54	45.12	23.74	236.79
802.11n	11	2462	A	HT0	13.84	24.23	20.94	124.27
802.11n	1	2412	B	HT0	13.94	24.80	20.94	124.27
802.11n	2	2417	B	HT0	16.34	43.09	23.64	231.40
802.11n	6	2437	B	HT0	16.24	42.11	23.54	226.13
802.11n	10	2457	B	HT0	16.44	44.09	23.74	236.79
802.11n	11	2462	B	HT0	14.04	25.37	21.04	127.16
802.11n	1	2412	C	HT0	13.94	24.80	21.24	133.16
802.11n	2	2417	C	HT0	16.44	44.09	23.84	242.31
802.11n	6	2437	C	HT0	16.34	43.09	23.74	236.79
802.11n	10	2457	C	HT0	16.24	42.11	23.64	231.40
802.11n	11	2462	C	HT0	14.04	25.37	21.24	133.16
802.11n (40MHz)	3(F)	2422	A	HT0	13.74	23.68	22.54	179.62
802.11n (40MHz)	6(F)	2437	A	HT0	13.54	22.61	22.64	183.81
802.11n (40MHz)	9(F)	2452	A	HT0	13.74	23.68	22.54	179.62
802.11n (40MHz)	3(F)	2422	B	HT0	14.24	26.57	23.04	201.54
802.11n (40MHz)	6(F)	2437	B	HT0	14.14	25.96	22.94	196.95
802.11n (40MHz)	9(F)	2452	B	HT0	14.04	25.37	22.84	192.47
802.11n (40MHz)	3(F)	2422	C	HT0	13.94	24.80	22.94	196.95
802.11n (40MHz)	6(F)	2437	C	HT0	13.74	23.68	22.74	188.09
802.11n (40MHz)	9(F)	2452	C	HT0	14.14	25.96	23.04	201.54
802.11n	149	5745	A	HT0	16.04	40.21	23.94	247.95
802.11n	157	5785	A	HT0	16.14	41.15	23.99	250.82
802.11n	165	5825	A	HT0	16.04	40.21	23.94	247.95
802.11n	149	5745	B	HT0	16.19	41.63	24.54	284.69
802.11n	157	5785	B	HT0	16.29	42.60	24.64	291.32
802.11n	165	5825	B	HT0	16.24	42.11	24.44	278.20
802.11n	149	5745	C	HT0	16.14	41.15	24.34	271.87
802.11n	157	5785	C	HT0	16.44	44.09	24.44	278.20
802.11n	165	5825	C	HT0	16.04	40.21	24.04	253.73
802.11n (40MHz)	151(F)	5755	A	HT0	16.50	44.65	23.40	218.78
802.11n (40MHz)	159(F)	5795	A	HT0	16.57	45.37	23.10	204.17
802.11n (40MHz)	151(F)	5755	B	HT0	16.63	46.00	23.00	199.53
802.11n (40MHz)	159(F)	5795	B	HT0	16.51	44.75	22.80	190.55
802.11n (40MHz)	151(F)	5755	C	HT0	16.35	43.13	23.00	199.53
802.11n (40MHz)	159(F)	5795	C	HT0	16.16	41.28	23.10	204.17



Peak Transmit Power (Continued)

Triple Chain ABC Aggregate Power

Mode	Channel	Frequency (MHz)	Chain	Data Rate (Mbps)	Avg. Output Power (dBm)	Avg. Output Power (mW)	Peak Output Power (dBm)	Peak Output Power (mW)
802.11n (20MHz)	1	2412	ABC	HT16	16.49	44.58	26.36	432.06
802.11n (20MHz)	6	2437	ABC	HT16	16.58	45.47	26.36	432.78
802.11n (20MHz)	11	2462	ABC	HT16	16.45	44.15	26.41	437.46
802.11n (40MHz)	3(F)	2422	ABC	HT16	16.49	44.60	26.36	432.33
802.11n (40MHz)	6(F)	2437	ABC	HT16	16.51	44.75	26.24	420.60
802.11n (40MHz)	9(F)	2452	ABC	HT16	16.51	44.73	26.31	427.73
802.11n (20MHz)	149	5745	ABC	HT16	16.53	44.94	26.44	440.94
802.11n (20MHz)	157	5785	ABC	HT16	16.34	43.00	26.18	414.62
802.11n (20MHz)	165	5825	ABC	HT16	16.41	43.75	26.19	416.14
802.11n (40MHz)	151(F)	5755	ABC	HT16	16.49	44.53	26.31	427.13
802.11n (40MHz)	159(F)	5795	ABC	HT16	16.47	44.32	26.11	408.13

NOTE: The output power measurement is conducted.

(F) = Fat Channel

**6dB EMISSIONS BANDWIDTH**


CLIENT:	Intel Corporation	DATE:	04-16-08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	KN/RC
SERIAL NUMBER:	0016EA038A16	SITE #:	1
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot	TEMPERATURE:	25° C
		HUMIDITY:	31% RH
		TIME:	2:30 PM

Description:	The minimum 6dB bandwidth shall be at least 500 kHz.
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none">• 120VAC / 60 Hz.



6dB Emissions Bandwidth (Continued)

802.11a Mode

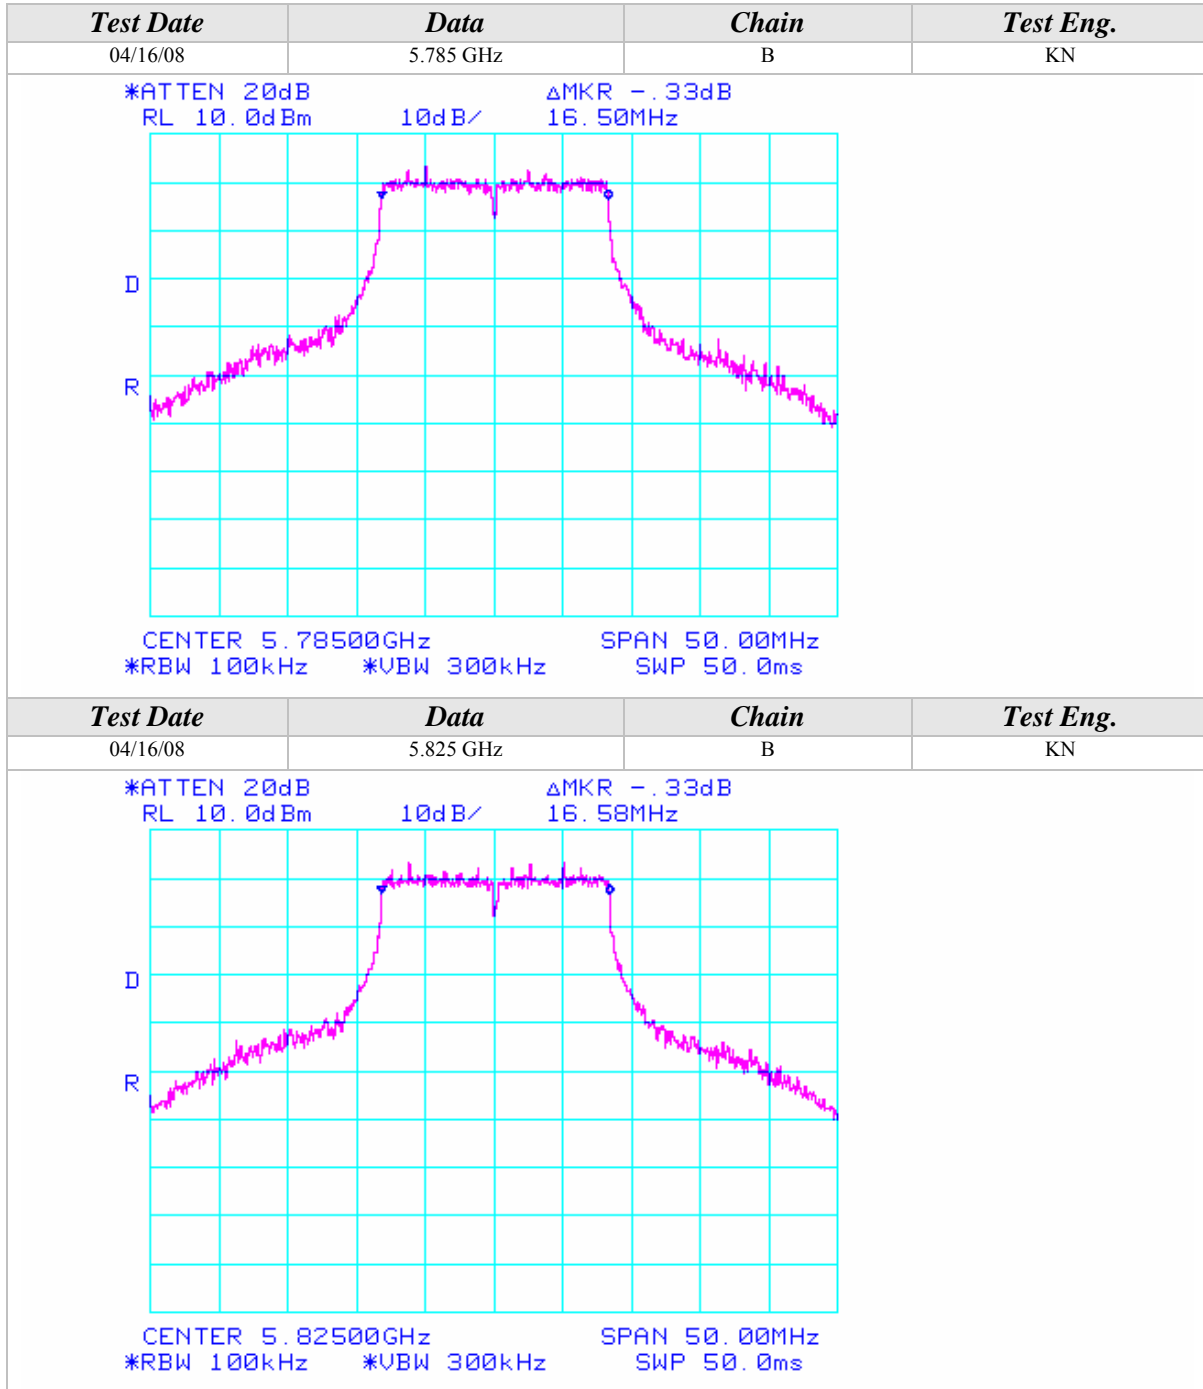

**PEAK POWER SPECTRAL DENSITY**

CLIENT:	Intel Corporation	DATE:	04/18/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	KN
SERIAL NUMBER:	0016EA038A16	SITE #:	2
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot	TEMPERATURE:	22 deg. C
		HUMIDITY:	25% RH
		TIME:	4:00 PM


Description:	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none">• 120VAC / 60 Hz.

Peak Power Spectral Density Limits	
Frequency (MHz)	Limit (dBm)
5725-5850	8
2412-2462	8



Peak Power Spectral Density (Continued)

802.11a Mode


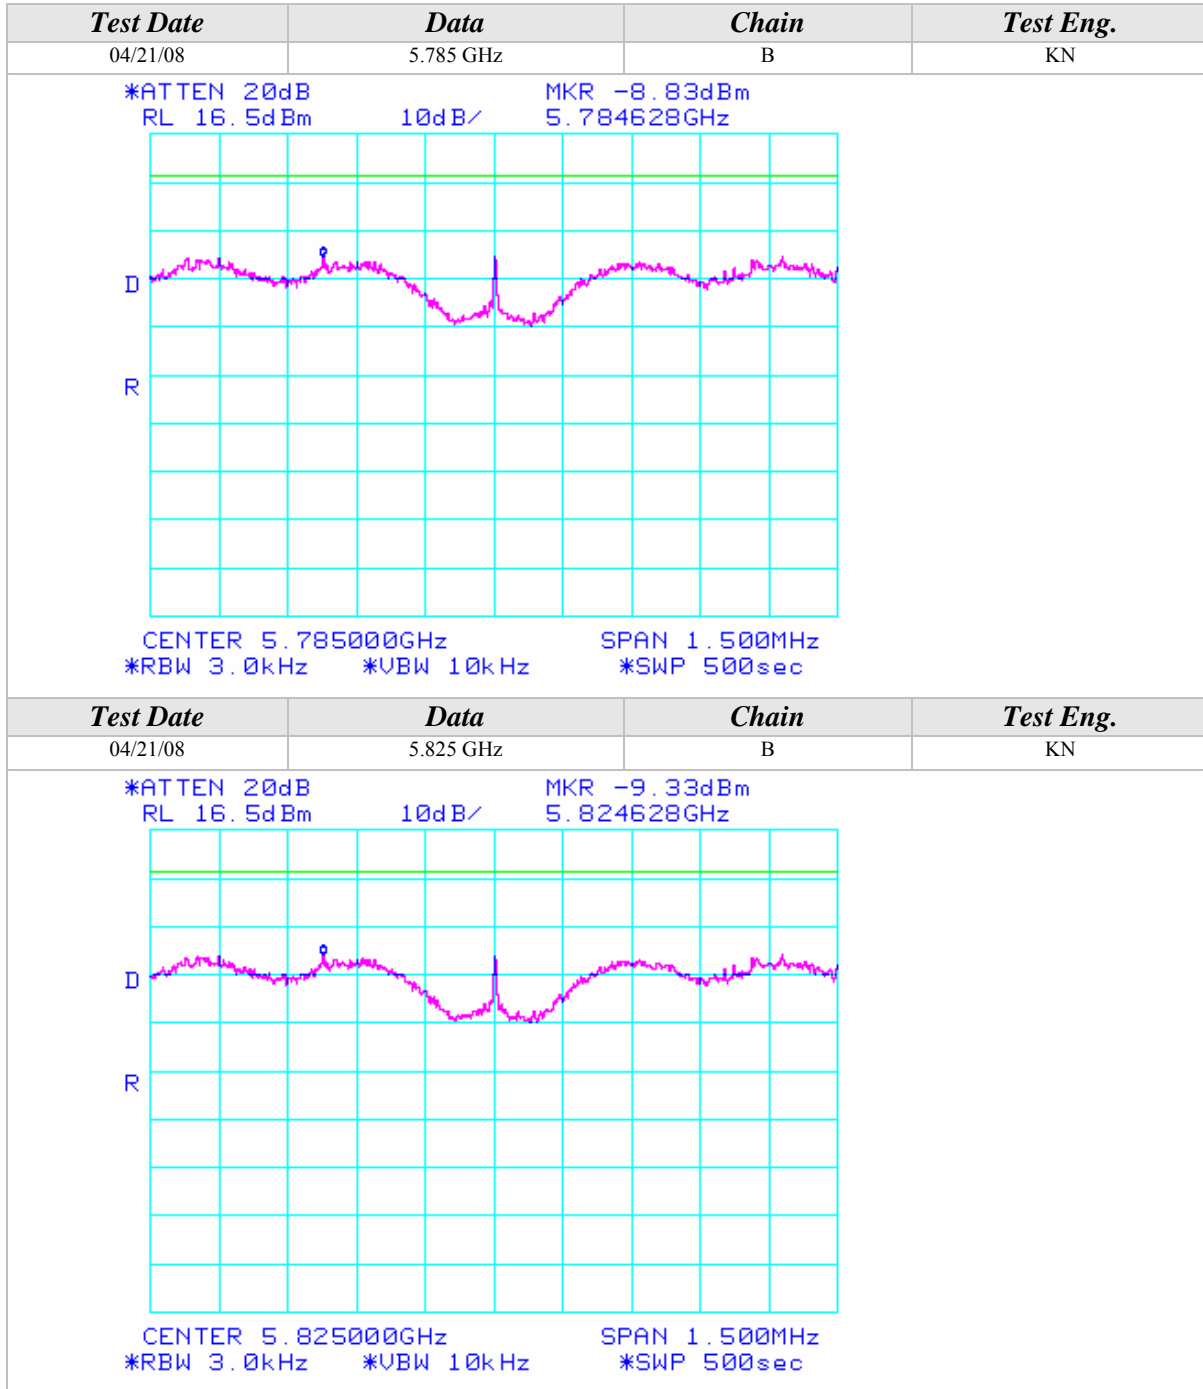


Peak Power Spectral Density (Continued)

802.11a Mode


Test Date	Data	Chain	Test Eng.
04/23/08	5.745 GHz	C	KN
<p>*ATTEN 20dB MKR -8.17dBm RL 16.5dBm 10dB/ 5.744388GHz</p> <p>CENTER 5.745000GHz SPAN 1.500MHz *RBW 3.0kHz *VBW 10kHz *SWP 500sec</p>			
Test Date	Data	Chain	Test Eng.
04/23/08	5.785 GHz	C	KN
<p>*ATTEN 20dB MKR -8.17dBm RL 16.5dBm 10dB/ 5.784363GHz</p> <p>CENTER 5.785000GHz SPAN 1.500MHz *RBW 3.0kHz *VBW 10kHz *SWP 500sec</p>			

Peak Power Spectral Density (Continued)

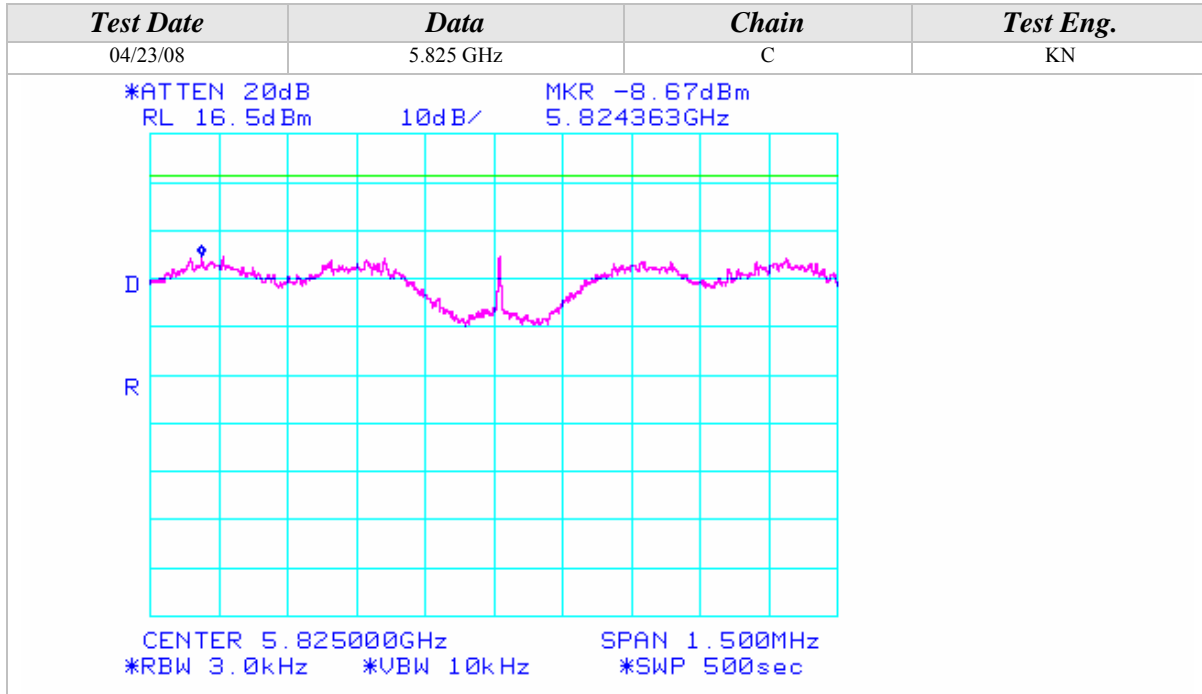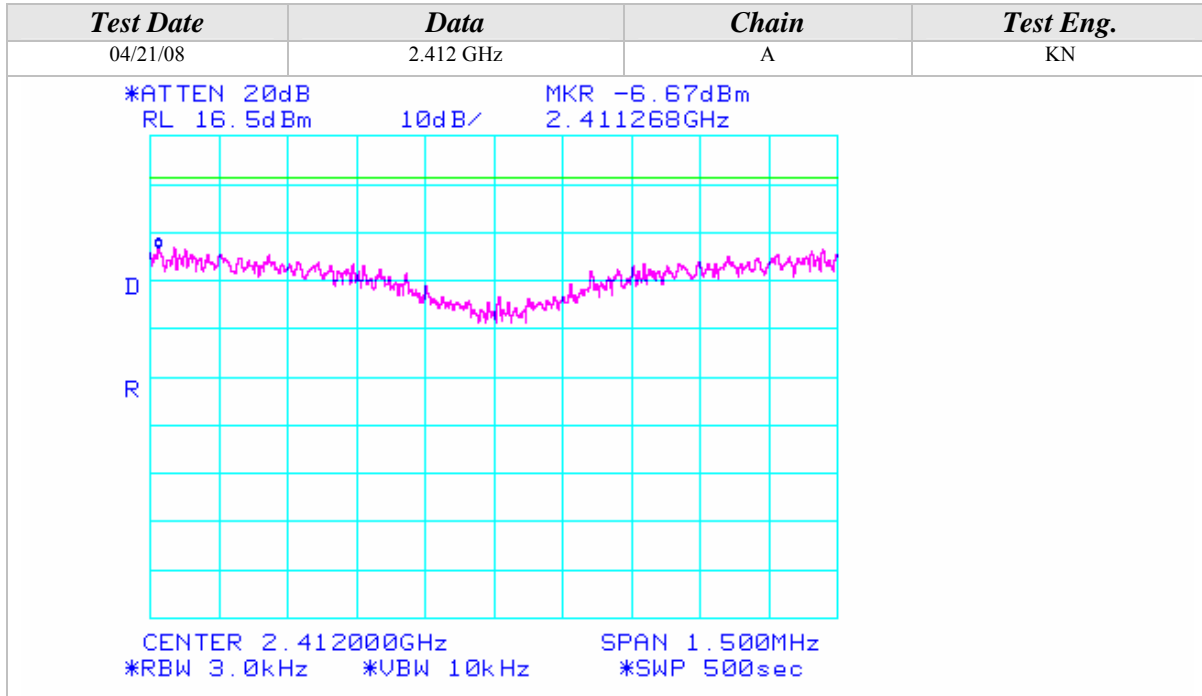802.11a Mode

802.11b Mode


Peak Power Spectral Density (Continued)

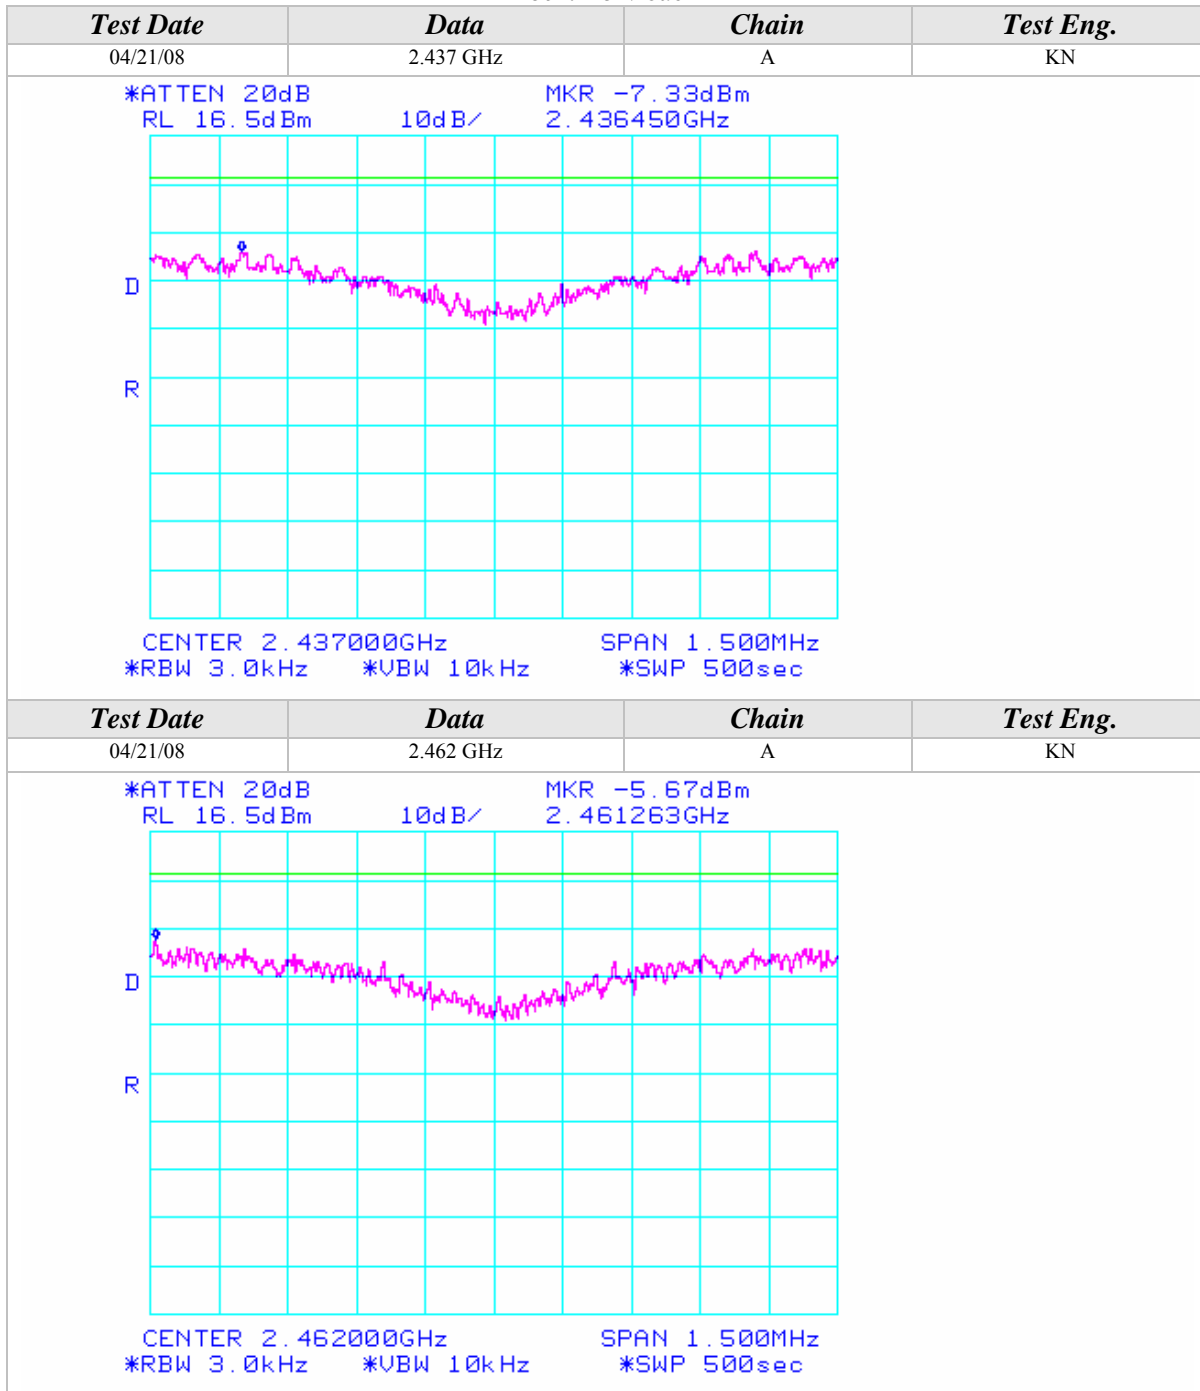
802.11b Mode





Peak Power Spectral Density (Continued)


802.11b Mode

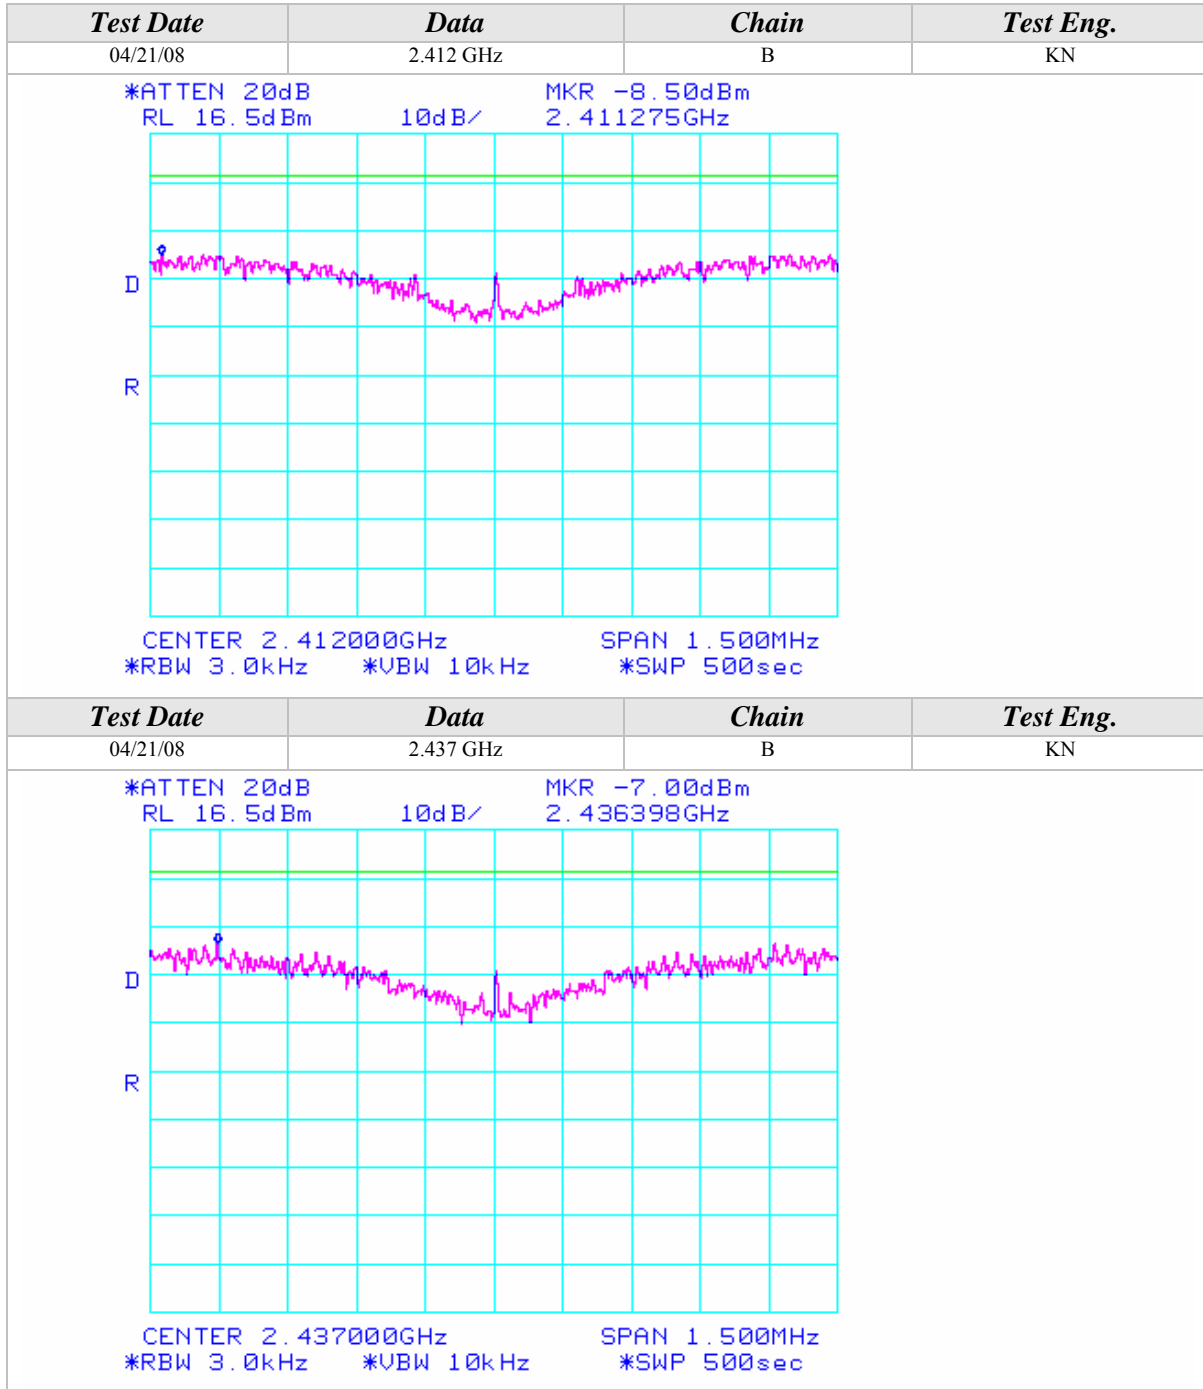



Peak Power Spectral Density (Continued)


802.11b Mode

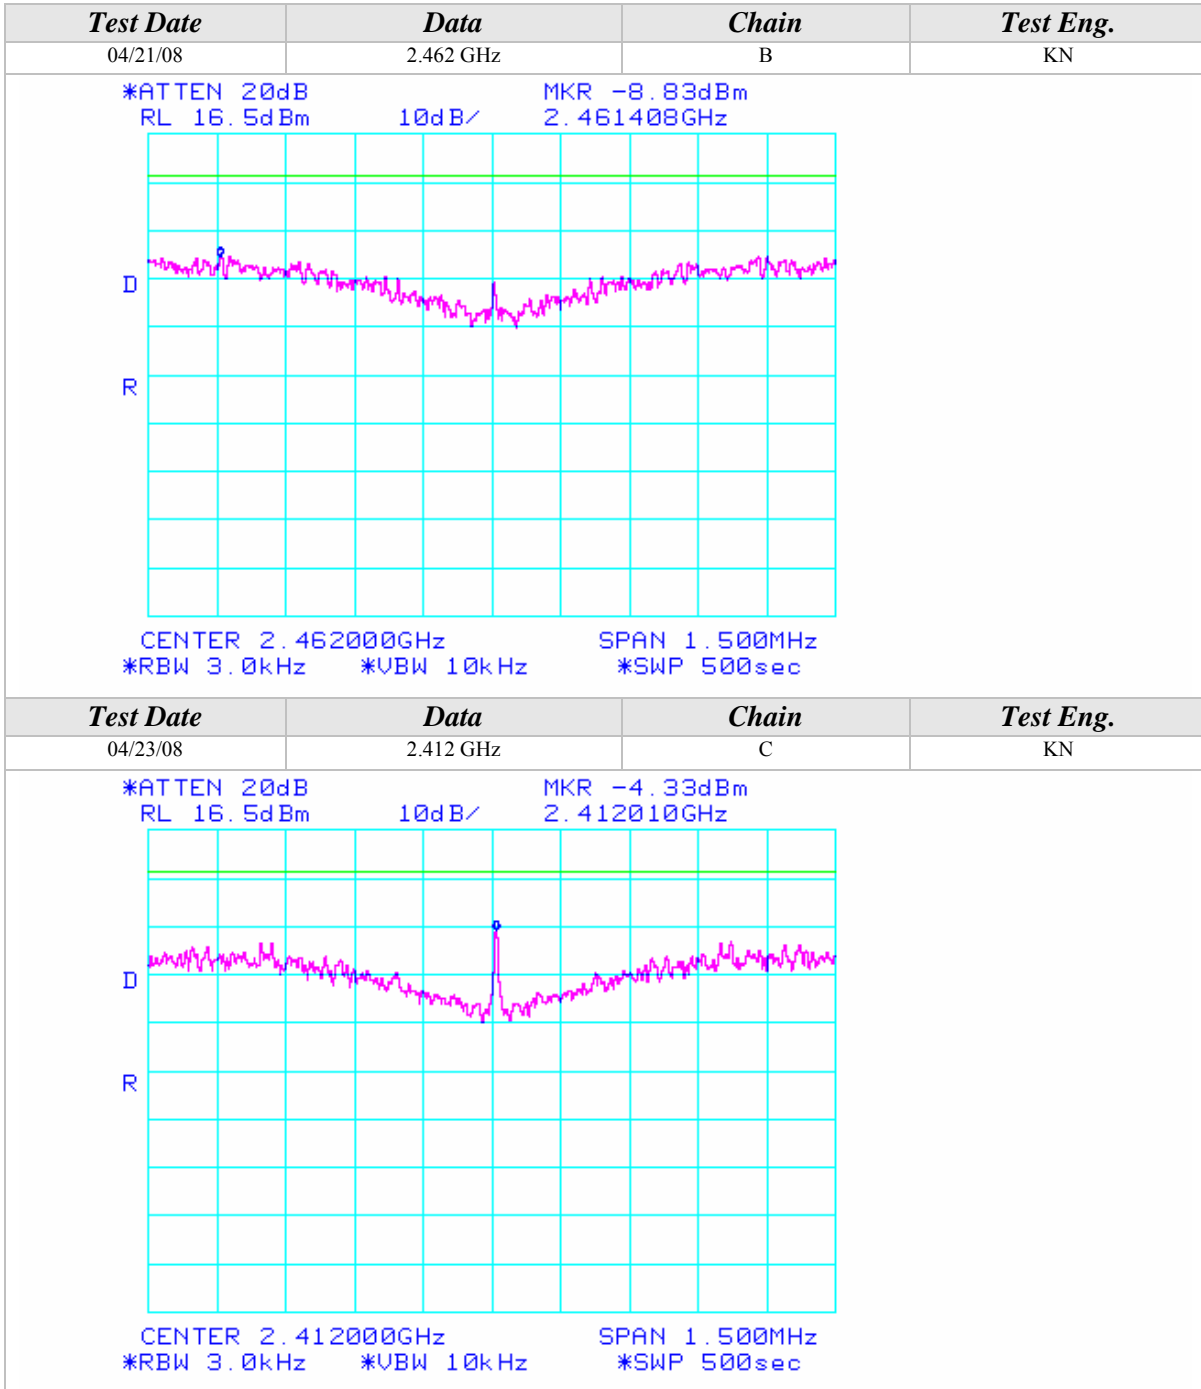



Peak Power Spectral Density (Continued)


802.11g Mode

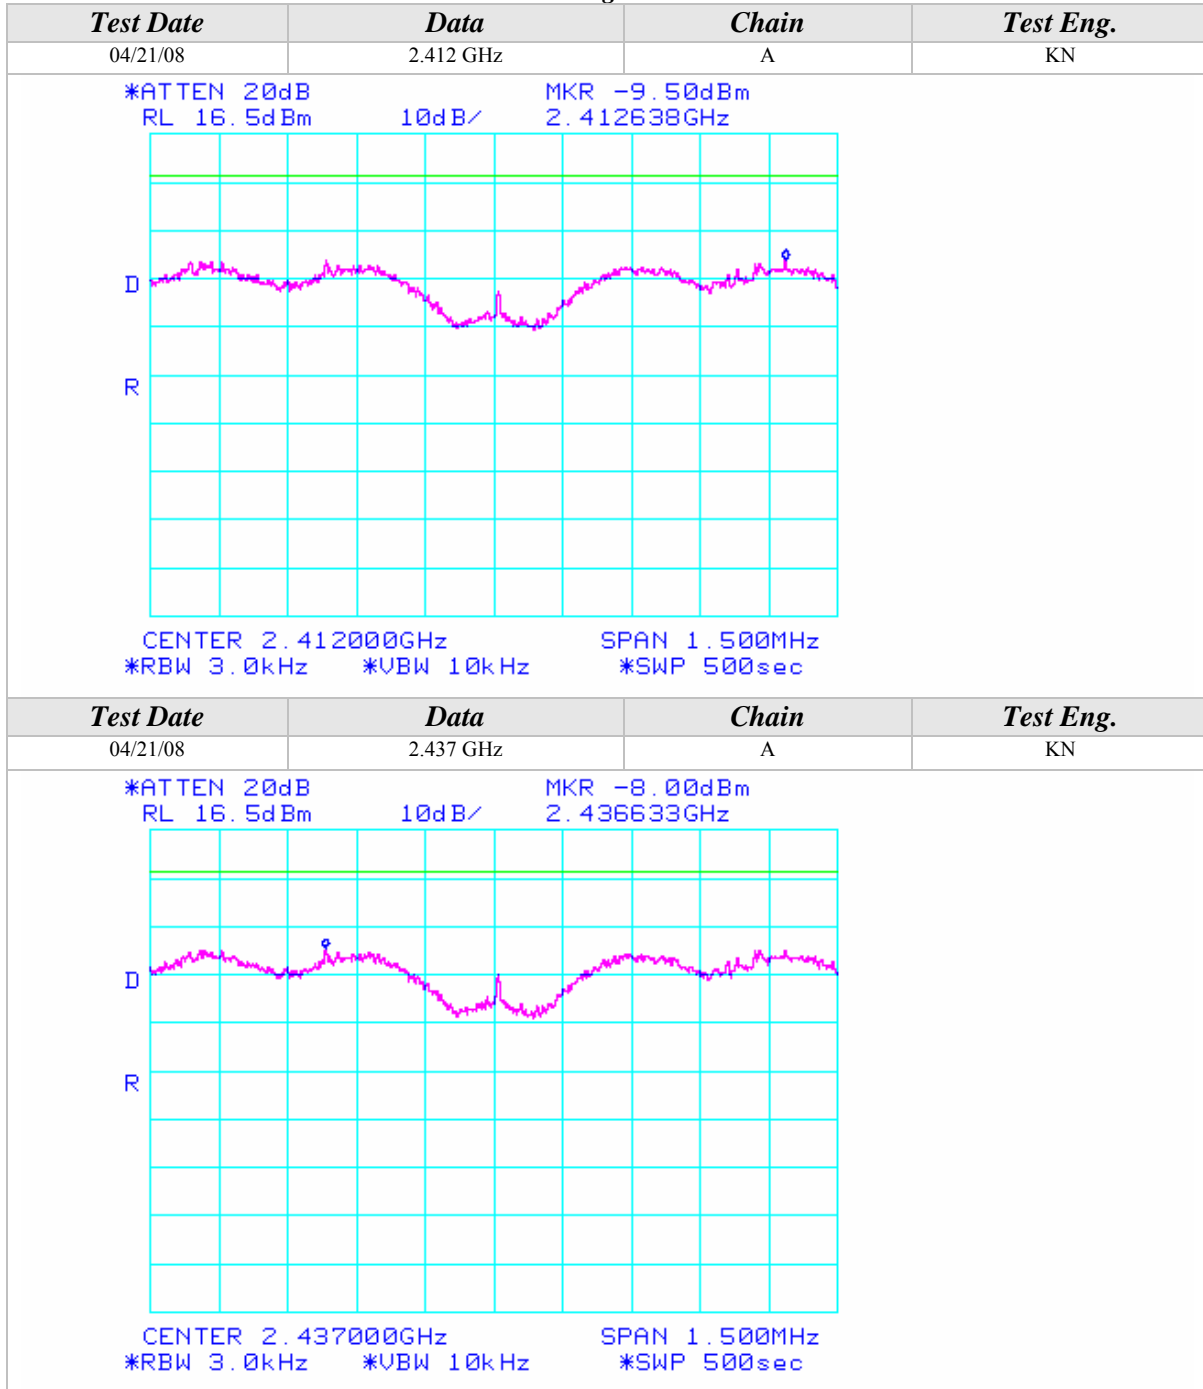



Peak Power Spectral Density (Continued)


802.11g Mode

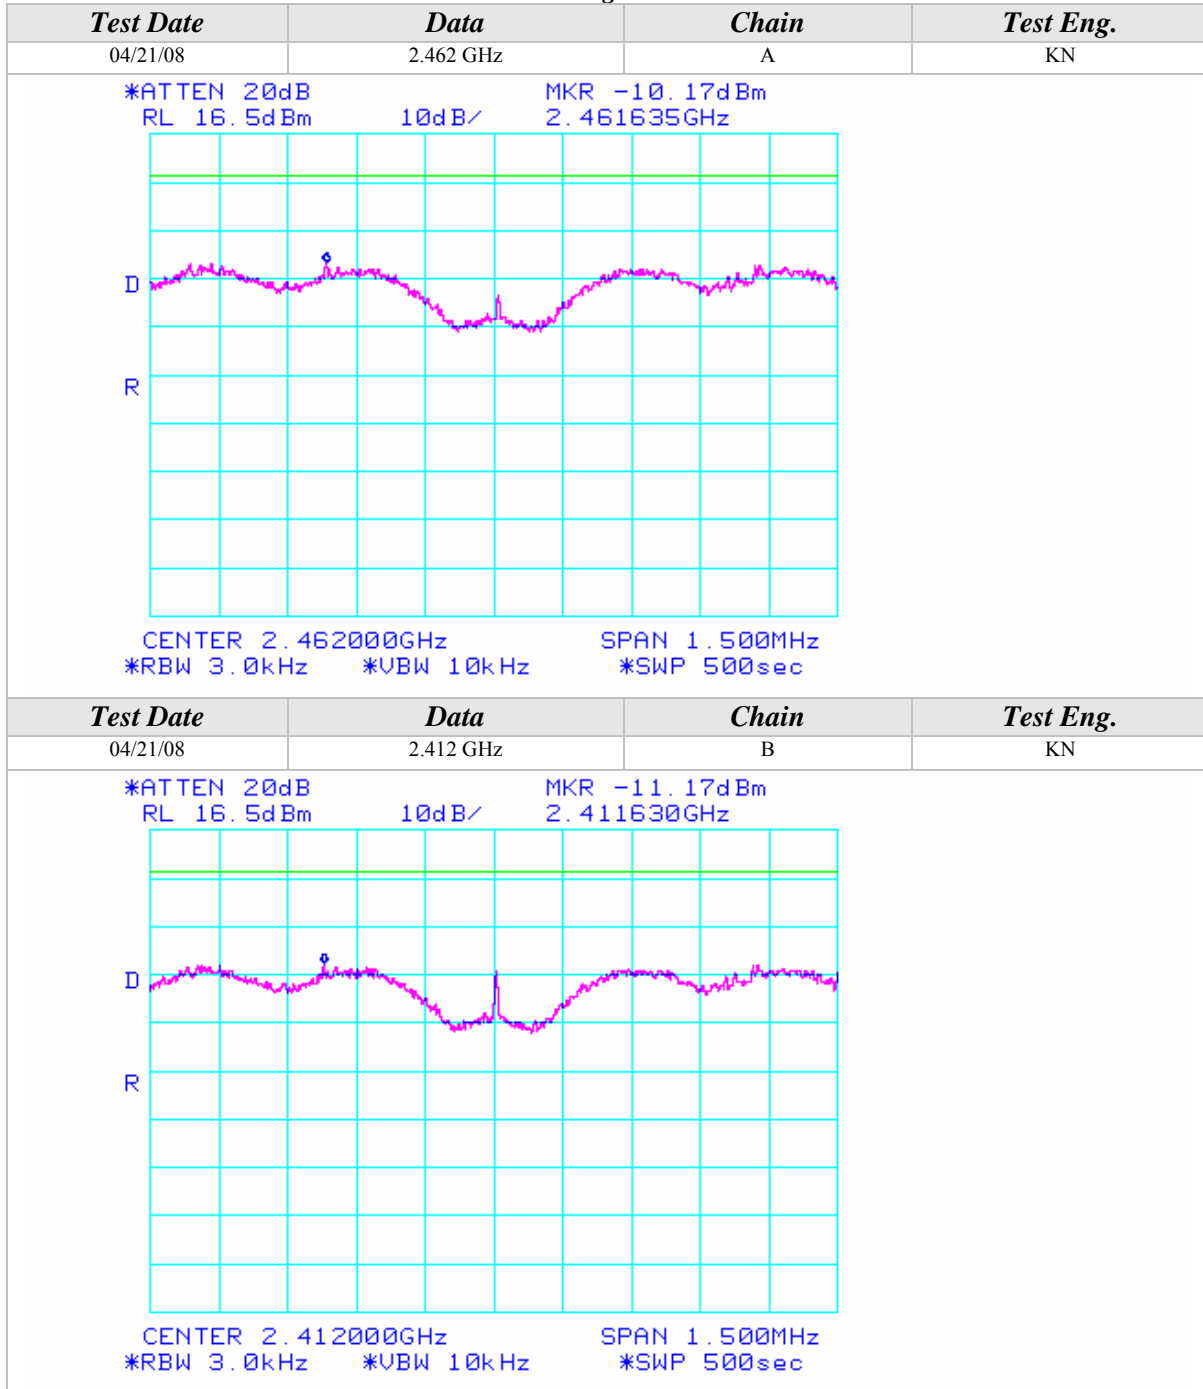



Peak Power Spectral Density (Continued)


802.11g Mode

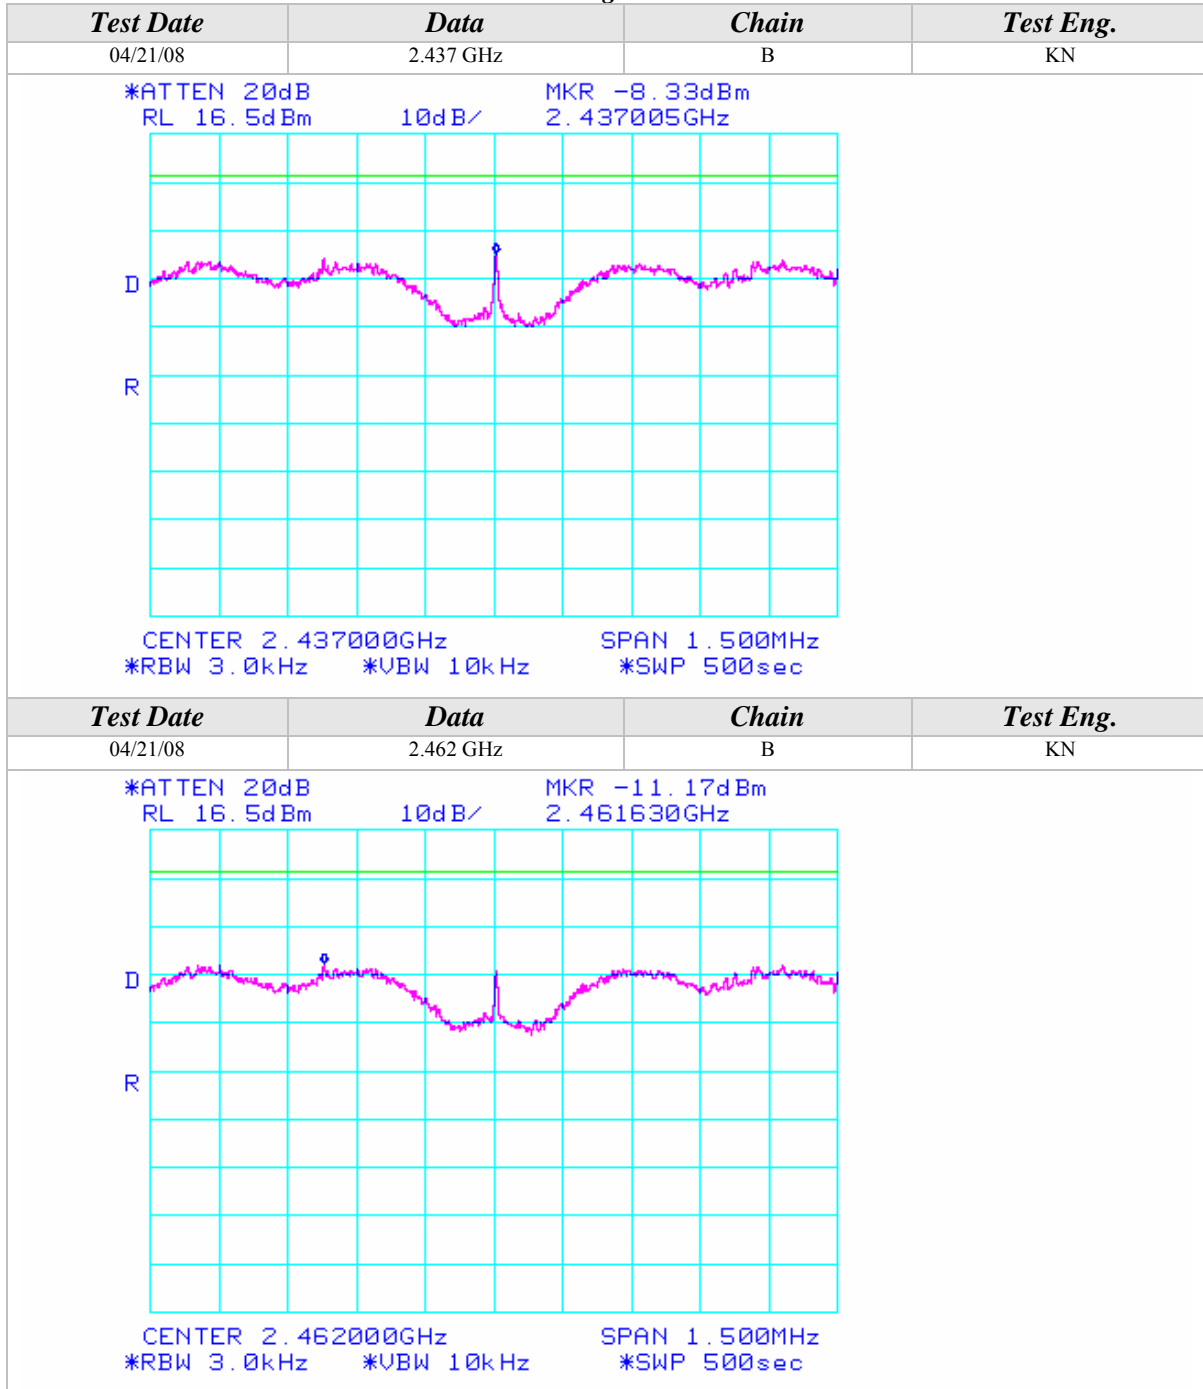



Peak Power Spectral Density (Continued)


802.11g Mode

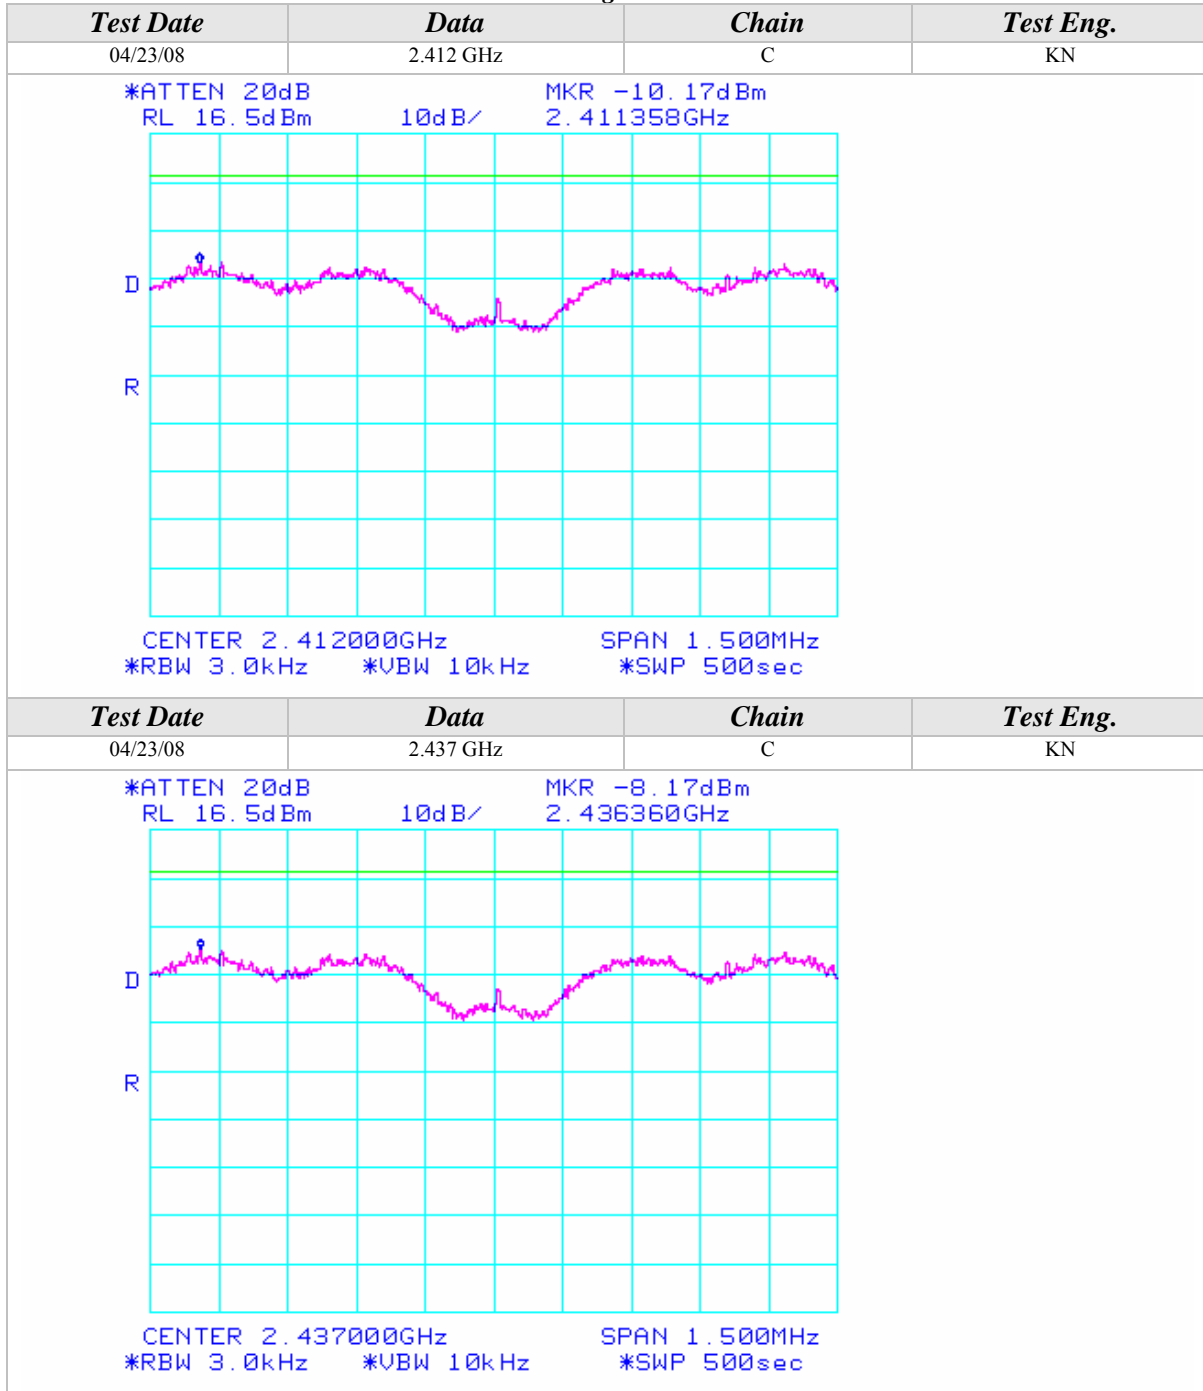




Peak Power Spectral Density (Continued)

802.11g Mode

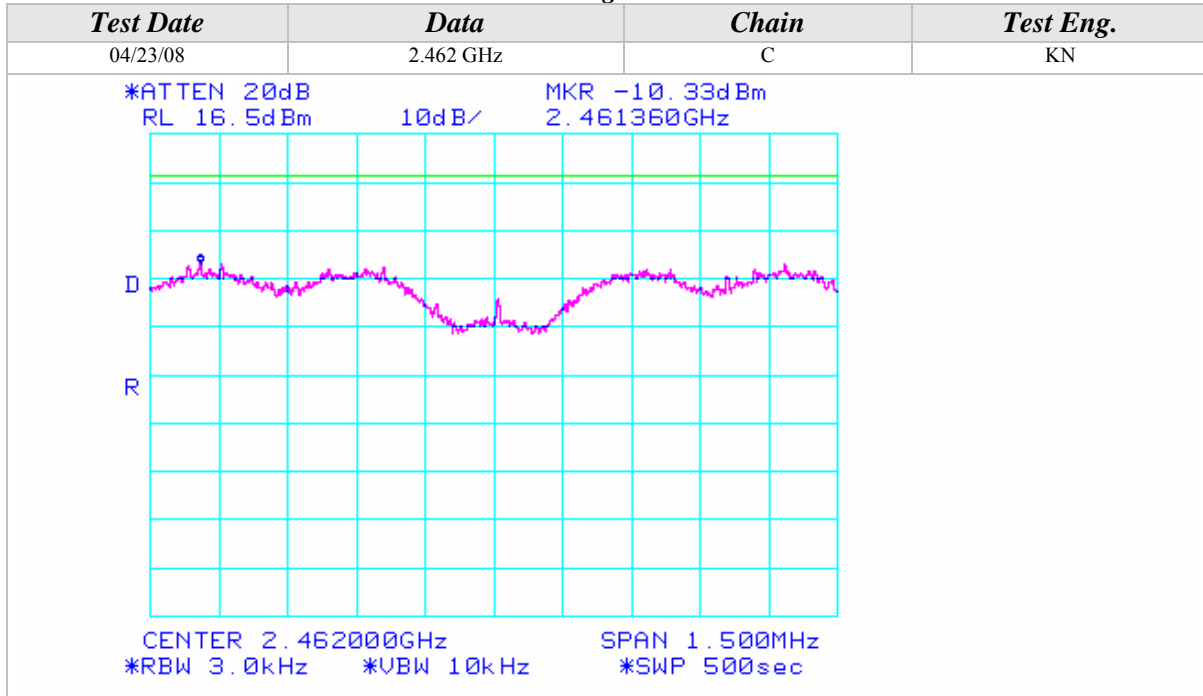


802.11n Mode, 2.4GHz, 20MHz Wide

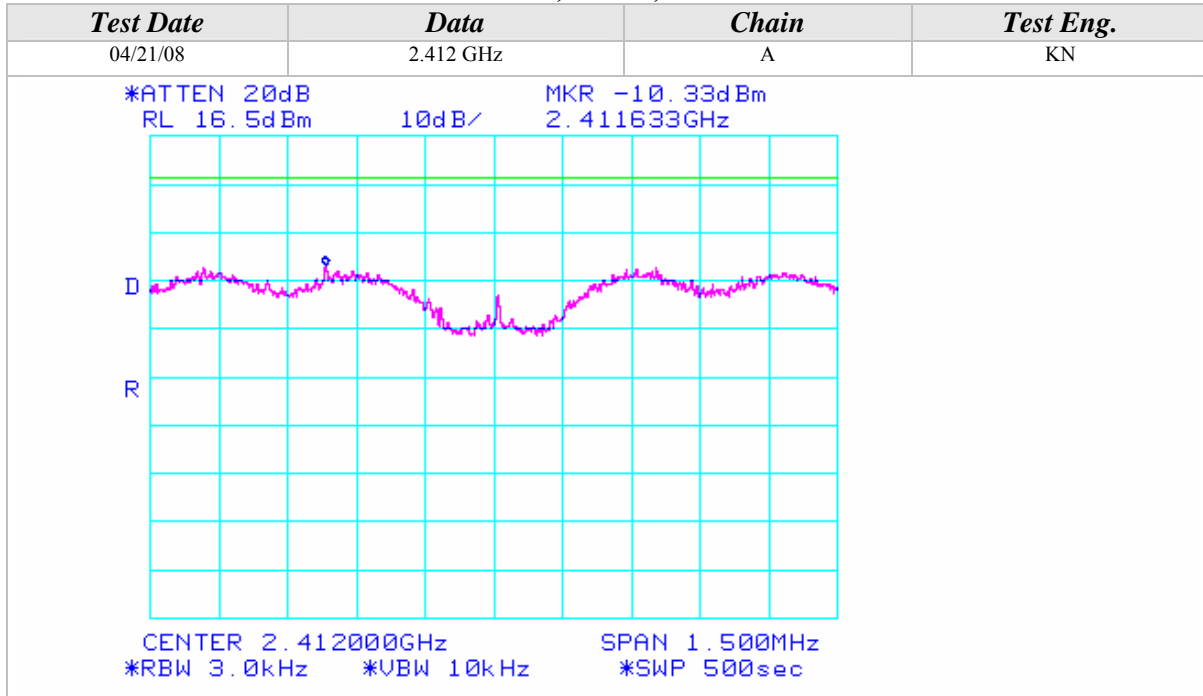



Peak Power Spectral Density (Continued)


802.11n Mode, 2.4GHz, 20MHz Wide

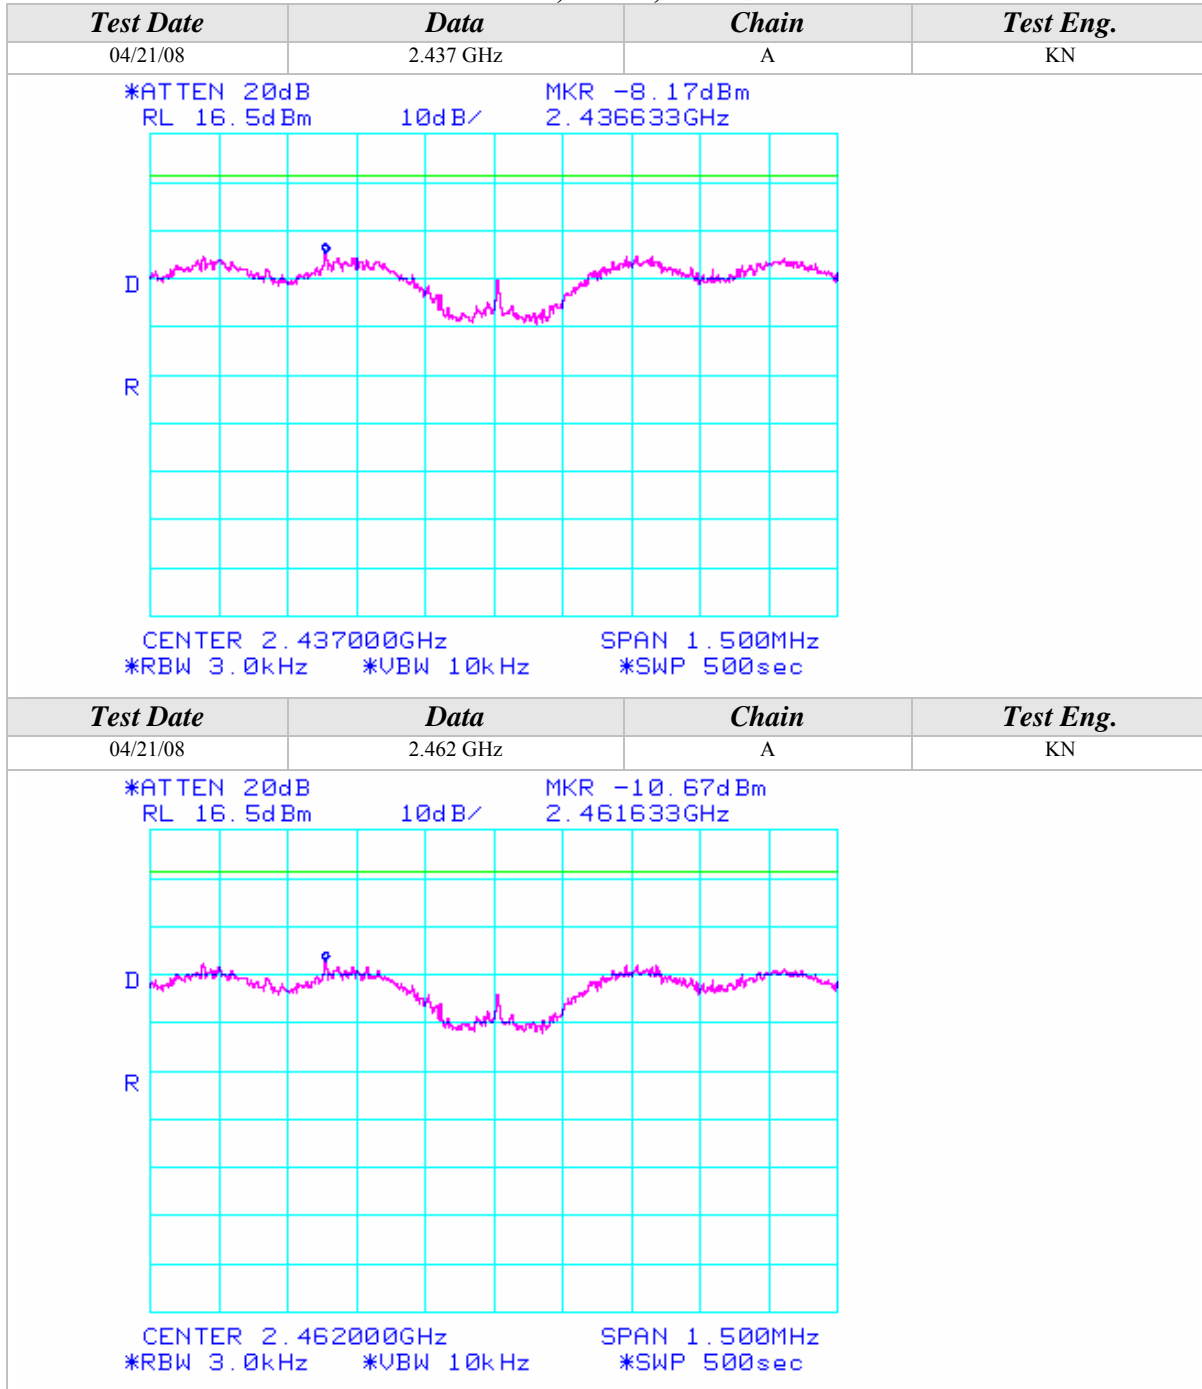



Peak Power Spectral Density (Continued)


802.11n Mode, 2.4GHz, 20MHz Wide

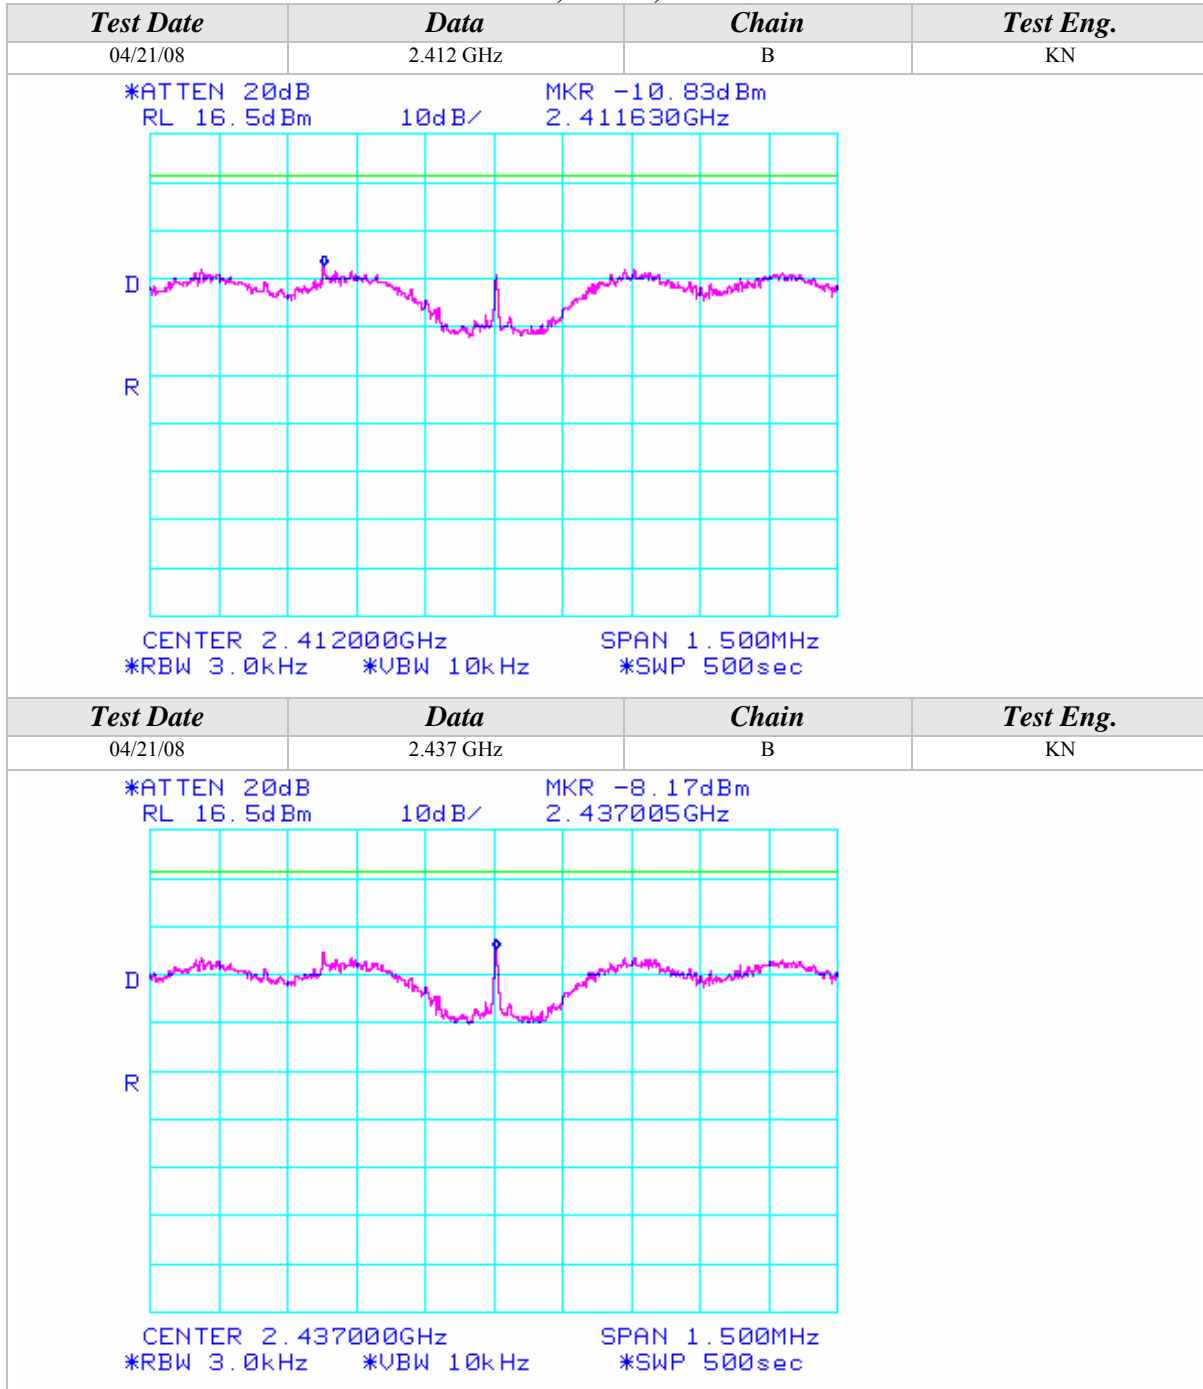



Peak Power Spectral Density (Continued)



802.11n Mode, 2.4GHz, 20MHz Wide

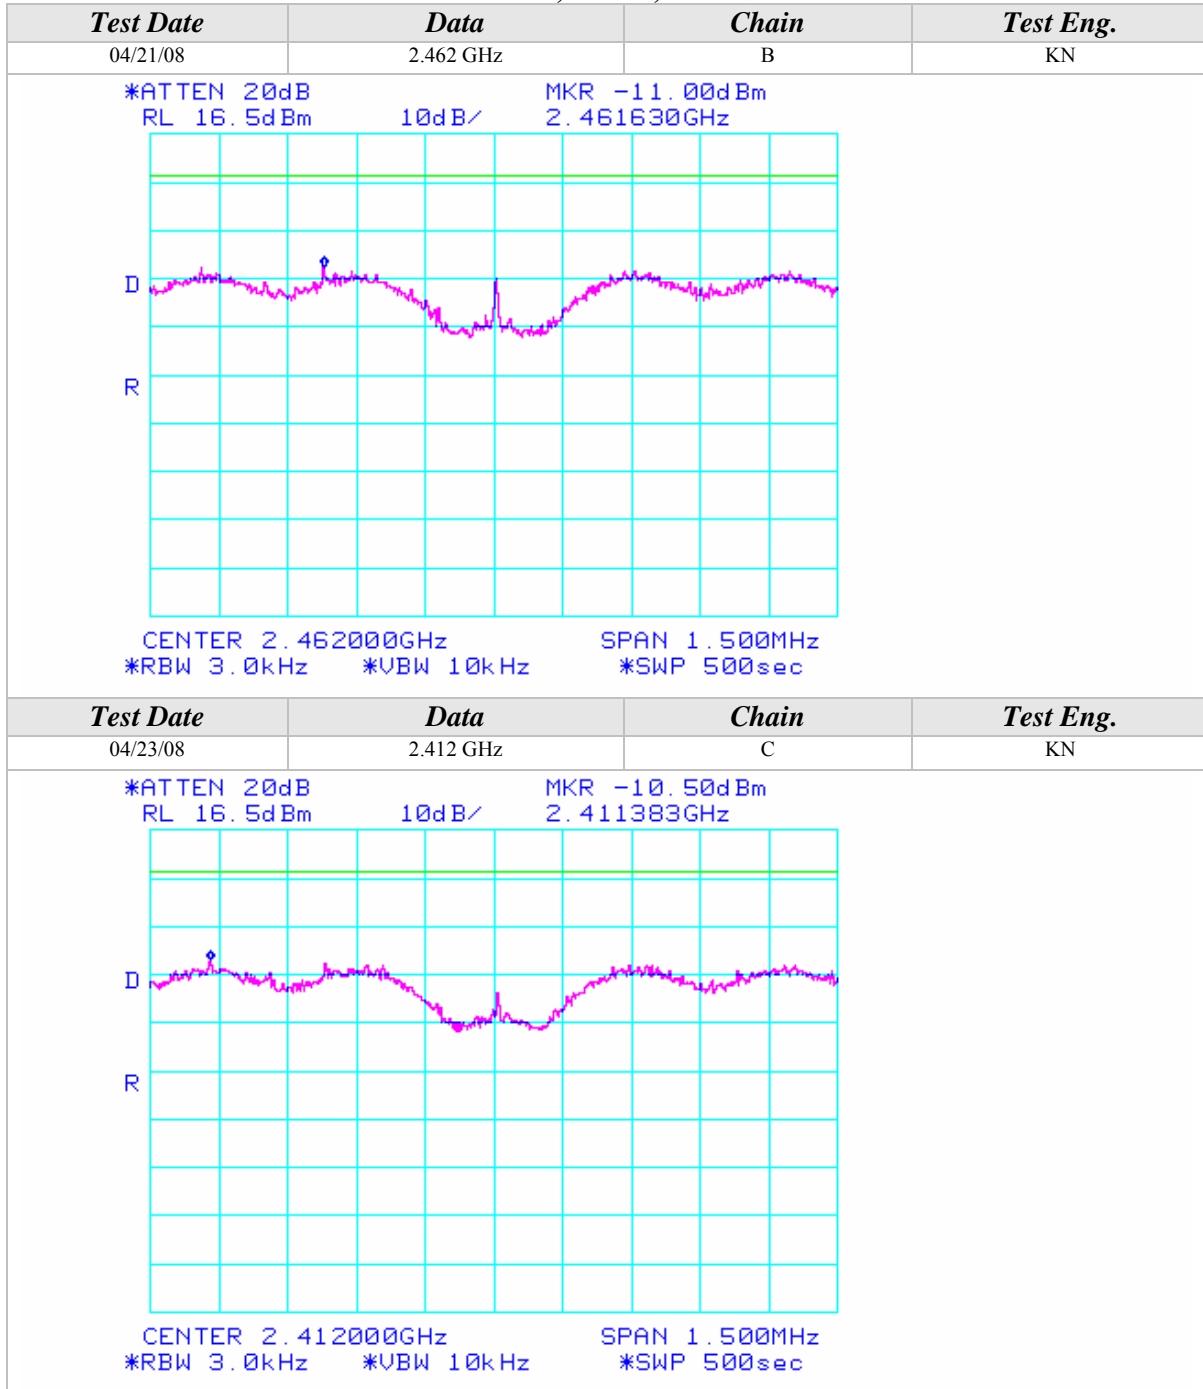



Peak Power Spectral Density (Continued)

802.11n Mode, 2.4GHz, 20MHz Wide

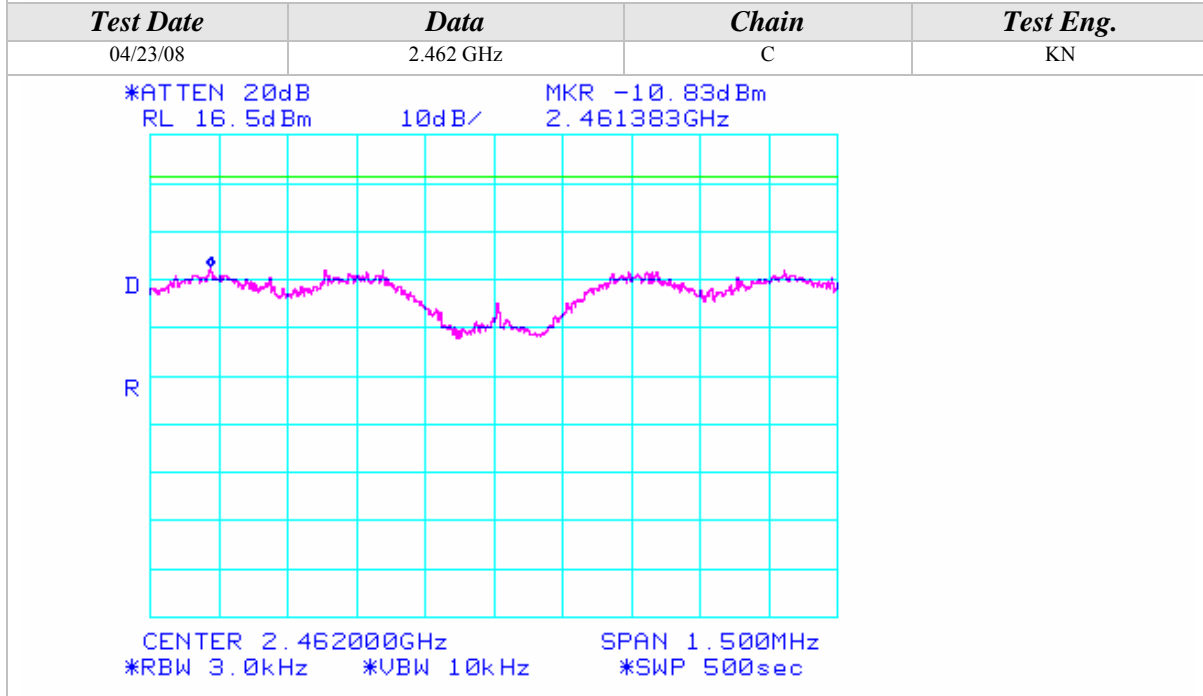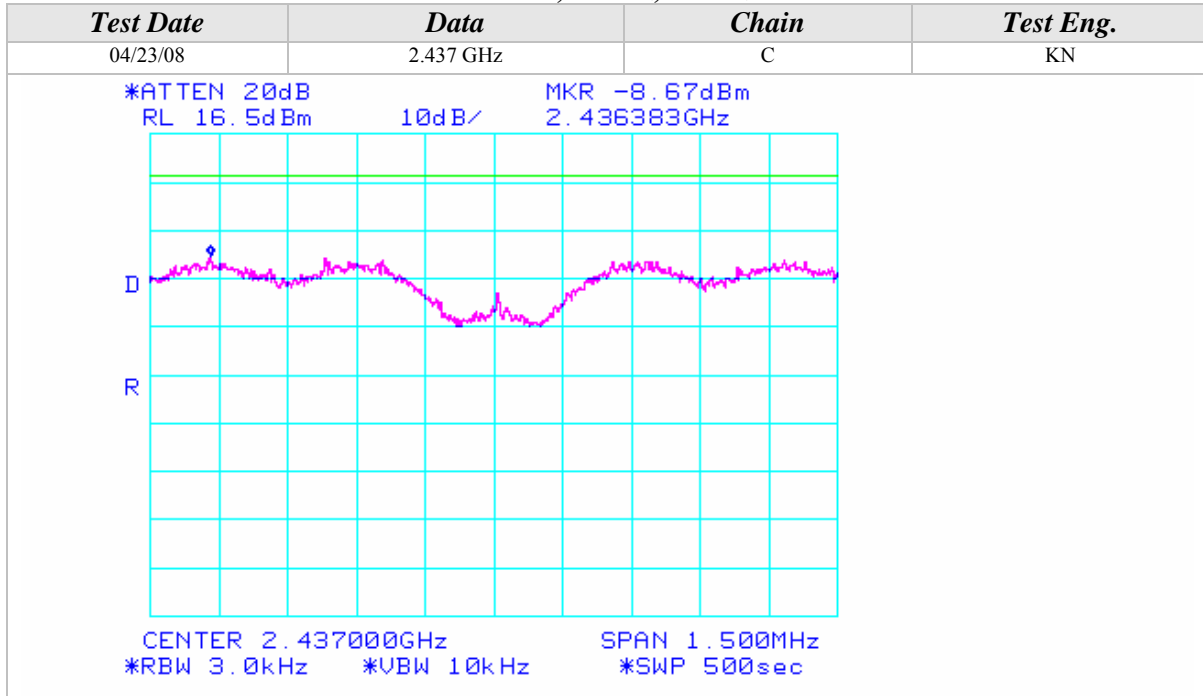



Peak Power Spectral Density (Continued)


802.11n Mode, 2.4GHz, 40MHz Wide

Test Date	Data	Chain	Test Eng.
04/21/08	2.437 GHz	B	KN
*ATTEN 20dB MKR -9.33dBm RL 16.5dBm 10dB/ 2.437005GHz			
CENTER 2.437000GHz SPAN 1.500MHz *RBW 3.0kHz *VBW 10kHz *SWP 500sec			
Test Date	Data	Chain	Test Eng.
04/21/08	2.452 GHz	B	KN
*ATTEN 20dB MKR -14.33dBm RL 16.5dBm 10dB/ 2.452005GHz			
CENTER 2.452000GHz SPAN 1.500MHz *RBW 3.0kHz *VBW 10kHz *SWP 500sec			




Peak Power Spectral Density (Continued)

802.11n Mode, 2.4GHz, 40MHz Wide

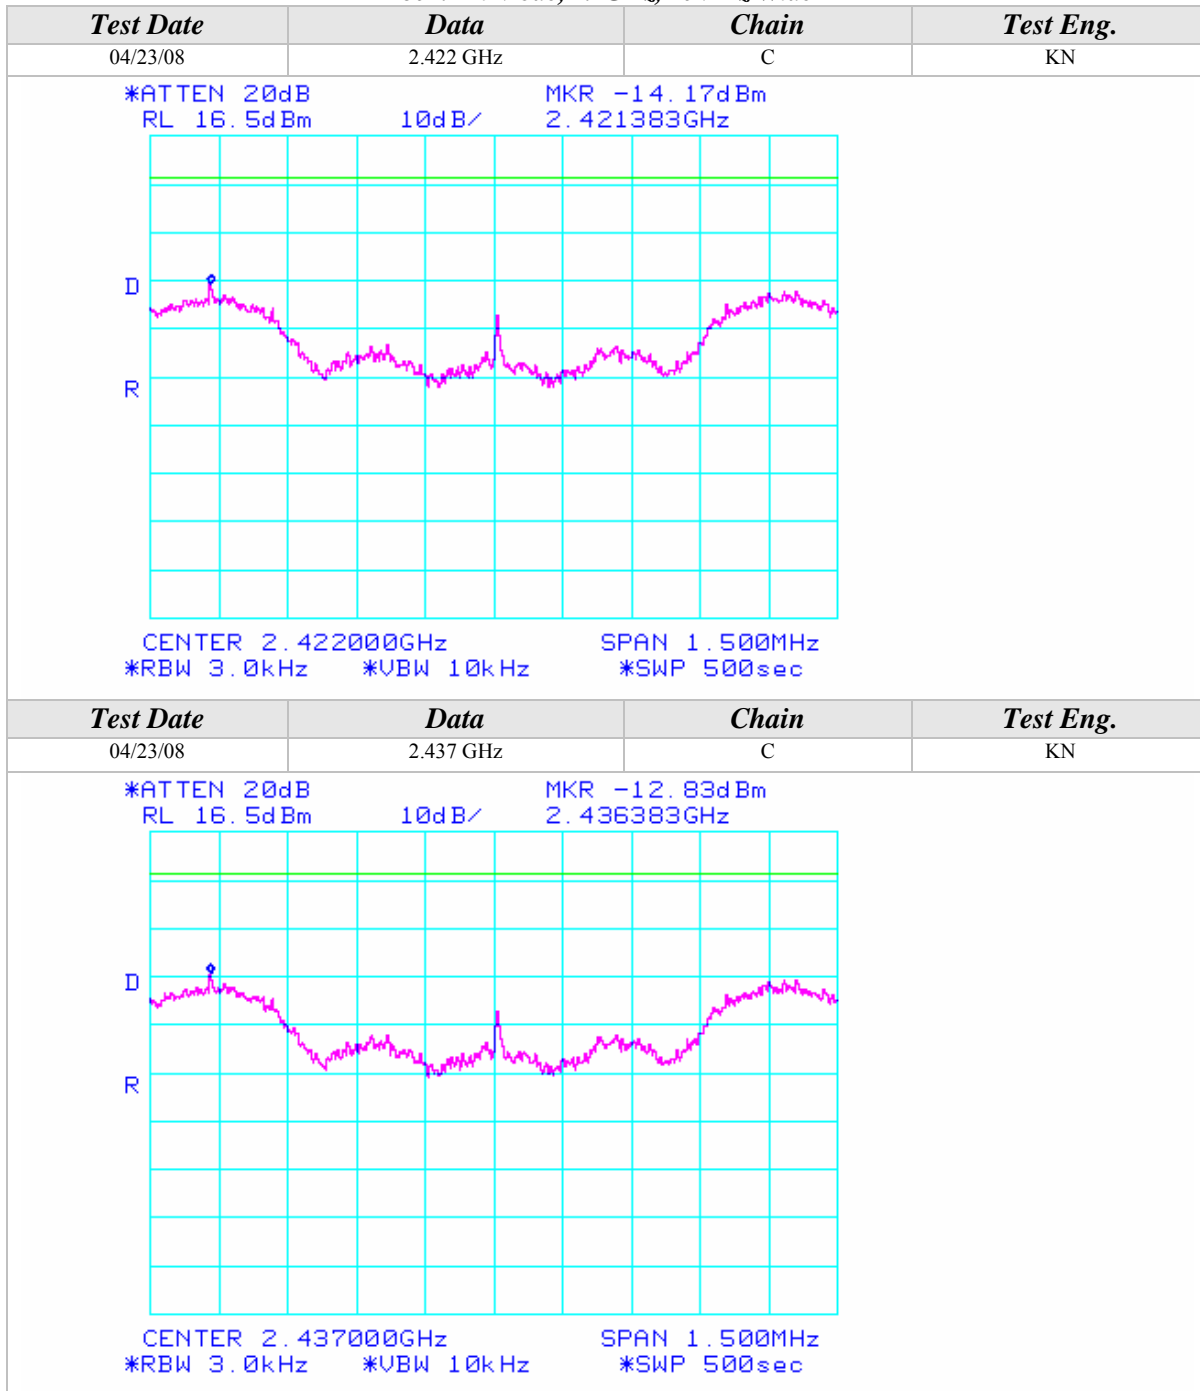


Peak Power Spectral Density (Continued)

802.11n Mode, 2.4GHz, 40MHz Wide

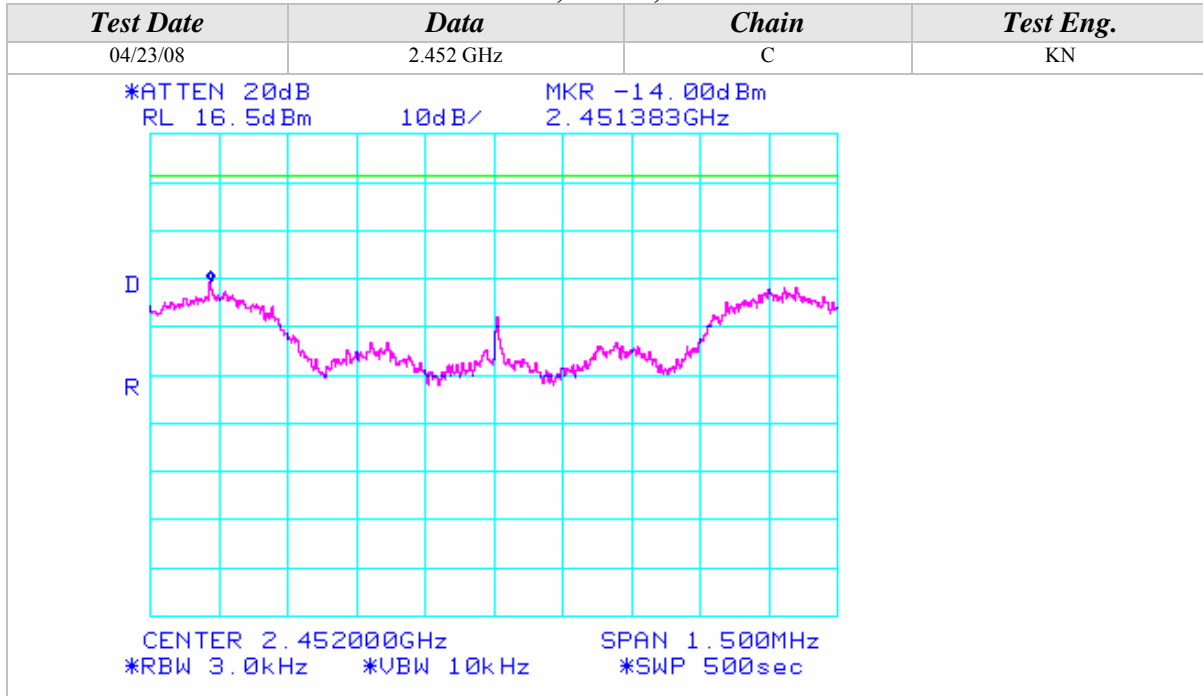


802.11n Mode, 5GHz, 20MHz Wide

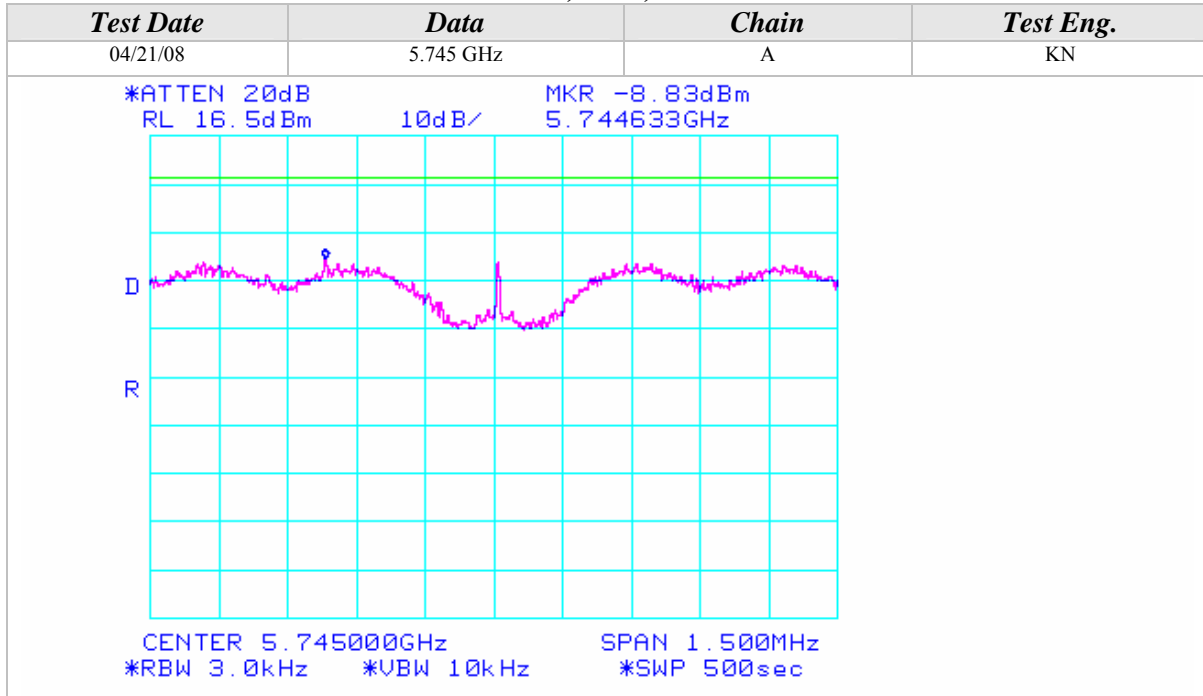


Peak Power Spectral Density (Continued)

802.11n Mode, 5GHz, 20MHz Wide

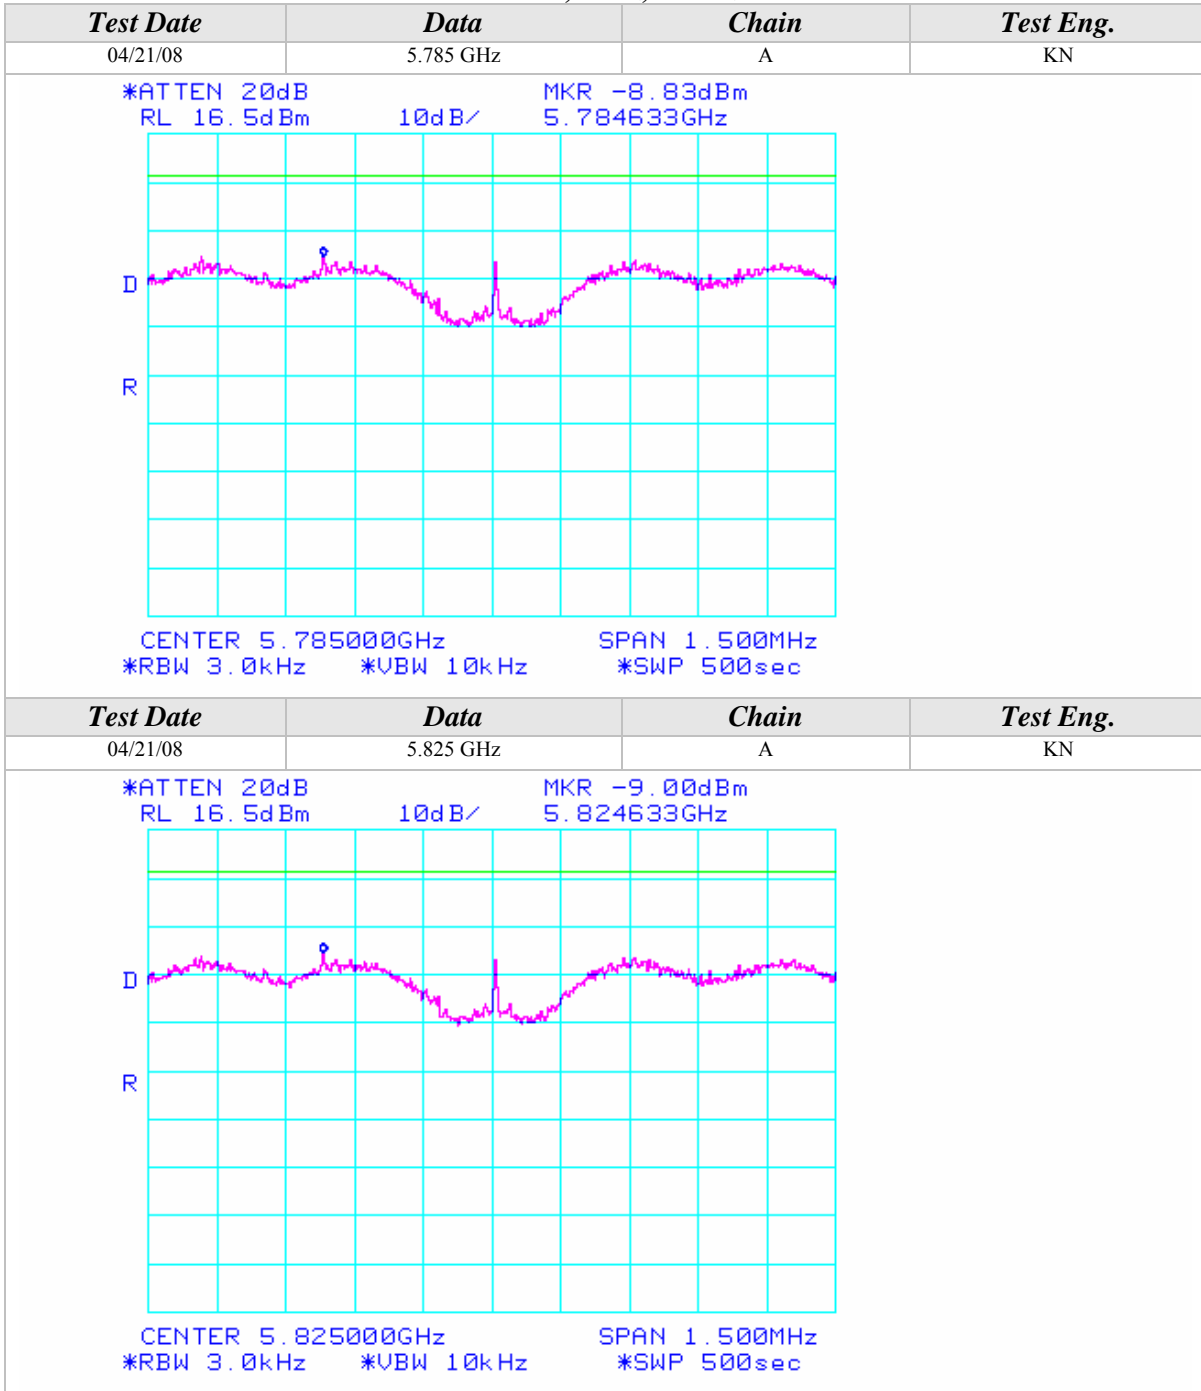


Peak Power Spectral Density (Continued)

802.11n Mode, 5GHz, 20MHz Wide

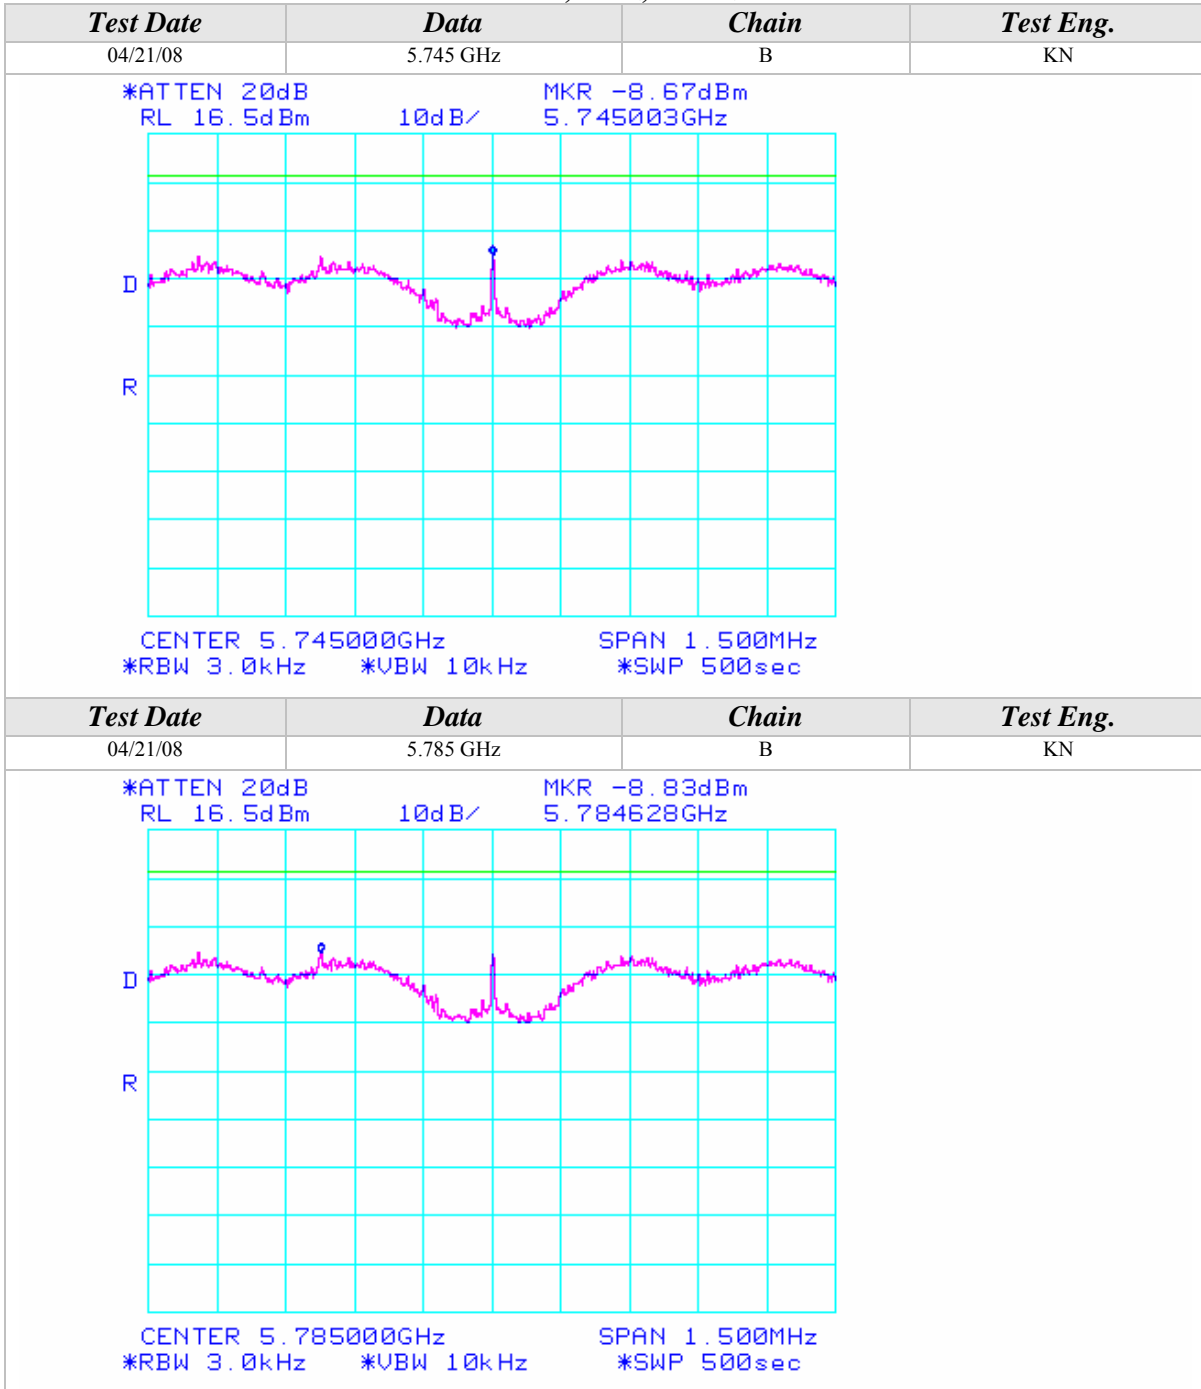


Peak Power Spectral Density (Continued)

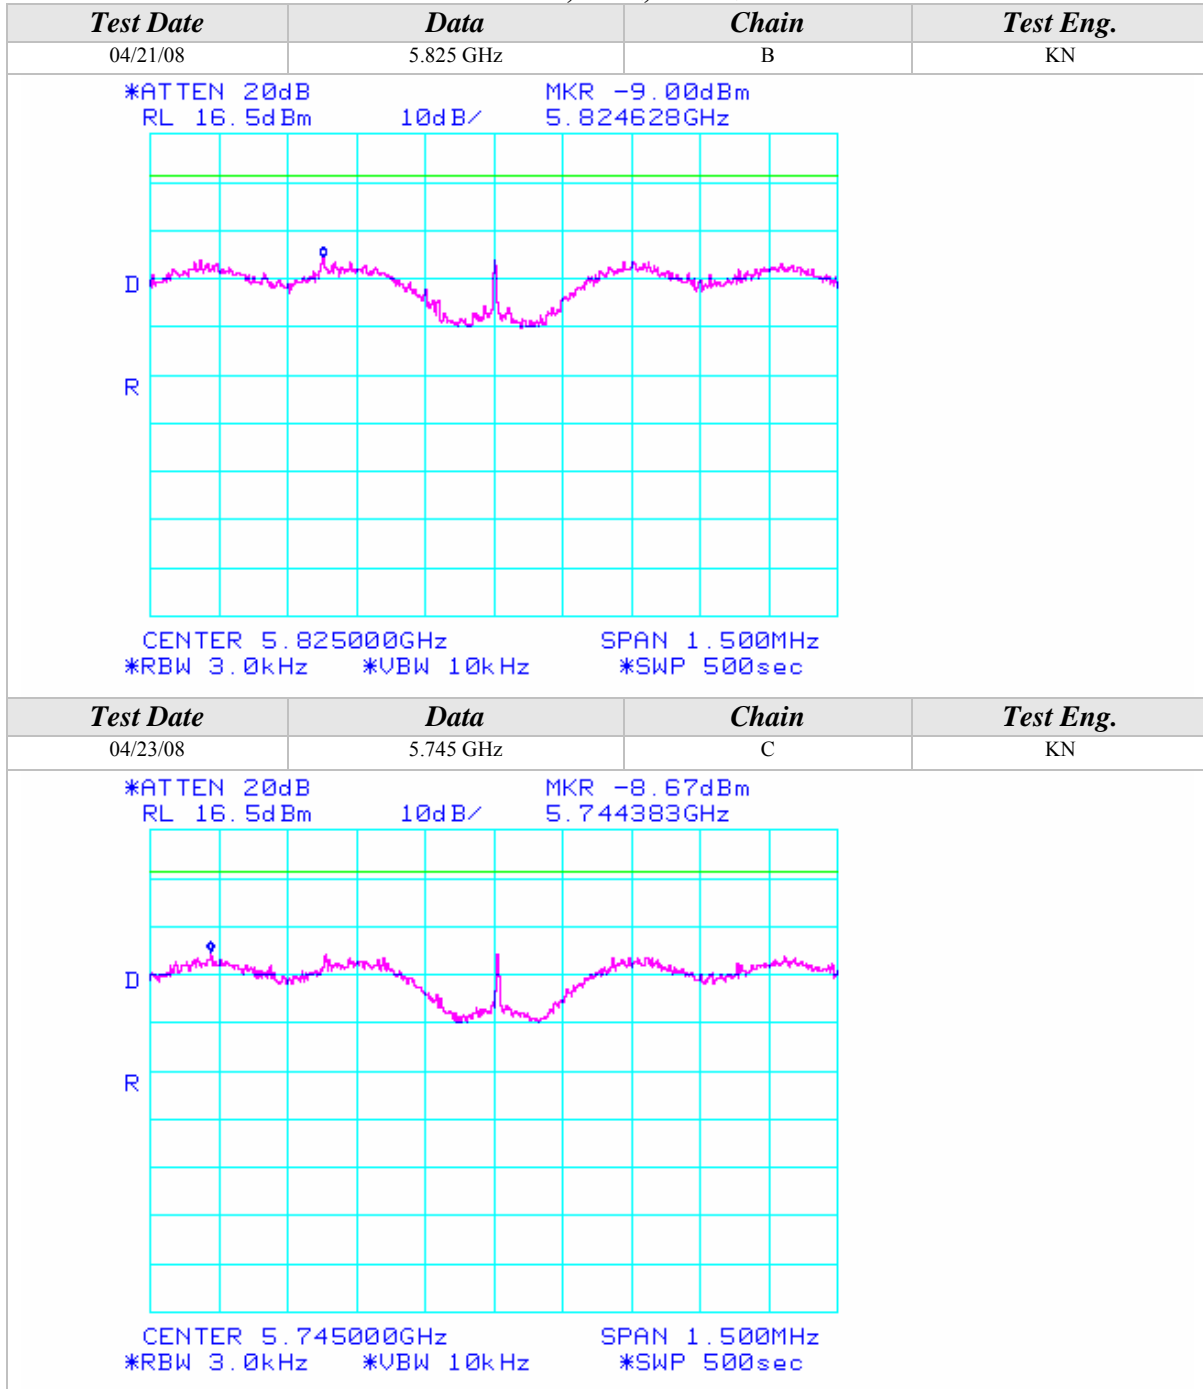802.11n Mode, 5GHz, 20MHz Wide


Peak Power Spectral Density (Continued)

802.11n Mode, 5GHz, 20MHz Wide

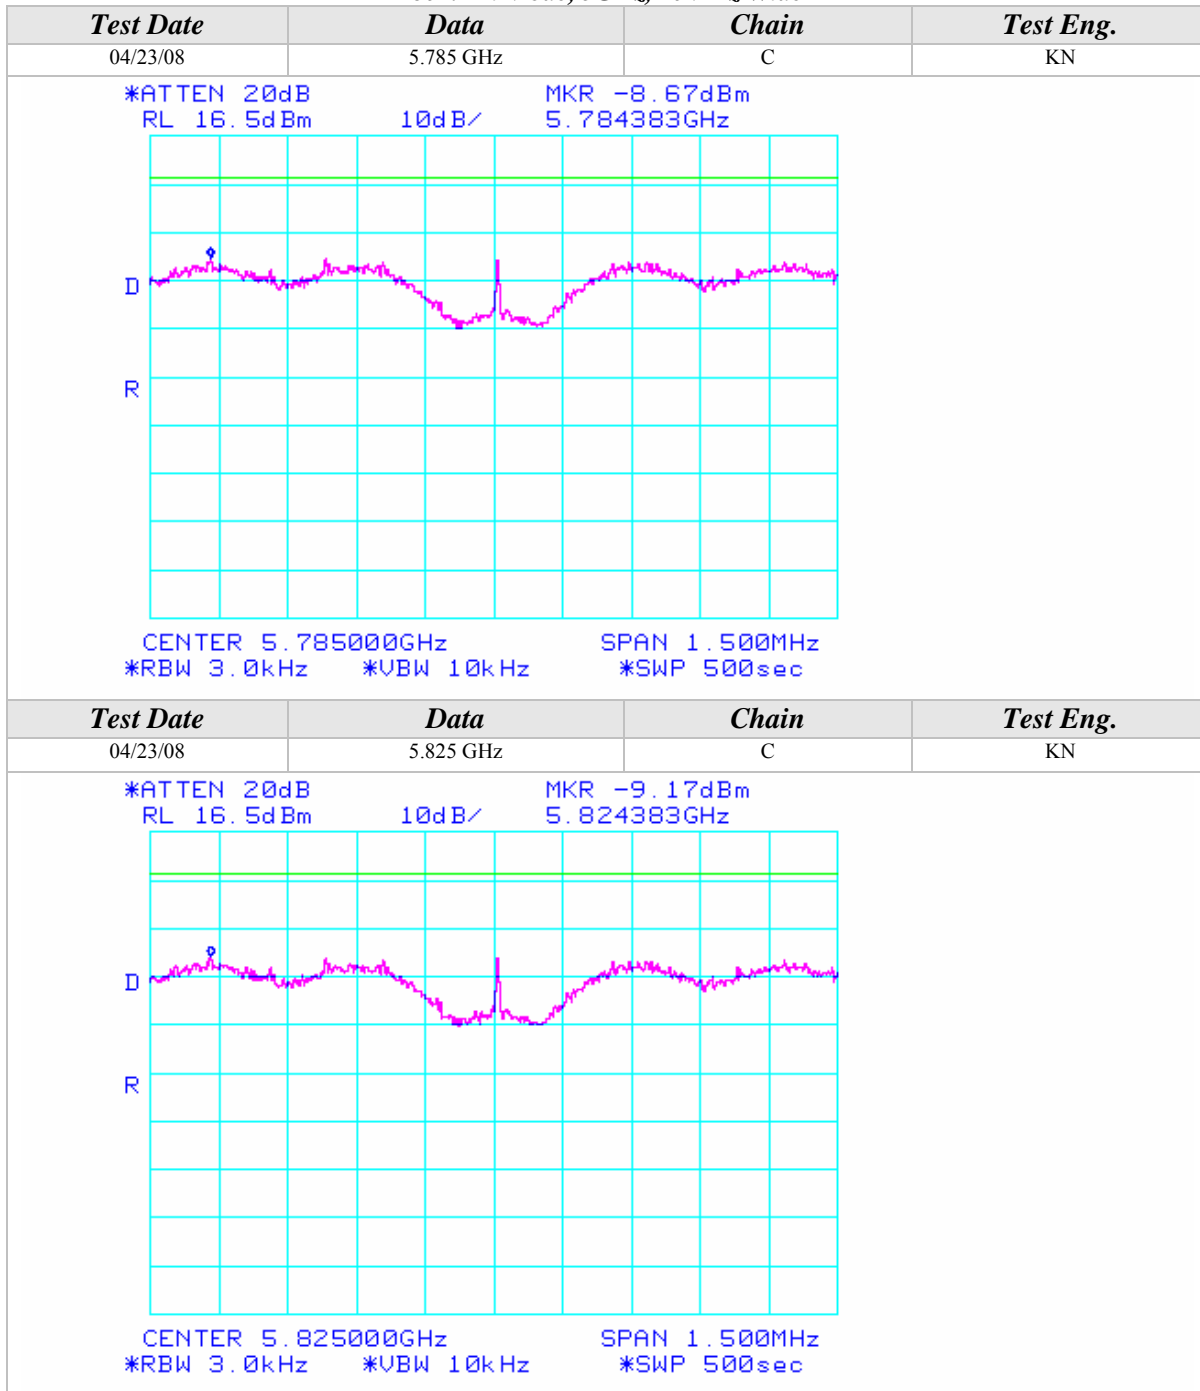

Peak Power Spectral Density (Continued)


802.11n Mode, 5GHz, 40MHz Wide

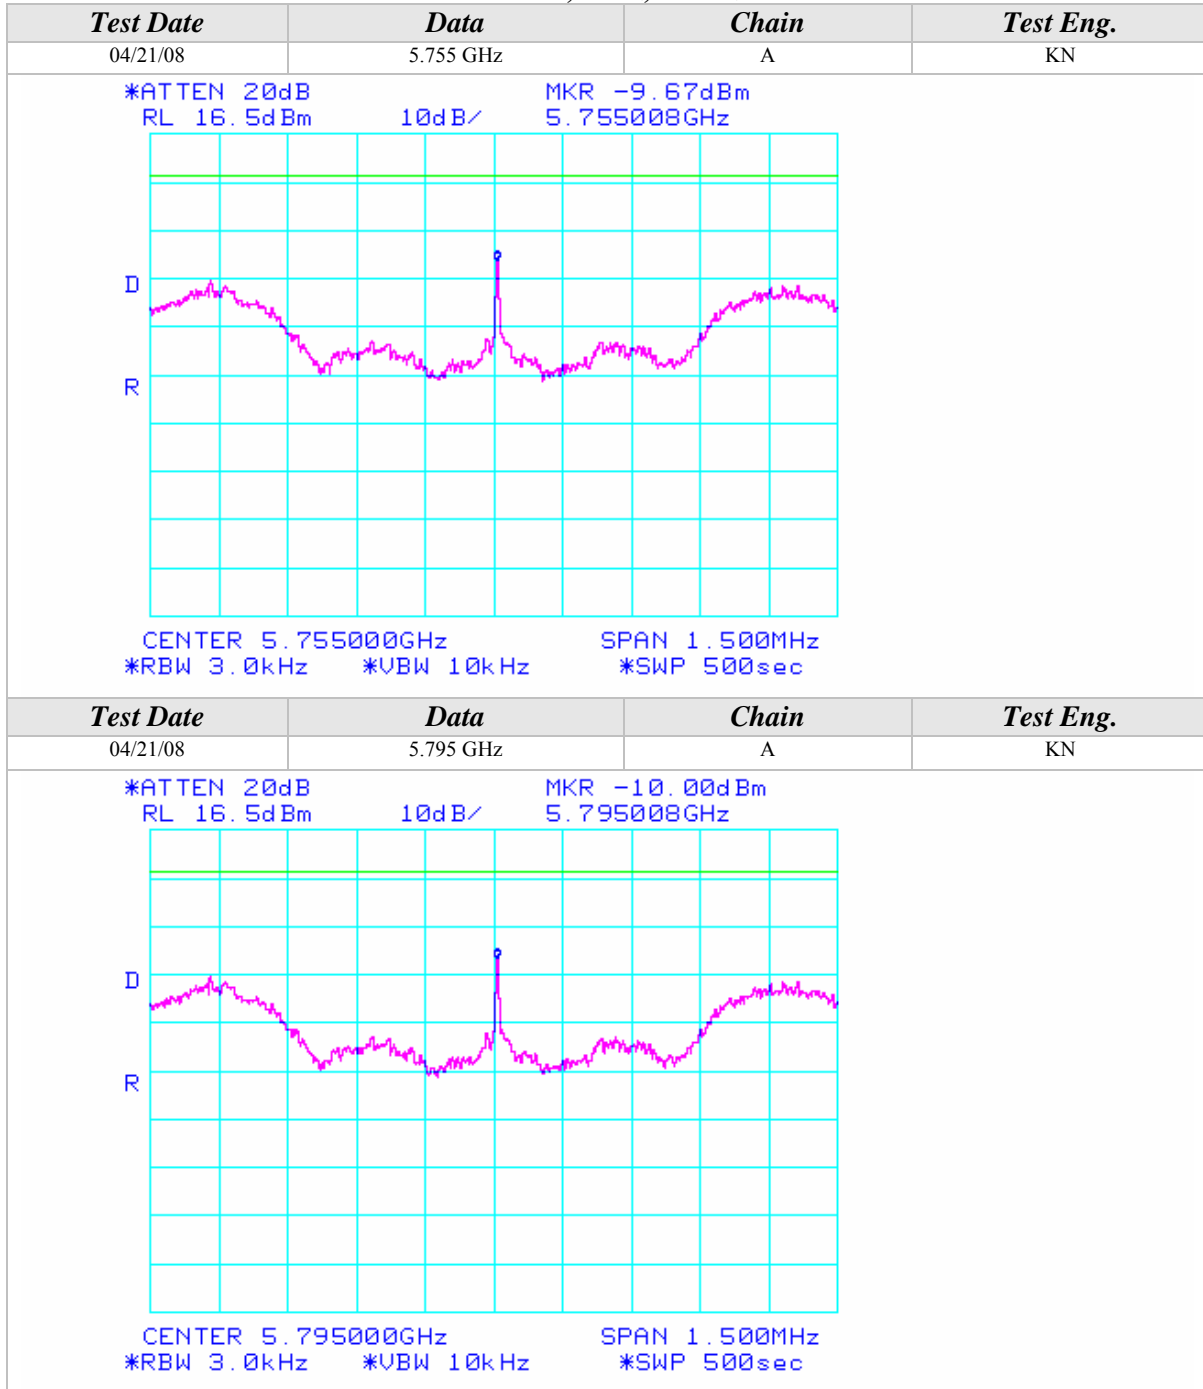




Peak Power Spectral Density (Continued)

802.11n Mode, 5GHz, 40MHz Wide

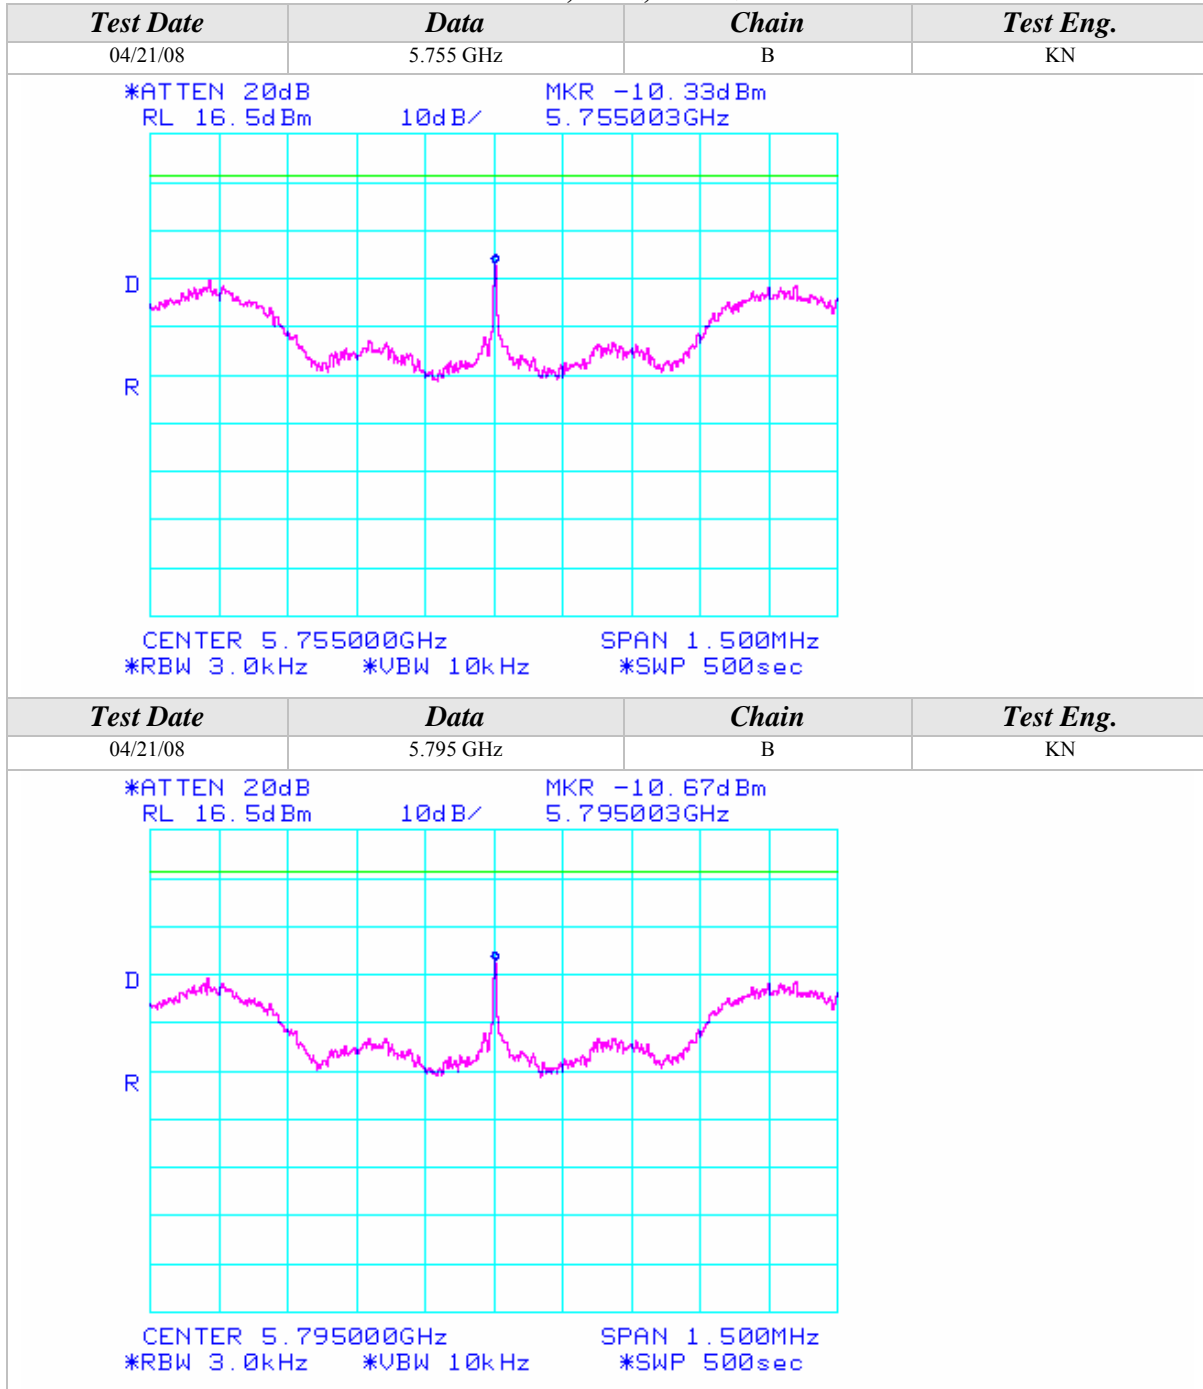

Peak Power Spectral Density (Continued)

802.11n Mode, 5GHz, 40MHz Wide

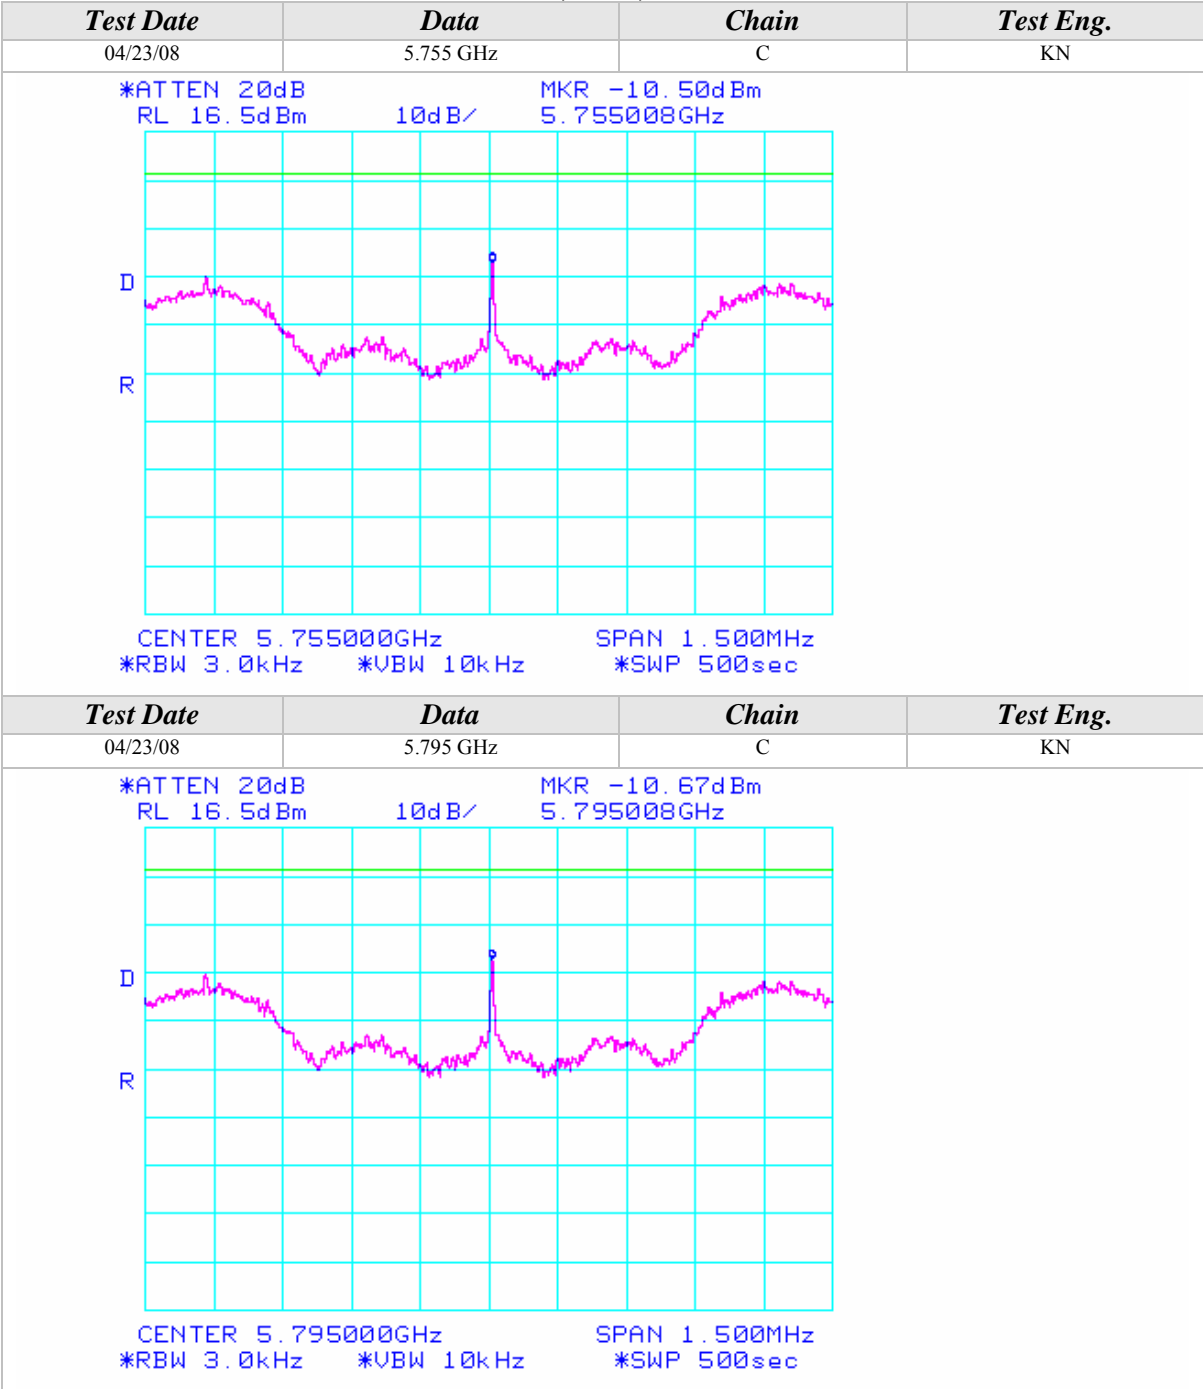

**CONDUCTED OUT OF BAND EMISSIONS**

CLIENT:	Intel Corporation	DATE:	04/25/08
EUT:	Intel WiFi Link 5300	PROJECT NUMBER:	INTEL-080317
MODEL NUMBER:	533AN_HMW	TEST ENGINEER:	KN
SERIAL NUMBER:	0016EA038A16	SITE #:	2
CONFIGURATION:	Tested installed in an extender board connected to the host laptop's mini PCI slot	TEMPERATURE:	28 deg. C
		HUMIDITY:	21% RH
		TIME:	4:00 PM

Description:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none">• 120VAC / 60 Hz.





Conducted Out Of Band Emissions (Continued)

802.11a Mode

Test Date	Data	Chain	Test Eng.
04/25/08	5.745 GHz	A	KN
<p>*ATTEN 20dB MKR -57.83dBm RL 16.5dBm 10dB/ 612.0MHz</p> <p>START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms</p>			
Test Date	Data	Chain	Test Eng.
04/25/08	5.745 GHz (INTEL-080317)	A	KN
<p>*ATTEN 20dB MKR -56.83dBm RL 16.5dBm 10dB/ 2.653GHz</p> <p>START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec</p>			


Conducted Out Of Band Emissions (Continued)

802.11a Mode

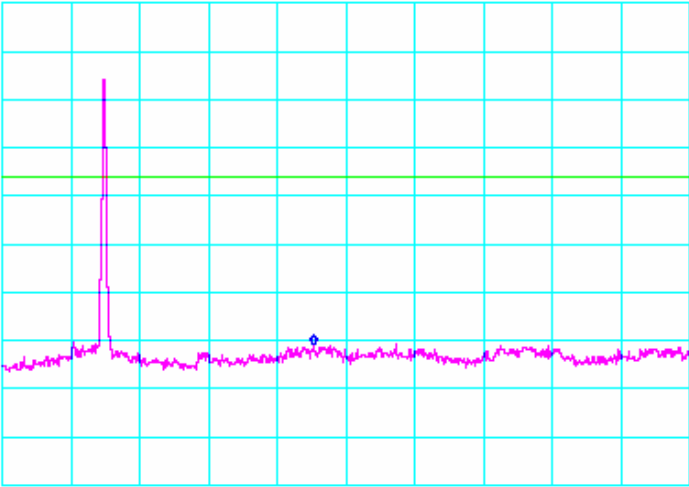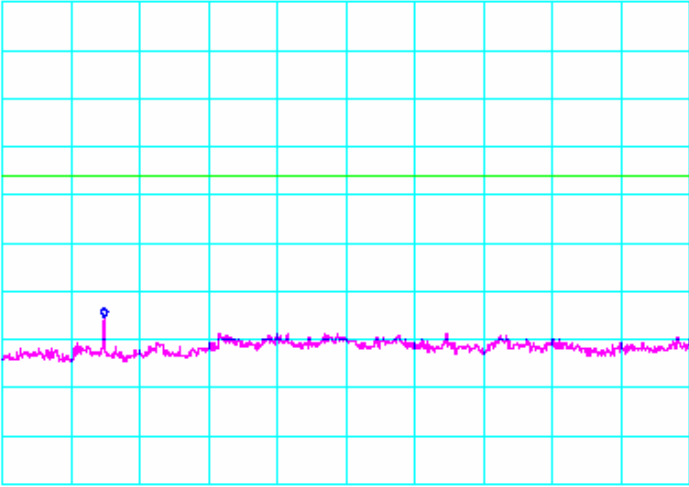Test Date	Data	Chain	Test Eng.
04/25/08	5.745 GHz	A	KN
<p>*ATTEN 20dB MKR -54.33dBm RL 16.5dBm 10dB/ 7.267GHz</p>  <p>START 5.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 2.80sec</p>			
Test Date	Data	Chain	Test Eng.
04/25/08	5.745 GHz (INTEL-080317)	A	KN
<p>*ATTEN 20dB MKR -48.83dBm RL 16.5dBm 10dB/ 11.48GHz</p>  <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			

Conducted Out Of Band Emissions (Continued)

802.11a Mode

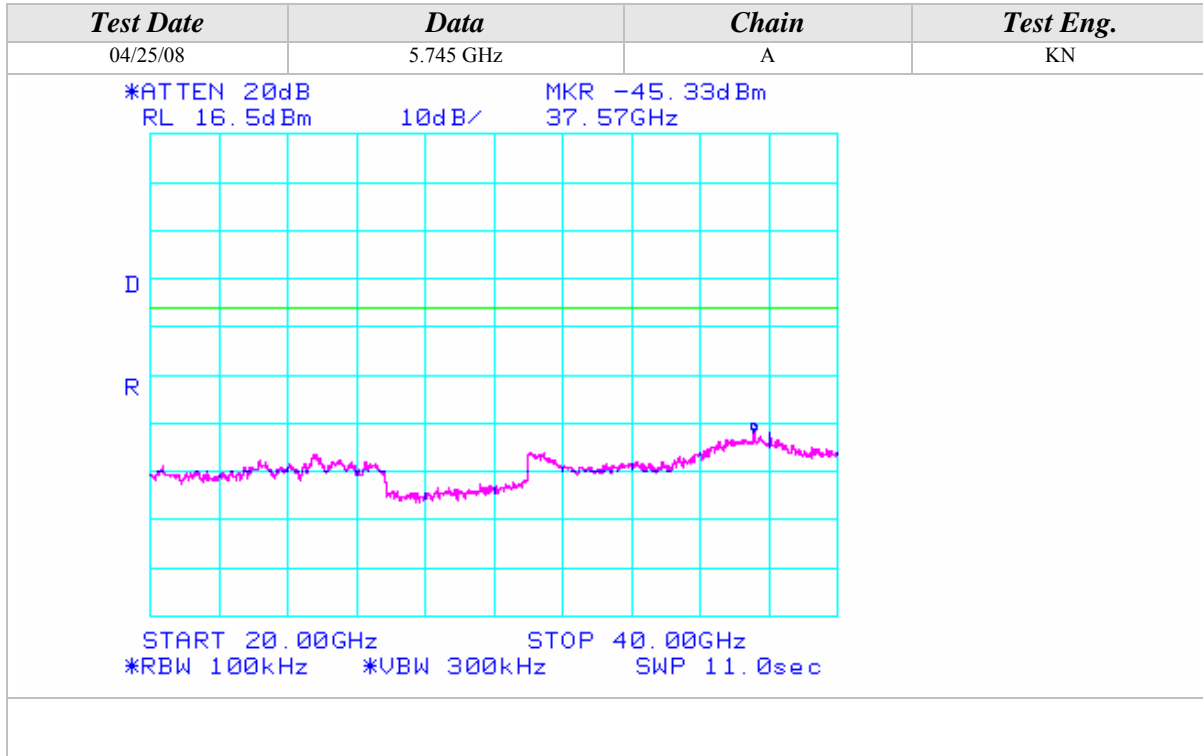



Conducted Out Of Band Emissions (Continued)


802.11a Mode

Test Date	Data	Chain	Test Eng.
04/25/08	5.785 GHz	A	KN
<div data-bbox="326 401 976 453"> <p>*ATTEN 20dB MKR -57.67dBm RL 16.5dBm 10dB/ 628.2MHz</p> </div> <div data-bbox="352 453 1037 932"> </div> <div data-bbox="326 942 992 995"> <p>START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms</p> </div>			
Test Date	Data	Chain	Test Eng.
04/25/08	5.785 GHz	A	KN
<div data-bbox="326 1089 976 1142"> <p>*ATTEN 20dB MKR -56.67dBm RL 16.5dBm 10dB/ 3.033GHz</p> </div> <div data-bbox="352 1142 1037 1621"> </div> <div data-bbox="326 1631 1027 1684"> <p>START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec</p> </div>			




Conducted Out Of Band Emissions (Continued)

802.11a Mode

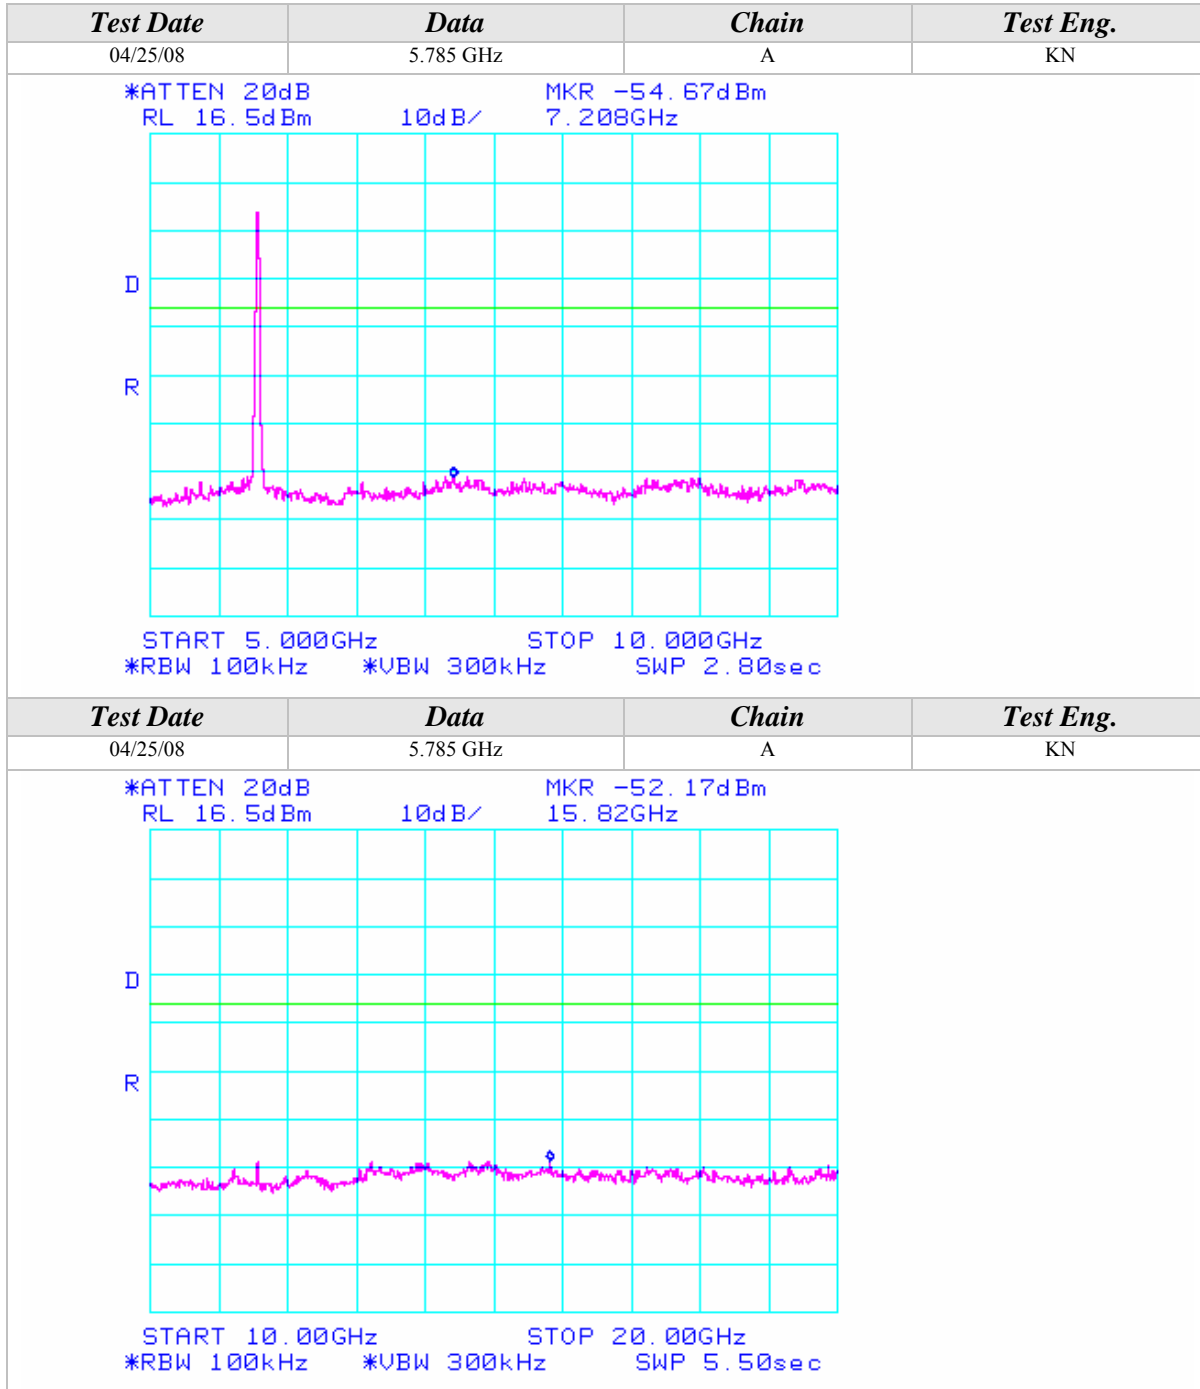



Conducted Out Of Band Emissions (Continued)

802.11a Mode

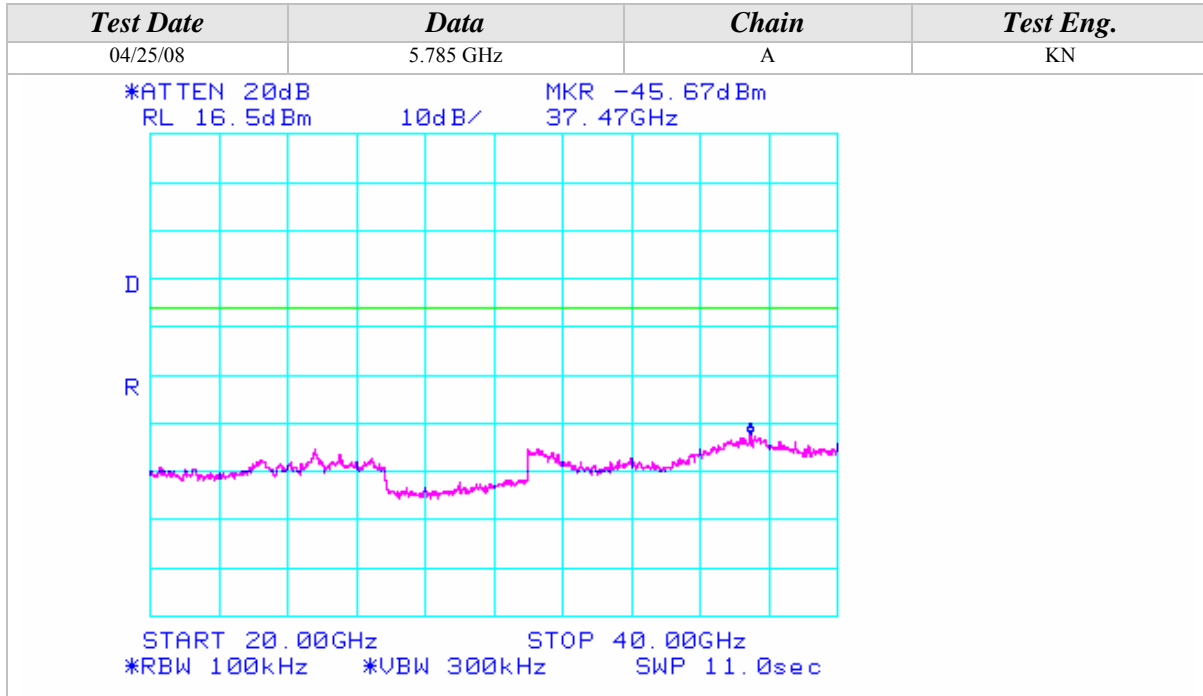


Conducted Out Of Band Emissions (Continued)

802.11a Mode
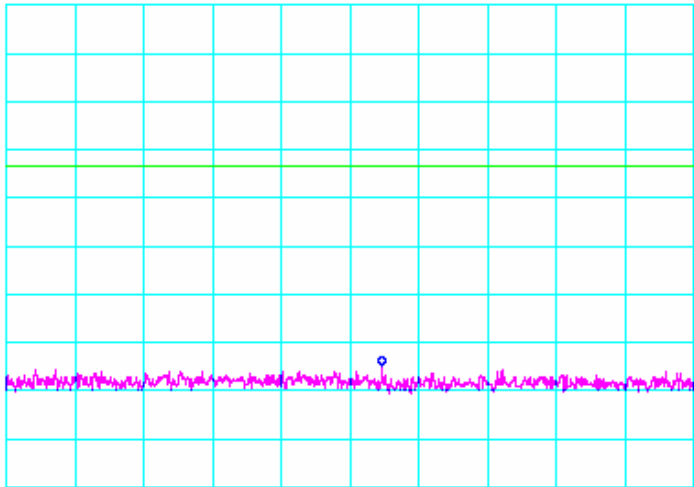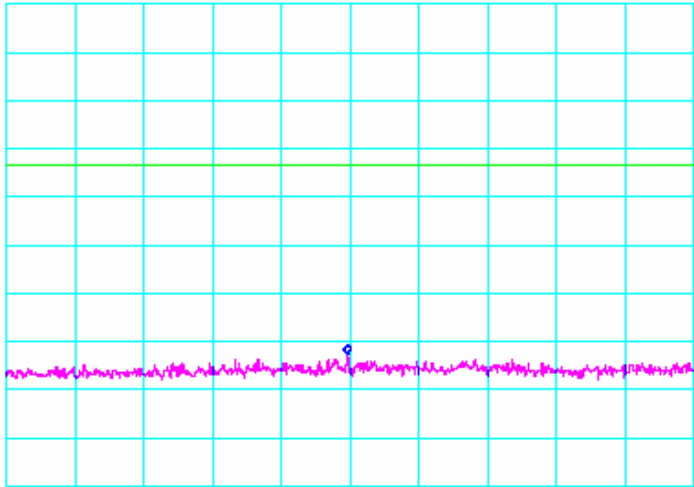
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	5.825 GHz	A	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -58.33dBm 560.3MHz</p>  <p>START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	5.825 GHz	A	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -56.17dBm 2.987GHz</p>  <p>START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec</p>			

Conducted Out Of Band Emissions (Continued)


802.11a Mode

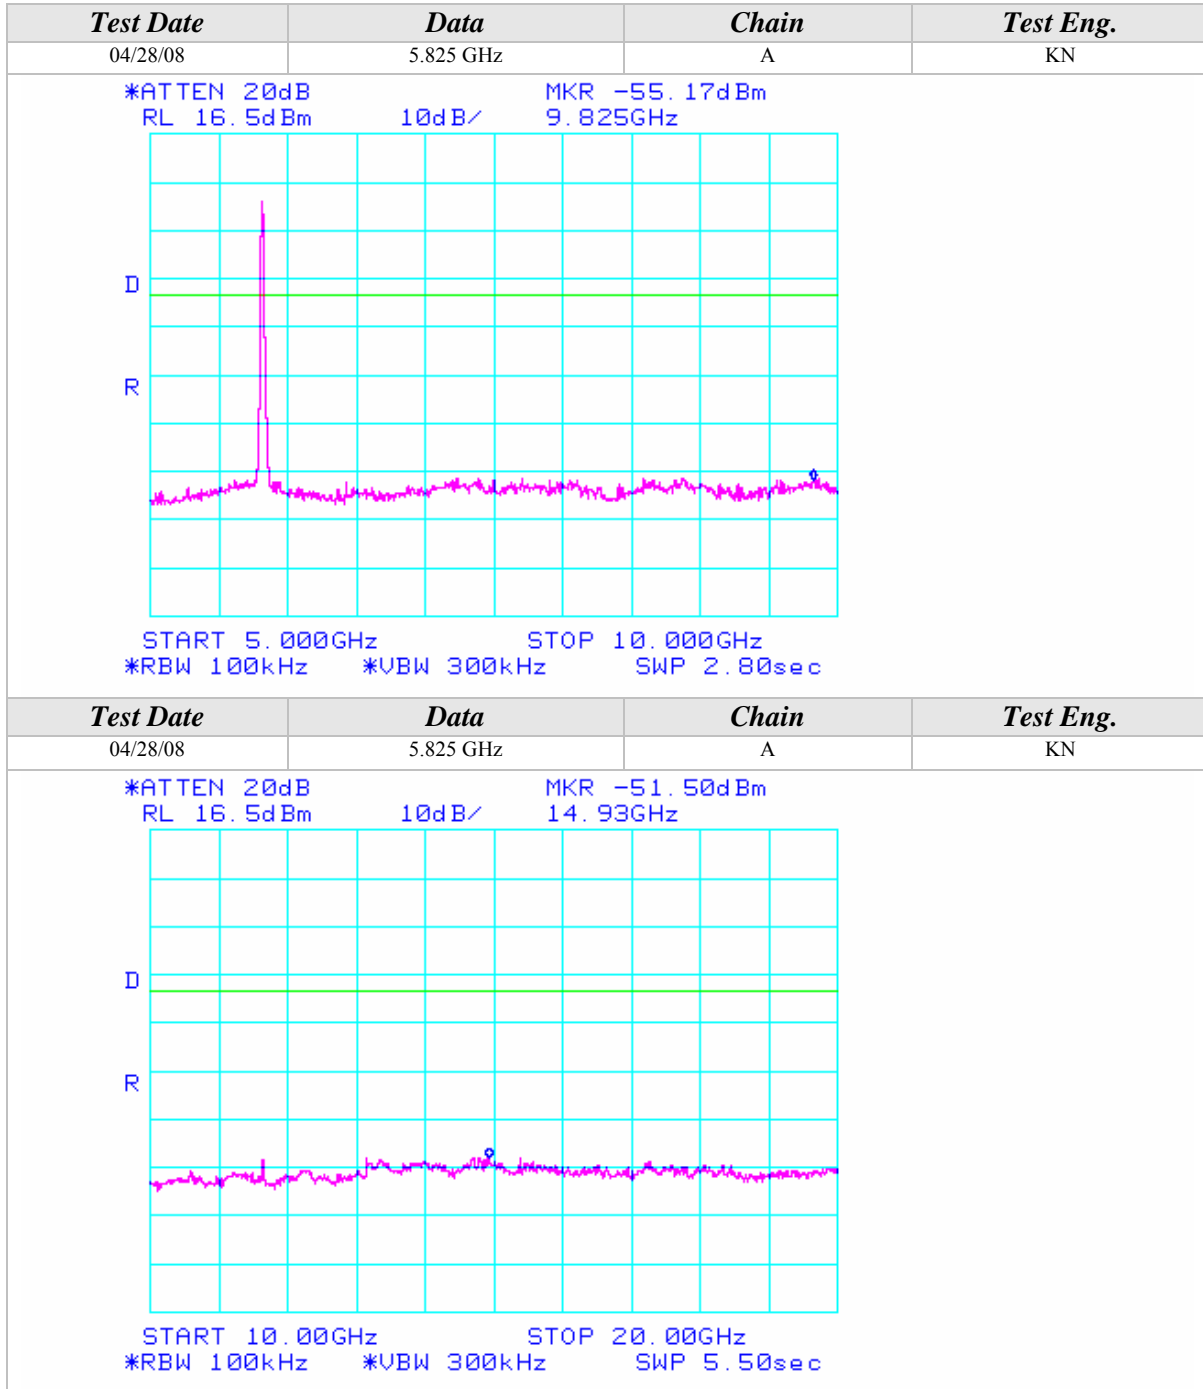



Conducted Out Of Band Emissions (Continued)

802.11a Mode

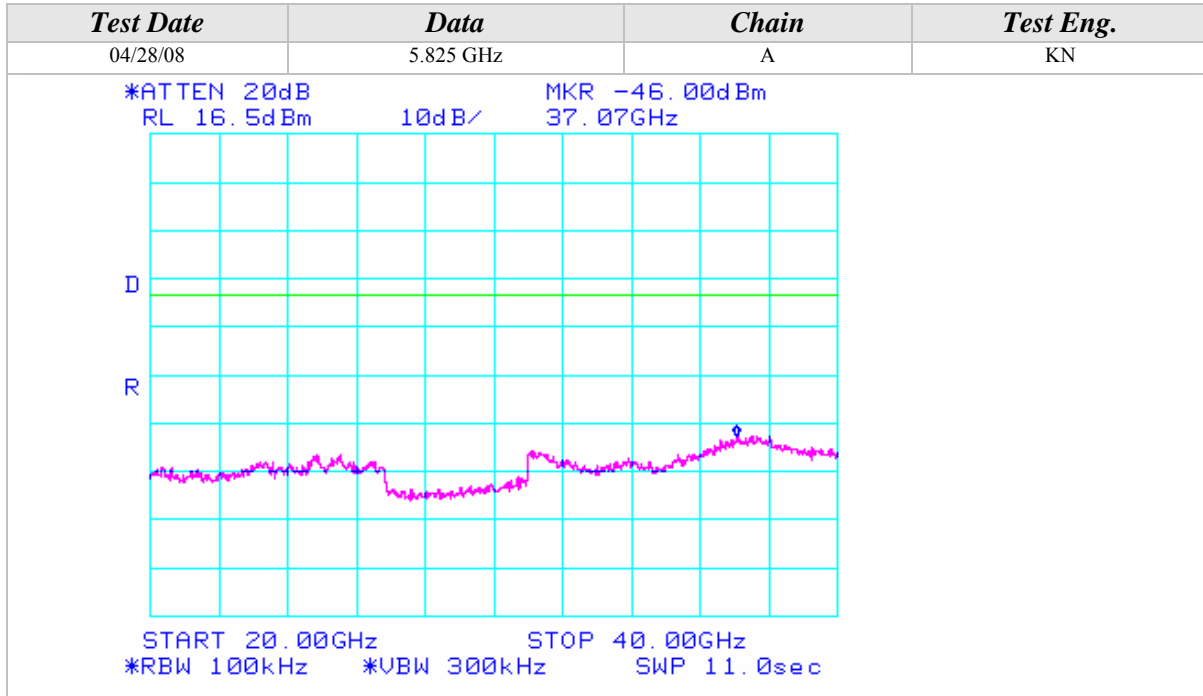

Conducted Out Of Band Emissions (Continued)


802.11a Mode

<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/29/08	5.745 GHz	B	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -57.67dBm 702.5MHz</p> <p>START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/29/08	5.745 GHz	B	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -56.17dBm 2.973GHz</p> <p>START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec</p>			



Conducted Out Of Band Emissions (Continued)


802.11a Mode

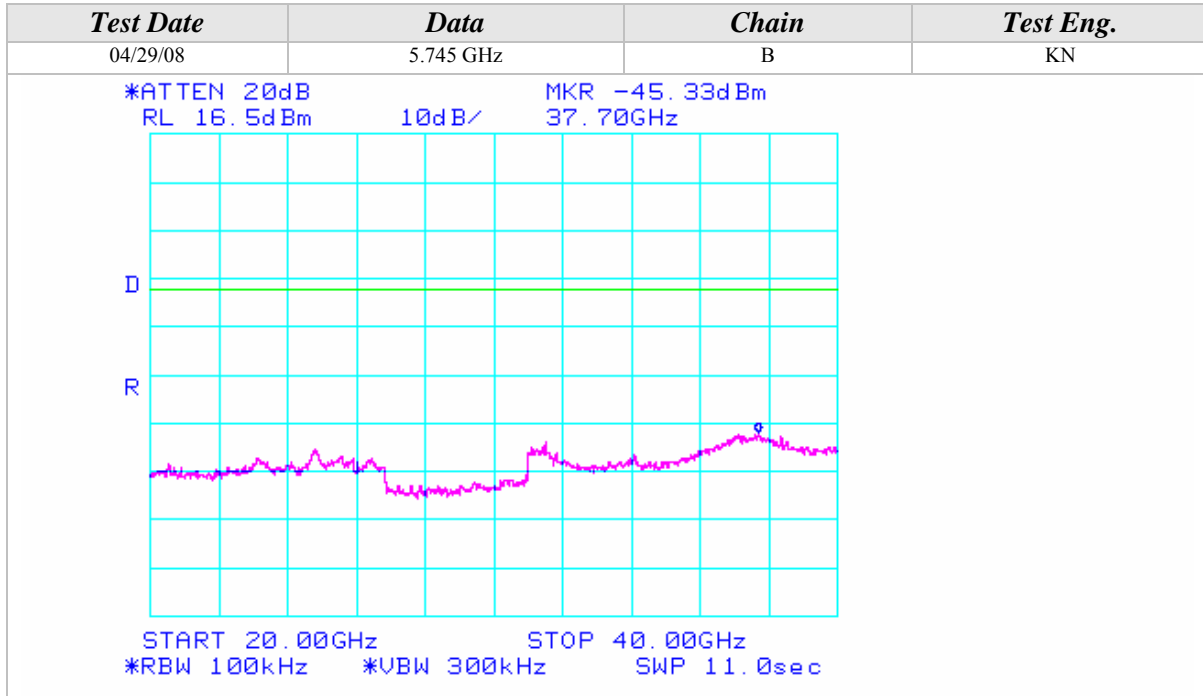



Conducted Out Of Band Emissions (Continued)


802.11a Mode

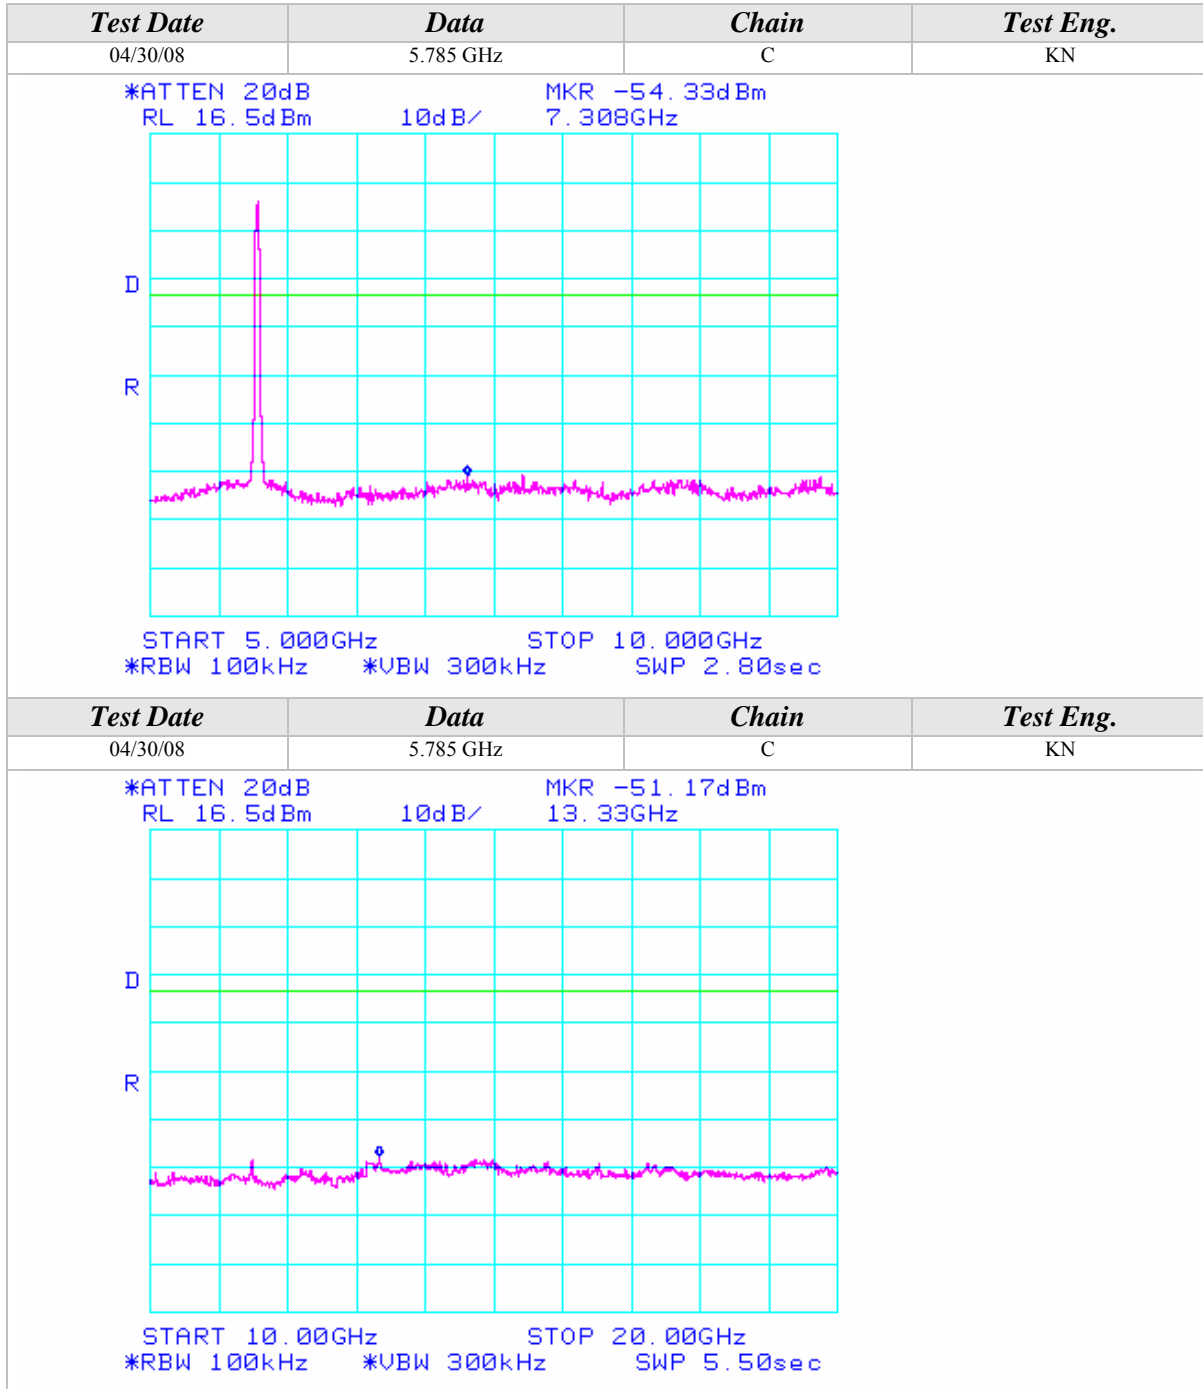



Conducted Out Of Band Emissions (Continued)


802.11a Mode

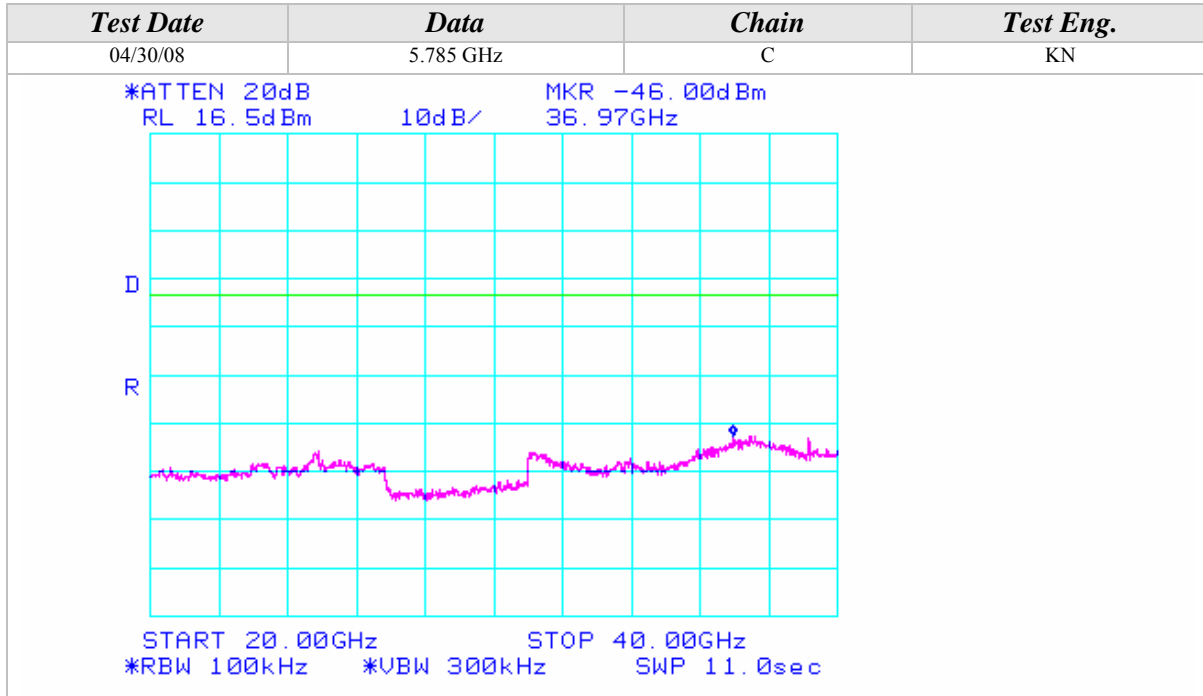



Conducted Out Of Band Emissions (Continued)


802.11a Mode

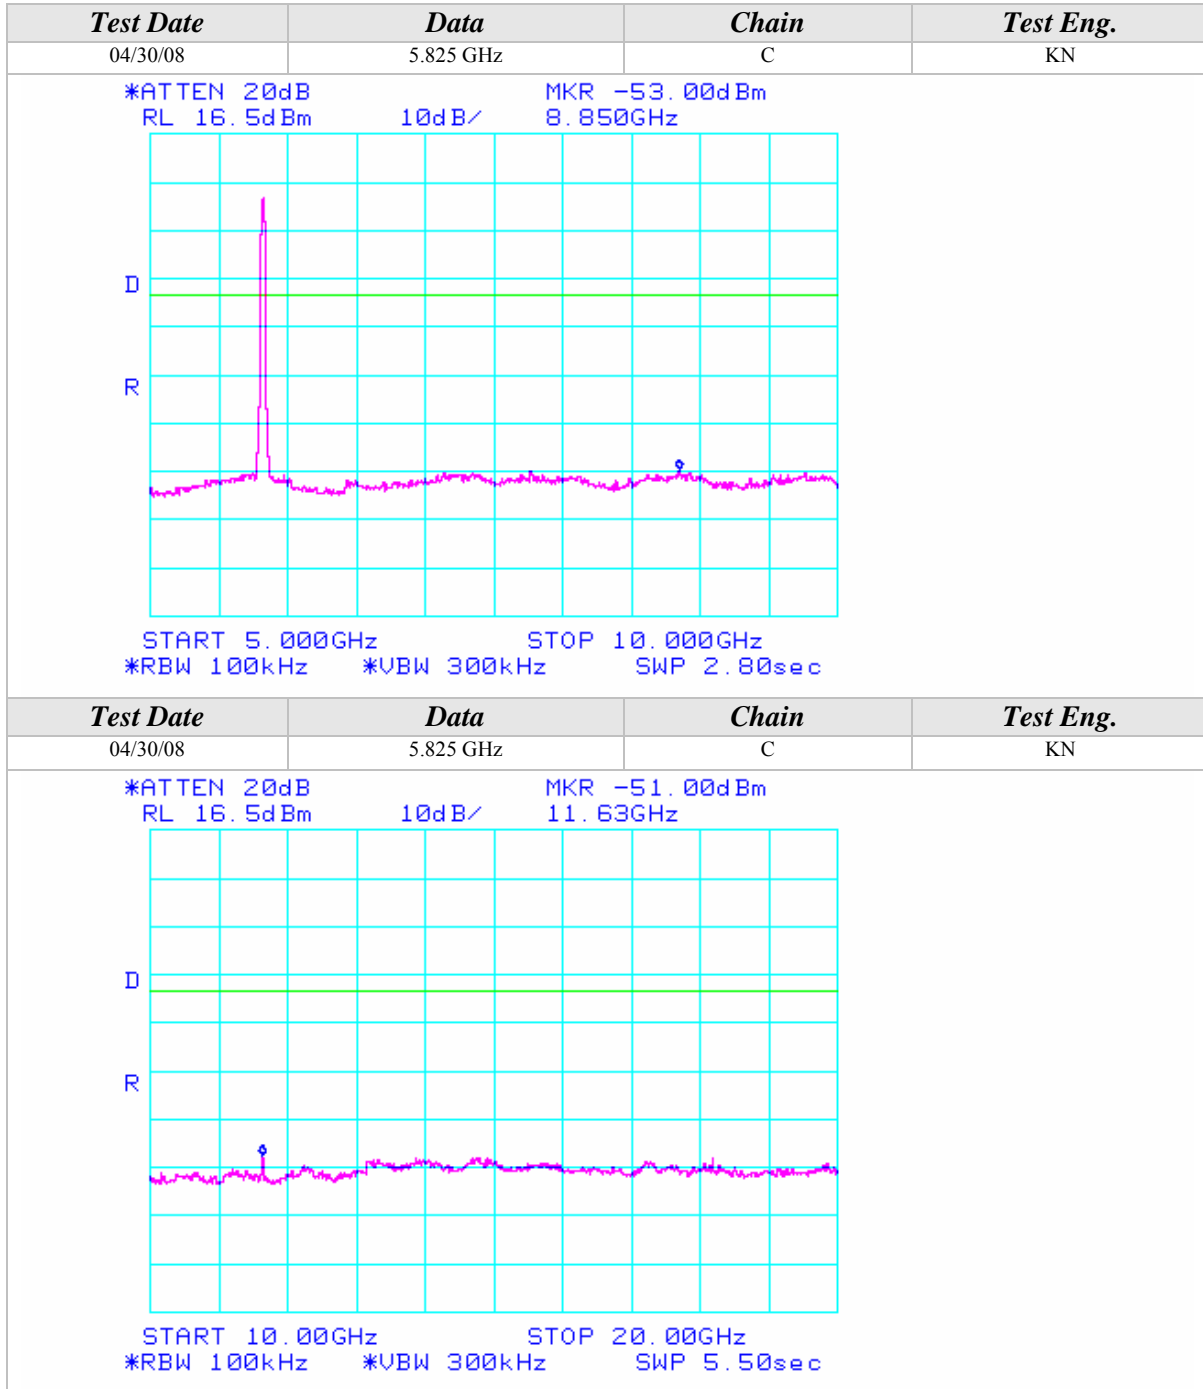



Conducted Out Of Band Emissions (Continued)



802.11a Mode

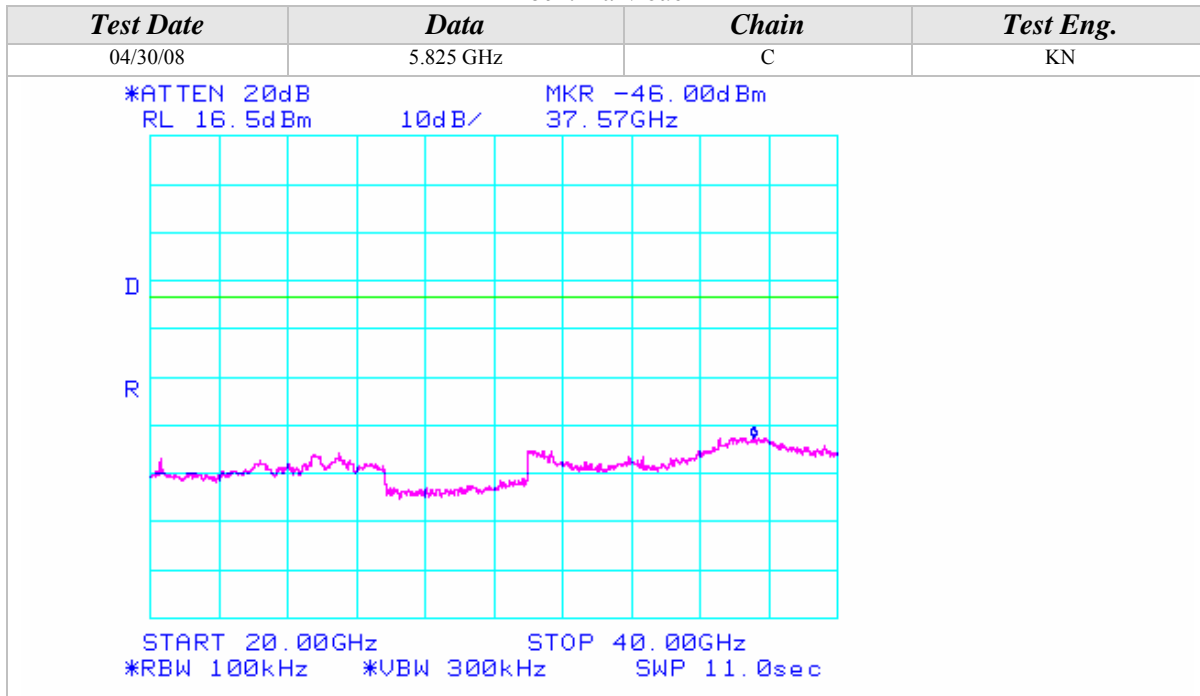



Conducted Out Of Band Emissions (Continued)

802.11b Mode

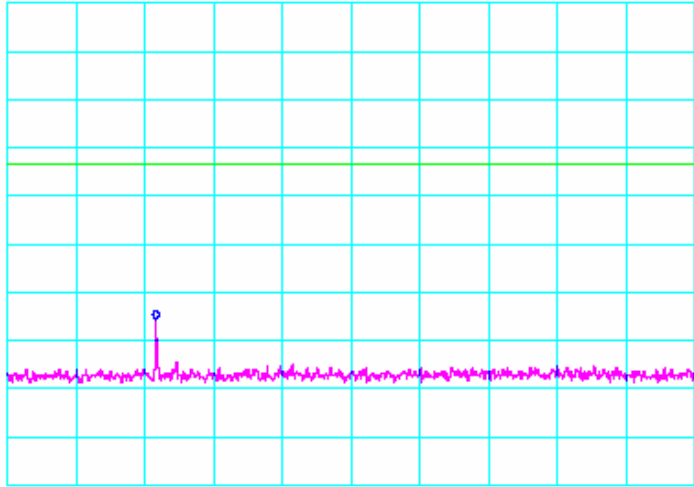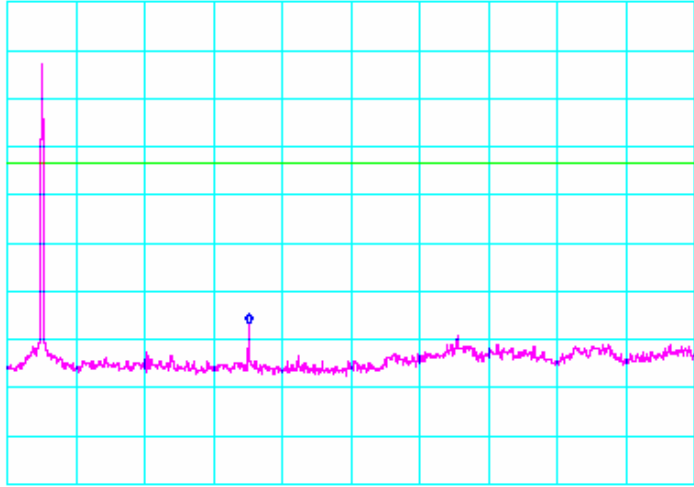Test Date	Data	Chain	Test Eng.
04/28/08	2.412 GHz	A	KN
<p>*ATTEN 20dB MKR -49.17dBm RL 16.5dBm 10dB/ 457MHz</p>  <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>			
Test Date	Data	Chain	Test Eng.
04/28/08	2.412 GHz	A	KN
<p>*ATTEN 20dB MKR -50.17dBm RL 16.5dBm 10dB/ 4.813GHz</p>  <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>			



Conducted Out Of Band Emissions (Continued)

802.11b Mode

Test Date	Data	Chain	Test Eng.
04/28/08	2.412 GHz	A	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -52.17dBm 14.97GHz			
START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec			
Test Date	Data	Chain	Test Eng.
04/28/08	2.412 GHz	A	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -49.17dBm 24.820GHz			
START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec			





Conducted Out Of Band Emissions (Continued)

802.11b Mode

Test Date	Data	Chain	Test Eng.
04/28/08	2.437 GHz	A	KN
<p>*ATTEN 20dB MKR -50.33dBm RL 16.5dBm 10dB/ 483MHz</p> <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>			
Test Date	Data	Chain	Test Eng.
04/28/08	2.437 GHz (INTEL-080317)	A	KN
<p>*ATTEN 20dB MKR -49.33dBm RL 16.5dBm 10dB/ 4.867GHz</p> <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>			



Conducted Out Of Band Emissions (Continued)

802.11b Mode
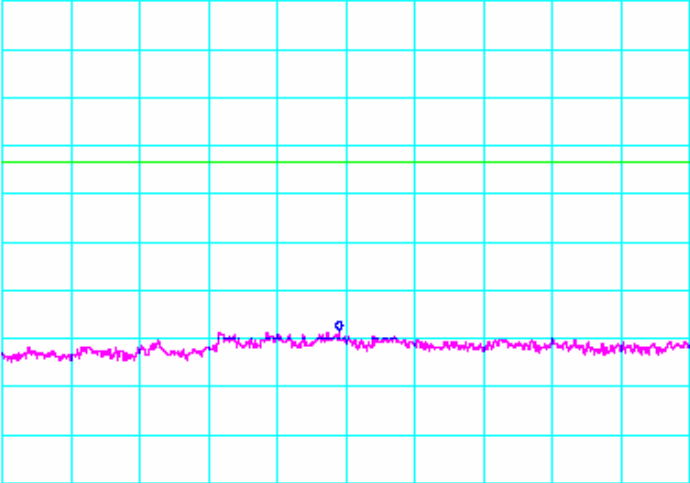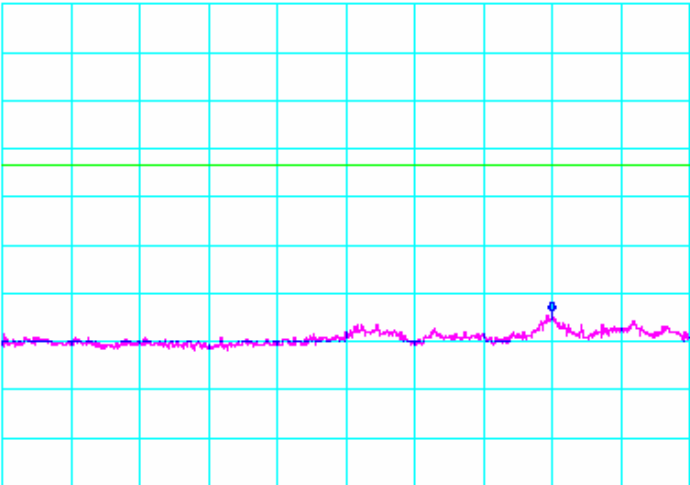
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	2.437 GHz	A	KN
<p data-bbox="329 401 974 455">*ATTEN 20dB MKR -51.83dBm RL 16.5dBm 10dB/ 14.90GHz</p>  <p data-bbox="329 947 1024 995">START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	2.437 GHz (INTEL-080317)	A	KN
<p data-bbox="329 1092 974 1142">*ATTEN 20dB MKR -47.33dBm RL 16.5dBm 10dB/ 24.80GHz</p>  <p data-bbox="329 1638 1024 1688">START 20.00GHz STOP 26.00GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec</p>			

Conducted Out Of Band Emissions (Continued)


802.11b Mode

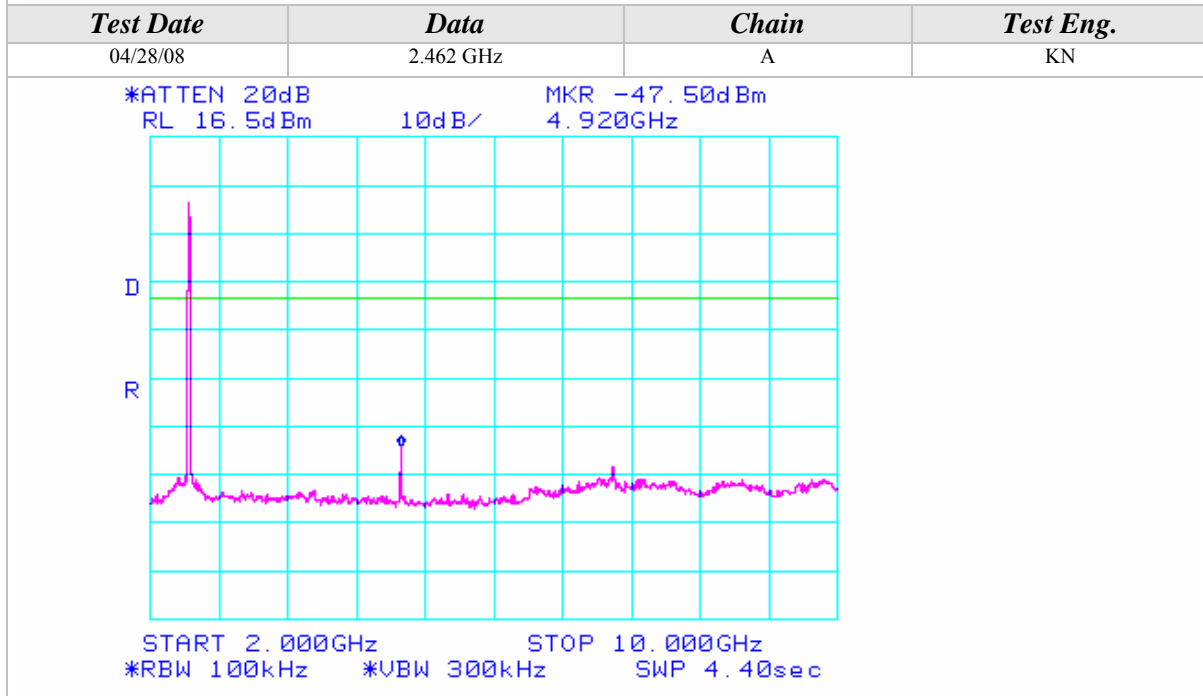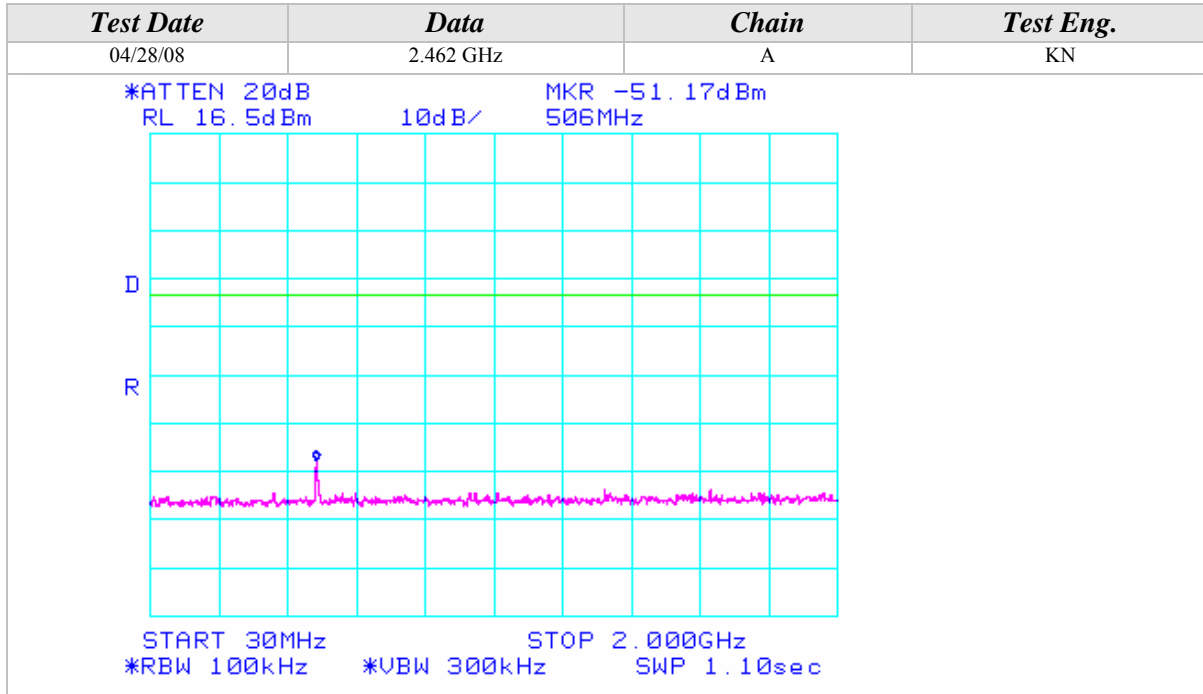



Conducted Out Of Band Emissions (Continued)


802.11b Mode

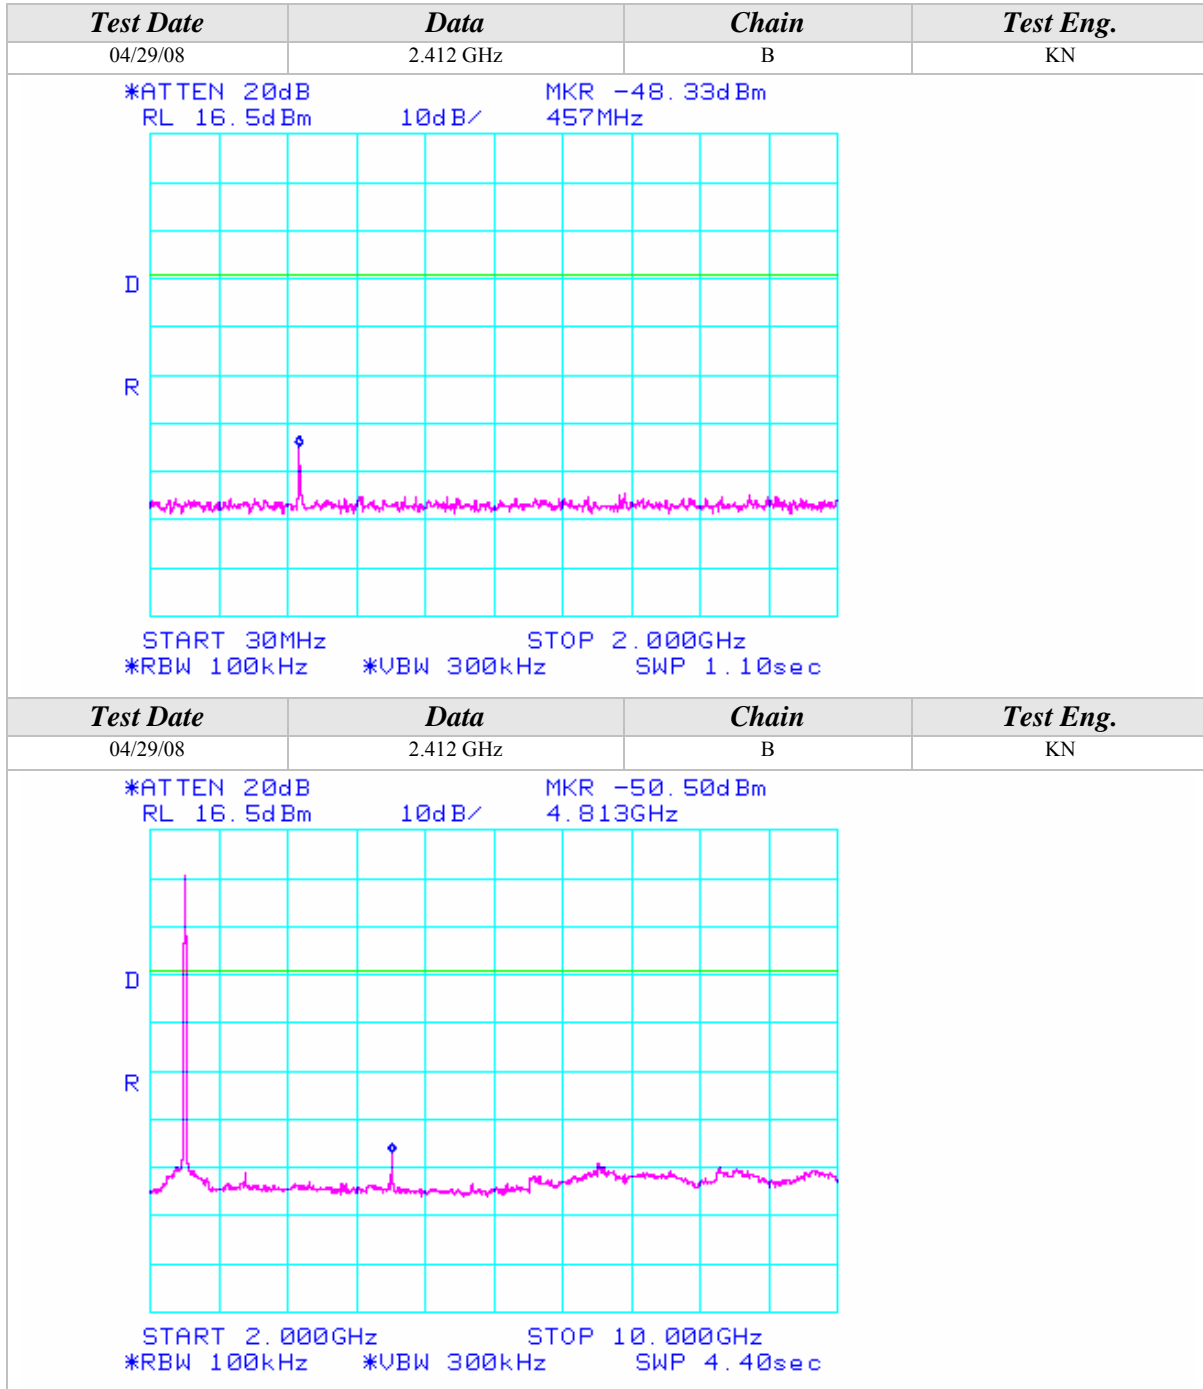




Conducted Out Of Band Emissions (Continued)

802.11b Mode

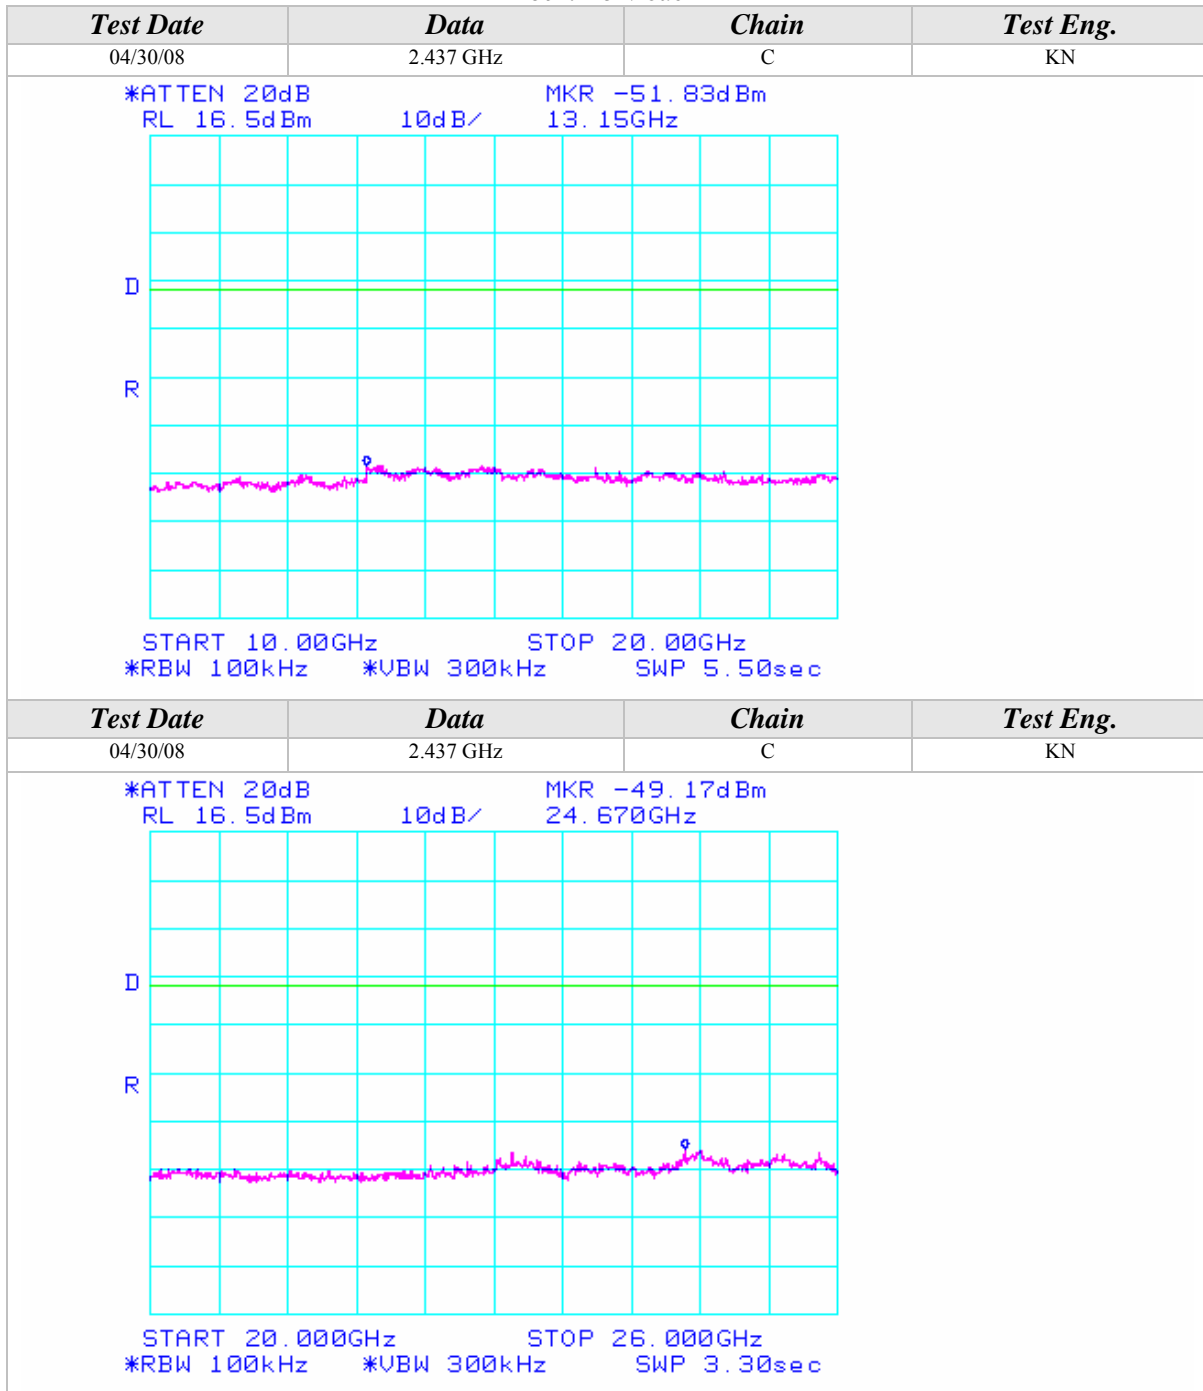

Conducted Out Of Band Emissions (Continued)


802.11b Mode

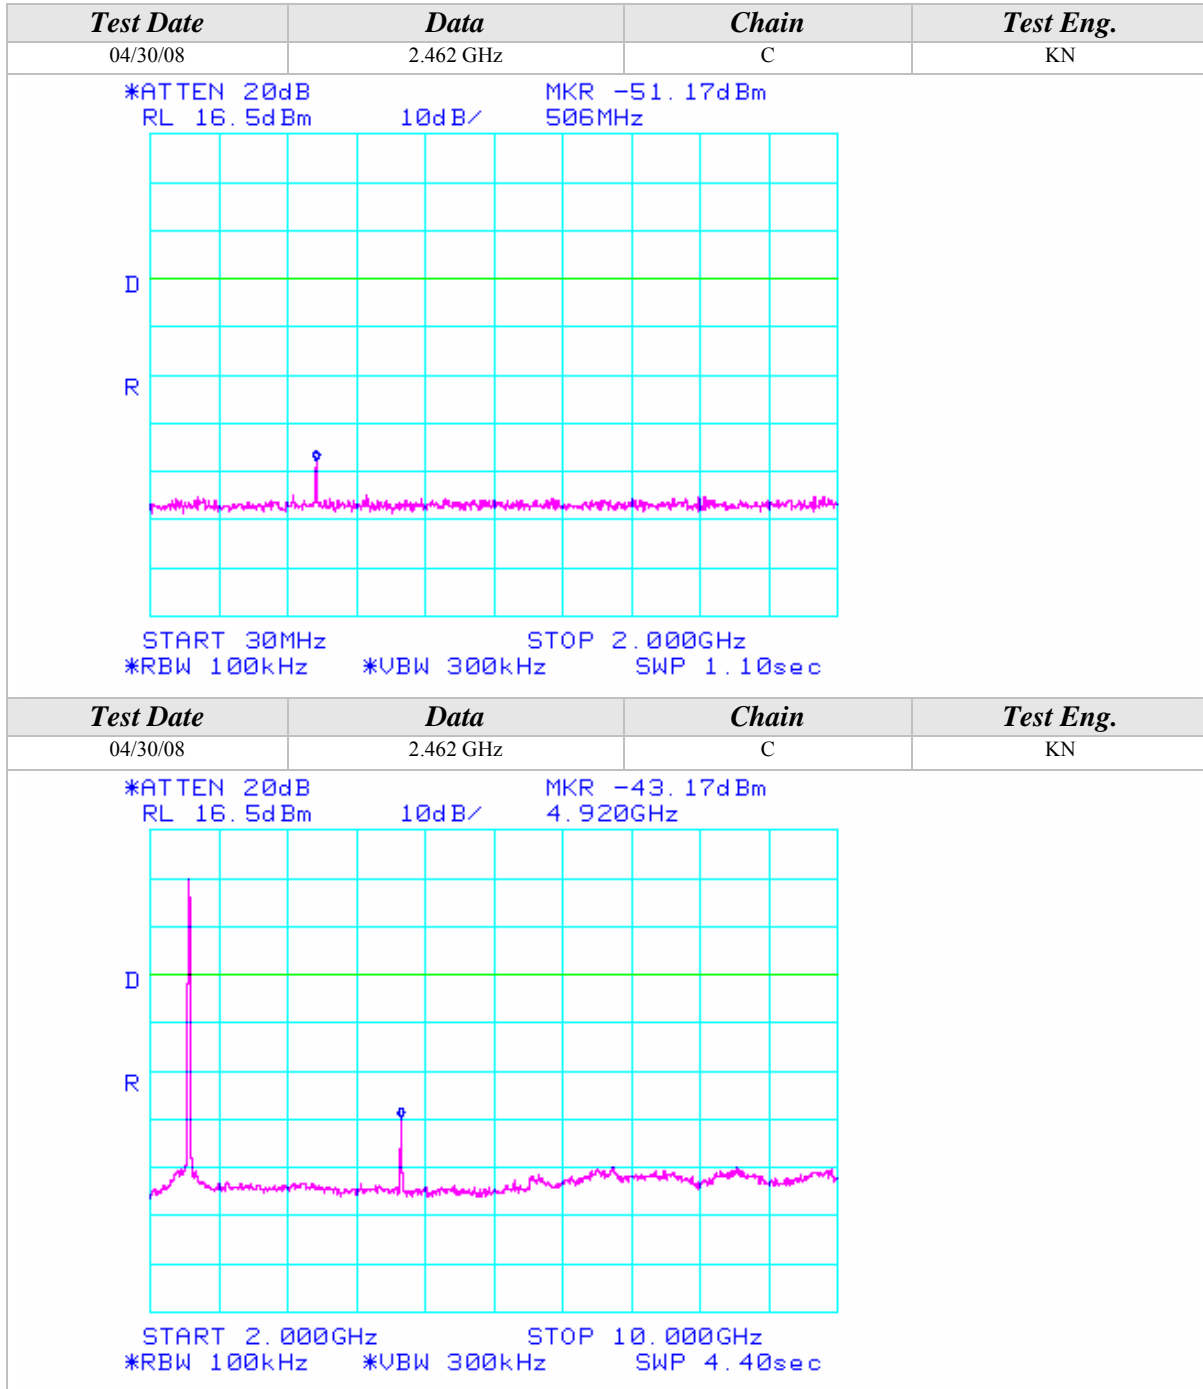



Conducted Out Of Band Emissions (Continued)



802.11b Mode

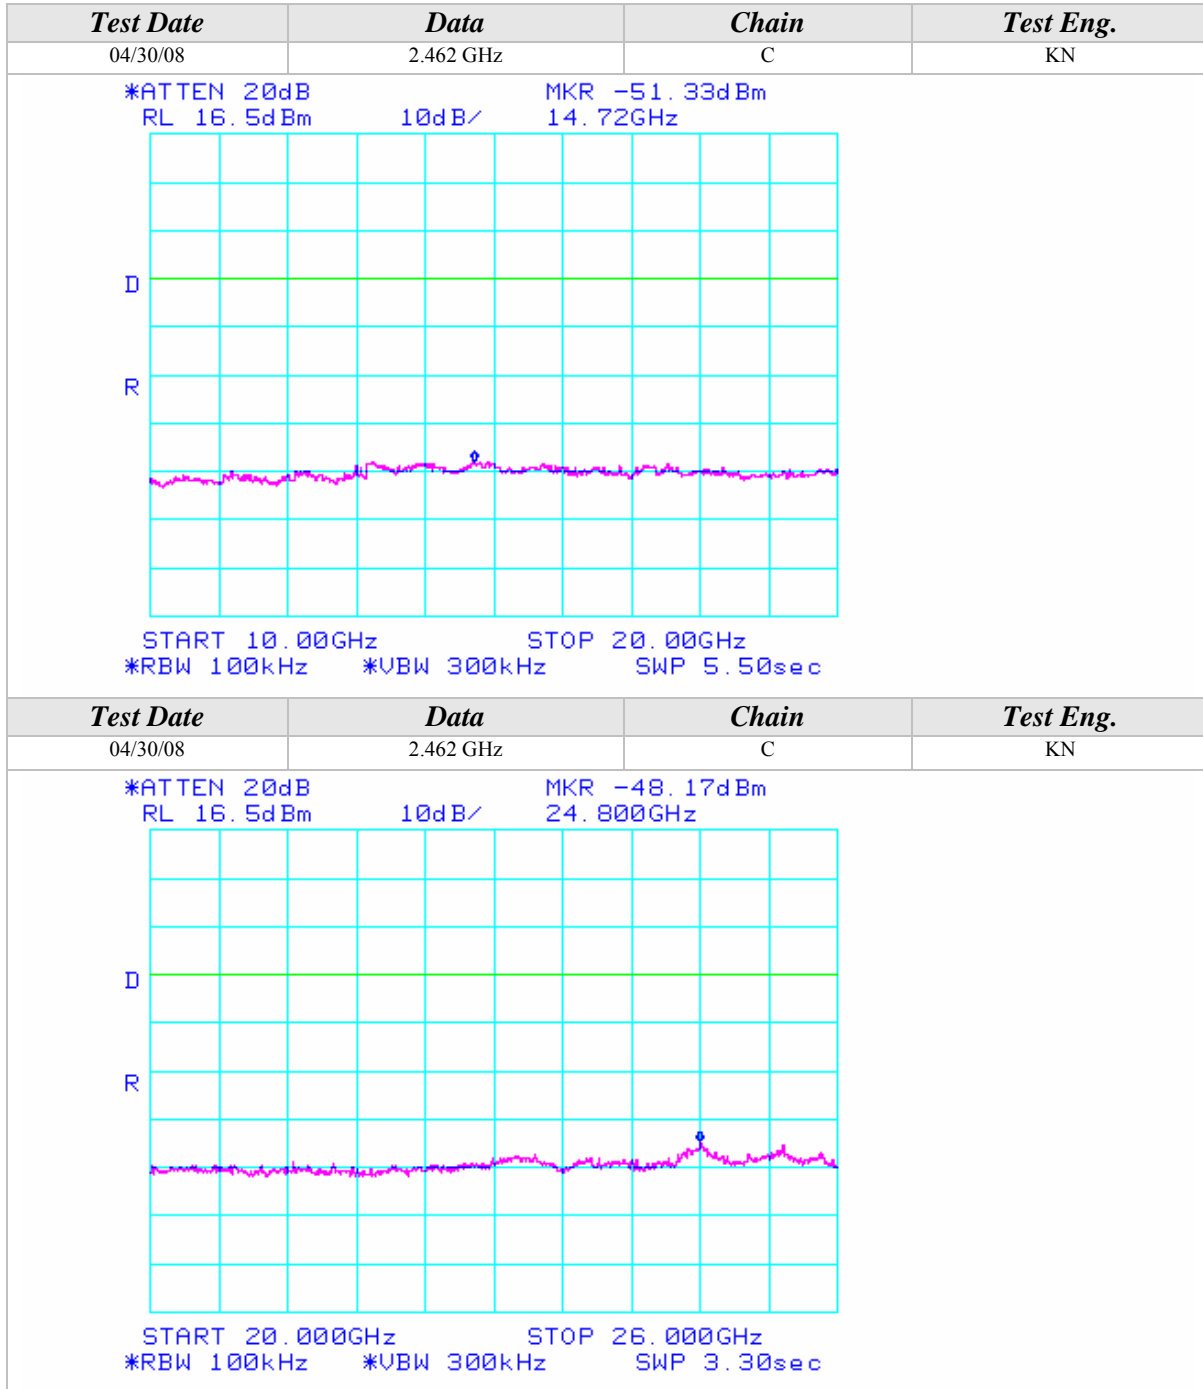





Conducted Out Of Band Emissions (Continued)

802.11g Mode

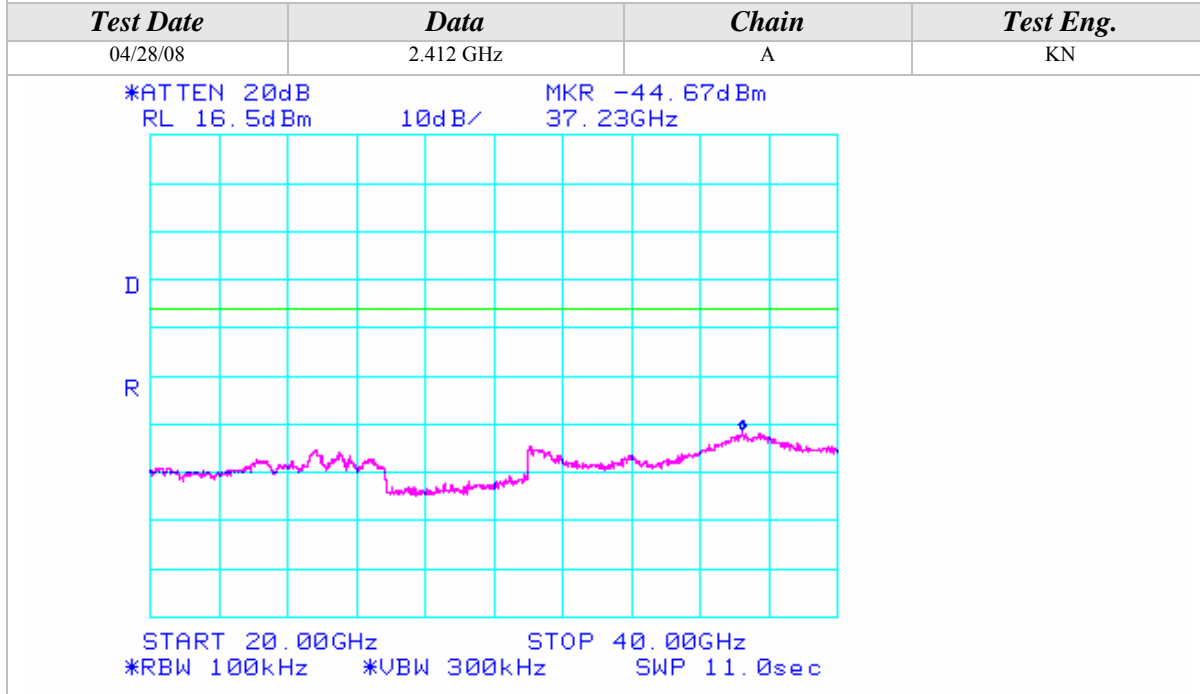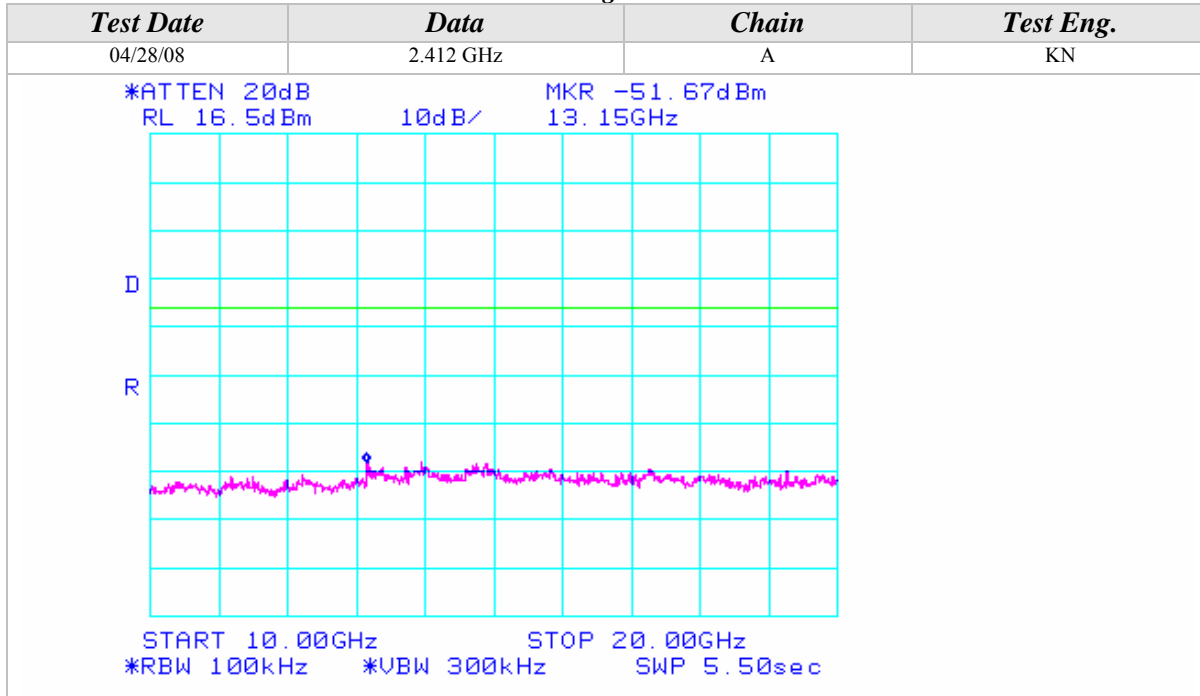

Conducted Out Of Band Emissions (Continued)



802.11g Mode

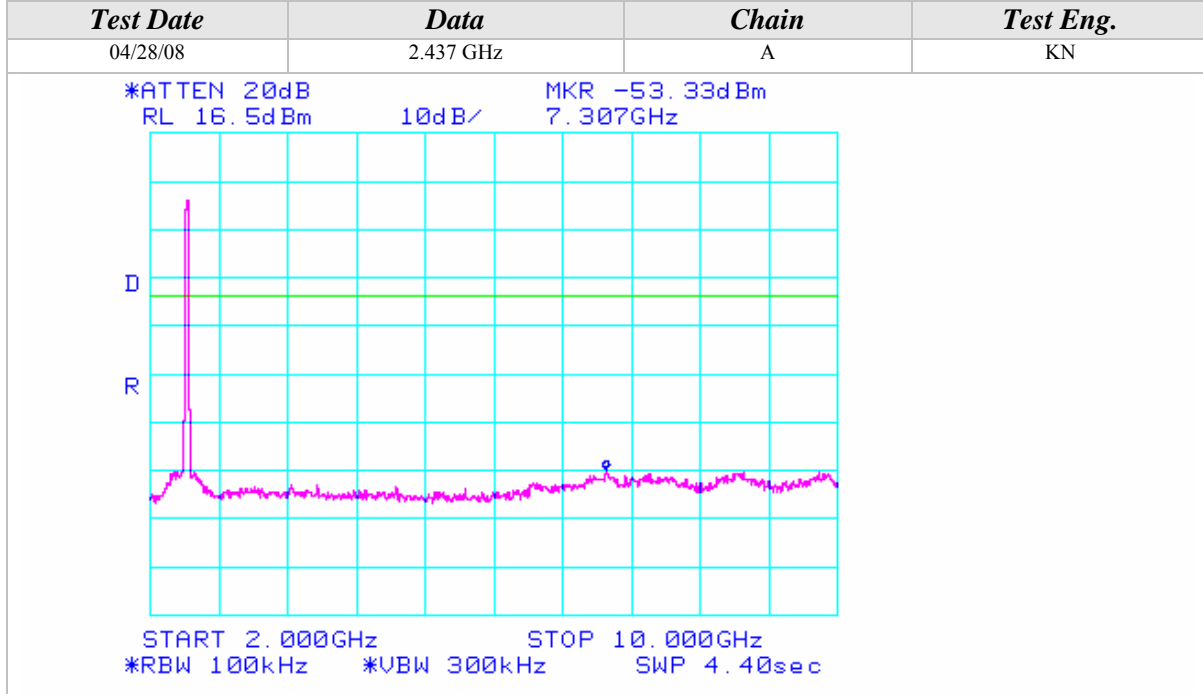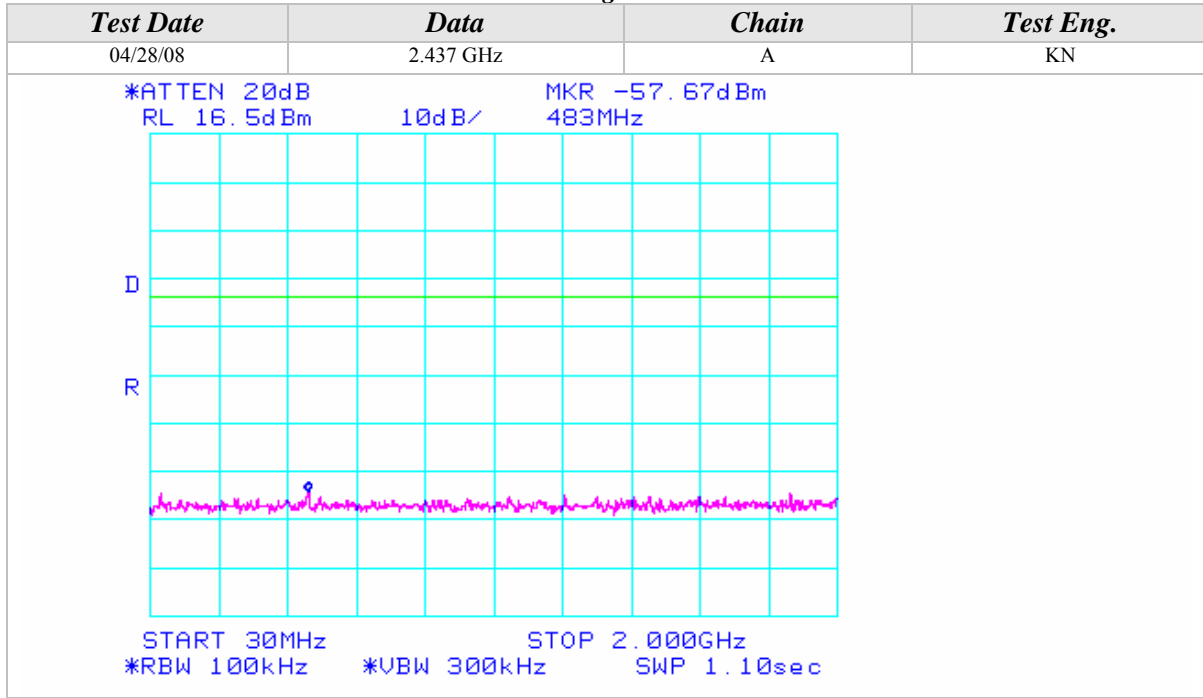



Conducted Out Of Band Emissions (Continued)


802.11g Mode

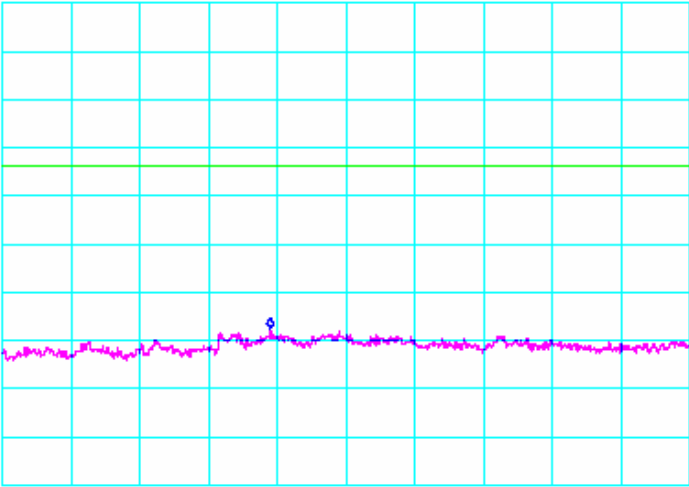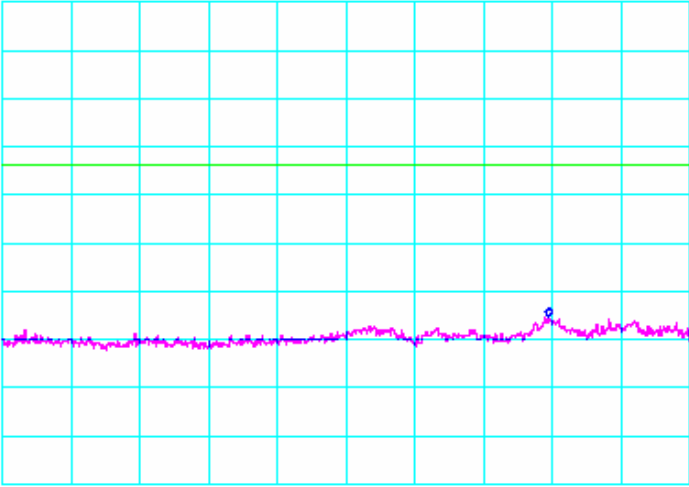Test Date	Data	Chain	Test Eng.
04/28/08	2.437 GHz	A	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -51.00dBm 13.90GHz			
			
START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec			
Test Date	Data	Chain	Test Eng.
04/28/08	2.437 GHz	A	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -48.83dBm 24.770GHz			
			
START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec			



Conducted Out Of Band Emissions (Continued)

802.11g Mode

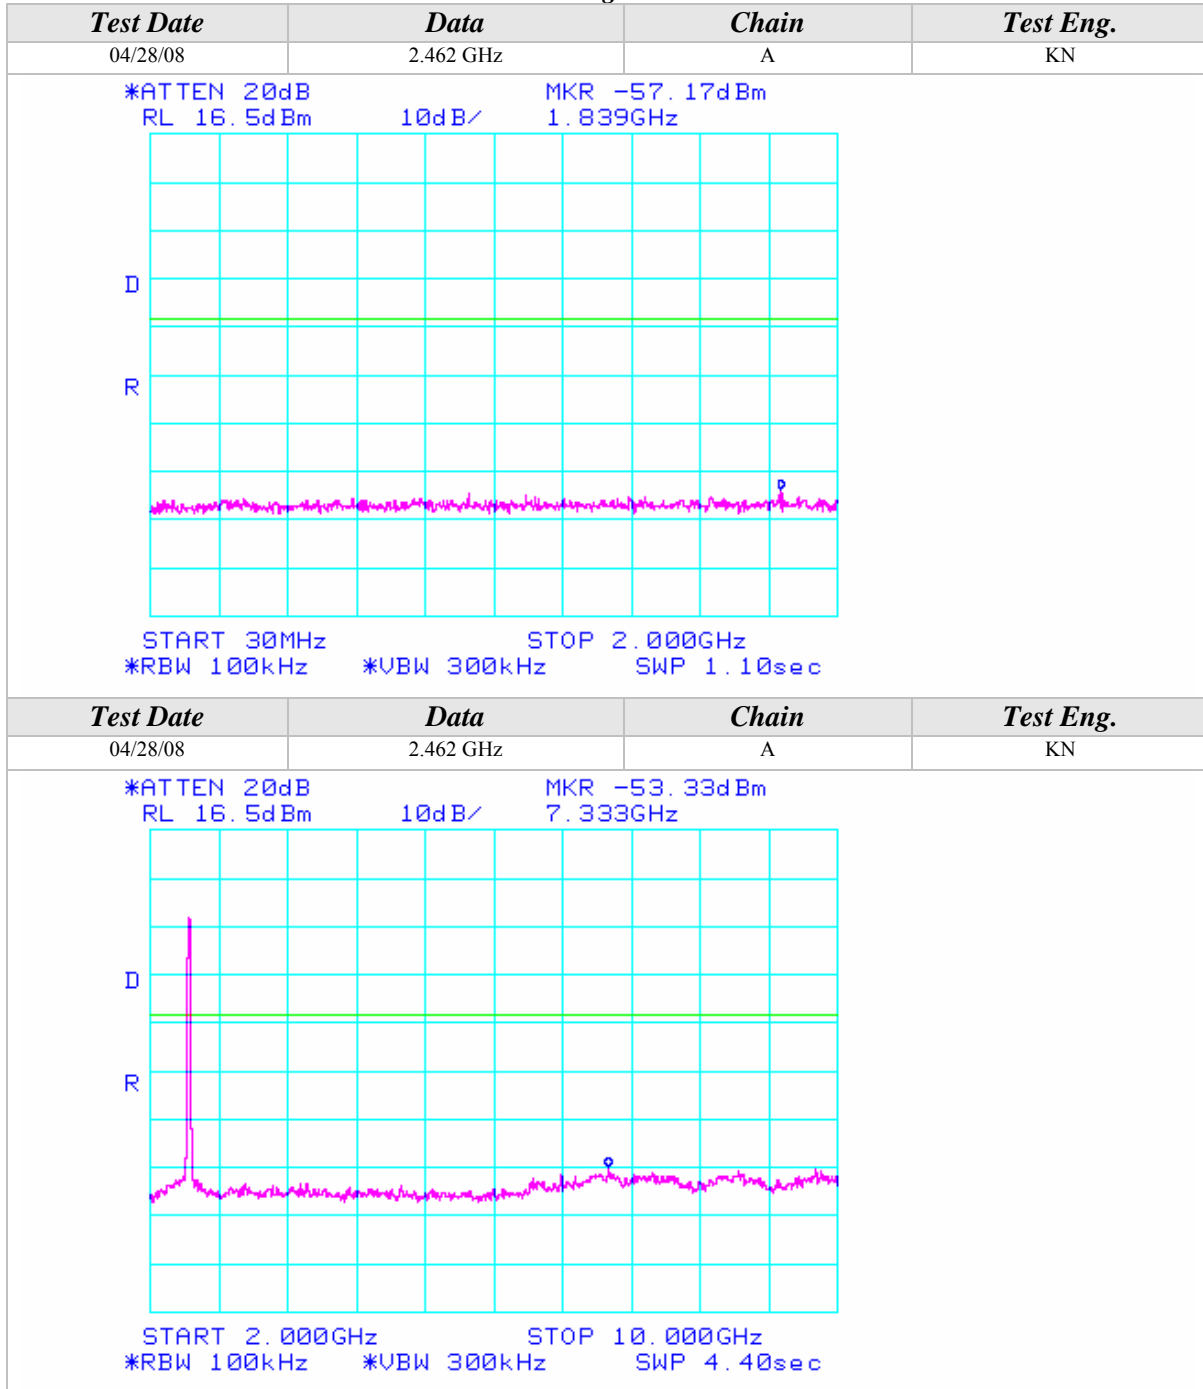



Conducted Out Of Band Emissions (Continued)



802.11g Mode

Test Date	Data	Chain	Test Eng.
04/28/08	2.462 GHz	A	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -51.00dBm 13.37GHz			
START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec			
Test Date	Data	Chain	Test Eng.
04/28/08	2.462 GHz	A	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -48.17dBm 24.730GHz			
START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec			




Conducted Out Of Band Emissions (Continued)

802.11g Mode

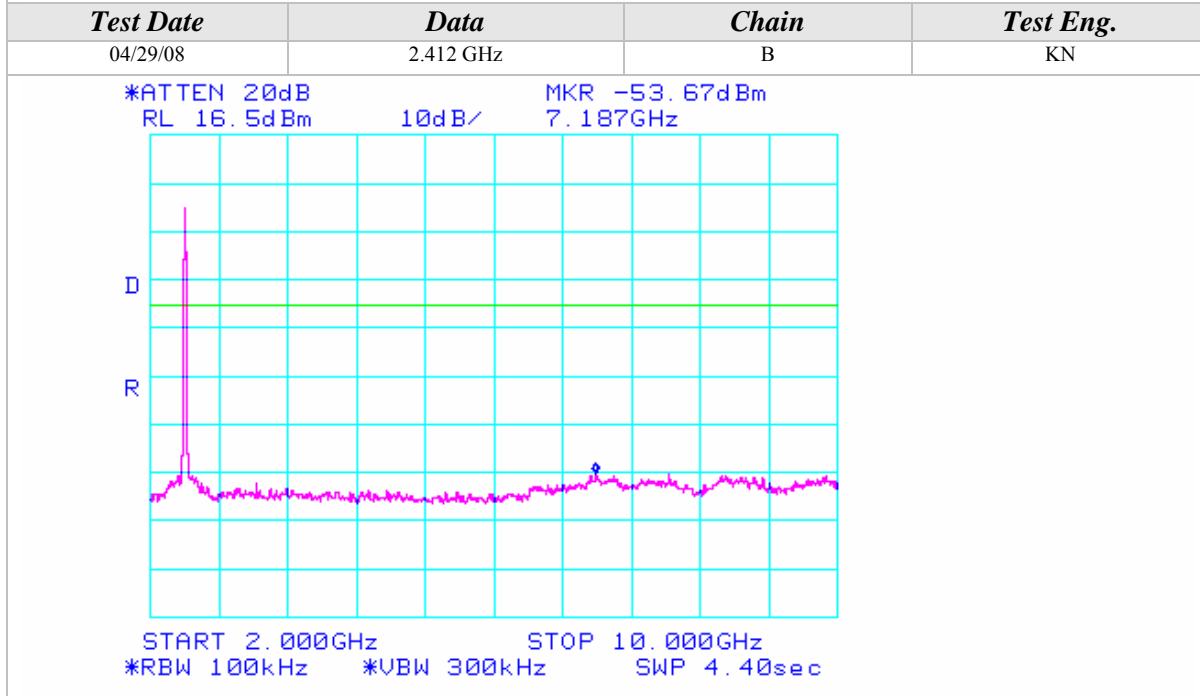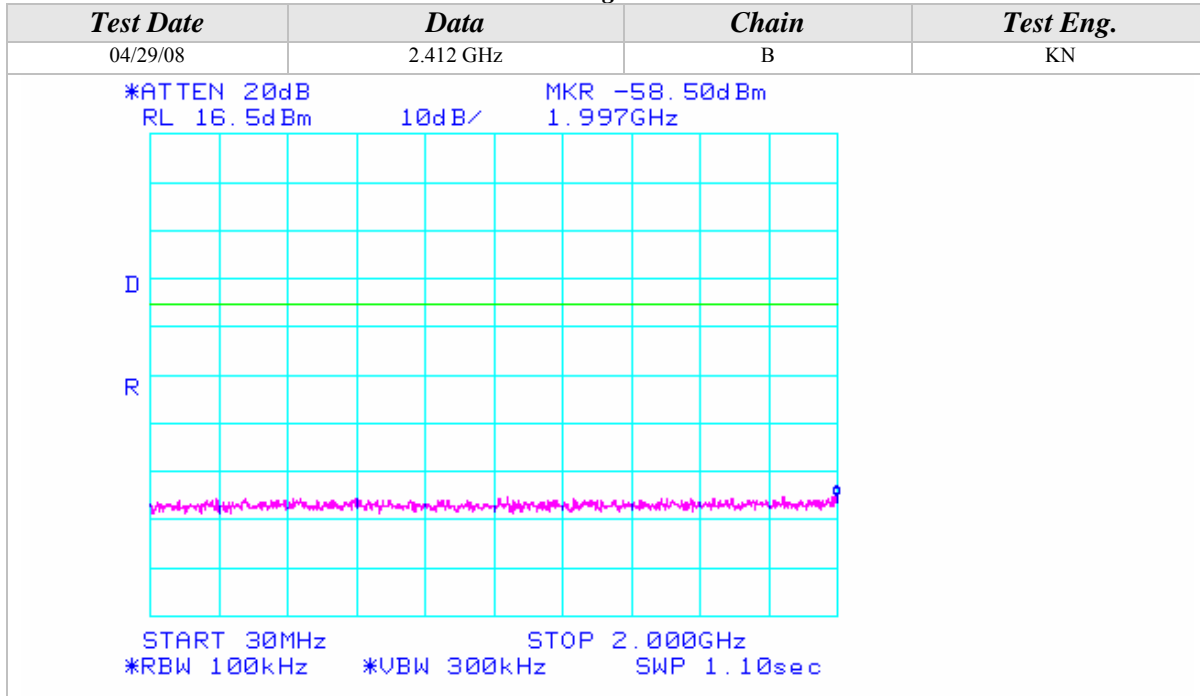

Conducted Out Of Band Emissions (Continued)


802.11g Mode

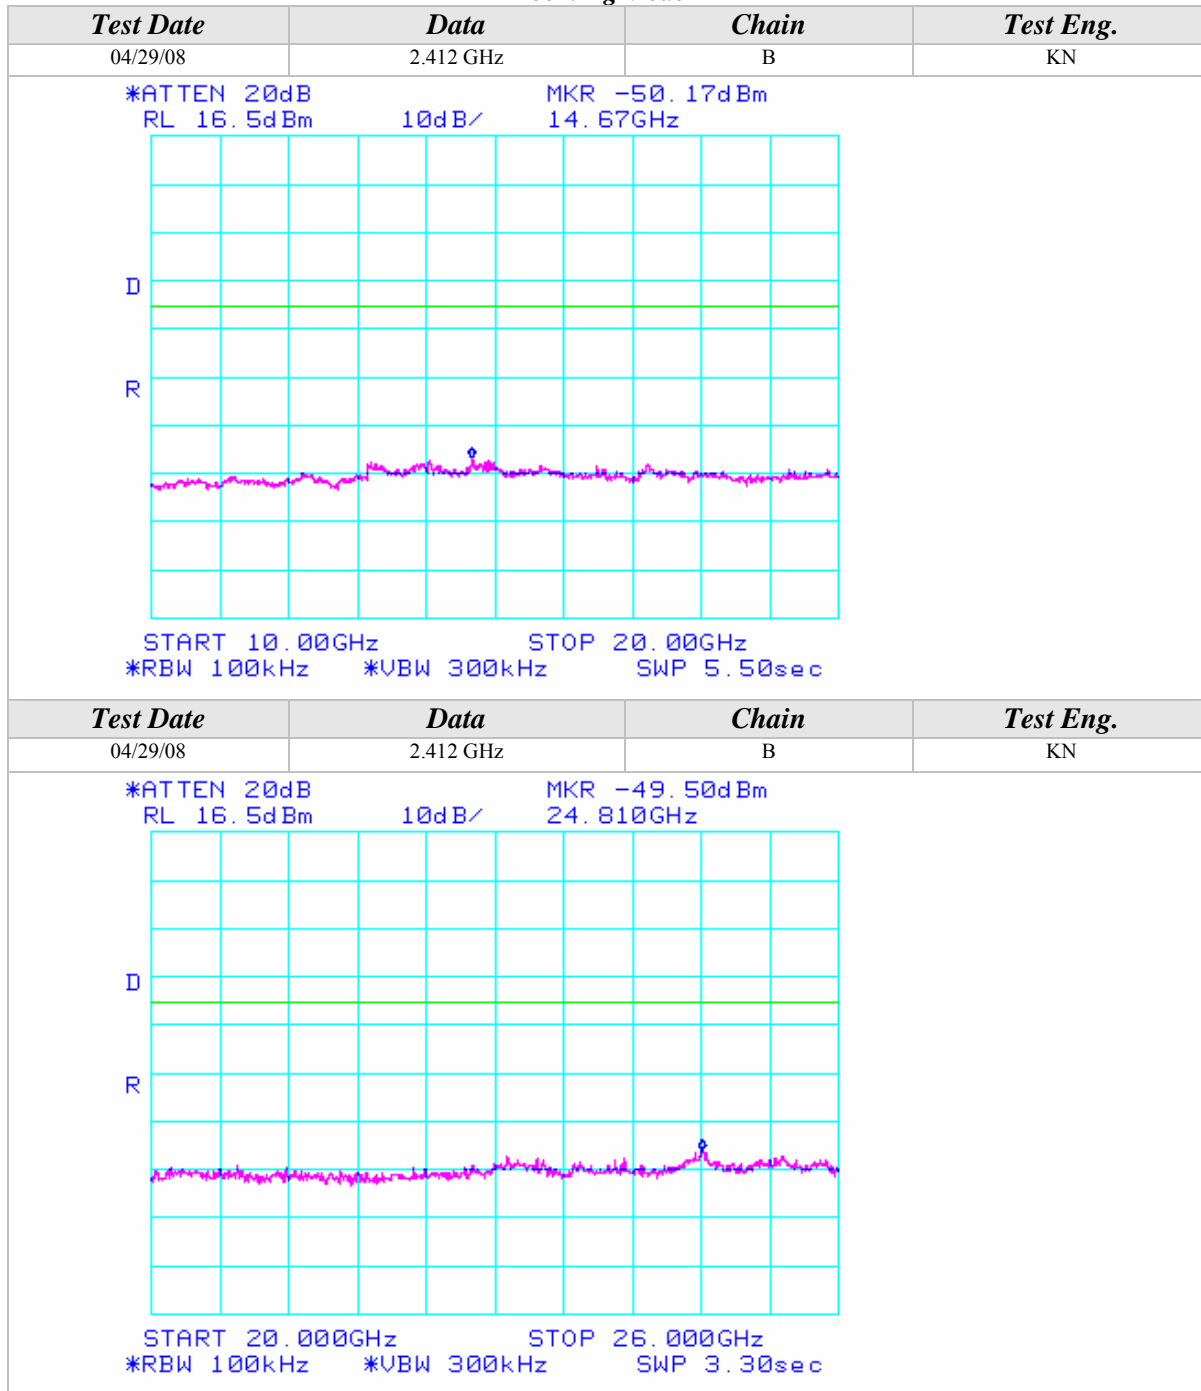



Conducted Out Of Band Emissions (Continued)


802.11g Mode

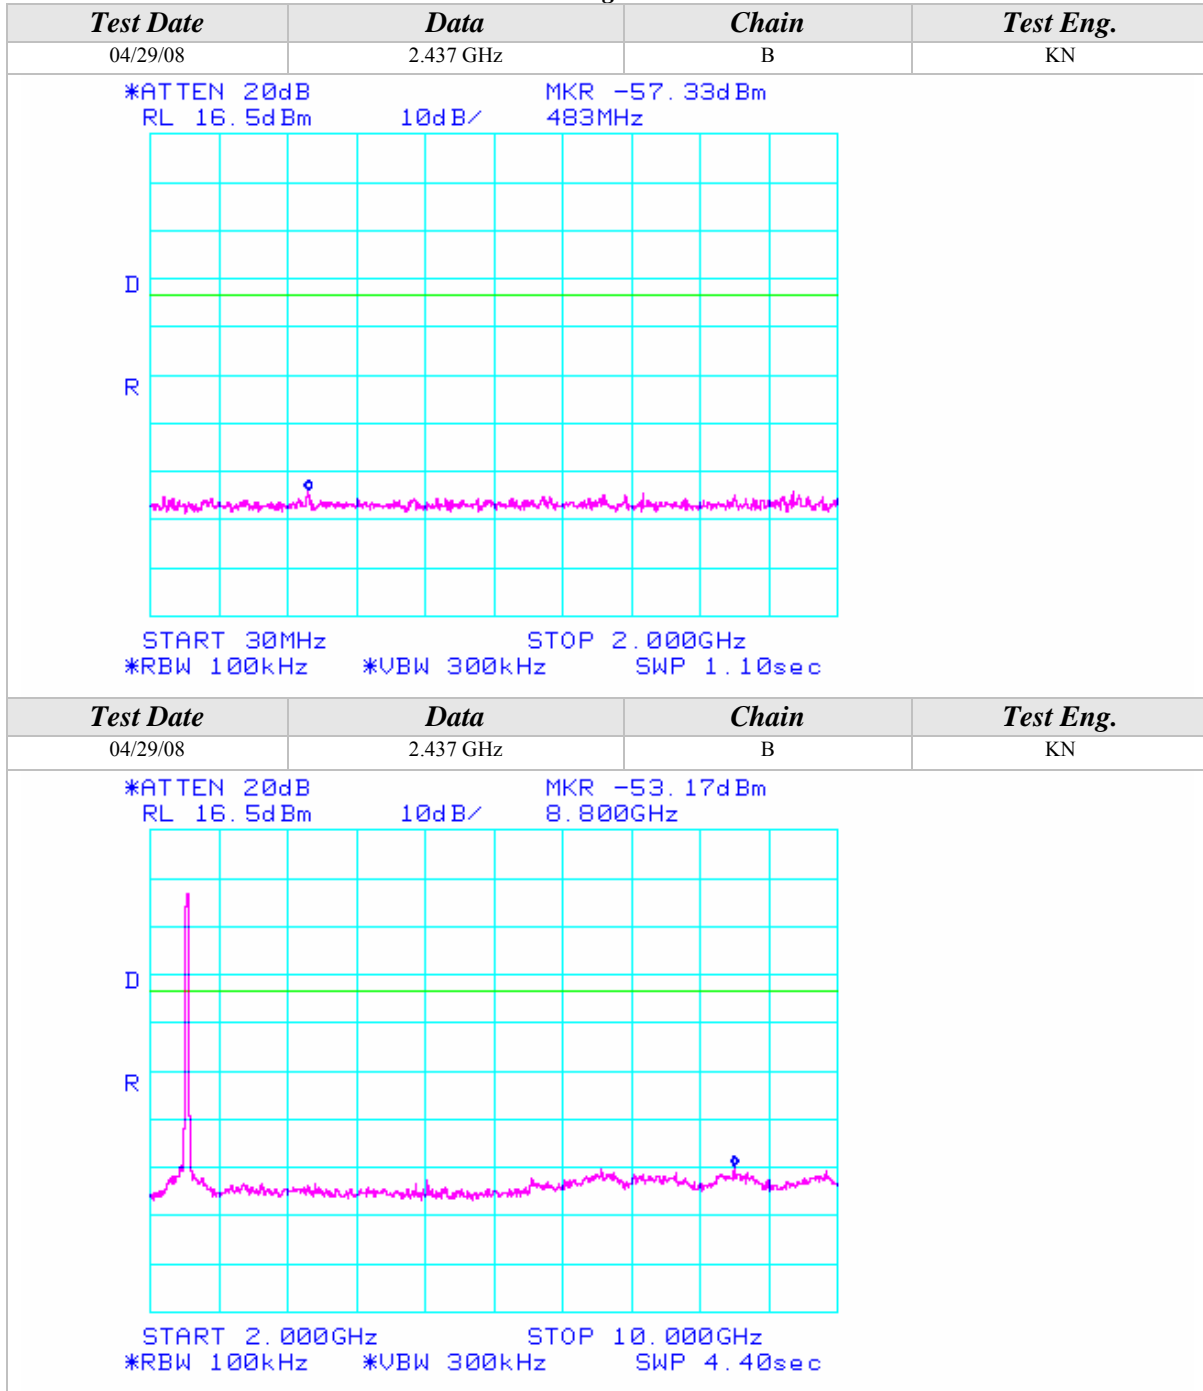



Conducted Out Of Band Emissions (Continued)


802.11g Mode

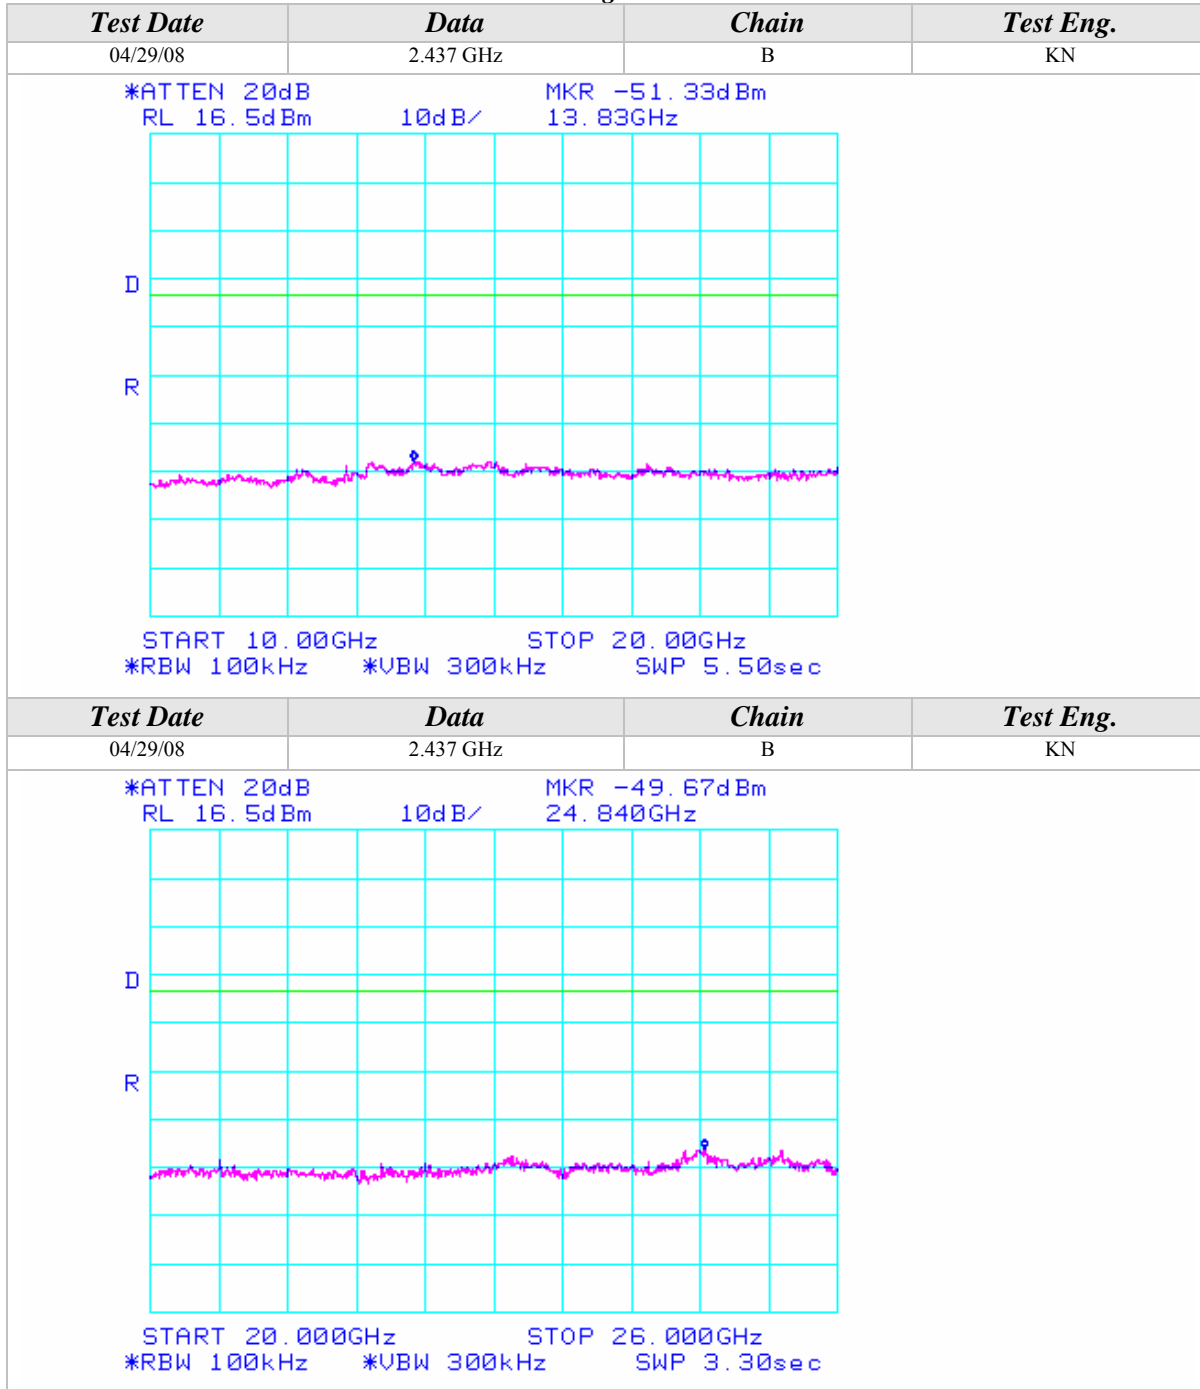





Conducted Out Of Band Emissions (Continued)

802.11g Mode

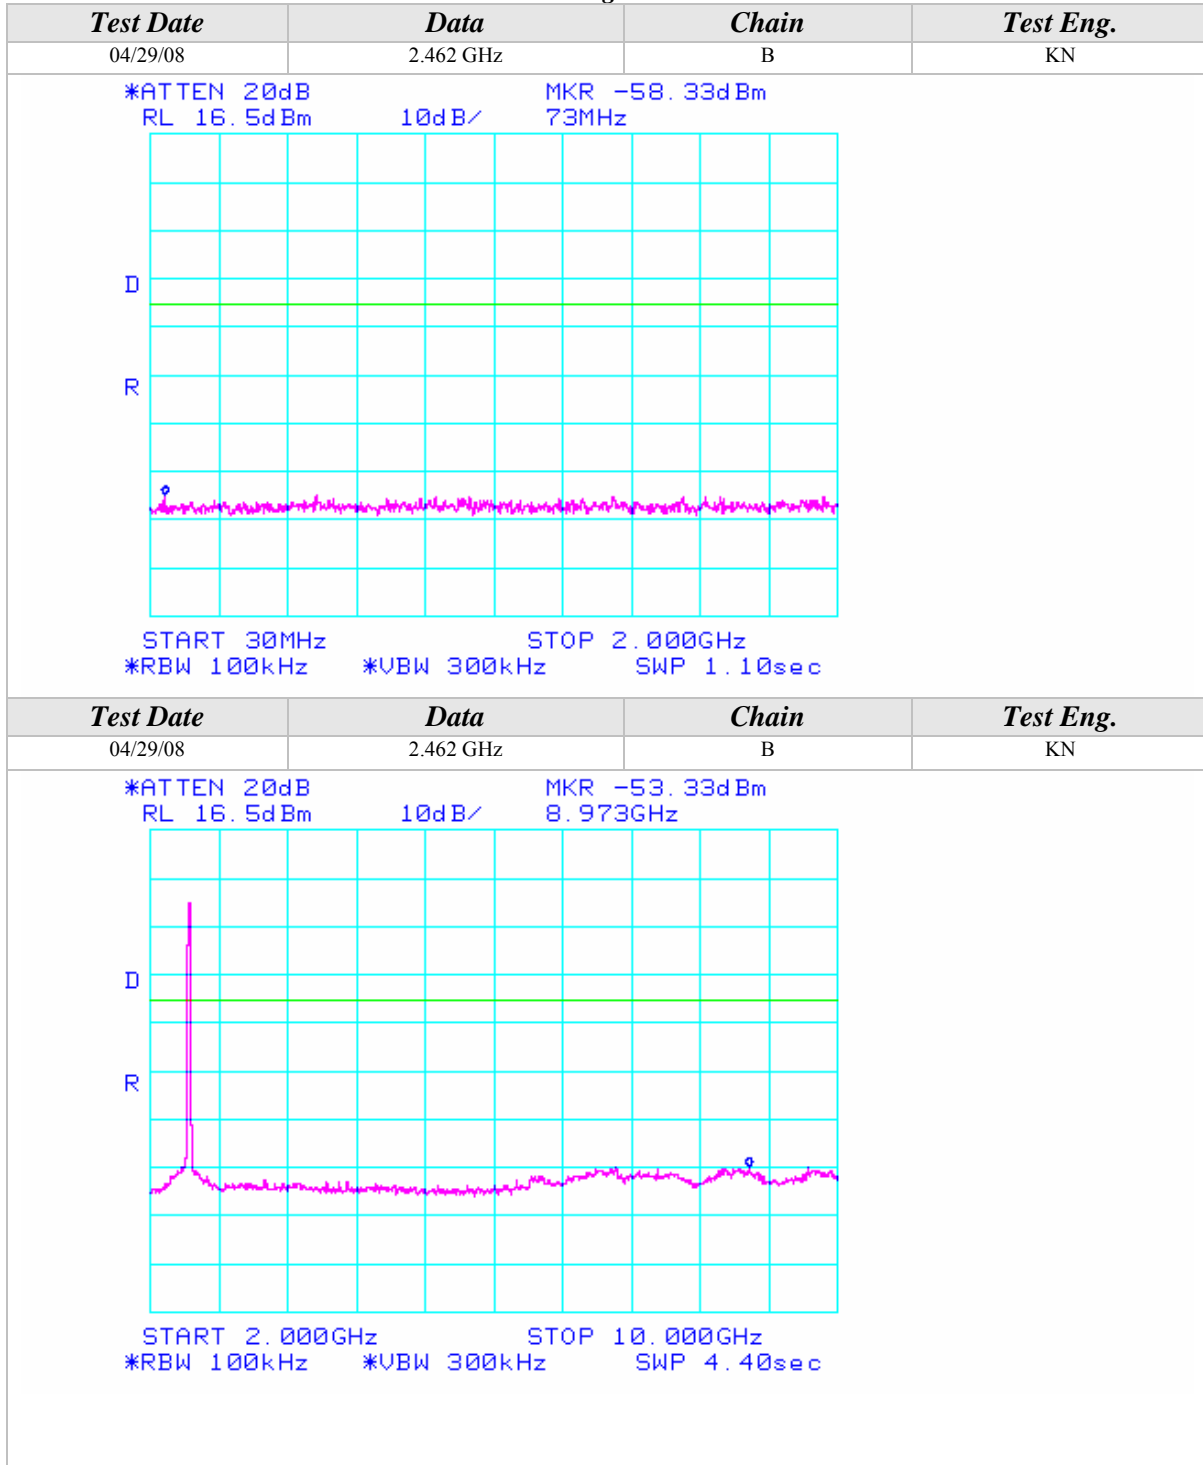

Conducted Out Of Band Emissions (Continued)


802.11g Mode

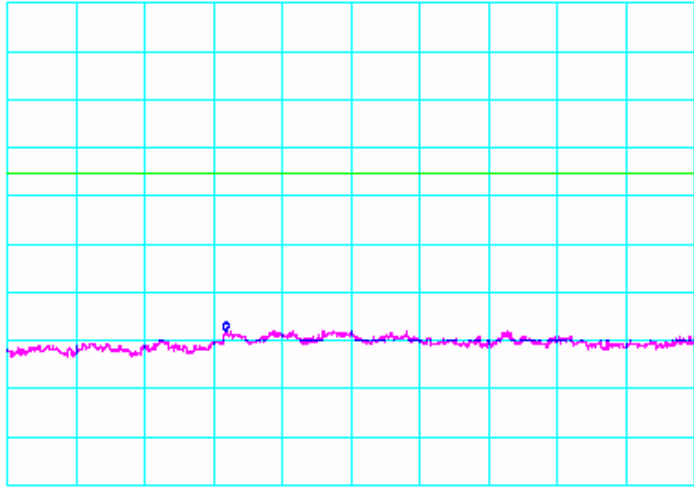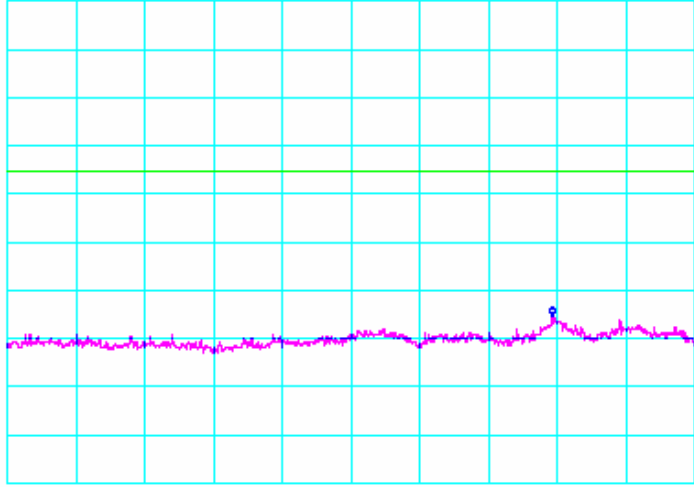Test Date	Data	Chain	Test Eng.
04/29/08	2.462 GHz	B	KN
<p>*ATTEN 20dB MKR -51.50dBm RL 16.5dBm 10dB/ 13.18GHz</p>  <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			
Test Date	Data	Chain	Test Eng.
04/29/08	2.462 GHz	B	KN
<p>*ATTEN 20dB MKR -48.83dBm RL 16.5dBm 10dB/ 24.760GHz</p>  <p>START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec</p>			



Conducted Out Of Band Emissions (Continued)


802.11g Mode

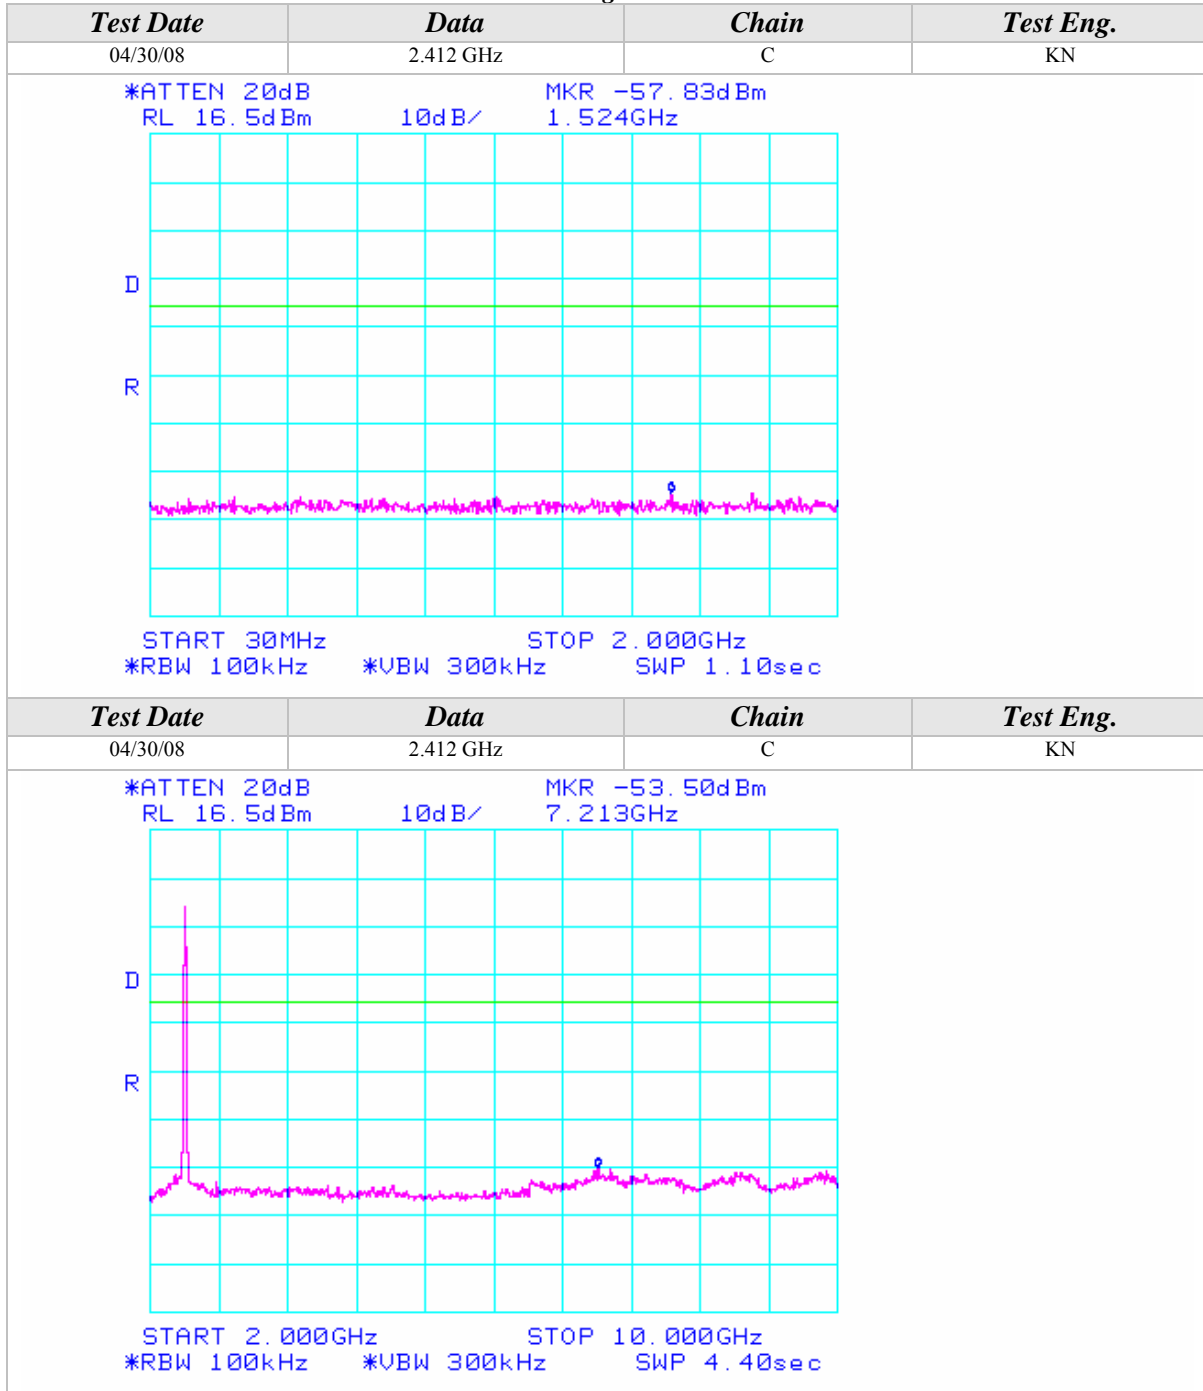



Conducted Out Of Band Emissions (Continued)



802.11g Mode

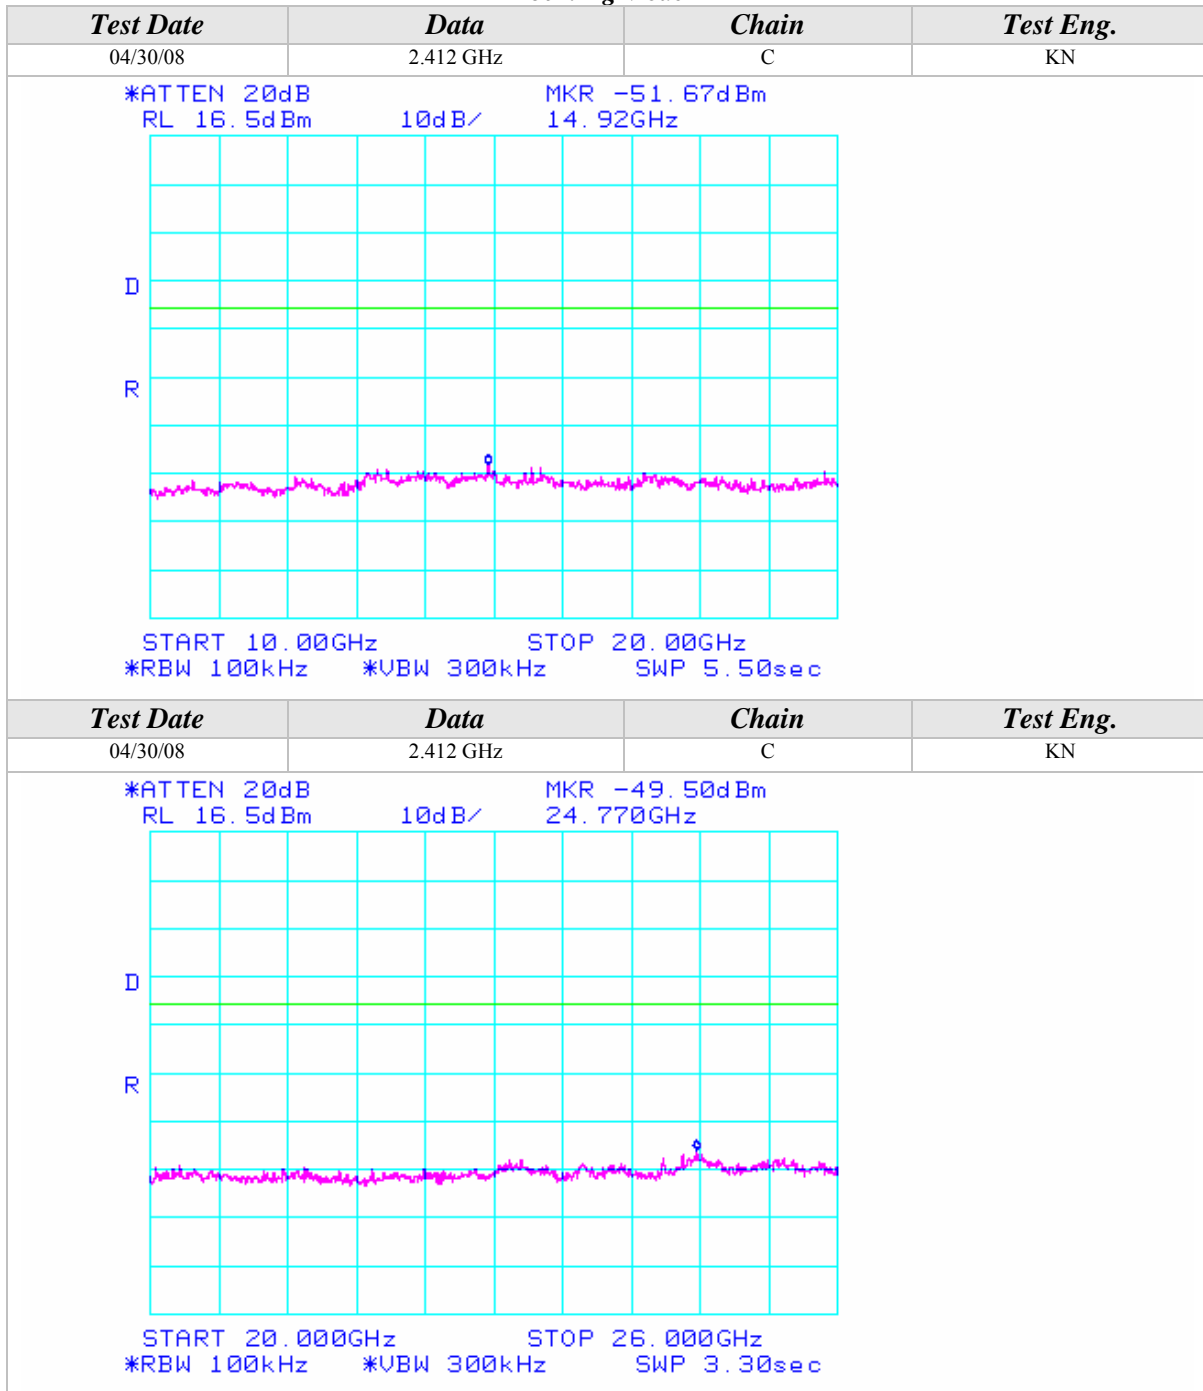



Conducted Out Of Band Emissions (Continued)

802.11g Mode

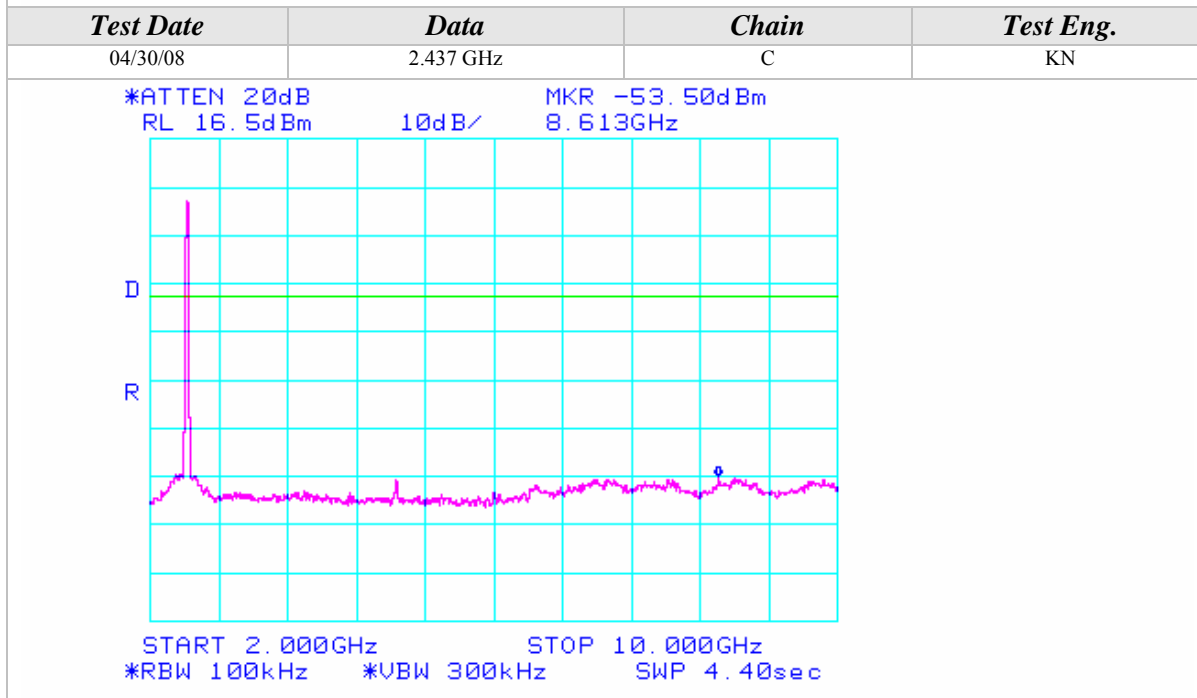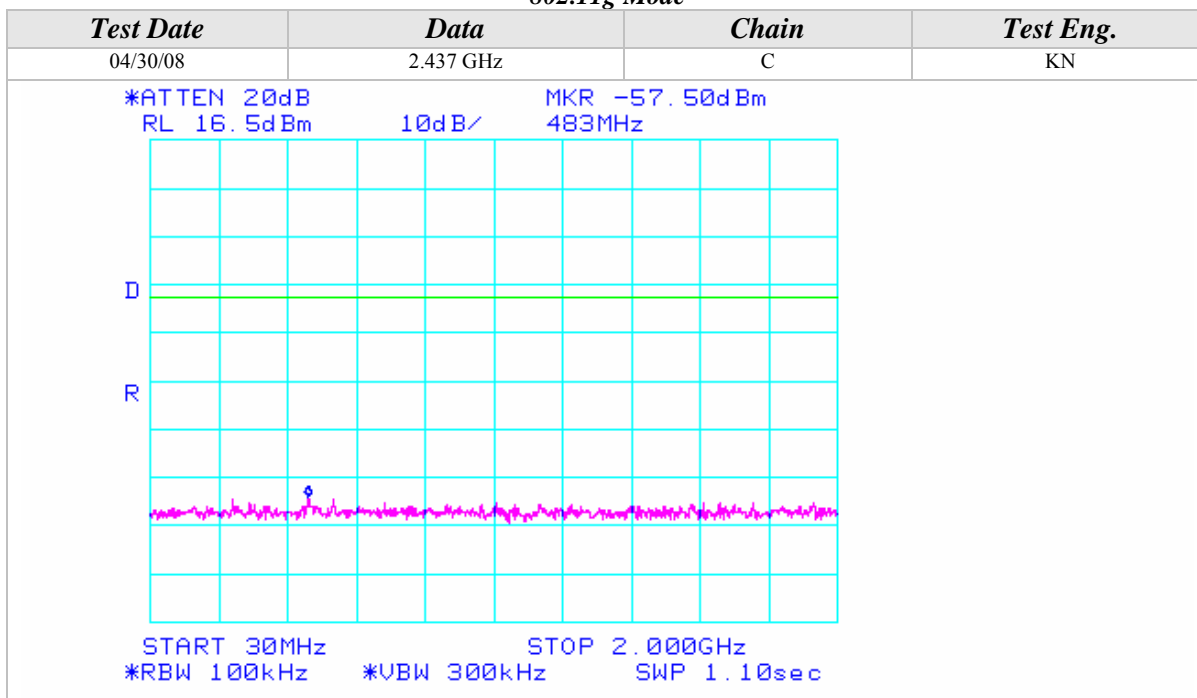




Conducted Out Of Band Emissions (Continued)

802.11g Mode

<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/30/08	2.437 GHz	C	KN
<p>*ATTEN 20dB MKR -51.67dBm RL 16.5dBm 10dB/ 14.98GHz</p> <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/30/08	2.437 GHz	C	KN
<p>*ATTEN 20dB MKR -45.50dBm RL 16.5dBm 10dB/ 37.70GHz</p> <p>START 20.00GHz STOP 40.00GHz *RBW 100kHz *VBW 300kHz SWP 11.0sec</p>			

Conducted Out Of Band Emissions (Continued)

802.11g Mode

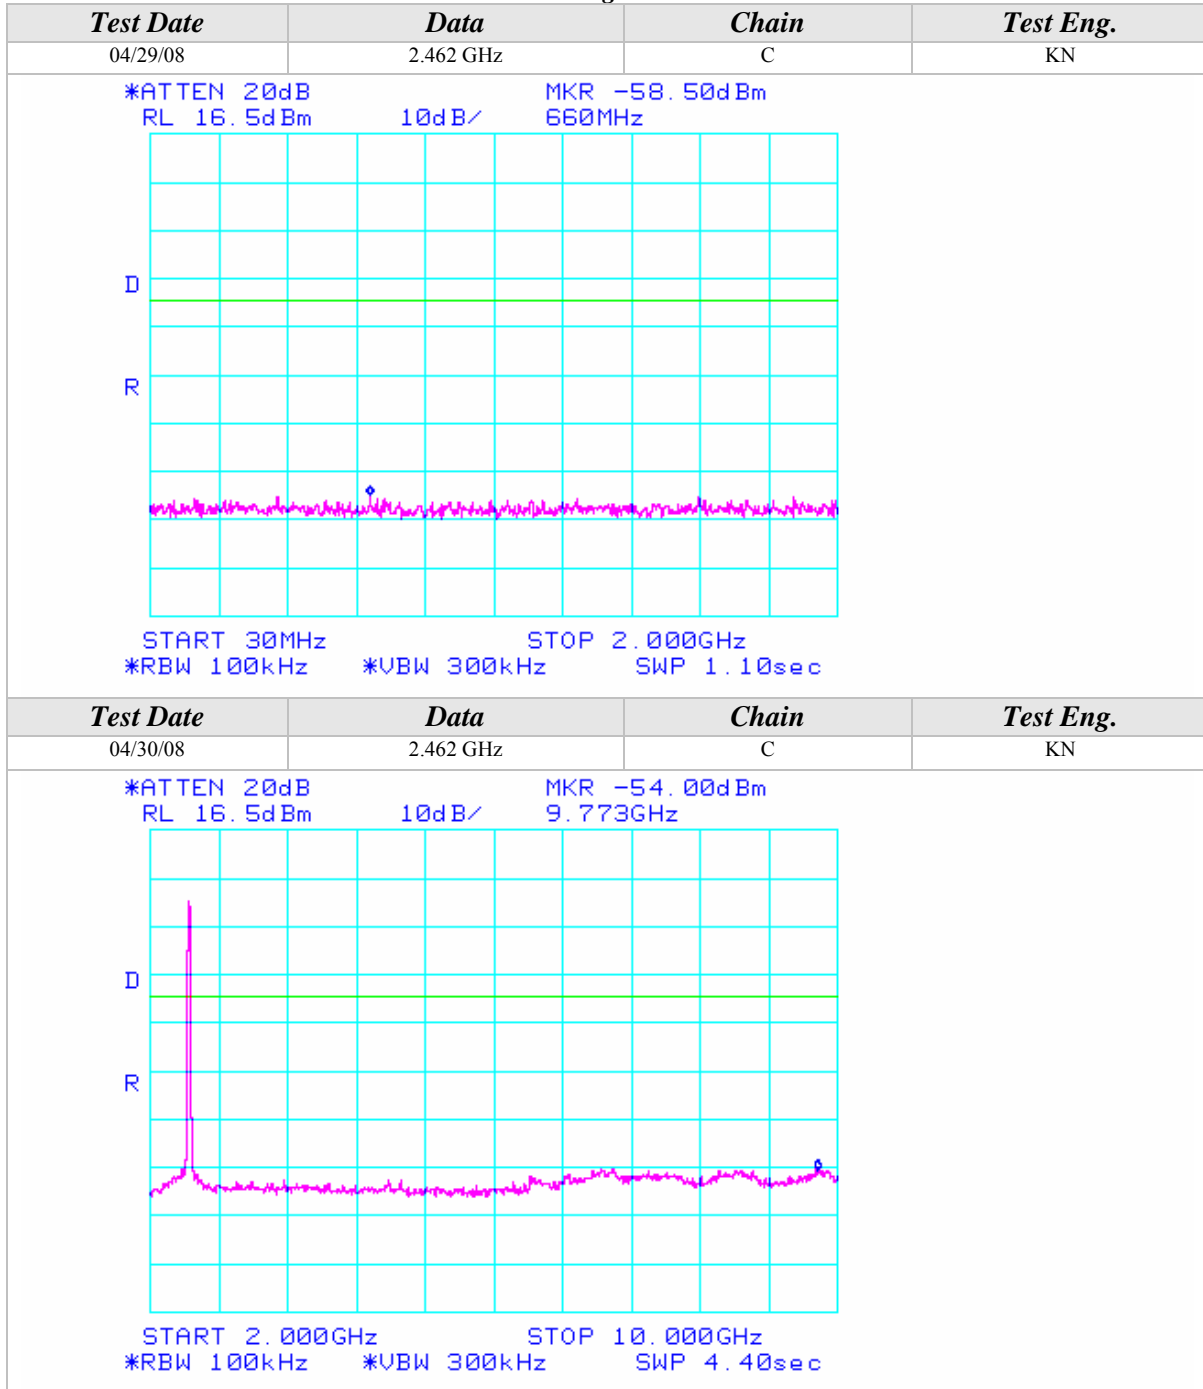





Conducted Out Of Band Emissions (Continued)

802.11g Mode

<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/29/08	2.462 GHz	C	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -52.50dBm 14.47GHz</p> <p>START 10.000GHz STOP 20.000GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/30/08	2.462 GHz	C	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -49.83dBm 24.750GHz</p> <p>START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec</p>			

Conducted Out Of Band Emissions (Continued)

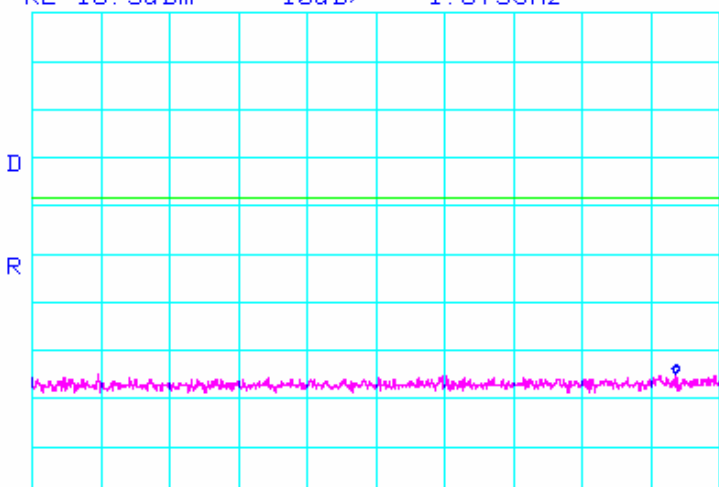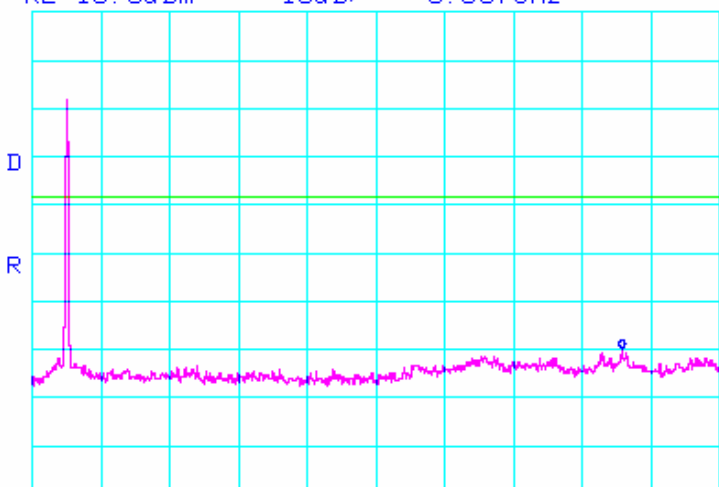802.11n Mode, 2.4GHz, 20MHz Wide			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	2.412 GHz	A	KN
<p>*ATTEN 20dB MKR -58.33dBm RL 16.5dBm 10dB/ 1.875GHz</p>  <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	2.412 GHz	A	KN
<p>*ATTEN 20dB MKR -53.33dBm RL 16.5dBm 10dB/ 8.867GHz</p>  <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>			

Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 20MHz Wide

<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	2.437 GHz	A	KN
<div style="display: flex; justify-content: space-between;"> *ATTEN 20dB MKR -57.50dBm </div> <div style="display: flex; justify-content: space-between;"> RL 16.5dBm 10dB/ 467MHz </div> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> START 30MHz STOP 2.000GHz </div> <div style="display: flex; justify-content: space-between;"> *RBW 100kHz *VBW 300kHz SWP 1.10sec </div>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	2.437 GHz	A	KN
<div style="display: flex; justify-content: space-between;"> *ATTEN 20dB MKR -52.83dBm </div> <div style="display: flex; justify-content: space-between;"> RL 16.5dBm 10dB/ 9.880GHz </div> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> START 2.000GHz STOP 10.000GHz </div> <div style="display: flex; justify-content: space-between;"> *RBW 100kHz *VBW 300kHz SWP 4.40sec </div>			



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 20MHz Wide

<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	2.437 GHz	A	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/</p> <p>MKR -51.50dBm 13.90GHz</p> <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	2.437 GHz	A	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/</p> <p>MKR -48.17dBm 24.800GHz</p> <p>START 20.00GHz STOP 26.00GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec</p>			



Conducted Out Of Band Emissions (Continued)



802.11n Mode, 2.4GHz, 20MHz Wide

Test Date	Data	Chain	Test Eng.
04/28/08	2.462 GHz	A	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -57.50dBm 1.022GHz			
START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec			
Test Date	Data	Chain	Test Eng.
04/28/08	2.462 GHz	A	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -54.00dBm 8.867GHz			
START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec			



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 20MHz Wide

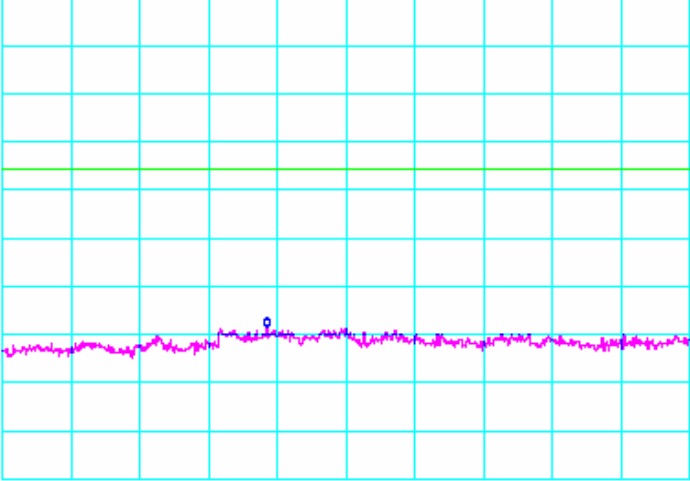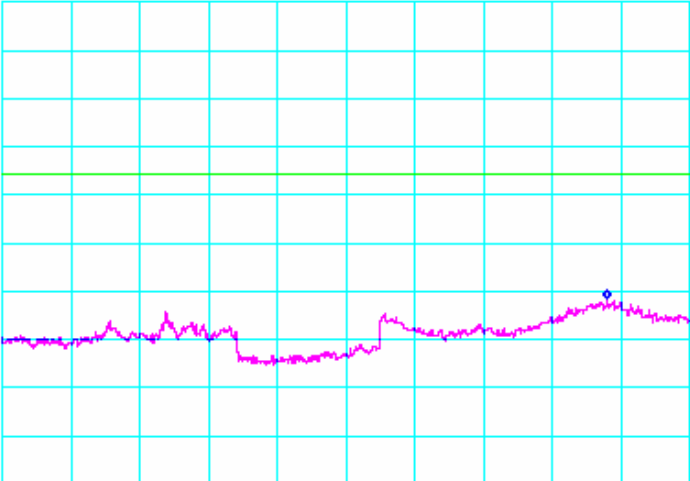Test Date	Data	Chain	Test Eng.
04/28/08	2.462 GHz	A	KN
*ATTEN 20dB MKR -52.00dBm RL 16.5dBm 10dB/ 13.85GHz  START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec			
Test Date	Data	Chain	Test Eng.
04/28/08	2.462 GHz	A	KN
*ATTEN 20dB MKR -45.17dBm RL 16.5dBm 10dB/ 37.60GHz  START 20.00GHz STOP 40.00GHz *RBW 100kHz *VBW 300kHz SWP 11.0sec			




Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 20MHz Wide

<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/29/08	2.412 GHz	B	KN


*ATTEN 20dB MKR -51.00dBm
 RL 16.5dBm 10dB/ 14.82GHz

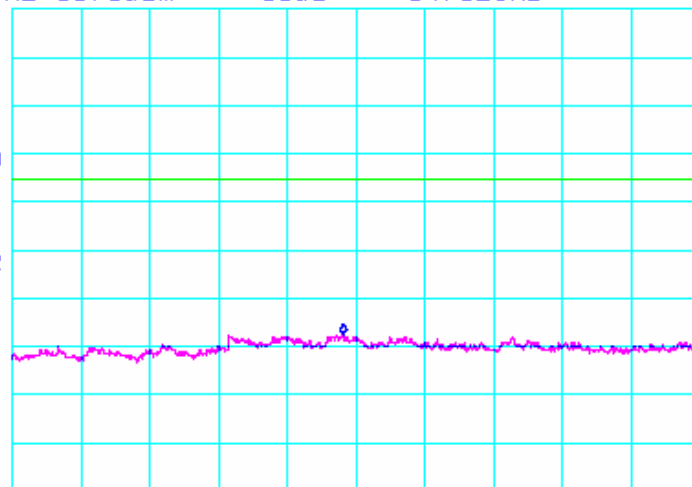

START 10.00GHz STOP 20.00GHz
 *RBW 100kHz *VBW 300kHz SWP 5.50sec

<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/29/08	2.412 GHz	B	KN


*ATTEN 20dB MKR -48.50dBm
 RL 16.5dBm 10dB/ 24.800GHz

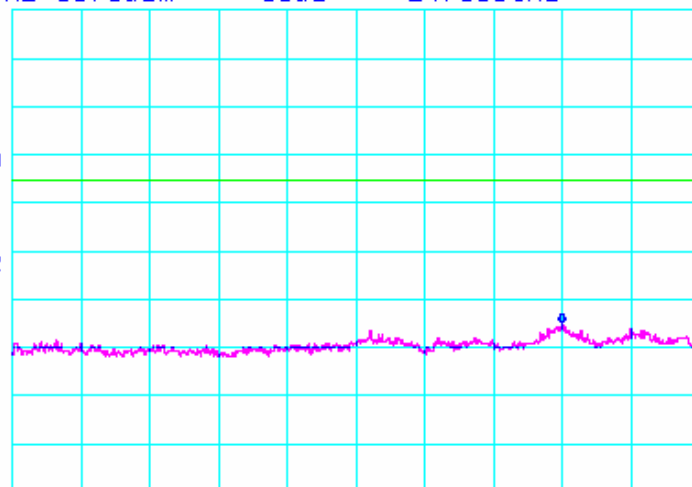

START 20.000GHz STOP 26.000GHz
 *RBW 100kHz *VBW 300kHz SWP 3.30sec

Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 20MHz Wide

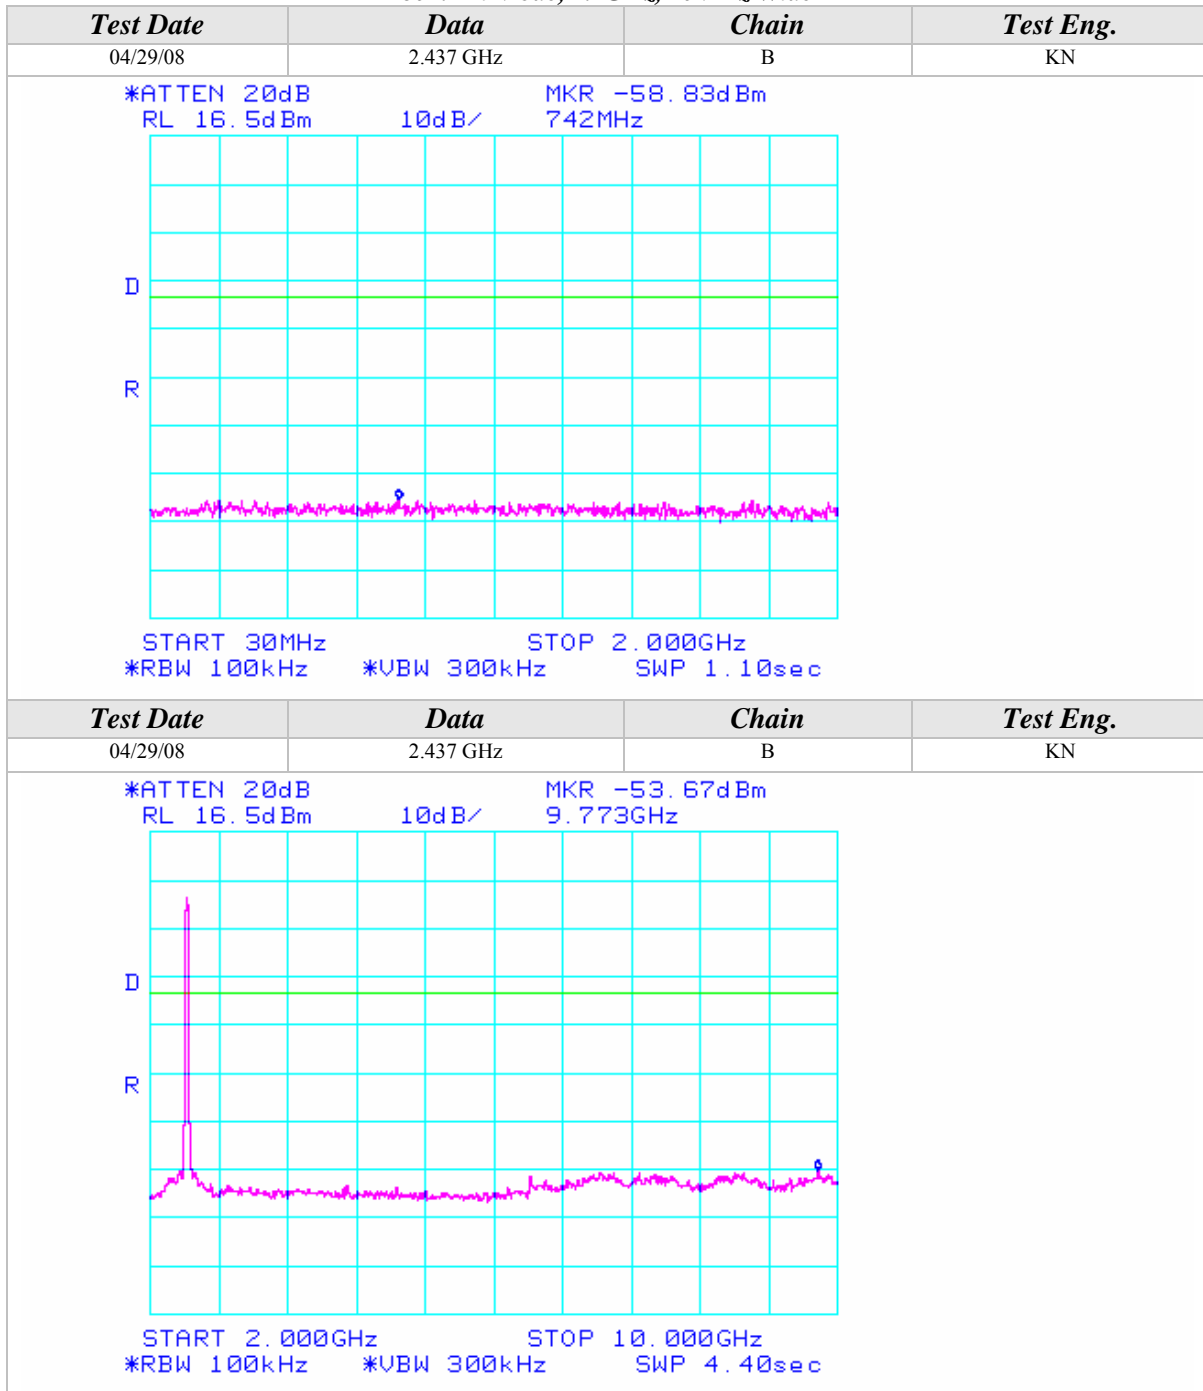

Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 20MHz Wide

Test Date	Data	Chain	Test Eng.
04/29/08	2.462 GHz	B	KN
<p>*ATTEN 20dB MKR -58.17dBm RL 16.5dBm 10dB/ 703MHz</p> <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>			
Test Date	Data	Chain	Test Eng.
04/29/08	2.462 GHz	B	KN
<p>*ATTEN 20dB MKR -53.50dBm RL 16.5dBm 10dB/ 8.827GHz</p> <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>			



Conducted Out Of Band Emissions (Continued)



802.11n Mode, 2.4GHz, 40MHz Wide

<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	2.422 GHz	A	KN
<p>*ATTEN 20dB MKR -51.17dBm RL 16.5dBm 10dB/ 13.17GHz</p> <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/28/08	2.422 GHz	A	KN
<p>*ATTEN 20dB MKR -48.50dBm RL 16.5dBm 10dB/ 24.820GHz</p> <p>START 20.00GHz STOP 26.00GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec</p>			



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 40MHz Wide

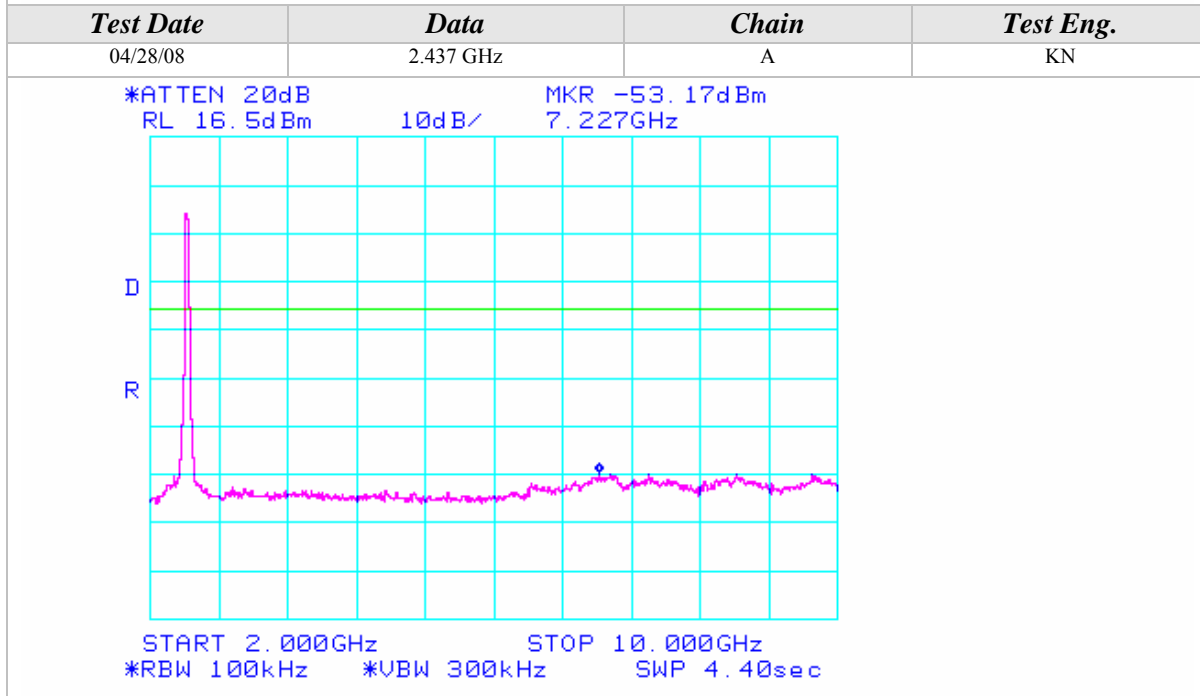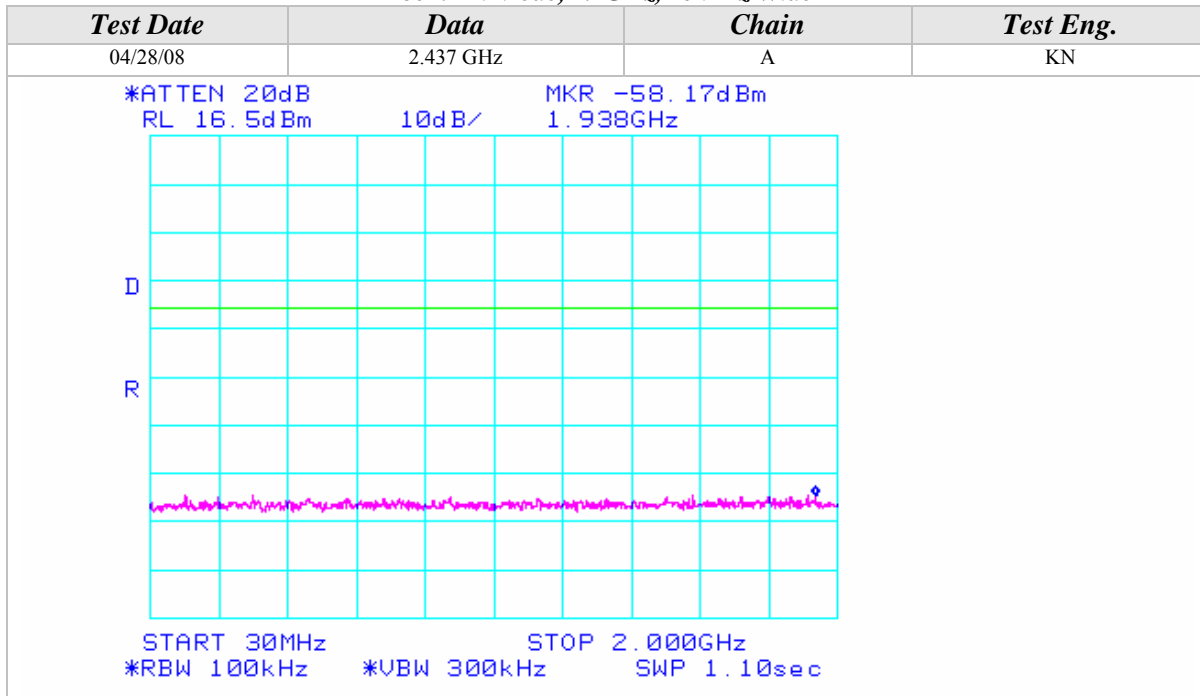



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 2.4GHz, 40MHz Wide

Test Date	Data	Chain	Test Eng.
04/28/08	2.437 GHz	A	KN
<p>*ATTEN 20dB MKR -50.83dBm RL 16.5dBm 10dB/ 14.75GHz</p> <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			
Test Date	Data	Chain	Test Eng.
04/28/08	2.437 GHz	A	KN
<p>*ATTEN 20dB MKR -48.67dBm RL 16.5dBm 10dB/ 24.780GHz</p> <p>START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec</p>			



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 2.4GHz, 40MHz Wide

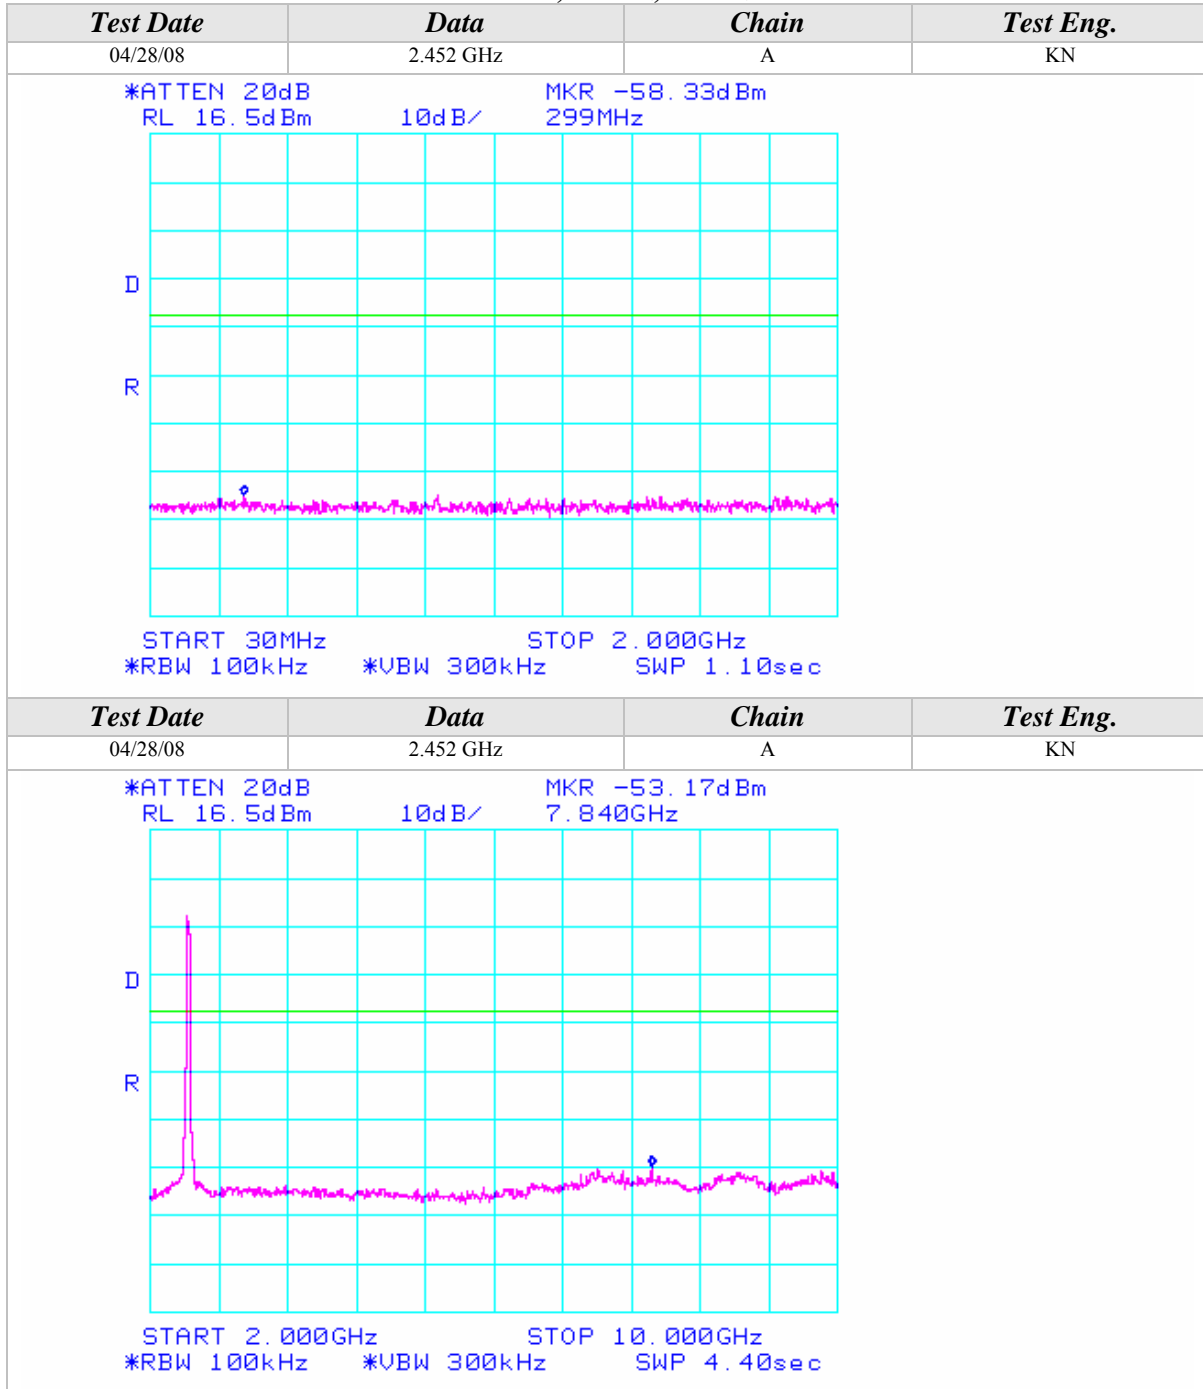



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 2.4GHz, 40MHz Wide

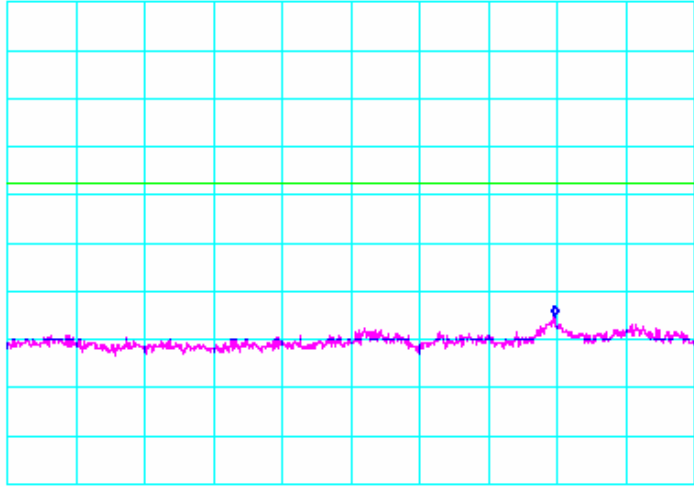Test Date	Data	Chain	Test Eng.
04/28/08	2.452 GHz	A	KN
<p>*ATTEN 20dB MKR -50.83dBm RL 16.5dBm 10dB/ 14.83GHz</p>  <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			
Test Date	Data	Chain	Test Eng.
04/28/08	2.452 GHz	A	KN
<p>*ATTEN 20dB MKR -48.67dBm RL 16.5dBm 10dB/ 24.804GHz</p>  <p>START 20.00GHz STOP 26.00GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec</p>			


Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 40MHz Wide

Test Date	Data	Chain	Test Eng.
04/29/08	2.422 GHz	B	KN

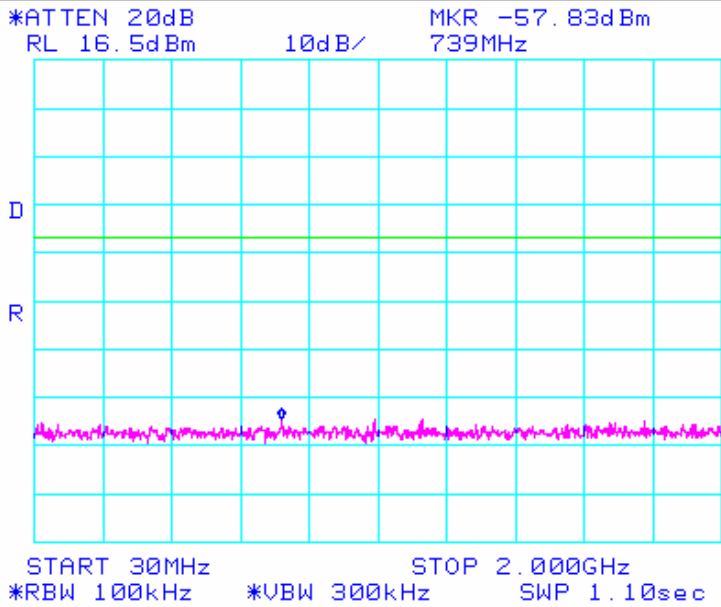



Test Date	Data	Chain	Test Eng.
04/29/08	2.422 GHz	B	KN

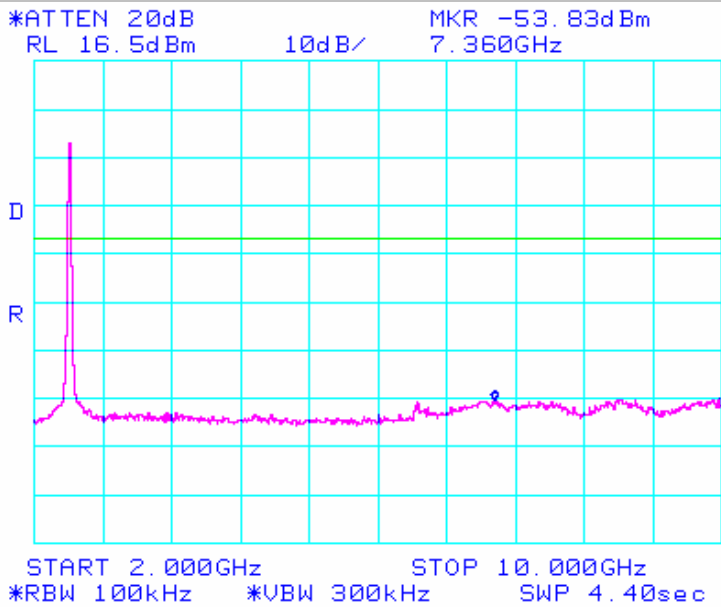




Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 40MHz Wide

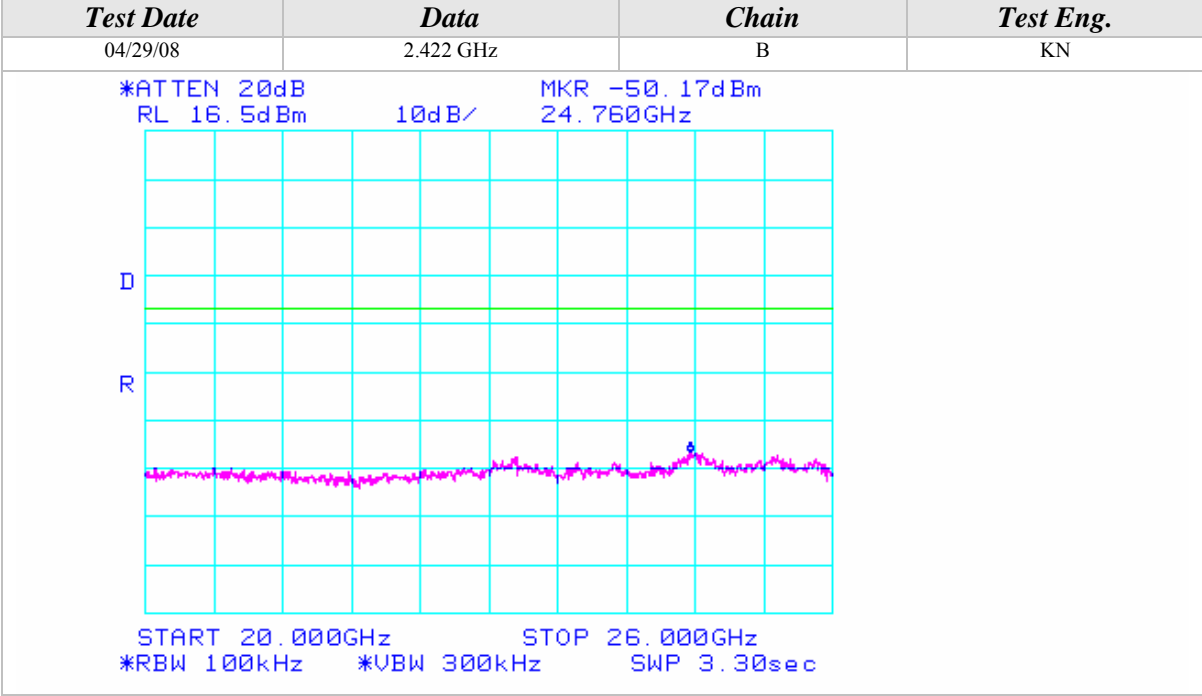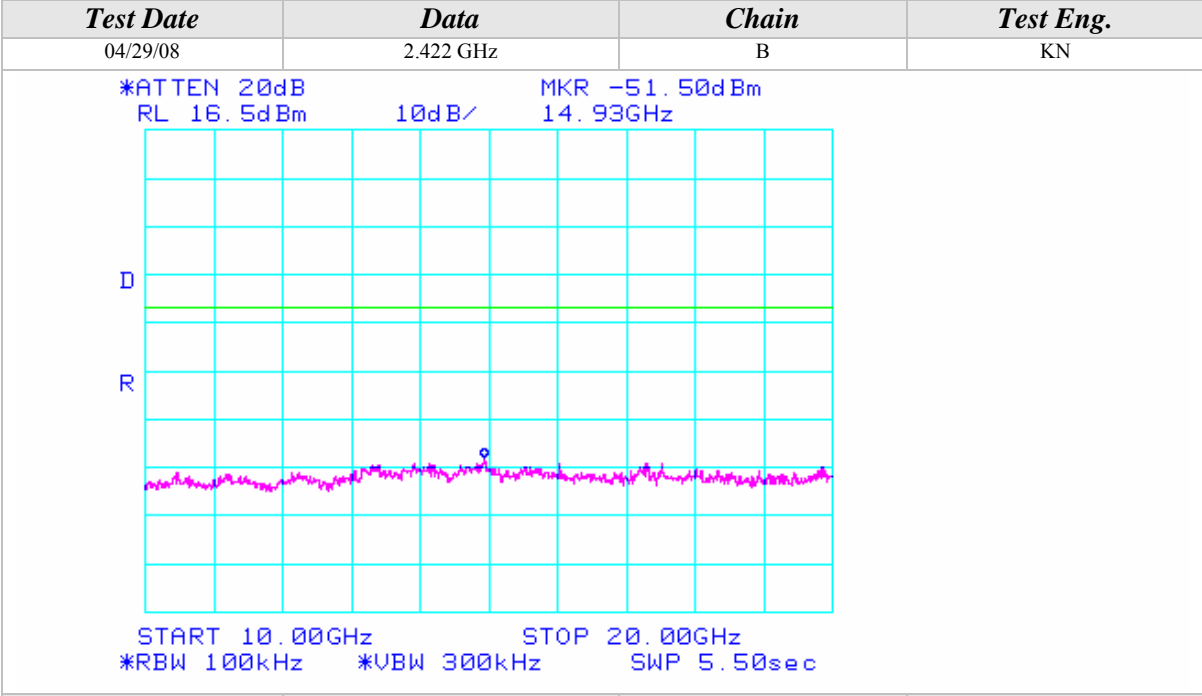



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 40MHz Wide

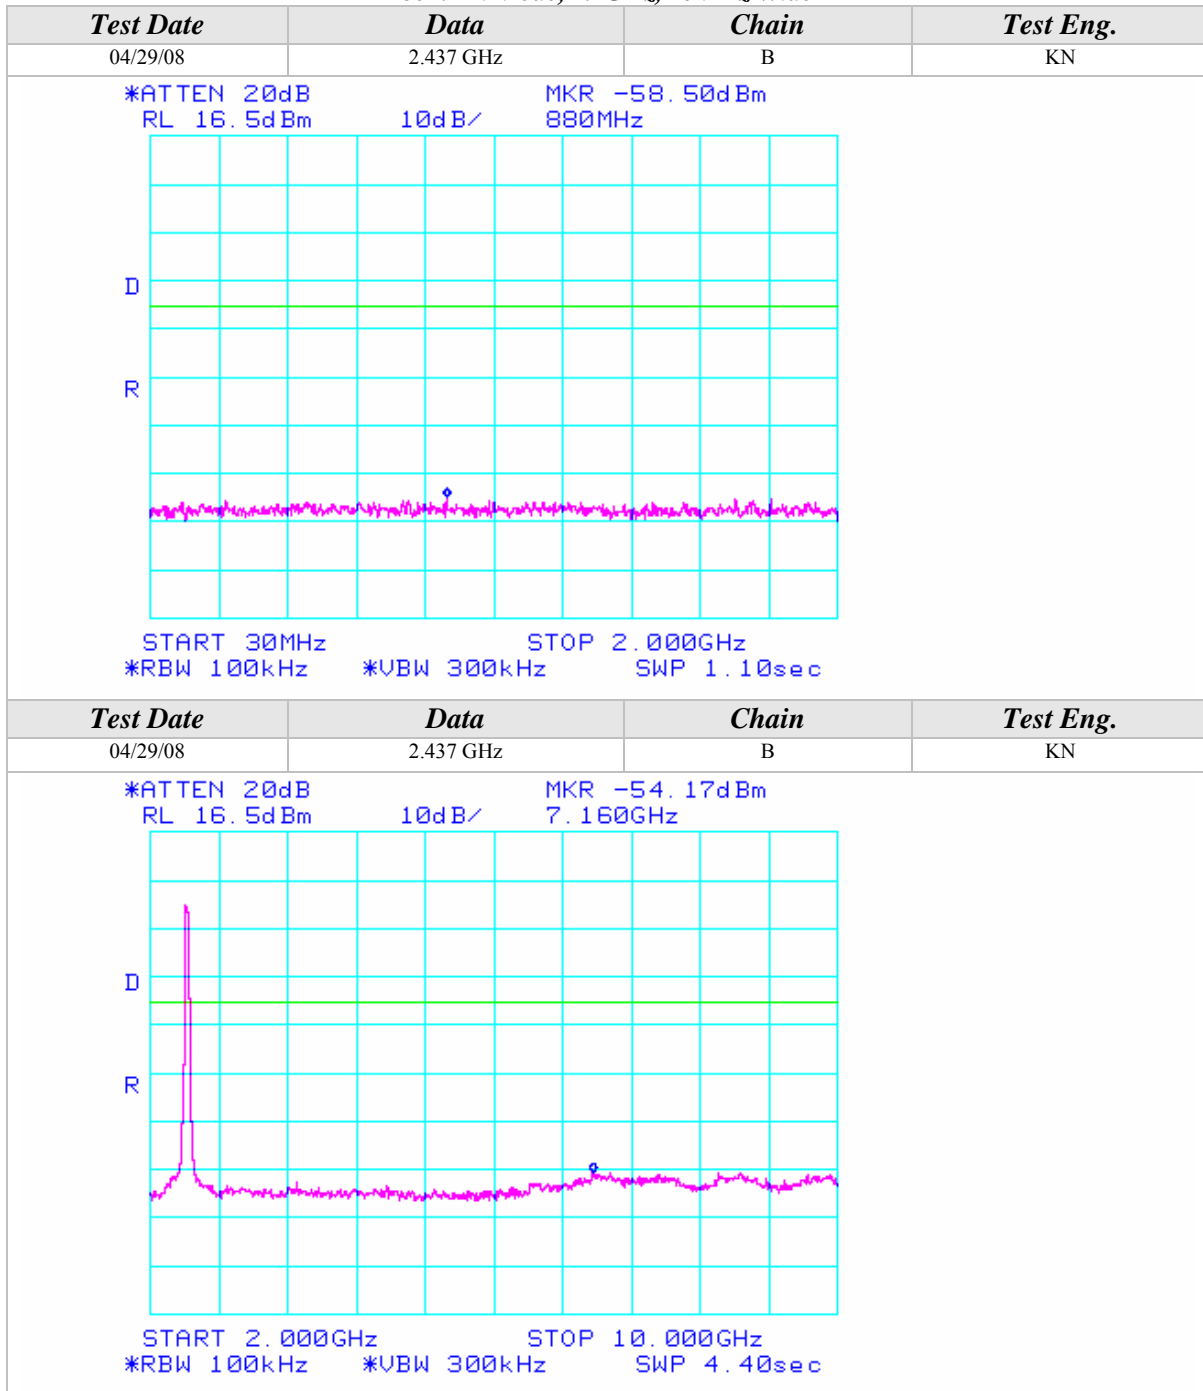

Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 40MHz Wide

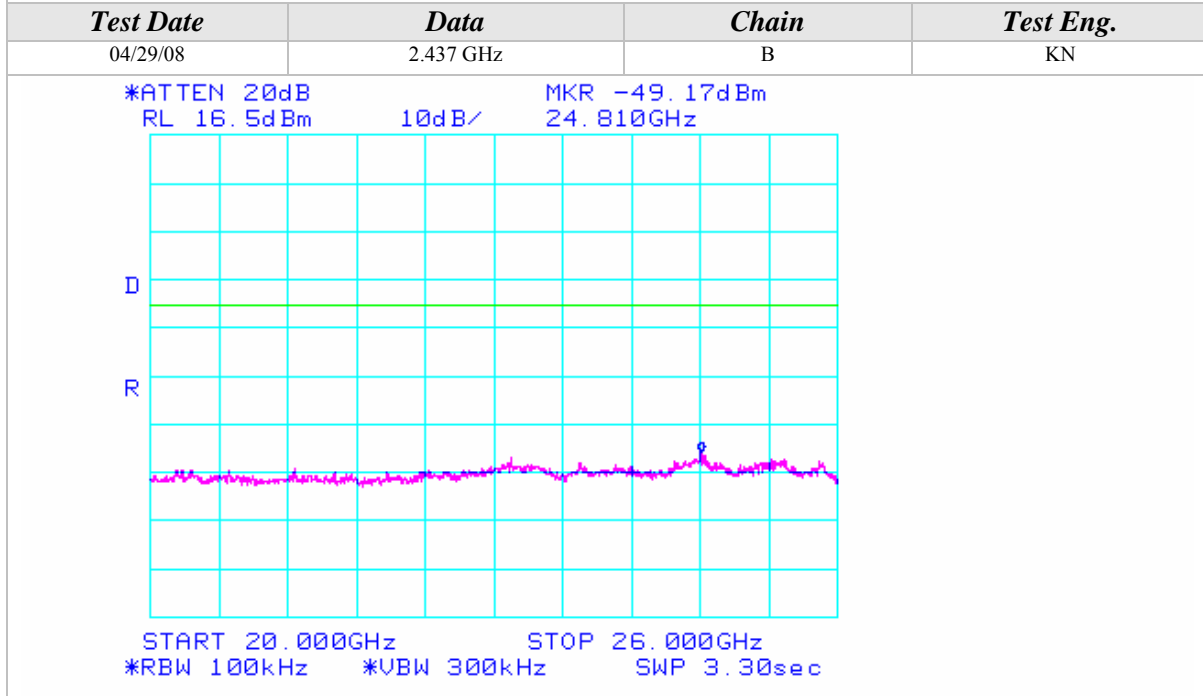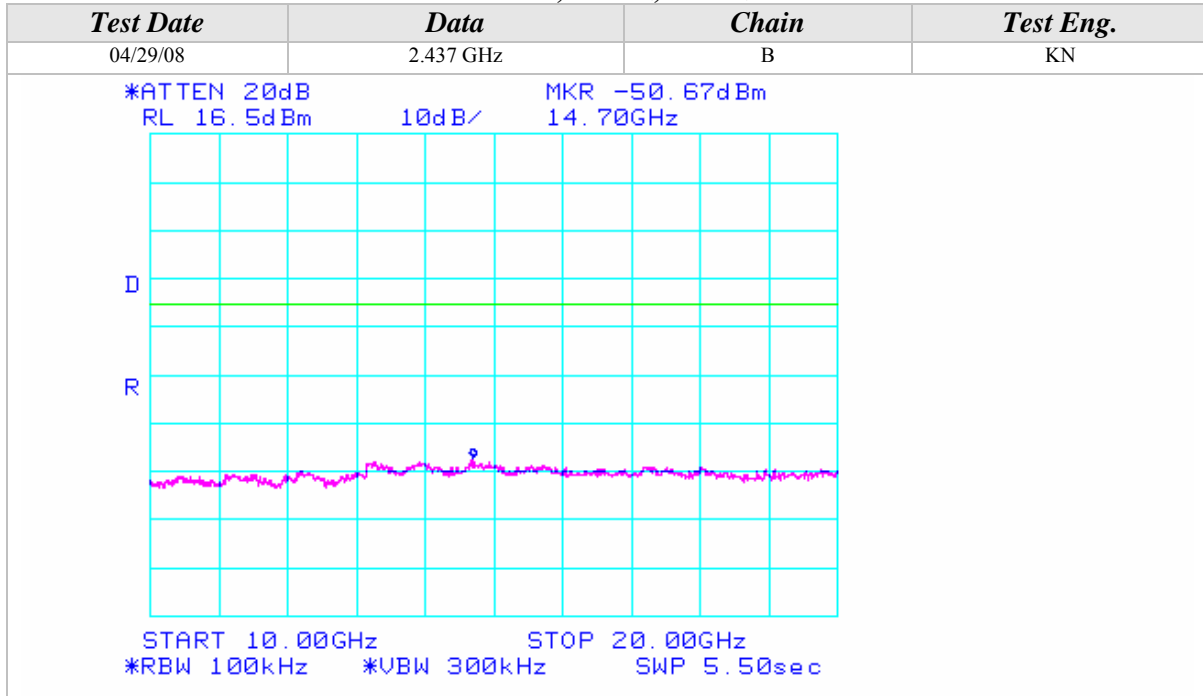



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 40MHz Wide

Test Date	Data	Chain	Test Eng.
04/29/08	2.452 GHz	B	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -58.33dBm 1.770GHz</p> <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>			
Test Date	Data	Chain	Test Eng.
04/29/08	2.452 GHz	B	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -53.83dBm 7.347GHz</p> <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>			



Conducted Out Of Band Emissions (Continued)



802.11n Mode, 2.4GHz, 40MHz Wide

Test Date	Data	Chain	Test Eng.
04/29/08	2.452 GHz	B	KN
<p>*ATTEN 20dB MKR -51.67dBm RL 16.5dBm 10dB/ 13.87GHz</p> <p>START 10.000GHz STOP 20.000GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			
Test Date	Data	Chain	Test Eng.
04/29/08	2.452 GHz	B	KN
<p>*ATTEN 20dB MKR -48.50dBm RL 16.5dBm 10dB/ 24.770GHz</p> <p>START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec</p>			



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 40MHz Wide

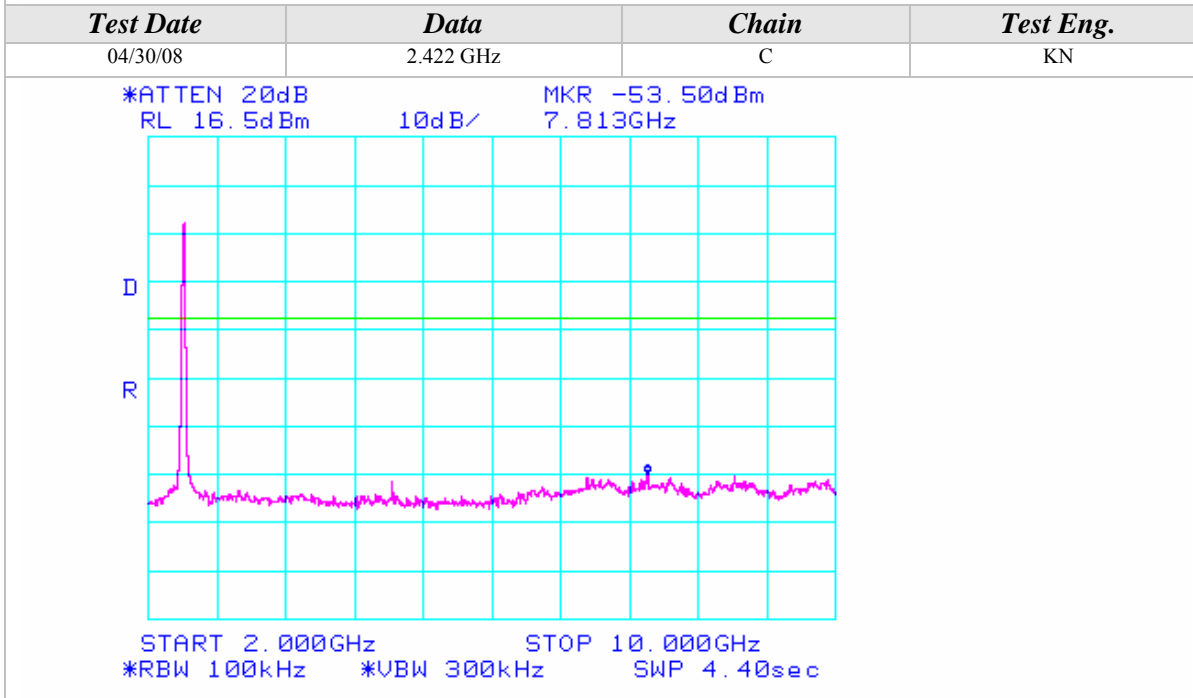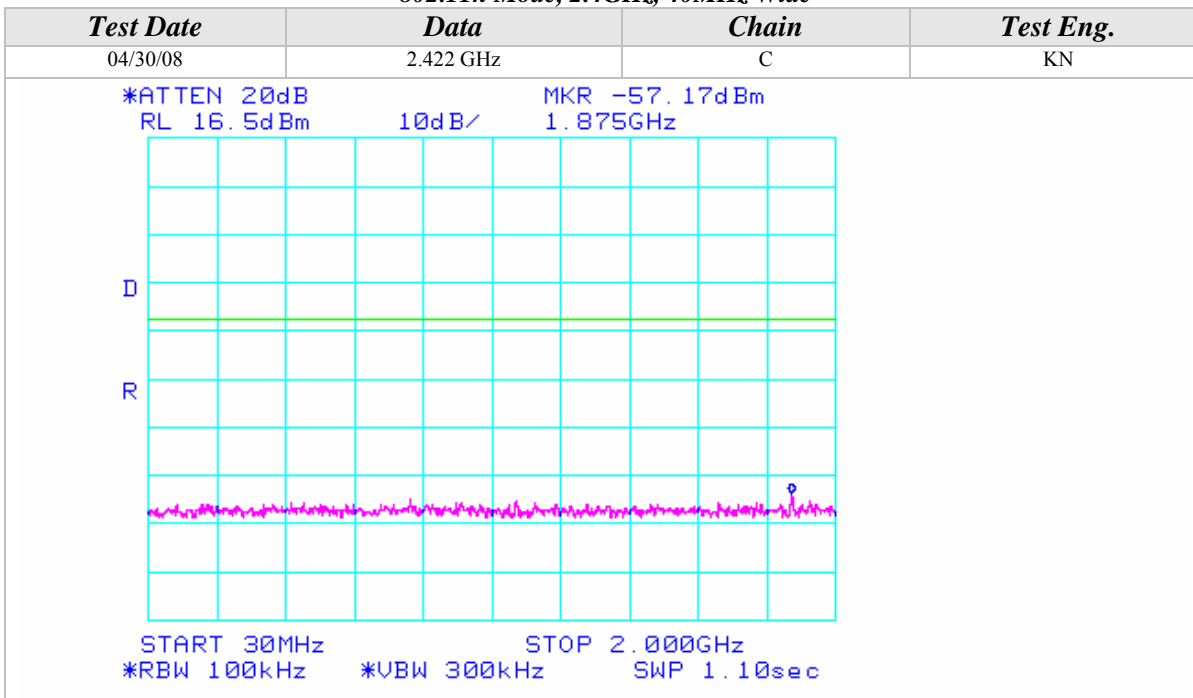



Conducted Out Of Band Emissions (Continued)



802.11n Mode, 2.4GHz, 40MHz Wide

<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/30/08	2.422 GHz	C	KN
<p>*ATTEN 20dB MKR -51.33dBm RL 16.5dBm 10dB/ 13.77GHz</p> <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/30/08	2.422 GHz	C	KN
<p>*ATTEN 20dB MKR -48.17dBm RL 16.5dBm 10dB/ 24.790GHz</p> <p>START 20.00GHz STOP 26.00GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec</p>			




Conducted Out Of Band Emissions (Continued)

802.11n Mode, 2.4GHz, 40MHz Wide

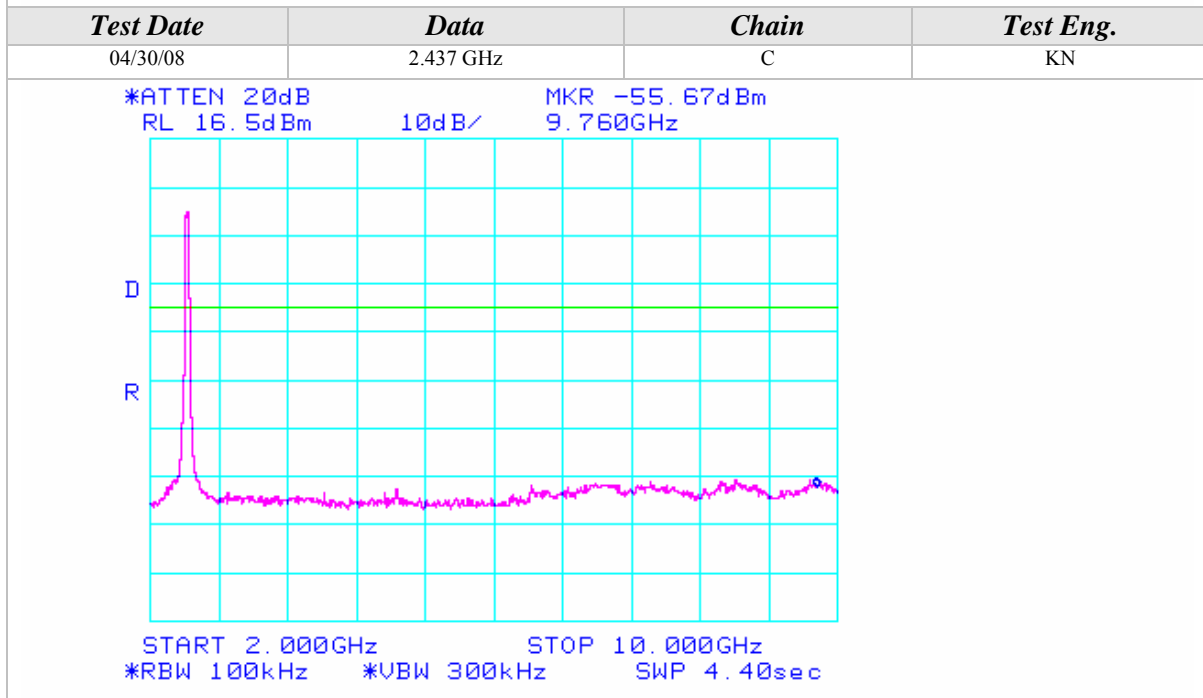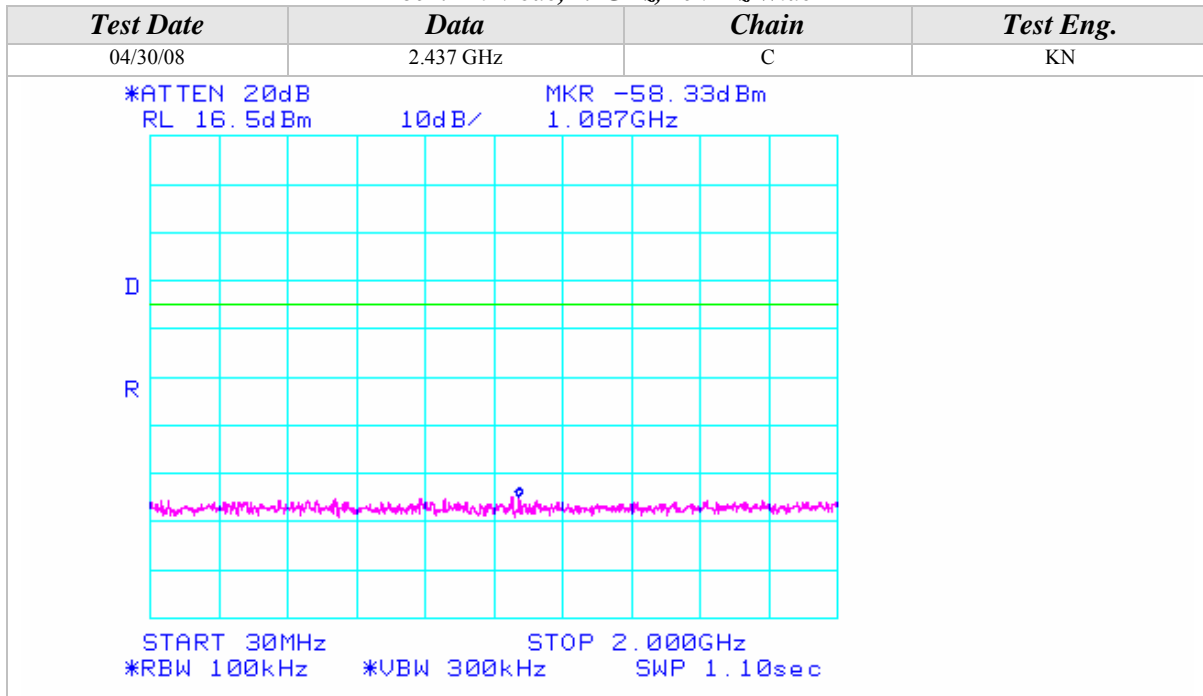

Conducted Out Of Band Emissions (Continued)



802.11n Mode, 2.4GHz, 40MHz Wide

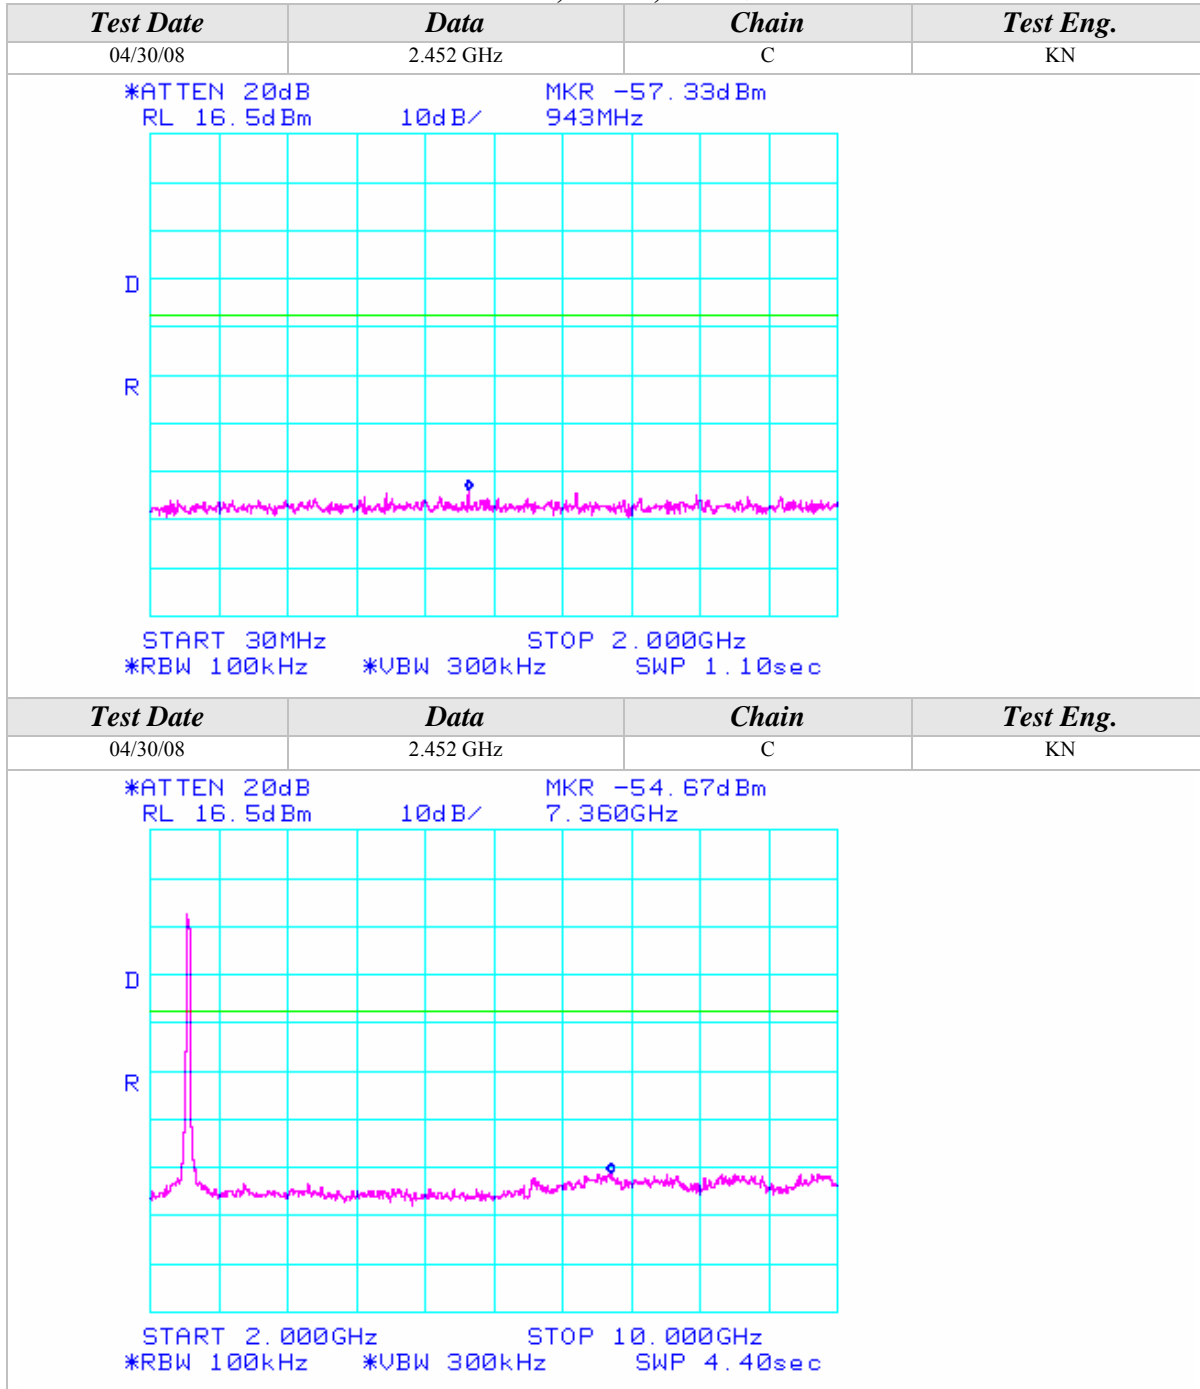



Conducted Out Of Band Emissions (Continued)



802.11n Mode, 2.4GHz, 40MHz Wide

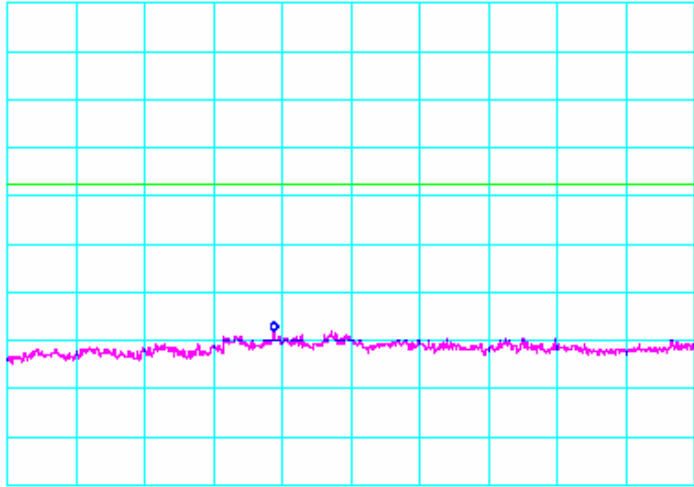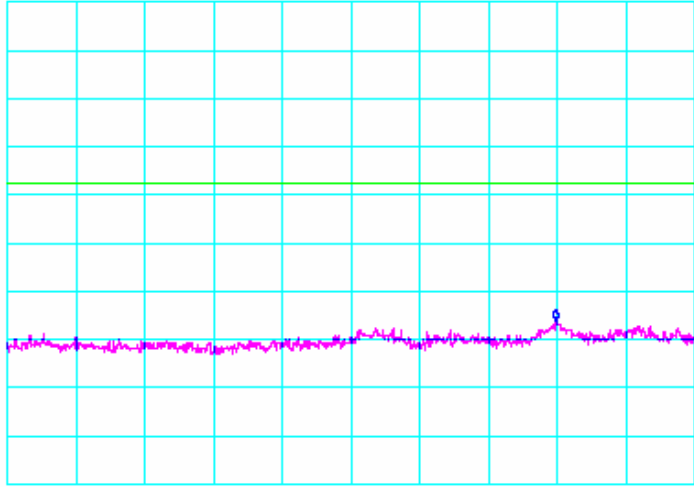Test Date	Data	Chain	Test Eng.
04/30/08	2.452 GHz	C	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -51.67dBm 13.88GHz			
			
START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec			
Test Date	Data	Chain	Test Eng.
04/30/08	2.452 GHz	C	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -49.50dBm 24.790GHz			
			
START 20.000GHz STOP 26.000GHz *RBW 100kHz *VBW 300kHz SWP 3.30sec			




Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 20MHz Wide

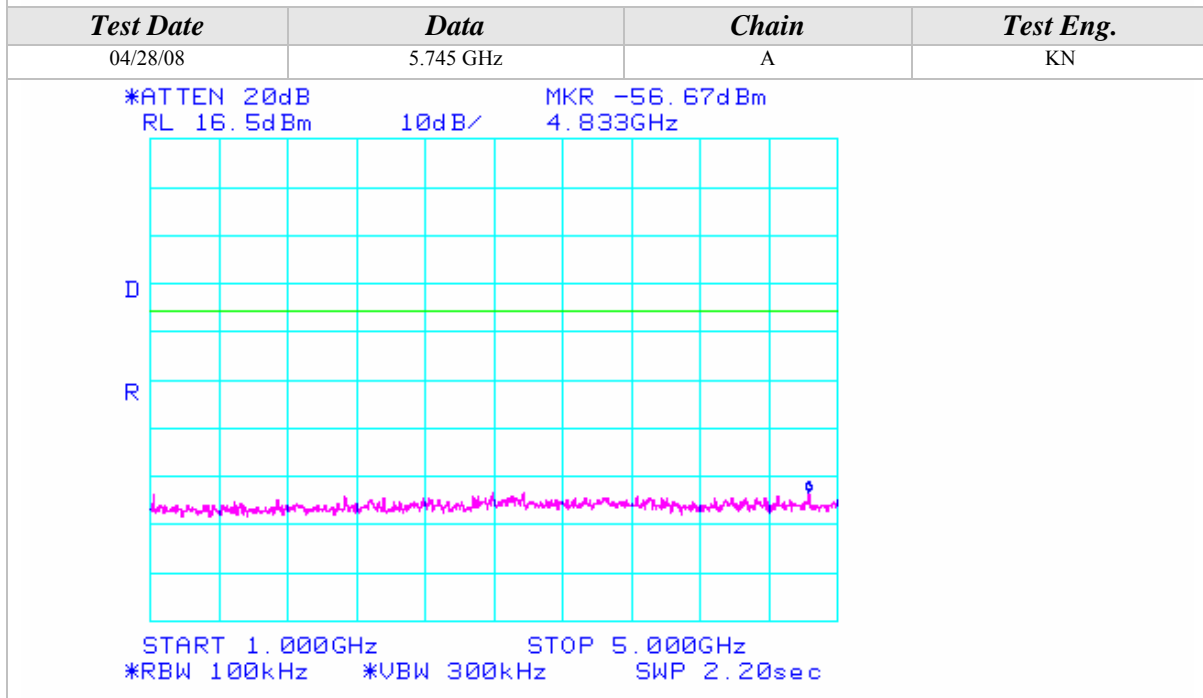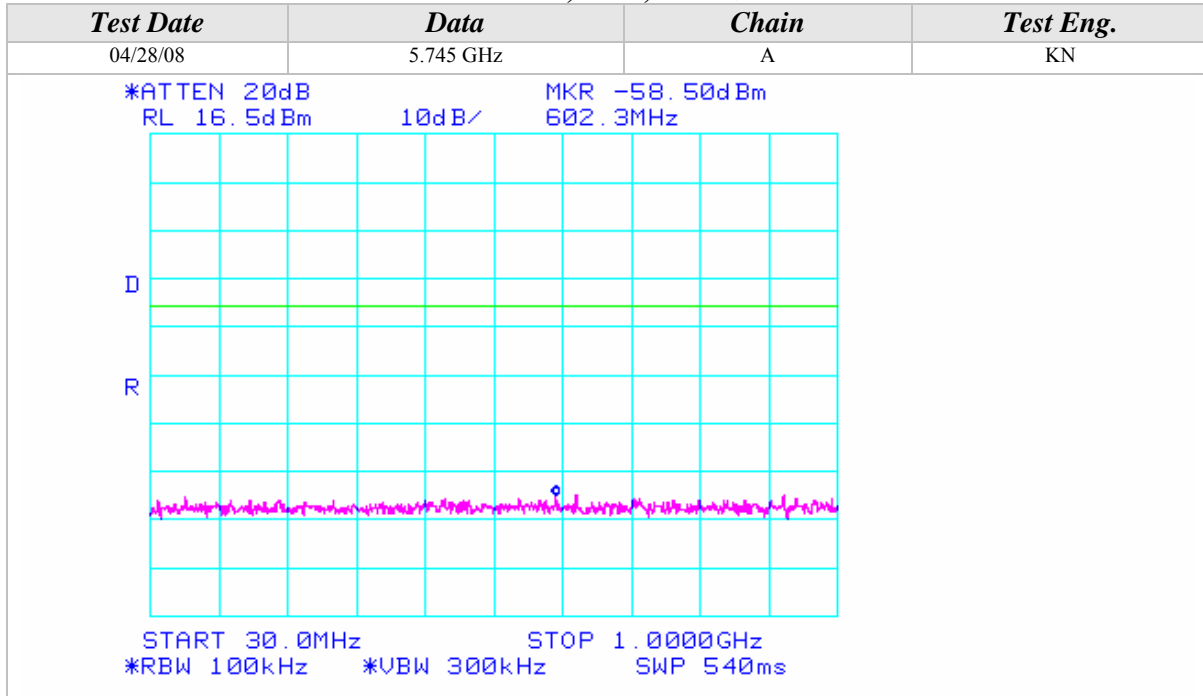

Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

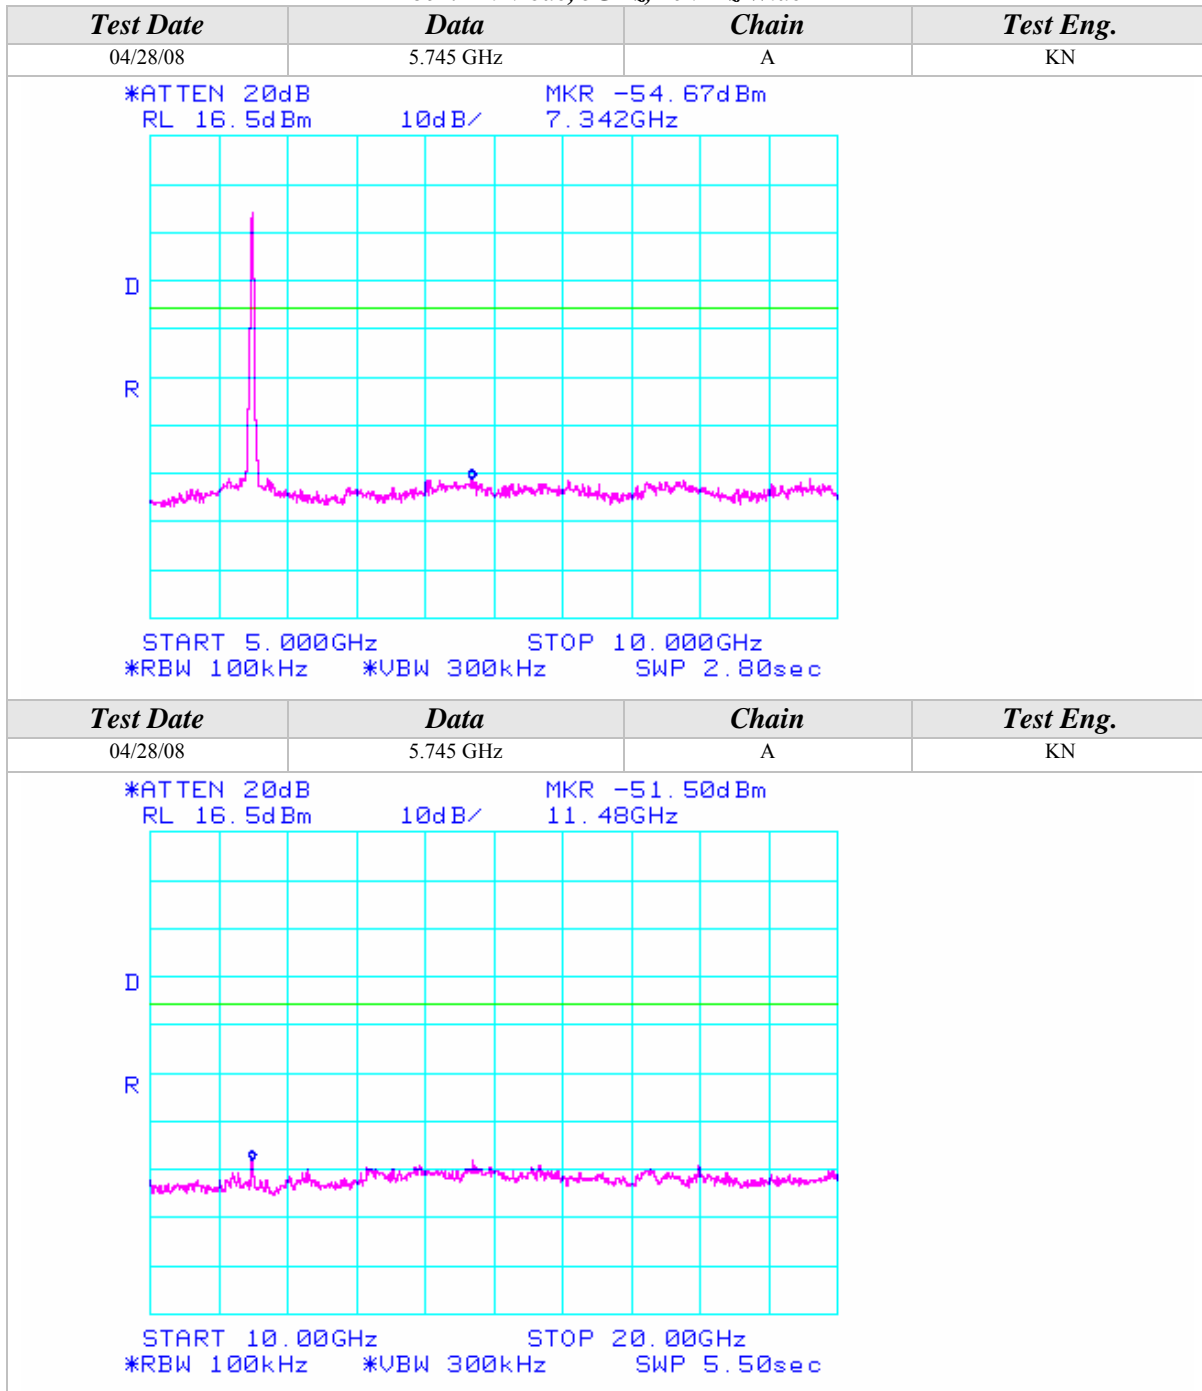



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 20MHz Wide

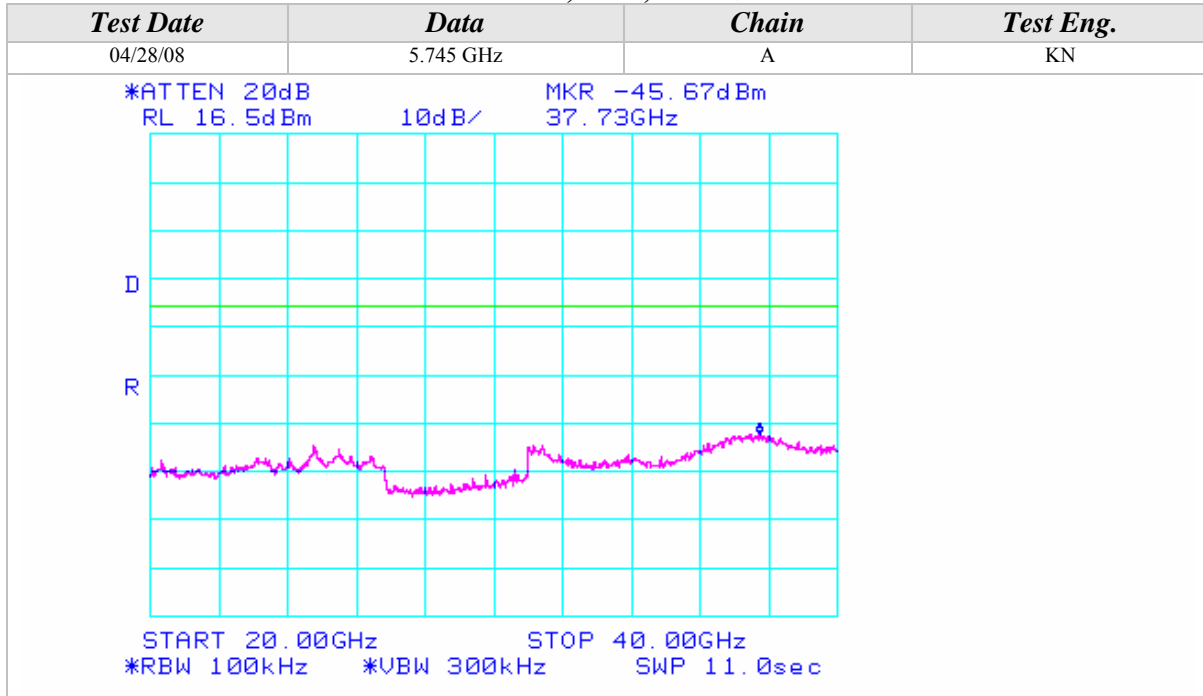



Conducted Out Of Band Emissions (Continued)



802.11n Mode, 5GHz, 20MHz Wide

<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/29/08	5.785 GHz	A	KN
<p>*ATTEN 20dB MKR -58.67dBm RL 16.5dBm 10dB/ 671.8MHz</p> <p>START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/29/08	5.785 GHz	A	KN
<p>*ATTEN 20dB MKR -57.50dBm RL 16.5dBm 10dB/ 2.493GHz</p> <p>START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec</p>			



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

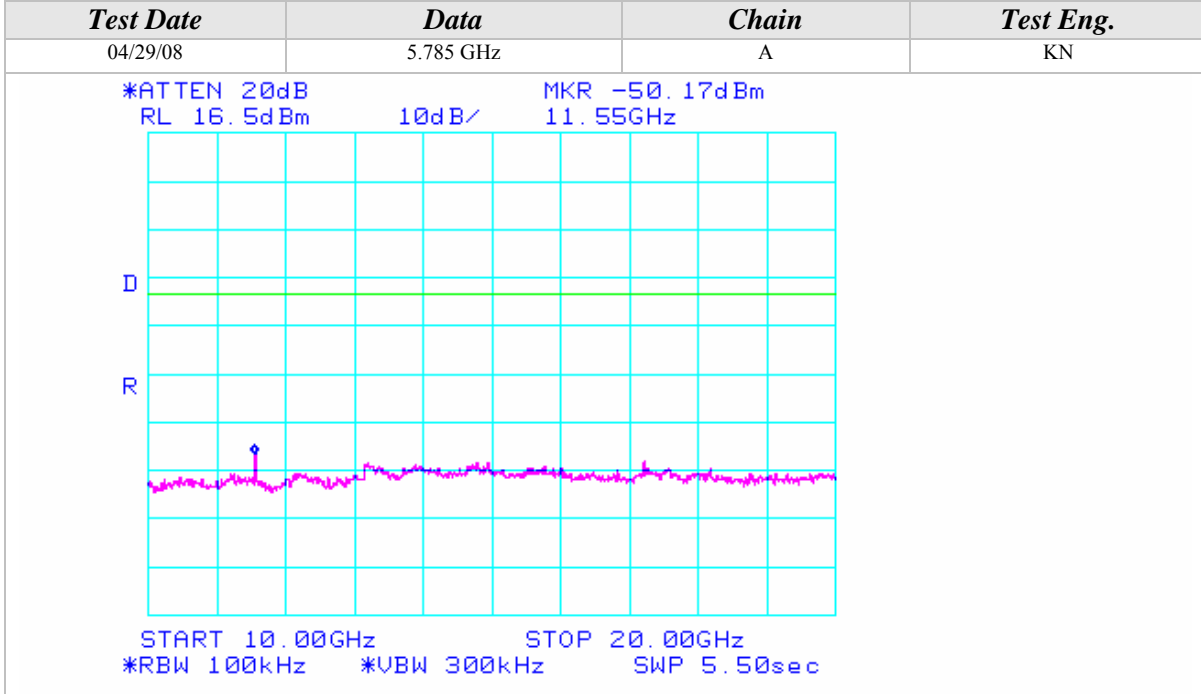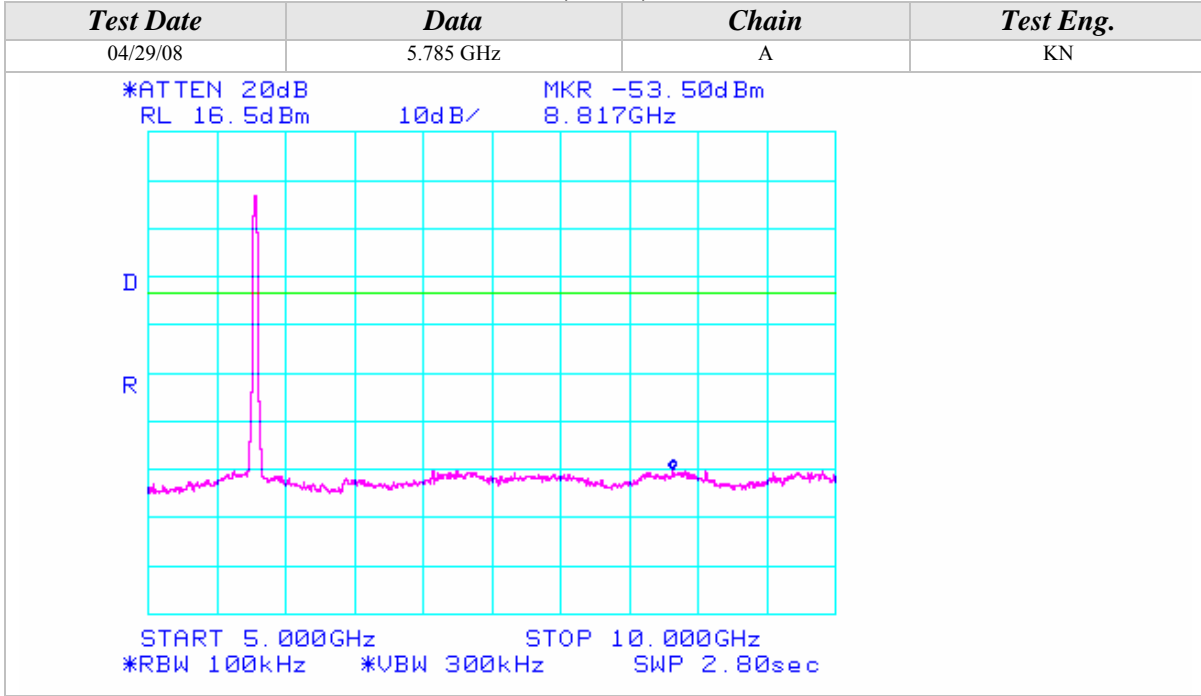



Conducted Out Of Band Emissions (Continued)



802.11n Mode, 5GHz, 20MHz Wide

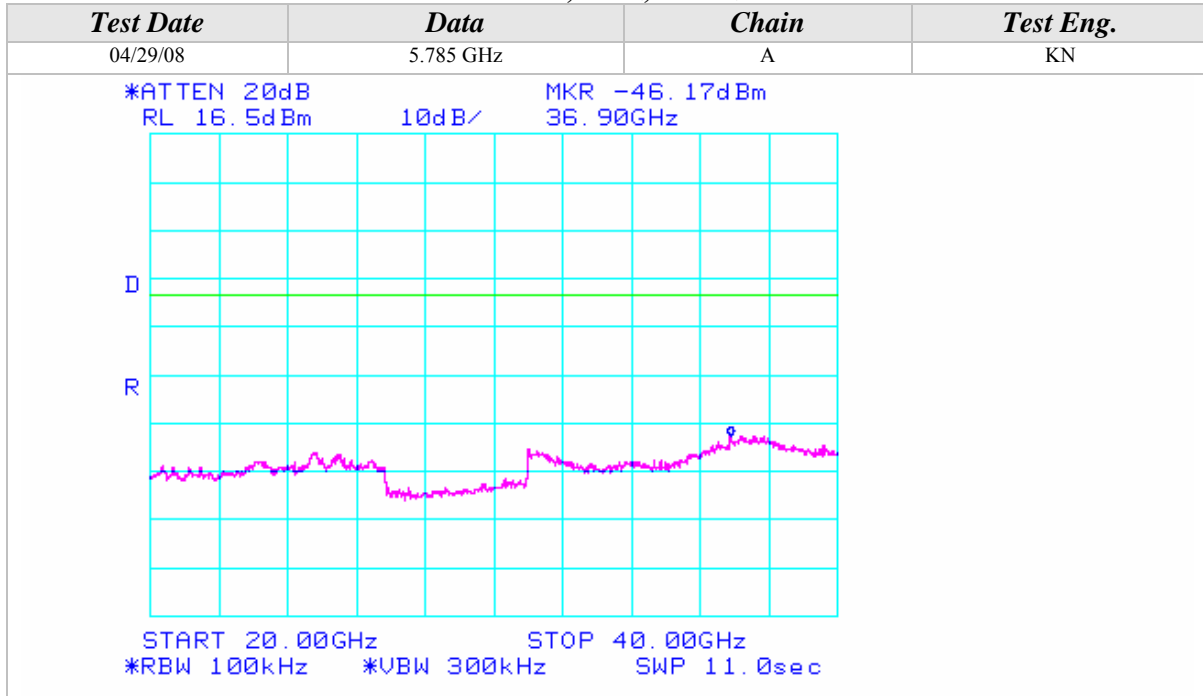



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 20MHz Wide

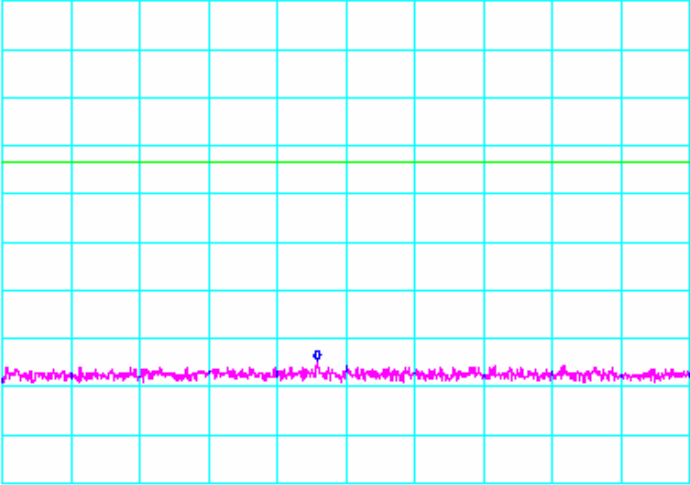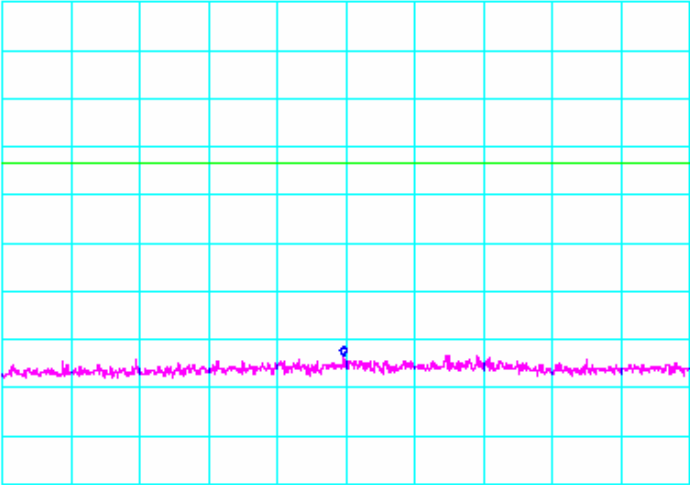Test Date	Data	Chain	Test Eng.
04/29/08	5.825 GHz	A	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -58.00dBm 474.6MHz			
			
START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms			
Test Date	Data	Chain	Test Eng.
04/29/08	5.825 GHz	A	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -56.83dBm 2.987GHz			
			
START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec			

Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

Test Date	Data	Chain	Test Eng.
04/29/08	5.825 GHz	A	KN
<p>*ATTEN 20dB MKR -53.17dBm RL 16.5dBm 10dB/ 7.117GHz</p> <p>START 5.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 2.80sec</p>			
Test Date	Data	Chain	Test Eng.
04/29/08	5.825 GHz	A	KN
<p>*ATTEN 20dB MKR -51.17dBm RL 16.5dBm 10dB/ 11.63GHz</p> <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 20MHz Wide

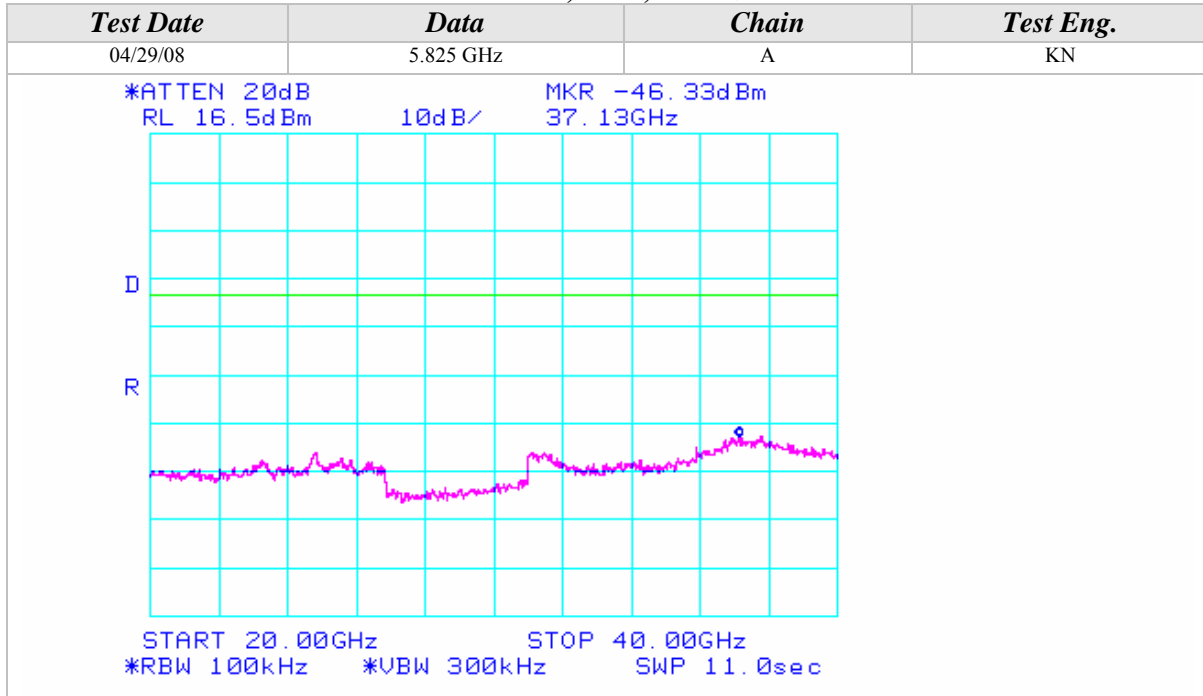





Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 20MHz Wide

<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/29/08	5.745 GHz	B	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -58.33dBm 903.0MHz</p> <p>START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
04/29/08	5.745 GHz	B	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -56.67dBm 3.047GHz</p> <p>START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec</p>			

Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

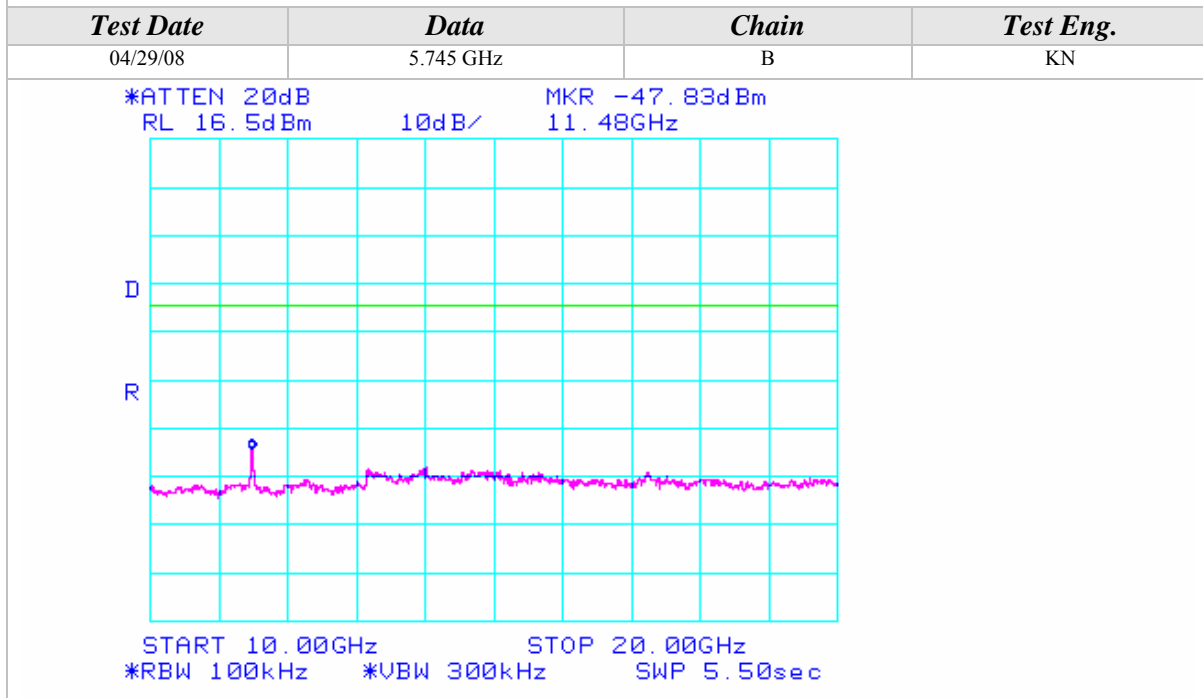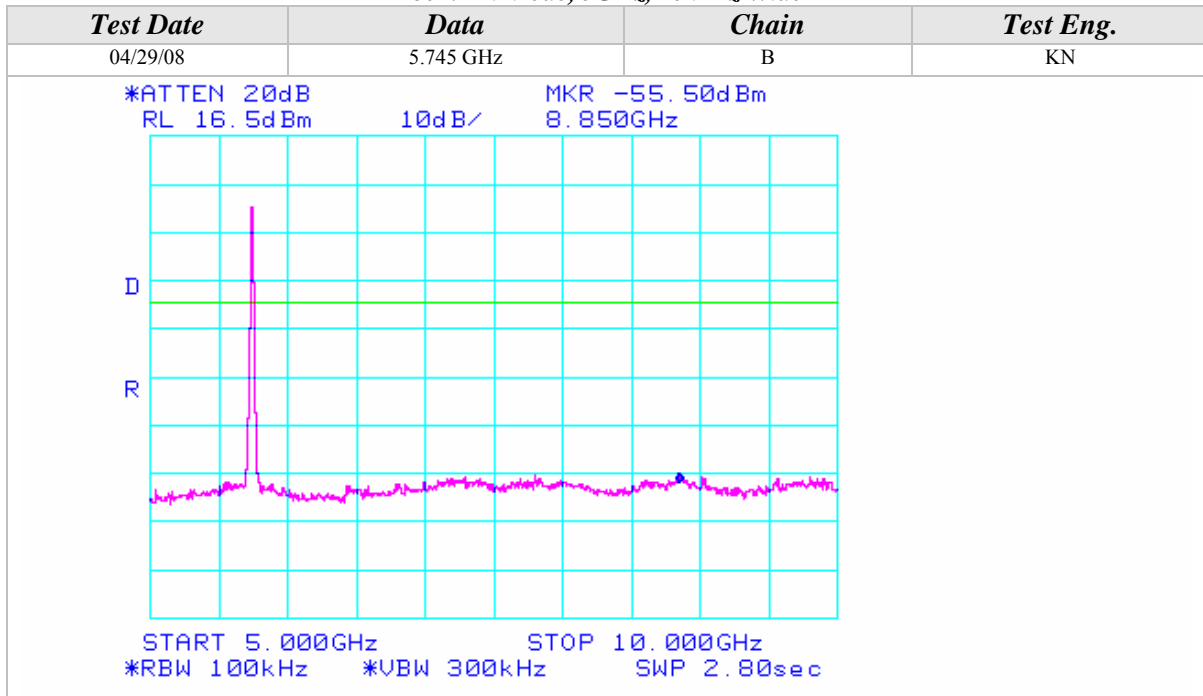



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

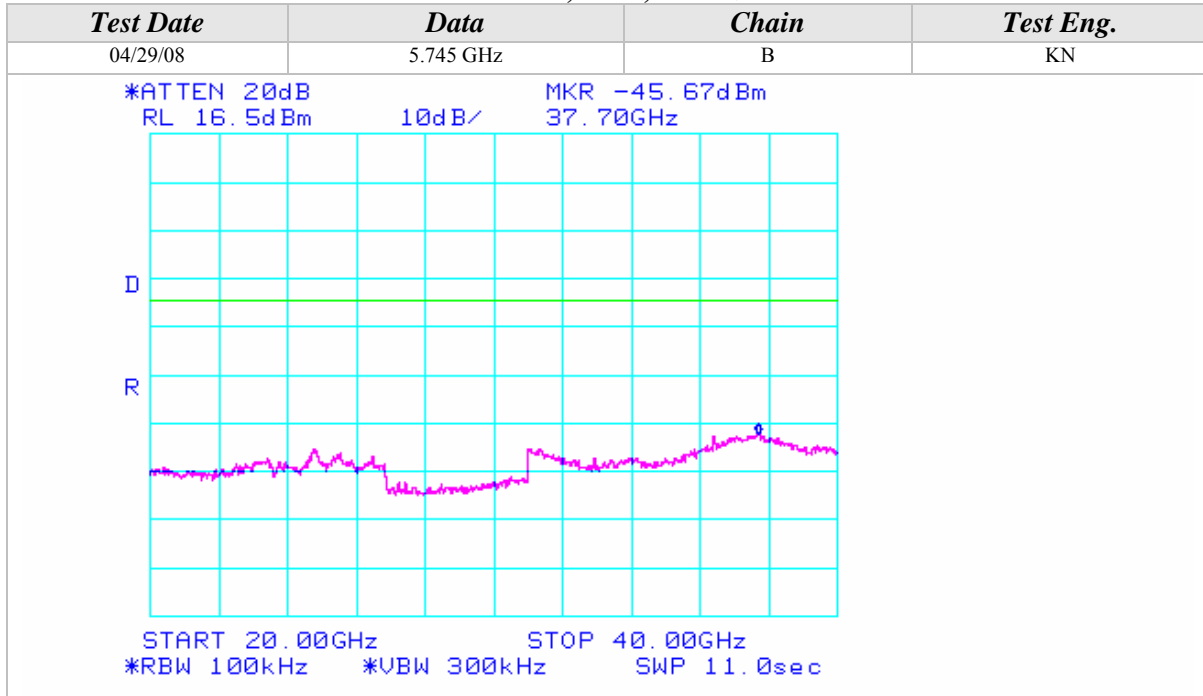



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

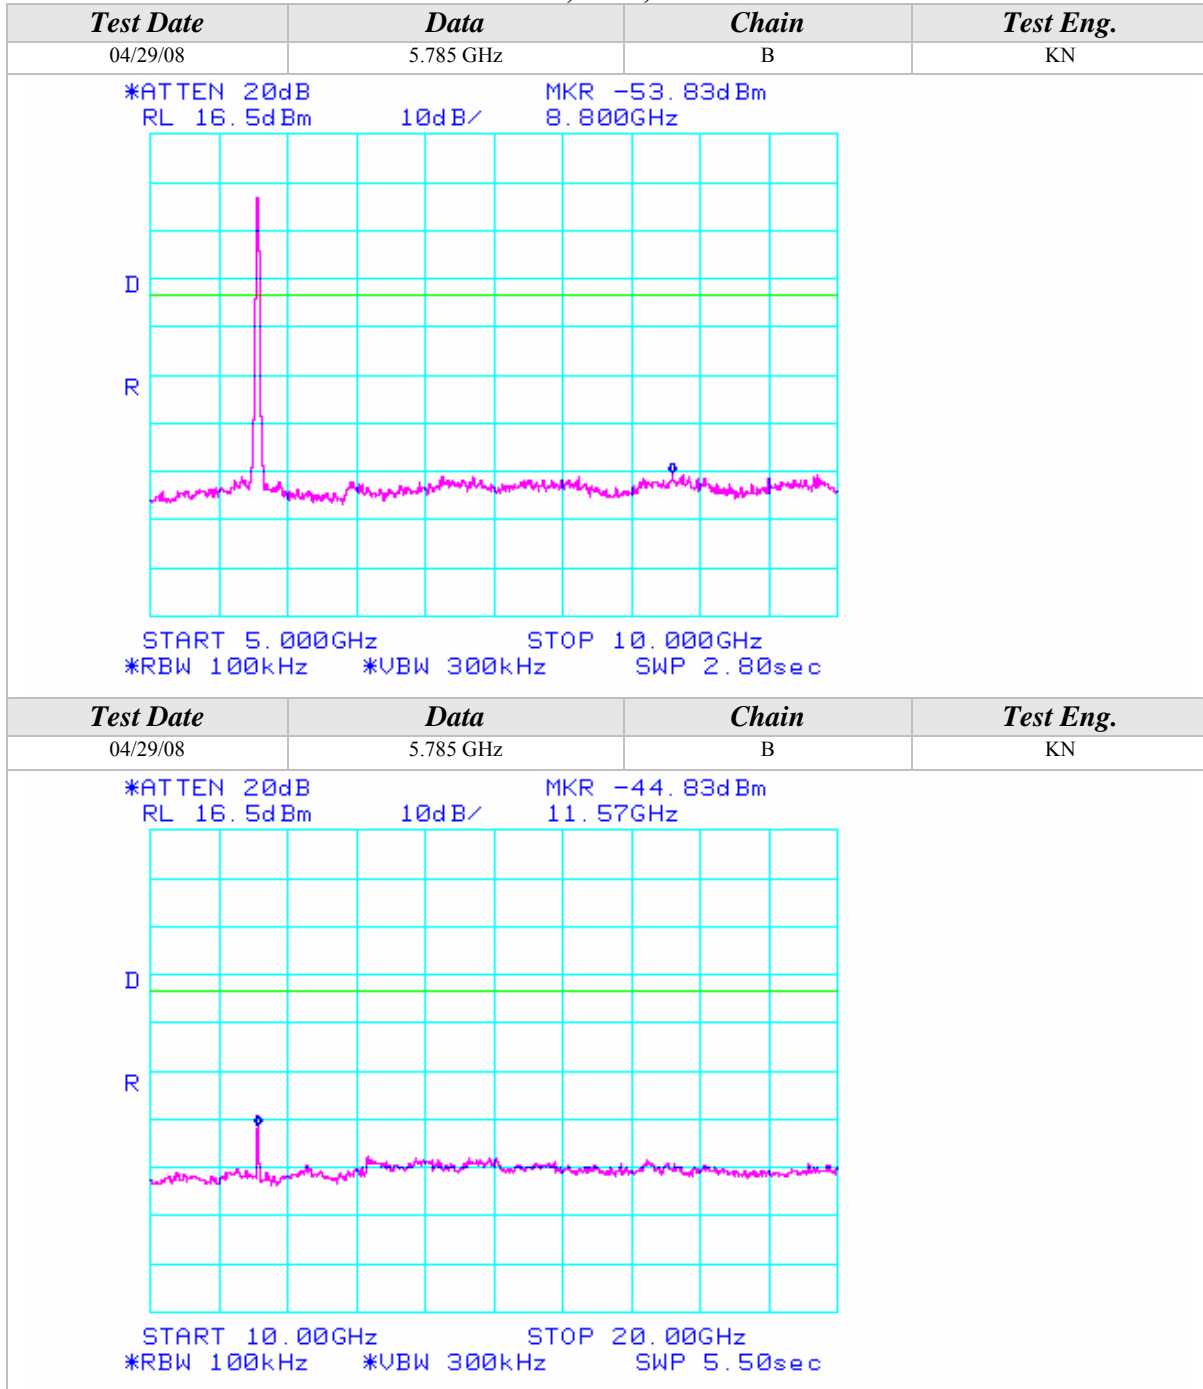



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

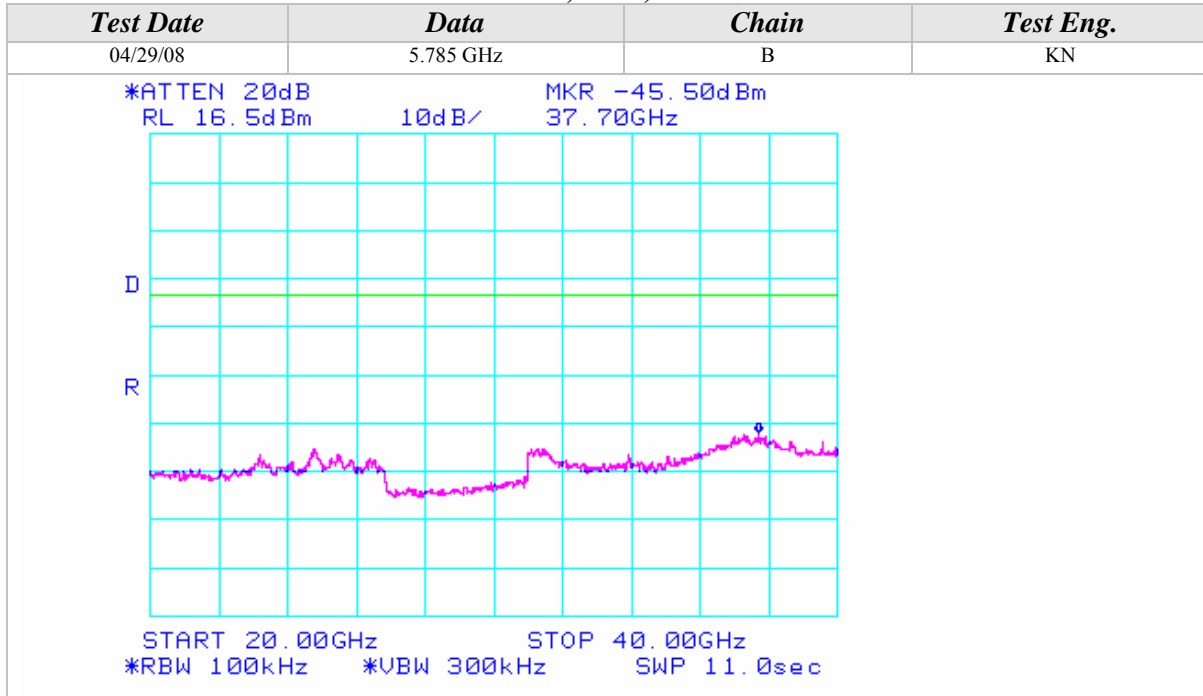



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

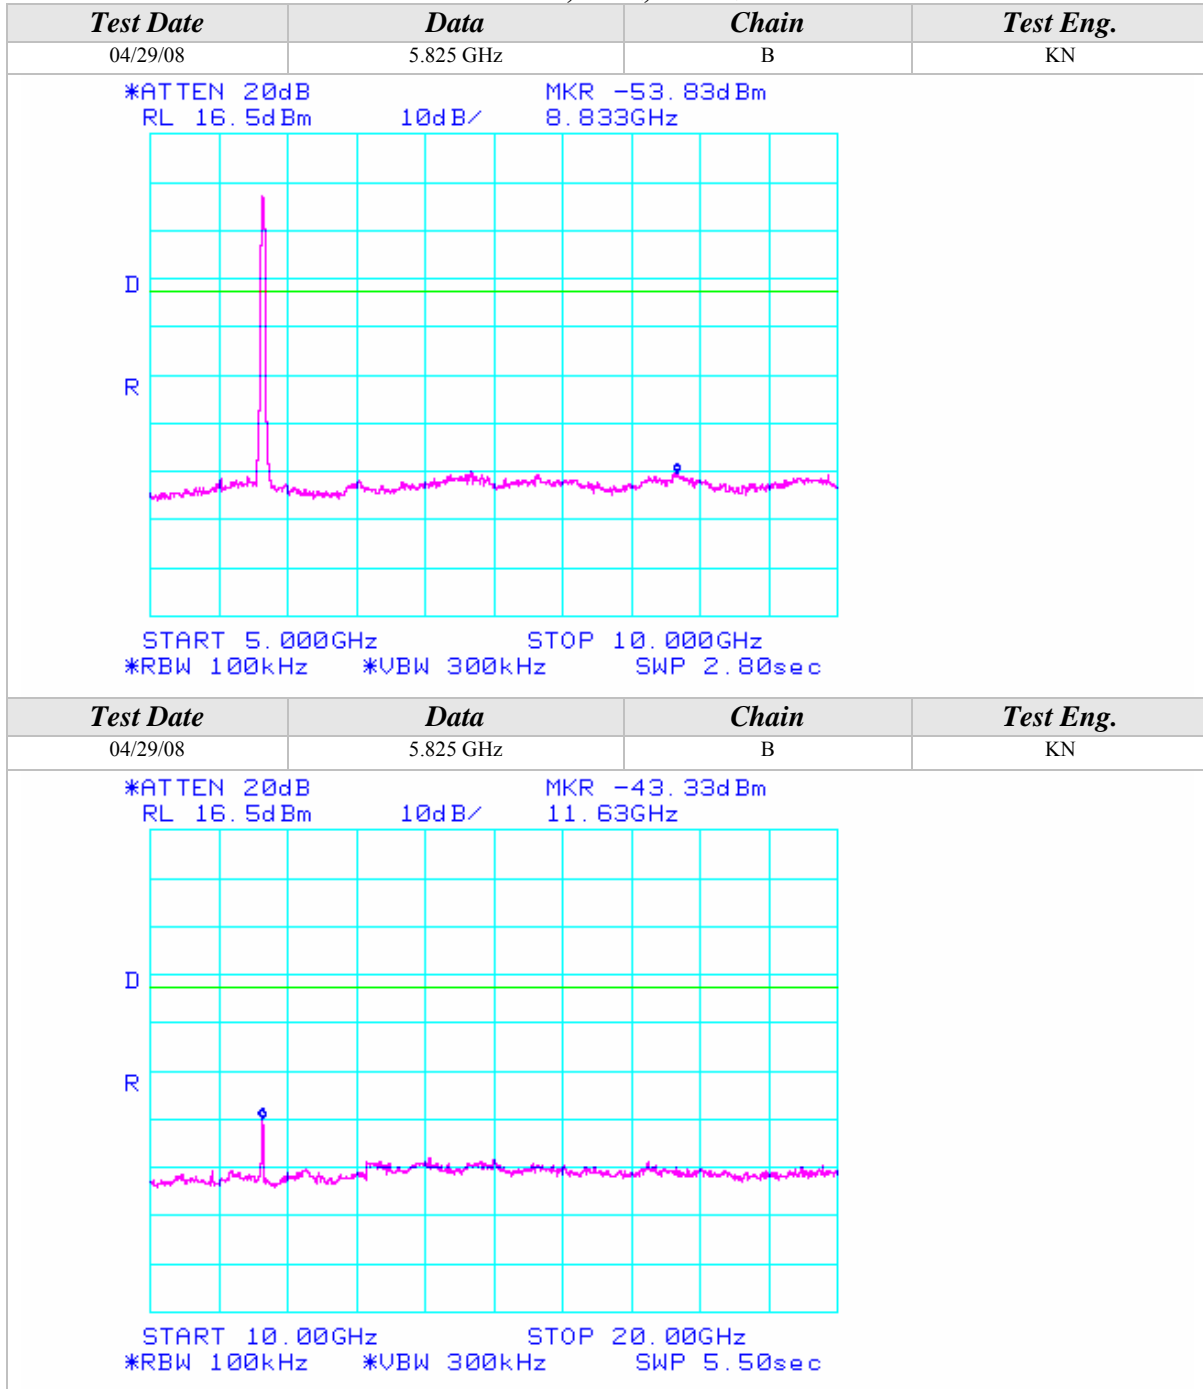



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 20MHz Wide

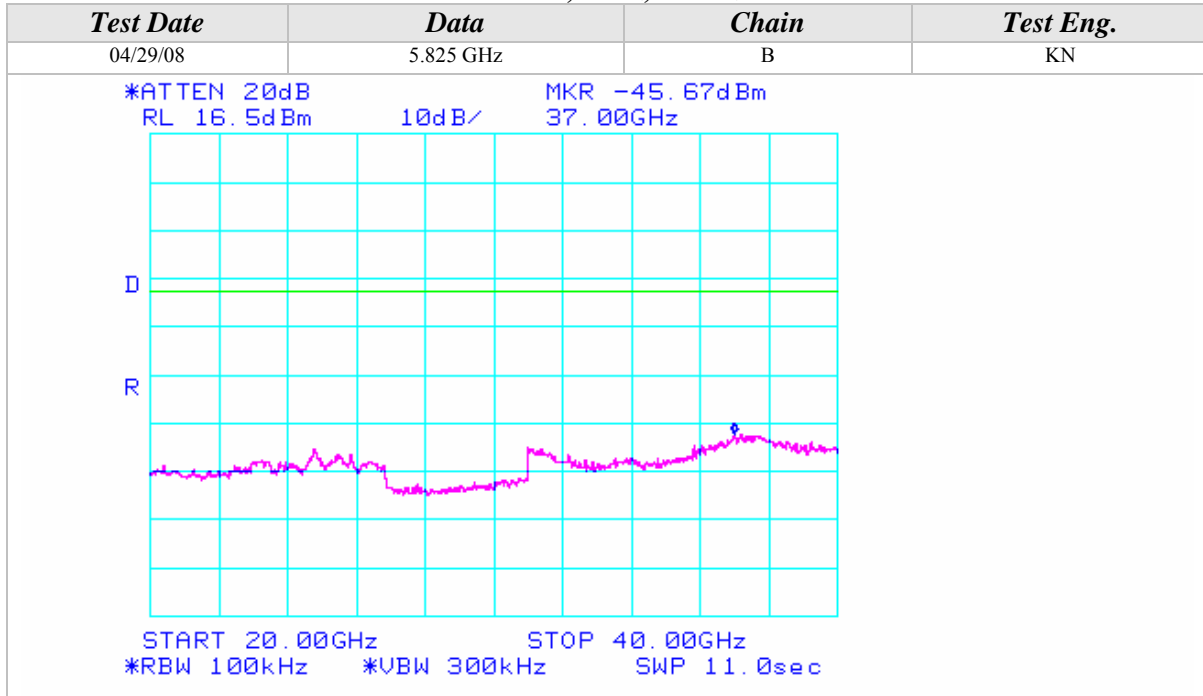




Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 20MHz Wide

Test Date	Data	Chain	Test Eng.
04/30/08	5.745 GHz	C	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -58.83dBm 778.5MHz</p> <p>START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms</p>			
Test Date	Data	Chain	Test Eng.
04/30/08	5.745 GHz	C	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -57.50dBm 3.113GHz</p> <p>START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec</p>			

Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 20MHz Wide

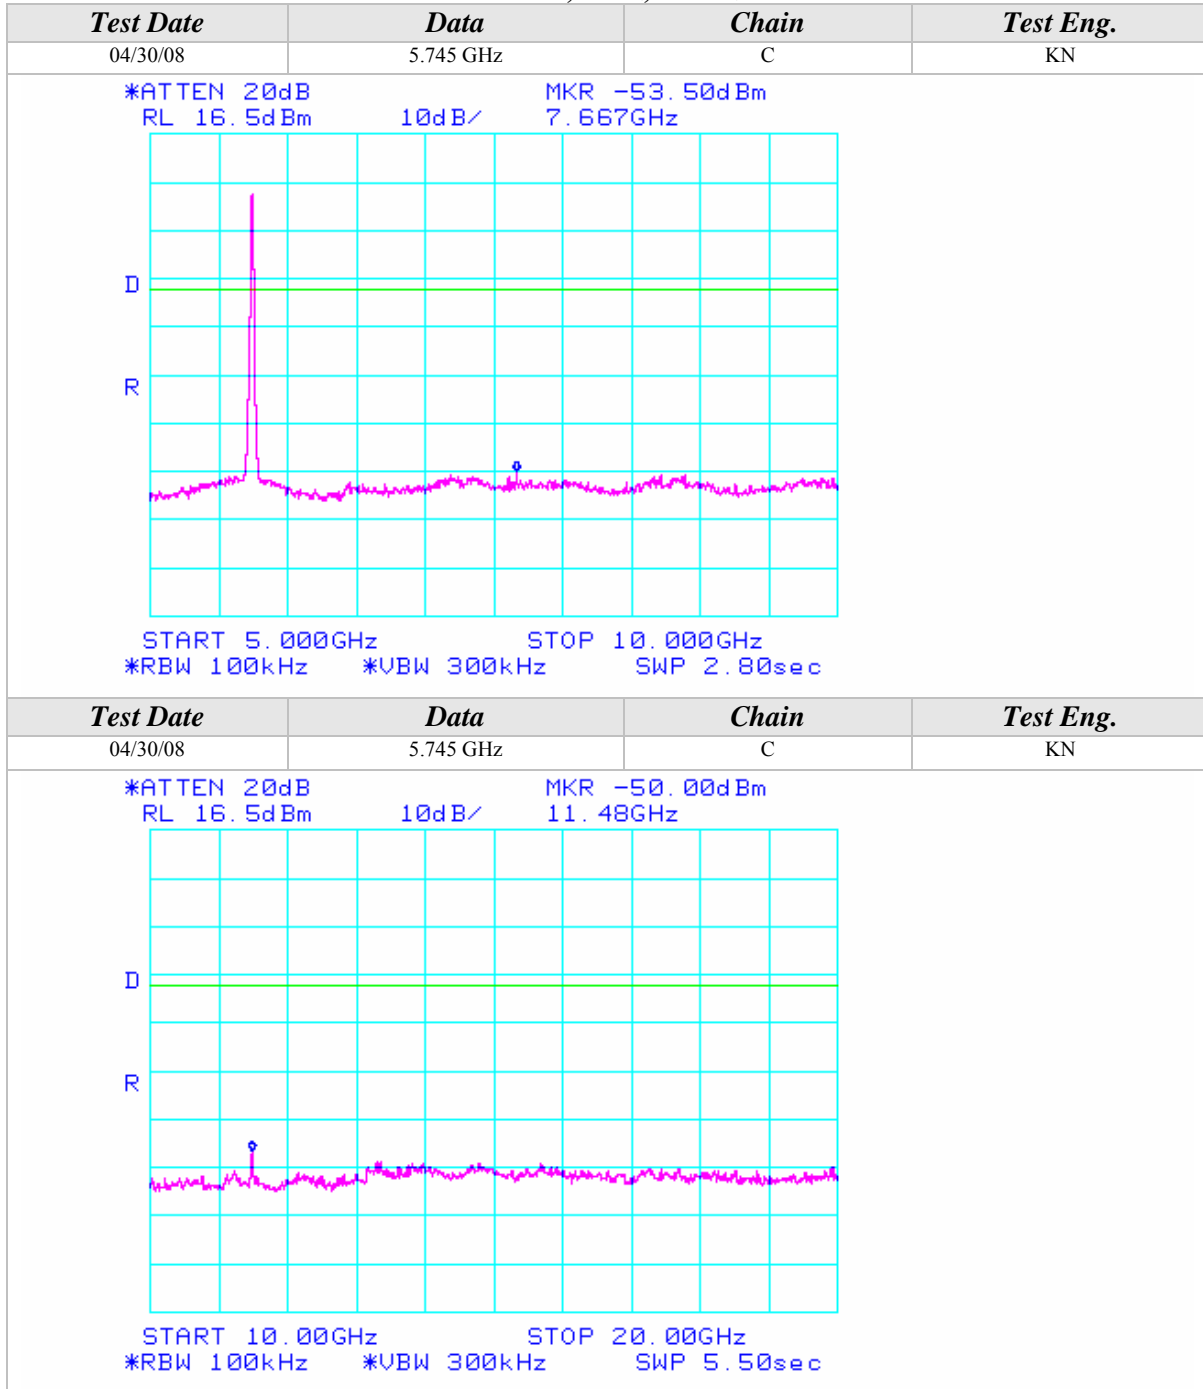

Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

Test Date	Data	Chain	Test Eng.
04/30/08	5.785 GHz	C	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -58.50dBm 818.9MHz</p> <p>START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms</p>			
Test Date	Data	Chain	Test Eng.
04/30/08	5.785 GHz	C	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -56.67dBm 2.940GHz</p> <p>START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec</p>			



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

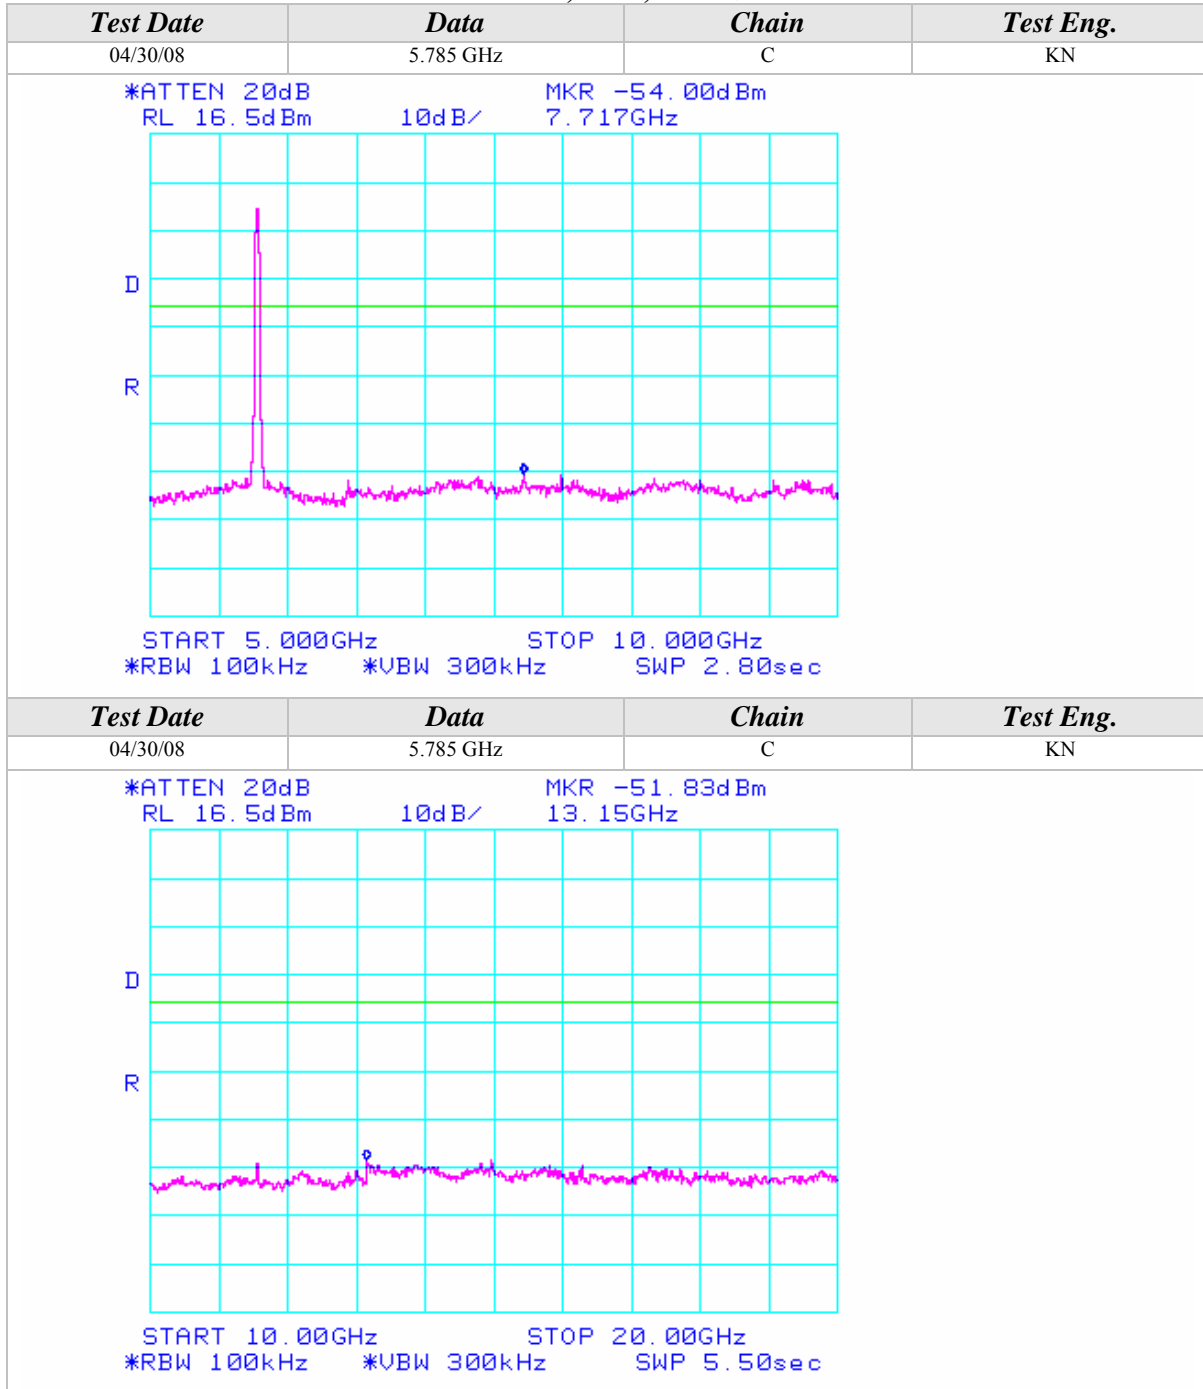



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

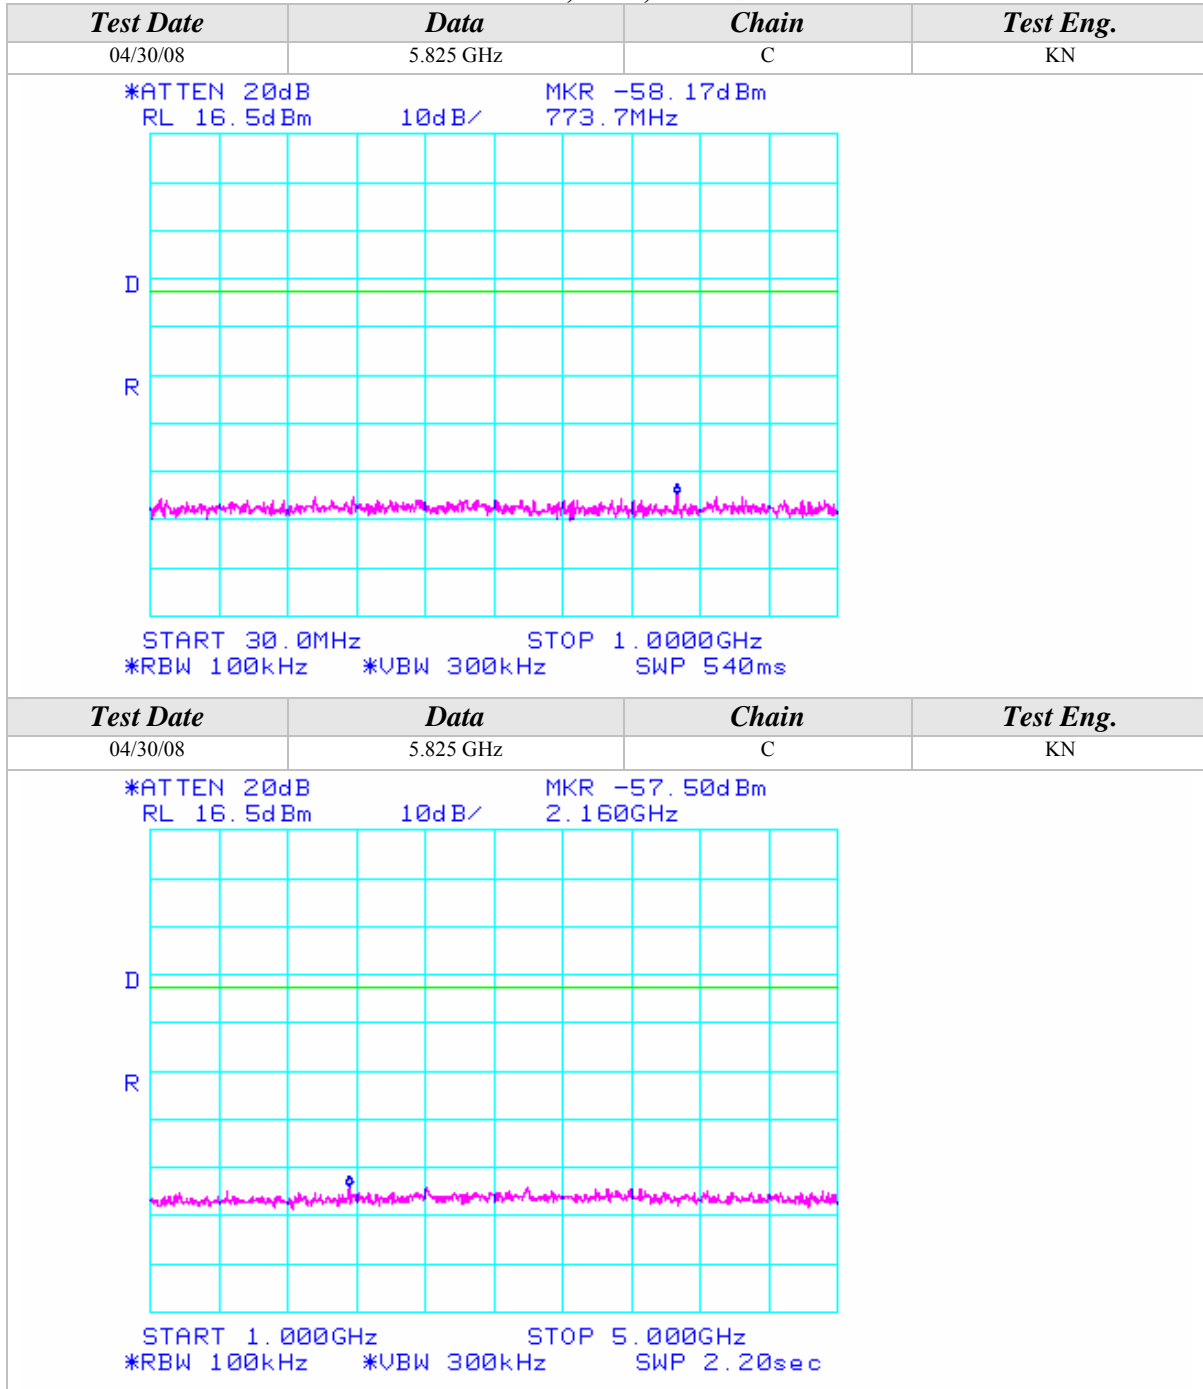



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 20MHz Wide

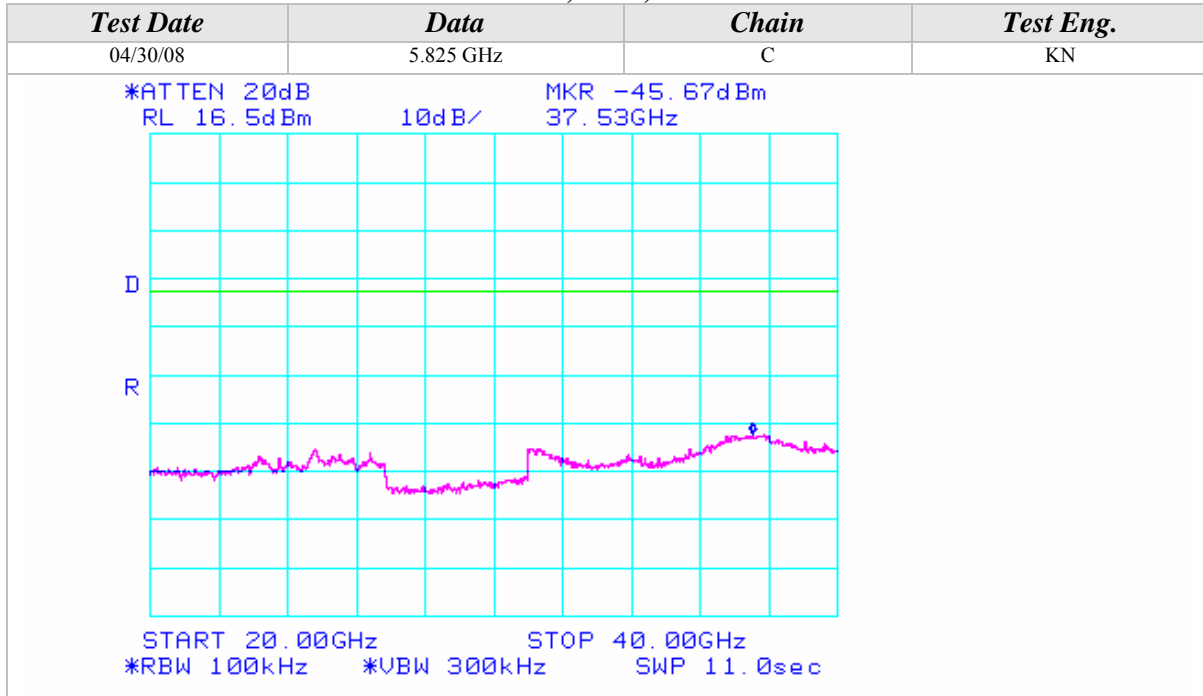



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 40MHz Wide

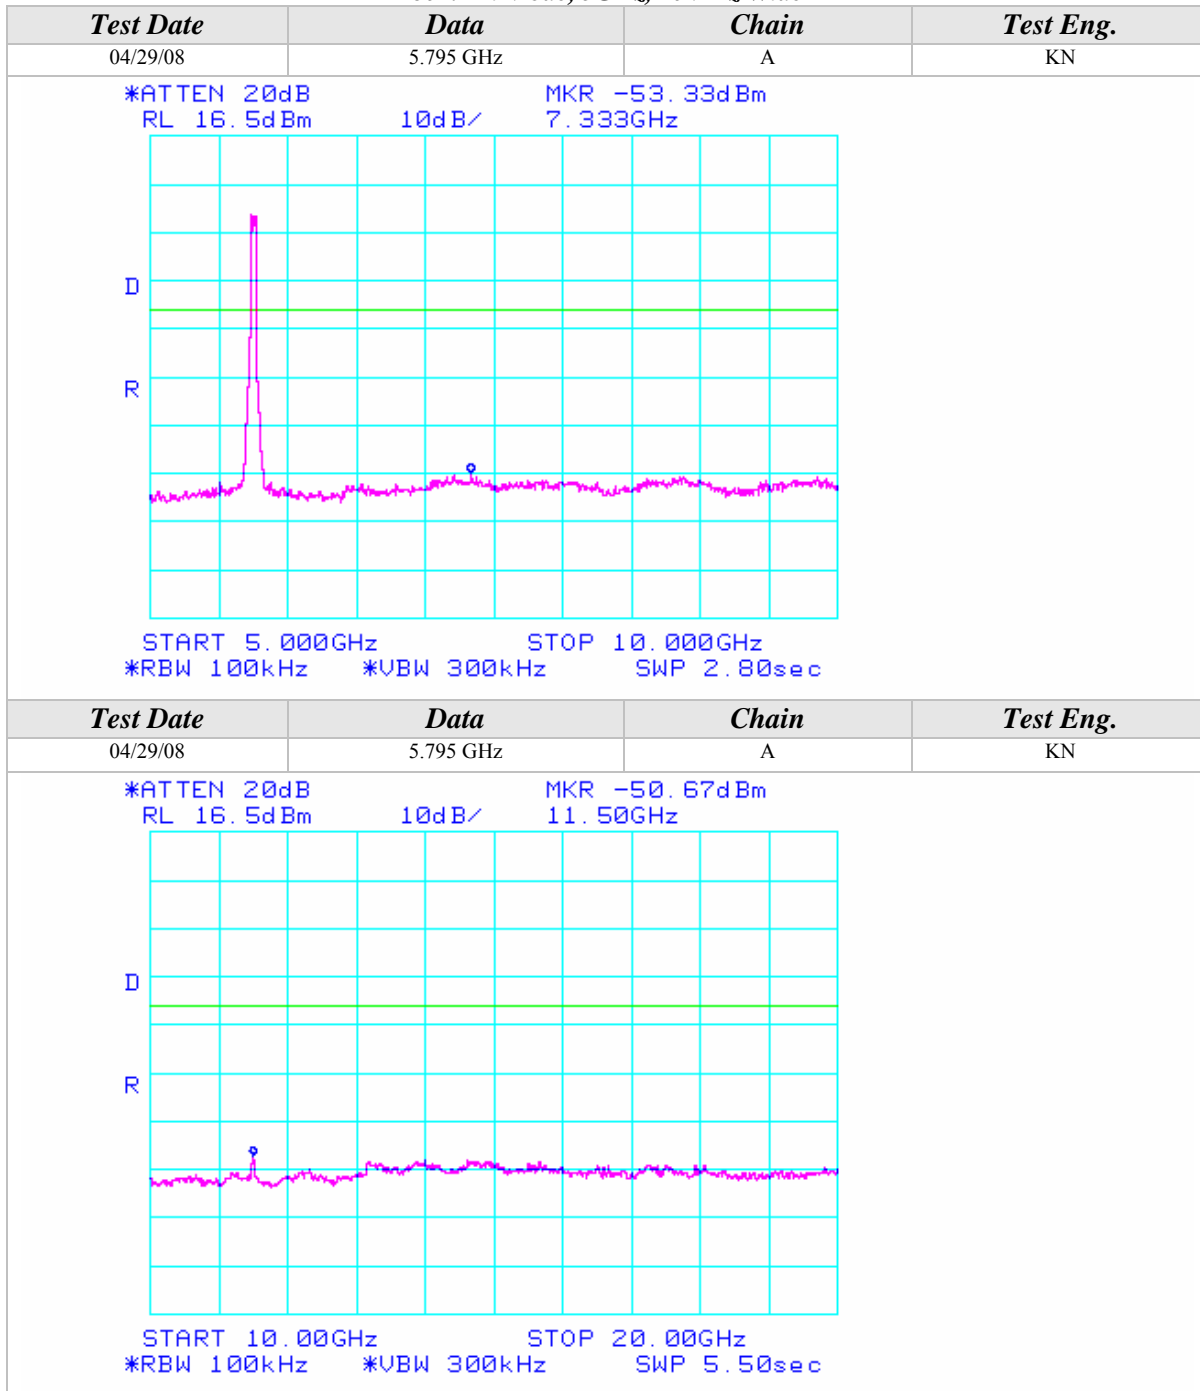



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 40MHz Wide

Test Date	Data	Chain	Test Eng.
04/30/08	5.755 GHz	B	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -53.67dBm 8.733GHz			
START 5.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 2.80sec			
Test Date	Data	Chain	Test Eng.
04/30/08	5.755 GHz	B	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -44.83dBm 11.50GHz			
START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec			



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 40MHz Wide

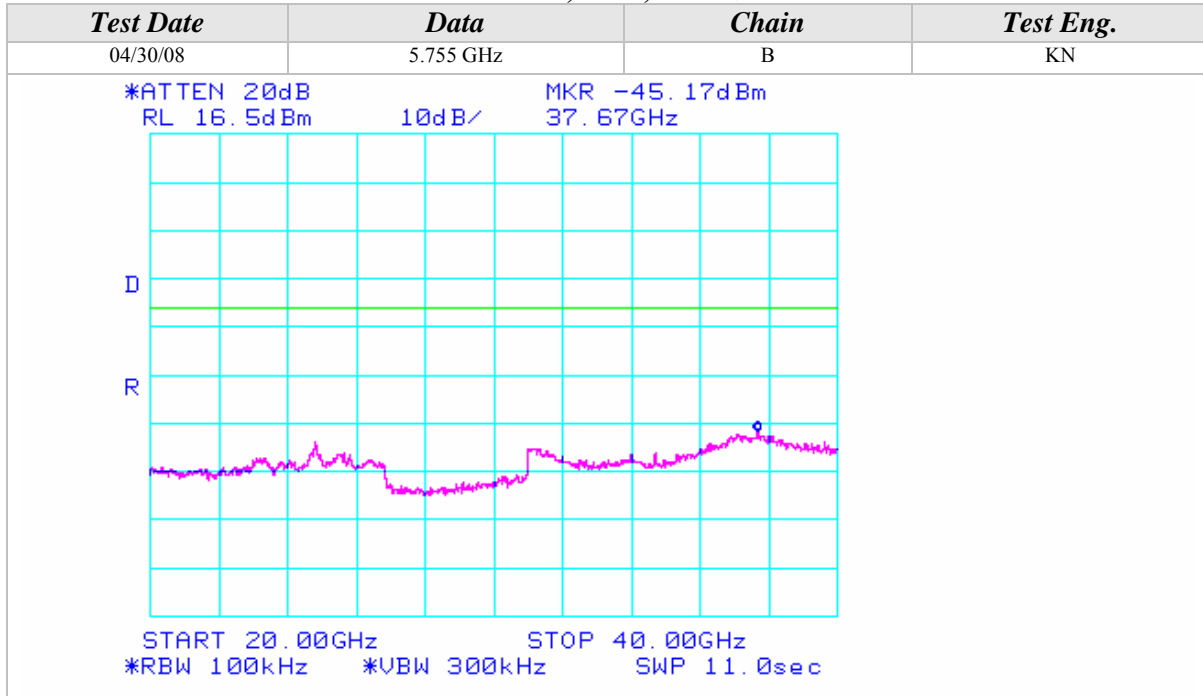



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 40MHz Wide

Test Date	Data	Chain	Test Eng.
04/30/08	5.795 GHz	B	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -53.50dBm 8.650GHz			
START 5.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 2.80sec			
Test Date	Data	Chain	Test Eng.
04/30/08	5.795 GHz	B	KN
*ATTEN 20dB RL 16.5dBm 10dB/ MKR -43.50dBm 11.58GHz			
START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec			





Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 40MHz Wide

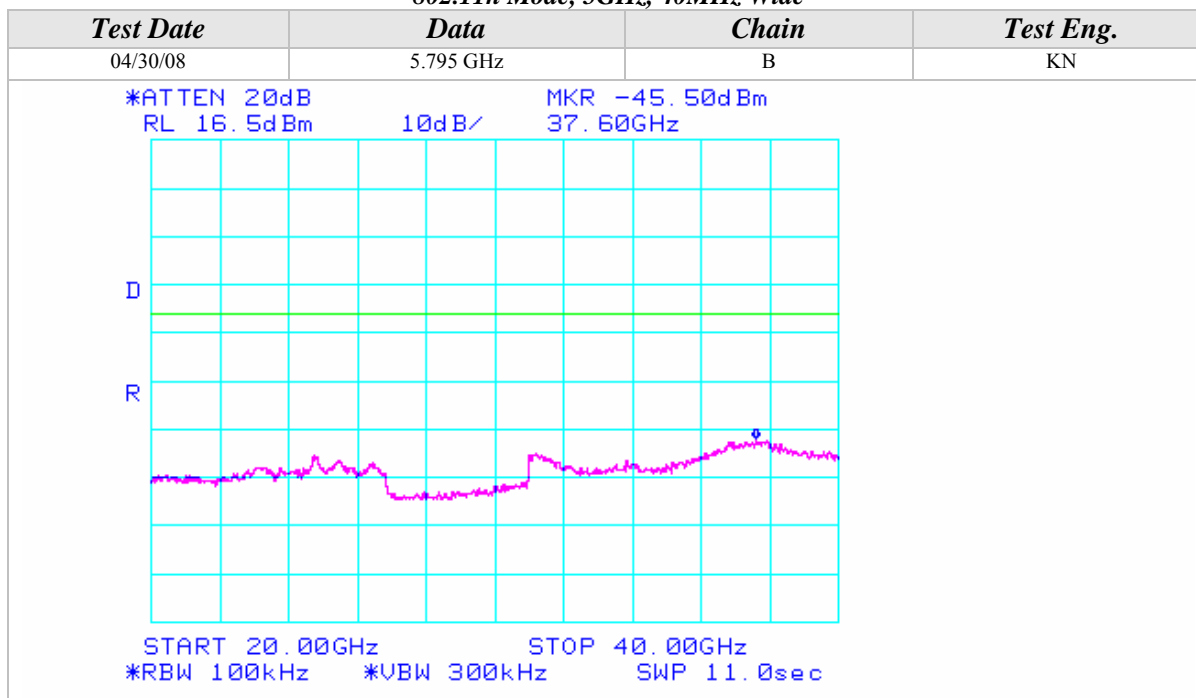


Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 40MHz Wide

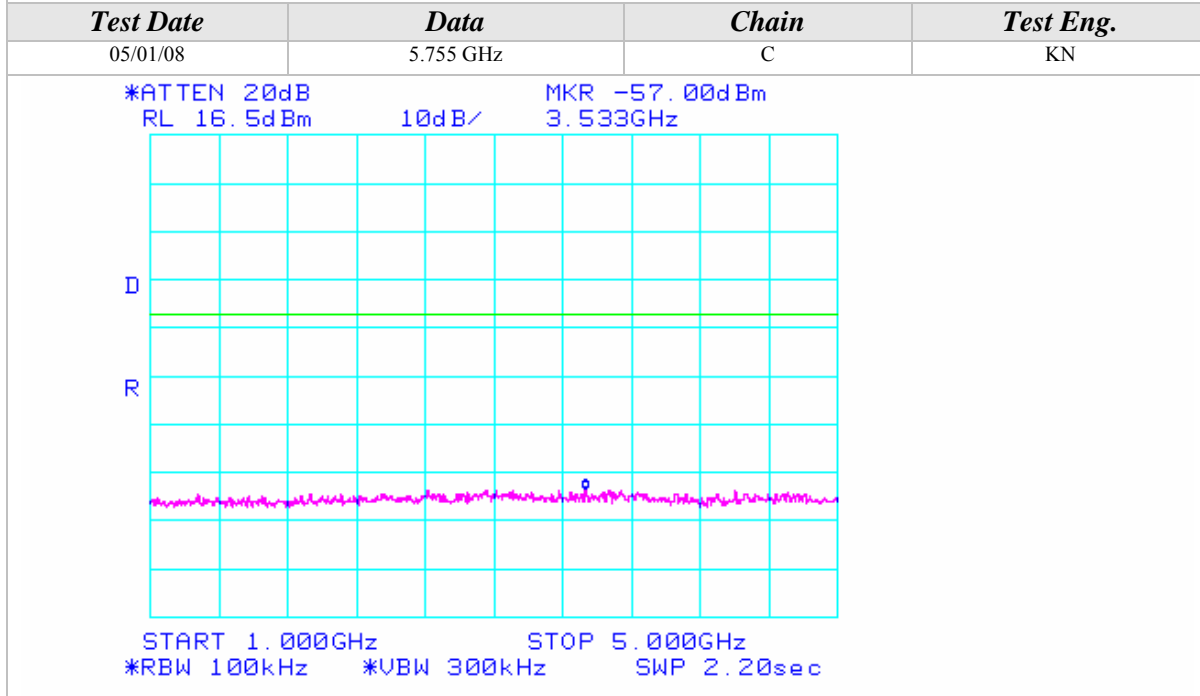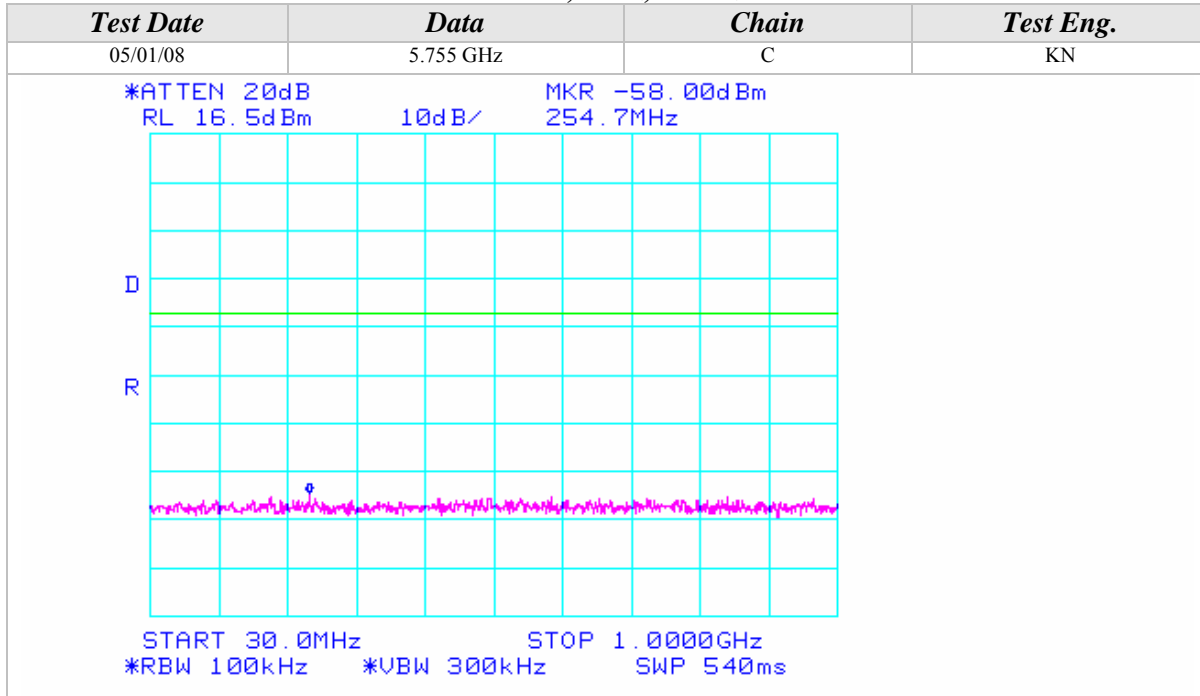

Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 40MHz Wide

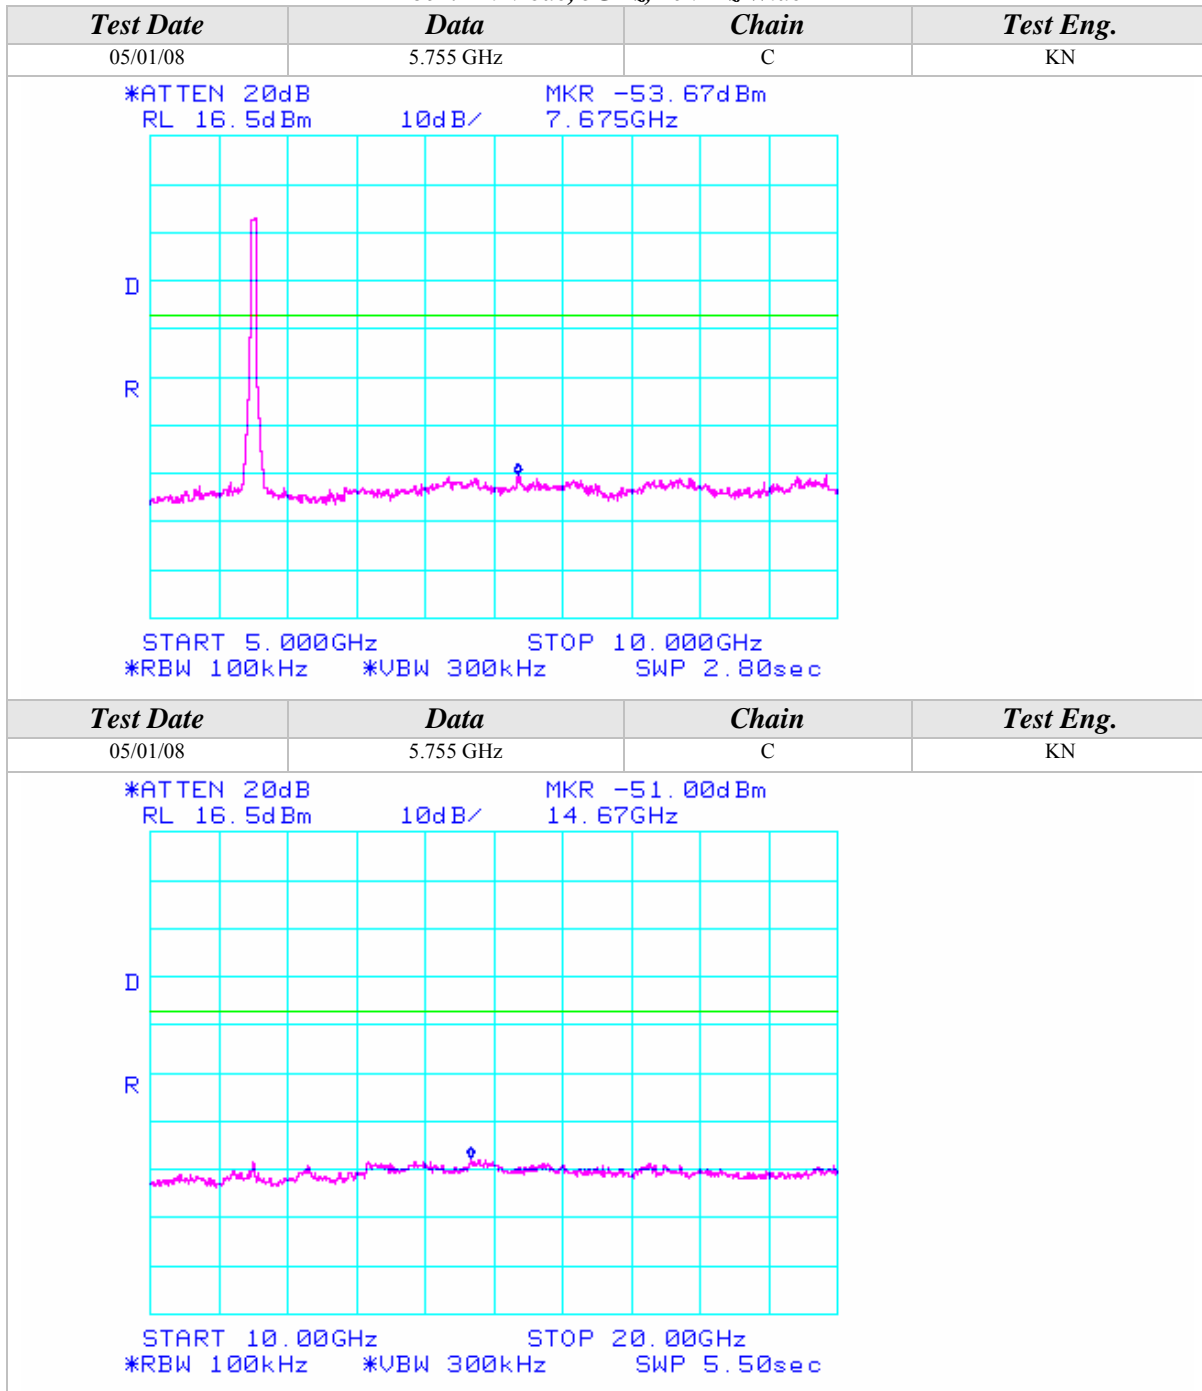



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 40MHz Wide

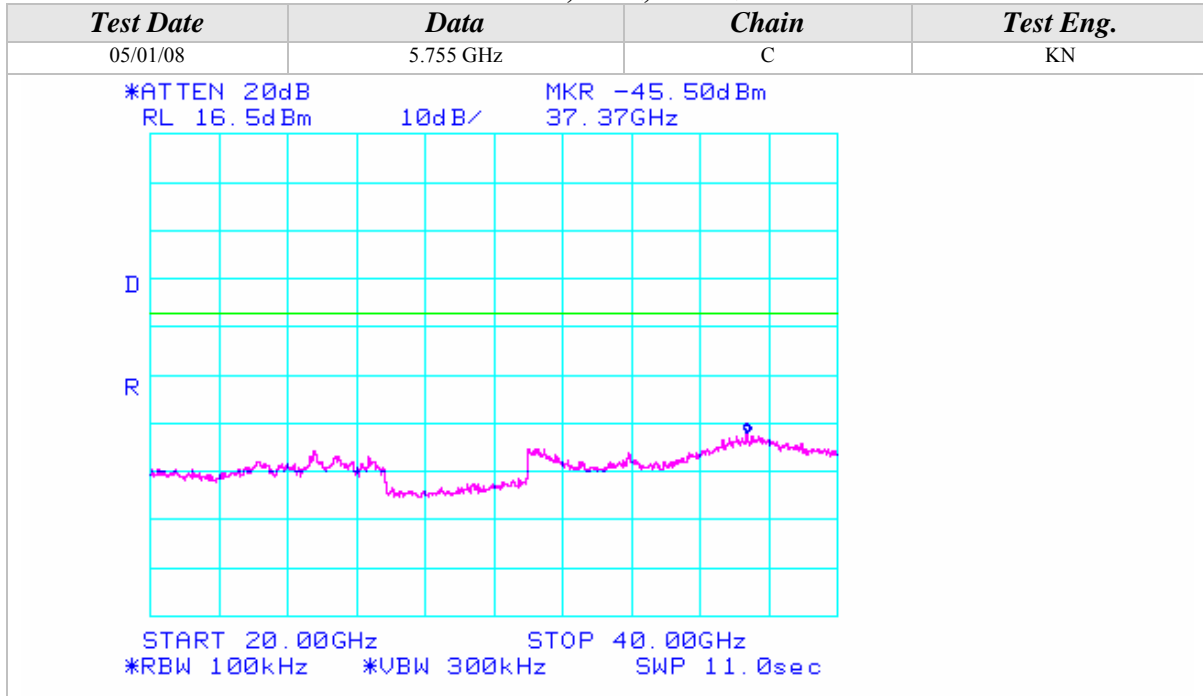



Conducted Out Of Band Emissions (Continued)


802.11n Mode, 5GHz, 40MHz Wide

Test Date	Data	Chain	Test Eng.
05/01/08	5.795 GHz	C	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -58.50dBm 468.1MHz</p> <p>START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms</p>			
Test Date	Data	Chain	Test Eng.
05/01/08	5.795 GHz	C	KN
<p>*ATTEN 20dB RL 16.5dBm 10dB/ MKR -57.00dBm 4.727GHz</p> <p>START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec</p>			



Conducted Out Of Band Emissions (Continued)

802.11n Mode, 5GHz, 40MHz Wide

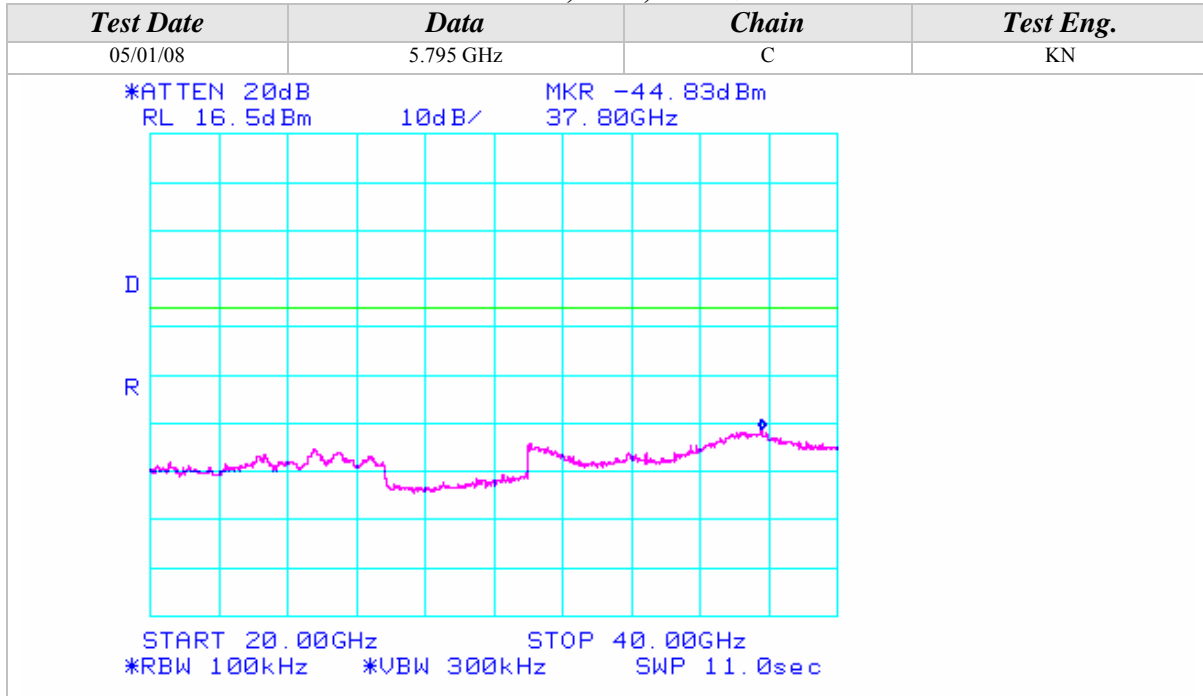



APPENDIX B

MODIFICATIONS AND RECOMMENDATIONS

1.0	NONE