

## Regulatory WLAN Antenna Information

<b>Platform</b>	
Platform Owner	Lenovo Cooperation
Brand Name	Lenovo
Model Name	20003
ODM	Compal
Target Launch Date	(2008/ 04/ 18)
<b>Antenna</b>	
Brand Name	Yageo
Part Number	■ Tx1 Antenna CAN4313706022701B
	■ Tx2 (or Rx2) Antenna CAN4313706022701B
	■ Tx3 (or Rx3) Antenna CAN4313706022701B
<b>Module</b>	
With WLAN Module	<input type="checkbox"/> WM3B2200BG
(Check Box)	<input type="checkbox"/> WM3B2915ABG
	<input type="checkbox"/> WM3945ABG
	<input type="checkbox"/> 4965AGN
	<input type="checkbox"/> 4965AG_
	■ 533ANX Family
	■ 512ANX Family
	■ 533AN Family
	■ 512AN Family

## Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Desired	Desired	Desired	Desired
1E	Tx1, Tx2 & Tx3 antenna (Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Tx1, Tx2 & Tx3 antenna (Peak Gain only) *	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Tx1, Tx2 & Tx3 antenna (Cable loss W/ connector) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs <u>and</u> Drawings of Tx1, Tx2, and Tx3 (or Rx3) antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	N/A	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. (S. Korea requires <u>photographs of antennas for approval submission</u> ). <u>Taiwan requires pictures of each antenna type shown in the system.</u>	Required	Required	Desired	<u>Required (Photos)</u>	<u>Required (Photos)</u>
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

**NOTE:**

(\*) if 3<sup>rd</sup> antenna is Rx only (e.g. receive only for 4965AGN) then peak gain and cable loss not required

# Antenna Information

## Section 1. Antenna Assembly Specifications

### Antenna Assembly Summary:

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E *Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G VSWR	1H Cable Loss (dBi)
(Compal P/N: DC33000F010) Tx1 antenna	Intel Corporation	PIFA	(P/N: CAN4313706022701B) 50 ohm Coaxial. Length: 650 mm diameter: 1.37mm Connector: HRS U.FL or IPEX	2400-2500MHz 2.59 dBi (peak)	2400-2500MHz 4.32 dBi (peak)	2400-2500MHz 2 max	2400-2500MHz 1.73 dBi (peak)
				2496-2690MHz NA	2496-2690MHz NA	2496-2690MHz NA	2496-2690MHz NA
				5150-5350MHz 0.05 dBi (peak)	5150-5350MHz 2.69 dBi (peak)	5150-5350MHz 2.5 max	5150-5350MHz 2.64 dBi (peak)
				5470-5725MHz 0.38 dBi (peak)	5470-5725MHz 3.13 dBi (peak)	5470-5725MHz 2.5 max	5470-5725MHz 2.75 dBi (peak)
				5725-5850MHz 1.43 dBi (peak)	5725-5850MHz 4.22 dBi (peak)	5725-5850MHz 2.5 max	5725-5850MHz 2.79 dBi (peak)
(Compal P/N: DC33000F010) Tx2 (or Rx2 for 512 family) antenna	Intel Corporation	PIFA	(P/N: CAN4313706022701B) 50 ohm Coaxial. Length: 857 mm diameter: 1.37mm Connector: HRS U.FL or IPEX	2400-2500MHz 1.01 dBi (peak)	2400-2500MHz 3.29 dBi (peak)	2400-2500MHz 2 max	2400-2500MHz 2.28 dBi (peak)
				2496-2690MHz NA	2496-2690MHz NA	2496-2690MHz NA	2496-2690MHz NA
				5150-5350MHz 0.36 dBi (peak)	5150-5350MHz 3.84 dBi (peak)	5150-5350MHz 2.5 max	5150-5350MHz 3.48 dBi (peak)
				5470-5725MHz 0.37 dBi (peak)	5470-5725MHz 4.00 dBi (peak)	5470-5725MHz 2.5 max	5470-5725MHz 3.63 dBi (peak)
				5725-5850MHz 2.06 dBi (peak)	5725-5850MHz 5.74 dBi (peak)	5725-5850MHz 2.5 max	5725-5850MHz 3.68 dBi (peak)
(Compal P/N: DC33000F010) Tx3 (or Rx3) antenna	Intel Corporation	PIFA	(P/N: CAN4313706022701B) 50 ohm Coaxial. Length: 404 mm diameter: 1.37mm Connector: HRS U.FL or IPEX	2400-2500MHz 0.83 dBi (peak)	2400-2500MHz 1.90 dBi (peak)	2400-2500MHz 2 max	2400-2500MHz 1.07 dBi (peak)
				2496-2690MHz NA	2496-2690MHz NA	2496-2690MHz NA	2496-2690MHz NA
				5150-5350MHz 1.71 dBi (peak)	5150-5350MHz 3.35dBi (peak)	5150-5350MHz 2.5 max	5150-5350MHz 1.64 dBi (peak)
				5470-5725MHz 0.65 dBi (peak)	5470-5725MHz 2.36 dBi (peak)	5470-5725MHz 2.5 max	5470-5725MHz 1.71 dBi (peak)
				5725-5850MHz -0.24 dBi (peak)	5725-5850MHz 1.50 dBi (peak)	5725-5850MHz 2.5 max	5725-5850MHz 1.74 dBi (peak)

### NOTE:

(\*) If Rx3 only (3<sup>rd</sup> antenna receives only, e.g. for 4965AGN) then the information marked with \* is not required

**Antenna Peak Gain Table:**


Frequency (MHz)	Tx1 Antenna		Tx2 (or Rx2) Antenna		Tx3 (or Rx3) Antenna	
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical
	(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dBi)
2400	0.98	-2.23	0.79	-1.71	0.76	0.33
2450	1.64	-2.03	0.83	-1.18	0.83	-1.18
2500	2.59	-1.99	1.01	-1.17	0.71	-1.97
2501	x	x	x	x	x	x
2593	x	x	x	x	x	x
2685	x	x	x	x	x	x
5150	-0.19	-3.60	0.36	-2.48	-0.41	1.71
5250	0.05	-3.06	-0.23	-2.34	-2.03	0.78
5350	-0.41	-1.40	0.08	-0.25	-2.11	1.57
5470	-0.38	-1.22	-0.25	-0.04	-3.45	0.65
5600	-0.69	0.38	0.37	-0.06	-3.89	-1.06
5725	-0.16	-1.63	0.18	-0.04	-2.74	-0.24
5785	0.51	-1.88	1.07	0.26	-2.04	-0.26
5850	1.43	-0.68	2.06	0.49	-2.51	-1.41

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V
- If Rx2 only (2<sup>nd</sup> antenna receives only, e.g. for 512 family) then the information is not required for Rx2..
- If Rx3 only (3<sup>rd</sup> antenna receives only, e.g. for 4965AGN) then the information is not required for Rx3.


## Section 2. Dimensioned Photos or Drawings of Antennas

Include a dimensioned photo and dimensioned drawing of Tx1 antenna here.

### Tx1 Antenna Dimensioned Drawing:

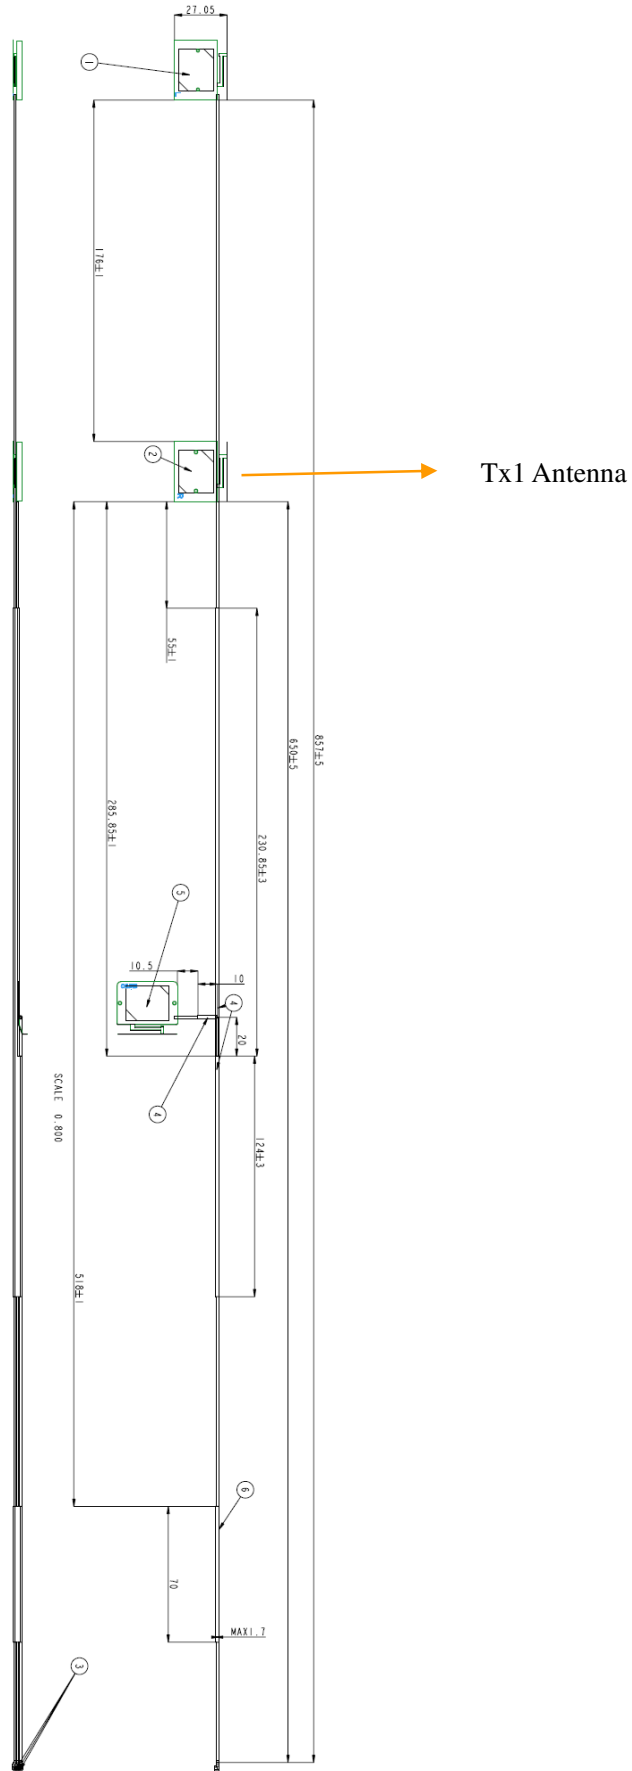


**Tx1 Antenna Photo:**

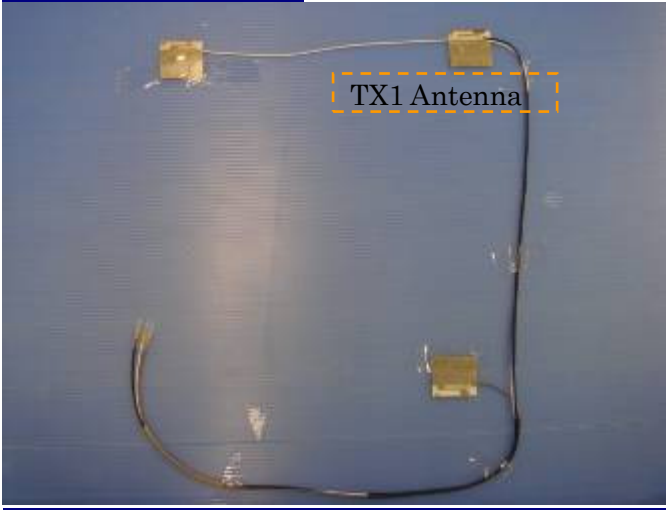

Include a dimensioned photo and dimensioned drawing of Tx2 (or Rx2) antenna here.

Tx2(or Rx2) Antenna Dimensioned Drawing:

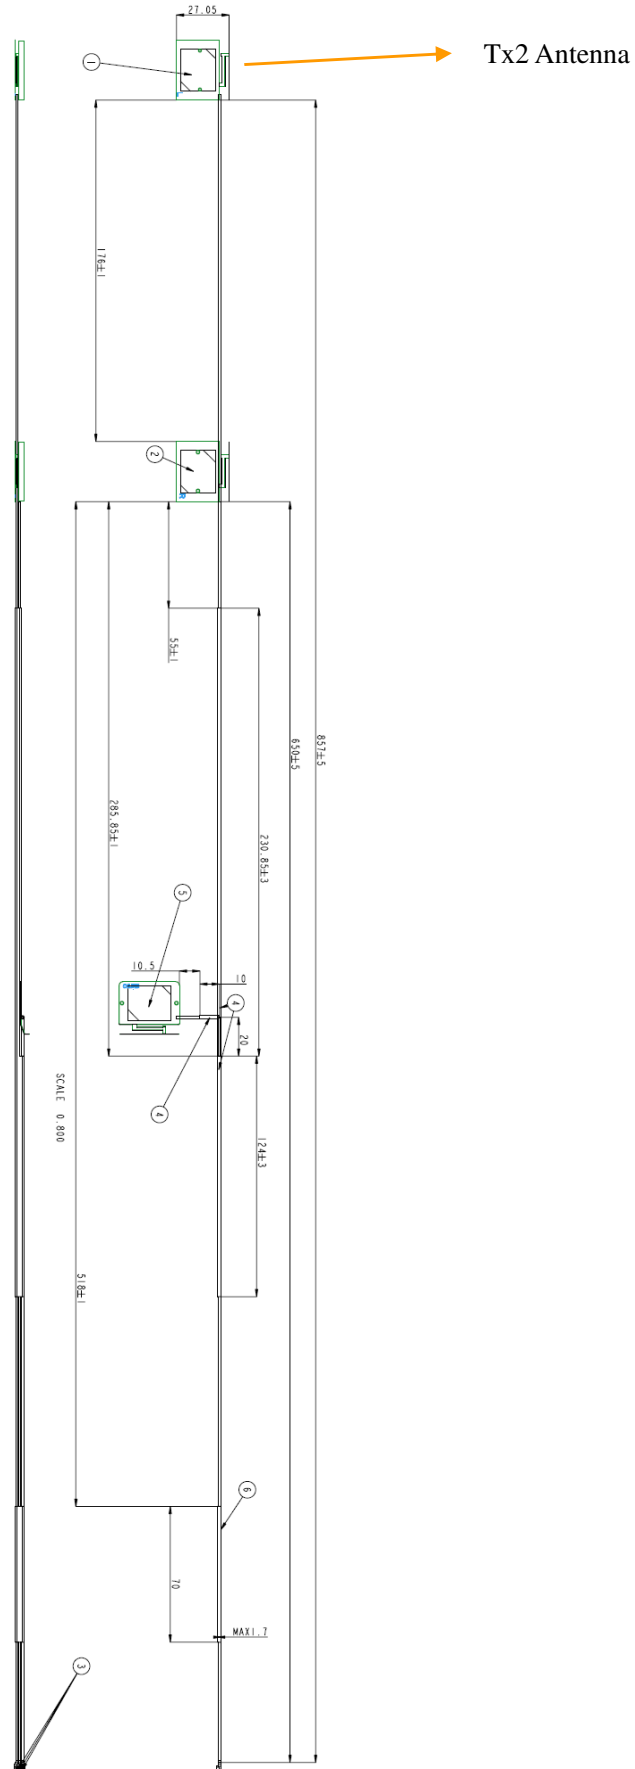


**Tx2 (or Rx2)Antenna Photo:**






Include a dimensioned photo and dimensioned drawing of Tx3 (or Rx3) antenna here.

Tx3 (or Rx3) Antenna Dimensioned Drawing:

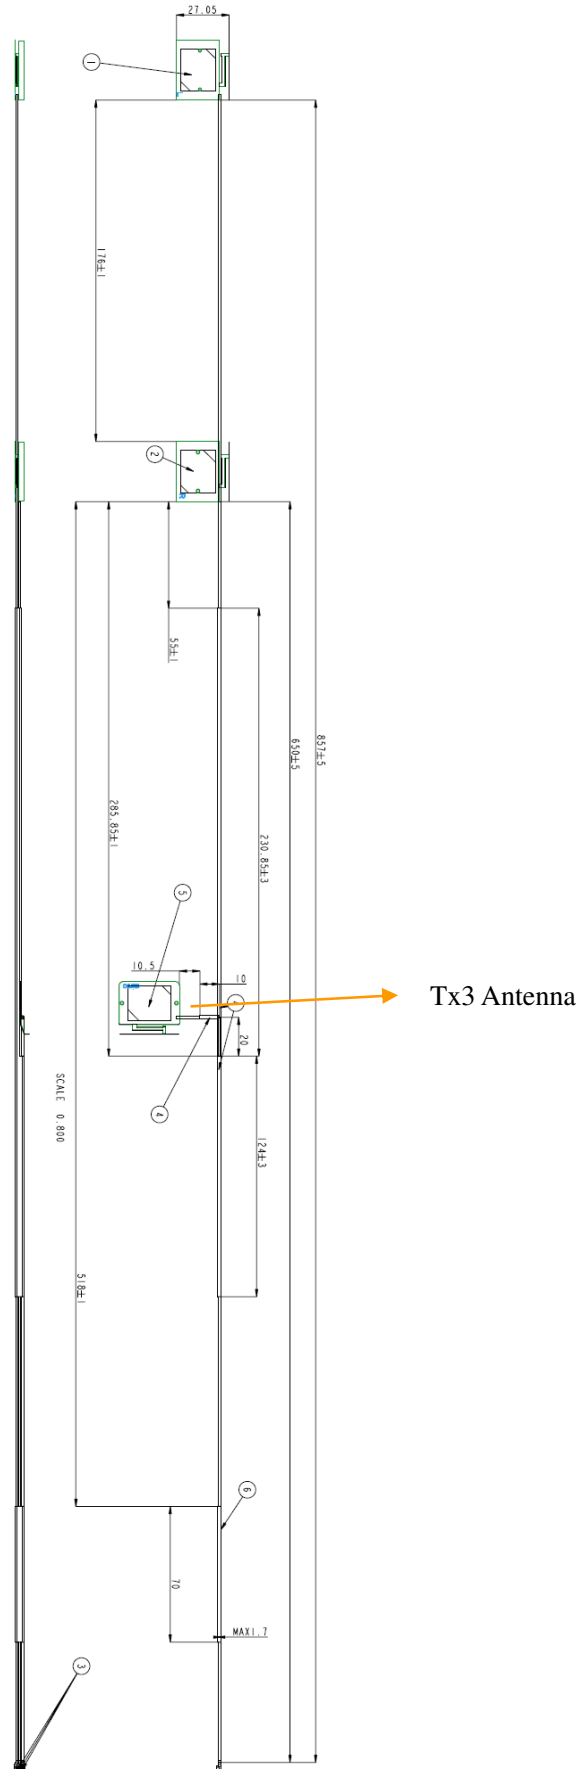


**Tx3 (or Rx3) Antenna Photo:**

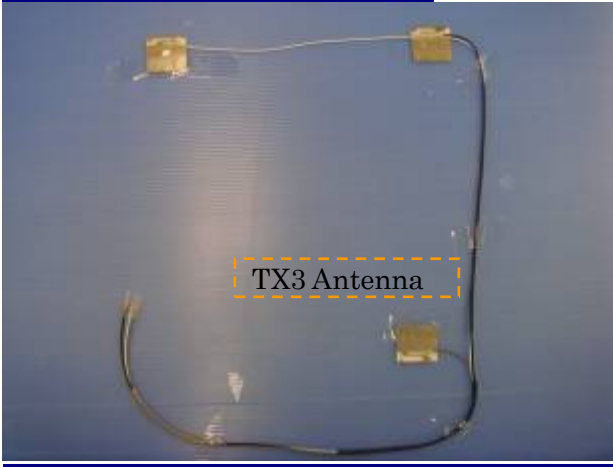


**Include front view photo of all 3 antennas here.**

Antenna Manufacturer: Yageo  
Antenna Part Number: CAN4313706022701B (Tx1), CAN4313706022701B (Tx2 or Rx2)  
CAN4313706022701B (Tx3 or Rx3)

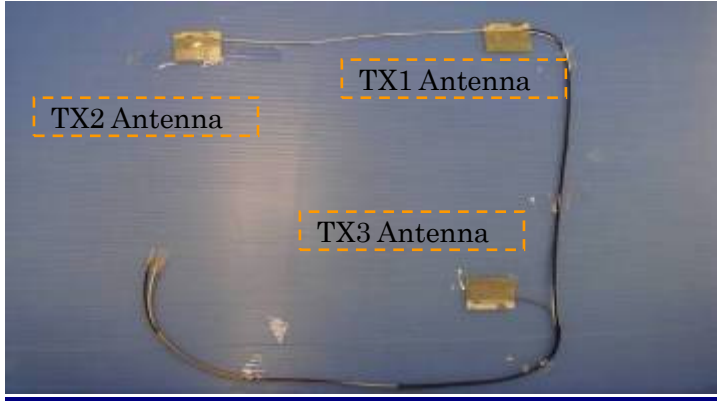

**Include back view photo of all 3 antennas here.**


Antenna Manufacturer: Yageo  
Antenna Part Number: CAN4313706022701B (Main), CAN4313706022701B (Aux),  
CAN4313706022701B (MIMO)

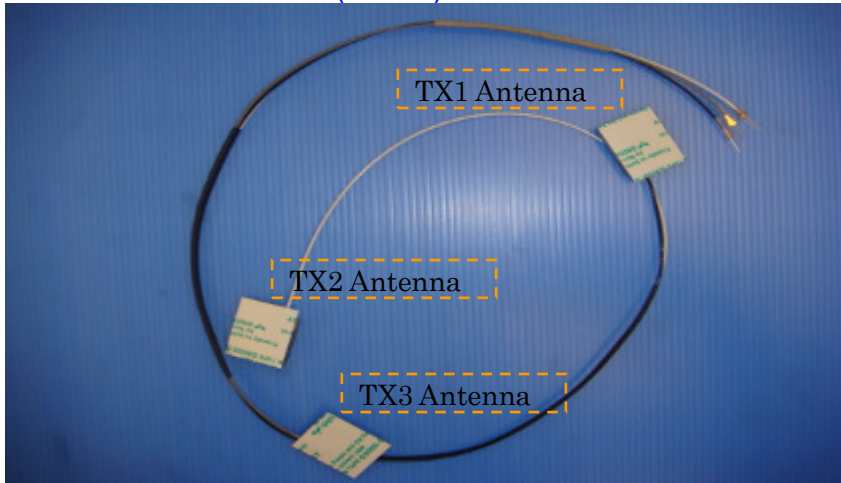

**Section 3. Radiation characteristics of antennae Loaded in Host Platform**

**2400-2500MHz radiation characteristic**


**Tx1 antenna: 2400 MHz**

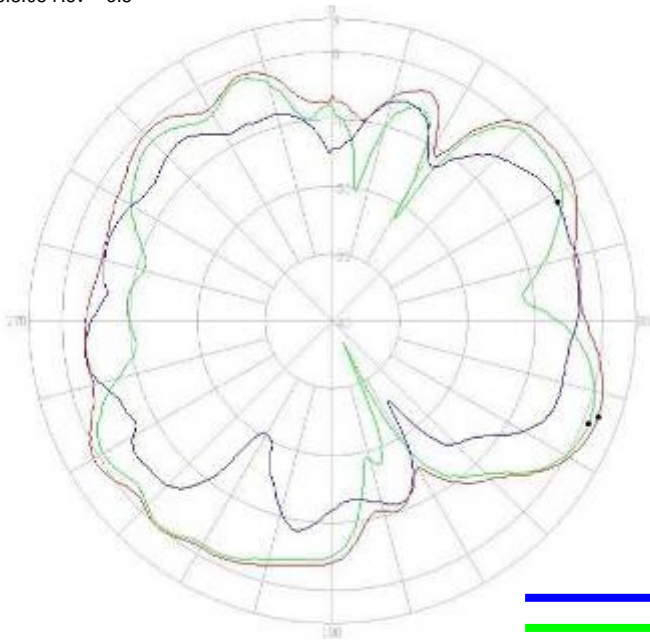

— Vertical  
— Horizontal  
— H+V


Center Frequency	<b>2400 MHz</b>
Horizontal (dBi) peak	<b>0.98</b>
Vertical (dBi) peak	<b>-2.23</b>

### Tx1 antenna: 2450 MHz

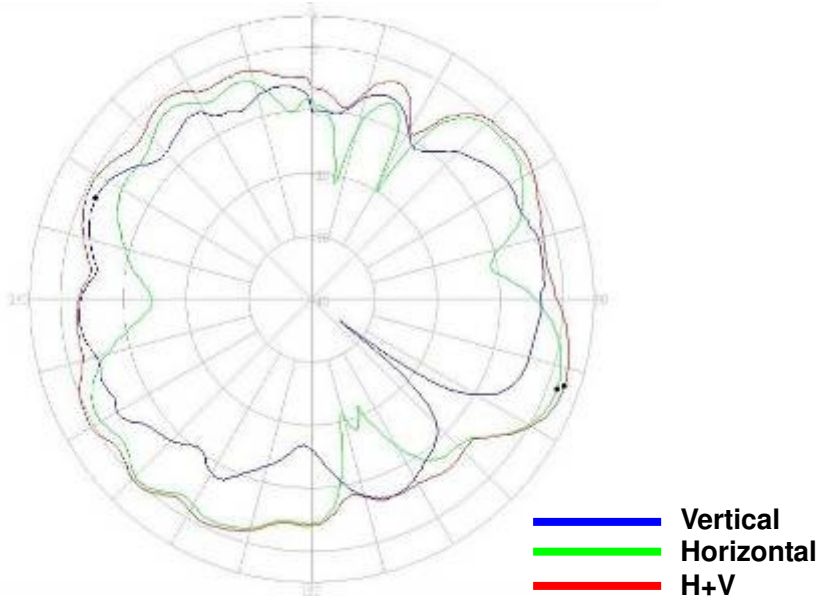


Center Frequency	<b>2450 MHz</b>
Horizontal (dBi) peak	<b>1.64</b>
Vertical (dBi) peak	<b>-2.03</b>

### Tx1 antenna: 2500 MHz

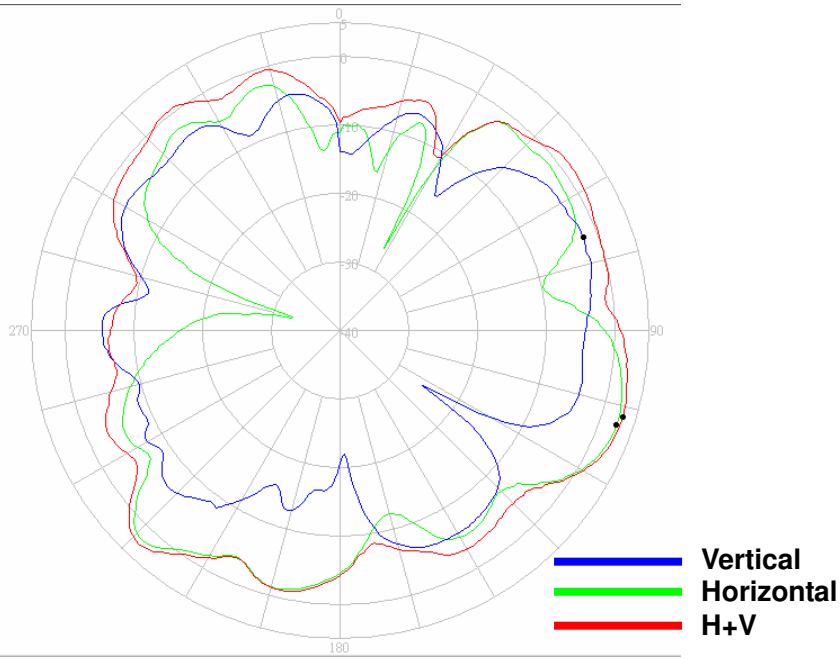


Center Frequency	<b>2500 MHz</b>
Horizontal (dBi) peak	<b>2.59</b>
Vertical (dBi) peak	<b>-1.99</b>

**Tx2 (or Rx2) antenna: 2400 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

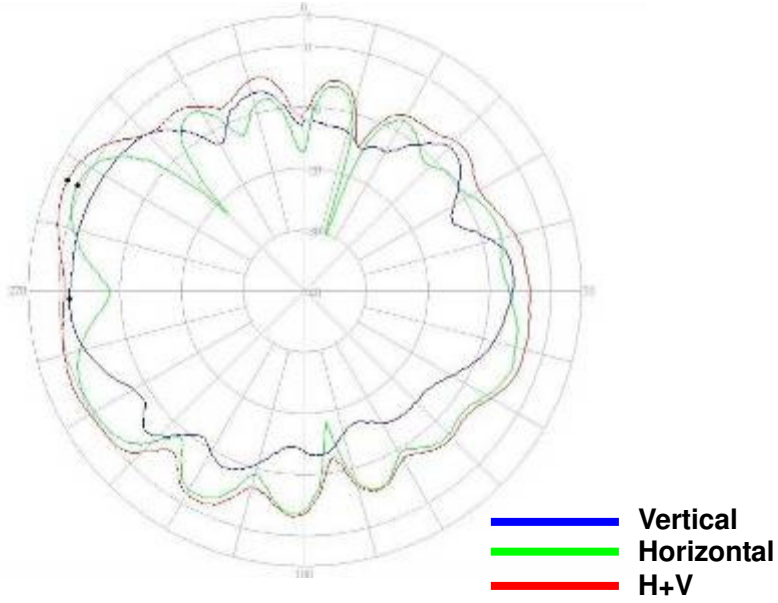

Center Frequency	<b>2400 MHz</b>
Horizontal (dBi) peak	<b>0.79</b>
Vertical (dBi) peak	<b>-1.71</b>


**Tx2 (or Rx2) antenna: 2450 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

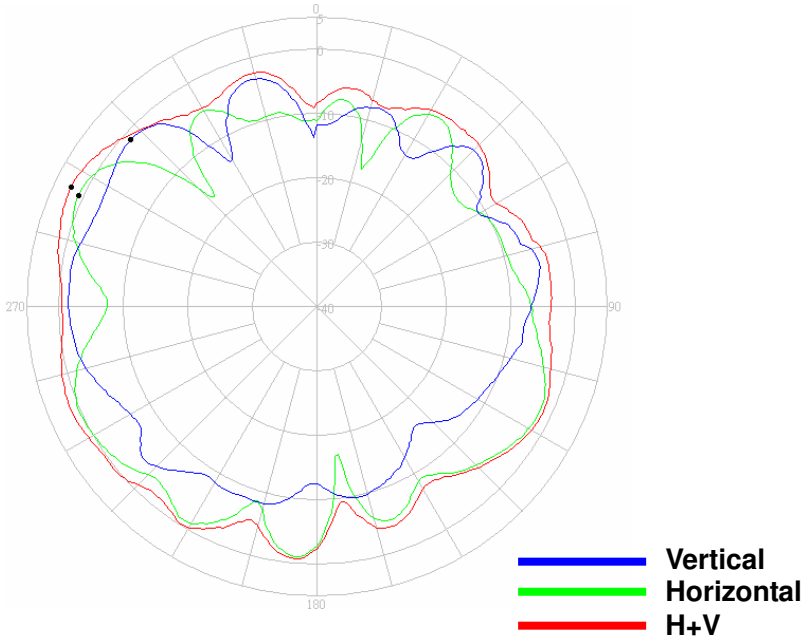

Center Frequency	<b>2450 MHz</b>
Horizontal (dBi) peak	<b>0.83</b>
Vertical (dBi) peak	<b>-1.18</b>




**Tx2 (or Rx2) antenna: 2500 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

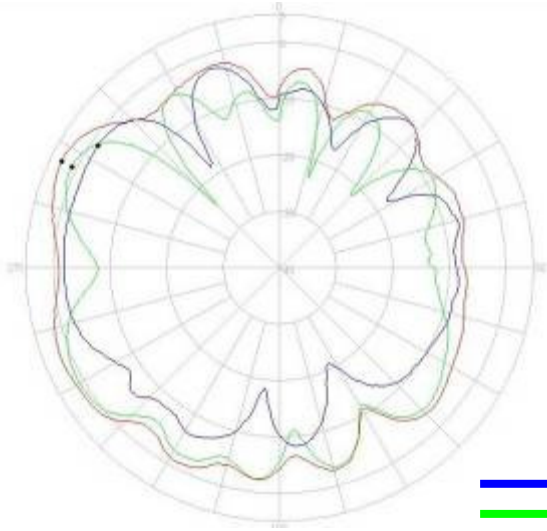

— Vertical  
— Horizontal  
— H+V

Center Frequency	<b>2500 MHz</b>
Horizontal (dBi) peak	<b>1.01</b>
Vertical (dBi) peak	<b>-1.17</b>


**Tx3 (or Rx3) antenna: 2400 MHz** (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx3 for 4965AGN)

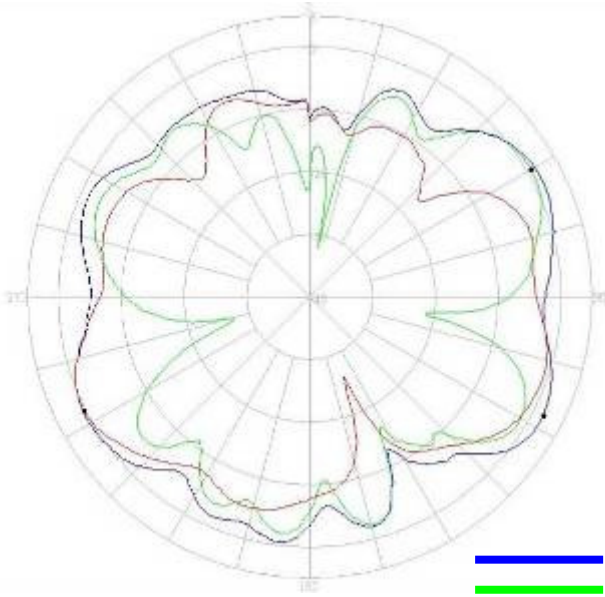

— Vertical  
— Horizontal  
— H+V


Center Frequency	<b>2400 MHz</b>
Horizontal (dBi) peak	<b>0.76</b>
Vertical (dBi) peak	<b>0.33</b>

**Tx3 (or Rx3) antenna: 2450 MHz (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx3 for 4965AGN)**

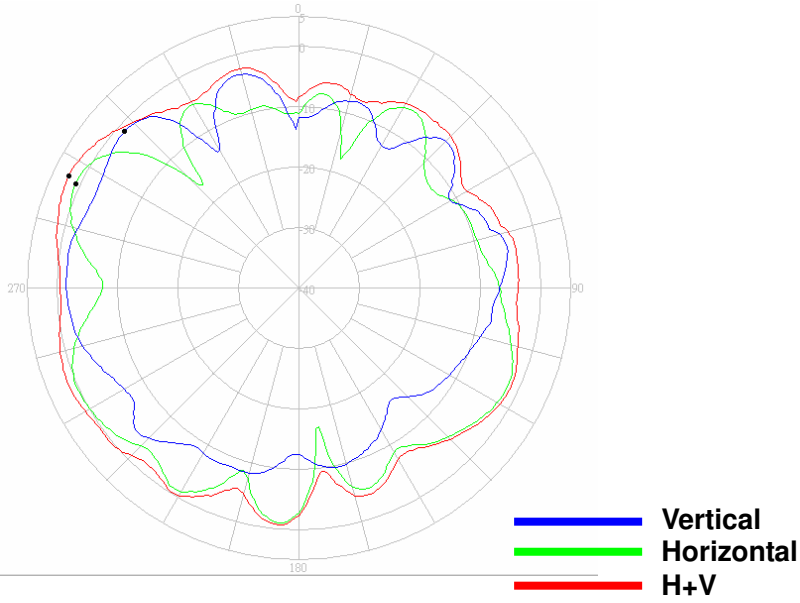

Center Frequency	<b>2450 MHz</b>
Horizontal (dBi) peak	<b>0.83</b>
Vertical (dBi) peak	<b>-1.18</b>


**Tx3 (or Rx3) antenna: 2500 MHz (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx3 for 4965AGN)**

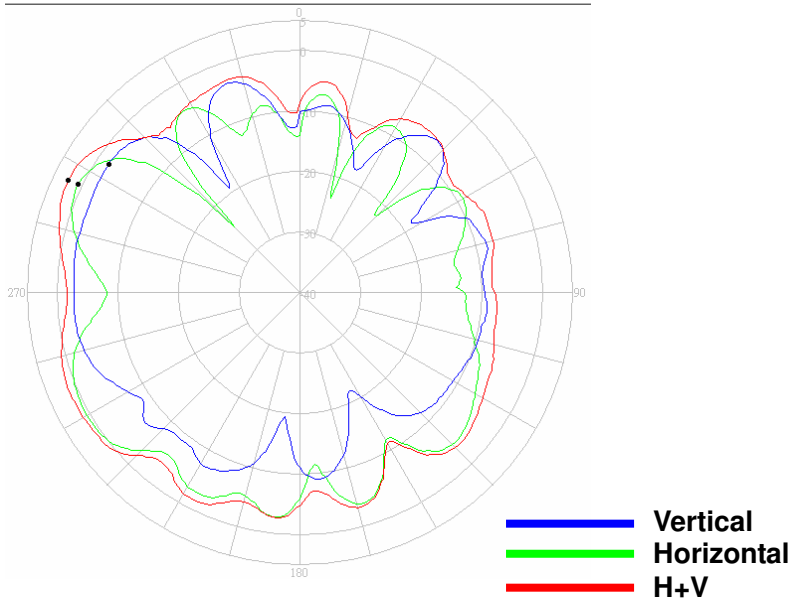

Center Frequency	<b>2500 MHz</b>
Horizontal (dBi) peak	<b>0.71</b>
Vertical (dBi) peak	<b>-1.97</b>


**5150-5350 MHz radiation characteristic**

**Tx1 antenna: 5150 MHz**

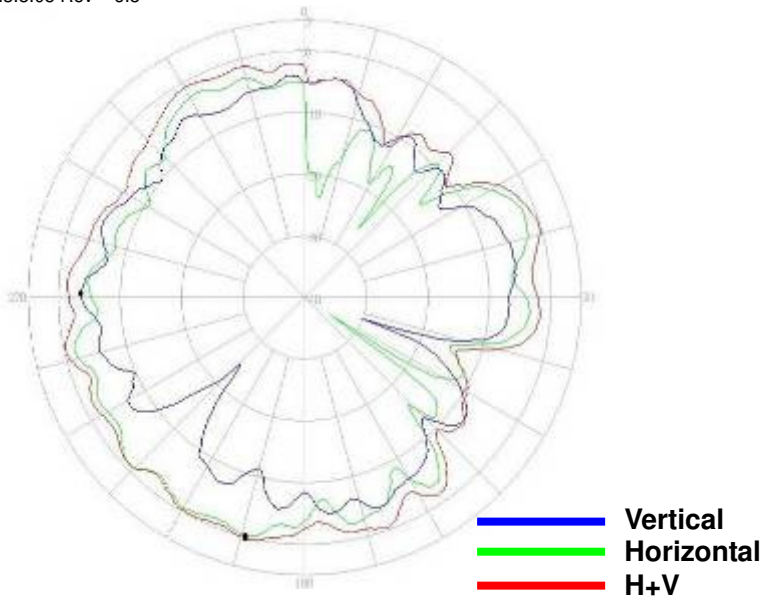


Center Frequency	<b>5150 MHz</b>
Horizontal (dBi) peak	<b>-0.19</b>
Vertical (dBi) peak	<b>-3.60</b>

**Tx1 antenna: 5250 MHz**

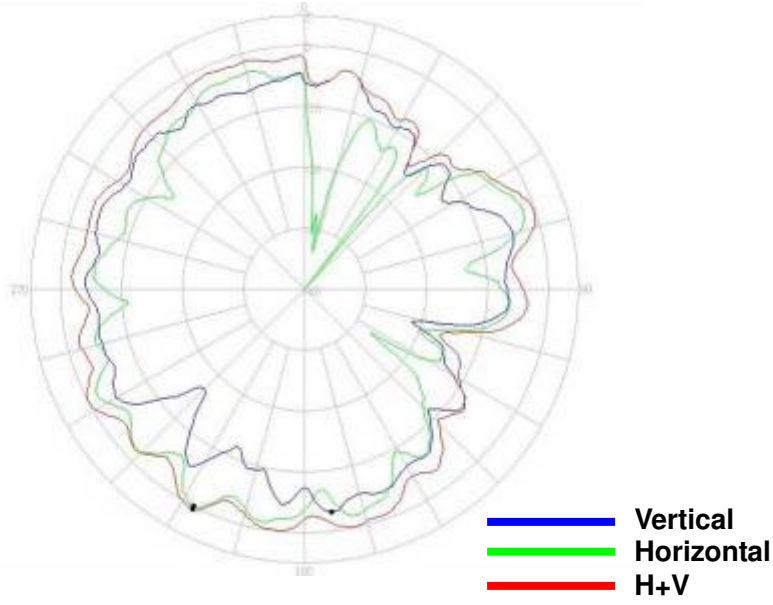


Center Frequency	<b>5250 MHz</b>
Horizontal (dBi) peak	<b>0.05</b>
Vertical (dBi) peak	<b>-3.06</b>

**Tx1 antenna: 5350 MHz**

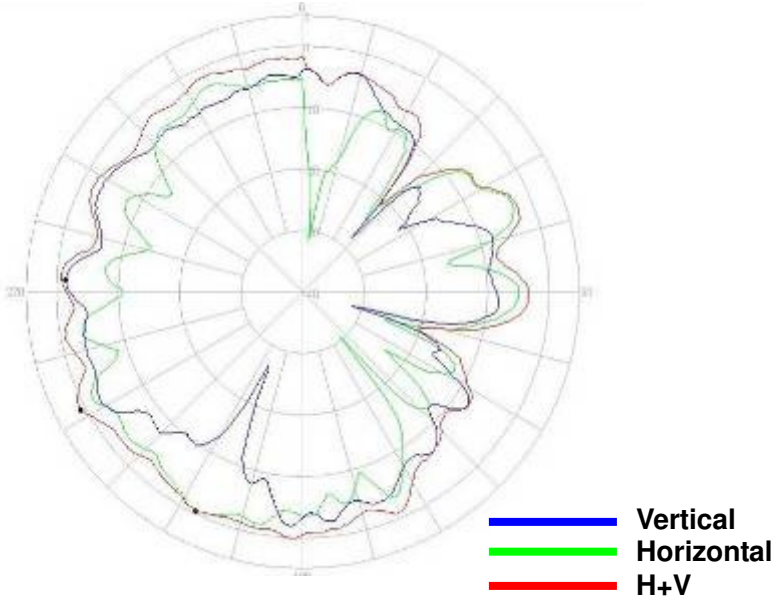

Center Frequency	<b>5350 MHz</b>
Horizontal (dBi) peak	<b>-0.41</b>
Vertical (dBi) peak	<b>-1.40</b>


**Tx2 (or Rx2) antenna: 5150 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

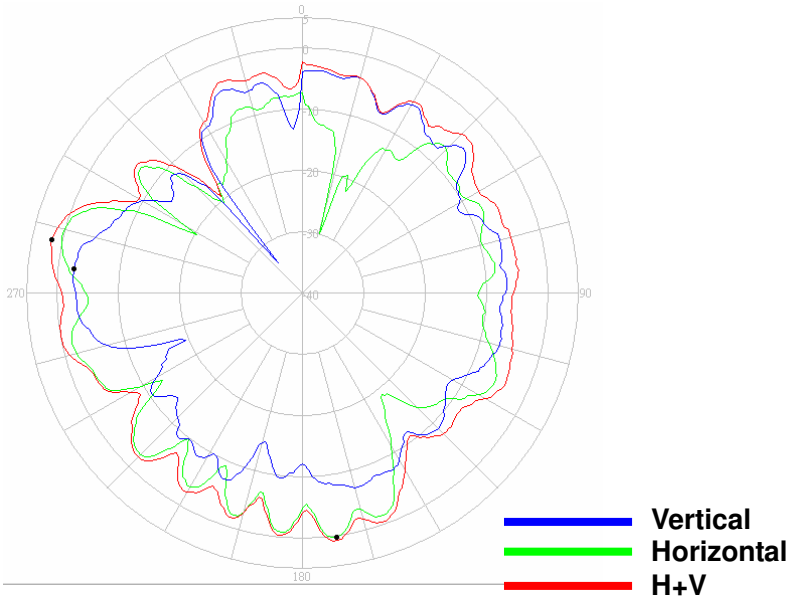

Center Frequency	<b>5150 MHz</b>
Horizontal (dBi) peak	<b>0.36</b>
Vertical (dBi) peak	<b>-2.48</b>




**Tx2 (or Rx2) antenna: 5250 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

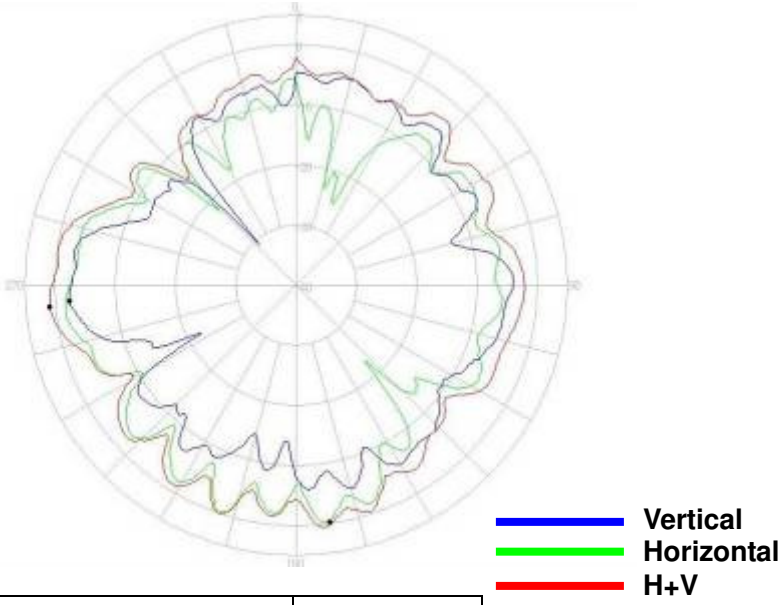


Center Frequency	<b>5250 MHz</b>
Horizontal (dBi) peak	<b>-0.23</b>
Vertical (dBi) peak	<b>-2.34</b>

**Tx2 (or Rx2) antenna: 5350 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

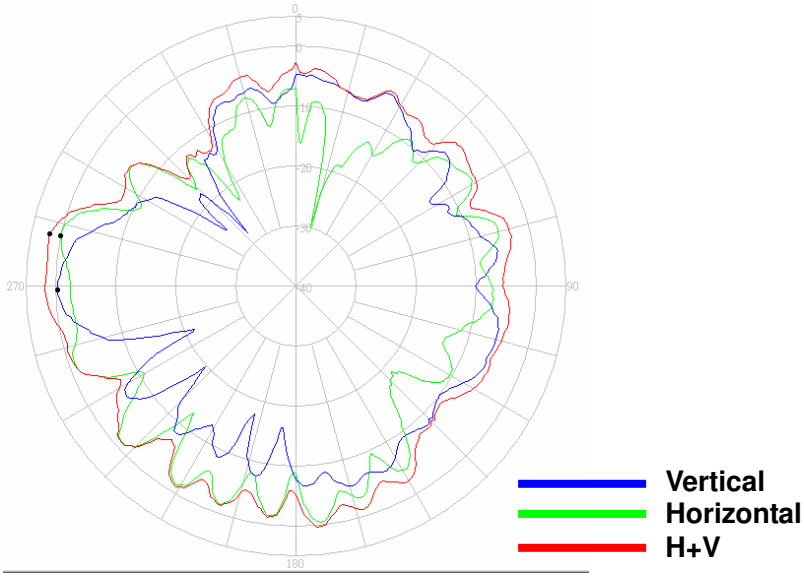


Center Frequency	<b>5350 MHz</b>
Horizontal (dBi) peak	<b>0.08</b>
Vertical (dBi) peak	<b>-0.25</b>

**Tx3 (or Rx3) antenna: 5150 MHz (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx3 for 4965AGN)**

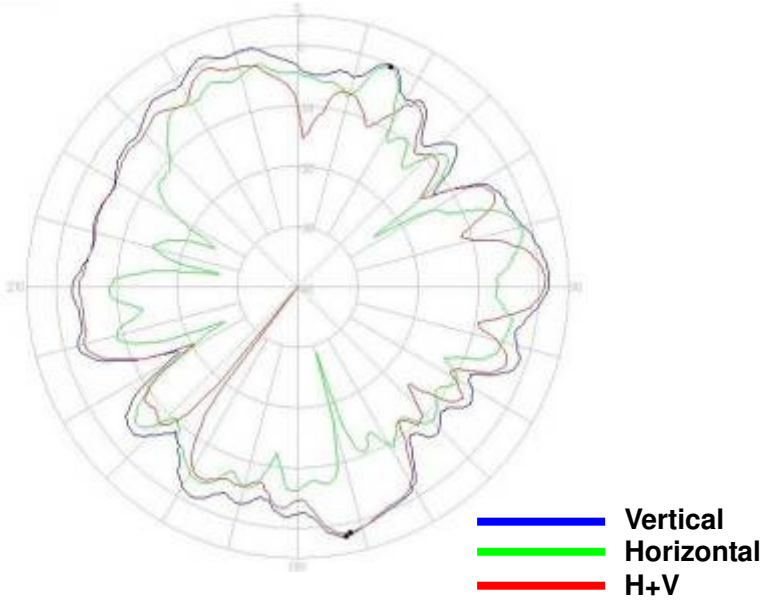


Center Frequency	<b>5150 MHz</b>
Horizontal (dBi) peak	<b>-0.41</b>
Vertical (dBi) peak	<b>1.71</b>

**Tx3 (or Rx3) antenna: 5250 MHz (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx3 for 4965AGN)**

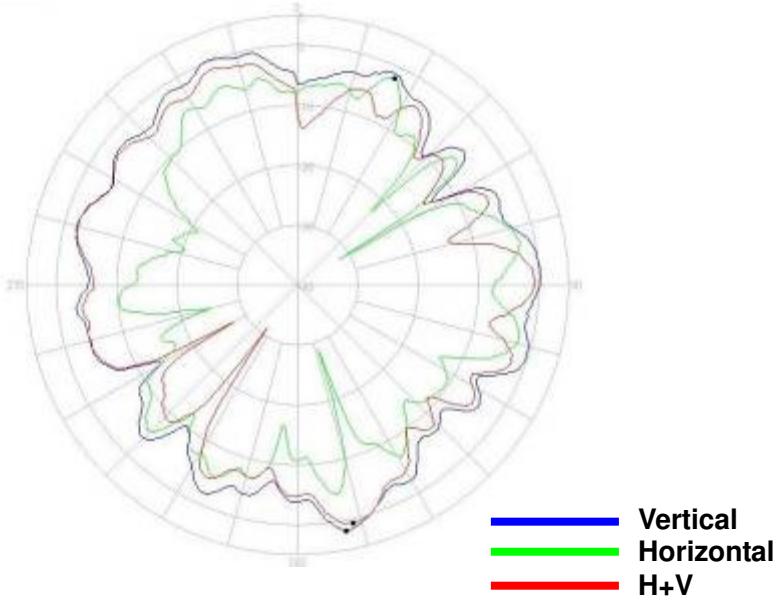

Center Frequency	<b>5250 MHz</b>
Horizontal (dBi) peak	<b>-2.03</b>
Vertical (dBi) peak	<b>0.78</b>


**Tx3 (or Rx3) antenna: 5350 MHz (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx3 for 4965AGN)**

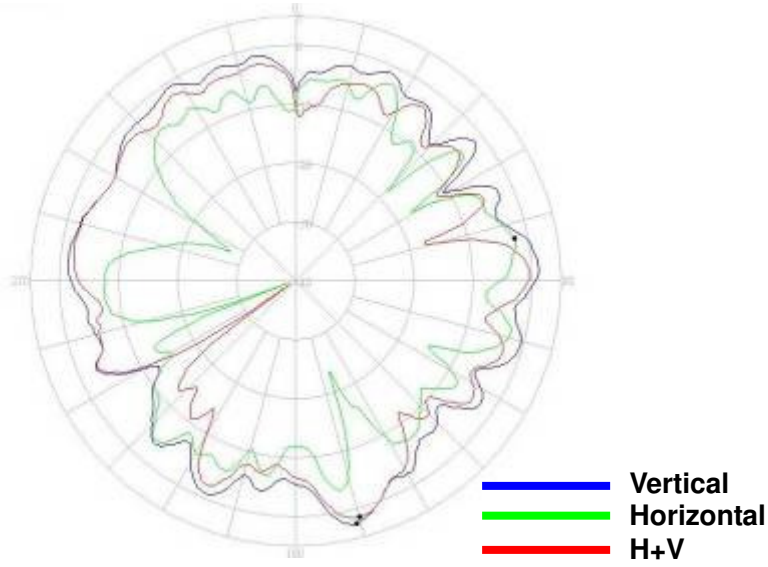

Center Frequency	<b>5350 MHz</b>
Horizontal (dBi) peak	<b>-2.11</b>
Vertical (dBi) peak	<b>1.57</b>


**5470-5725MHz radiation characteristic**

**Tx1 antenna: 5470 MHz**

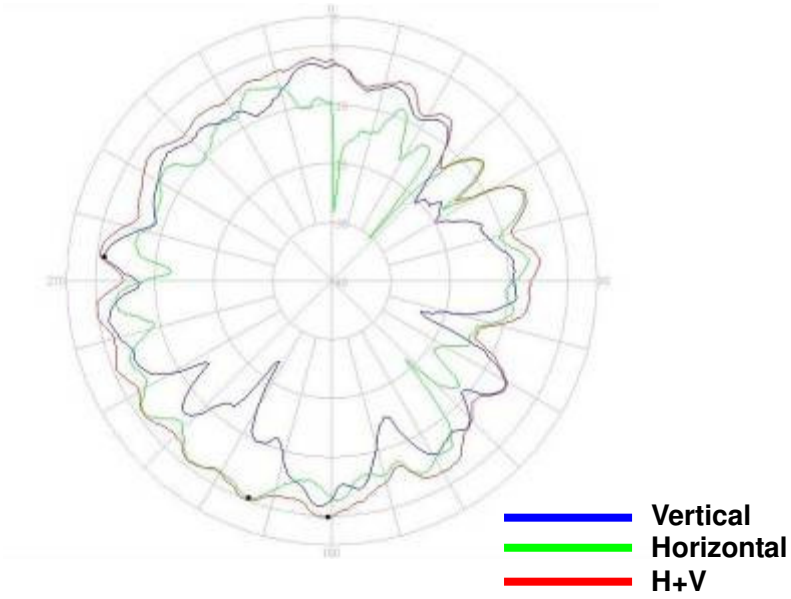


Center Frequency	<b>5470 MHz</b>
Horizontal (dBi) peak	<b>-0.38</b>
Vertical (dBi) peak	<b>-1.22</b>

**Tx1 antenna: 5597.5 MHz**

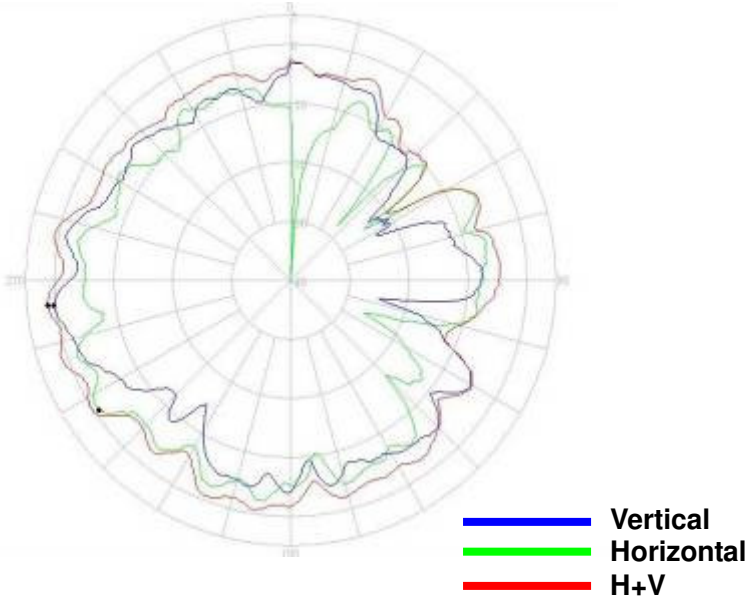

Center Frequency	<b>5597.5 MHz</b>
Horizontal (dBi) peak	<b>-0.69</b>
Vertical (dBi) peak	<b>0.38</b>


**Tx1 antenna: 5725 MHz**

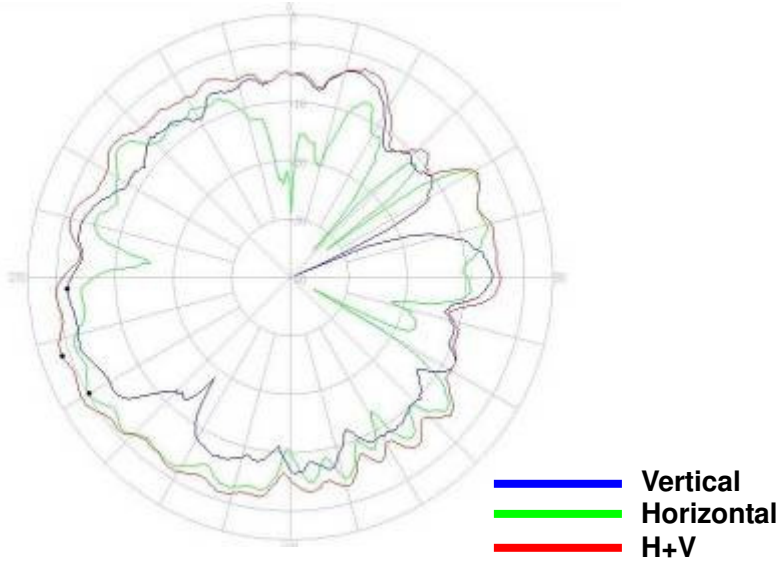

Center Frequency	<b>5725 MHz</b>
Horizontal (dBi) peak	<b>-0.16</b>
Vertical (dBi) peak	<b>-1.63</b>




**Tx2 (or Rx2) antenna: 5470 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

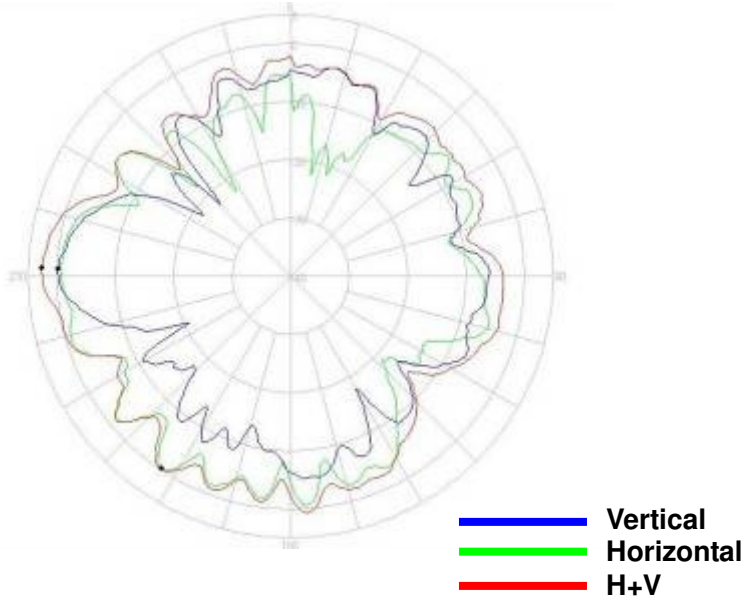


Center Frequency	<b>5470 MHz</b>
Horizontal (dBi) peak	<b>-0.25</b>
Vertical (dBi) peak	<b>-0.04</b>

**Tx2 (or Rx2) antenna: 5597.5 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

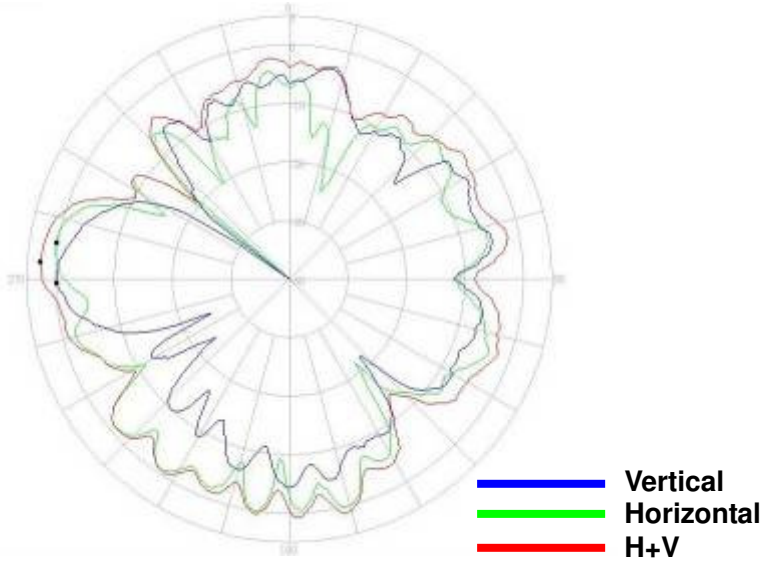


Center Frequency	<b>5597.5 MHz</b>
Horizontal (dBi) peak	<b>0.37</b>
Vertical (dBi) peak	<b>-0.06</b>

**Tx2 (or Rx2) antenna: 5725 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

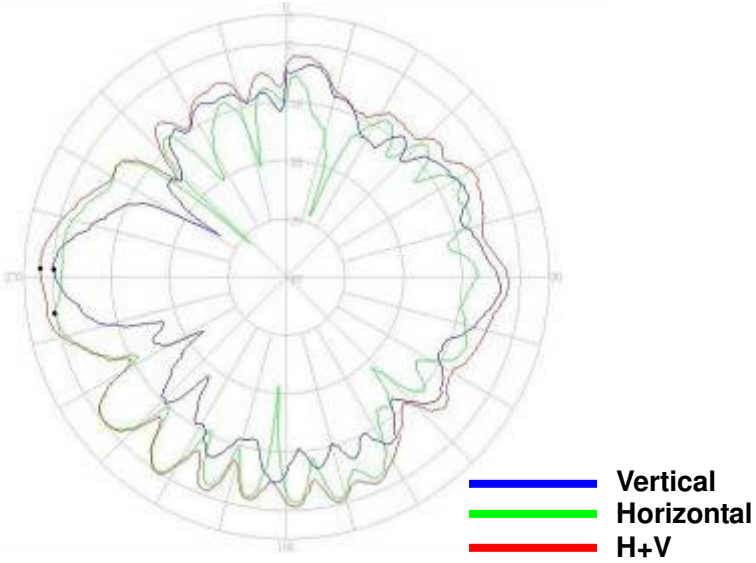

Center Frequency	<b>5725 MHz</b>
Horizontal (dBi) peak	<b>0.18</b>
Vertical (dBi) peak	<b>-0.04</b>


**Tx3 (or Rx3): 5470 MHz (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx3 for 4965AGN)**

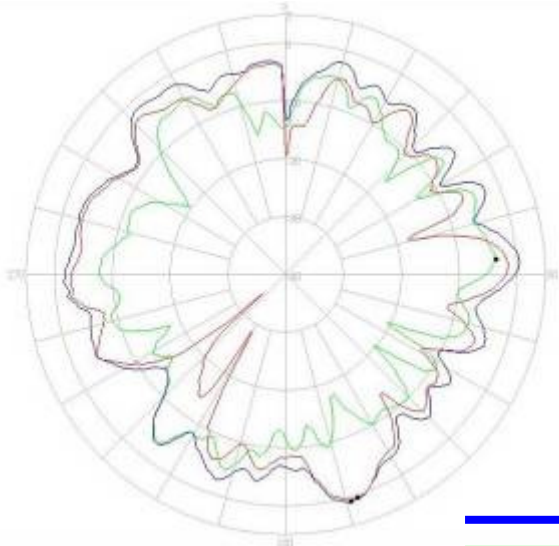

— Vertical  
— Horizontal  
— H+V


Center Frequency	<b>5470 MHz</b>
Horizontal (dBi) peak	<b>-3.45</b>
Vertical (dBi) peak	<b>0.65</b>

**Tx3 (or Rx3) antenna: 5597.5 MHz (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx3 for 4965AGN)**

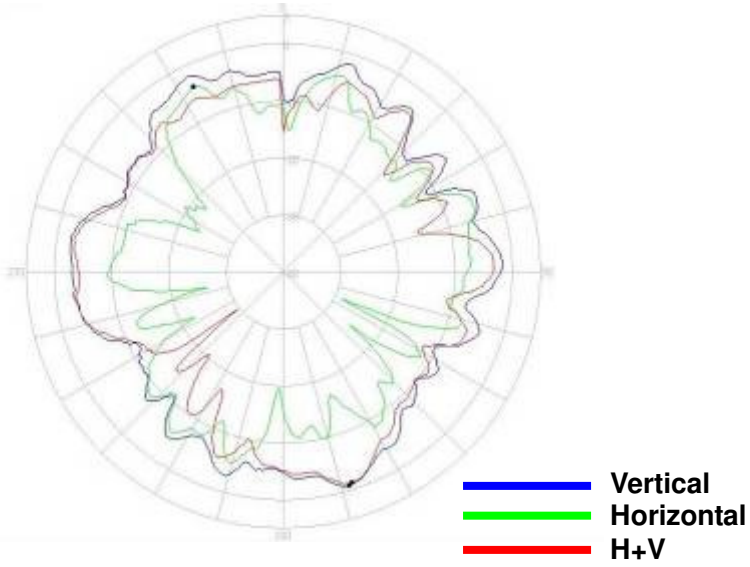

Center Frequency	<b>5597.5 MHz</b>
Horizontal (dBi) peak	<b>-3.89</b>
Vertical (dBi) peak	<b>-1.06</b>


**Tx3 (or Rx3) antenna: 5725 MHz (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx3 for 4965AGN)**

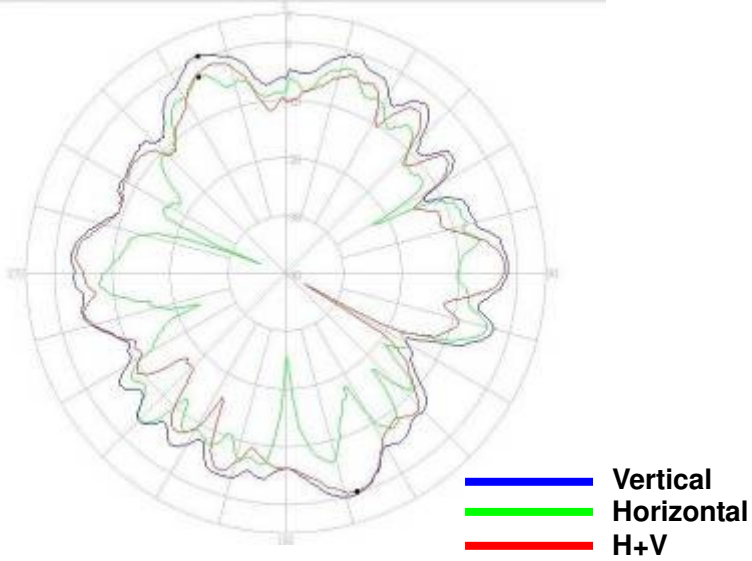

Center Frequency	<b>5725 MHz</b>
Horizontal (dBi) peak	<b>-2.74</b>
Vertical (dBi) peak	<b>-0.24</b>


**5725-5850 MHz radiation characteristic**

**Tx1 antenna: 5725 MHz**

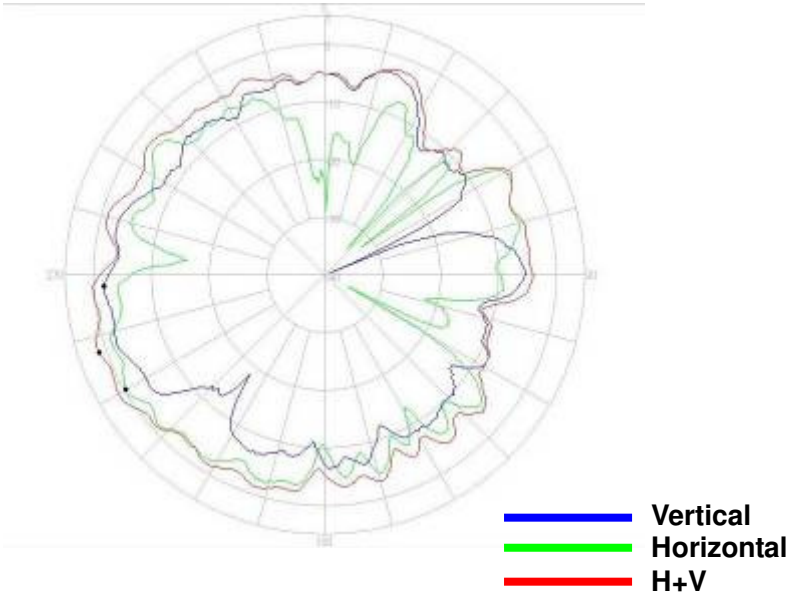

Center Frequency	<b>5725 MHz</b>
Horizontal (dBi) peak	<b>-0.16</b>
Vertical (dBi) peak	<b>-1.63</b>

### Tx1 antenna: 5785 MHz

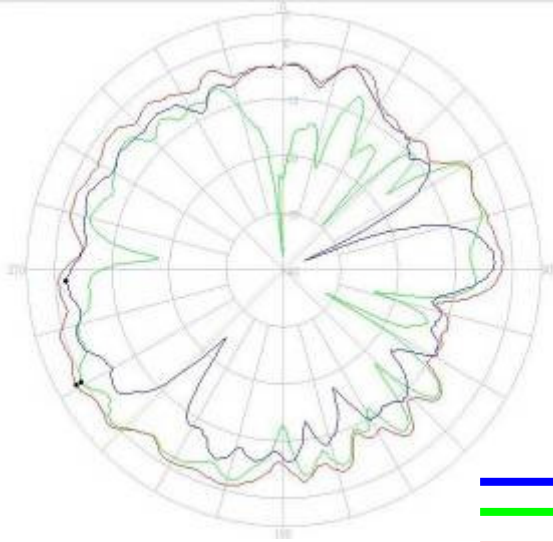


— Vertical  
— Horizontal  
— H+V

Center Frequency	<b>5785 MHz</b>
Horizontal (dBi) peak	<b>0.51</b>
Vertical (dBi) peak	<b>-1.88</b>




**Tx1 antenna: 5850 MHz**

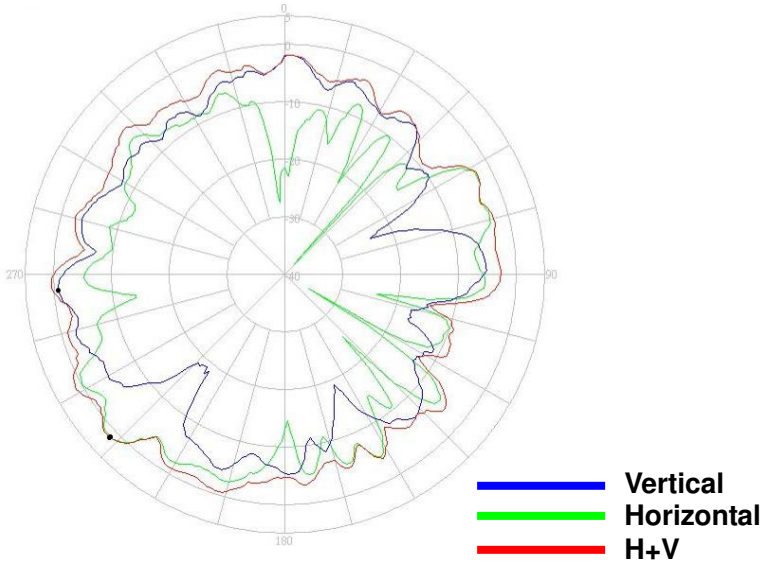


Center Frequency	<b>5850 MHz</b>
Horizontal (dBi) peak	<b>1.43</b>
Vertical (dBi) peak	<b>-0.68</b>

**Tx2 (or Rx2) antenna: 5725 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

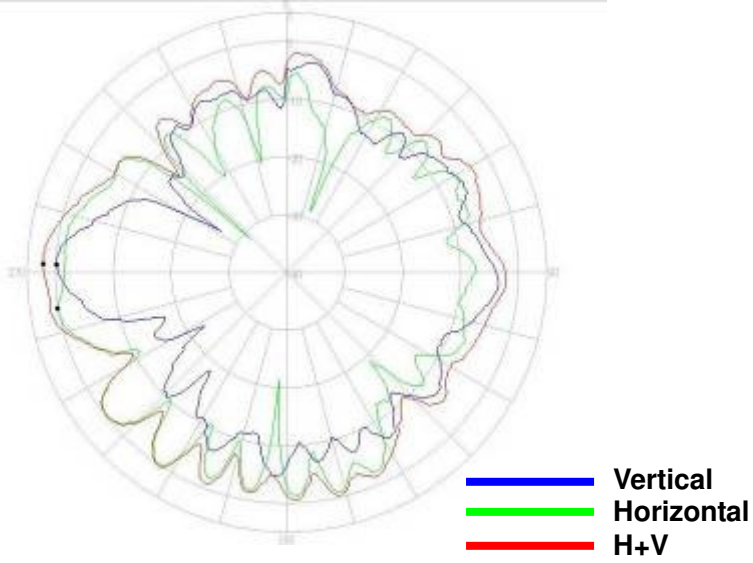


Center Frequency	<b>5725 MHz</b>
Horizontal (dBi) peak	<b>0.18</b>
Vertical (dBi) peak	<b>-0.04</b>

**Tx2 (or Rx2) antenna: 5785 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

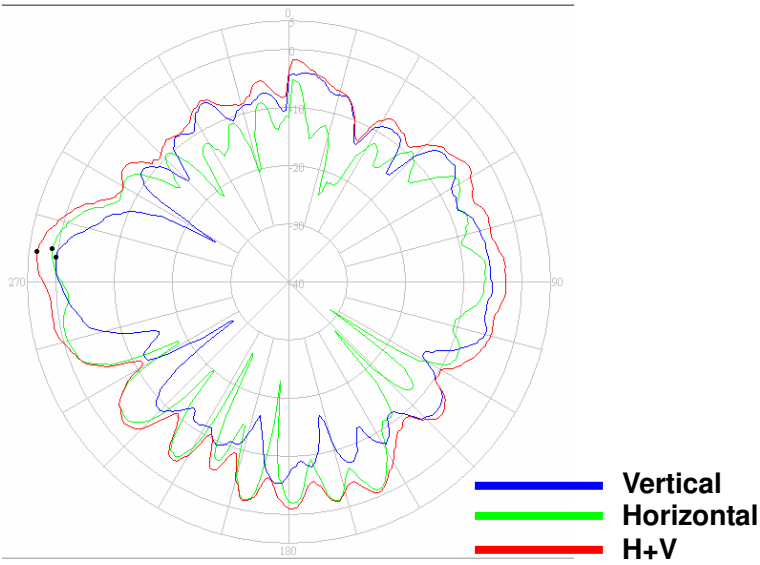


Center Frequency	<b>5785 MHz</b>
Horizontal (dBi) peak	<b>1.07</b>
Vertical (dBi) peak	<b>0.26</b>

**Tx2 (or Rx2) antenna: 5850 MHz (Plot is not required if 2<sup>nd</sup> Antenna is receive only e.g. Rx2 for 512 family)**

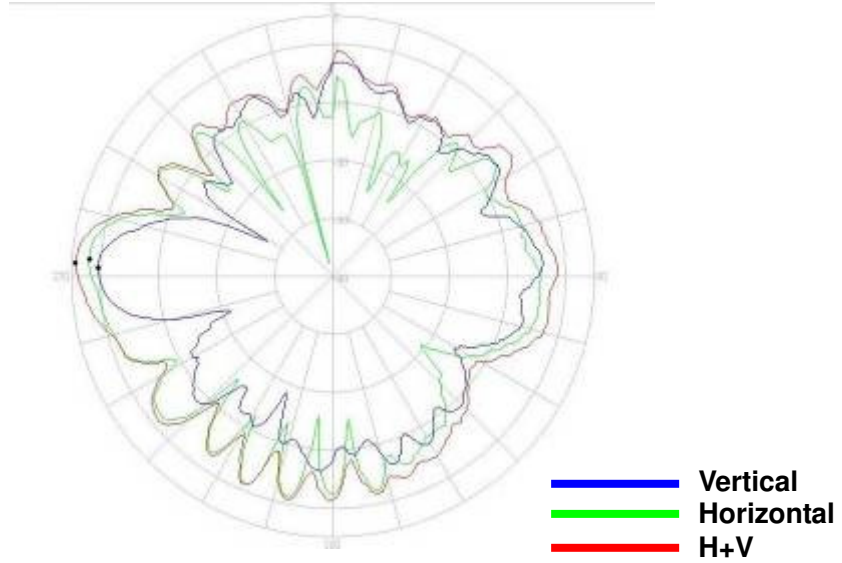

Center Frequency	<b>5850 MHz</b>
Horizontal (dBi) peak	<b>2.06</b>
Vertical (dBi) peak	<b>0.49</b>

**Tx3 (or Rx3) antenna: 5725 MHz (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx3 for 4965AGN)**

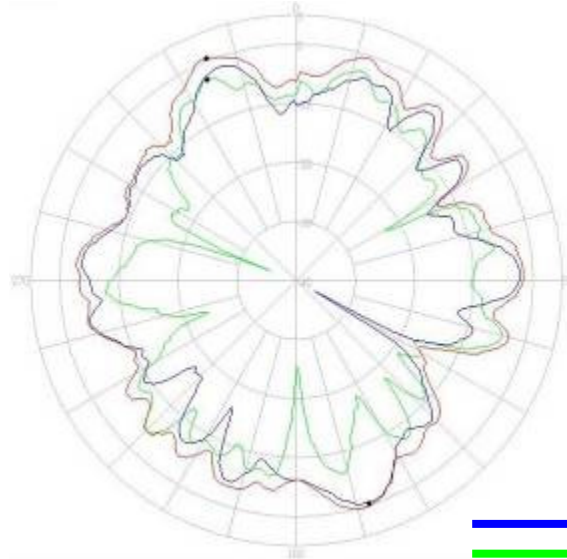


— Vertical  
— Horizontal  
— H+V

Center Frequency	<b>5725 MHz</b>
Horizontal (dBi) peak	<b>-2.74</b>
Vertical (dBi) peak	<b>-0.24</b>

— Vertical  
— Horizontal  
— H+V


**Tx3 (or Rx3) antenna: 5785 MHz (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx3 for 4965AGN)**

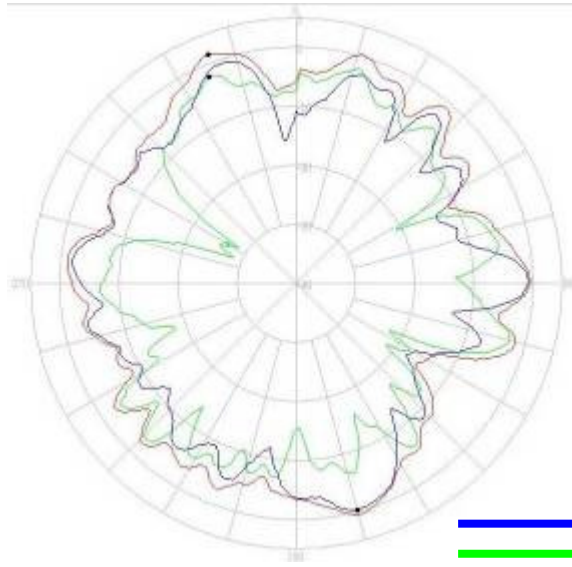

**Vertical**  
**Horizontal**  
**H+V**

Center Frequency	<b>5785 MHz</b>
Horizontal (dBi) peak	<b>-2.04</b>
Vertical (dBi) peak	<b>-0.26</b>

**Tx3 (or Rx3) antenna: 5850 MHz (Plot is not required if 3<sup>rd</sup> Antenna is receive only e.g. Rx 3 for 4965AGN)**

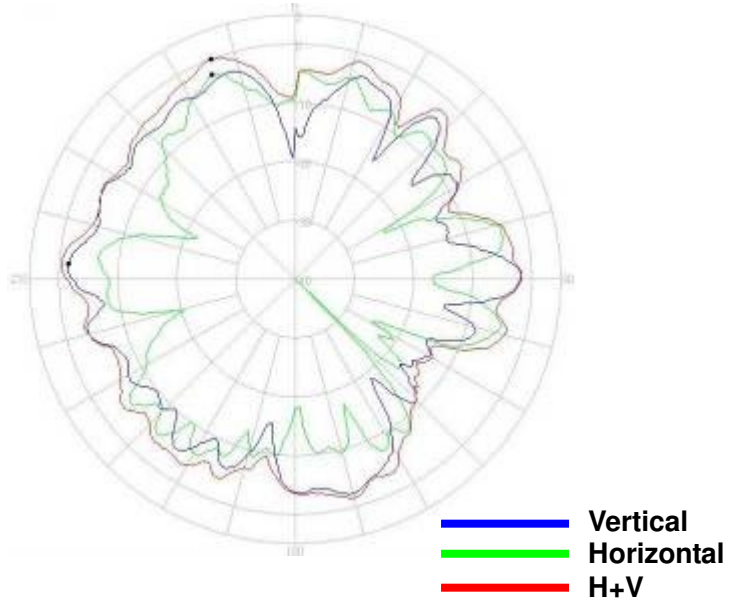

Center Frequency	<b>5850 MHz</b>
Horizontal (dBi) peak	<b>-2.51</b>
Vertical (dBi) peak	<b>-1.41</b>

## Section 4. Host Platform Information


OEM / ODM Host platform: (XXXXXXX) platform correlated to antenna data

Rating Label Photo:



## Section 5. Antenna Host Platform Location Information

Include a **dimensioned photo or dimensioned drawing** of Tx1, Tx2 and Tx3 antenna placements (measurements are not required for receive-only antenna). Any antenna that transmits must show dimensions to bottom of laptop.

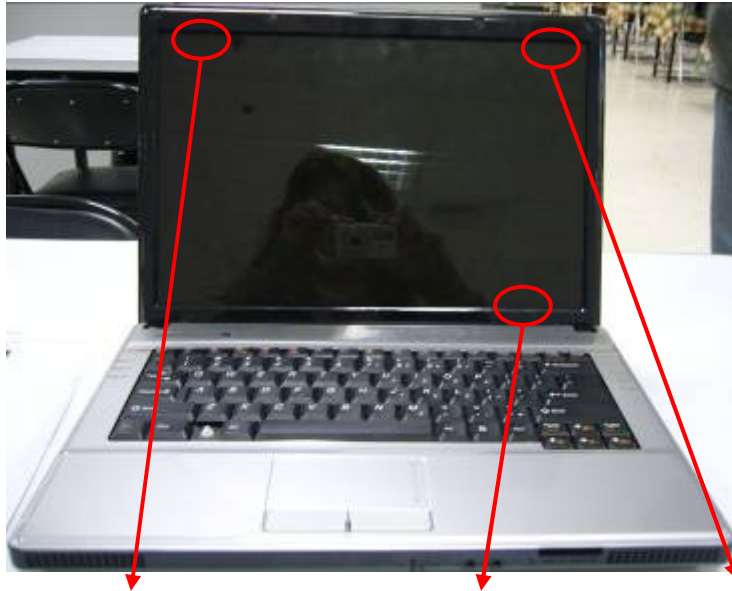


**Tx2**



**Tx3**




**Tx1**

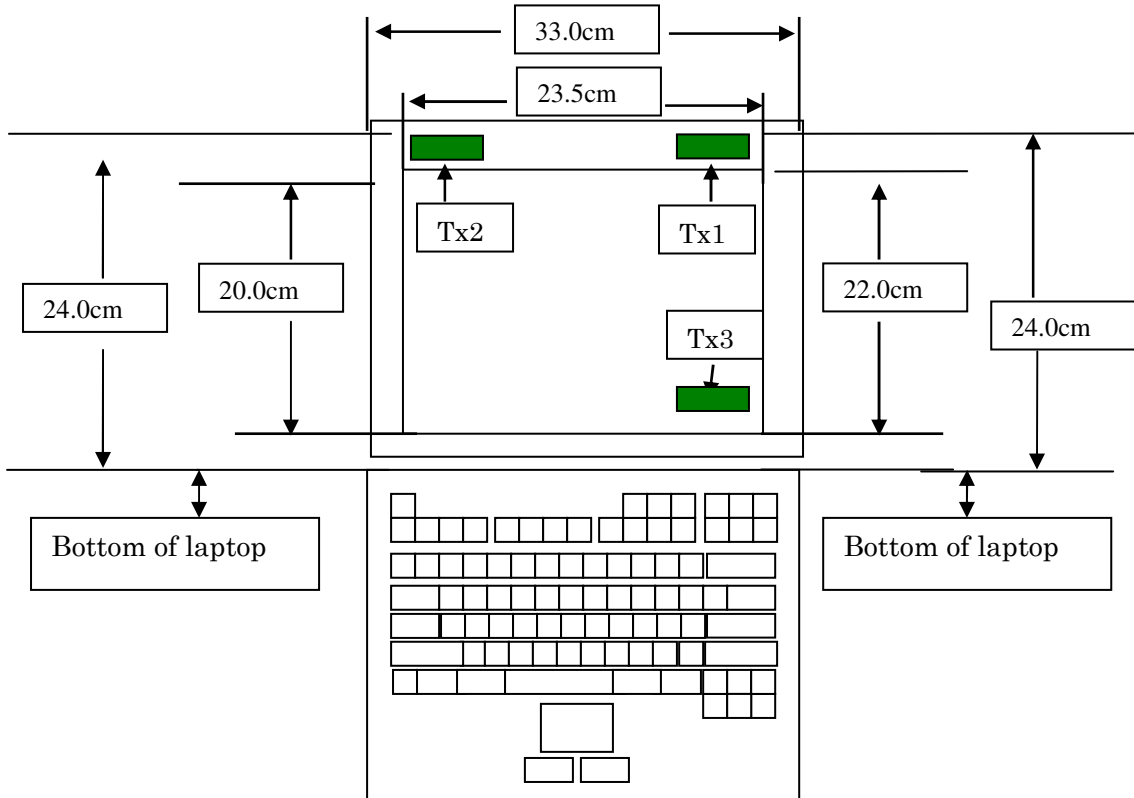

## Section 6. Antenna dimensional information for SAR evaluation


Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between the transmit antennas and the user (excluding hands, wrist, feet, lap/ thigh, and ankle)

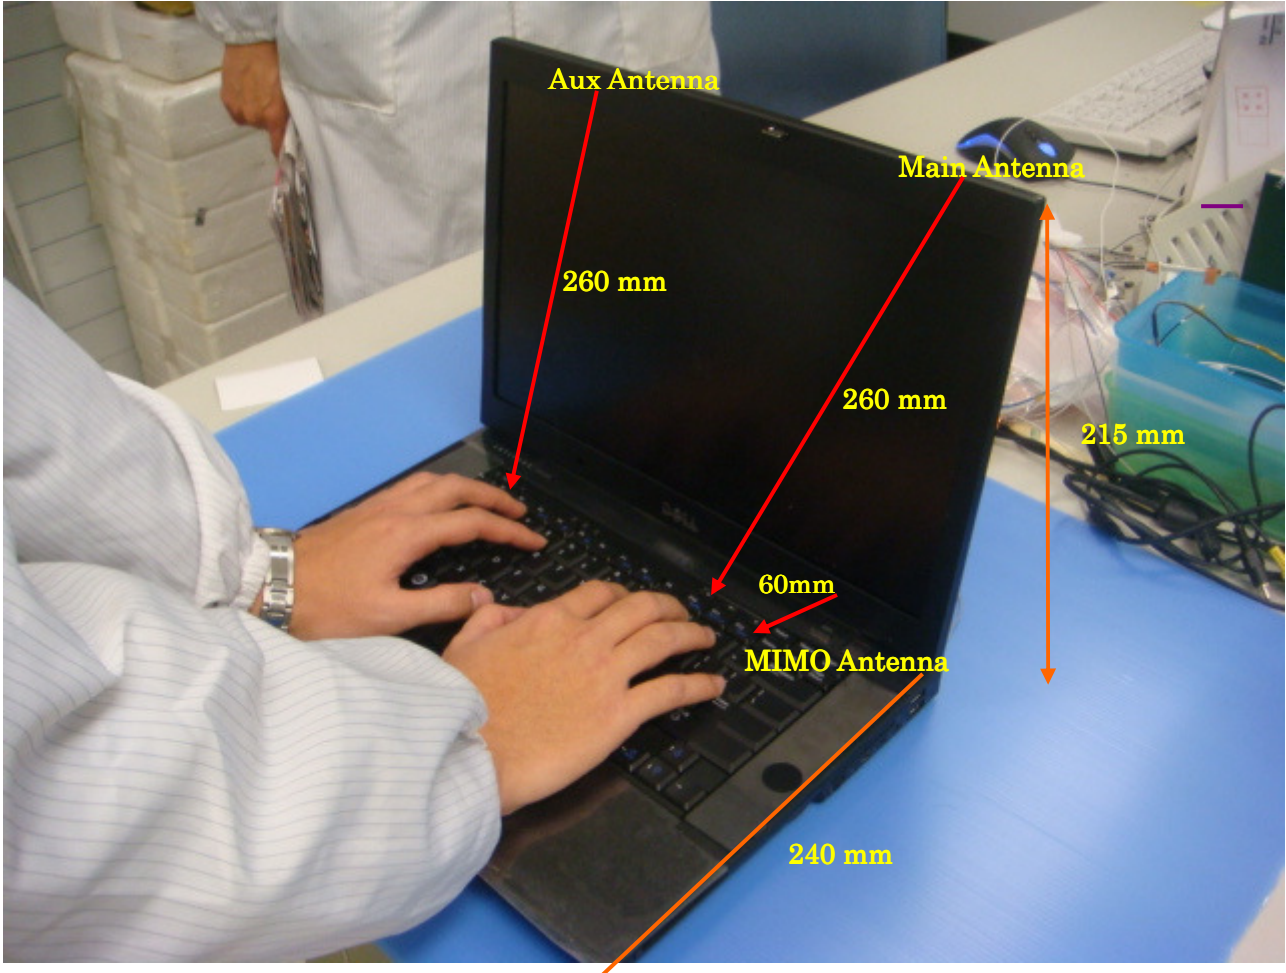

## Section 7. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,...

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

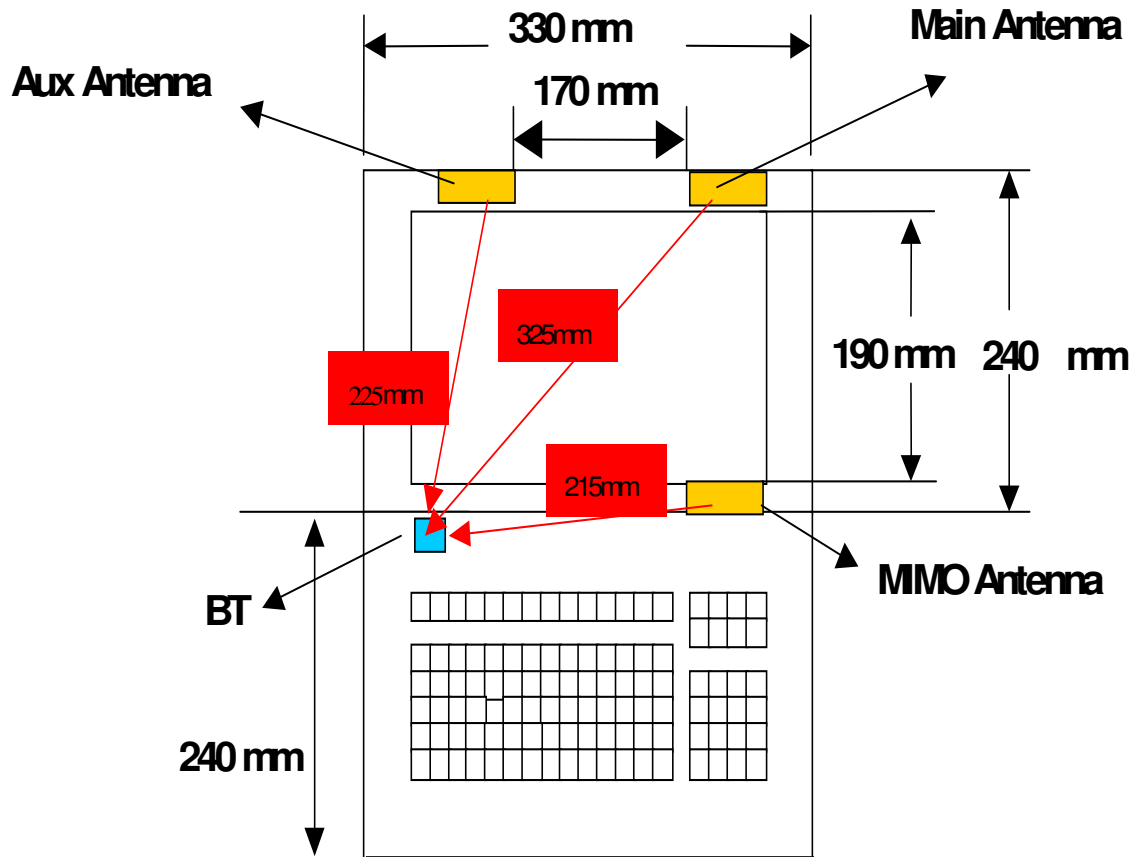

## Section 8. Local representative contact information

Local representative contact information is required for regulatory support for target countries below.

	Local company name	Contact name	Phone number	FAX Number	e-Mail Address	Notes
Argentina						
Brazil						
Indonesia						
Israel						
Malaysia						
Mexico						
Singapore						
South Africa						
USA, Canada						