



**AT4 wireless, S.A.**  
 Parque Tecnológico de Andalucía,  
 c/ Severo Ochoa nº 2  
 29590 Campanillas/ Málaga/ España  
 Tel. 952 61 91 00 - Fax 952 61 91 13  
 MÁLAGA, C.I.F. A29 507 456  
 Registro Mercantil de Málaga, Tomo 1169,  
 Libro 82, Folio 133, Hoja MA3729

**TEST REPORT**

**REFERENCE STANDARDS:**

**FCC 47CFR Part 2.1093 (10-1-09 Edition)**

**FCC OET Bulletin 65, Supplement C (Edition 01-01)**

**IC RSS-102 Issue 4 (2010-03)**

<b>NIE</b> ..... :	32605RET.003
Approved by (name / position & signature) .....	A. Llamas / RF Lab Manager .....
Elaboration date .....	2011-03-01
<b>Identification of item tested</b> .....	Intel® Centrino® Ultimate-N 6300 inside a host device
Trademark .....	Intel
Model and/or type reference .....	USA: 633ANHMW / Canada: 633ANHU
Serial number .....	MAC: 0024D7639300
Other identification of the product .....	FCC ID: PD9633ANHU / IC: 1000M-633ANHU
Features .....	802.11 a/b/g/n
Description .....	Wireless Module: Intel® Centrino® Ultimate-N 6300 Antenna Type: Yageo 25.90A1E.011 and 25.90A1F.011 Host platform: Lenovo TP00019A PC
<b>Applicant</b> .....	Intel Corporation
Address..... :	100 Center Point Circle, Suite 200, Columbia, SC 29210, USA
CIF/NIF/Passport..... :	---
Contact person:	Steven C. Hackett (Wireless Regulatory Engineer)
Telephone / Fax .....	803-216-2344
e-mail: .....	steven.c.hackett@intel.com
<b>Test samples supplier</b> .....	Same as applicant
<b>Manufacturer</b> .....	Same as applicant

<b>Test method requested</b> .....	See Standard
<b>Standard</b> .....	<ol style="list-style-type: none"> <li>1. FCC 47 CFR Part 2.1093 (10-1-09 Edition). Radiofrequency radiation exposure evaluation: portable devices.</li> <li>2. FCC OET Bulletin 65, Supplement C (Edition 01-01), “Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields”.</li> <li>3. IC RSS-102 Issue 4 (2010-03). Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)</li> </ol>
<b>Application Notes</b> .....	<ol style="list-style-type: none"> <li>1. FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised).</li> <li>2. FCC OET KDB 447498 – Mobile and Portable Device, RF Exposure Procedures and Equipment Authorization Policies (November 2009).</li> <li>3. FCC OET KDB 450824 – SAR Probe Calibration and System Verification Considerations for measurements at 150 MHz – 3 GHz (January 2007).</li> <li>4. FCC OET KDB 616217 D03 – SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers – Supplement to KDB 616217 (November 2009)</li> <li>5. FCC OET KDB 865664 – SAR Measurements Requirements for 3-6 GHz (October 2006).</li> <li>6. IC RSS-102 Supplementary Procedures (SPR)-001 (2011-01). SAR testing requirements with regard to bystanders for laptop type computers with antennas built-in on display screen (laptop mode/tablet mode).</li> </ol>
<b>Test procedure</b> .....	PERF062
<b>Non-standardized test method</b> .....	N/A
<b>Used instrumentation</b> .....	<ol style="list-style-type: none"> <li>1. Dosimetric E-field probe SPEAG ES3DV3</li> <li>2. Dosimetric E-field probe SPEAG EX3DV4</li> <li>3. Data acquisition device SPEAG DAE4</li> <li>4. Electro-optical converter SPEAG EOC3</li> <li>5. 2450 MHz dipole validation kit SPEAG D2450V2</li> <li>6. 5GHz dipole validation kit SPEAG D5GHzV2</li> <li>7. Robot STÄUBLI RX60BL</li> <li>8. Robot controller STÄUBLI CM7MB</li> <li>9. Oval flat phantom SPEAG ELI 4</li> <li>10. SAR measurement software SPEAG DASY4 V4.7 Build 80</li> <li>11. Measurement server SPEAG DASY4 SE UMS 001 DC</li> <li>12. Body Tissue Equivalent Liquids for 2450MHz and 5GHz bands</li> <li>13. Vector network analyzer Agilent E5071C</li> <li>14. Dielectric probe kit Agilent 85070C</li> <li>15. Power meter R&amp;S NRVD</li> <li>16. Power Sensor R&amp;S NRV-Z51</li> <li>17. Power Sensor R&amp;S NRV-Z1</li> <li>18. RF Generator Agilent ESG E4438C</li> <li>19. Dual directional coupler NARDA FSCM 99899</li> <li>20. Power amplifier MITEQ AMF-4D-00400600-50-30P</li> <li>21. Laptop positioning extension SPEAG Laptop Holder</li> </ol>
<b>Report template No.</b> .....	FDT08_12
<p>IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless.</p>	

## INDEX

Competences and guarantees .....	4
General conditions .....	4
Uncertainty .....	4
Usage of samples.....	5
Testing period .....	5
Environmental conditions .....	5
Summary .....	6
Remarks and comments .....	6
Testing verdicts.....	6
APPENDIX A: Test Configuration.....	7
APPENDIX B: Test results.....	15
APPENDIX C: Measurements Reports .....	30
APPENDIX D: Calibration Data .....	98
APPENDIX E: Photographs .....	117

### **Competences and guarantees**

AT4 wireless is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 342.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance programme for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

### **General conditions**

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

### **Uncertainty**

Uncertainty (factor  $k=2$ ) was calculated according to the following documents:

1. FCC OET Bulletin 65, Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields".
2. FCC OET KDB 865664 – SAR Measurements Requirements for 3-6 GHz (October 2006).

### Usage of samples

Samples undergoing test have been selected by: **the client**.

Sample M/01 is composed of the following elements:

<u>Control N°</u>	<u>Description</u>	<u>Model</u>	<u>Serial N°</u>	<u>Date of reception</u>
32605/07	WiFi module inside a host device	Intel® Centrino® Ultimate- N 6300 / Lenovo TP00019A PC / Yageo Antennas	MAC: 0024D7639300	2010-12-27

1. Sample M/01 has undergone the test(s) specified in subclause “Test method requested” over the 5GHz band.

### Testing period

The performed test started on 2010-01-10 and finished on 2010-02-10.

The tests have been performed at AT4 wireless.

### Environmental conditions

In the laboratory for measurements, the following limits were not exceeded during the test:

Temperature	Min. = 20.05 °C Max. = 23.91 °C
Relative humidity	Min. = 21.96 % Max. = 63.98 %

**Summary**

Considering the results of the performed test according to FCC 47CFR Part 2.1093, the item under test is **IN COMPLIANCE** with the requested specifications specified in the standard.

The maximum 1g volume averaged SAR found during this test has been 1.530 W/kg, for the Chain C at the 5800 MHz band and 802.11n with 40 MHz bandwidth mode.

NOTE: The results presented in this Test Report apply only to the particular item under test established in page 1 of this document, as presented for test on the date(s) shown in section, "USAGE OF SAMPLES, TESTING PERIOD AND ENVIRONMENTAL CONDITIONS".

**Remarks and comments**

- 1: 802.11n = 20MHz BW / 802.11n\* = 40MHz BW.
- 2: Testing of 802.11g and 802.11n with 20MHz BW is not required due to the testing reductions mentioned in FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), paragraph "Frequency Channel Configurations".
- 3: Testing of other channels in each band is optional when the maximum output channel SAR fulfills the testing reductions mentioned in FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), paragraph "Frequency Channel Configurations".
- 4: All the test positions of device relative to body were measured placing the device in direct contact with the phantom surface, so the requirements mentioned at RSS-102 Supplementary Procedures (SPR)-001 - SAR TESTING REQUIREMENTS WITH REGARD TO BYSTANDERS FOR LAPTOP TYPE COMPUTERS WITH ANTENNAS BUILT-IN ON DISPLAY SCREEN (LAPTOP MODE/TABLET MODE) are covered.

**Testing verdicts**

Not applicable .....: NA  
 Pass.....: P  
 Fail .....: F  
 Not measured.....: NM

**2450 MHz band**

FCC 47CFR Part 2.1093 Paragraph	VERDICT			
	NA	P	F	NM
(d)(2) 802.11b	P			
(d)(2) 802.11g	NM <sup>2</sup>			
(d)(2) 802.11n <sup>1</sup>	NM <sup>2</sup>			
(d)(2) 802.11n* <sup>1</sup>	P			

1 and 2: See Remarks and Comments.

## **APPENDIX A: Test Configuration**

## INDEX

1. GENERAL INTRODUCTION .....	9
1.1. Application Standard.....	9
1.2. General requirements .....	9
1.3. Measurement system and phantom requirements .....	9
1.4. Measurement Liquids requirements. ....	9
2. MEASUREMENT SYSTEM.....	10
2.1. Measurement System.....	10
2.2. Test Positions of device relative to body <sup>4</sup> .....	11
2.3. Test to be performed .....	11
2.4. Description of interpolation/extrapolation scheme.....	11
2.5. Determination of the largest peak spatial-average SAR .....	12
2.6. System Validation .....	12
3. UNCERTAINTY .....	13
4. SAR LIMIT .....	14



## **1. GENERAL INTRODUCTION**

### **1.1. Application Standard**

The Federal Communications Commission (FCC) sets the limits for General Population / Uncontrolled exposure to radio frequency electromagnetic fields for transmitting devices designed to be used within 20 centimetres of the user body under FCC 47 CFR Part 2.1093 - "Radiofrequency radiation exposure evaluation: portable devices", paragraph (d)(2).

Specific requirements and procedure for SAR assessment are describe under FCC OET Bulletin 65, Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields", and all the FCC OET Knowledge Database documents referred at the beginning of this document.

### **1.2. General requirements**

The SAR measurement has been performed continuing the following considerations and environment conditions:

- The ambient temperature shall be in the range of 18°C to 25°C and the variation shall not exceed +/-2°C during the test.
- The ambient humidity shall be in the range of and 30% - 70%.
- The device battery shall be fully charged before each measurement.

### **1.3. Measurement system and phantom requirements**

The measurement system used for SAR tests fulfils the procedural and technical requirements described at the reference standards used.

The phantom is a simplified representation of the human anatomy and comprised of material with electrical properties similar to the corresponding tissues in human body.

### **1.4. Measurement Liquids requirements.**

The liquids used to simulate the human tissues, must fulfils the requirements of the dielectric properties required. These target dielectric properties per FCC OET KDB 450824 instructions come from the dipole and probe calibration data which are included in Appendix B, Section 2, of this document (the values for 5200 and 5600 MHz are linearly interpolated between the specified values for 3000 and 5800 MHz indicated in FCC OET Bulletin 65 – Supplement C, Appendix C, 'Tissue Dielectric Parameters').

As indicated in FCC OET KDB 450824, it is allowed a 5% variation of the above mentioned level at the 2450 MHz band. As indicated in FCC OET KDB 865664 – 'Measurements Requirements for 3-6 GHz', it is allowed a 10% and a 5% variation of permittivity and conductivity respectively at the 5200-5800 GHz band.

## 2. MEASUREMENT SYSTEM

### 2.1. Measurement System

Manufacturer	Device	Type
Schmid & Partner Engineering AG	Dosimetric E-Fiel Probe	ES3DV3
Schmid & Partner Engineering AG	Dosimetric E-Fiel Probe	EX3DV4
Schmid & Partner Engineering AG	Data Acquisition Electronics	DAE4
Schmid & Partner Engineering AG	Electro-Optical Converter	EOC5
Schmid & Partner Engineering AG	2450 MHz System Validation Dipole	D2450V2
Schmid & Partner Engineering AG	5GHz System Validation Dipole	D5GHzV2
Stäubli	Robot	RX60BL
Stäubli	Robot controller	CM7MB
Schmid & Partner Engineering AG	Oval flat phantom	ELI 4
Schmid & Partner Engineering AG	Measurement Software	DASY V4.7 Build 80
Schmid & Partner Engineering AG	Measurement Server	DASY4 SE UMS 001 DC
Agilent	Vector Network Analyser	E5071C
Agilent	Dielectric Probe Kit	85070C
Rohde & Schwarz	Power Meter	NRVD
Rohde & Schwarz	Power Sensor	NRV-Z51
Rohde & Schwarz	Power Sensor	NRV-Z1
Agilent	RF Generator	ESG E4438C
NARDA	Dual directional coupler	FSCM 99899
MITEQ	Power amplifier	AMF-4D-00400600-50-30P
Schmid & Partner Engineering AG	Laptop Holder	SM LH1 001 AC

**Table 1:** Measurement Equipment

## 2.2. Test Positions of device relative to body <sup>4</sup>

The laptop device was tested in three different positions, as stated at FCC OET KDB 447498 – Mobile and Portable Device, RF Exposure Procedures and Equipment Authorization Policies (November 2009) paragraph 4) b):

- Lapheld: with the base in direct contact with the phantom, with the display folded on top of the keyboard section.
- Primary Portrait: edge with the most conservative exposure condition for the aux antenna at portrait configuration.
- Secondary Portrait: edge with the most conservative exposure condition for the main and mimo antennas at portrait configuration.
- Secondary Landscape: edge with the most conservative exposure condition for main, aux and mimo antennas at landscape configuration.

Further analysis was performed to determine the location which showed the highest SAR.

## 2.3. Test to be performed

In all operating modes and bands the measurements have to be performed on the “default test channels” defined at FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), except those channels defined as “required test channels” at the same document.

## 2.4. Description of interpolation/extrapolation scheme

The local SAR inside the Phantom is measured using small dipole sensing elements inside a probe element. The probe tip must not be in contact with the Phantom’s surface in order to minimise measurement errors, but the highest local SAR is obtained from measurements at a certain distances from the shell trough extrapolation. The accurate assessment of the maximum SAR averaged over 1 gr. and 10 gr. requires a very fine resolution in the three dimensional scanned data array. Since the measurements have to be performed over a limited time, the measured data have to be interpolated to provide an array of sufficient resolution.

The interpolation of 2D area scan is used after the initial area scan, at a fixed distance from the Phantom shell wall. The initial scan data is collected with a proper spatial resolution and this interpolation is used to find the location of the local maximum for positioning the subsequent 3D scanning to within a 1mm resolution.

For the 3D scan, data is collected on a spatially regular 3D grid having 5mm steps in both lateral directions, and 5mm in depth direction for the 2450MHz band. Over the 5GHz band, a 4mm lateral resolution is required, and 2.5mm in depth direction. After the data collection by the SAR probe, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

## **2.5. Determination of the largest peak spatial-average SAR**

To determine the maximum value of the peak spatial-average SAR of a EUT, all device positions, configurations and operational modes should be tested for each frequency band.

According to FCC 47 CFR Part 2.1093, the averaging volume shall be chosen as 1 g of contiguous tissue. The cubic volumes, over which the SAR measurements are averaged after extrapolation and interpolation, are chosen in order to include the highest values of local SAR.

The maximum SAR level for the EUT will be the maximum level obtained of the performed measurements, and indicated in the previous points.

## **2.6. System Validation**

Prior to the SAR measurements, system verification is done daily to verify the system accuracy. As FCC OET Bulletin 65 – Supplement C, Appendix D “SAR measurement procedures” Paragraph “System Verification” specifies, a complete SAR evaluation is done using a half-wavelength dipole as source with the frequency of the mid-band channel of the operating band, or within 100MHz of this channel.

The measured 1 gr. and 10 gr. SAR should be within 10% of the expected target values specified in the calibration certificate of the dipole, for the specific tissue and frequency used.

### 3. UNCERTAINTY

#### Uncertainty for 300 MHz – 6 GHz

ERROR SOURCES	Uncertainty value (%)	Probability distribution	Divisor	(c <sub>i</sub> ) 1g	(c <sub>i</sub> ) 10g	Standard uncertainty (1g) (%)	Standard uncertainty (10g) (%)	V <sub>i</sub> V <sub>eff</sub>
<b>Measurement Equipment</b>								
Probe Calibration	±4.480	Normal	1	1	1	±4.480	±4.480	∞
Axial Isotropy	±7.558	Rectangular	√3	1	1	±4.364	±4.364	∞
Hemispherical Isotropy	±2.000	Rectangular	√3	1	1	±1.155	±1.155	∞
Boundary effect	±4.700	Rectangular	√3	1	1	±2.714	±2.714	∞
Linearity	±1.000	Rectangular	√3	1	1	±0.577	±0.577	∞
System detection limits	±0.300	Rectangular	√3	1	1	±0.300	±0.300	∞
Readout electronics	±1.010	Normal	1	1	1	±0.583	±0.583	∞
Response time	±2.600	Rectangular	√3	1	1	±1.501	±1.501	∞
Integration time	±3.000	Rectangular	√3	1	1	±1.732	±1.732	∞
RF Ambien conditions	±3.000	Rectangular	√3	1	1	±1.732	±1.732	∞
Probe positioner	±0.800	Rectangular	√3	1	1	±0.462	±0.462	∞
Probe positioning	±9.900	Rectangular	√3	1	1	±5.716	±5.716	∞
Maximum SAR evaluation	±1.000	Rectangular	√3	1	1	±0.577	±0.577	∞
<b>Test Sample Related</b>								
Device positioning	±2.900	Normal	1	1	1	±2.900	±2.900	145
Device Holder	±3.600	Normal	1	1	1	±3.600	±3.600	5
Power Drift	±5.000	Rectangular	√3	1	1	±2.887	±2.887	∞
<b>Phantom and Setup</b>								
Phantom uncertainty	±4.000	Rectangular	√3	1	1	±2.309	±2.309	∞
Liquid conductivity (deviation from target)	±5.000	Rectangular	√3	0.64	0.43	±1.848	±1.241	∞
Liquid conductivity (measurement error)	±3.100	Normal	1	0.64	0.43	±1.984	±1.333	∞
Liquid permittivity (deviation from target)	±5.000	Rectangular	√3	0.64	0.43	±1.848	±1.241	∞
Liquid permittivity (measurement error)	±4.410	Normal	1	0.64	0.43	±2.822	±1.896	∞
<b>Combined standard uncertainty</b>	$u_c = \sqrt{\sum_{i=1}^m c_i^2 \cdot u_i^2}$					±11.99	±11.56	330
<b>Expanded uncertainty (confidence interval of 95%)</b>	$ue = 2.00 u_c$					±23.98	±23.11	

**Table 2:** Uncertainty Assessment for 300 MHz - 6 GHz

#### 4. SAR LIMIT

Having a worst case measurement, the SAR limit is valid for general population/uncontrolled exposure.

The SAR values have to be averaged over a mass of 1g (SAR<sub>1 gr.</sub>) with the shape of a cube. This level couldn't exceed the values indicated in the application Standard:

Standard	SAR	SAR Limit (W/Kg)
FCC 47 CFR Part 2.1093 Paragraph (d)(2)	SAR <sub>1 gr.</sub>	1.6

**Table 3:** SAR limit

## **APPENDIX B: Test results**

## INDEX

1.	TEST CONDITIONS .....	17
1.1.	Power supply (V):.....	17
1.2.	Temperature (°C):.....	17
1.3.	Test signal, Output Power and Frequencies.....	17
1.4.	DUT information .....	17
2.	TISSUE PARAMETERS MEASUREMENTS.....	18
3.	SYSTEM VALIDATION MEASUREMENTS .....	18
3.1.	Validation results in 2450 MHz Band for Body TSL.....	18
3.2.	Validation results in 5200 MHz Band for Body TSL.....	18
3.3.	Validation results in 5500 MHz Band for Body TSL.....	18
3.4.	Validation results in 5800 MHz Band for Body TSL.....	18
4.	CONDUCTED AVERAGE POWER MEASUREMENTS .....	19
5.	MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE) .....	21
5.1.	Summary maximum results.....	21
5.2.	Results for 2450 MHz Band .....	22
5.2.1.	Lapheld Mode.....	22
5.2.2.	Primary Portrait Mode .....	22
5.2.3.	Secondary Portrait Mode .....	23
5.2.4.	Secondary Landscape Mode .....	23
5.3.	Results for 5200 MHz Band .....	24
5.3.1.	Lapheld Mode.....	24
5.3.2.	Primary Portrait Mode .....	24
5.3.3.	Secondary Portrait Mode .....	25
5.3.4.	Secondary Landscape Mode .....	25
5.4.	Results for 5600 MHz Band .....	26
5.4.1.	Lapheld Mode.....	26
5.4.2.	Primary Portrait Mode .....	26
5.4.3.	Secondary Portrait Mode .....	26
5.4.4.	Secondary Landscape Mode .....	27
5.5.	Results for 5800 MHz Band .....	27
5.5.1.	Lapheld Mode.....	27
5.5.2.	Primary Portrait Mode .....	27
5.5.3.	Secondary Portrait Mode .....	28
5.5.4.	Secondary Landscape Mode .....	28
5.6.	Simultaneous transmission considerations.....	29



## **1. TEST CONDITIONS**

### **1.1. Power supply (V):**

$V_n = 11.1$  Vdc battery

Type of power supply = DC Voltage from rechargeable Li-Ion 11.1 V battery.

### **1.2. Temperature (°C):**

$T_n = +20.05$  to  $+23.91$

The subscript n indicates normal test conditions.

### **1.3. Test signal, Output Power and Frequencies**

The device was put into operation by using an own control software to program the test mode required for select the continuous transmission with 100% duty cycle.

In all operating bands the measurements were performed on the “default test channels” defined at FCC OET KDB 248227 – SAR Measurements Procedures 802.11a/b/g Transmitters (May 2007 – Revised), except those that fulfil the frequency channel selection criteria mentioned on paragraph “Frequency Channel Configuration” at the same document.

The output power of the device was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

The maximum average conducted power of the device was measured with a Power meter R&S NRVD and a thermocoupled Power sensor NRV-Z51.

### **1.4. DUT information**

The device under test was the Intel® Centrino® Ultimate-N 6300 card located inside a host device (Lenovo TP00019A PC) computer which utilises a set of Yageo antennas (25.90A1E.011 and 25.90A1F.011). The card was operated utilizing proprietary software (CRTU Version 5.20.1.0) and each channel was measured using a broadband power meter to determine the maximum average power.

According to host device manufacturer, the source-based time-averaged output power of the Bluetooth device is far bellow the SAR threshold ( $60/f(\text{GHz})$  mW). Therefore, neither SAR testing nor co-transmission evaluation is required for the Bluetooth transmitter, following the guidelines stated at FCC OET KDB 447498 – Mobile and Portable Device, RF Exposure Procedures and Equipment Authorization Policies (November 2009), paragraph 4) b).

Collocation with WWAN transmitter has not been considered following grantee request because this collocation will be considered in the WWAN transmitter SAR testing.

## 2. TISSUE PARAMETERS MEASUREMENTS

Frequency (MHz)	Target Body Tissue: Parameters used in Probe Calibration		Target Body Tissue: Parameters used in Dipole Calibration		Measured Body Tissue		Measured Date
	Permittivity	Conductivity [S/m]	Permittivity	Conductivity [S/m]	Permittivity	Conductivity [S/m]	
2450	52.7 ± 5%	1.95 ± 5%	53.2 ± 6%	2.00 ± 6%	50.55	2.03	2011-02-08
5200	49.0 ± 10%	5.30 ± 5%	47.7 ± 6%	5.30 ± 6%	48.72	5.16	2011-01-10
5500	48.6 ± 10%	5.65 ± 5%	46.8 ± 6%	5.74 ± 6%	47.84	5.54	2011-01-10
5800	48.2 ± 10%	6.00 ± 5%	46.3 ± 6%	6.05 ± 6%	47.10	6.01	2011-01-10

Note: The dielectric properties have been measured by the contact probe method at 22° C.

## 3. SYSTEM VALIDATION MEASUREMENTS

### 3.1. Validation results in 2450 MHz Band for Body TSL

SAR	Target SAR (W/kg)	Measured SAR (W/kg)	Drift (%)	Limit (%)
1 gr.	53,00	52,05	-1,80	± 10
10 gr.	25,00	24,01	-3,98	± 10

### 3.2. Validation results in 5200 MHz Band for Body TSL

SAR	Target SAR (W/kg)	Measured SAR (W/kg)	Drift (%)	Limit (%)
1 gr.	75,70	71,99	-4,90	± 10
10 gr.	21,10	20,31	-3,73	± 10

### 3.3. Validation results in 5500 MHz Band for Body TSL

SAR	Target SAR (W/kg)	Measured SAR (W/kg)	Drift (%)	Limit (%)
1 gr.	81,10	83,07	2,42	± 10
10 gr.	22,40	23,35	4,23	± 10

### 3.4. Validation results in 5800 MHz Band for Body TSL

SAR	Target SAR (W/kg)	Measured SAR (W/kg)	Drift (%)	Limit (%)
1 gr.	71,90	68,79	-4,33	± 10
10 gr.	19,70	19,33	-1,90	± 10

#### 4. CONDUCTED AVERAGE POWER MEASUREMENTS

Band	Mode	Channel	Frequency (MHz)	Conducted Power (dBm)		
				Chain A	Chain B	Chain C
2450 MHz	802.11b	1	2412	16,54	16,59	16,58
		6	2437	16,47	16,46	16,48
		11	2462	16,38	16,43	16,45
	802.11g	1	2412	15,46	14,57	15,35
		6	2437	16,47	16,43	16,47
		11	2462	14,48	14,61	14,43
	802.11n <sup>1</sup>	1	2417	14,51	14,47	15,50
		6	2437	16,50	16,47	16,33
		11	2457	14,45	14,41	15,46
	802.11n* <sup>1</sup>	3	2422	11,98	12,04	11,99
		4	2427	13,65	13,51	13,33
		6	2437	16,40	16,33	16,40
		8	2447	13,44	13,46	13,67
		9	2452	12,06	12,19	12,09
	5200 MHz	802.11a	36	5180	16,52	16,44
48			5240	16,61	16,63	16,63
52			5260	16,47	16,56	16,56
64			5320	16,45	16,40	16,40
802.11n <sup>1</sup>		36	5180	16,60	16,44	16,56
		48	5240	16,36	16,63	16,51
		52	5260	16,53	16,56	16,49
		64	5320	16,61	16,40	16,46
802.11n* <sup>1</sup>		38	5190	16,65	16,50	16,50
		46	5230	16,43	16,66	16,66
		54	5270	16,56	16,53	16,53
		62	5310	16,50	16,65	16,65

1: See Remarks and Comments.

Band	Mode	Channel	Frequency (MHz)	Conducted Power (dBm)		
				Chain A	Chain B	Chain C
5600 MHz	802.11a	100	5500	16,49	16,42	16,42
		116	5580	16,6	16,47	16,47
		140	5700	16,57	16,56	16,56
	802.11n <sup>1</sup>	100	5500	16,53	16,42	16,55
		116	5580	16,5	16,47	16,48
		140	5700	16,59	16,56	16,63
	802.11n* <sup>1</sup>	102	5510	16,49	16,76	16,76
		118	5590	16,58	16,57	16,57
		134	5670	16,67	16,52	16,52
5800 MHz	802.11a	149	5745	16,61	16,49	16,49
		157	5785	16,64	16,56	16,40
		165	5825	16,36	16,62	16,61
	802.11n <sup>1</sup>	149	5745	16,47	16,59	16,58
		157	5785	16,63	16,44	16,54
		165	5825	16,58	16,56	16,51
	802.11n* <sup>1</sup>	151	5755	16,48	16,47	16,50
		159	5795	16,62	16,51	16,64

1: See Remarks and Comments.

For the simultaneous transmission operation, the individual output power for each chain is reduced when more than one chain are transmitting at the same time. Therefore, the simultaneous transmission evaluation was calculated using the SAR results obtained with the reduced power presented in the table below:

Band	Mode	Channel	Frequency (MHz)	Conducted Power (dBm)			
				Chain A	Chain B	Chain C	Combined
5200 MHz	802.11n* <sup>1</sup>	54	5260	13.69	-	13.68	16.70
5600 MHz	802.11n* <sup>1</sup>	102	5510	-	13.67	13.61	16.65
5800 MHz	802.11n* <sup>1</sup>	159	5795	-	13.67	13.68	16.69
				13.48	-	13.65	16.58

## MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE)

### 4.1. Summary maximum results

Band	Chain	Mode	Channel	Frequency (MHz)	Measured SAR 1g (W/Kg)	SAR limit 1g (W/Kg)
2450 MHz	A	802.11b	6	2437	0.420	1.6
	B	802.11b	6	2437	0.270	1.6
	C	802.11b	6	2437	0.623	1.6
5200 MHz	A	802.11n* <sup>1</sup>	54	5270	0.899	1.6
	B	802.11n* <sup>1</sup>	38	5190	0.953	1.6
	C	802.11n* <sup>1</sup>	62	5310	0.779	1.6
5600 MHz	A	802.11n* <sup>1</sup>	134	5670	0.855	1.6
	B	802.11n* <sup>1</sup>	102	5510	1.080	1.6
	C	802.11n* <sup>1</sup>	134	5670	1.450	1.6
5800 MHz	A	802.11n* <sup>1</sup>	159	5795	0.823	1.6
	B	802.11n* <sup>1</sup>	159	5795	0.544	1.6
	C	802.11n* <sup>1</sup>	159	5795	1.530	1.6

1: See Remarks and Comments.

## 4.2. Results for 2450 MHz Band

### 4.2.1. Lapheld Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11b	A	3	2422	NM <sup>3</sup>	-
		6	2437	0.034	-2.28
		9	2452	NM <sup>3</sup>	-
	B	3	2422	NM <sup>3</sup>	-
		6	2437	0.033	3.74
		9	2452	NM <sup>3</sup>	-
	C	3	2422	NM <sup>3</sup>	-
		6	2437	0.044	-1.07
		9	2452	NM <sup>3</sup>	-
802.11n* <sup>1</sup>	A	3	2422	NM <sup>3</sup>	-
		6	2437	0.027	0.32
		9	2452	NM <sup>3</sup>	-
	B	3	2422	NM <sup>3</sup>	-
		6	2437	0.032	-1.73
		9	2452	NM <sup>3</sup>	-
	C	3	2422	NM <sup>3</sup>	-
		6	2437	0.043	0.73
		9	2452	NM <sup>3</sup>	-

1 and 3: See Remarks and Comments.

### 4.2.2. Primary Portrait Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11b	B	3	2422	NM <sup>3</sup>	-
		6	2437	0.062	3.37
		9	2452	NM <sup>3</sup>	-
802.11n* <sup>1</sup>	B	3	2422	NM <sup>3</sup>	-
		6	2437	0.055	0.50
		9	2452	NM <sup>3</sup>	-

1 and 3: See Remarks and Comments.

#### 4.2.3. Secondary Portrait Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11b	A	3	2422	NM <sup>3</sup>	-
		6	2437	0.138	-0.82
		9	2452	NM <sup>3</sup>	-
	C	3	2422	NM <sup>3</sup>	-
		6	2437	0.022	-2.36
		9	2452	NM <sup>3</sup>	-
802.11n* <sup>1</sup>	A	3	2422	NM <sup>3</sup>	-
		6	2437	0.122	-0.88
		9	2452	NM <sup>3</sup>	-
	C	3	2422	NM <sup>3</sup>	-
		6	2437	0.027	3.92
		9	2452	NM <sup>3</sup>	-

1 and 3: See Remarks and Comments.

#### 4.2.4. Secondary Landscape Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11b	A	3	2422	NM <sup>3</sup>	-
		6	2437	0.420	1.31
		9	2452	NM <sup>3</sup>	-
	B	3	2422	NM <sup>3</sup>	-
		6	2437	0.270	3.43
		9	2452	NM <sup>3</sup>	-
	C	3	2422	NM <sup>3</sup>	-
		6	2437	0.623	-1.60
		9	2452	NM <sup>3</sup>	-
802.11n* <sup>1</sup>	A	3	2422	NM <sup>3</sup>	-
		6	2437	0.371	2.86
		9	2452	NM <sup>3</sup>	-
	B	3	2422	NM <sup>3</sup>	-
		6	2437	0.239	-0.46
		9	2452	NM <sup>3</sup>	-
	C	3	2422	NM <sup>3</sup>	-
		6	2437	0.511	1.18
		9	2452	NM <sup>3</sup>	-

1 and 3: See Remarks and Comments.

### 4.3. Results for 5200 MHz Band

#### 4.3.1. Lapheld Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	A	38	5190	0.211	0.03
		46	5230	NM <sup>3</sup>	-
		54	5270	NM <sup>3</sup>	-
		62	5310	NM <sup>3</sup>	-
	B	38	5190	NM <sup>3</sup>	-
		46	5230	0.325	0.02
		54	5270	NM <sup>3</sup>	-
		62	5310	NM <sup>3</sup>	-
	C	38	5190	NM <sup>3</sup>	-
		46	5230	NM <sup>3</sup>	-
		54	5270	NM <sup>3</sup>	-
		62	5310	0.337	0.55

1 and 3: See Remarks and Comments.

#### 4.3.2. Primary Portrait Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	B	38	5190	NM <sup>3</sup>	-
		46	5230	0.421	-2.12
		54	5270	NM <sup>3</sup>	-
		62	5310	NM <sup>3</sup>	-

1 and 3: See Remarks and Comments.



### 4.3.3. Secondary Portrait Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	A	38	5190	0.585	1.65
		46	5230	NM <sup>3</sup>	-
		54	5270	NM <sup>3</sup>	-
		62	5310	NM <sup>3</sup>	-
	C	38	5190	NM <sup>3</sup>	-
		46	5230	NM <sup>3</sup>	-
		54	5270	NM <sup>3</sup>	-
		62	5310	0.271	1.81

1 and 3: See Remarks and Comments.

### 4.3.4. Secondary Landscape Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	A	38	5190	0.867	-2.28
		46	5230	0.858	-3.48
		54	5270	0.899	-2.79
		62	5310	0.777	0.46
	B	38	5190	0.953	-0.76
		46	5230	0.825	-1.79
		54	5270	0.675	-0.70
		62	5310	0.751	2.70
	C	38	5190	0.641	-1.92
		46	5230	0.748	0.73
		54	5270	0.773	-0.29
		62	5310	0.779	-0.48

1: See Remarks and Comments.

#### 4.4. Results for 5600 MHz Band

##### 4.4.1. Lapheld Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	A	102	5510	NM <sup>3</sup>	-
		118	5590	NM <sup>3</sup>	-
		134	5670	0.482	1.32
	B	102	5510	0.404	0.91
		118	5590	NM <sup>3</sup>	-
		134	5670	NM <sup>3</sup>	-
	C	102	5510	0.321	-2.08
		118	5590	NM <sup>3</sup>	-
		134	5670	NM <sup>3</sup>	-

1 and 3: See Remarks and Comments.

##### 4.4.2. Primary Portrait Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	B	102	5510	0.390	2.94
		118	5590	NM <sup>3</sup>	-
		134	5670	NM <sup>3</sup>	-

1 and 3: See Remarks and Comments.

##### 4.4.3. Secondary Portrait Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	A	102	5510	NM <sup>3</sup>	-
		118	5590	NM <sup>3</sup>	-
		134	5670	0.406	-0.64
	C	102	5510	0.321	3.28
		118	5590	NM <sup>3</sup>	-
		134	5670	NM <sup>3</sup>	-

1 and 3: See Remarks and Comments.

#### 4.4.4. Secondary Landscape Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	A	102	5510	0.774	0.12
		118	5590	0.712	-1.34
		134	5670	0.855	-0.56
	B	102	5510	1.080	3.18
		118	5590	0.846	2.20
		134	5670	0.647	2.92
	C	102	5510	1.160	-1.55
		118	5590	1.190	-0.06
		134	5670	1.450	1.07

1: See Remarks and Comments.

#### 4.5. Results for 5800 MHz Band

##### 4.5.1. Lapheld Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	A	151	5755	NM <sup>3</sup>	-
		159	5795	0.447	3.45
	B	151	5755	NM <sup>3</sup>	-
		159	5795	0.437	-0.22
	C	151	5755	NM <sup>3</sup>	-
		159	5795	0.426	-0.93

1 and 3: See Remarks and Comments.

##### 4.5.2. Primary Portrait Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	B	151	5755	NM <sup>3</sup>	-
		159	5795	0.312	-3.52

1 and 3: See Remarks and Comments.

#### 4.5.3. Secondary Portrait Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	A	151	5755	NM <sup>3</sup>	-
		159	5795	0.131	1.67
	C	151	5755	NM <sup>3</sup>	-
		159	5795	0.016	0.14

1 and 3: See Remarks and Comments.

#### 4.5.4. Secondary Landscape Mode

Mode	Chain	Channel	Frequency (MHz)	SAR averaged over 1g (W/Kg)	Power Drift (%)
802.11n* <sup>1</sup>	A	151	5755	0.674	-1.09
		159	5795	0.823	1.10
	B	151	5755	0.519	-0.68
		159	5795	0.544	1.81
	C	151	5755	1.190	-0.89
		159	5795	1.530	-3.94

1: See Remarks and Comments.

#### 4.6. Simultaneous transmission considerations

As stated at FCC OET KDB 447498 – Mobile and Portable Device, RF Exposure Procedures and Equipment Authorization Policies (November 2009), paragraph 4) b) iii) (1), the simultaneous SAR transmission evaluation is not required when the sum of stand-alone 1-g SAR is < SAR limit, or the SAR to peak location separation ratios are < 0.3 for all antenna pairs.

The WLAN operation only admits the simultaneous transmission between antennas when both of them uses the same channel, so the SAR to peak location separation ratio was evaluated considering the highest result for each antenna and the corresponding value of the other one with the same channel.

For the simultaneous transmission operation, the individual output power for each chain is reduced when more than one chain are transmitting at the same time. Therefore, the simultaneous transmission evaluation was calculated using the SAR results obtained with the reduced power presented at paragraph 4 above.

Transmission Mode	Band	Channel	Frequency	Chain	Max. SAR averaged over 1g (W/kg)	Peak location separation (cm)	SAR to peak location separation ratio
802.11n* <sup>1</sup>	5.2 GHz	54	5270 MHz	A	0.544	4.60	0.23
				C	0.520		
802.11n* <sup>1</sup>	5.6 GHz	102	5510 MHz	B	0.634	5.42	0.24
				C	0.670		
802.11n* <sup>1</sup>	5.8 GHz	159	5795 MHz	A	0.509	5.80	0.22
				C	0.775		
802.11n* <sup>1</sup>	5.8 GHz	159	5795 MHz	B	0.373	6.04	0.19
				C	0.799		

According to host device manufacturer, the source-based time-averaged output power of the Bluetooth device is far bellow the SAR threshold (60/f(GHz) mW). Therefore, neither SAR testing nor co-transmission evaluation is required for the Bluetooth transmitter, following the guidelines stated at FCC OET KDB 447498 – Mobile and Portable Device, RF Exposure Procedures and Equipment Authorization Policies (November 2009), paragraph 4) b).

Collocation with WWAN transmitter has not been considered following grantee request because this collocation will be considered in the WWAN transmitter SAR testing.

## **APPENDIX C: Measurements Reports**

**2450 MHz Band – Lapheld Mode, Chain A – 802.11b Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - LapHeld**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11b, Channel 6/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.032 mW/g

**Chain A, 802.11b, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.90 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 0.043 W/kg


**SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.029 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.035 mW/g

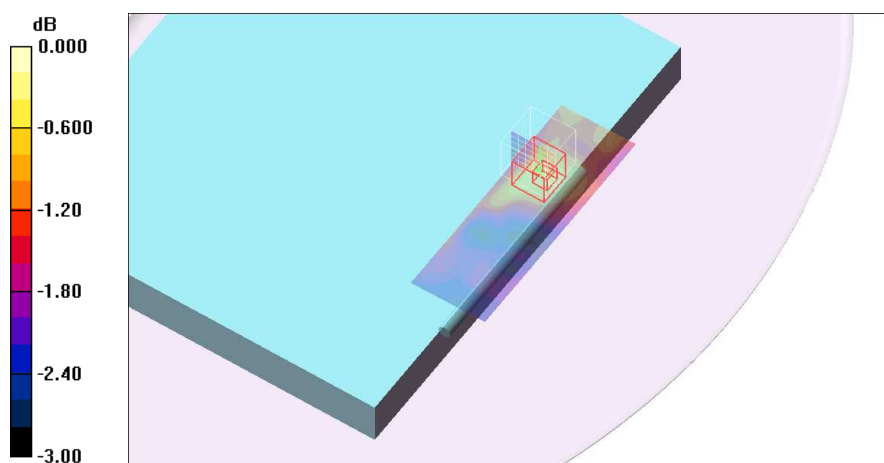

0 dB = 0.035mW/g

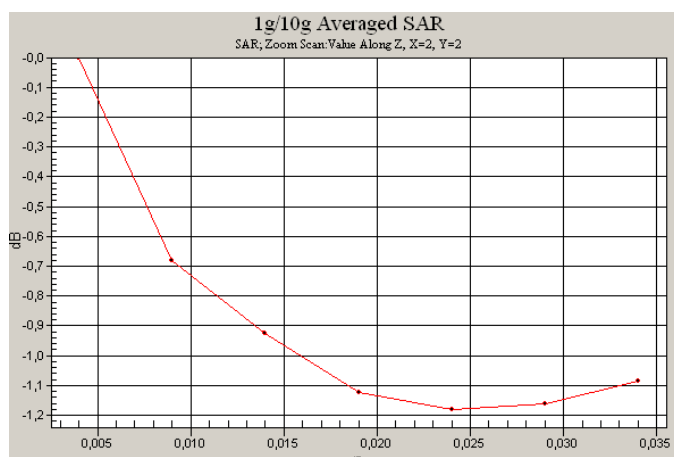

**2450 MHz Band – Lapheld Mode, Chain B – 802.11b Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - LapHeld**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11b, Channel 6/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.032 mW/g

**Chain B, 802.11b, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.06 V/m; Power Drift = 0.319 dB

Peak SAR (extrapolated) = 0.053 W/kg


**SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.027 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.033 mW/g

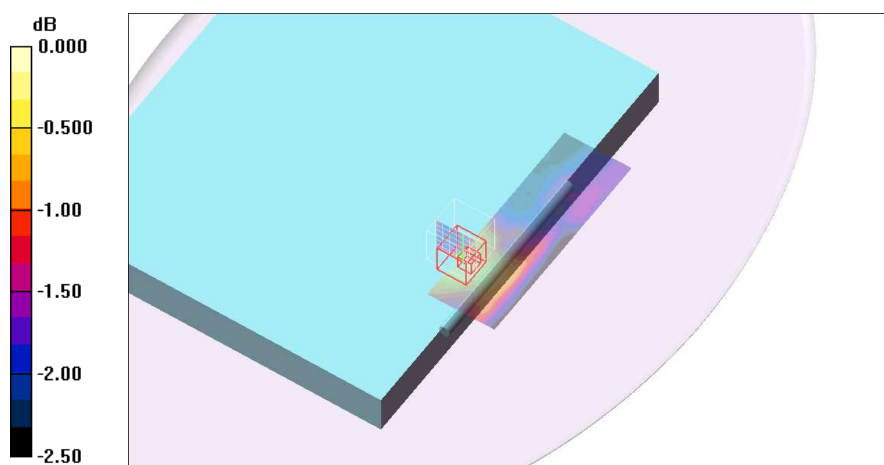

0 dB = 0.033mW/g

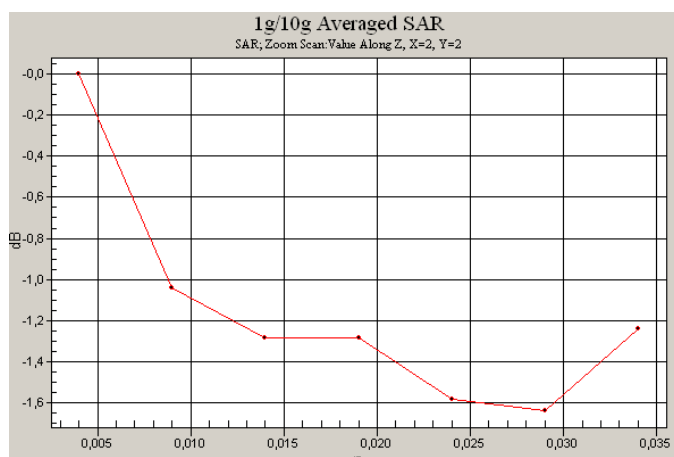



**2450 MHz Band – Lapheld Mode, Chain C – 802.11b Channel 1**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - LapHeld**

Communication System: 802.11; Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.94$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11b, Channel 1/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.059 mW/g

**Chain C, 802.11b, Channel 1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.15 V/m; Power Drift = -0.094 dB

Peak SAR (extrapolated) = 0.057 W/kg


**SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.038 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.046 mW/g

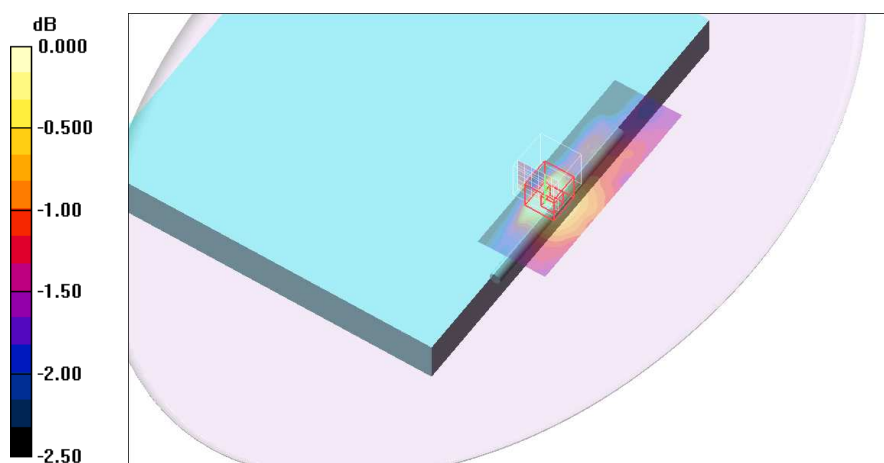

0 dB = 0.046mW/g

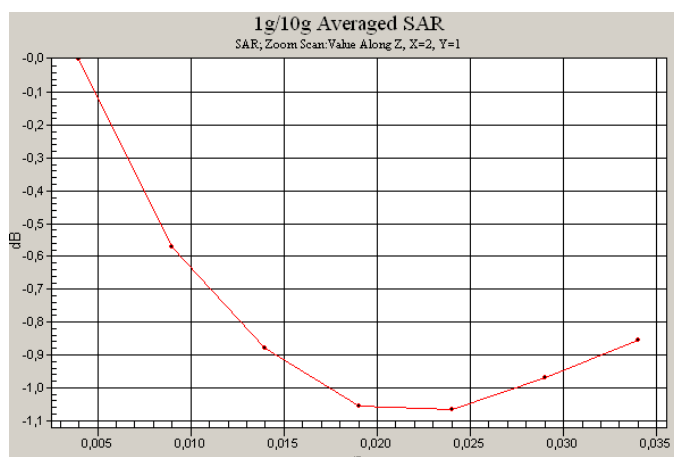

**2450 MHz Band – Lapheld Mode, Chain A – 802.11n\* Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - LapHeld**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 6/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.032 mW/g

**Chain A, 802.11n\*, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.85 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.038 W/kg


**SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.023 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.030 mW/g

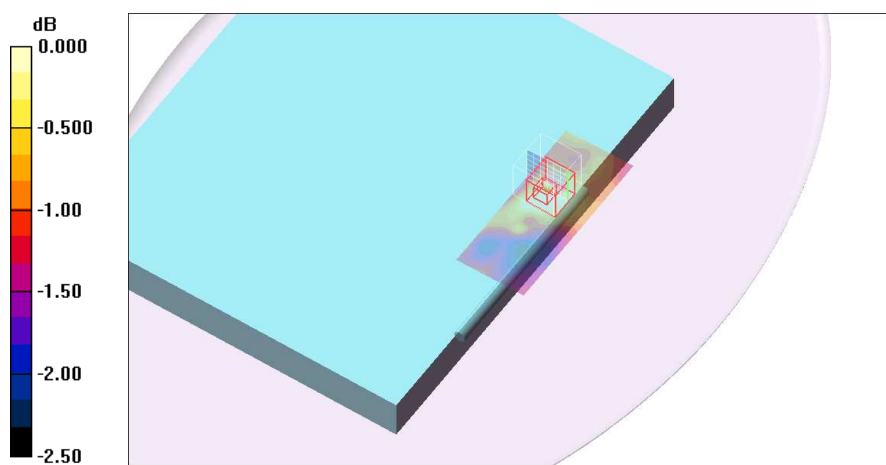

0 dB = 0.030mW/g

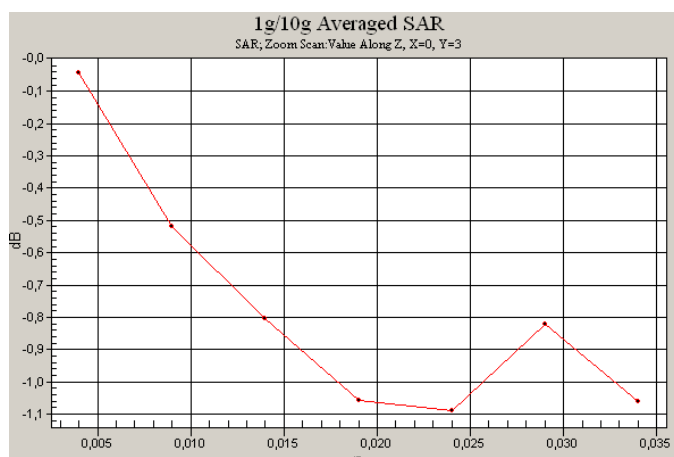

**2450 MHz Band – Lapheld Mode, Chain B – 802.11n\* Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - LapHeld**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 6/Area Scan (51x131x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.027 mW/g

**Chain B, 802.11n\*, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.16 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.048 W/kg


**SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.028 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.032 mW/g

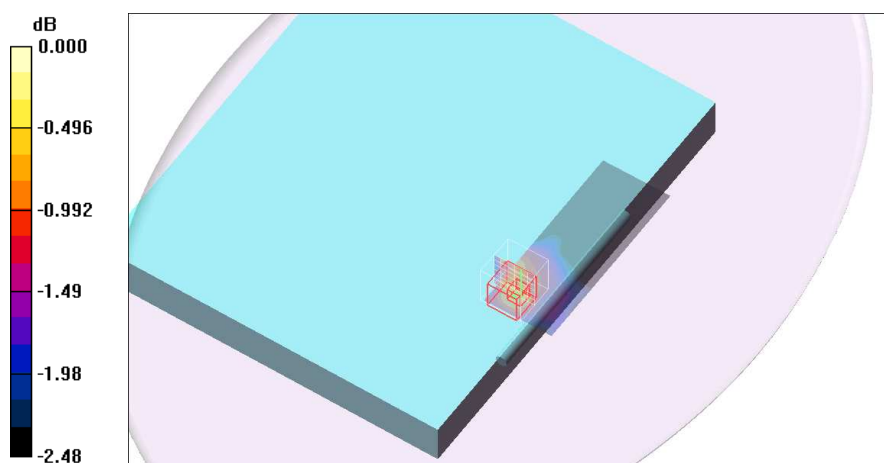

0 dB = 0.032mW/g

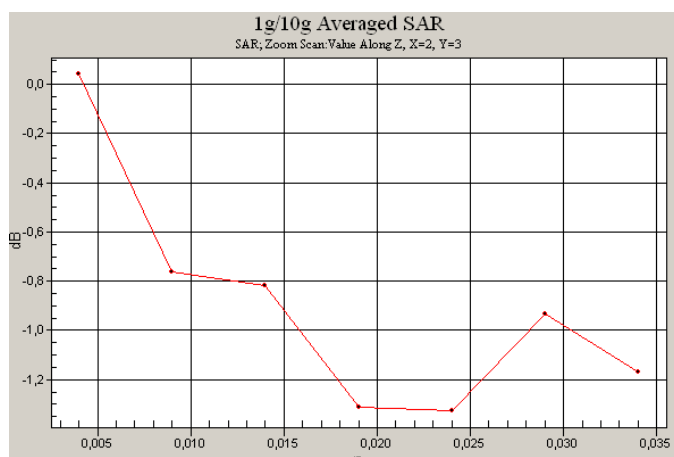

**2450 MHz Band – Lapheld Mode, Chain C – 802.11n\* Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - LapHeld**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 6/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.043 mW/g

**Chain C, 802.11n\*, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.20 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.069 W/kg


**SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.038 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.044 mW/g

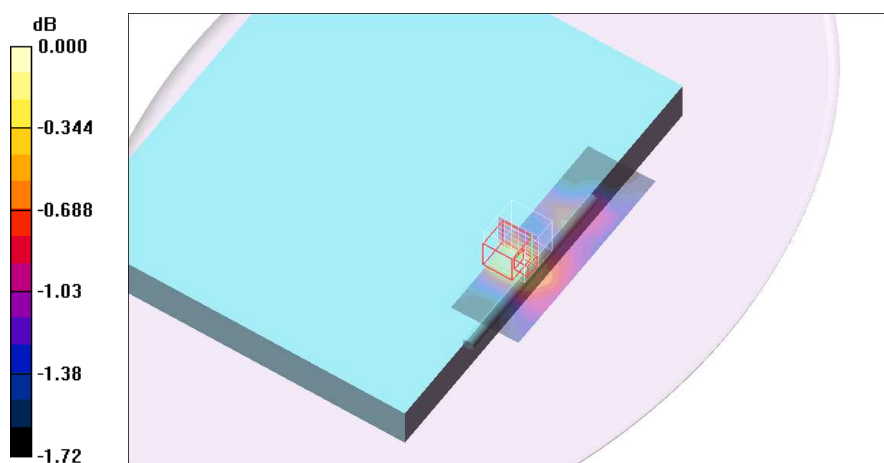

0 dB = 0.044mW/g

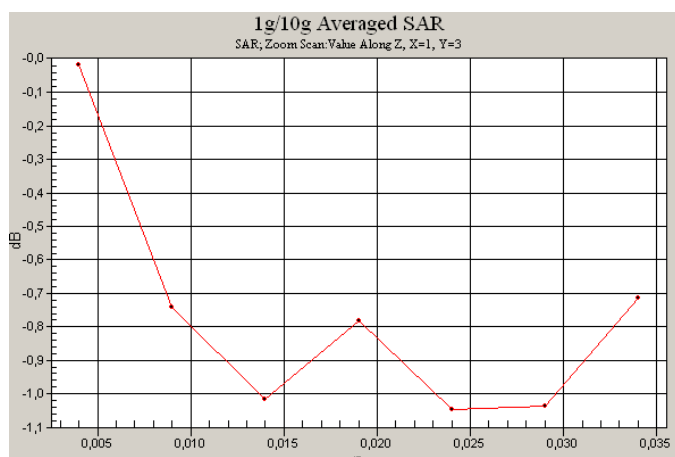

**2450 MHz Band – Primary Portrait Mode, Chain B – 802.11b Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Primary Portrait**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11b, Channel 6/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.071 mW/g

**Chain B, 802.11b, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.96 V/m; Power Drift = 0.288 dB

Peak SAR (extrapolated) = 0.161 W/kg


**SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.036 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.067 mW/g

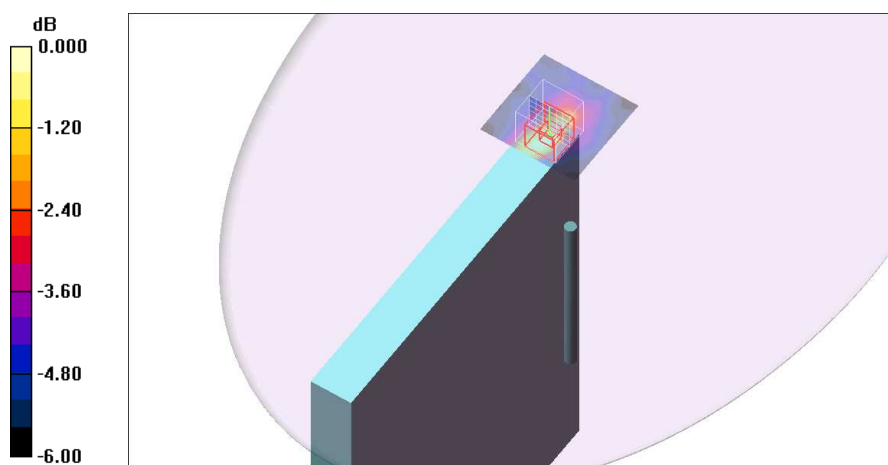

0 dB = 0.067mW/g

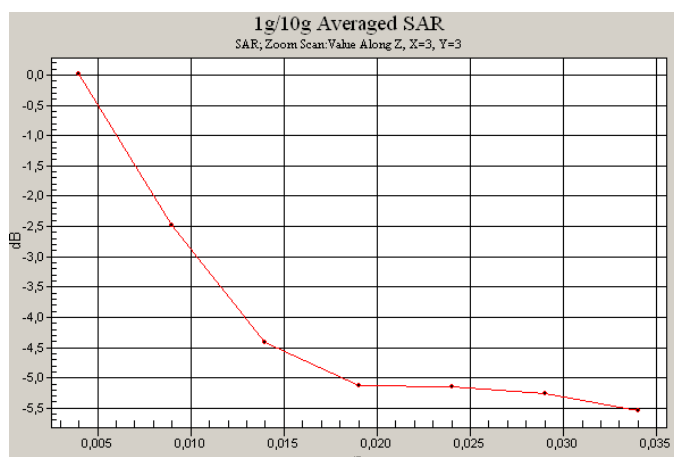

**2450 MHz Band – Primary Portrait Mode, Chain B – 802.11n\* Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Primary Portrait**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 6/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.057 mW/g

**Chain B, 802.11n\*, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 5.62 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.184 W/kg


**SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.033 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.059 mW/g

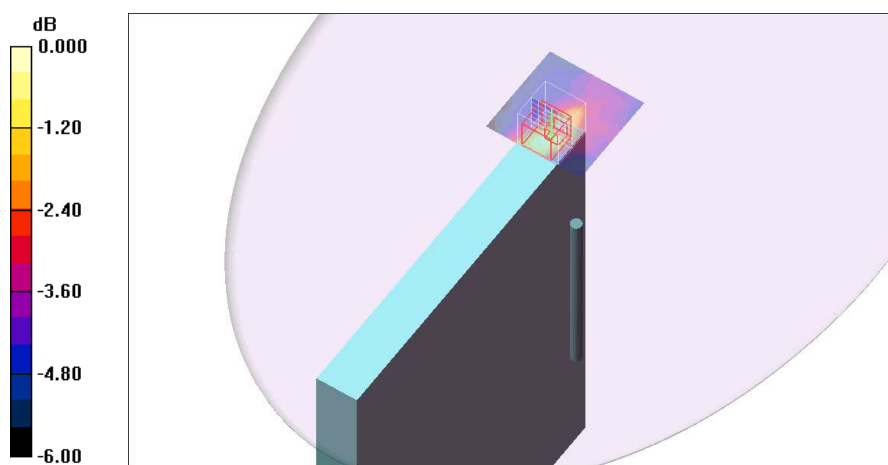

0 dB = 0.059mW/g

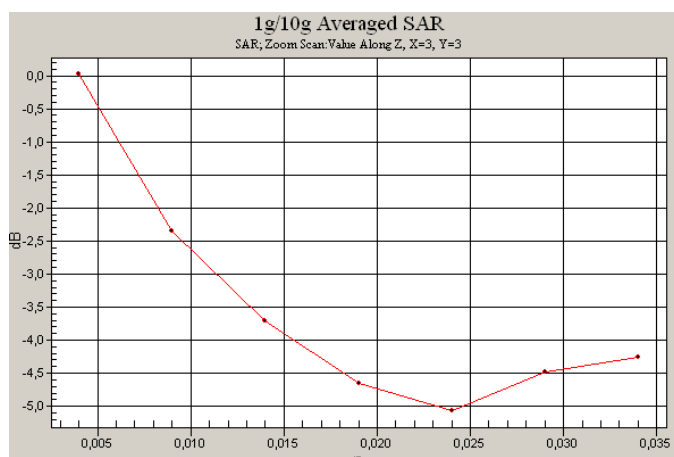

**2450 MHz Band – Secondary Portrait Mode, Chain A – 802.11b Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Secondary Portrait**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11b, Channel 6/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.164 mW/g

**Chain A, 802.11b, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 7.07 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.311 W/kg

**SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.070 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.152 mW/g

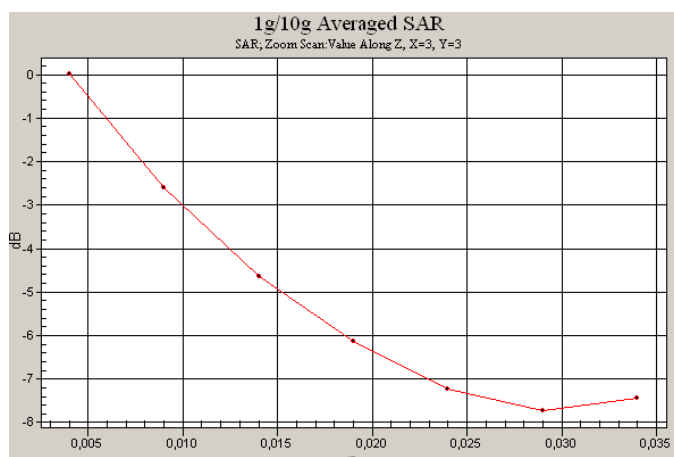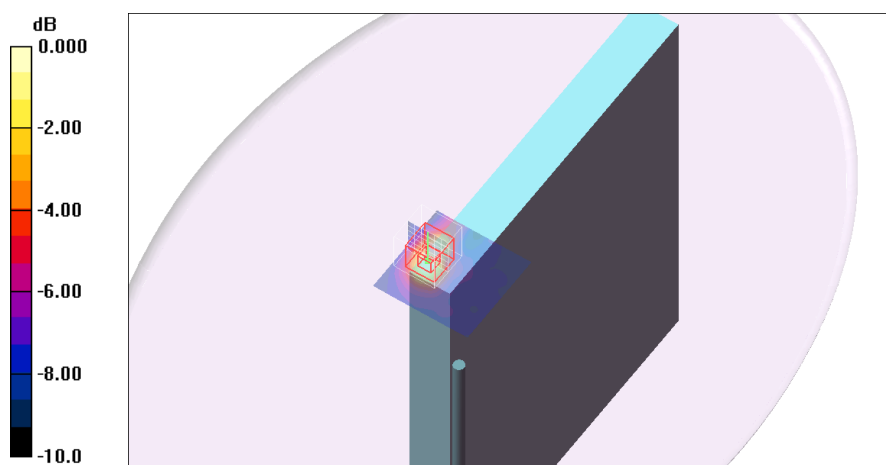

**2450 MHz Band – Secondary Portrait Mode, Chain C – 802.11b Channel 1**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Secondary Portrait**

Communication System: 802.11; Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.94$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11b, Channel 1/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.021 mW/g

**Chain C, 802.11b, Channel 1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.37 V/m; Power Drift = -0.207 dB

Peak SAR (extrapolated) = 0.025 W/kg


**SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.019 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.025 mW/g

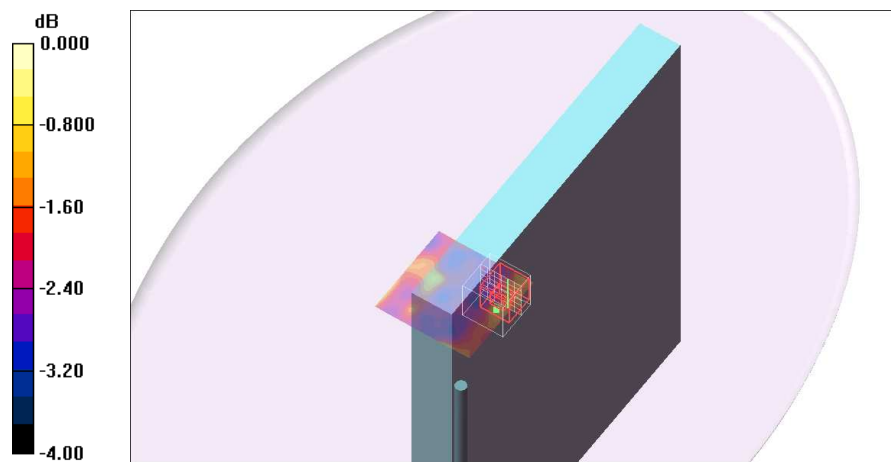

0 dB = 0.025mW/g

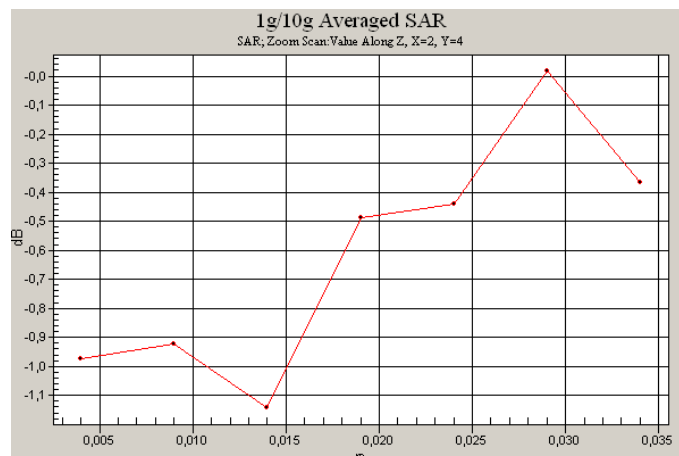



**2450 MHz Band – Secondary Portrait Mode, Chain A – 802.11n\* Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Secondary Portrait**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 6/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.160 mW/g

**Chain A, 802.11n\*, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 8.82 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.258 W/kg


**SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.063 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.137 mW/g

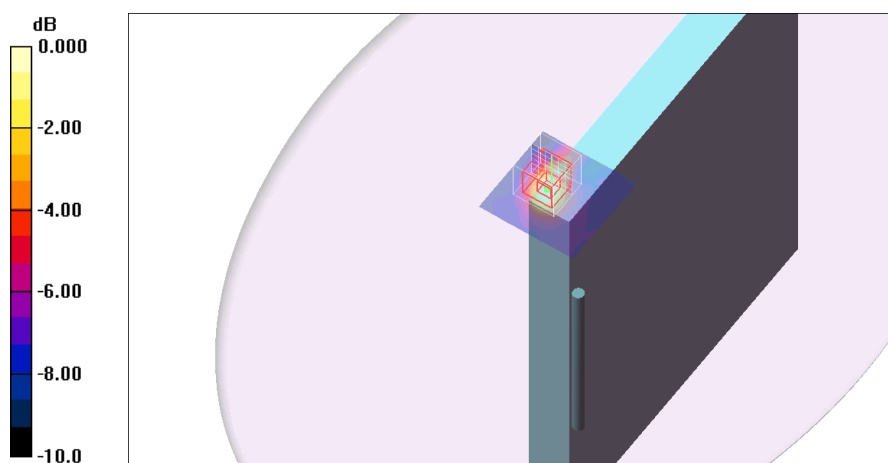

0 dB = 0.137mW/g

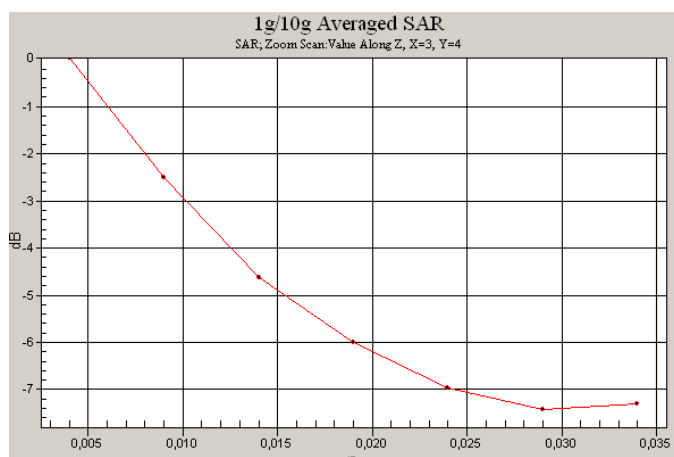

**2450 MHz Band – Secondary Portrait Mode, Chain C – 802.11n\* Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Secondary Portrait**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 6/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.032 mW/g

**Chain C, 802.11n\*, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 3.13 V/m; Power Drift = 0.334 dB

Peak SAR (extrapolated) = 0.055 W/kg


**SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.022 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.030 mW/g

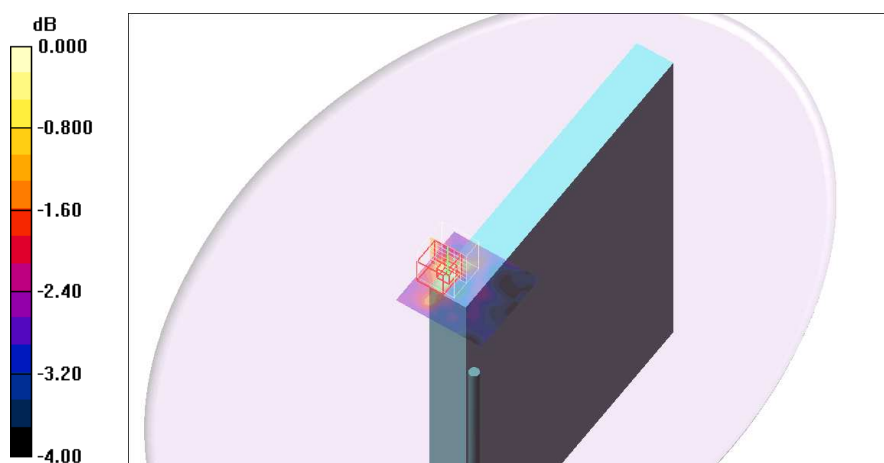

0 dB = 0.030mW/g

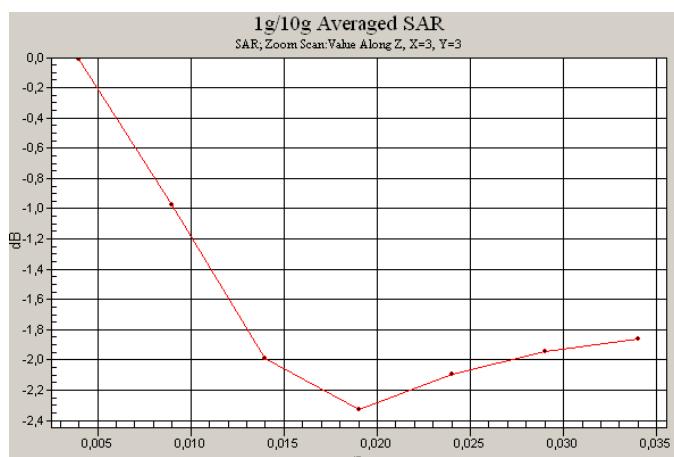

**2450 MHz Band – Secondary Landscape Mode, Chain A – 802.11b Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 2.02$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 03/02/2011
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11b, Channel 6/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.478 mW/g

**Chain A, 802.11b, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 15.5 V/m; Power Drift = 0.113 dB

Peak SAR (extrapolated) = 1.18 W/kg


**SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.176 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.491 mW/g

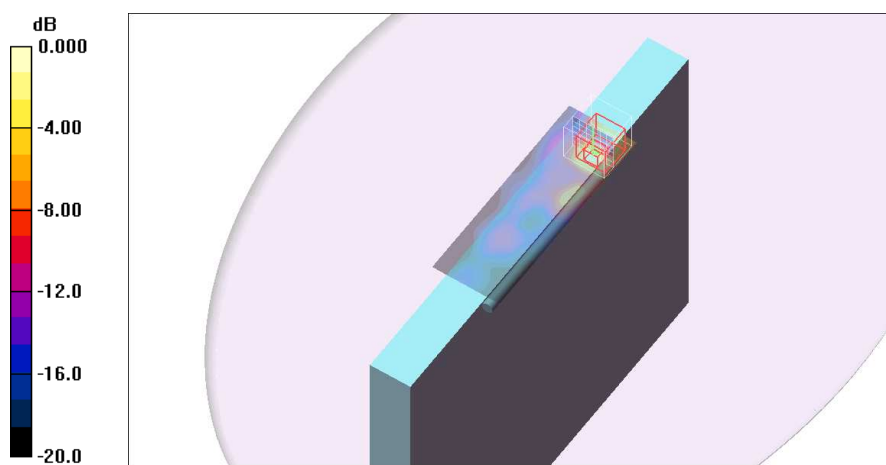

0 dB = 0.491mW/g

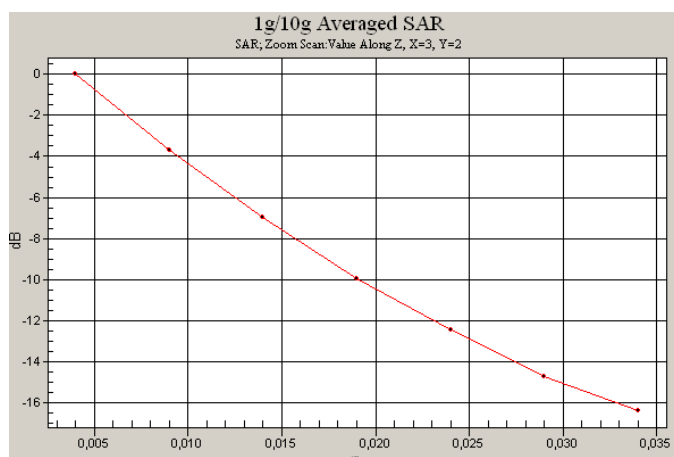

**2450 MHz Band – Secondary Landscape Mode, Chain B – 802.11b Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 2.02$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 03/02/2011
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11b, Channel 6/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.331 mW/g

**Chain B, 802.11b, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.68 V/m; Power Drift = 0.293 dB

Peak SAR (extrapolated) = 0.694 W/kg


**SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.110 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.311 mW/g

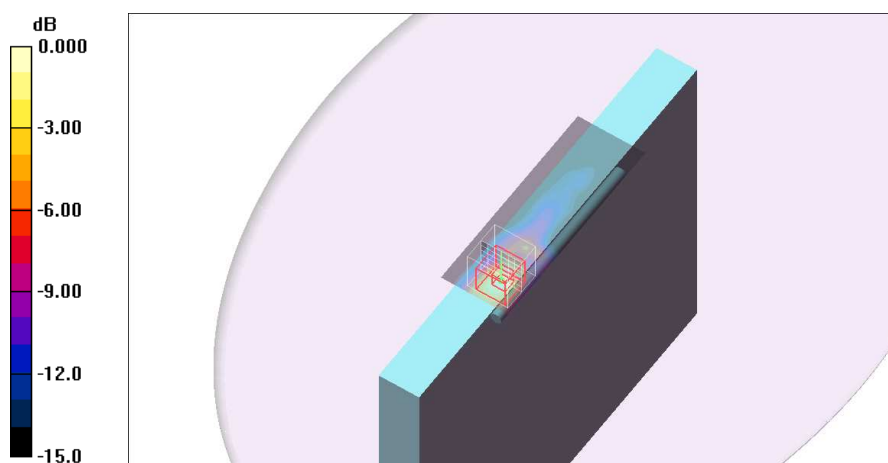

0 dB = 0.311 mW/g

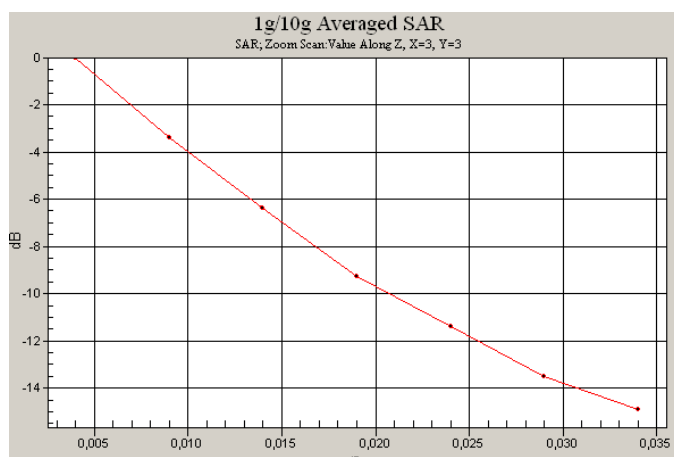

**2450 MHz Band – Secondary Landscape Mode, Chain C – 802.11b Channel 1**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.99$  mho/m;  $\epsilon_r = 50.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 03/02/2011
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11b, Channel 1/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.806 mW/g

**Chain C, 802.11b, Channel 1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 19.2 V/m; Power Drift = -0.140 dB

Peak SAR (extrapolated) = 1.57 W/kg


**SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.250 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.731 mW/g

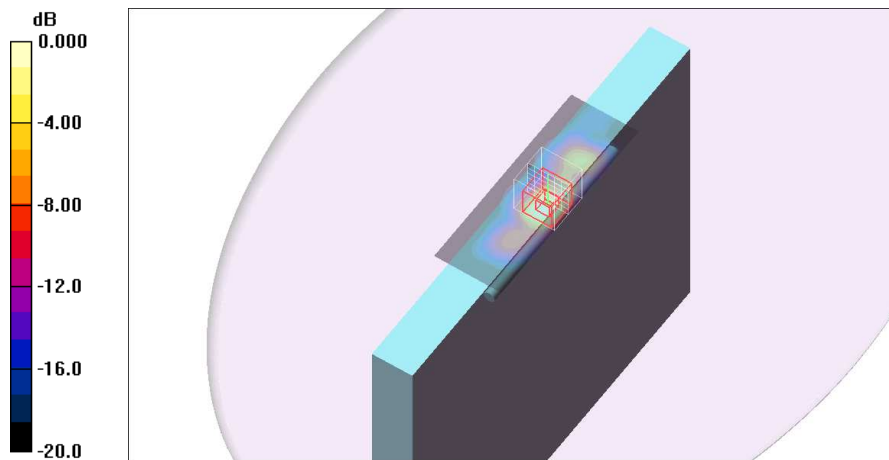

0 dB = 0.731 mW/g

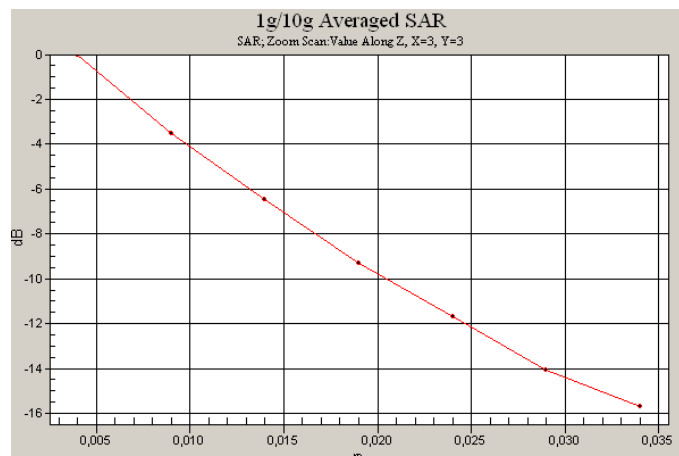

**2450 MHz Band – Secondary Landscape Mode, Chain A – 802.11n\* Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 2.02$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 03/02/2011
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 6/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.432 mW/g

**Chain A, 802.11n\*, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.66 V/m; Power Drift = 0.245 dB

Peak SAR (extrapolated) = 1.04 W/kg


**SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.156 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.437 mW/g

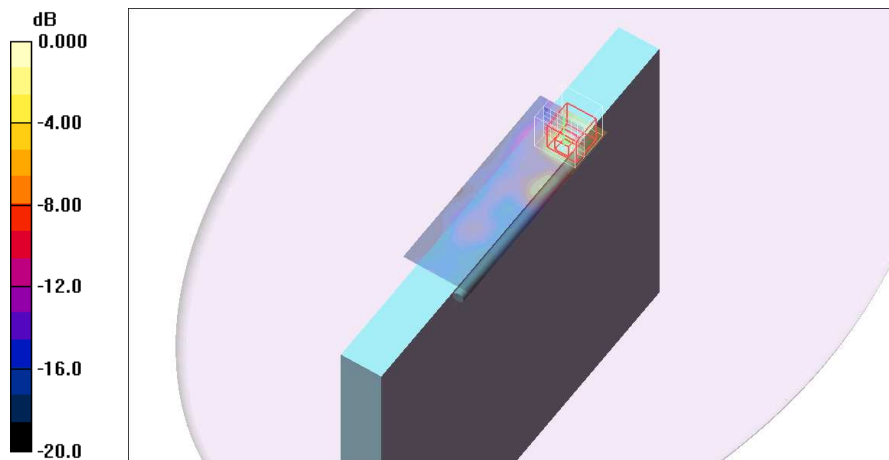

0 dB = 0.437mW/g

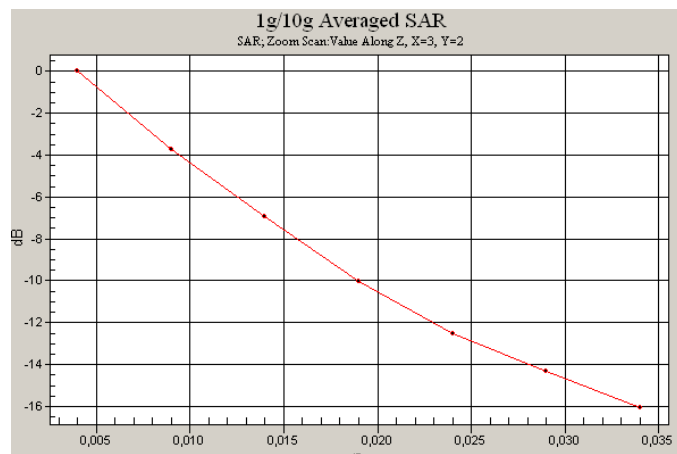

**2450 MHz Band – Secondary Landscape Mode, Chain B – 802.11n\* Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 2.02$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 03/02/2011
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 6/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.292 mW/g

**Chain B, 802.11n\*, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.51 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.622 W/kg


**SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.097 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.278 mW/g

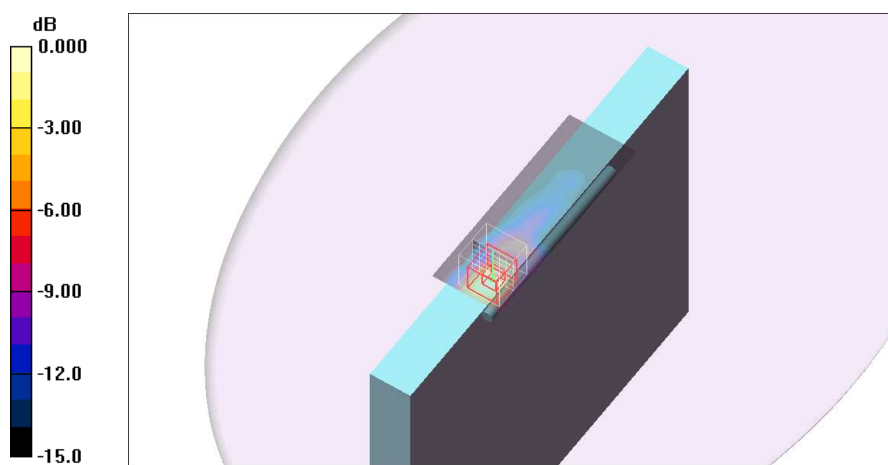

0 dB = 0.278mW/g

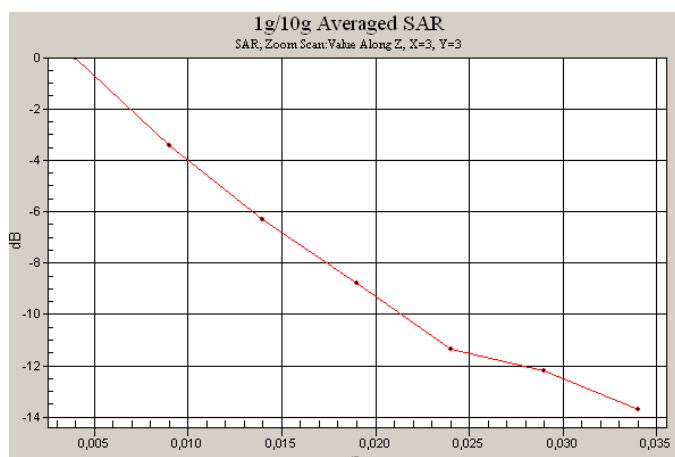

**2450 MHz Band – Secondary Landscape Mode, Chain C – 802.11n\* Channel 6**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 2450MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 2.02$  mho/m;  $\epsilon_r = 50.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: ES3DV3 - SN3052; ConvF(4.14, 4.14, 4.14); Calibrated: 22/10/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 03/02/2011
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 6/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.679 mW/g

**Chain C, 802.11n\*, Channel 6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 17.1 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 1.34 W/kg


**SAR(1 g) = 0.511 mW/g; SAR(10 g) = 0.206 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.604 mW/g

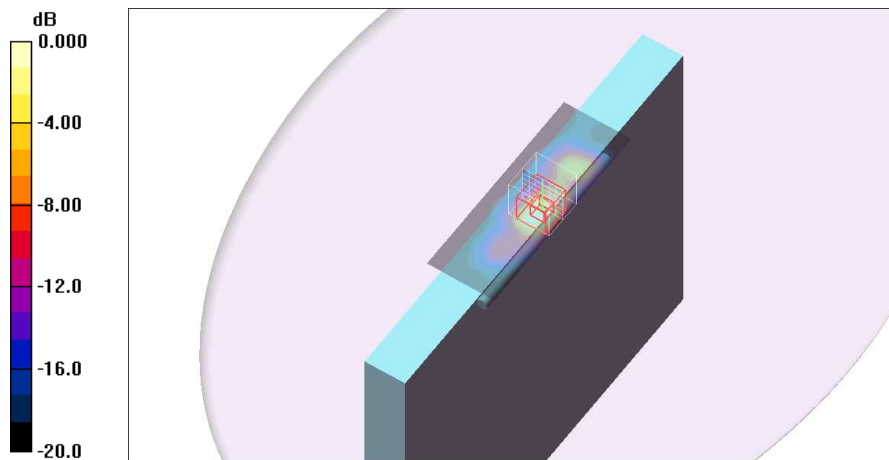

0 dB = 0.604mW/g

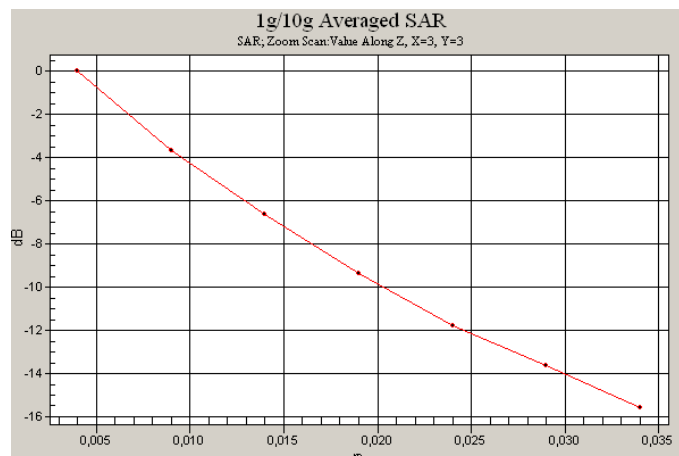



**5200 MHz Band – Lapheld Mode, Chain A – 802.11n\* Channel 38**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - LapHeld**

Communication System: 802.11; Frequency: 5190 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5190$  MHz;  $\sigma = 5.15$  mho/m;  $\epsilon_r = 48.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 38/Area Scan (61x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.212 mW/g

**Chain A, 802.11n\*, Channel 38/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 5.77 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.261 W/kg


**SAR(1 g) = 0.211 mW/g; SAR(10 g) = 0.173 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.254 mW/g

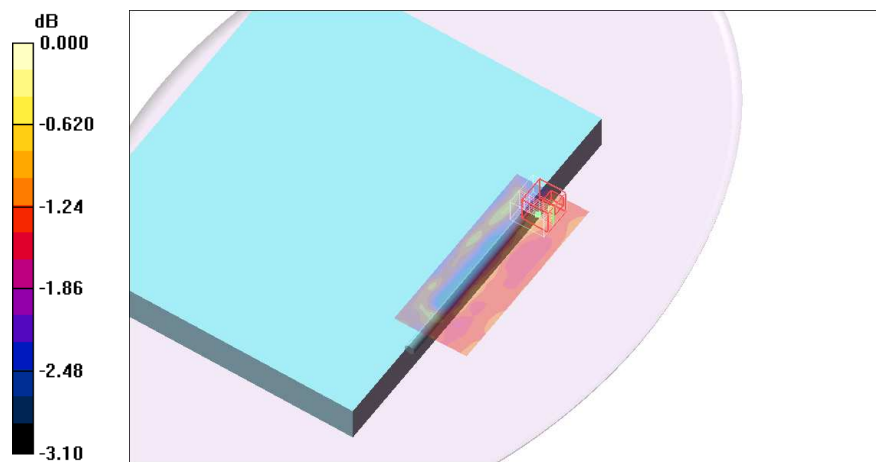

0 dB = 0.254mW/g

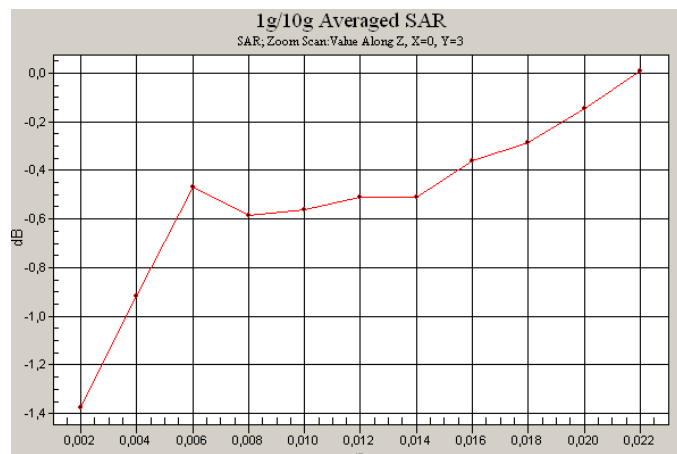

**5200 MHz Band – Lapheld Mode, Chain B – 802.11n\* Channel 46**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - LapHeld**

Communication System: 802.11; Frequency: 5230 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5230$  MHz;  $\sigma = 5.17$  mho/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 46/Area Scan (61x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.218 mW/g

**Chain B, 802.11n\*, Channel 46/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 6.75 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.366 W/kg


**SAR(1 g) = 0.325 mW/g; SAR(10 g) = 0.275 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.357 mW/g

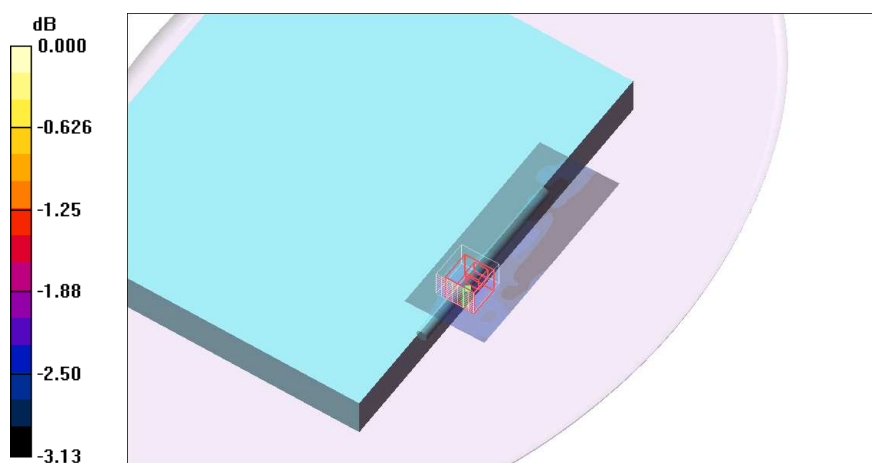

0 dB = 0.357mW/g

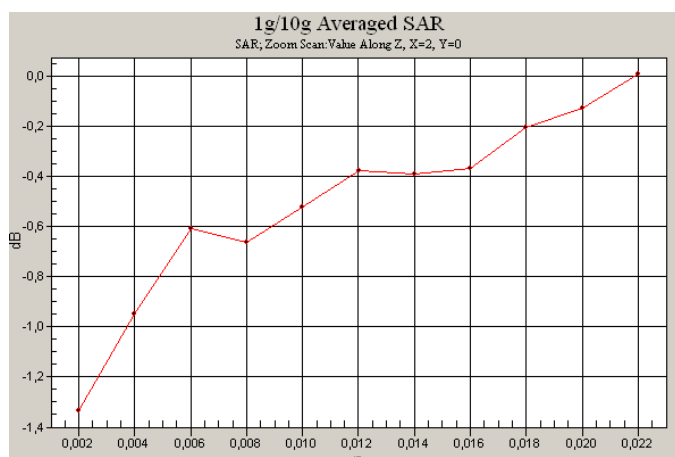

**5200 MHz Band – Lapheld Mode, Chain C – 802.11n\* Channel 62**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - LapHeld**

Communication System: 802.11; Frequency: 5310 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5310$  MHz;  $\sigma = 5.32$  mho/m;  $\epsilon_r = 48.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 62/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.227 mW/g

**Chain C, 802.11n\*, Channel 62/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 8.02 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.387 W/kg


**SAR(1 g) = 0.337 mW/g; SAR(10 g) = 0.270 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.382 mW/g

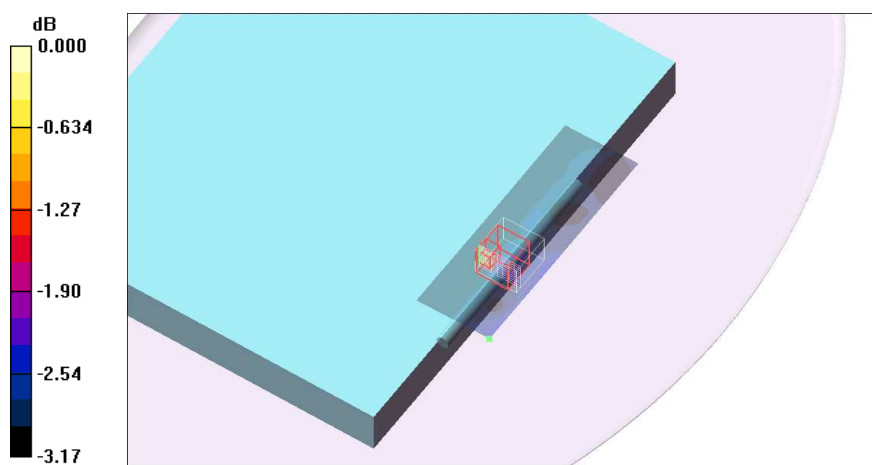

0 dB = 0.382mW/g

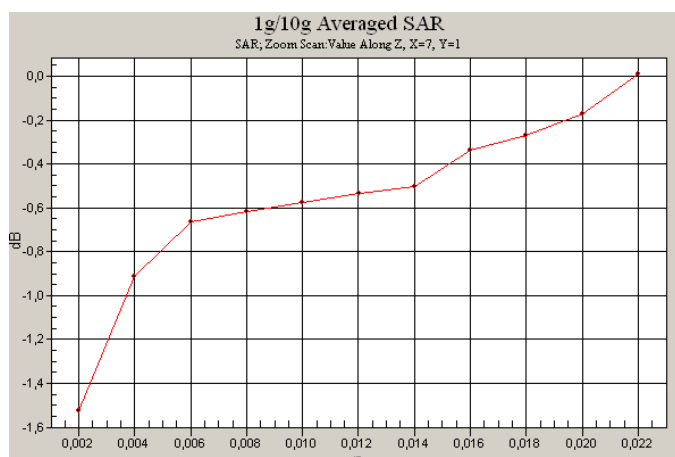

**5200 MHz Band – Primary Portrait Mode, Chain B – 802.11n\* Channel 46**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Primary Portrait**

Communication System: 802.11; Frequency: 5230 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5230$  MHz;  $\sigma = 5.17$  mho/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 46/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.504 mW/g

**Chain B, 802.11n\*, Channel 46/Zoom Scan 2 (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 8.69 V/m; Power Drift = -0.186 dB

Peak SAR (extrapolated) = 1.75 W/kg


**SAR(1 g) = 0.400 mW/g; SAR(10 g) = 0.272 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.614 mW/g

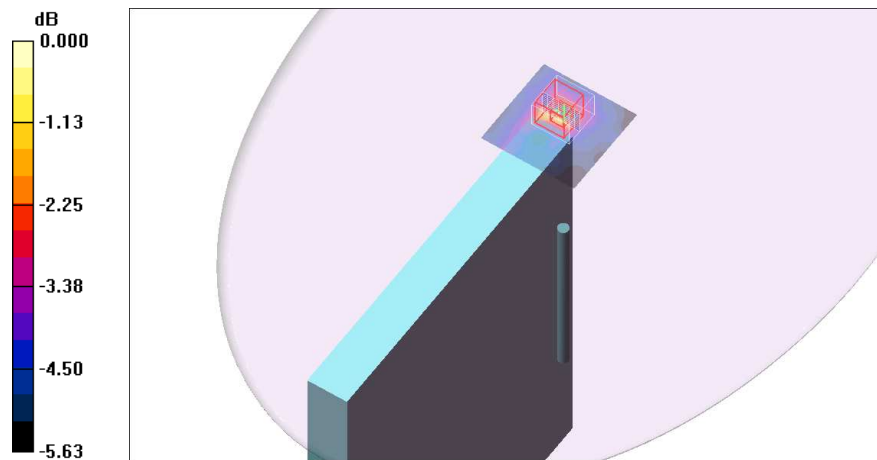

0 dB = 0.614mW/g

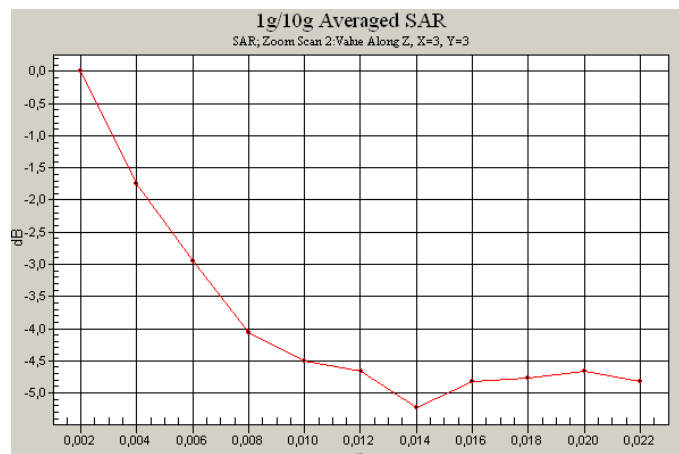

**5200 MHz Band – Secondary Portrait Mode, Chain A – 802.11n\* Channel 38**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Portrait**

Communication System: 802.11; Frequency: 5190 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5190$  MHz;  $\sigma = 5.15$  mho/m;  $\epsilon_r = 48.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 38/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.770 mW/g

**Chain A, 802.11n\*, Channel 38/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 12.8 V/m; Power Drift = 0.142 dB

Peak SAR (extrapolated) = 2.13 W/kg


**SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.327 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.963 mW/g

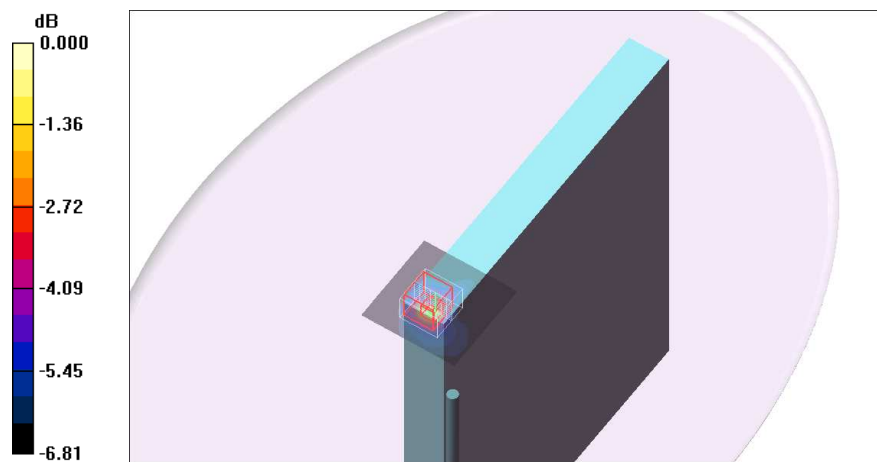

0 dB = 0.963mW/g

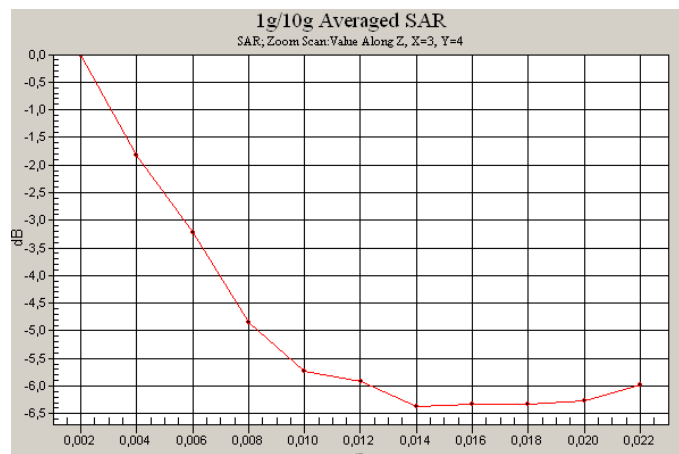

**5200 MHz Band – Secondary Portrait Mode, Chain C – 802.11n\* Channel 62**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Portrait**

Communication System: 802.11; Frequency: 5310 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5310$  MHz;  $\sigma = 5.32$  mho/m;  $\epsilon_r = 48.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 62/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.231 mW/g

**Chain C, 802.11n\*, Channel 62/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm



Reference Value = 6.91 V/m; Power Drift = 0.156 dB

Peak SAR (extrapolated) = 0.314 W/kg

**SAR(1 g) = 0.271 mW/g; SAR(10 g) = 0.240 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.313 mW/g

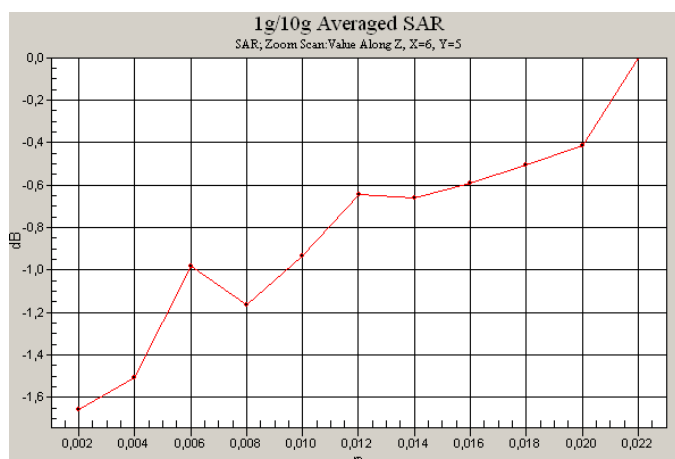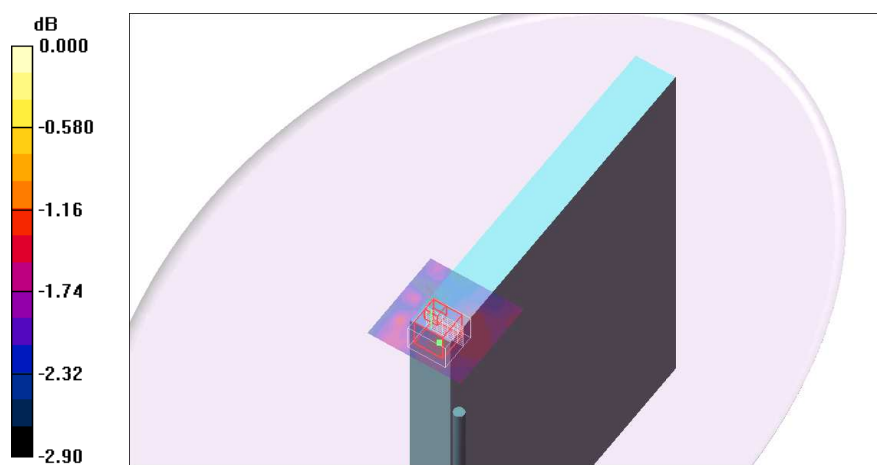

**5200 MHz Band – Secondary Landscape Mode, Chain A – 802.11n\* Channel 38**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5190 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5190$  MHz;  $\sigma = 5.15$  mho/m;  $\epsilon_r = 48.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 38/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.10 mW/g

**Chain A, 802.11n\*, Channel 38/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 14.2 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 4.12 W/kg


**SAR(1 g) = 0.867 mW/g; SAR(10 g) = 0.387 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.67 mW/g

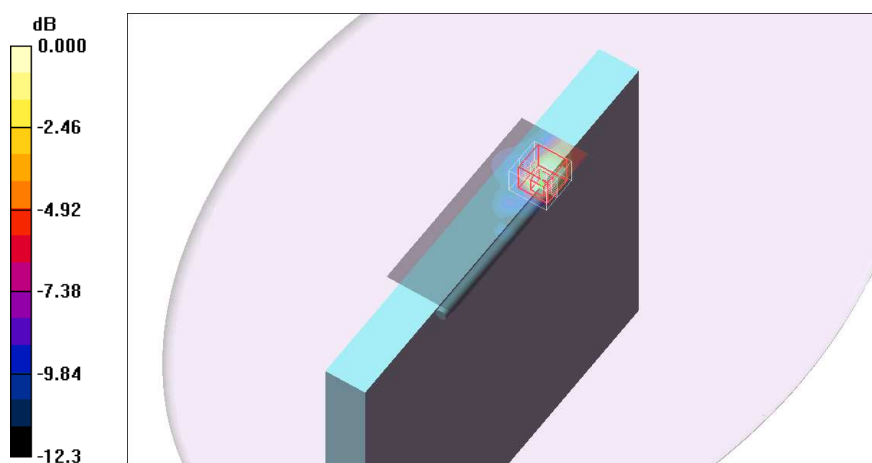

0 dB = 1.67mW/g

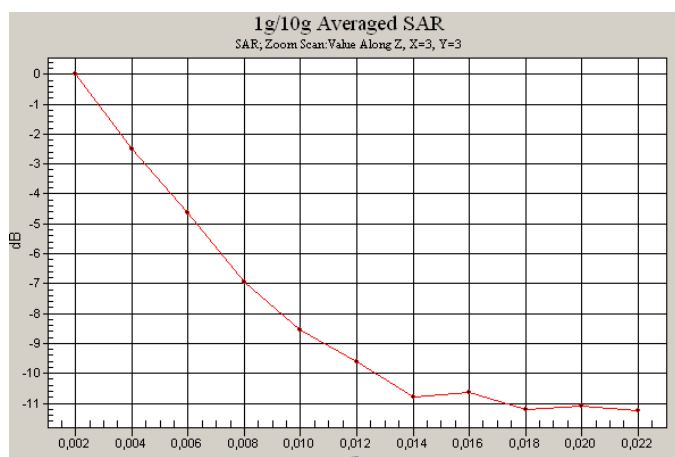

**5200 MHz Band – Secondary Landscape Mode, Chain A – 802.11n\* Channel 46**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5230 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5230$  MHz;  $\sigma = 5.17$  mho/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 46/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.87 mW/g

**Chain A, 802.11n\*, Channel 46/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 13.2 V/m; Power Drift = -0.308 dB

Peak SAR (extrapolated) = 3.72 W/kg


**SAR(1 g) = 0.858 mW/g; SAR(10 g) = 0.385 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.60 mW/g

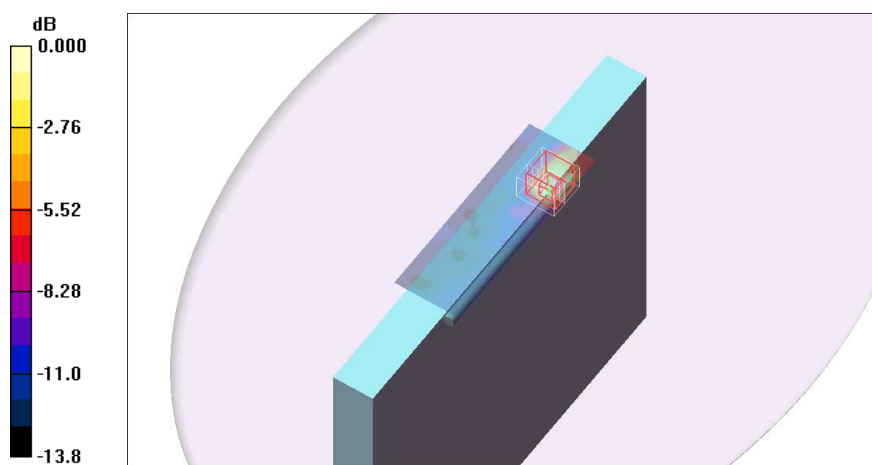

0 dB = 1.60mW/g

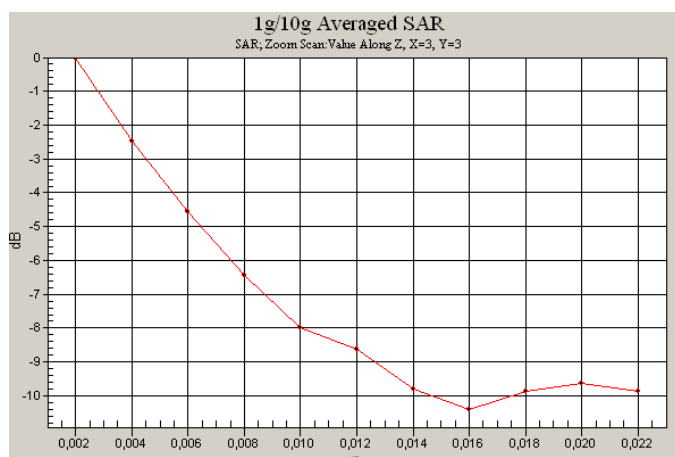



**5200 MHz Band – Secondary Landscape Mode, Chain A – 802.11n\* Channel 54**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5270 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5270$  MHz;  $\sigma = 5.22$  mho/m;  $\epsilon_r = 48.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 54/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.96 mW/g

**Chain A, 802.11n\*, Channel 54/Zoom Scan 2 (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 14.0 V/m; Power Drift = -0.246 dB

Peak SAR (extrapolated) = 3.69 W/kg


**SAR(1 g) = 0.899 mW/g; SAR(10 g) = 0.421 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.68 mW/g

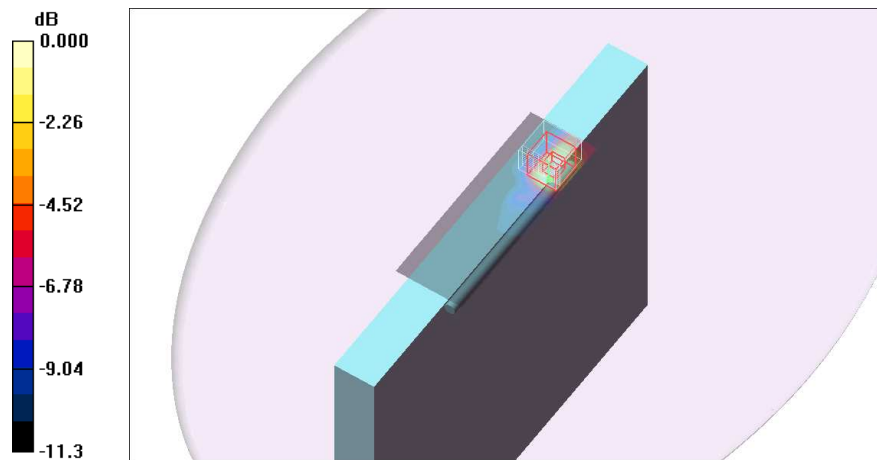

0 dB = 1.63mW/g

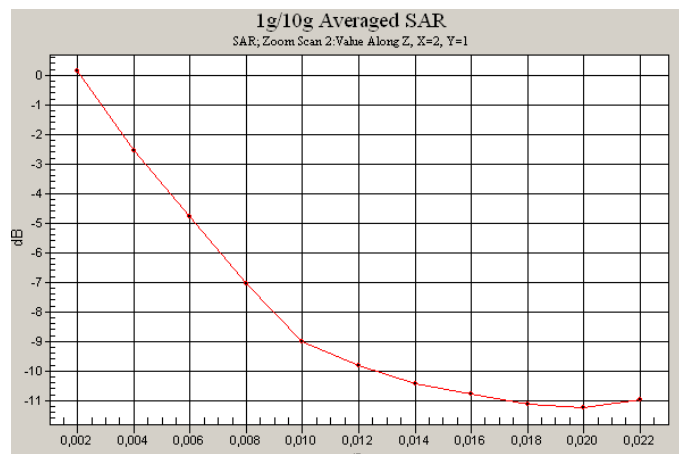

**5200 MHz Band – Secondary Landscape Mode, Chain A – 802.11n\* Channel 62**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5310 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5310$  MHz;  $\sigma = 5.32$  mho/m;  $\epsilon_r = 48.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 62/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.62 mW/g

**Chain A, 802.11n\*, Channel 62/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 14.9 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 3.38 W/kg


**SAR(1 g) = 0.777 mW/g; SAR(10 g) = 0.330 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.50 mW/g

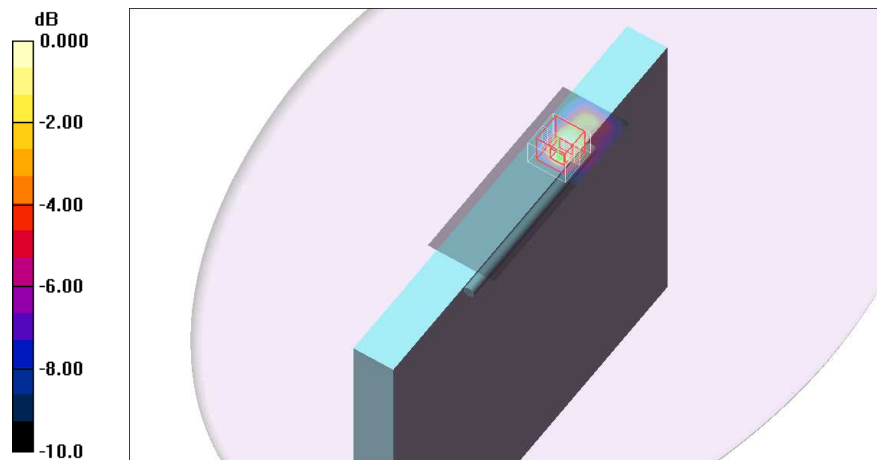

0 dB = 1.50mW/g

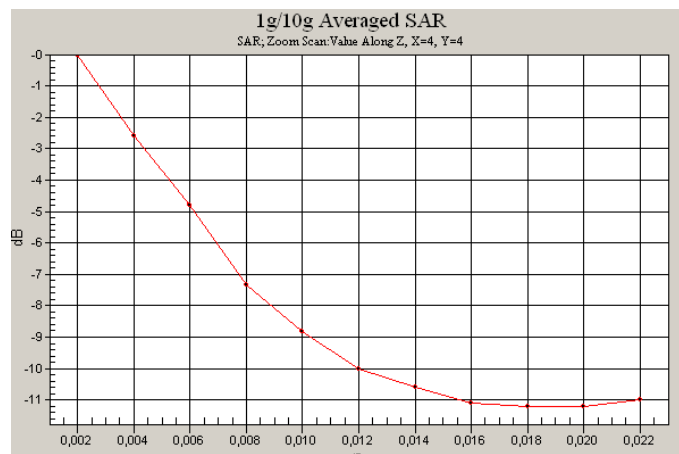

**5200 MHz Band – Secondary Landscape Mode, Chain B – 802.11n\* Channel 38**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5190 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5190$  MHz;  $\sigma = 5.05$  mho/m;  $\epsilon_r = 48.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 38/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.80 mW/g

**Chain B, 802.11n\*, Channel 38/Zoom Scan 2 (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 13.4 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 4.45 W/kg


**SAR(1 g) = 0.953 mW/g; SAR(10 g) = 0.334 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.15 mW/g

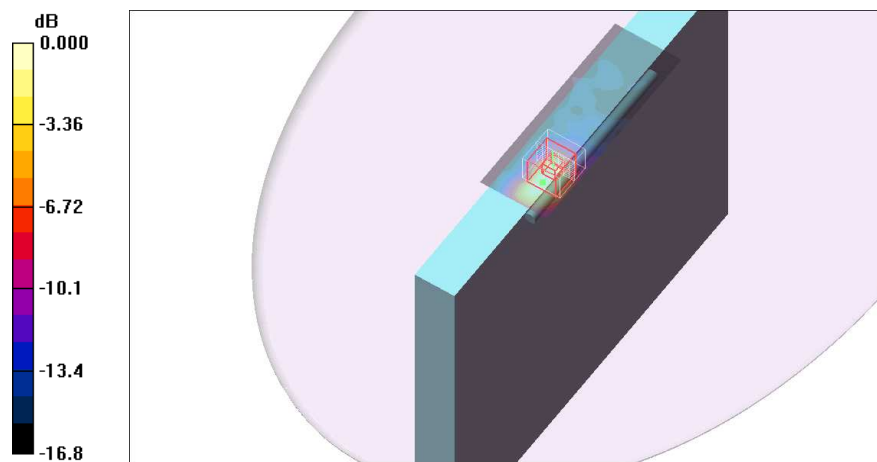

0 dB = 1.92mW/g

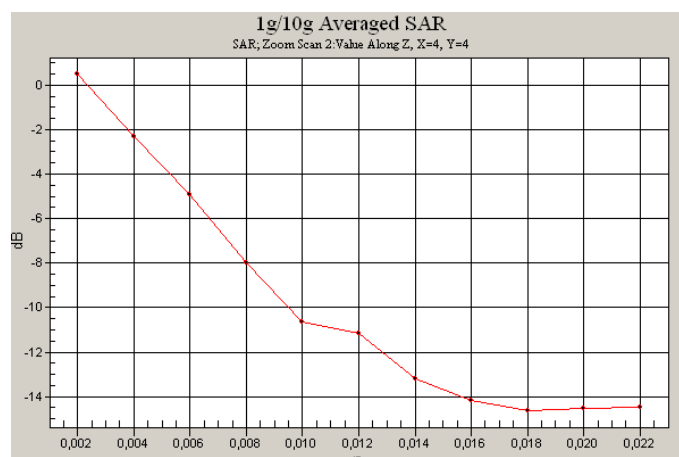

**5200 MHz Band – Secondary Landscape Mode, Chain B – 802.11n\* Channel 46**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5230 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5230$  MHz;  $\sigma = 5.17$  mho/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 46/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.60 mW/g

**Chain B, 802.11n\*, Channel 46/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 17.8 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 3.78 W/kg


**SAR(1 g) = 0.825 mW/g; SAR(10 g) = 0.344 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.65 mW/g

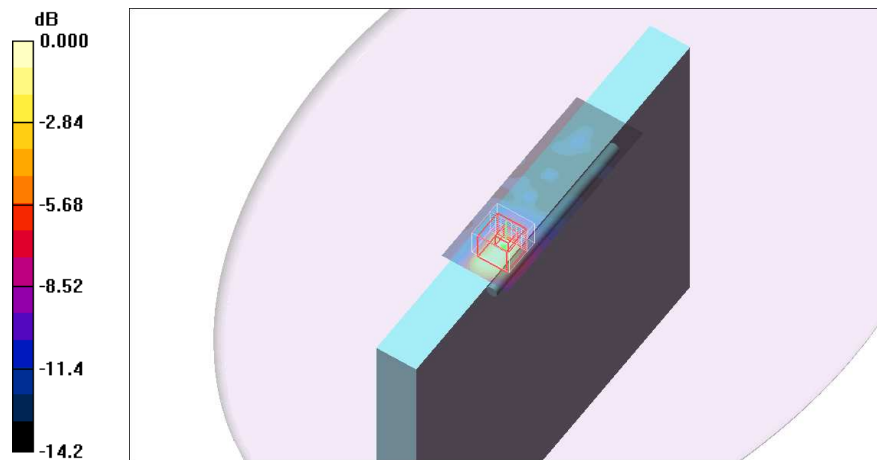

0 dB = 1.65mW/g

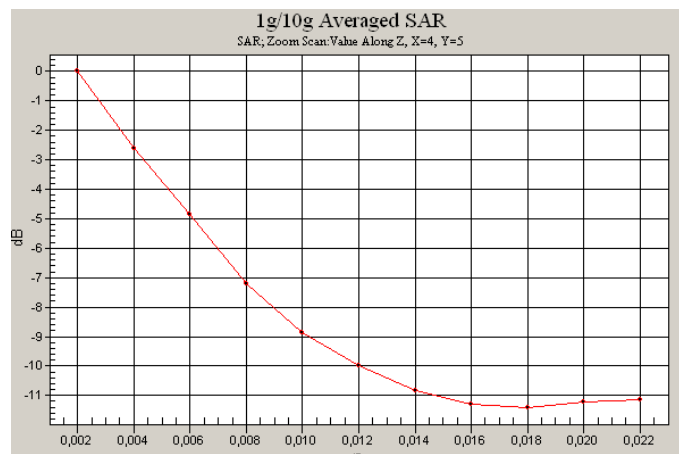

**5200 MHz Band – Secondary Landscape Mode, Chain B – 802.11n\* Channel 54**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5270 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5270 \text{ MHz}$ ;  $\sigma = 5.15 \text{ mho/m}$ ;  $\epsilon_r = 47.8$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 54/Area Scan (51x151x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.31 mW/g

**Chain B, 802.11n\*, Channel 54/Zoom Scan 2 (8x8x11)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$


Reference Value = 11.6 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 3.03 W/kg


**SAR(1 g) = 0.675 mW/g; SAR(10 g) = 0.286 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.46 mW/g

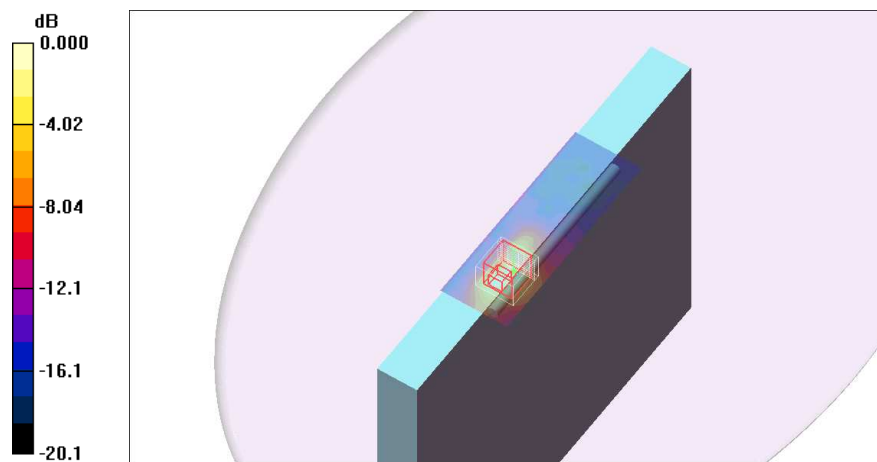

0 dB = 1.46mW/g

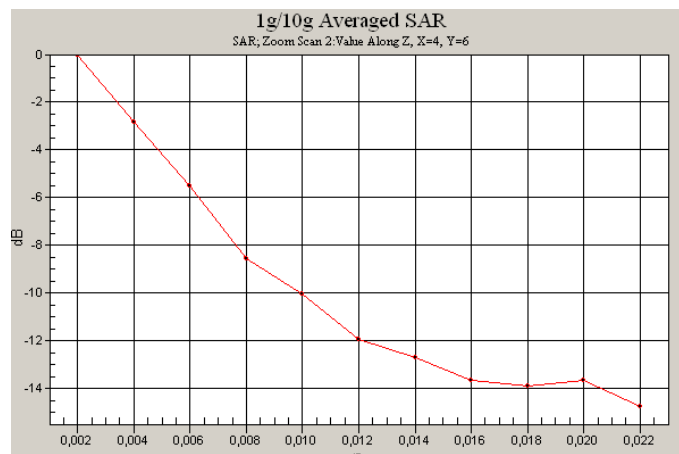

**5200 MHz Band – Secondary Landscape Mode, Chain B – 802.11n\* Channel 62**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5310 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5310$  MHz;  $\sigma = 5.23$  mho/m;  $\epsilon_r = 47.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 62/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.57 mW/g

**Chain B, 802.11n\*, Channel 62/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 12.7 V/m; Power Drift = 0.231 dB

Peak SAR (extrapolated) = 3.82 W/kg


**SAR(1 g) = 0.751 mW/g; SAR(10 g) = 0.289 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.70 mW/g

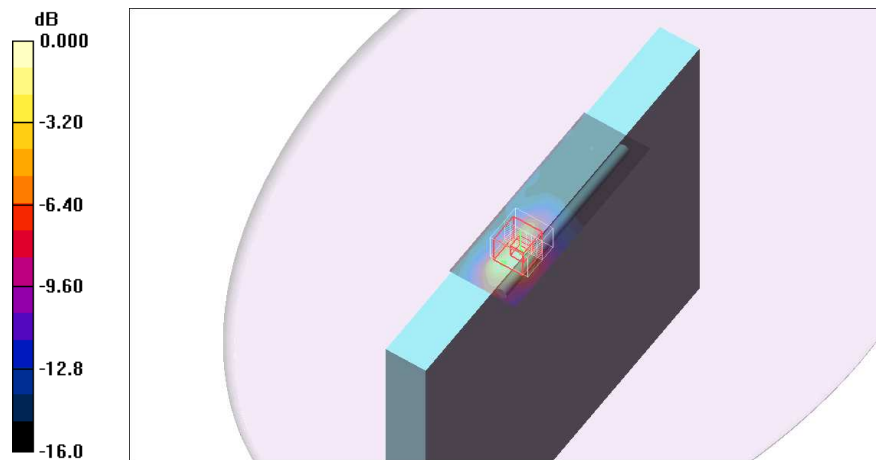

0 dB = 1.70mW/g

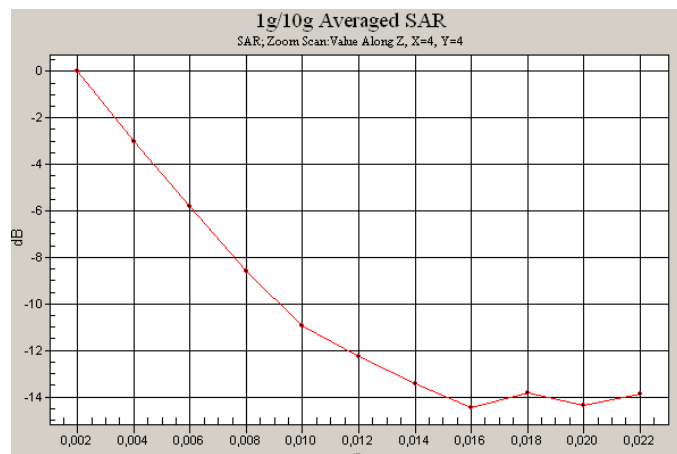

**5200 MHz Band – Secondary Landscape Mode, Chain C – 802.11n\* Channel 38**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5190 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5190$  MHz;  $\sigma = 5.05$  mho/m;  $\epsilon_r = 48.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 38/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.49 mW/g

**Chain C, 802.11n\*, Channel 38/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 12.2 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 2.42 W/kg


**SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.260 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.22 mW/g

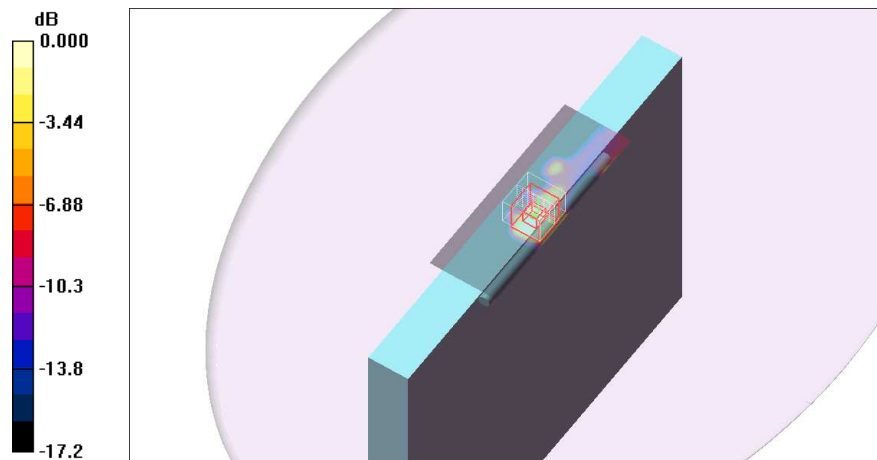

0 dB = 1.22mW/g

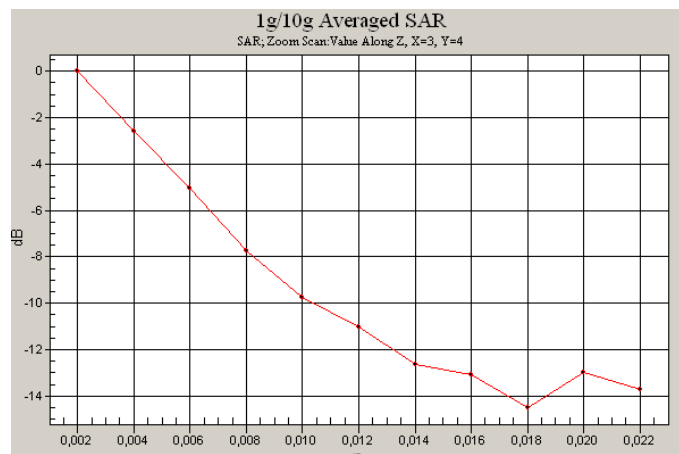

**5200 MHz Band – Secondary Landscape Mode, Chain C – 802.11n\* Channel 46**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5230 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5230$  MHz;  $\sigma = 5.08$  mho/m;  $\epsilon_r = 48$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 46/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.80 mW/g

**Chain C, 802.11n\*, Channel 46/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 12.8 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 2.80 W/kg


**SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.296 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.40 mW/g

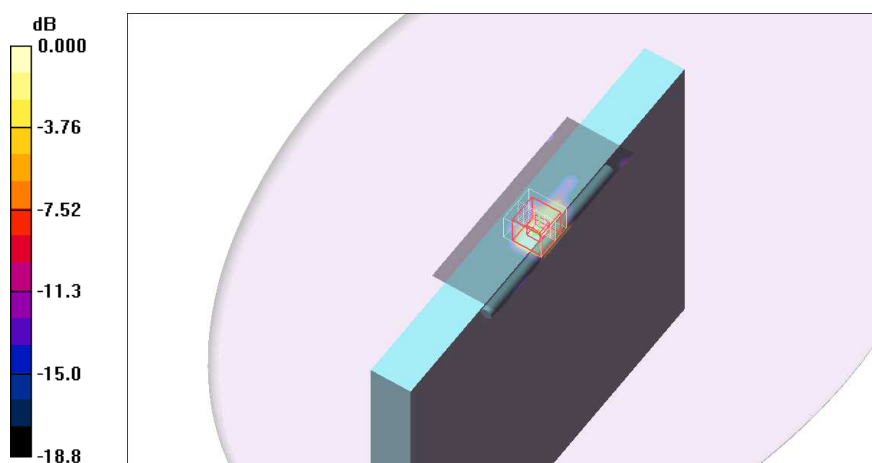

0 dB = 1.40mW/g

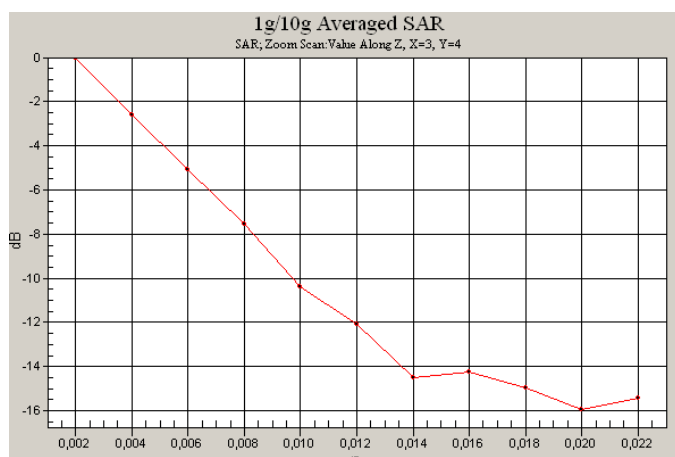



**5200 MHz Band – Secondary Landscape Mode, Chain C – 802.11n\* Channel 54**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5270 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5270$  MHz;  $\sigma = 5.15$  mho/m;  $\epsilon_r = 47.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 54/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.57 mW/g

**Chain C, 802.11n\*, Channel 54/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 13.1 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 2.93 W/kg


**SAR(1 g) = 0.773 mW/g; SAR(10 g) = 0.314 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.49 mW/g

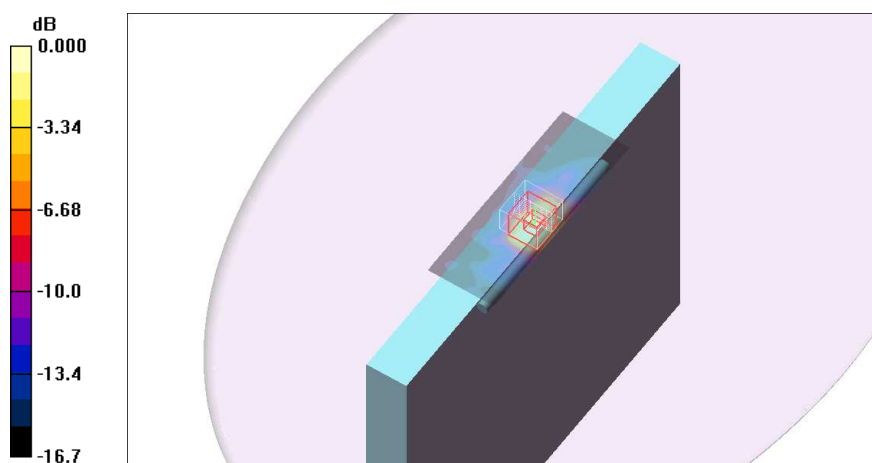

0 dB = 1.49mW/g

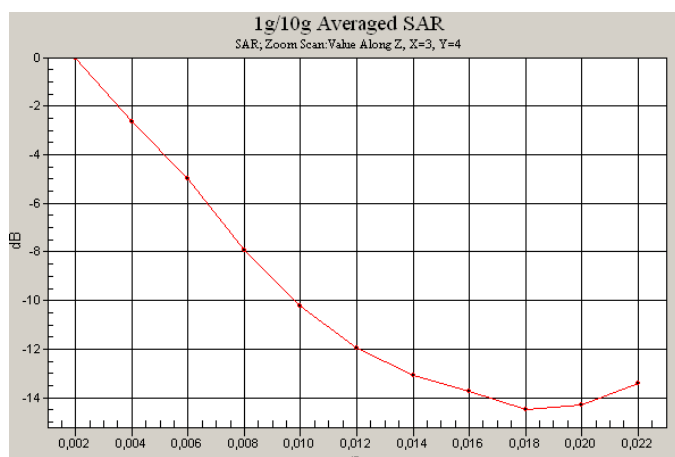

**5200 MHz Band – Secondary Landscape Mode, Chain C – 802.11n\* Channel 62**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5310 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5310$  MHz;  $\sigma = 5.32$  mho/m;  $\epsilon_r = 48.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(4.08, 4.08, 4.08); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 62/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.63 mW/g

**Chain C, 802.11n\*, Channel 62/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 16.0 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 3.15 W/kg


**SAR(1 g) = 0.779 mW/g; SAR(10 g) = 0.340 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.45 mW/g

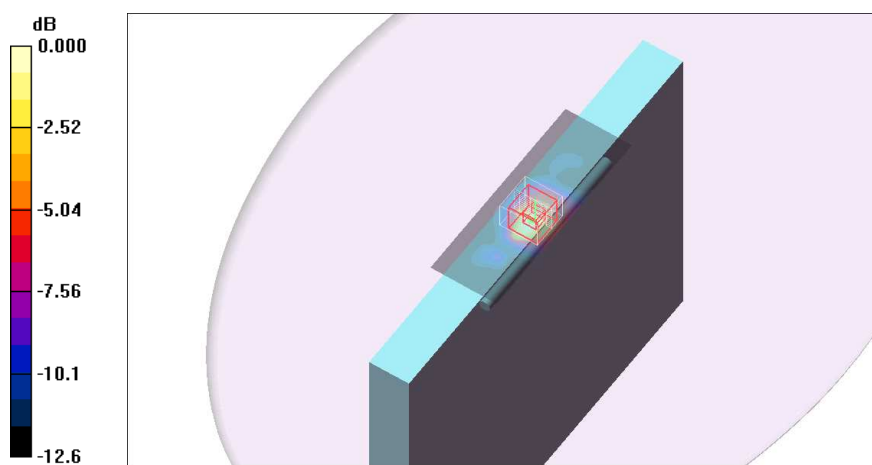

0 dB = 1.45mW/g

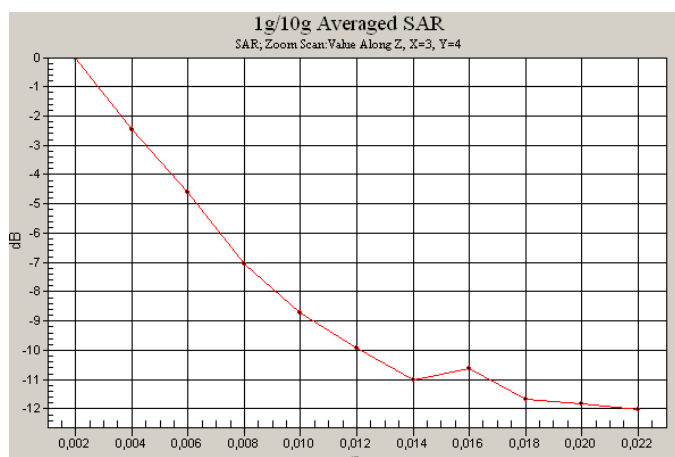

**5600 MHz Band – Lapheld Mode, Chain A – 802.11n\* Channel 134**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - LapHeld**

Communication System: 802.11; Frequency: 5670 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5670$  MHz;  $\sigma = 5.81$  mho/m;  $\epsilon_r = 47.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 134/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.399 mW/g

**Chain A, 802.11n\*, Channel 134/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 8.67 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.530 W/kg


**SAR(1 g) = 0.482 mW/g; SAR(10 g) = 0.433 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.530 mW/g

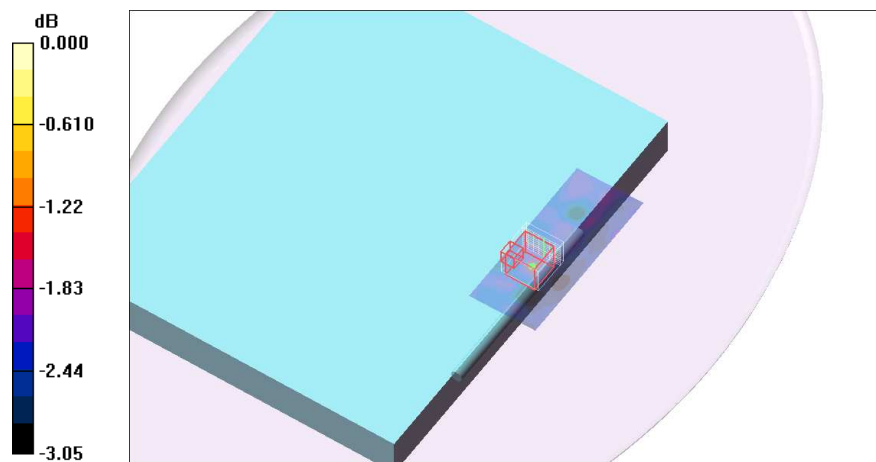

0 dB = 0.530mW/g

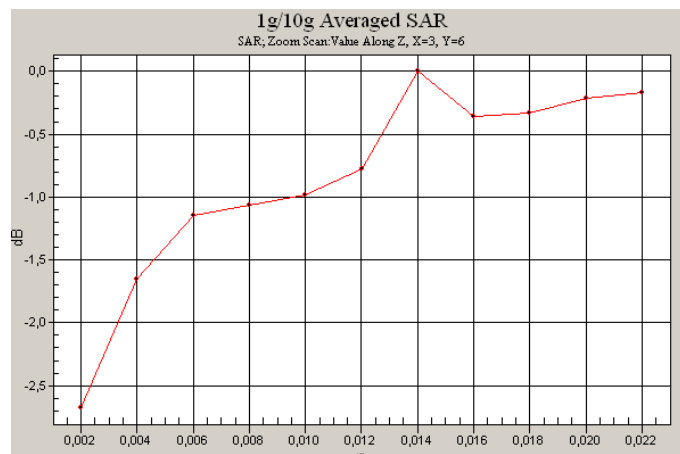

**5600 MHz Band – Lapheld Mode, Chain B – 802.11n\* Channel 102**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - LapHeld**

Communication System: 802.11; Frequency: 5510 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5510$  MHz;  $\sigma = 5.56$  mho/m;  $\epsilon_r = 47.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 102 2/Area Scan (61x171x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.338 mW/g

**Chain B, 802.11n\*, Channel 102 2/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 8.13 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.487 W/kg


**SAR(1 g) = 0.404 mW/g; SAR(10 g) = 0.365 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.487 mW/g

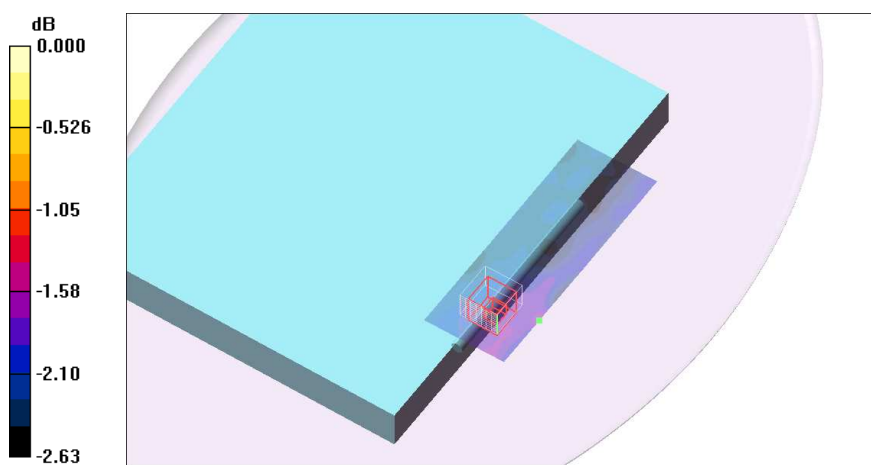

0 dB = 0.487mW/g

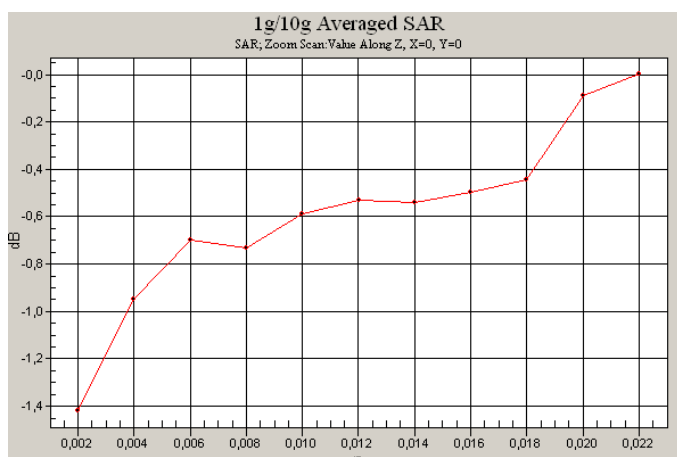

**5600 MHz Band – Lapheld Mode, Chain C – 802.11n\* Channel 102**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - LapHeld**

Communication System: 802.11; Frequency: 5510 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5510$  MHz;  $\sigma = 5.56$  mho/m;  $\epsilon_r = 47.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 102/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.319 mW/g

**Chain C, 802.11n\*, Channel 102/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.66 V/m; Power Drift = -0.183 dB

Peak SAR (extrapolated) = 0.353 W/kg


**SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.279 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.350 mW/g

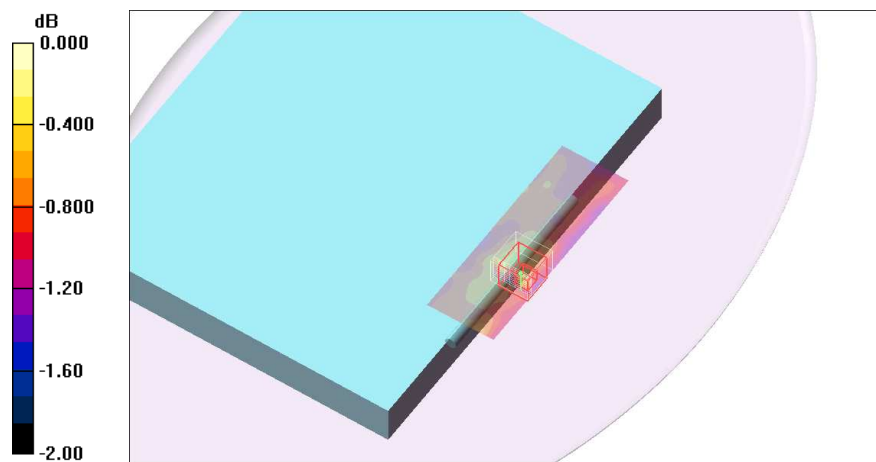

0 dB = 0.350mW/g

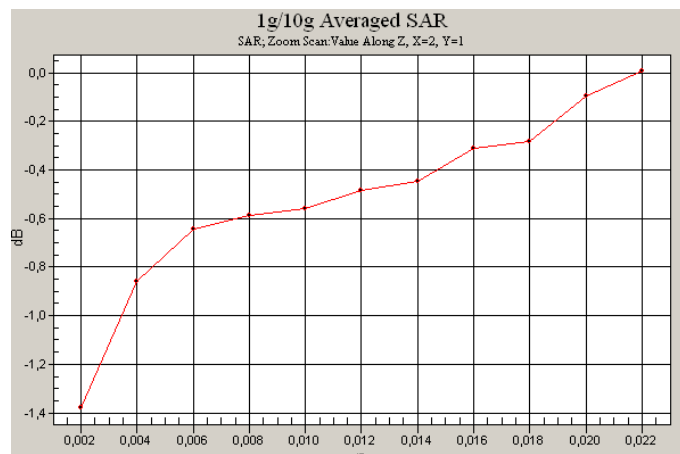

**5600 MHz Band – Primary Portrait Mode, Chain B – 802.11n\* Channel 102**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - PrimPortrait**

Communication System: 802.11; Frequency: 5510 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5510$  MHz;  $\sigma = 5.56$  mho/m;  $\epsilon_r = 47.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 102/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.408 mW/g

**Chain B, 802.11n\*, Channel 102/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 9.60 V/m; Power Drift = 0.252 dB

Peak SAR (extrapolated) = 0.973 W/kg


**SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.319 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.504 mW/g

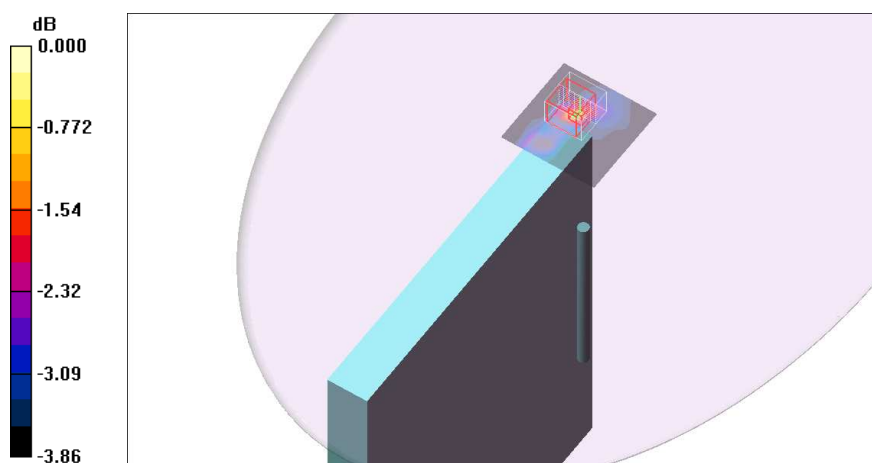

0 dB = 0.504mW/g

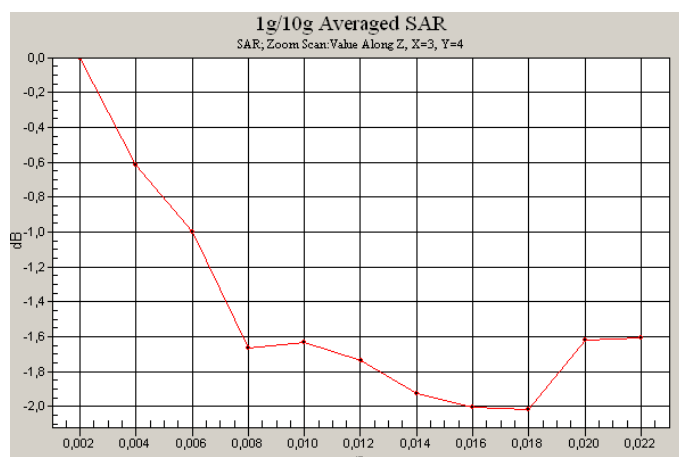

**5600 MHz Band – Secondary Portrait Mode, Chain A – 802.11n\* Channel 134**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - SecPortrait**

Communication System: 802.11; Frequency: 5670 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5670$  MHz;  $\sigma = 5.81$  mho/m;  $\epsilon_r = 47.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 134/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.480 mW/g

**Chain A, 802.11n\*, Channel 134/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 9.44 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.809 W/kg


**SAR(1 g) = 0.406 mW/g; SAR(10 g) = 0.351 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.483 mW/g

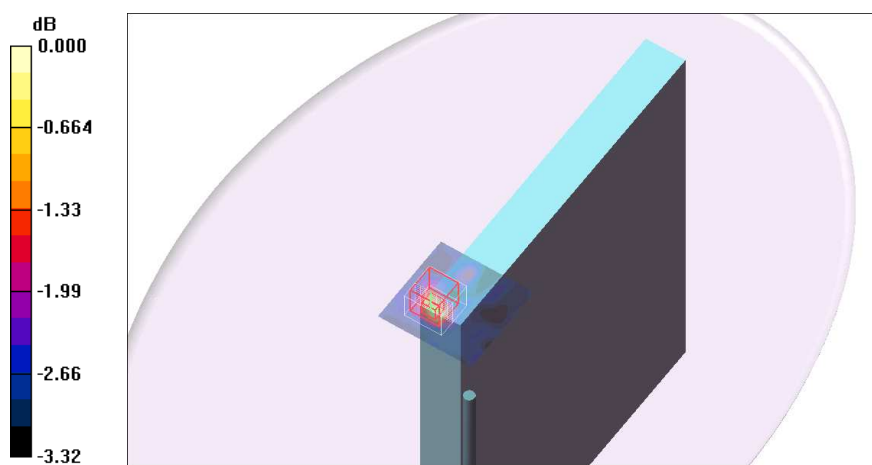

0 dB = 0.483mW/g

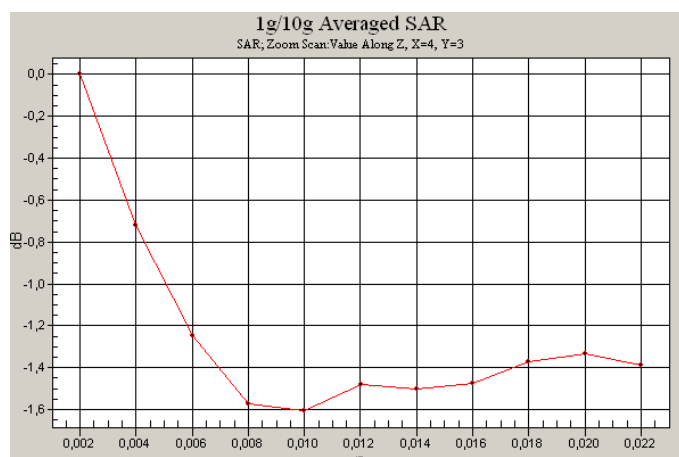

**5600 MHz Band – Secondary Portrait Mode, Chain C – 802.11n\* Channel 102**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - SecPortrait**

Communication System: 802.11; Frequency: 5510 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5510 \text{ MHz}$ ;  $\sigma = 5.56 \text{ mho/m}$ ;  $\epsilon_r = 47.8$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 102/Area Scan (71x71x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.328 mW/g

**Chain C, 802.11n\*, Channel 102/Zoom Scan (8x8x11)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$


Reference Value = 7.21 V/m; Power Drift = 0.280 dB

Peak SAR (extrapolated) = 0.359 W/kg


**SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.266 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.359 mW/g

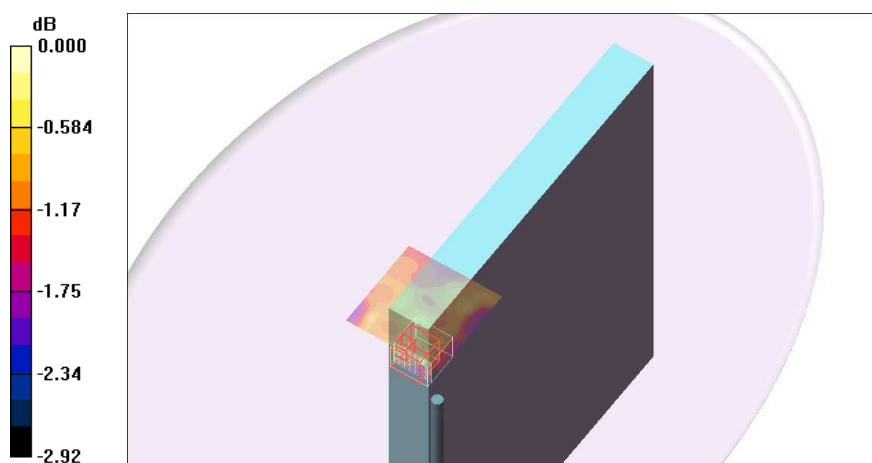

0 dB = 0.359mW/g

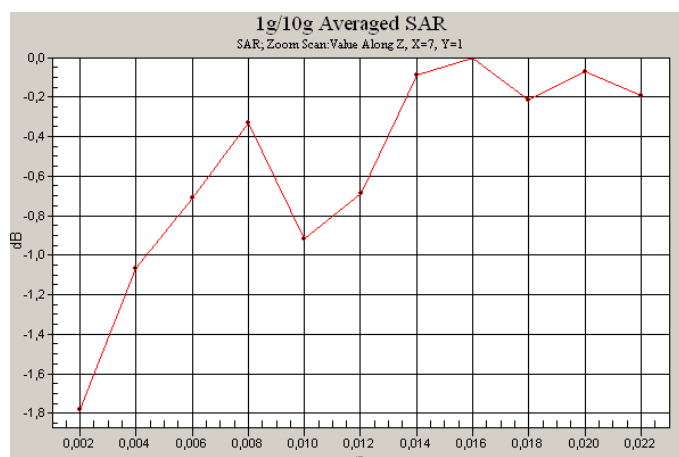



**5600 MHz Band – Secondary Landscape Mode, Chain A – 802.11n\* Channel 102**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5510 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5510$  MHz;  $\sigma = 5.47$  mho/m;  $\epsilon_r = 47.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 102/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.51 mW/g

**Chain A, 802.11n\*, Channel 102/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 14.1 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 2.93 W/kg


**SAR(1 g) = 0.774 mW/g; SAR(10 g) = 0.342 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.44 mW/g

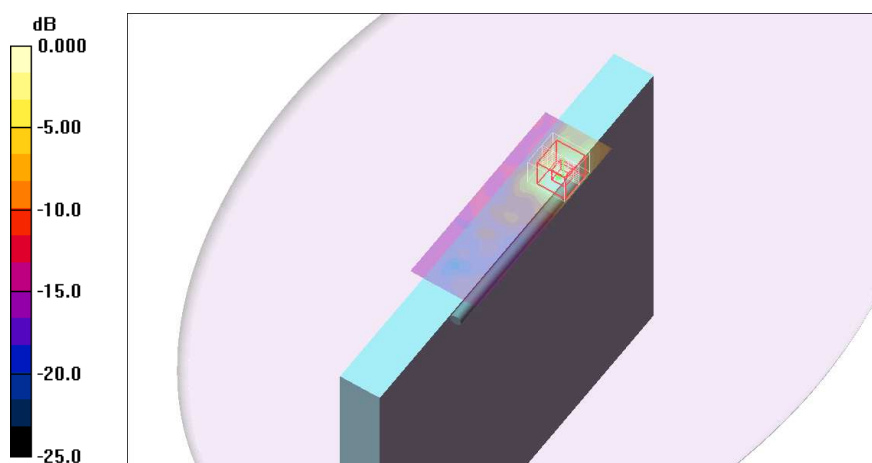

0 dB = 1.44mW/g

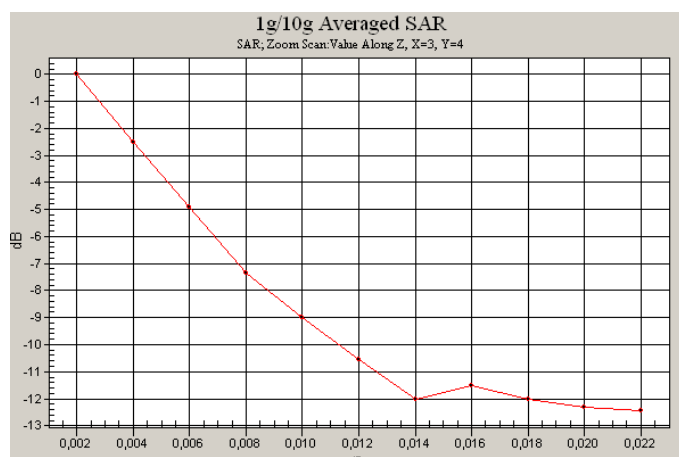

**5600 MHz Band – Secondary Landscape Mode, Chain A – 802.11n\* Channel 118**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5590 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5590$  MHz;  $\sigma = 5.6$  mho/m;  $\epsilon_r = 47.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 118/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.53 mW/g

**Chain A, 802.11n\*, Channel 118/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 12.7 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 2.87 W/kg


**SAR(1 g) = 0.712 mW/g; SAR(10 g) = 0.308 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.33 mW/g

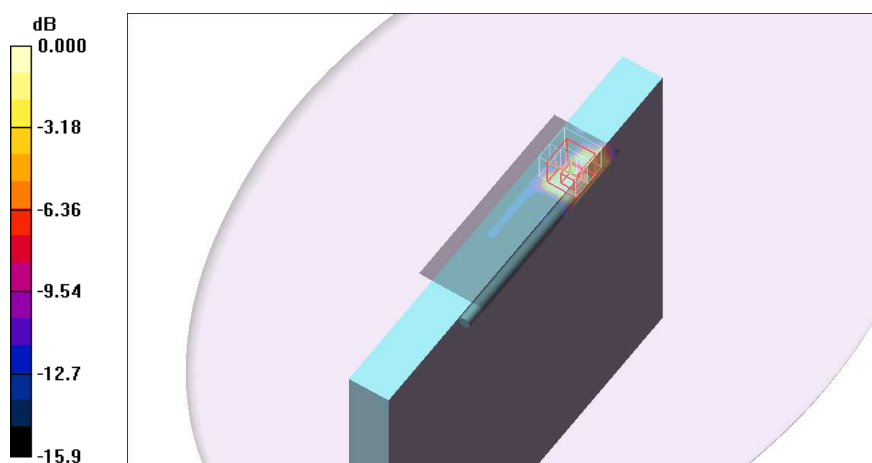

0 dB = 1.33mW/g

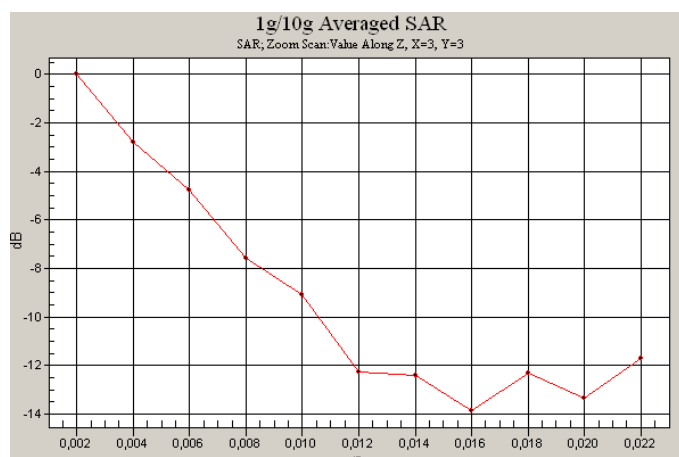

**5600 MHz Band – Secondary Landscape Mode, Chain A – 802.11n\* Channel 134**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5670 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5670$  MHz;  $\sigma = 5.81$  mho/m;  $\epsilon_r = 47.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 134/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.73 mW/g

**Chain A, 802.11n\*, Channel 134/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm



Reference Value = 8.95 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 4.41 W/kg

**SAR(1 g) = 0.855 mW/g; SAR(10 g) = 0.421 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.49 mW/g

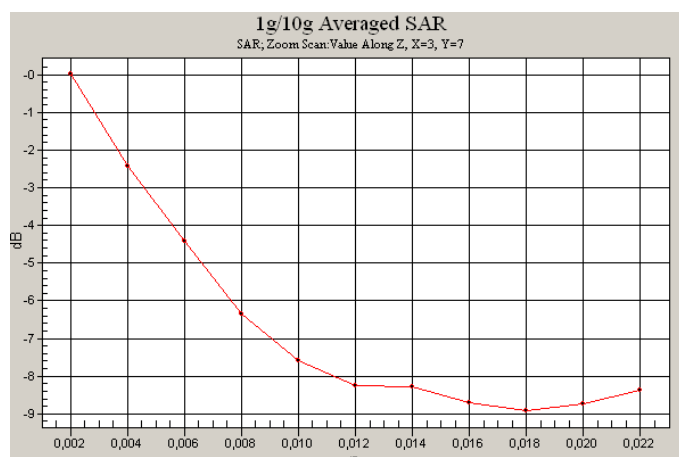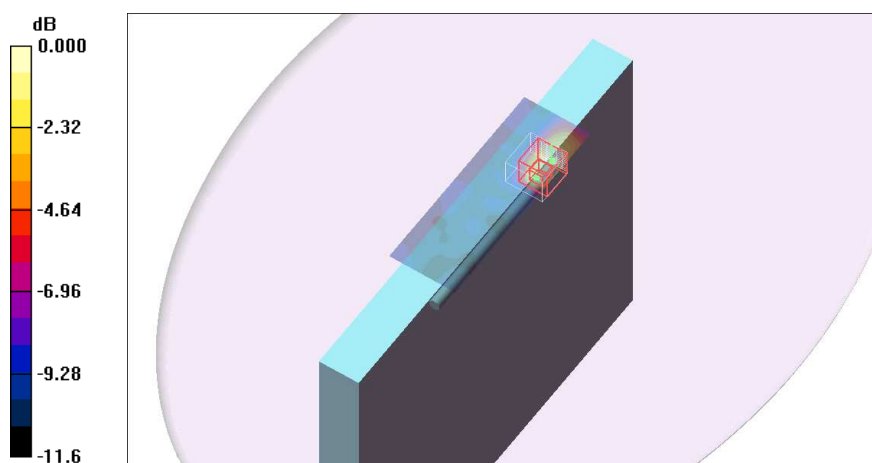

**5600 MHz Band – Secondary Landscape Mode, Chain B – 802.11n\* Channel 102**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5510 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5510$  MHz;  $\sigma = 5.56$  mho/m;  $\epsilon_r = 47.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 102/Area Scan (51x131x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.03 mW/g

**Chain B, 802.11n\*, Channel 102/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm



Reference Value = 10.4 V/m; Power Drift = 0.272 dB

Peak SAR (extrapolated) = 4.53 W/kg

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.507 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.95 mW/g

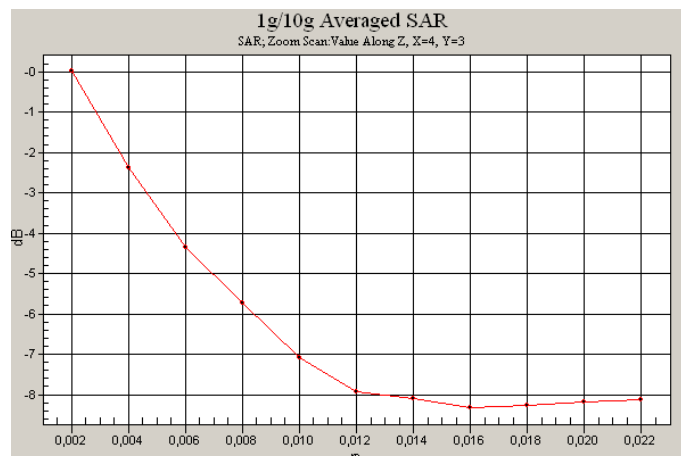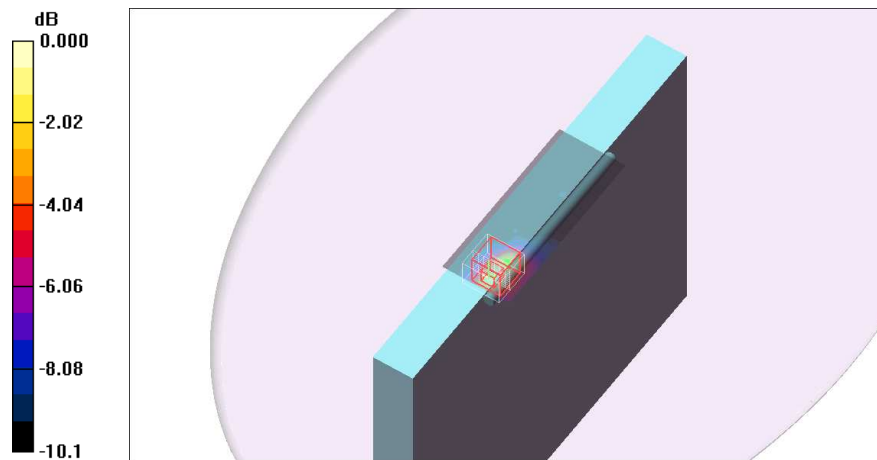

**5600 MHz Band – Secondary Landscape Mode, Chain B – 802.11n\* Channel 118**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5590 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5590$  MHz;  $\sigma = 5.6$  mho/m;  $\epsilon_r = 47.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 118/Area Scan (51x131x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.47 mW/g

**Chain B, 802.11n\*, Channel 118/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 10.5 V/m; Power Drift = 0.189 dB

Peak SAR (extrapolated) = 3.81 W/kg


**SAR(1 g) = 0.846 mW/g; SAR(10 g) = 0.318 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.68 mW/g

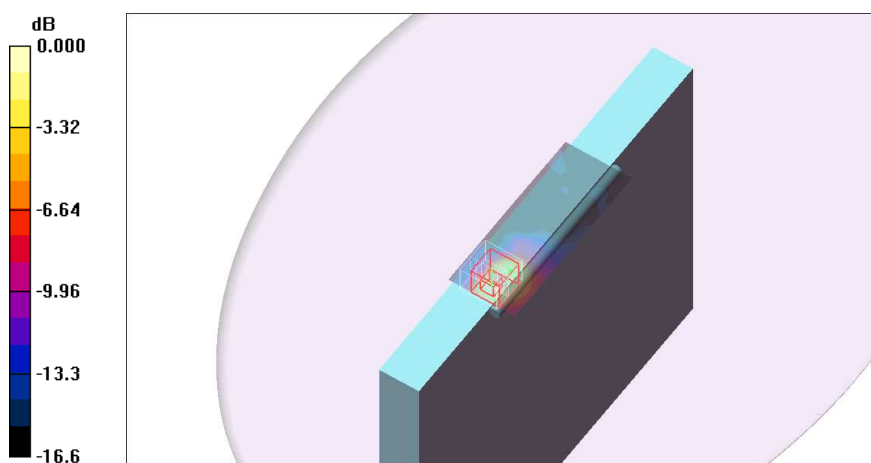

0 dB = 1.68mW/g

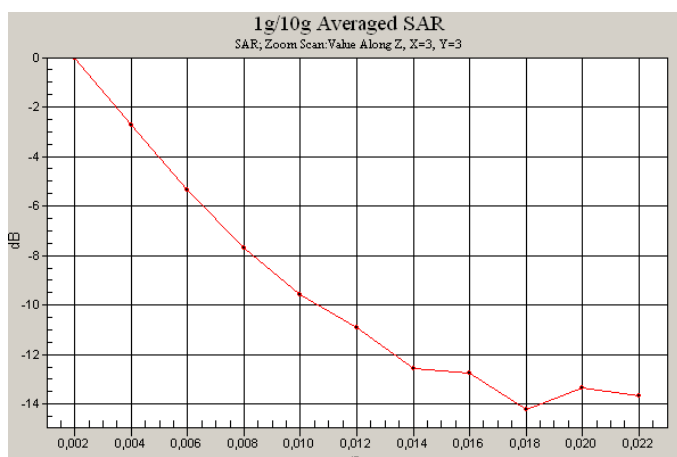

**5600 MHz Band – Secondary Landscape Mode, Chain B – 802.11n\* Channel 134**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5670 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5670$  MHz;  $\sigma = 5.74$  mho/m;  $\epsilon_r = 46.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 134/Area Scan (51x131x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.09 mW/g

**Chain B, 802.11n\*, Channel 134/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.54 V/m; Power Drift = 0.250 dB

Peak SAR (extrapolated) = 2.74 W/kg


**SAR(1 g) = 0.647 mW/g; SAR(10 g) = 0.254 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.30 mW/g

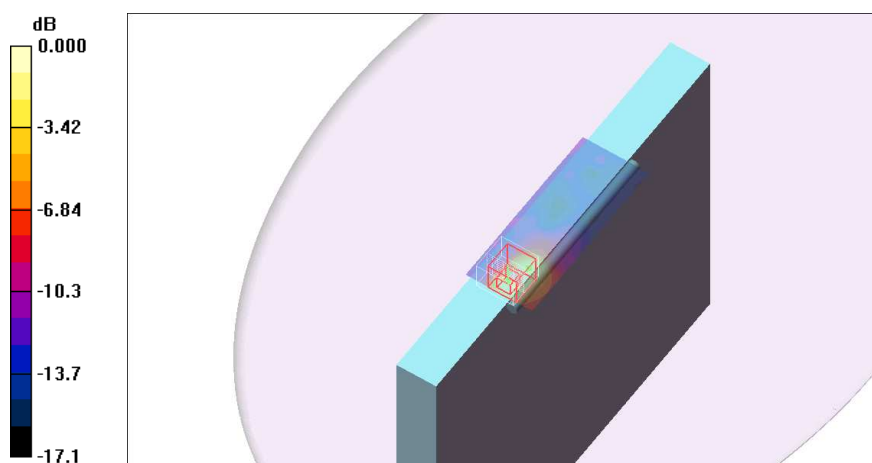

0 dB = 1.30mW/g

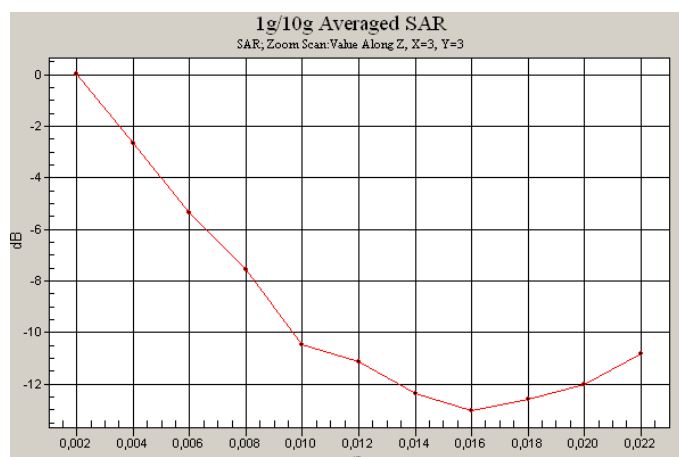

**5600 MHz Band – Secondary Landscape Mode, Chain C – 802.11n\* Channel 102**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5510 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5510$  MHz;  $\sigma = 5.56$  mho/m;  $\epsilon_r = 47.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 102/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.45 mW/g

**Chain C, 802.11n\*, Channel 102/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 11.9 V/m; Power Drift = -0.136 dB

Peak SAR (extrapolated) = 5.14 W/kg


**SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.504 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.22 mW/g

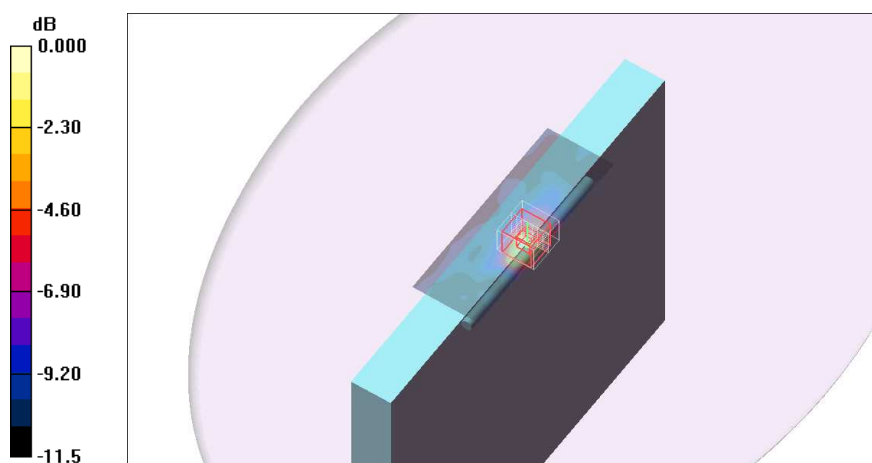

0 dB = 2.22mW/g

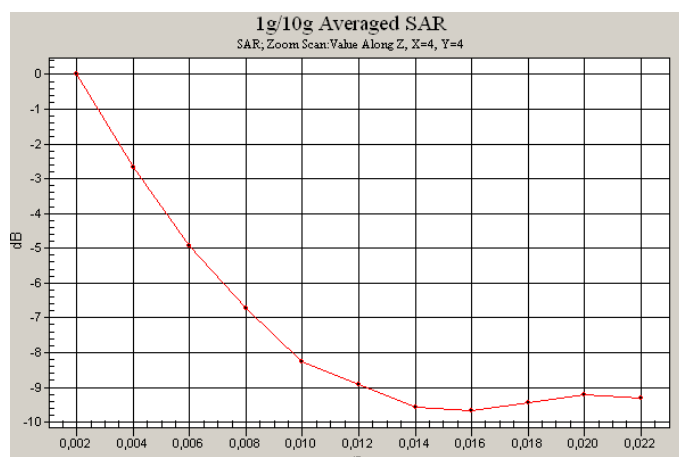

**5600 MHz Band – Secondary Landscape Mode, Chain C – 802.11n\* Channel 118**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5590 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5590$  MHz;  $\sigma = 5.6$  mho/m;  $\epsilon_r = 47.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 118/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.00 mW/g

**Chain C, 802.11n\*, Channel 118/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 15.2 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 5.93 W/kg


**SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.381 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.54 mW/g

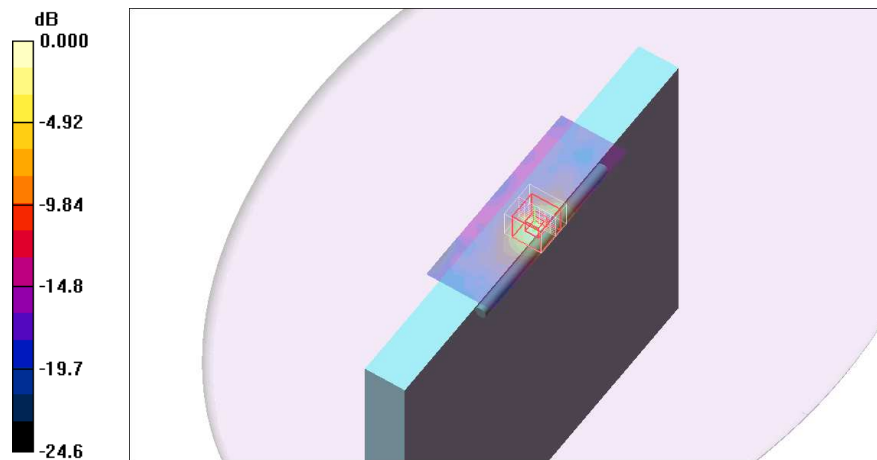

0 dB = 2.54mW/g

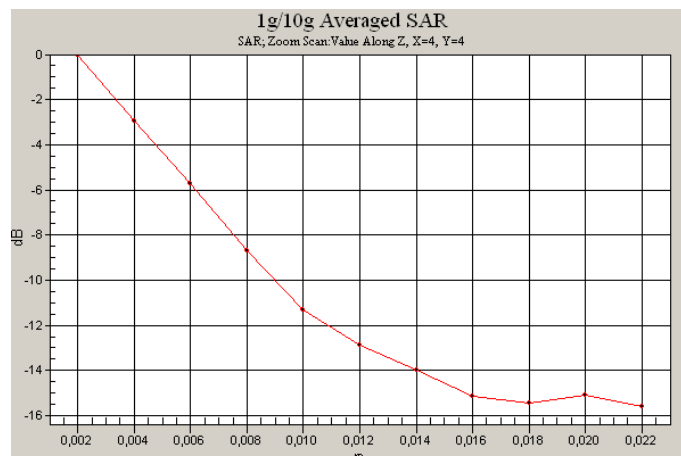



**5600 MHz Band – Secondary Landscape Mode, Chain C – 802.11n\* Channel 134**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5670 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5670$  MHz;  $\sigma = 5.74$  mho/m;  $\epsilon_r = 46.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.43, 3.43, 3.43); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 134/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.61 mW/g

**Chain C, 802.11n\*, Channel 134/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm



Reference Value = 15.1 V/m; Power Drift = 0.093 dB

Peak SAR (extrapolated) = 7.50 W/kg

**SAR(1 g) = 1.45 mW/g; SAR(10 g) = 0.466 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.27 mW/g

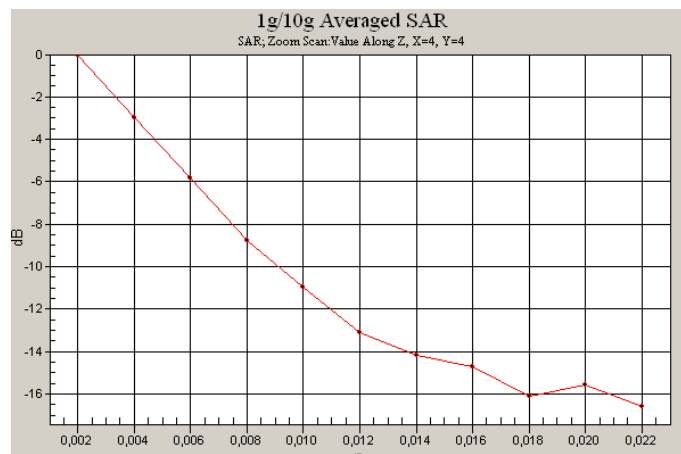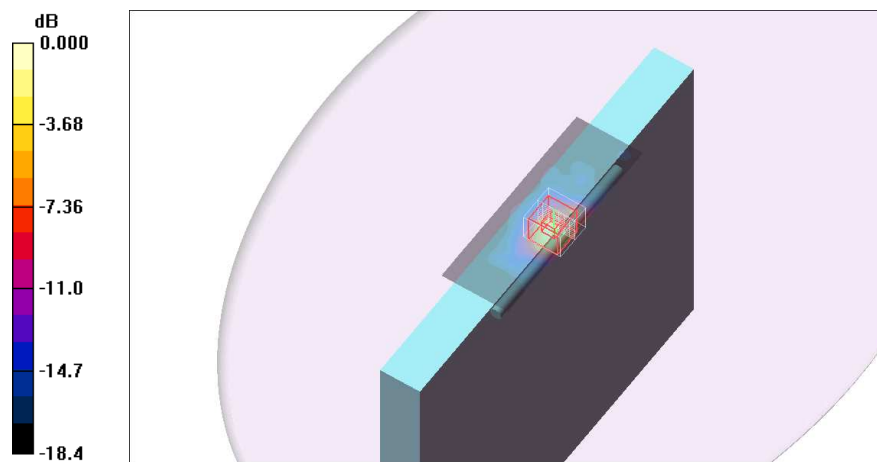

**5800 MHz Band – Lapheld Mode, Chain A – 802.11n\* Channel 159**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - LapHeld**

Communication System: 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 6$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 159/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.356 mW/g

**Chain A, 802.11n\*, Channel 159/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.88 V/m; Power Drift = 0.295 dB

Peak SAR (extrapolated) = 0.518 W/kg


**SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.362 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.507 mW/g

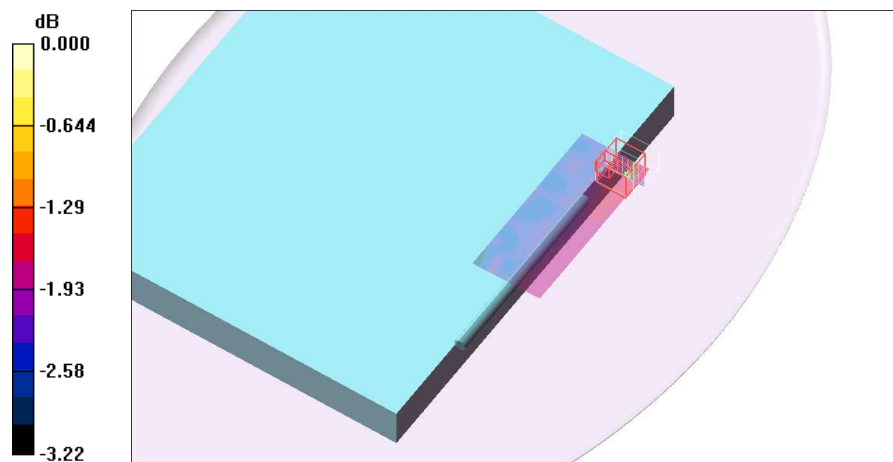

0 dB = 0.507mW/g

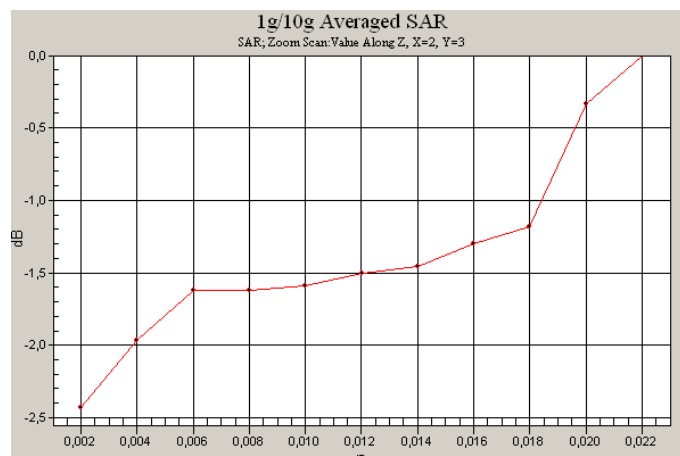

**5800 MHz Band – Lapheld Mode, Chain B – 802.11n\* Channel 159**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - LapHeld**

Communication System: 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 6$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 159/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.348 mW/g

**Chain B, 802.11n\*, Channel 159/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.43 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.646 W/kg


**SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.374 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.646 mW/g

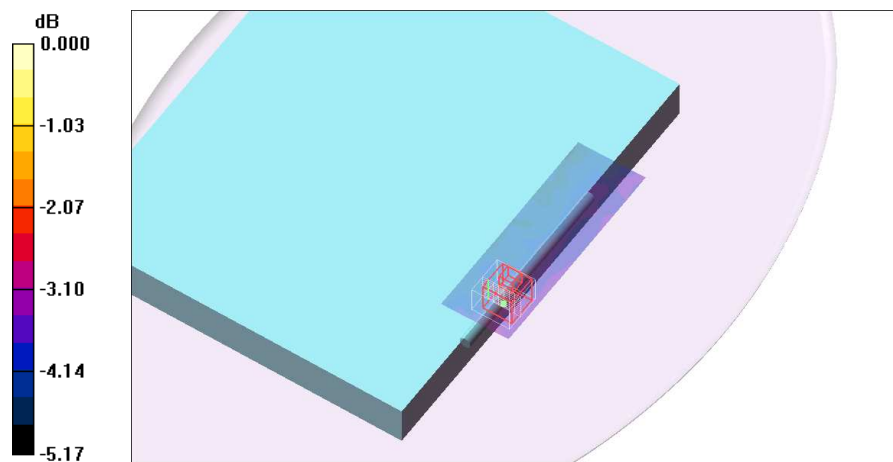

0 dB = 0.646mW/g

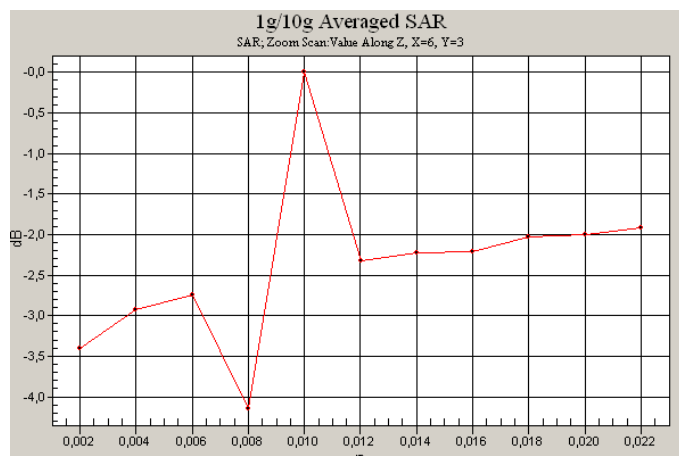

**5800 MHz Band – Lapheld Mode, Chain C – 802.11n\* Channel 159**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - LapHeld**

Communication System: 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 6$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 159/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.370 mW/g

**Chain C, 802.11n\*, Channel 159/Zoom Scan 2 (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.40 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.662 W/kg


**SAR(1 g) = 0.426 mW/g; SAR(10 g) = 0.392 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.662 mW/g

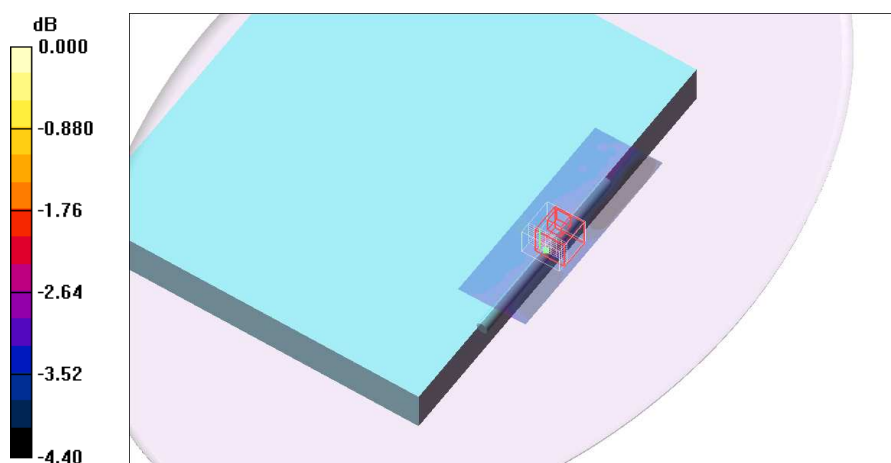

0 dB = 0.662mW/g

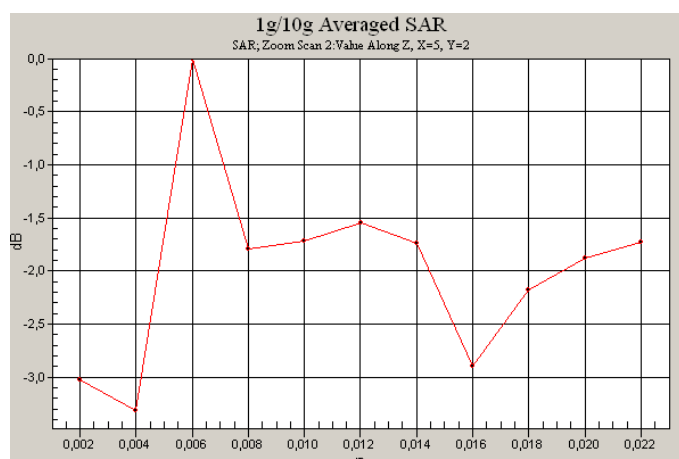

**5800 MHz Band – Primary Portrait Mode, Chain B – 802.11n\* Channel 159**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - PrimPortrait**

Communication System: 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 6$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 159/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.308 mW/g

**Chain B, 802.11n\*, Channel 159/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.28 V/m; Power Drift = -0.311 dB

Peak SAR (extrapolated) = 0.365 W/kg


**SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.274 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.365 mW/g

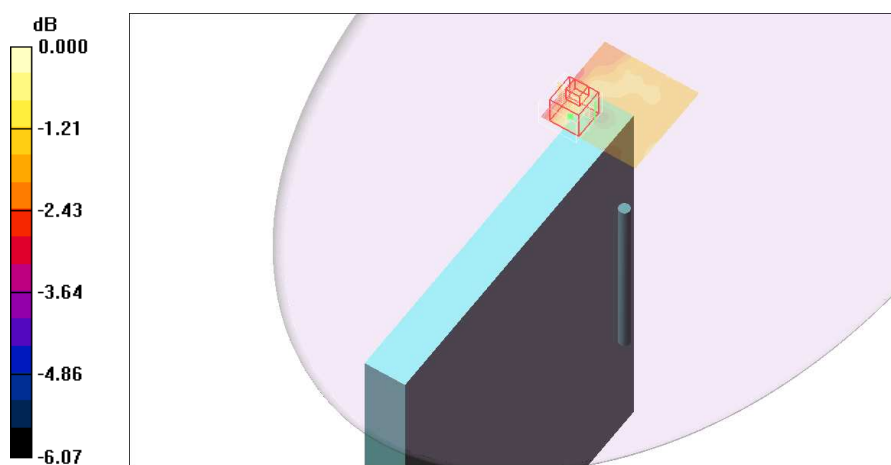

0 dB = 0.365mW/g

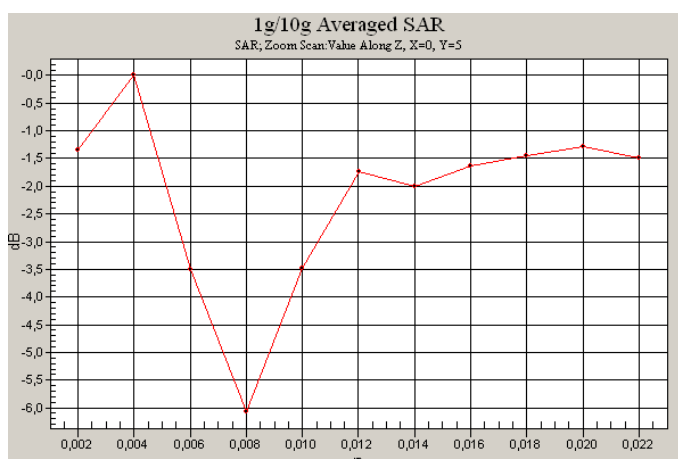

**5800 MHz Band – Secondary Portrait Mode, Chain A – 802.11n\* Channel 159**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - SecPortrait**

Communication System: 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 6$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 159/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.275 mW/g

**Chain A, 802.11n\*, Channel 159/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.09 V/m; Power Drift = 0.144 dB

Peak SAR (extrapolated) = 0.666 W/kg


**SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.045 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.246 mW/g

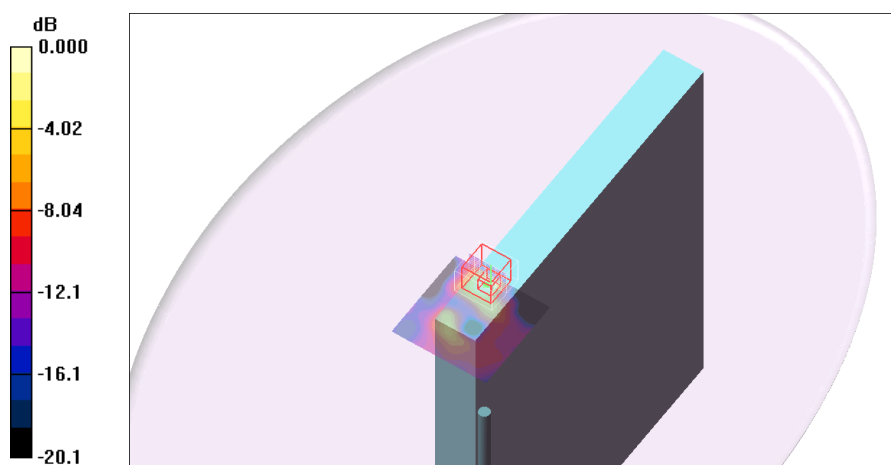

0 dB = 0.246mW/g

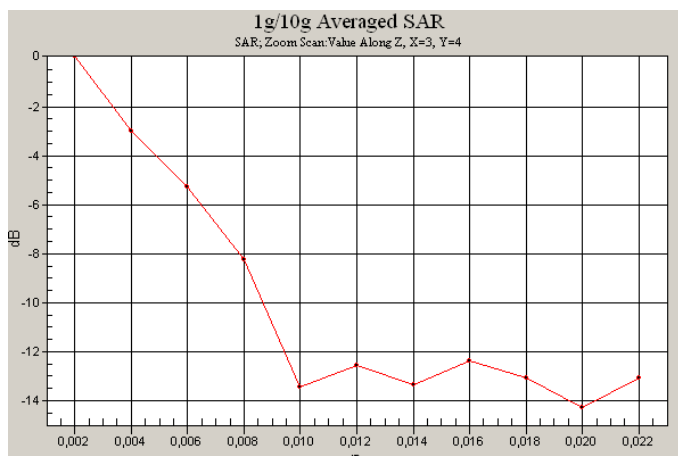

**5800 MHz Band – Secondary Portrait Mode, Chain C – 802.11n\* Channel 159**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - SecPortrait**

Communication System: 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 6$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 159/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.032 mW/g

**Chain C, 802.11n\*, Channel 159/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 2.28 V/m; Power Drift = -0.378 dB

Peak SAR (extrapolated) = 0.090 W/kg


**SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.012 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.030 mW/g

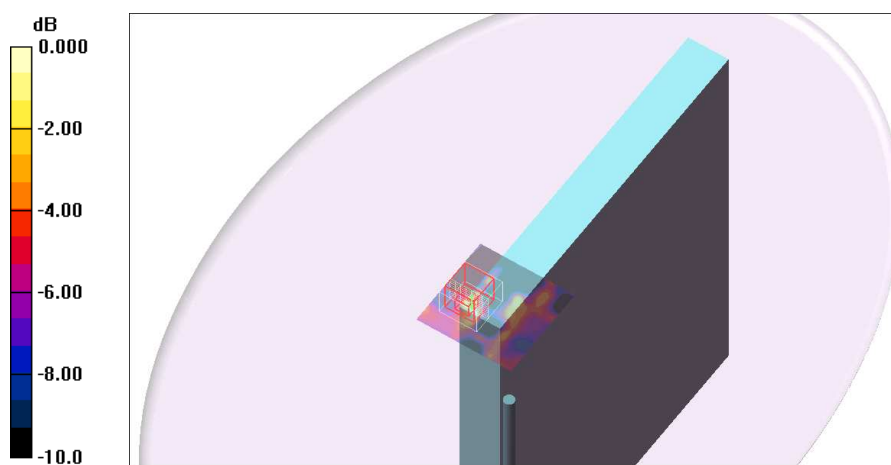

0 dB = 0.030mW/g

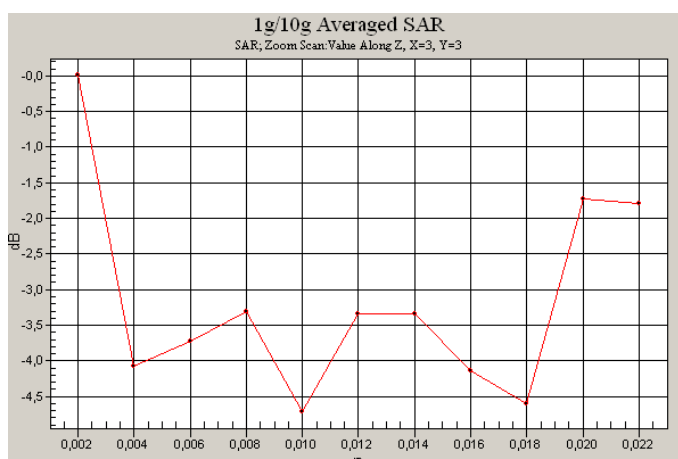

**5800 MHz Band – Secondary Landscape Mode, Chain A – 802.11n\* Channel 151**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5755 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5755$  MHz;  $\sigma = 5.82$  mho/m;  $\epsilon_r = 46.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 151/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.27 mW/g

**Chain A, 802.11n\*, Channel 151/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 10.1 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 2.98 W/kg


**SAR(1 g) = 0.674 mW/g; SAR(10 g) = 0.286 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.30 mW/g

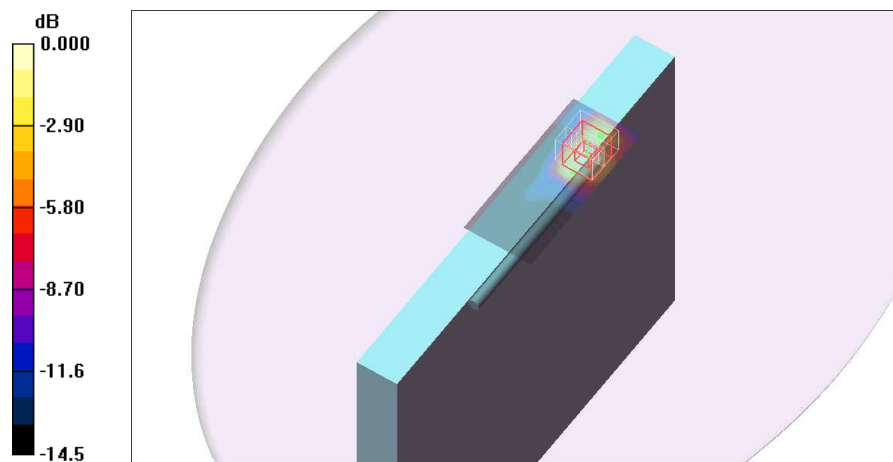

0 dB = 1.30mW/g

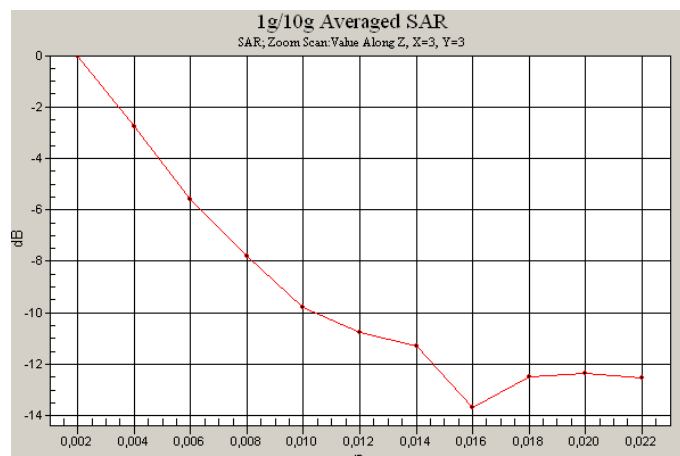



**5800 MHz Band – Secondary Landscape Mode, Chain A – 802.11n\* Channel 159**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 6$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A, 802.11n\*, Channel 159/Area Scan (51x121x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.52 mW/g

**Chain A, 802.11n\*, Channel 159/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 8.68 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 3.64 W/kg


**SAR(1 g) = 0.823 mW/g; SAR(10 g) = 0.401 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.50 mW/g

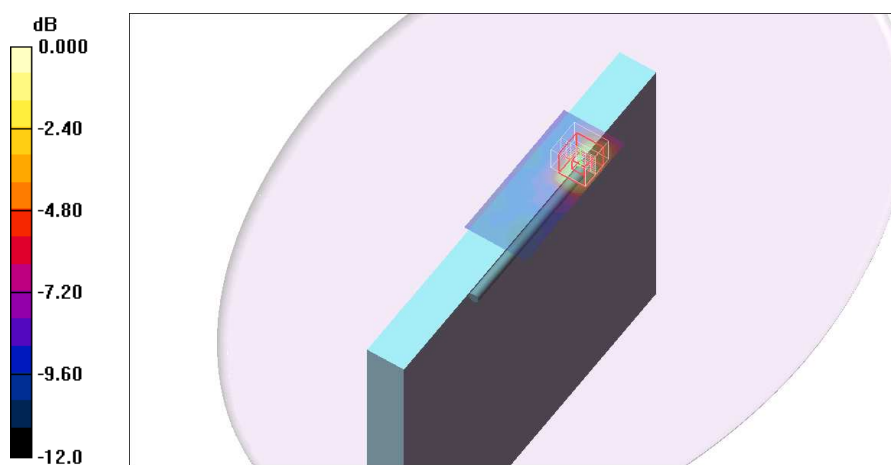

0 dB = 1.50mW/g

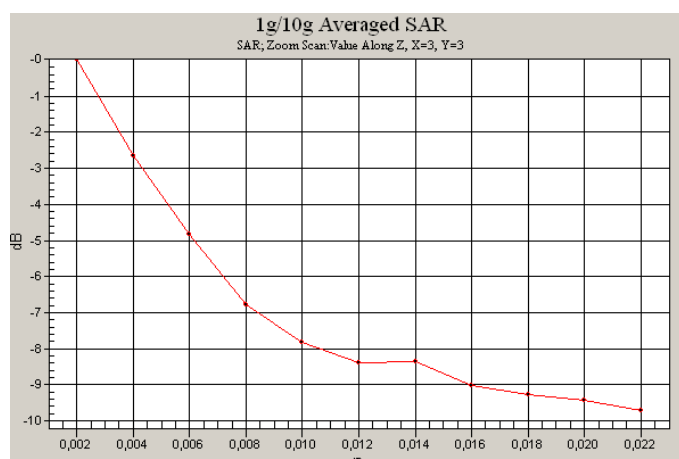

**5800 MHz Band – Secondary Landscape Mode, Chain B – 802.11n\* Channel 151**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5755 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5755$  MHz;  $\sigma = 5.82$  mho/m;  $\epsilon_r = 46.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn901; Calibrated: 22/07/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 151/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.903 mW/g

**Chain B, 802.11n\*, Channel 151/Zoom Scan 2 (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 13.7 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 2.47 W/kg


**SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.227 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.02 mW/g

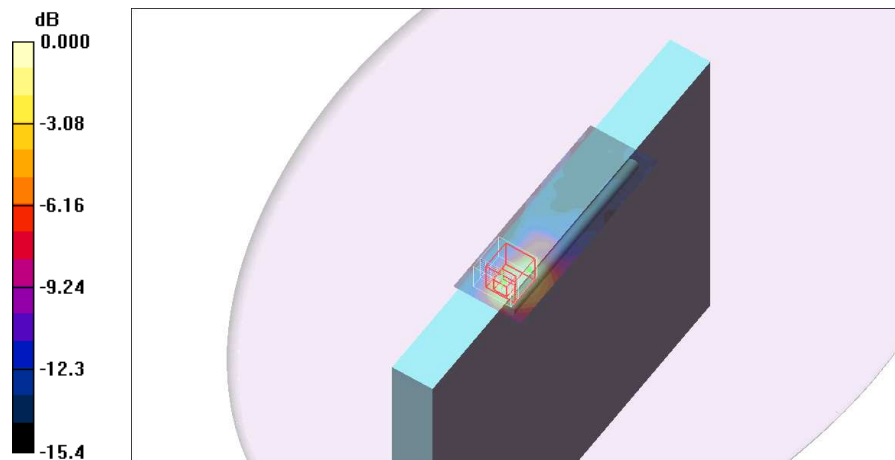

0 dB = 1.02mW/g

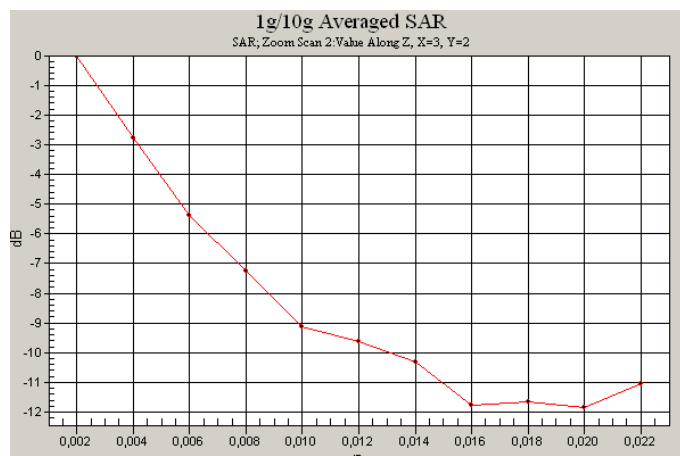

**5800 MHz Band – Secondary Landscape Mode, Chain B – 802.11n\* Channel 159**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 6$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B, 802.11n\*, Channel 159 2/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.852 mW/g

**Chain B, 802.11n\*, Channel 159 2/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 7.29 V/m; Power Drift = 0.156 dB

Peak SAR (extrapolated) = 3.17 W/kg


**SAR(1 g) = 0.544 mW/g; SAR(10 g) = 0.317 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.913 mW/g

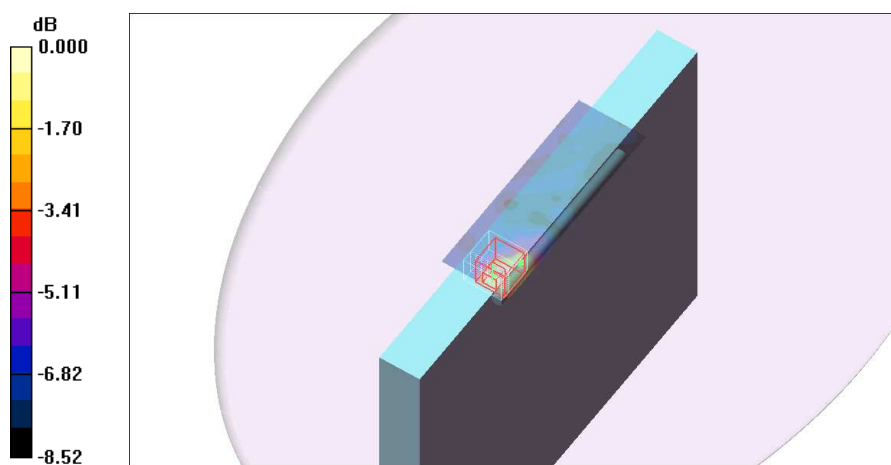

0 dB = 0.913mW/g

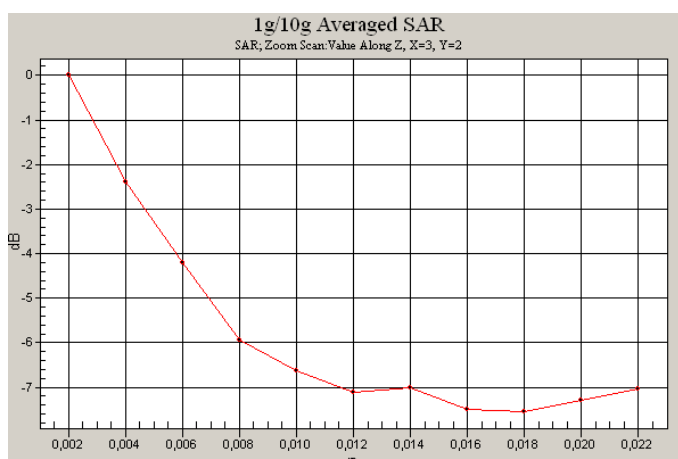

**5800 MHz Band – Secondary Landscape Mode, Chain C – 802.11n\* Channel 151**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5755 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5755$  MHz;  $\sigma = 5.92$  mho/m;  $\epsilon_r = 47.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 151/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.12 mW/g

**Chain C, 802.11n\*, Channel 151/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 23.4 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 6.93 W/kg


**SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.439 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.63 mW/g

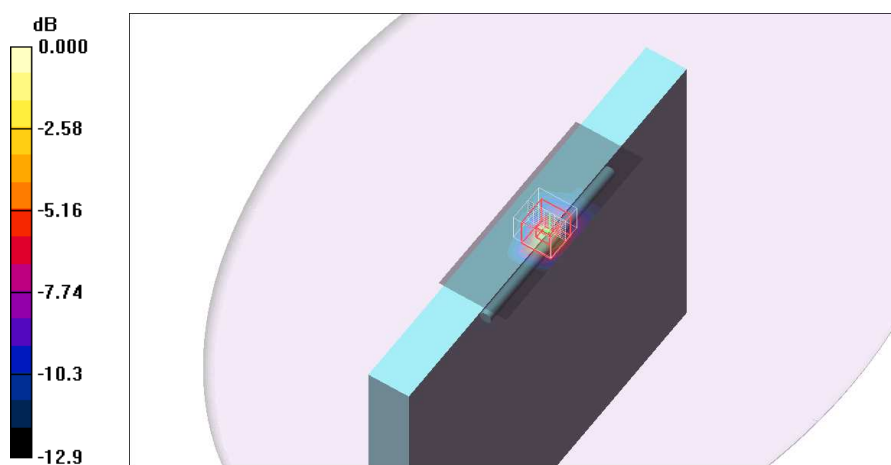

0 dB = 2.63mW/g

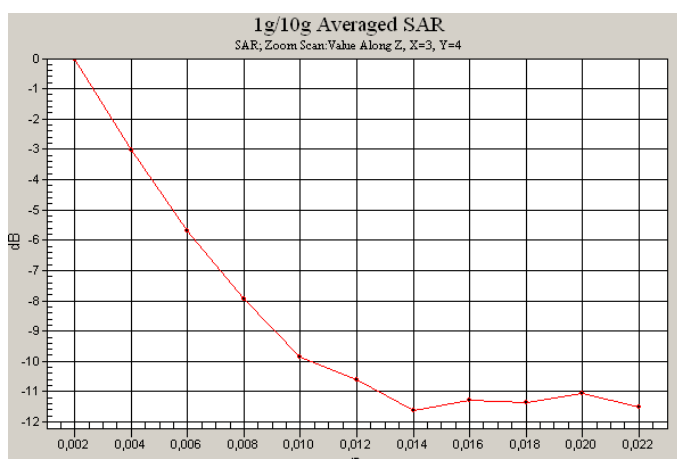

**5800 MHz Band – Secondary Landscape Mode, Chain C – 802.11n\* Channel 159**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5800MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 6$  mho/m;  $\epsilon_r = 47.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3687; ConvF(3.74, 3.74, 3.74); Calibrated: 16/03/2009
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 25/10/2010
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain C, 802.11n\*, Channel 159/Area Scan (51x151x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 2.40 mW/g

**Chain C, 802.11n\*, Channel 159/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm



Reference Value = 10.3 V/m; Power Drift = -0.349 dB

Peak SAR (extrapolated) = 8.99 W/kg

**SAR(1 g) = 1.53 mW/g; SAR(10 g) = 0.512 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.44 mW/g

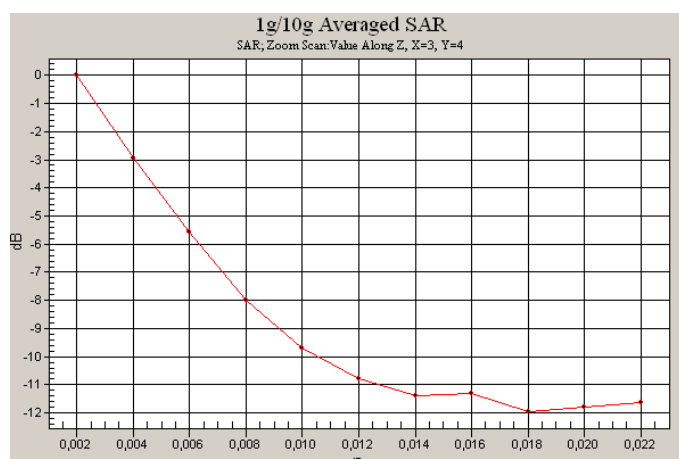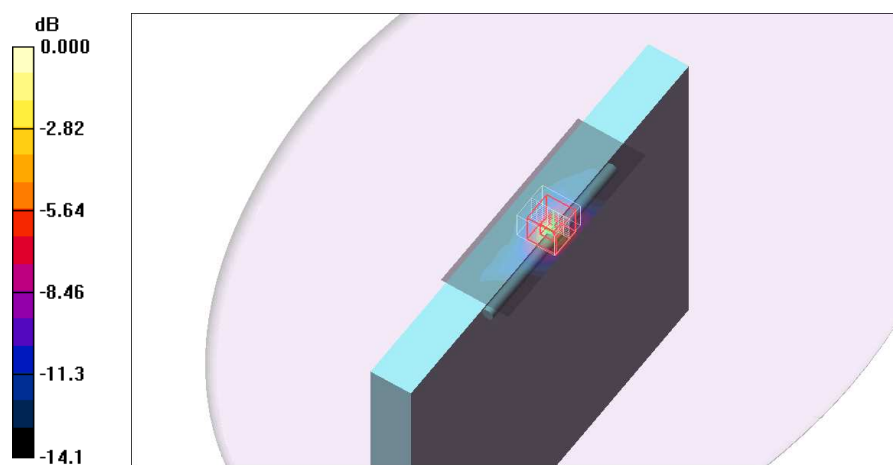

**5200 MHz Band – Secondary Landscape Mode, Chain A+C – 802.11n\* Channel 54**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5270 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5270$  MHz;  $\sigma = 5.15$  mho/m;  $\epsilon_r = 47.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.95, 3.95, 3.95); Calibrated: 19/05/2010
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 03/02/2011
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A+C, 802.11n\*, Channel 54/Area Scan (61x181x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.923 mW/g

**Chain A, 802.11n\*, Channel 54/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.7 V/m; Power Drift = 0.083 dB

Peak SAR (extrapolated) = 2.15 W/kg

**SAR(1 g) = 0.544 mW/g; SAR(10 g) = 0.302 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.902 mW/g

**Chain C, 802.11n\*, Channel 54/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 12.7 V/m; Power Drift = 0.083 dB

Peak SAR (extrapolated) = 1.77 W/kg

**SAR(1 g) = 0.520 mW/g; SAR(10 g) = 0.294 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.847 mW/g

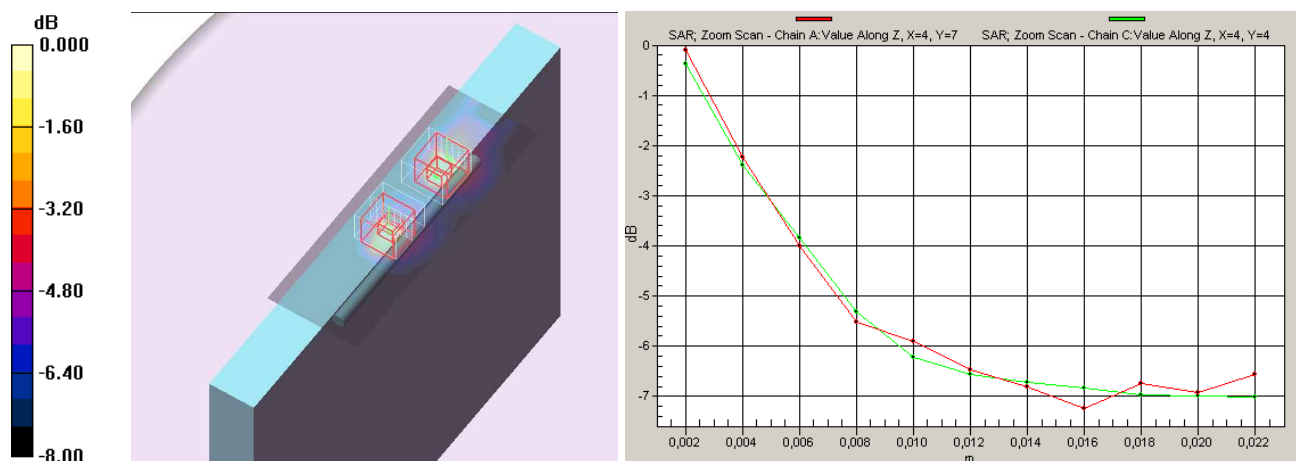

0 dB = 0.923mW/g

**5600 MHz Band – Secondary Landscape Mode, Chain B+C – 802.11n\* Channel 102**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5600MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5510 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5510$  MHz;  $\sigma = 5.47$  mho/m;  $\epsilon_r = 47.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.12, 3.12, 3.12); Calibrated: 19/05/2010
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 03/02/2011
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B+C, 802.11n\*, Channel 102/Area Scan (61x181x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.35 mW/g

**Chain C, 802.11n\*, Channel 102/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.0 V/m; Power Drift = 0.282 dB

Peak SAR (extrapolated) = 2.81 W/kg

**SAR(1 g) = 0.670 mW/g; SAR(10 g) = 0.370 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 mW/g

**Chain B, 802.11n\*, Channel 102/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 10.0 V/m; Power Drift = 0.282 dB

Peak SAR (extrapolated) = 2.26 W/kg


**SAR(1 g) = 0.634 mW/g; SAR(10 g) = 0.359 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.08 mW/g

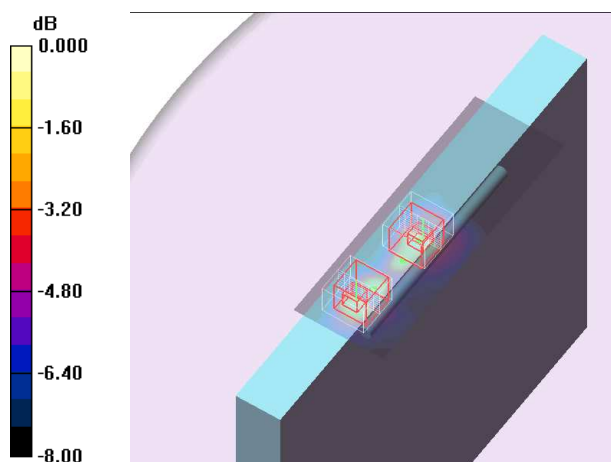

0 dB = 1.08mW/g

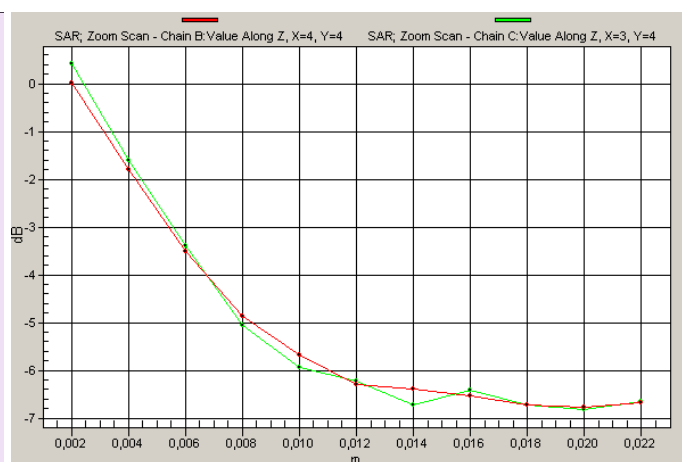



**5800 MHz Band – Secondary Landscape Mode, Chain A+C – 802.11n\* Channel 159**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 5.92$  mho/m;  $\epsilon_r = 46.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.57, 3.57, 3.57); Calibrated: 19/05/2010
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 03/02/2011
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain A+C, 802.11n\*, Channel 159/Area Scan (61x181x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.54 mW/g

**Chain C, 802.11n\*, Channel 159/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.2 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 3.51 W/kg

**SAR(1 g) = 0.775 mW/g; SAR(10 g) = 0.349 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.52 mW/g

**Chain A, 802.11n\*, Channel 159/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 11.2 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.509 mW/g; SAR(10 g) = 0.316 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.794 mW/g

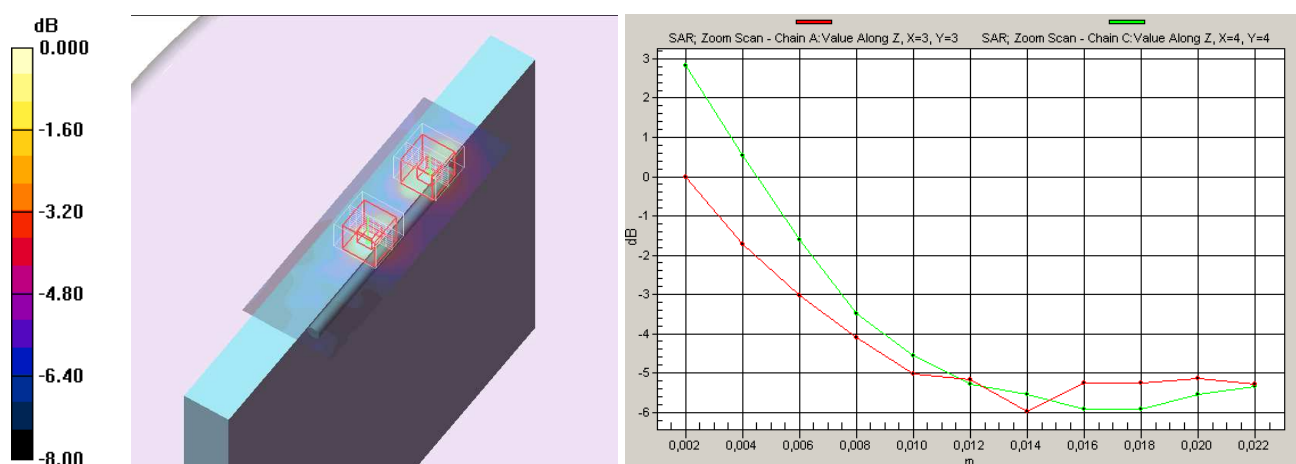

0 dB = 0.794mW/g



**5800 MHz Band – Secondary Landscape Mode, Chain B+C – 802.11n\* Channel 159**

**DUT: TP00019A PC + Intel 633ANHMW + Yageo; Type: Host device; Serial: R9-8VV2M 10/11**  
**Program Name: 802.11 at 5200MHz - Secondary Landscape**

Communication System: 802.11; Frequency: 5795 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5795$  MHz;  $\sigma = 5.92$  mho/m;  $\epsilon_r = 46.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(3.57, 3.57, 3.57); Calibrated: 19/05/2010
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 03/02/2011
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Chain B+C, 802.11n\*, Channel 159/Area Scan (61x181x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.22 mW/g

**Chain C, 802.11n\*, Channel 159/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.8 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 3.67 W/kg

**SAR(1 g) = 0.799 mW/g; SAR(10 g) = 0.352 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.61 mW/g

**Chain B, 802.11n\*, Channel 159/Zoom Scan (8x8x11)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 13.8 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.273 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.543 mW/g

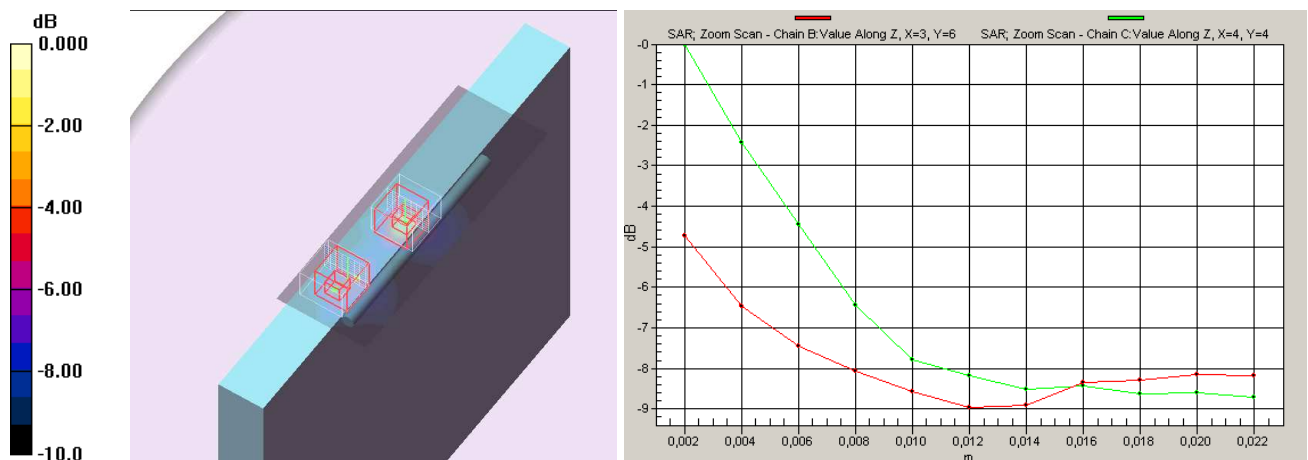

0 dB = 1.61mW/g

## **APPENDIX D: Calibration Data**

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **AT4wireless**

Certificate No: **ES3-3052\_Oct10**

## CALIBRATION CERTIFICATE

Object: **ES3DV3 - SN:3052**

Calibration procedure(s): **QA CAL-01.v6, QA CAL-23.v3 and QA CAL-25 v2  
Calibration procedure for dosimetric E-field probes**

Calibration date: **October 22, 2010**



This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration):

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 6648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: October 23, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory

ES3DV3 SN:3052

October 22, 2010

### DASY/EASY - Parameters of Probe: ES3DV3 SN:3052

#### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	1.10	1.23	1.13	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	97.9	96.1	97.0	

#### Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	300.0	$\pm 1.5\%$
			Y	0.00	0.00	1.00	300.0	
			Z	0.00	0.00	1.00	300.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter; uncertainty not required.

<sup>E</sup> Uncertainty is determined using the maximum deviation from linear response applying recatangular distribution and is expressed for the square of the field value.

ES3DV3 SN:3052

October 22, 2010

## DASY/EASY - Parameters of Probe: ES3DV3 SN:3052

### Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
750	± 50 / ± 100	43.5 ± 5%	0.87 ± 5%	6.25	6.25	6.25	0.88	1.02 ± 11.0%
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	5.97	5.97	5.97	0.66	1.15 ± 11.0%
900	± 50 / ± 100	41.5 ± 5%	0.97 ± 5%	5.82	5.82	5.82	0.55	1.32 ± 11.0%
1750	± 50 / ± 100	40.1 ± 5%	1.37 ± 5%	5.16	5.16	5.16	0.41	1.53 ± 11.0%
1900	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	4.95	4.95	4.95	0.35	1.80 ± 11.0%
2000	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	4.85	4.85	4.85	0.36	1.70 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	4.33	4.33	4.33	0.32	2.21 ± 11.0%
2600	± 50 / ± 100	39.0 ± 5%	1.96 ± 5%	4.22	4.22	4.22	0.34	2.06 ± 11.0%

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3052

October 22, 2010

## DASY/EASY - Parameters of Probe: ES3DV3 SN:3052

### Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
750	± 50 / ± 100	56.7 ± 5%	0.94 ± 5%	6.02	6.02	6.02	0.61	1.24 ± 11.0%
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	5.93	5.93	5.93	0.72	1.19 ± 11.0%
900	± 50 / ± 100	55.0 ± 5%	1.05 ± 5%	5.81	5.81	5.81	0.63	1.22 ± 11.0%
1750	± 50 / ± 100	53.4 ± 5%	1.49 ± 5%	4.70	4.70	4.70	0.32	2.19 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.51	4.51	4.51	0.34	2.26 ± 11.0%
2000	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	4.54	4.54	4.54	0.33	2.28 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	4.14	4.14	4.14	0.72	1.19 ± 11.0%
2600	± 50 / ± 100	52.5 ± 5%	2.16 ± 5%	4.01	4.01	4.01	0.99	0.99 ± 11.0%

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **AT4Wireless**

Certificate No: EX3-3687\_May10

## CALIBRATION CERTIFICATE

Object: EX3DV4 - SN:3687

Calibration procedure(s): QA CAL-01.v6, QA CAL-14.v3, QA CAL-23.v3 and QA CAL-25.v2  
Calibration procedure for dosimetric E-field probes

Calibration date: May 19, 2010


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5085 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10
DAE4	SN: 650	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check Oct10

Calibrated by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: May 19, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3687\_May10

Page 1 of 11

EX3DV4 SN:3687

May 19, 2010

### DASY/EASY - Parameters of Probe: EX3DV4 SN:3687

#### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.54	0.44	0.48	± 10.1%
DCP (mV) <sup>B</sup>	90.7	90.0	91.0	

#### Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	300	± 1.5%
			Y	0.00	0.00	1.00	300	
			Z	0.00	0.00	1.00	300	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX, Y, Z do not affect the E<sup>2</sup> field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4 SN:3687

May 19, 2010

## DASY/EASY - Parameters of Probe: EX3DV4 SN:3687

### Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
5200	± 50 / ± 100	36.0 ± 5%	4.66 ± 5%	4.40	4.40	4.40	0.50	1.95 ± 13.1%
5600	± 50 / ± 100	35.5 ± 5%	5.07 ± 5%	4.00	4.00	4.00	0.50	1.95 ± 13.1%
5800	± 50 / ± 100	35.3 ± 5%	5.27 ± 5%	3.94	3.94	3.94	0.50	1.95 ± 13.1%

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

EX3DV4 SN:3687

May 19, 2010

## DASY/EASY - Parameters of Probe: EX3DV4 SN:3687

### Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
5200	± 50 / ± 100	49.0 ± 5%	5.30 ± 5%	3.95	3.95	3.95	0.58	1.95 ± 13.1%
5600	± 50 / ± 100	48.5 ± 5%	5.77 ± 5%	3.12	3.12	3.12	0.65	1.95 ± 13.1%
5800	± 50 / ± 100	48.2 ± 5%	6.00 ± 5%	3.57	3.57	3.57	0.63	1.95 ± 13.1%

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **AT4wireless**

Certificate No: **D2450V2-756\_Jun09**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 756**

Calibration procedure(s) **QA CAL-05.v7  
Calibration procedure for dipole validation kits**

Calibration date: **June 19, 2009**



Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV2	SN: 3025	28-Apr-08 (No. ES3-3025_Apr08)	Apr-09
Reference Probe ES3DV2	SN: 3025	30-Apr-09 (No. ES3-3025_Apr09)	Apr-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

	Name	Function	Signature
Calibrated by:	Mike Meili	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 19, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.4 $\pm$ 6 %	1.78 mho/m $\pm$ 6 %
Head TSL temperature during test	(22.4 $\pm$ 0.2) °C	----	----

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.3 mW / g
SAR normalized	normalized to 1W	53.2 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>53.9 mW /g <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.29 mW / g
SAR normalized	normalized to 1W	25.2 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>25.3 mW /g <math>\pm</math> 16.5 % (k=2)</b>

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.2 ± 6 %	2.00 mho/m ± 6 %
Body TSL temperature during test	(21.5 ± 0.2) °C	----	----

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.4 mW / g
SAR normalized	normalized to 1W	53.6 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>53.0 mW /g ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.27 mW / g
SAR normalized	normalized to 1W	25.1 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>25.0 mW /g ± 16.5 % (k=2)</b>

<sup>2</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **AT4 Wireless**

Certificate No: **D5GHzV2-1071\_Mar09**

## CALIBRATION CERTIFICATE

Object: **D5GHzV2 - SN: 1071**

Calibration procedure(s): **QA CAL-22.v1  
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **March 13, 2009**



Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (20g)	01-Jul-08 (No. 217-00864)	Jul-09
Type-N mismatch combination	SN: 5047.2 / 06327	01-Jul-08 (No. 217-00867)	Jul-09
Reference Probe EX3DV4	SN: 3503	11-Mar-09 (No. EX3-3503_Mar09)	Mar-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 17, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Area Scan resolution	dx, dy = 10 mm	
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 2.5 mm	
Frequency	5200 MHz $\pm$ 1 MHz 5800 MHz $\pm$ 1 MHz	

### Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	35.4 $\pm$ 6 %	4.53 mho/m $\pm$ 6 %
Head TSL temperature during test	(22.0 $\pm$ 0.2) °C	---	---

### SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	condition	
SAR measured	100 mW input power	7.69 mW / g
SAR normalized	normalized to 1W	76.9 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>76.6 mW / g <math>\pm</math> 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.16 mW / g
SAR normalized	normalized to 1W	21.6 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>21.5 mW / g <math>\pm</math> 19.5 % (k=2)</b>

<sup>1</sup> Correction to nominal TSL parameters according to c), chapter "SAR Sensitivities"

### Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.3 ± 6 %	5.08 mho/m ± 6 %
Head TSL temperature during test	(22.0 ± 0.2) °C	---	---

### SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	condition	
SAR measured	100 mW input power	7.66 mW / g
SAR normalized	normalized to 1W	76.6 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>76.1 mW / g ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.14 mW / g
SAR normalized	normalized to 1W	21.4 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>21.2 mW / g ± 19.5 % (k=2)</b>

<sup>1</sup> Correction to nominal TSL parameters according to c), chapter "SAR Sensitivities"



### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.7 ± 6 %	5.30 mho/m ± 6 %
Body TSL temperature during test	(21.2 ± 0.2) °C	---	---

### SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	condition	
SAR measured	100 mW input power	7.61 mW / g
SAR normalized	normalized to 1W	76.1 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>75.7 mW / g ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.12 mW / g
SAR normalized	normalized to 1W	21.2 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>21.1 mW / g ± 19.5 % (k=2)</b>

### Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.3 ± 6 %	6.05 mho/m ± 6 %
Body TSL temperature during test	(21.0 ± 0.2) °C	---	---

### SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	condition	
SAR measured	100 mW input power	7.25 mW / g
SAR normalized	normalized to 1W	72.5 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>71.9 mW / g ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	1.99 mW / g
SAR normalized	normalized to 1W	19.9 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>19.7 mW / g ± 19.5 % (k=2)</b>

<sup>2</sup> Correction to nominal TSL parameters according to c), chapter "SAR Sensitivities"

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **AT4 Wireless**

Certificate No: **D5GHzV2-1071\_Apr09**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1071**

Calibration procedure(s) **QA CAL-22.v1  
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **April 28, 2009**



Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (20g)	01-Jul-08 (No. 217-00864)	Jul-09
Type-N mismatch combination	SN: 5047.2 / 06327	01-Jul-08 (No. 217-00867)	Jul-09
Reference Probe EX3DV4	SN: 3503	11-Mar-09 (No. EX3-3503_Mar09)	Mar-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

	Name	Function	Signature
Calibrated by:	Mike Meili	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 30, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V5.0
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V5.0	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Area Scan resolution</b>	dx, dy = 10 mm	
<b>Zoom Scan Resolution</b>	dx, dy = 4.0 mm, dz = 2.5 mm	
<b>Frequency</b>	5500 MHz $\pm$ 1 MHz	

### Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	35.6	4.96 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	35.1 $\pm$ 6 %	4.83 mho/m $\pm$ 6 %
<b>Head TSL temperature during test</b>	(22.5 $\pm$ 0.2) °C	----	----

### SAR result with Head TSL at 5500 MHz

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	8.17 mW / g
SAR normalized	normalized to 1W	81.7 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>81.4 mW / g <math>\pm</math> 19.9 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	100 mW input power	2.29 mW / g
SAR normalized	normalized to 1W	22.9 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>22.8 mW / g <math>\pm</math> 19.5 % (k=2)</b>

<sup>1</sup> Correction to nominal TSL parameters according to c), chapter "SAR Sensitivities"

### Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.8 ± 6 %	5.74 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	----	----

### SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	condition	
SAR measured	100 mW input power	8.17 mW / g
SAR normalized	normalized to 1W	81.7 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>81.1 mW / g ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.26 mW / g
SAR normalized	normalized to 1W	22.6 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>22.4 mW / g ± 19.5 % (k=2)</b>

<sup>2</sup> Correction to nominal TSL parameters according to c), chapter "SAR Sensitivities"