

FCC Test Report

(Class II Permissive Change)

Product Name	Intel® Dual Band Wireless-AC 7260
Model No.	7260NGW
FCC ID.	PD97260NG, PD97260NGU

* FCC ID: PD97260NG (For OEM factory installation)

* FCC ID: PD97260NGU (For user installation)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA

Date of Receipt	Oct. 01, 2014
Issued Date	Nov. 06, 2014
Report No.	14A0104R-RFUSP23V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Quietek Corporation.

Test Report

Issued Date: Nov. 06, 2014

Report No.: 14A0104R-RFUSP23V00



Product Name	Intel® Dual Band Wireless-AC 7260
Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Manufacturer	Intel Mobile Communications
Model No.	7260NGW
FCC ID.	PD97260NG, PD97260NGU
EUT Rated Voltage	DC 3.3V (via Mini-PCI Express slot)
EUT Test Voltage	AC 120V/ 60Hz
Trade Name	Intel
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2013 ANSI C63.10: 2009, KDB 558074 D01 DTS Meas Guidance v03r02
Test Result	Complied

Documented By : Rita Huang

(Senior Adm. Specialist / Rita Huang)

Tested By : Andy Lin

(Engineer / Andy Lin)

Approved By : Vincent Lin

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description.....	4
1.2. Operational Description.....	6
1.3. Tested System Details.....	7
1.4. Configuration of Tested System	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
2. PEAK POWER OUTPUT	9
2.1. Test Equipment	9
2.2. Test Setup	9
2.3. Limit.....	9
2.4. Test Procedure	9
2.5. Uncertainty	9
2.6. Test Result of Peak Power Output.....	10
3. RADIATED EMISSION	12
3.1. Test Equipment	12
3.2. Test Setup	12
3.3. Limits.....	13
3.4. Test Procedure	14
3.5. Uncertainty	14
3.6. Test Result of Radiated Emission.....	15
4. BAND EDGE	23
4.1. Test Equipment.....	23
4.2. Test Setup	24
4.3. Limit.....	25
4.4. Test Procedure	25
4.5. Uncertainty	25
4.6. Test Result of Band Edge	26
5. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	34
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Intel® Dual Band Wireless-AC 7260
Trade Name	Intel
Model No.	7260NGW
FCC ID.	PD97260NG, PD97260NGU
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	Dipole Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Contain Module	Intel / 7260NGW

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	WIESON Technologies co., ltd	GY121HT0321-003-H (External)	Dipole	2.89dBi for 2.4GHz

Note: The antenna of EUT is conform to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is an Intel® Dual Band Wireless-AC 7260 with a built-in WLAN and Bluetooth V4.0 V3.0, V2.1+EDR transceiver, this report for Bluetooth V3.0, V2.1+EDR.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. Bluetooth operation was evaluated at both 1Mb/s and 3Mb/s data rates. 2Mb/s data rate was found, through pre-testing, to produce emissions similar to those for 3Mb/s.
5. This is to request a Class II permissive change for FCC ID: PD97260NG, PD97260NGU, originally granted on 04/22/2013.

The major change filed under this application is:

Change #1: Addition new antenna, antenna type is different with the original application.

(Antenna type: Dipole antenna)

Test Mode	Mode 1: Transmit - 1Mbps (GFSK) Mode 2: Transmit - 3Mbps (8DPSK)
-----------	---


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	N/A	N/A
2	Test Fixture	INTEL	N/A	N/A

Signal Cable Type	Signal cable Description
A	Test Fixture Line
	Non-Shielded, 1.0m

1.4. Configuration of Tested System

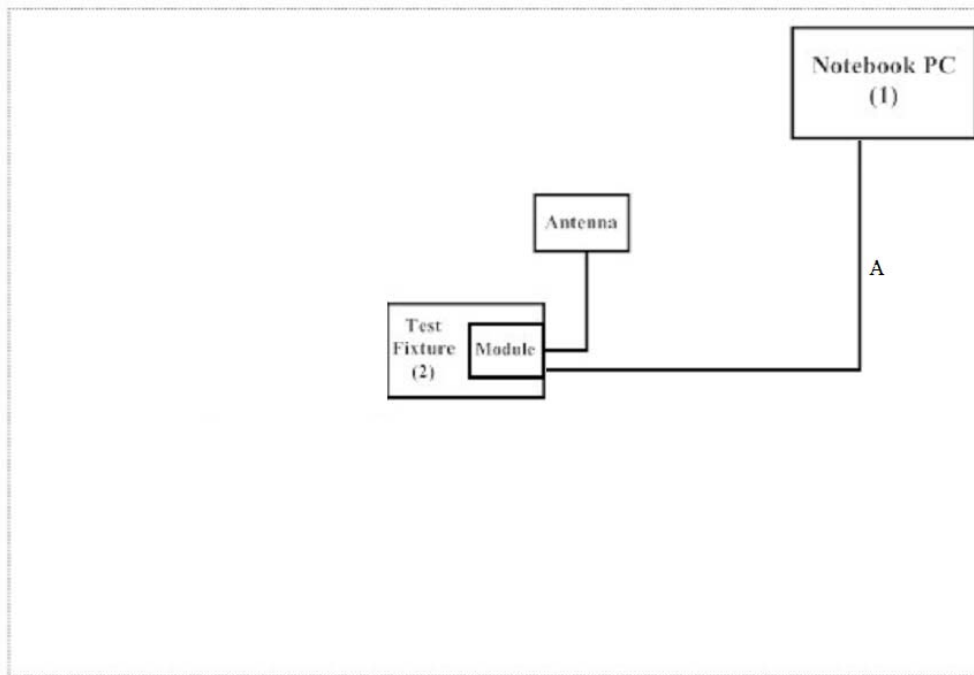

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4
- (2) Execute "DRTU Ver 1.6.1-556" program on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start transmits continually.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from

Quietek Corporation's Web Site: <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site:

<http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng,
Linkou Dist. New Taipei City 24451,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014


2. Peak Power Output

2.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Power Meter	Anritsu	ML2495A/6K00003357	May, 2014
Power Sensor	Anritsu	MA2411B/0738448	Jun., 2014
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

2.2. Test Setup

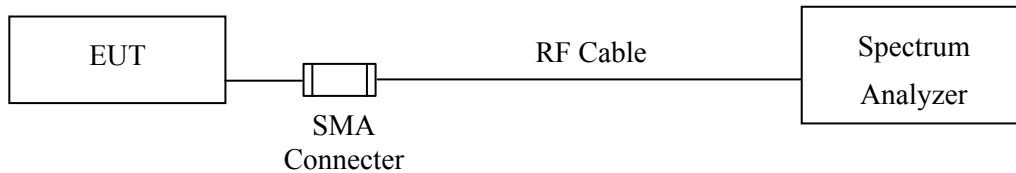

2.3. Limit

The maximum peak power shall be less 1Watt.

2.4. Test Procedure

The EUT was setup to ANSI C63.10: 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

2.5. Uncertainty

± 1.27 dB

2.6. Test Result of Peak Power Output

Product : Intel® Dual Band Wireless-AC 7260
Test Item : Peak Power Output
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	4.49	1 Watt= 30 dBm	Pass
Channel 38	2440.00	6.72	1 Watt= 30 dBm	Pass
Channel 78	2480.00	6.93	1 Watt= 30 dBm	Pass

Product : Intel® Dual Band Wireless-AC 7260
Test Item : Peak Power Output
Test Site : No.3 OATS
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	1.63	1 Watt= 30 dBm	Pass
Channel 38	2440.00	6.91	1 Watt= 30 dBm	Pass
Channel 78	2480.00	7.14	1 Watt= 30 dBm	Pass

3. Radiated Emission

3.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2014
	X Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2014
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2014
	X Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	X Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2014
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	X Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2014
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated every one year.
 2. The test instruments marked by “X” are used to measure the final test results.

3.2. Test Setup

Below 1GHz

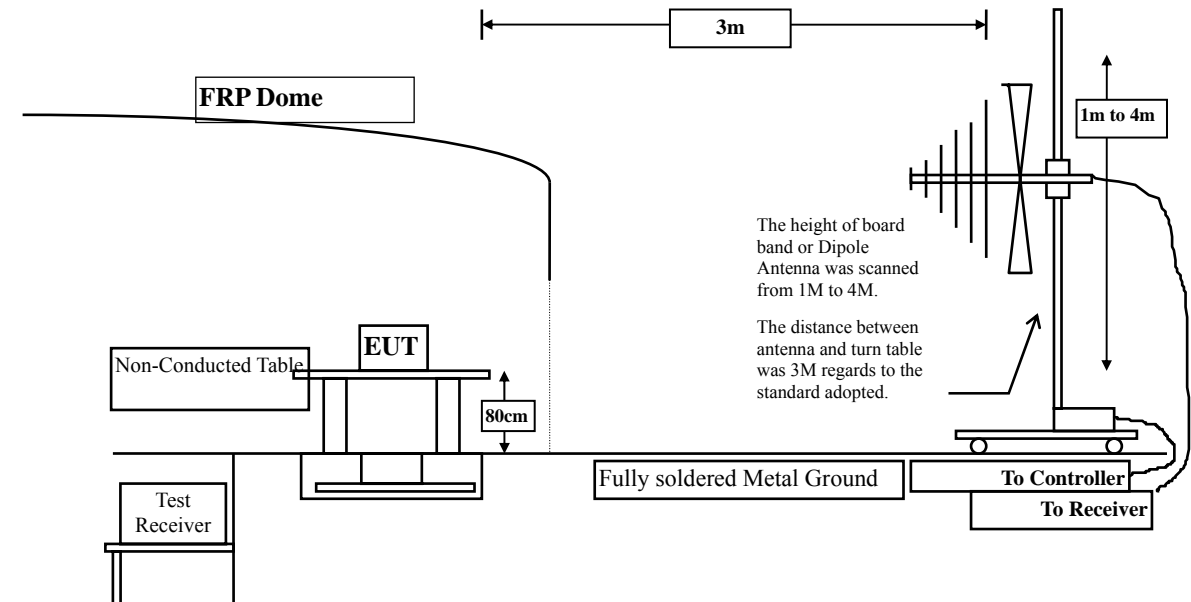

Above 1GHz

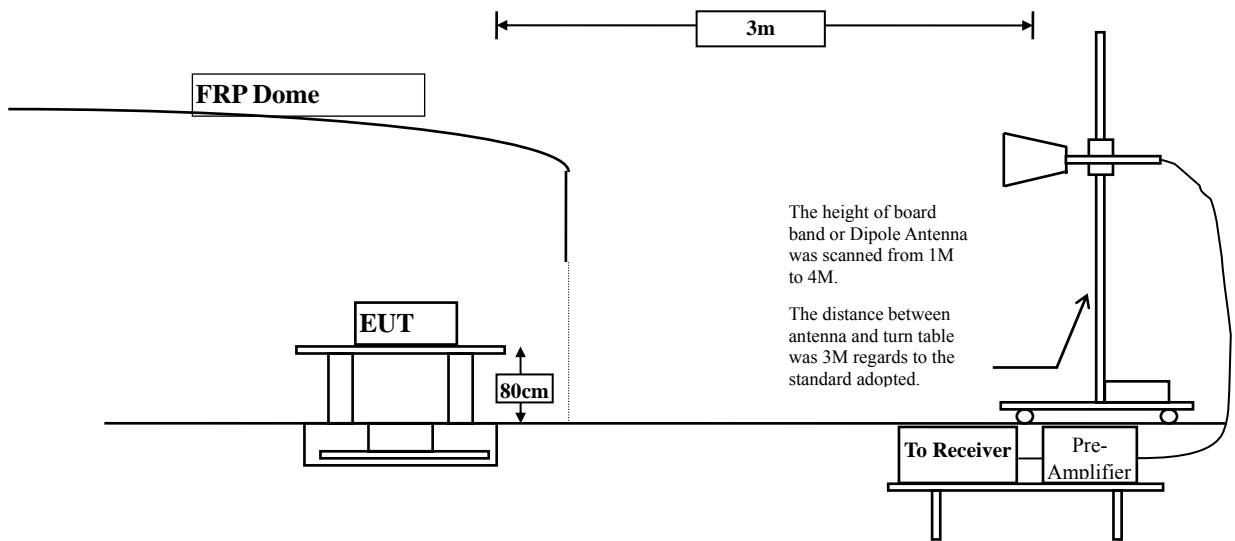

3.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10, 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured on the Final Measurement.

The measurement frequency range form 9kHz - 10th Harmonic of fundamental was investigated.

3.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

3.6. Test Result of Radiated Emission

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4804.000	3.327	37.520	40.847	-33.153	74.000
7206.000	10.136	36.520	46.656	-27.344	74.000
9608.000	13.706	36.520	50.226	-23.774	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4804.000	6.638	37.350	43.987	-30.013	74.000
7206.000	11.005	36.530	47.535	-26.465	74.000
9608.000	14.103	36.520	50.623	-23.377	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4882.000	3.001	36.590	39.591	-34.409	74.000
7323.000	11.846	36.520	48.367	-25.633	74.000
9764.000	12.563	35.590	48.153	-25.847	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4882.000	5.713	36.260	41.974	-32.026	74.000
7323.000	12.727	36.150	48.878	-25.122	74.000
9764.000	13.028	36.530	49.558	-24.442	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4960.000	2.760	36.530	39.290	-34.710	74.000
7440.000	12.567	36.590	49.156	-24.844	74.000
9920.000	13.456	35.590	49.046	-24.954	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4960.000	2.760	36.530	39.290	-34.710	74.000
7440.000	12.567	36.590	49.156	-24.844	74.000
9920.000	13.456	35.590	49.046	-24.954	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4804.000	3.327	36.590	39.917	-34.083	74.000
7206.000	10.136	36.510	46.646	-27.354	74.000
9608.000	13.706	36.520	50.226	-23.774	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4804.000	6.638	36.520	43.157	-30.843	74.000
7206.000	11.005	36.840	47.845	-26.155	74.000
9608.000	14.103	36.540	50.643	-23.357	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4882.000	3.001	36.510	39.511	-34.489	74.000
7223.000	10.428	36.020	46.448	-27.552	74.000
9764.000	12.563	36.520	49.083	-24.917	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4882.000	5.713	36.510	42.224	-31.776	74.000
7323.000	12.727	36.510	49.238	-24.762	74.000
9764.000	13.028	36.510	49.538	-24.462	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4960.000	2.760	36.510	39.270	-34.730	74.000
7440.000	12.567	36.540	49.106	-24.894	74.000
9920.000	13.456	36.850	50.306	-23.694	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
4960.000	5.557	36.590	42.147	-31.853	74.000
7440.000	13.426	36.060	49.485	-24.515	74.000
9920.000	13.958	36.540	50.498	-23.502	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
97.900	-7.650	44.420	36.769	-6.731	43.500
194.900	-11.012	47.864	36.852	-6.648	43.500
394.720	-2.304	41.161	38.857	-7.143	46.000
600.360	3.977	36.407	40.384	-5.616	46.000
782.720	4.325	37.718	42.043	-3.957	46.000
967.020	6.921	31.844	38.765	-15.235	54.000
Vertical					
101.780	-0.021	33.117	33.095	-10.405	43.500
183.260	-10.764	50.179	39.415	-4.085	43.500
321.000	-6.899	45.445	38.546	-7.454	46.000
468.440	-4.725	40.841	36.116	-9.884	46.000
637.220	-3.649	41.654	38.005	-7.995	46.000
873.900	1.260	36.268	37.528	-8.472	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
95.960	-7.820	46.405	38.585	-4.915	43.500
274.440	-5.718	42.294	36.576	-9.424	46.000
468.440	1.195	34.133	35.328	-10.672	46.000
650.800	2.175	35.590	37.765	-8.235	46.000
825.400	6.250	27.280	33.530	-12.470	46.000
959.260	6.294	24.892	31.186	-14.814	46.000
Vertical					
74.620	-5.082	41.877	36.795	-3.205	40.000
251.160	-7.505	43.290	35.785	-10.215	46.000
499.480	-0.852	34.678	33.826	-12.174	46.000
701.240	0.198	30.911	31.109	-14.891	46.000
877.780	1.979	28.180	30.159	-15.841	46.000
965.080	7.932	25.225	33.157	-20.843	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge

4.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2014
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2014
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	X Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2014
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2014
	X Coaxial Cable	Quietek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	Quietek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

- Note:
1. All equipments are calibrated every one year.
 2. The test instruments marked by "X" are used to measure the final test results.


4.2. Test Setup

RF Conducted Measurement

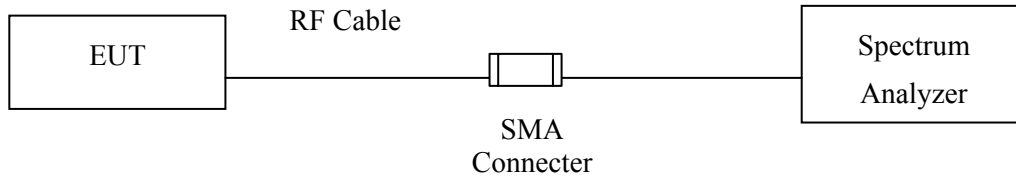

RF Radiated Measurement:

Above 1GHz

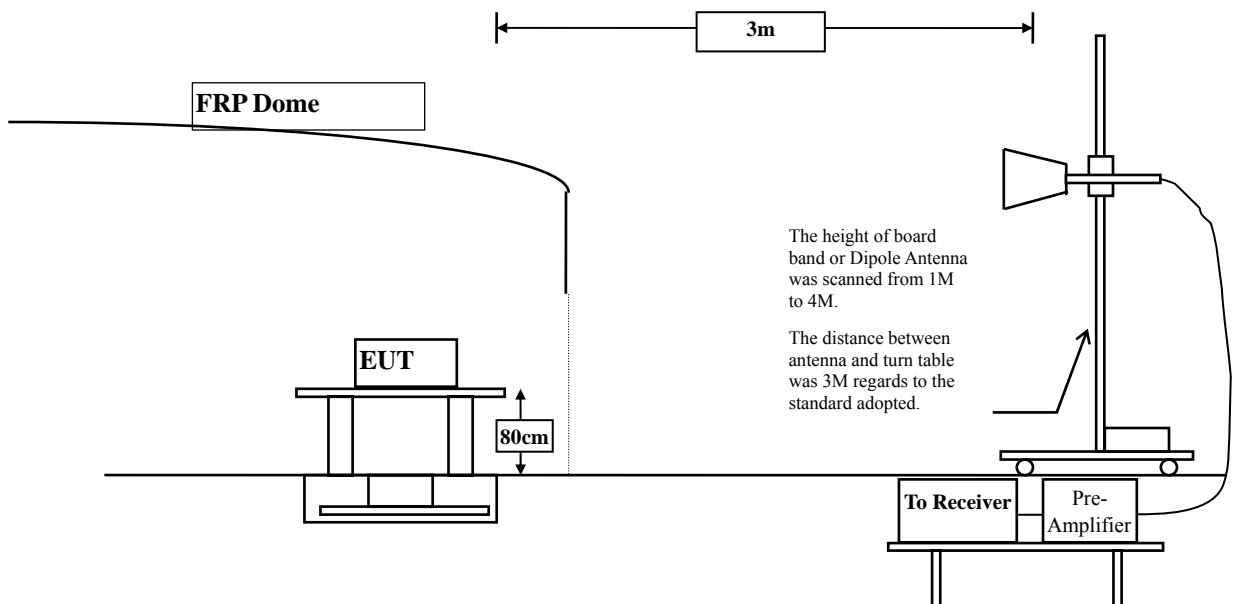

4.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2009 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10: 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Band Edge

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2382.100	-2.722	52.025	49.303	74.00	54.00	Pass
00 (Peak)	2390.000	-2.687	49.691	47.004	74.00	54.00	Pass
00 (Peak)	2400.000	-2.660	60.930	58.270	74.00	54.00	Pass
00 (Peak)	2402.200	-2.657	100.668	98.011	--	--	--
00 (Average)	2382.000	-2.722	40.664	37.942	74.00	54.00	Pass
00 (Average)	2390.000	-2.687	38.239	35.552	74.00	54.00	Pass
00 (Average)	2400.000	-2.660	48.294	45.634	74.00	54.00	Pass
00 (Average)	2402.000	-2.657	87.572	84.915	--	--	--

Figure Channel 00: Horizontal (Peak)


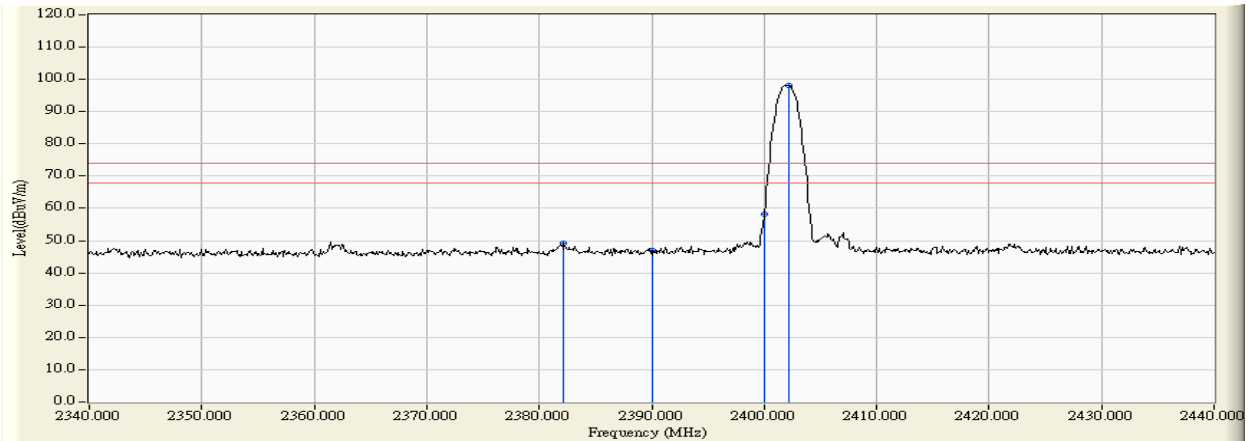


Figure Channel 00: Horizontal (Average)

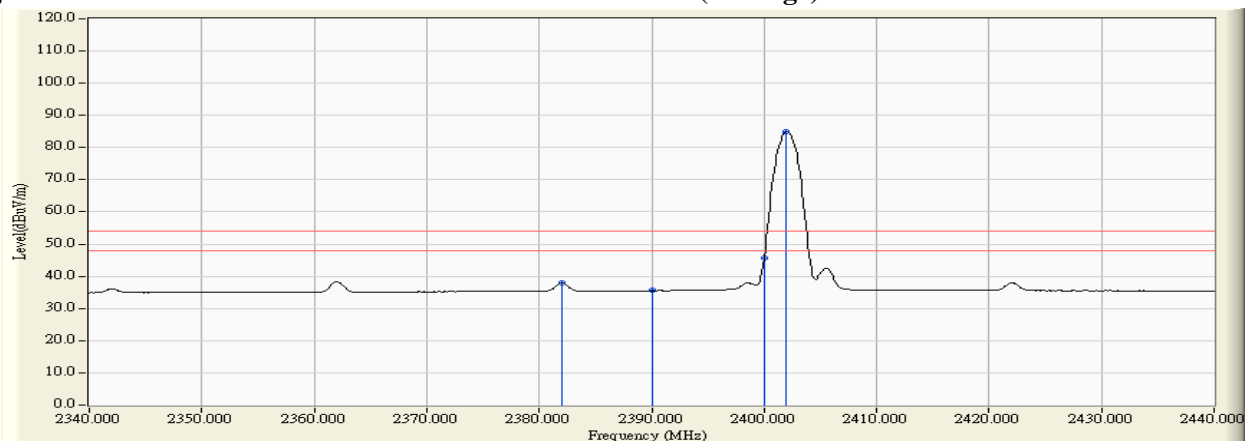

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*” , means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2362.200	-4.064	54.349	50.285	74.00	54.00	Pass
00 (Peak)	2390.000	-4.159	49.272	45.113	74.00	54.00	Pass
00 (Peak)	2400.000	-4.171	64.229	60.058	74.00	54.00	Pass
00 (Peak)	2401.900	-4.171	104.826	100.655	--	--	--
00 (Average)	2362.100	-4.063	46.072	42.009	74.00	54.00	Pass
00 (Average)	2390.000	-4.159	38.496	34.337	74.00	54.00	Pass
00 (Average)	2400.000	-4.171	51.653	47.482	74.00	54.00	Pass
00 (Average)	2402.000	-4.171	90.921	86.750	--	--	--

Figure Channel 00: Vertical (Peak)


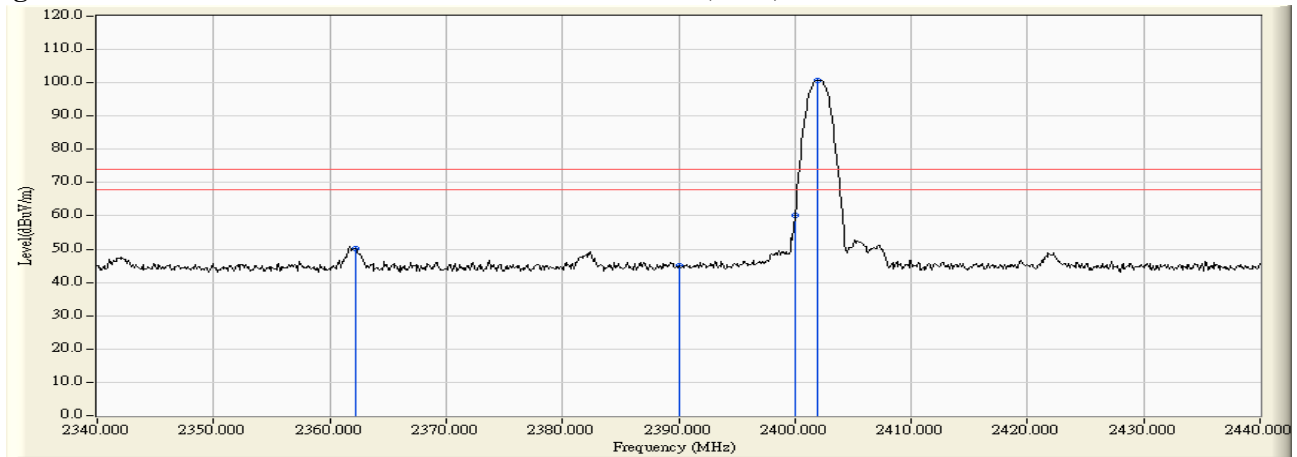


Figure Channel 00: Vertical (Average)

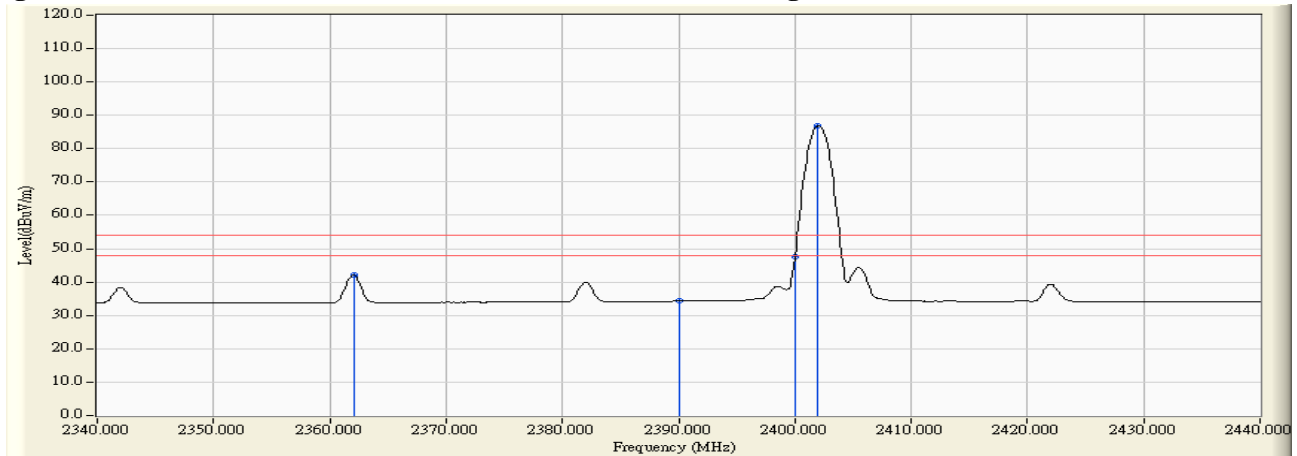

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2479.900	-2.605	102.063	99.458	--	--	--
78 (Peak)	2483.500	-2.601	55.014	52.412	74.00	54.00	Pass
78 (Peak)	2485.200	-2.600	56.151	53.551	74.00	54.00	Pass
78 (Average)	2480.000	-2.605	88.708	86.103	--	--	--
78 (Average)	2483.500	-2.601	46.569	43.967	74.00	54.00	Pass

Figure Channel 78: Horizontal (Peak)


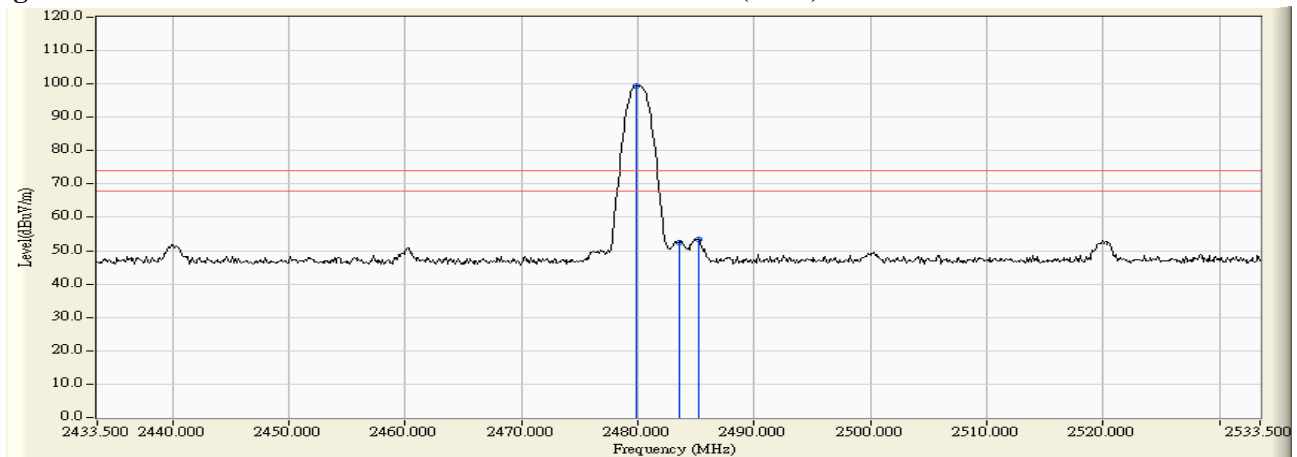


Figure Channel 78: Horizontal (Average)

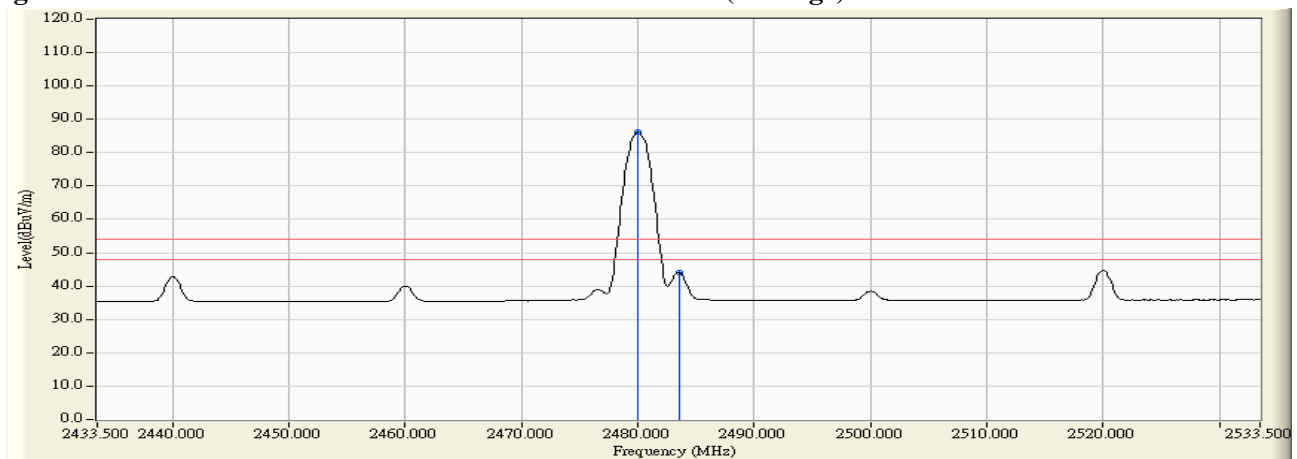

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2480.200	-3.977	108.375	104.398	--	--	--
78 (Peak)	2483.500	-3.966	59.681	55.714	74.00	54.00	Pass
78 (Peak)	2485.100	-3.961	61.723	57.761	74.00	54.00	Pass
78 (Average)	2480.000	-3.978	93.782	89.804	--	--	--
78 (Average)	2483.500	-3.966	51.654	47.687	74.00	54.00	Pass
78 (Average)	2520.000	-3.814	53.600	49.786	74.00	54.00	Pass

Figure Channel 78:

Vertical (Peak)


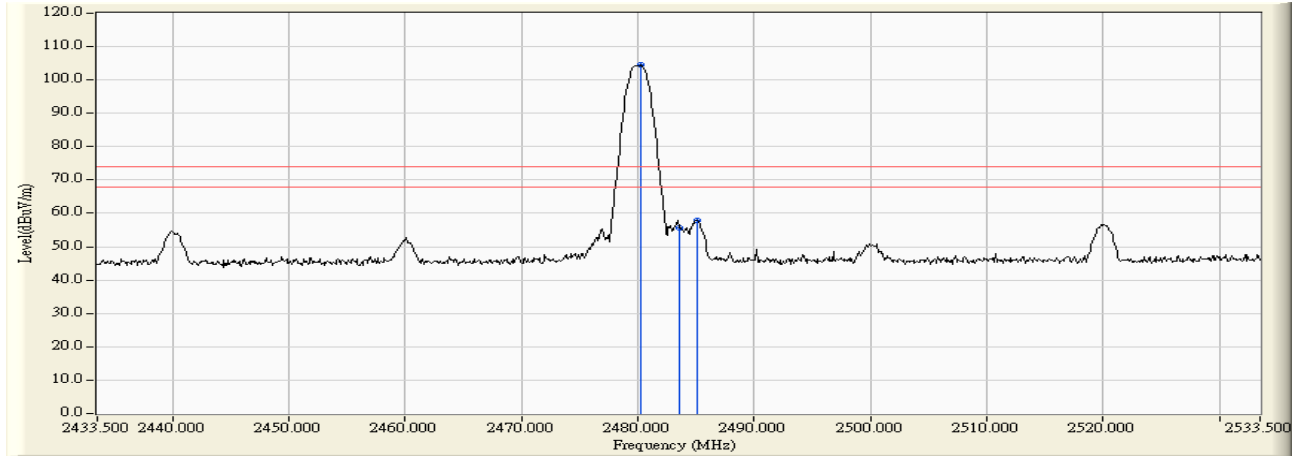


Figure Channel 78:

Vertical (Average)

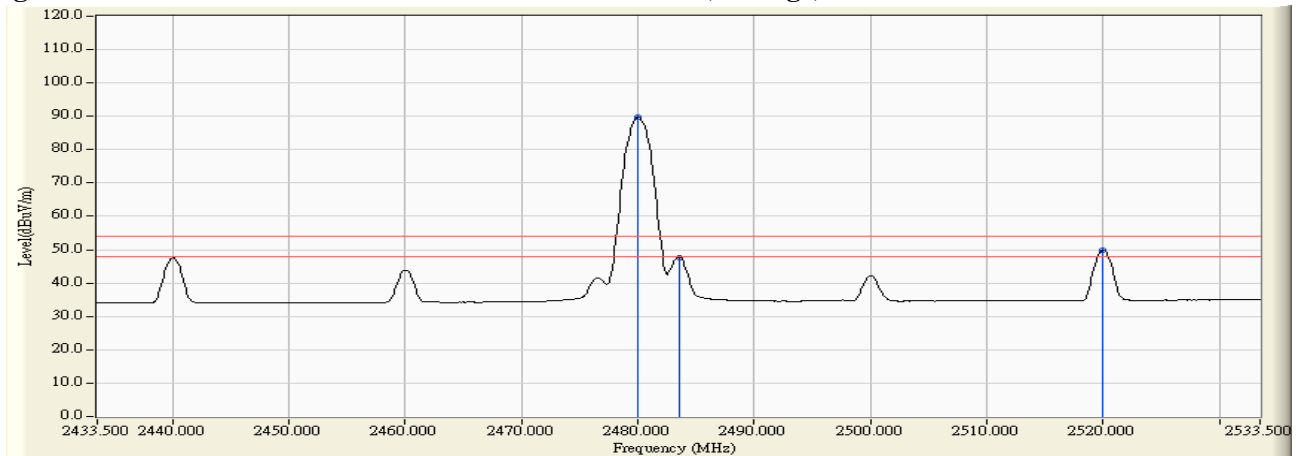

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2383.000	-2.719	52.317	49.599	74.00	54.00	Pass
00 (Peak)	2390.000	-2.687	47.783	45.096	74.00	54.00	Pass
00 (Peak)	2400.000	-2.660	71.787	69.127	74.00	54.00	Pass
00 (Peak)	2402.100	-2.657	99.353	96.696	--	--	--
00 (Average)	2362.300	-2.809	40.178	37.369	74.00	54.00	Pass
00 (Average)	2390.000	-2.687	38.299	35.612	74.00	54.00	Pass
00 (Average)	2400.000	-2.660	56.455	53.795	74.00	54.00	Pass
00 (Average)	2402.000	-2.657	84.729	82.072	--	--	--

Figure Channel 00: Horizontal (Peak)


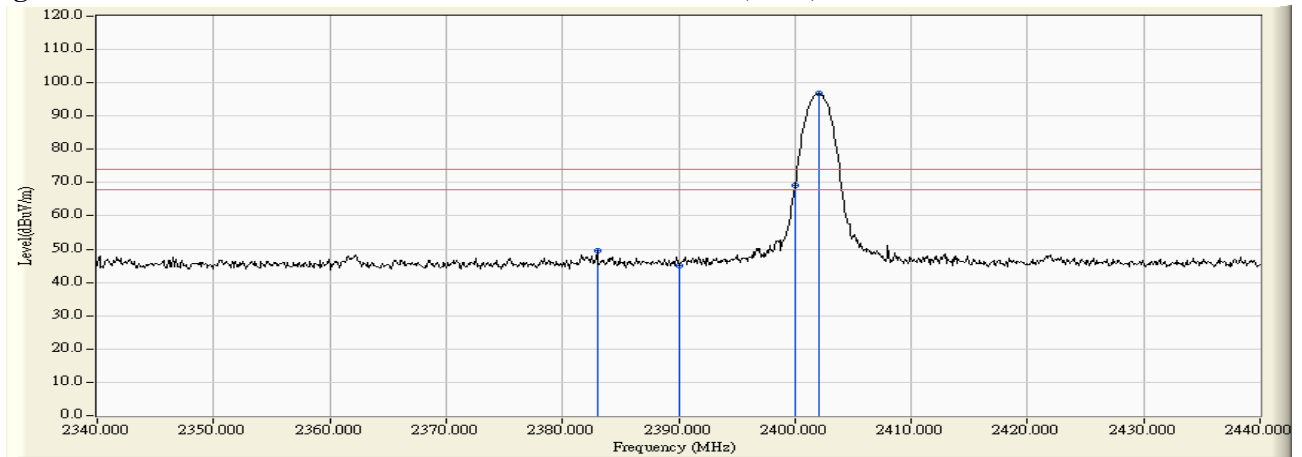


Figure Channel 00: Horizontal (Average)

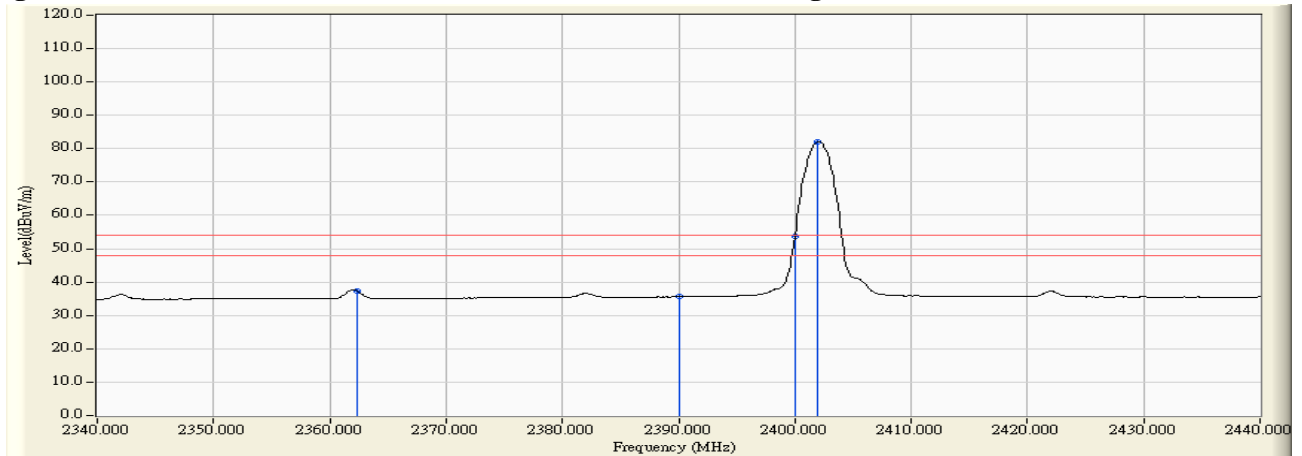

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
00 (Peak)	2362.200	-4.064	53.994	49.930	74.00	54.00	Pass
00 (Peak)	2390.000	-4.159	50.363	46.204	74.00	54.00	Pass
00 (Peak)	2400.000	-4.171	76.678	72.507	74.00	54.00	Pass
00 (Peak)	2402.000	-4.171	104.706	100.535	--	--	--
00 (Average)	2362.200	-4.064	43.879	39.815	74.00	54.00	Pass
00 (Average)	2390.000	-4.159	38.745	34.586	74.00	54.00	Pass
00 (Average)	2400.000	-4.171	60.576	56.405	--	--	--
00 (Average)	2402.100	-4.171	89.011	84.840	--	--	--

Figure Channel 00: Vertical (Peak)


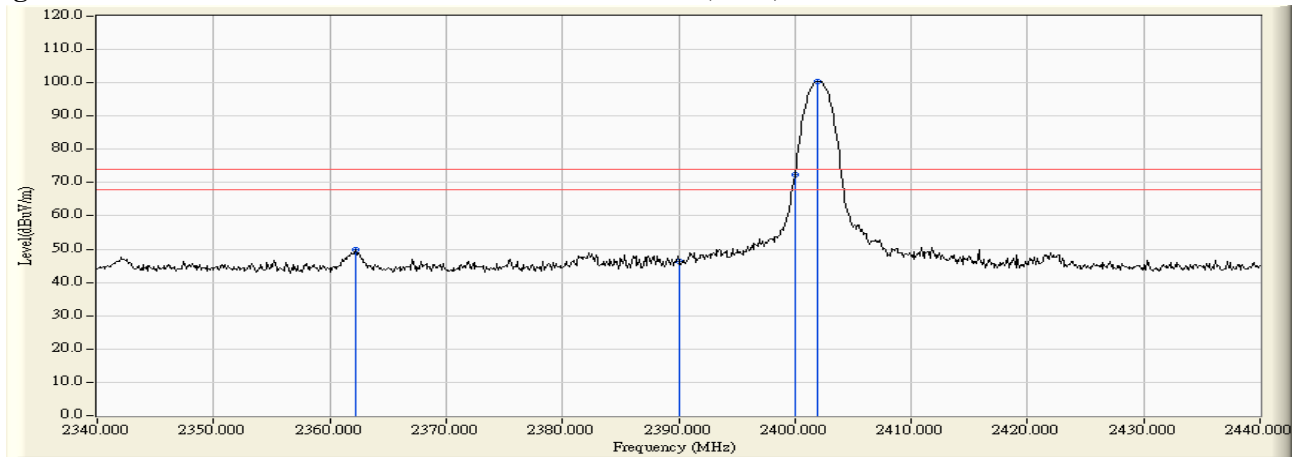


Figure Channel 00: Vertical (Average)

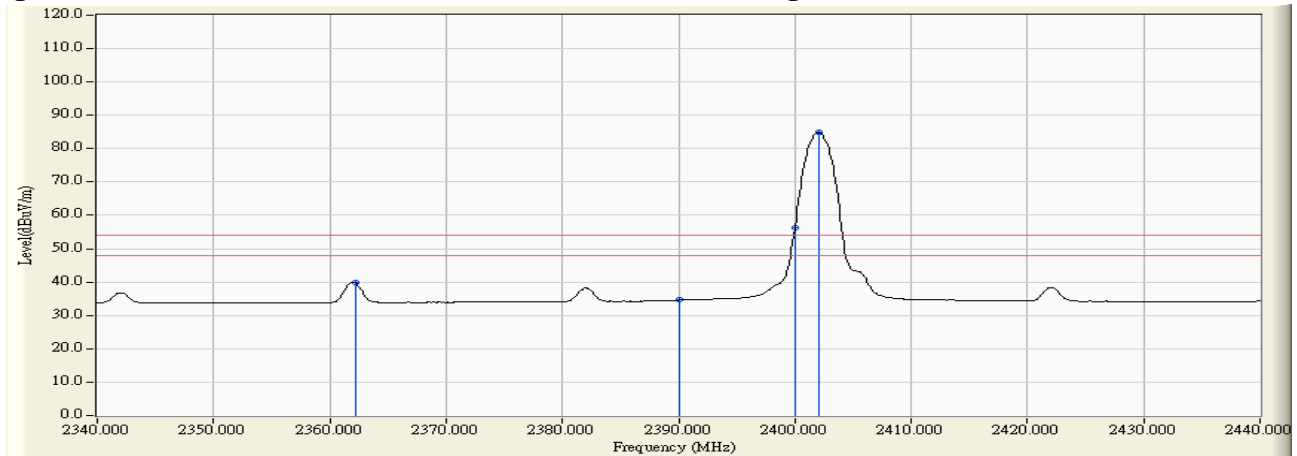

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2480.000	-2.605	101.088	98.483	--	--	--
78 (Peak)	2483.500	-2.601	56.162	53.560	74.00	54.00	Pass
78 (Average)	2480.000	-2.605	86.327	83.722	--	--	--
78 (Average)	2483.500	-2.601	45.557	42.955	74.00	54.00	Pass

Figure Channel 78: Horizontal (Peak)


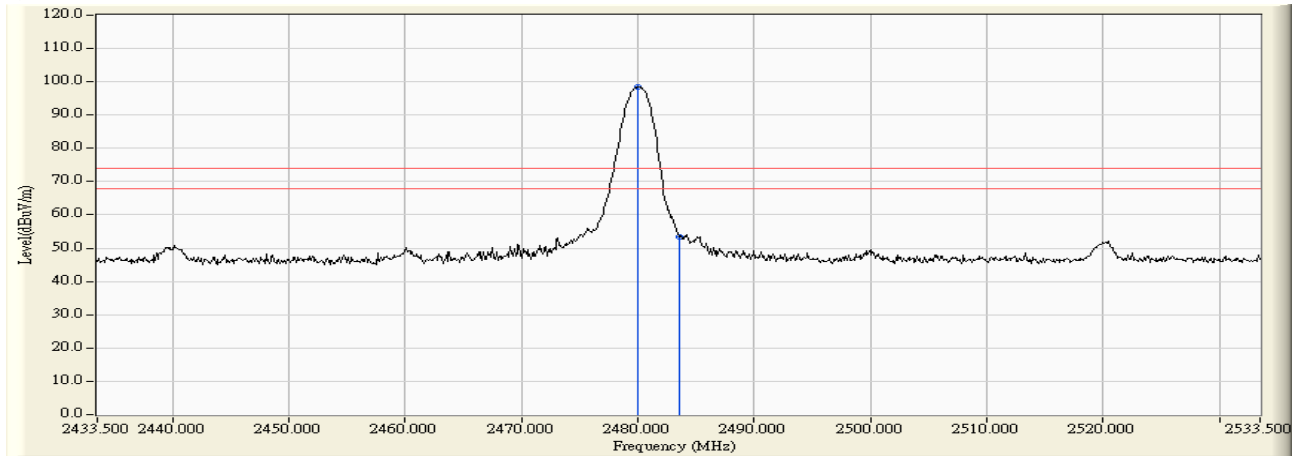


Figure Channel 78: Horizontal (Average)

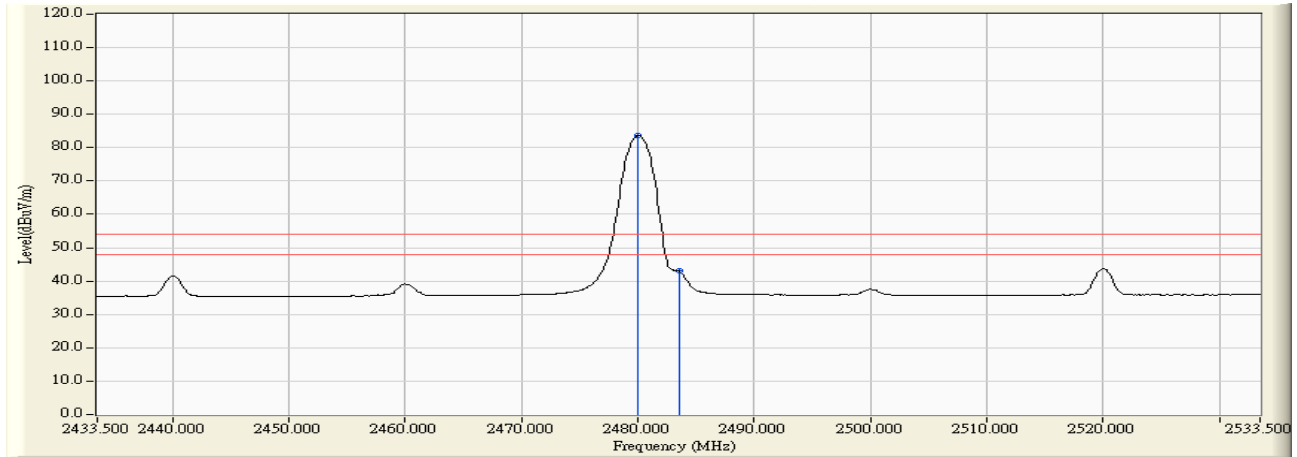

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 7260
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
78 (Peak)	2480.100	-3.977	108.422	104.445	--	--	--
78 (Peak)	2483.500	-3.966	64.582	60.615	74.00	54.00	Pass
78 (Average)	2480.100	-3.977	92.215	88.238	--	--	--
78 (Average)	2483.500	-3.966	51.381	47.414	74.00	54.00	Pass
78 (Average)	2520.200	-3.814	52.671	48.858	74.00	54.00	Pass

Figure Channel 78:

Vertical (Peak)


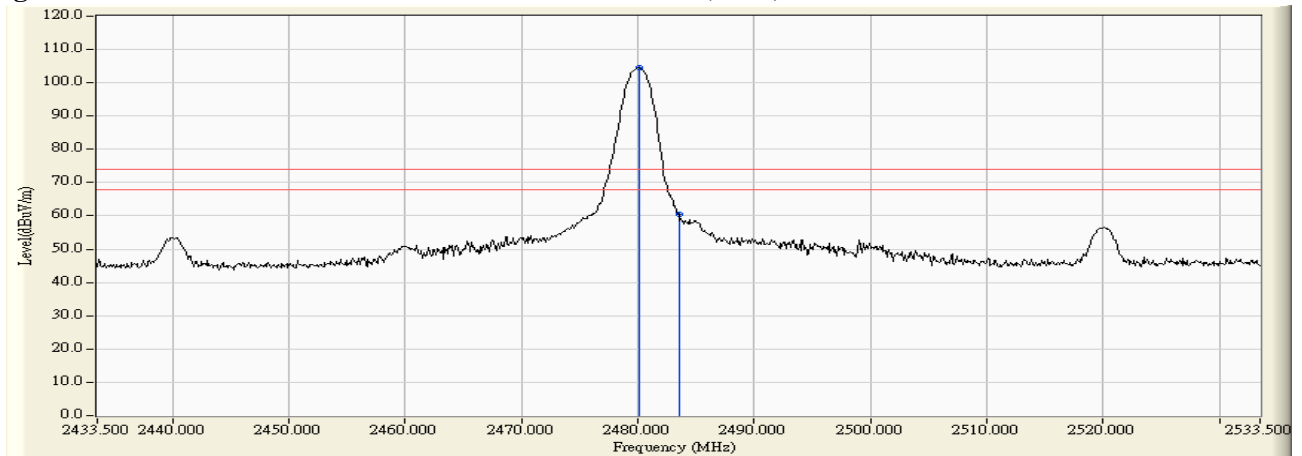


Figure Channel 78:

Vertical (Average)

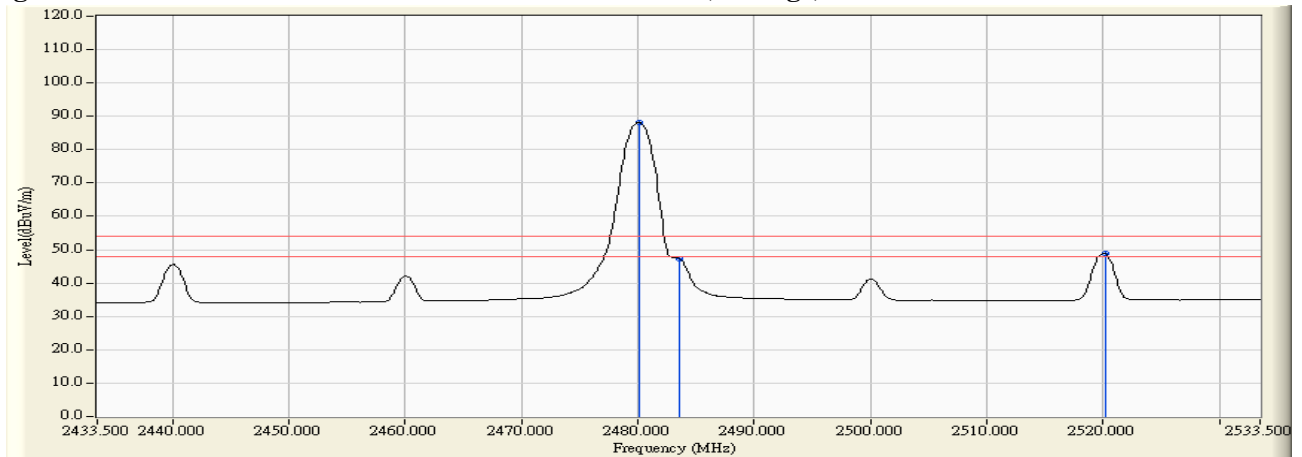

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

5. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs