

WLAN 2450 Mhz Body SAR Test

Date: 2014-01-04

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11b_1Mbps_CH6_Main_Ant.da4](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 50.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(6.62, 6.62, 6.62); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11b_1Mbps_CH6_Main Ant/Area Scan (91x221x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.447 mW/g

WLAN_Base_802.11b_1Mbps_CH6_Main Ant/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 0.774 V/m; Power Drift = -0.002 dB
 Peak SAR (extrapolated) = 1.03 W/kg
SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.102 mW/g
 Maximum value of SAR (measured) = 0.605 mW/g

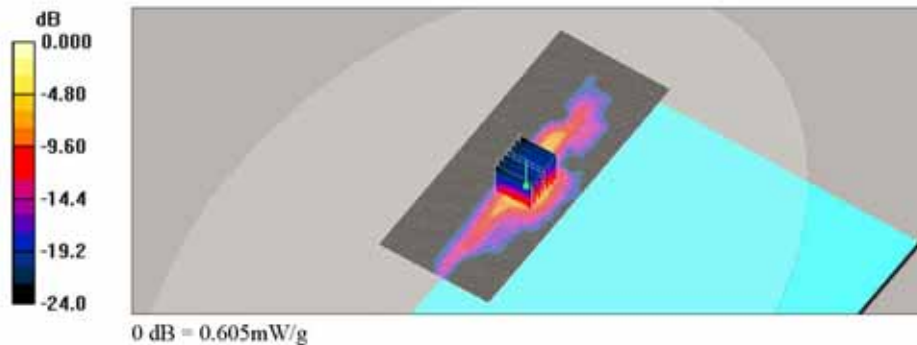

Date: 2014-01-04

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11b_1Mbps_CH6_Aux_Ant.da4](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(6.62, 6.62, 6.62); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11b_1Mbps_CH6_Aux Ant/Area Scan (91x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.796 mW/g

WLAN_Base_802.11b_1Mbps_CH6_Aux Ant/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 3.79 V/m; Power Drift = 0.044 dB
 Peak SAR (extrapolated) = 1.56 W/kg
SAR(1 g) = 0.525 mW/g; SAR(10 g) = 0.192 mW/g
 Maximum value of SAR (measured) = 0.951 mW/g

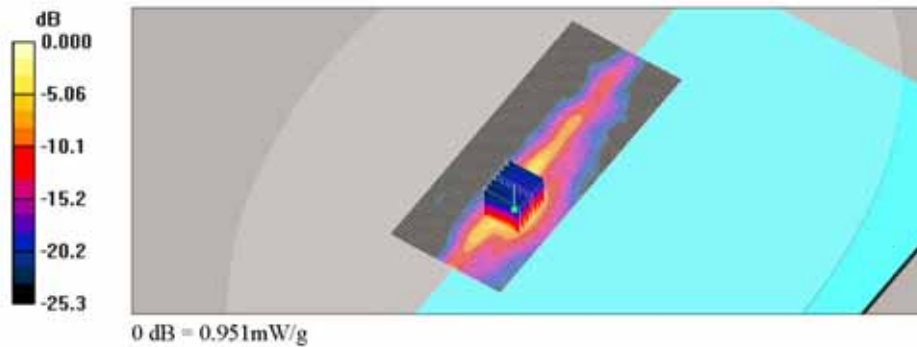

Date: 2014-01-04

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11g_6Mbps_CH6_Main_Ant.da4](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(6.62, 6.62, 6.62); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11g_6Mbps_CH6_Main Ant/Area Scan (91x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.583 mW/g

WLAN_Base_802.11g_6Mbps_CH6_Main Ant/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 0.711 V/m; Power Drift = -0.015 dB
 Peak SAR (extrapolated) = 1.21 W/kg
SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.122 mW/g
 Maximum value of SAR (measured) = 0.721 mW/g

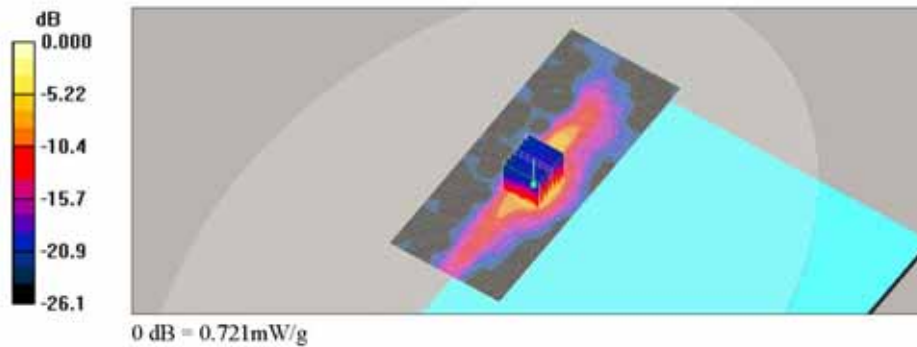

Date: 2014-01-04

Test Laboratory: SGS Korea (Gunpo Laboratory)
File Name: [WLAN_Base_802.11g_6Mbps_CH1_Main_Ant.da4](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:
- Probe: EX3DV4 - SN3791; ConvF(6.62, 6.62, 6.62); Calibrated: 2013-06-04
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2013-01-25
- Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11g_6Mbps_CH1_Main Ant/Area Scan (91x221x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.333 mW/g

WLAN_Base_802.11g_6Mbps_CH1_Main Ant/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.49 V/m; Power Drift = 0.172 dB
Peak SAR (extrapolated) = 0.552 W/kg
SAR(1 g) = 0.161 mW/g; SAR(10 g) = 0.057 mW/g
Maximum value of SAR (measured) = 0.330 mW/g

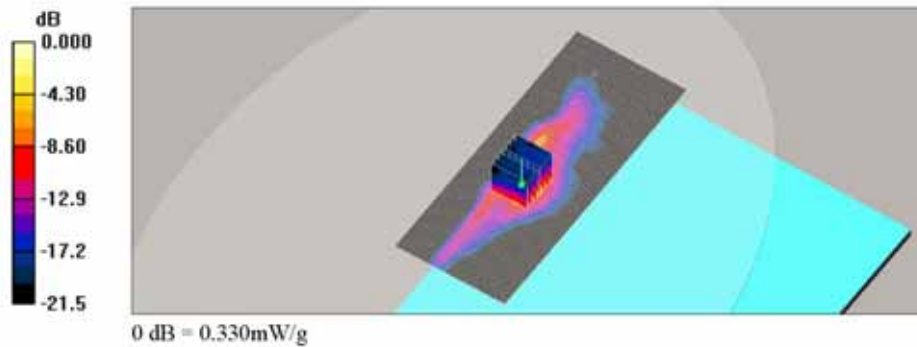

Date: 2014-01-04

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11g_6Mbps_CH11_Main_Ant.da4](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.99 \text{ mho/m}$; $\epsilon_r = 50.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(6.62, 6.62, 6.62); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11g_6Mbps_CH11_Main Ant/Area Scan (91x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.534 mW/g

WLAN_Base_802.11g_6Mbps_CH11_Main Ant/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 2.99 V/m; Power Drift = 0.093 dB
 Peak SAR (extrapolated) = 0.923 W/kg
 SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.094 mW/g
 Maximum value of SAR (measured) = 0.544 mW/g

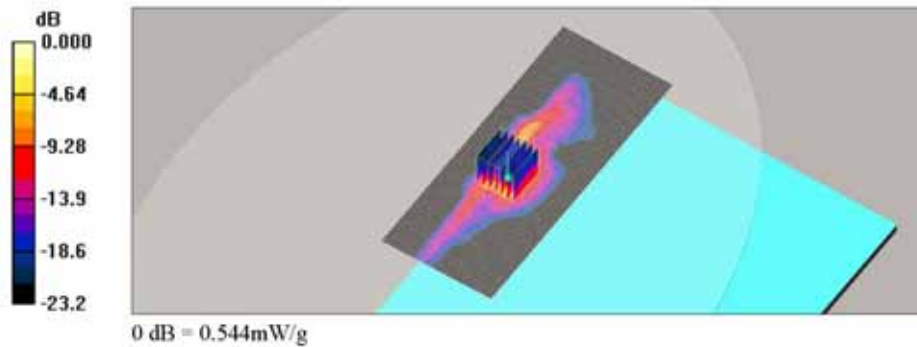

Date: 2014-01-04

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11g_6Mbps_CH6_Aux_Ant.da4](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(6.62, 6.62, 6.62); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11g_6Mbps_CH6_Aux Ant/Area Scan (91x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.36 mW/g

WLAN_Base_802.11g_6Mbps_CH6_Aux Ant/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.72 V/m; Power Drift = 0.054 dB
 Peak SAR (extrapolated) = 2.64 W/kg
SAR(1 g) = 0.875 mW/g; SAR(10 g) = 0.319 mW/g
 Maximum value of SAR (measured) = 1.54 mW/g

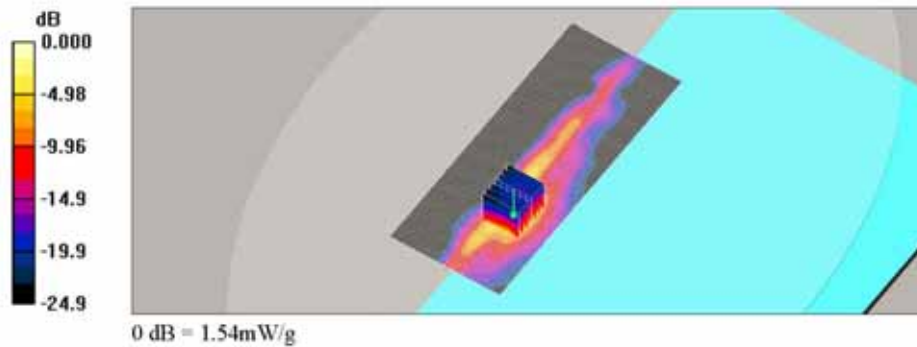

Date: 2014-01-04

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11g_6Mbps_CH1_Aux_Ant.da4](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.92$ mho/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(6.62, 6.62, 6.62); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11g_6Mbps_CH1_Aux Ant/Area Scan (91x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.496 mW/g

WLAN_Base_802.11g_6Mbps_CH1_Aux Ant/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 2.24 V/m; Power Drift = -0.011 dB
 Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.323 mW/g; SAR(10 g) = 0.118 mW/g
 Maximum value of SAR (measured) = 0.622 mW/g

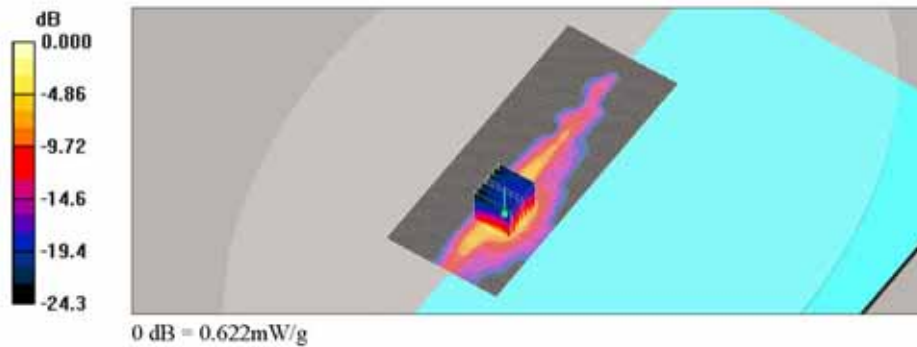

Date: 2014-01-04

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11g_6Mbps_CH11_Aux_Ant.da4](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(6.62, 6.62, 6.62); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11g_6Mbps_CH11_Aux Ant/Area Scan (91x221x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.974 mW/g

WLAN_Base_802.11g_6Mbps_CH11_Aux Ant/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 3.93 V/m; Power Drift = 0.029 dB
 Peak SAR (extrapolated) = 1.86 W/kg
SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.224 mW/g
 Maximum value of SAR (measured) = 1.15 mW/g

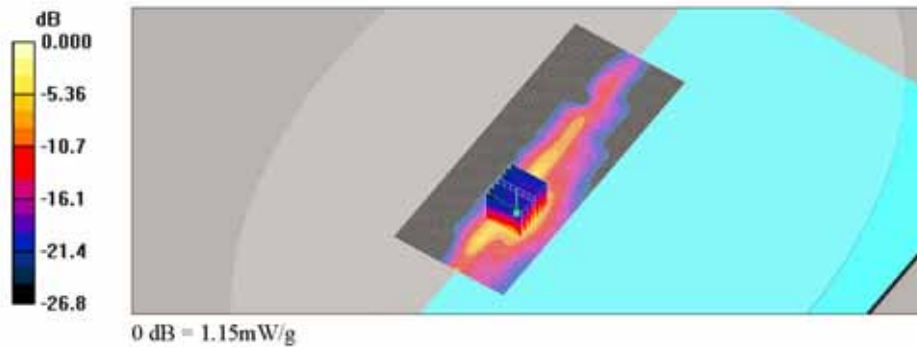

Date: 2014-01-04

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Back Screen_802.11g_6Mbps_CH6_Main Ant.da4](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 50.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(6.62, 6.62, 6.62); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Back Screen_802.11g_6Mbps_CH6_Main Ant/Area Scan (141x201x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.019 mW/g

WLAN_Back Screen_802.11g_6Mbps_CH6_Main Ant/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 0.698 V/m; Power Drift = 0.139 dB
 Peak SAR (extrapolated) = 0.013 W/kg
 SAR(1 g) = 0.00361 mW/g; SAR(10 g) = 0.00119 mW/g
 Maximum value of SAR (measured) = 0.006 mW/g

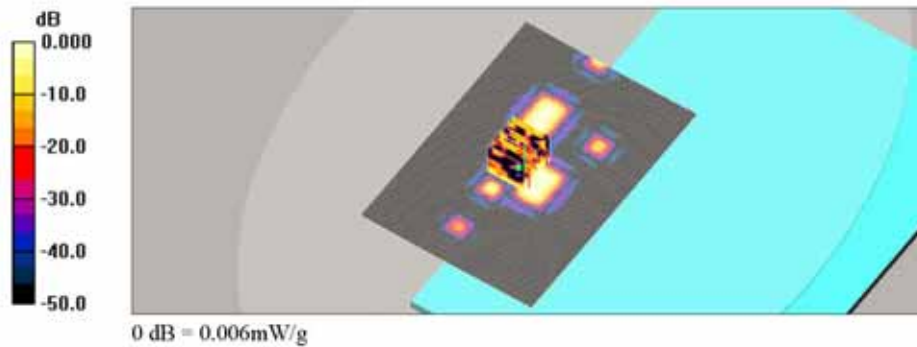

Date: 2014-01-04

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Back Screen_802.11g_6Mbps_CH6_Aux Ant.dad](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 50.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(6.62, 6.62, 6.62); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Back Screen_802.11g_6Mbps_CH6_Aux Ant/Area Scan (181x281x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.013 mW/g

WLAN_Back Screen_802.11g_6Mbps_CH6_Aux Ant/Zoom Scan (7x7x7)/Cube 0: Measurement grid:
 $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 1.57 V/m; Power Drift = -0.117 dB
 Peak SAR (extrapolated) = 0.019 W/kg
 SAR(1 g) = 0.00909 mW/g; SAR(10 g) = 0.00564 mW/g
 Maximum value of SAR (measured) = 0.013 mW/g

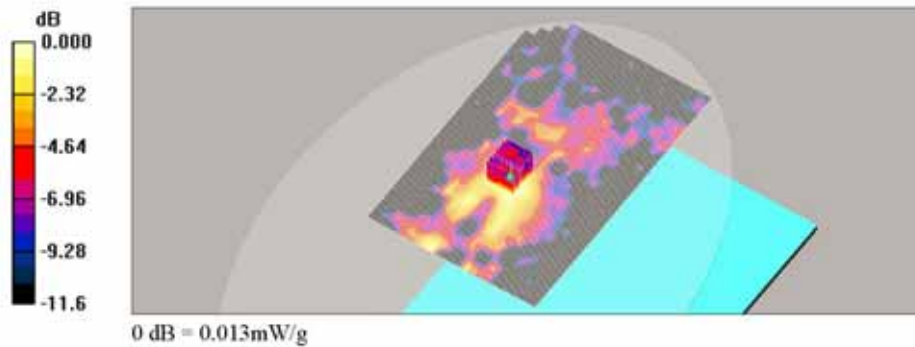

Date: 2014-01-04

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11g_6Mbps_CH6_Aux Ant_Repeat Test.daf](#)

Ambient Temp : 23.0 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(6.62, 6.62, 6.62); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11g_6Mbps_CH6_Aux Ant_Repeat Test/Area Scan (91x221x1): Measurement grid:
 dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.35 mW/g

WLAN_Base_802.11g_6Mbps_CH6_Aux Ant_Repeat Test/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.1 V/m; Power Drift = 0.061 dB
 Peak SAR (extrapolated) = 2.49 W/kg
SAR(1 g) = 0.817 mW/g; SAR(10 g) = 0.302 mW/g
 Maximum value of SAR (measured) = 1.55 mW/g

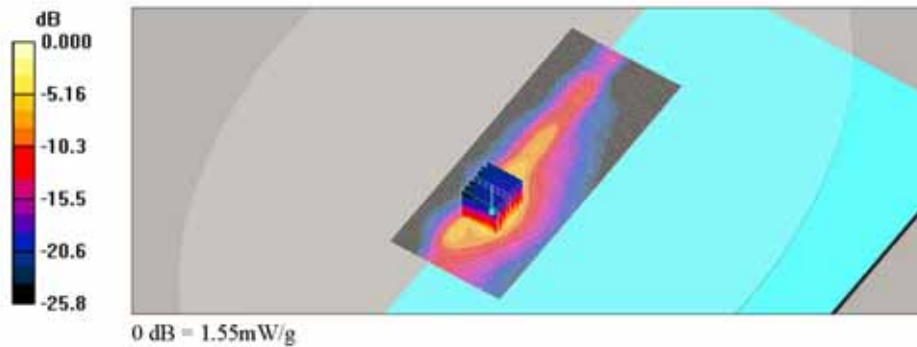

WLAN 5200 Mhz Body SAR Test

Date: 2014-01-06

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH44_Main_Ant.da4](#)

Ambient Temp : 22.7 °C Tissue Temp : 21.5 °C

DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body


Communication System: WLAN(11a_U-NII Low); Frequency: 5220 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.34 \text{ mho/m}$; $\epsilon_r = 50.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3791; ConvF(4.23, 4.23, 4.23); Calibrated: 2013-06-04
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2013-01-25
- Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH44_Main Ant/Area Scan (91x201x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.663 mW/g

WLAN_Base_802.11a_6Mbps_CH44_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid:
 $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.38 V/m; Power Drift = 0.092 dB
 Peak SAR (extrapolated) = 2.12 W/kg
SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.114 mW/g
 Maximum value of SAR (measured) = 0.762 mW/g

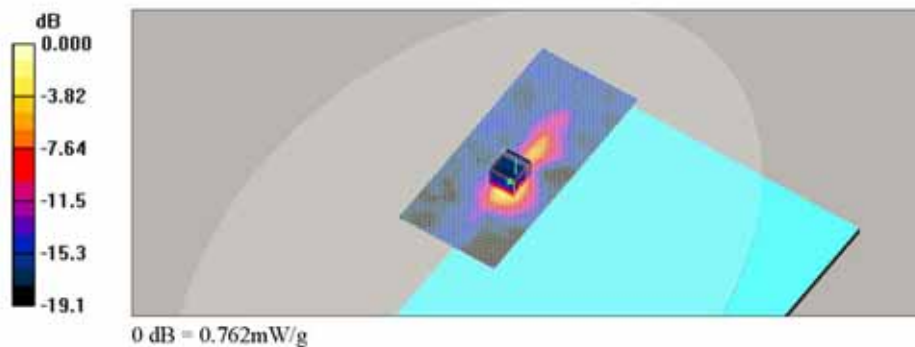

Date: 2014-01-06

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH40_Main_Ant.da4](#)

Ambient Temp : 22.7 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Low); Frequency: 5200 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5200$ MHz; $\sigma = 5.3$ mho/m; $\epsilon_r = 50.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4.23, 4.23, 4.23); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH40_Main Ant/Area Scan (81x161x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.806 mW/g

WLAN_Base_802.11a_6Mbps_CH40_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 0.979 V/m; Power Drift = -0.199 dB
 Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.089 mW/g
 Maximum value of SAR (measured) = 0.592 mW/g

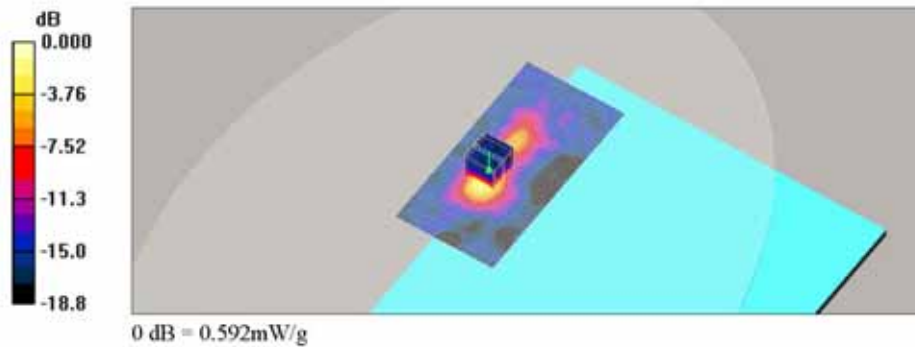

Date: 2014-01-06

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH44_AUX_Ant.da4](#)

Ambient Temp : 22.7 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Low); Frequency: 5220 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.34 \text{ mho/m}$; $\epsilon_r = 50.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4.23, 4.23, 4.23); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH44_Aux Ant/Area Scan (81x161x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.469 mW/g

WLAN_Base_802.11a_6Mbps_CH44_Aux Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 0.881 V/m; Power Drift = -0.036 dB
 Peak SAR (extrapolated) = 1.53 W/kg
SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.075 mW/g
 Maximum value of SAR (measured) = 0.660 mW/g

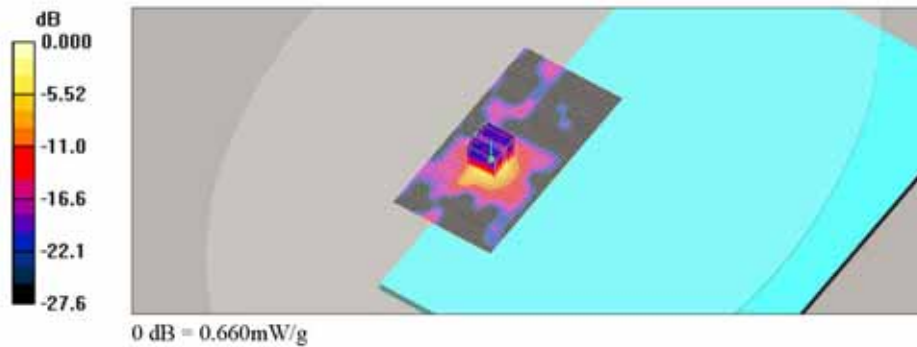

Date: 2014-01-06

Test Laboratory: SGS Korea (Gunpo Laboratory)

File Name: [WLAN_Back Screen_802.11a_6Mbps_CH44_Main Ant.da4](#)

Ambient Temp : 22.7 °C Tissue Temp : 21.5 °C

DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Low); Frequency: 5220 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.34 \text{ mho/m}$; $\epsilon_r = 50.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3791; ConvF(4.23, 4.23, 4.23); Calibrated: 2013-06-04
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2013-01-25
- Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Back Screen_802.11a_6Mbps_CH44_Main Ant/Area Scan (141x201x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.079 mW/g


WLAN_Back Screen_802.11a_6Mbps_CH44_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.68 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.090 W/kg

SAR(1 g) = 0.00618 mW/g; SAR(10 g) = 0.00263 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

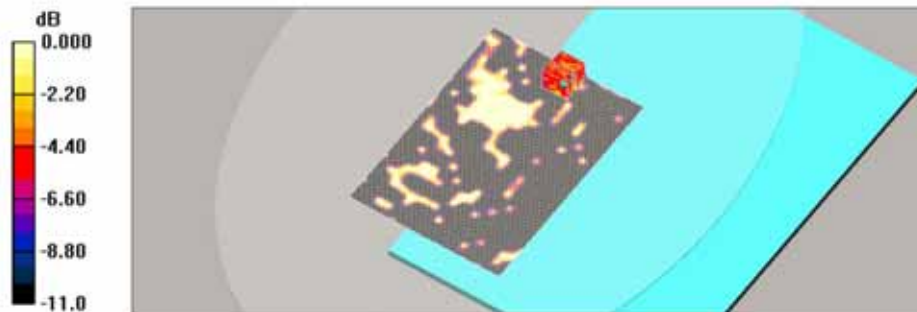

0 dB = 0.019mW/g

Date: 2014-01-06

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Back Screen_802.11a_6Mbps_CH44_AUX Ant.da4](#)

Ambient Temp : 22.7 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Low); Frequency: 5220 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.34 \text{ mho/m}$; $\epsilon_r = 50.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4.23, 4.23, 4.23); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Back Screen_802.11a_6Mbps_CH44_AUX Ant/Area Scan (141x201x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.028 mW/g

WLAN_Back Screen_802.11a_6Mbps_CH44_AUX Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.64 V/m; Power Drift = 0.032 dB
 Peak SAR (extrapolated) = 0.129 W/kg
 SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.0056 mW/g
 Maximum value of SAR (measured) = 0.023 mW/g

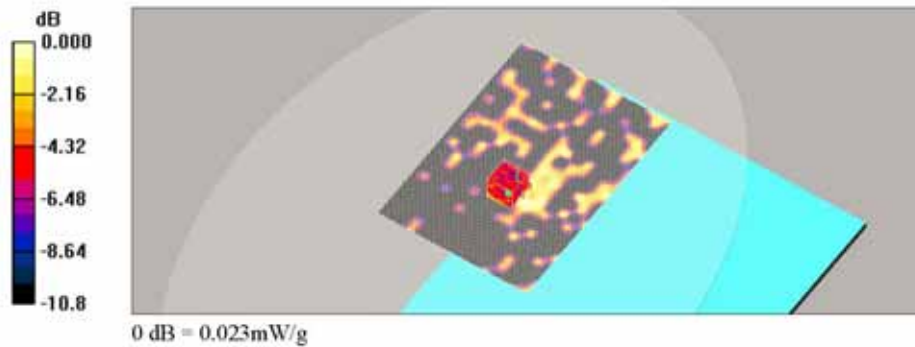

Date: 2014-01-06

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11ac_VHT6_CH42_Main_Ant.da4](#)

Ambient Temp : 22.7 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(802.11ac 80MHz); Frequency: 5210 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.32 \text{ mho/m}$; $\epsilon_r = 50.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4.23, 4.23, 4.23); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11ac_6Mbps_CH42_Main Ant/Area Scan (91x161x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.547 mW/g

WLAN_Base_802.11ac_6Mbps_CH42_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.03 V/m; Power Drift = -0.049 dB
 Peak SAR (extrapolated) = 0.437 W/kg
SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.023 mW/g
 Maximum value of SAR (measured) = 0.238 mW/g

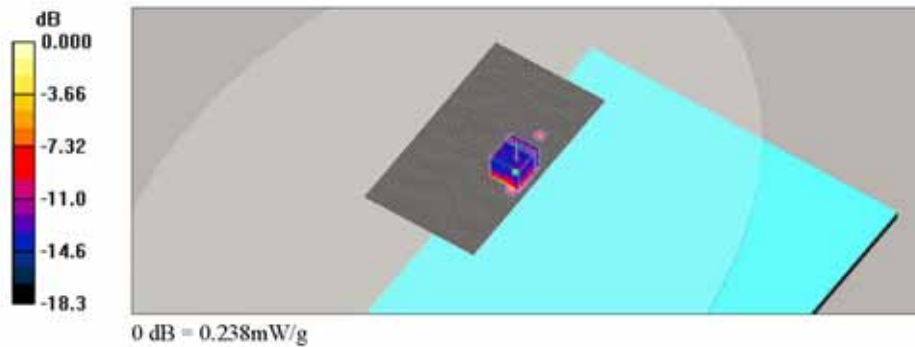

Date: 2014-01-06

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11ac_VHT6_CH42_AUX_Ant.da4](#)

Ambient Temp : 22.7 °C Tissue Temp : 21.5 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(802.11ac 80MHz); Frequency: 5210 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.32 \text{ mho/m}$; $\epsilon_r = 50.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4.23, 4.23, 4.23); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11ac_VHT6_CH42_Aux Ant/Area Scan (81x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.102 mW/g

WLAN_Base_802.11ac_VHT6_CH42_Aux Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.22 V/m; Power Drift = -0.090 dB
 Peak SAR (extrapolated) = 0.452 W/kg
SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.012 mW/g
 Maximum value of SAR (measured) = 0.144 mW/g

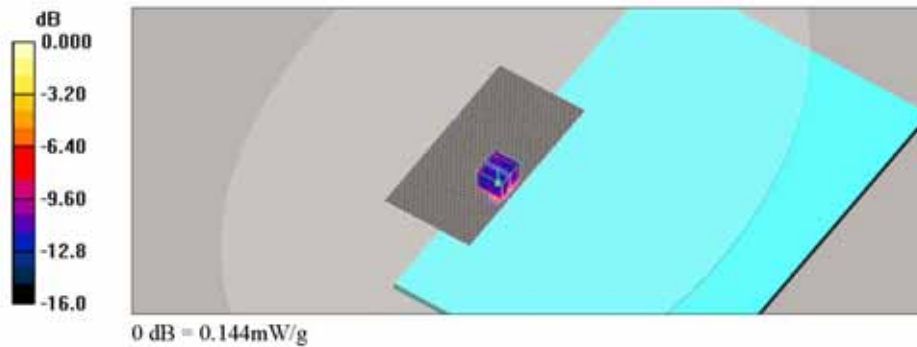

WLAN 5300 Mhz Body SAR Test

Date: 2014-01-08

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH56_Main_Ant.da4](#)

Ambient Temp : 23.3 °C Tissue Temp : 22.0 °C

DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body


Communication System: WLAN(11a_U-NII Low); Frequency: 5280 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 5.2 \text{ mho/m}$; $\epsilon_r = 49.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3791; ConvF(4.07, 4.07, 4.07); Calibrated: 2013-06-04
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2013-01-25
- Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH56_Main Ant/Area Scan (91x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 1.21 mW/g

WLAN_Base_802.11a_6Mbps_CH56_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid:
 $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.60 V/m; Power Drift = 0.144 dB
 Peak SAR (extrapolated) = 4.11 W/kg
SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.185 mW/g
 Maximum value of SAR (measured) = 1.55 mW/g

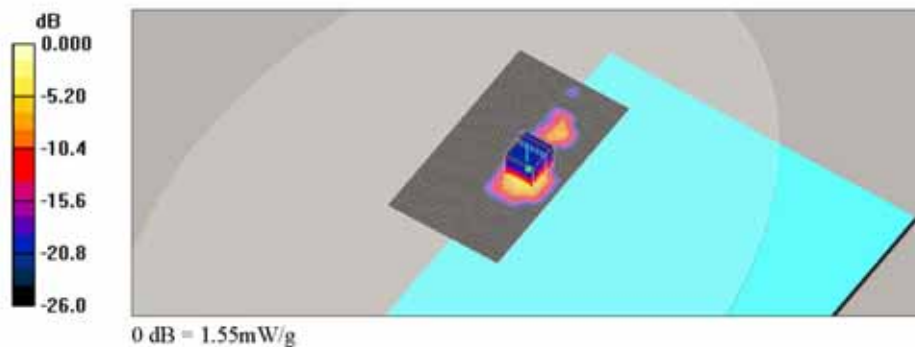

Date: 2014-01-08

Test Laboratory: SGS Korea (Gunpo Laboratory)
File Name: [WLAN_Base_802.11a_6Mbps_CH60_Main_Ant.da4](#)

Ambient Temp : 23.3 °C Tissue Temp : 22.0 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Low); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 5.22 \text{ mho/m}$; $\epsilon_r = 49.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:
- Probe: EX3DV4 - SN3791; ConvF(4.07, 4.07, 4.07); Calibrated: 2013-06-04
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2013-01-25
- Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH60 Main Ant/Area Scan (81x151x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.14 mW/g

WLAN_Base_802.11a_6Mbps_CH60 Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.67 V/m; Power Drift = 0.049 dB
Peak SAR (extrapolated) = 8.82 W/kg
SAR(1 g) = 0.655 mW/g; SAR(10 g) = 0.175 mW/g
Maximum value of SAR (measured) = 1.56 mW/g

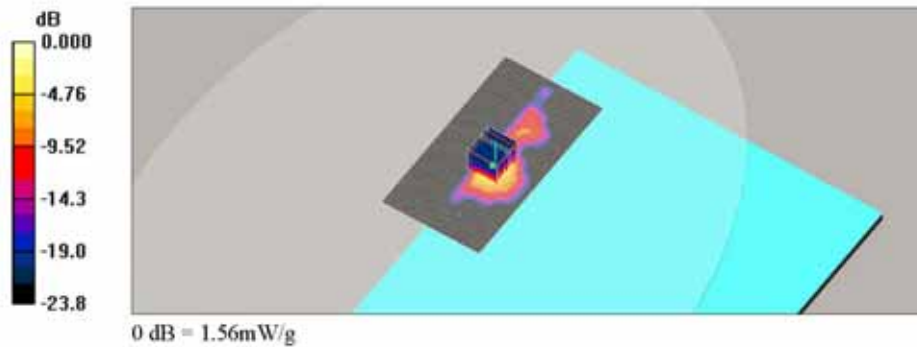

Date: 2014-01-08

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH60_AUX_Ant.da4](#)

Ambient Temp : 23.3 °C Tissue Temp : 22.0 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Low); Frequency: 5300 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.22$ mho/m; $\epsilon_r = 49.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4.07, 4.07, 4.07); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH60_Aux Ant/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.918 mW/g

WLAN_Base_802.11a_6Mbps_CH60_Aux Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.77 V/m; Power Drift = -0.102 dB
 Peak SAR (extrapolated) = 2.65 W/kg
SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.119 mW/g
 Maximum value of SAR (measured) = 1.07 mW/g

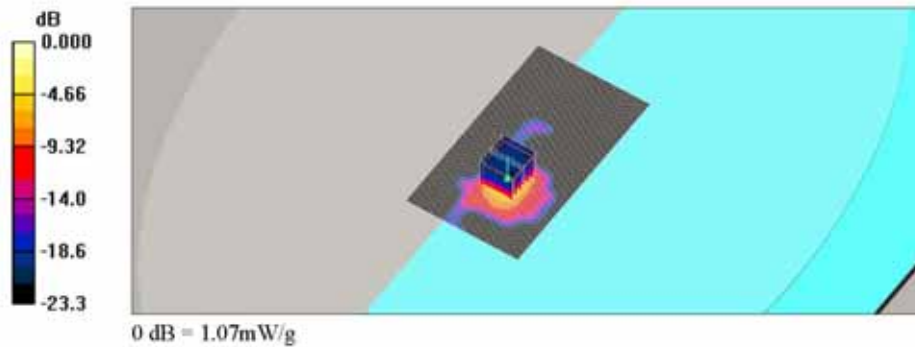

Date: 2014-01-08

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH56_AUX_Ant.da4](#)

Ambient Temp : 23.3 °C Tissue Temp : 22.0 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Low); Frequency: 5280 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 5.2 \text{ mho/m}$; $\epsilon_r = 49.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4.07, 4.07, 4.07); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH56_Aux Ant/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.610 mW/g

WLAN_Base_802.11a_6Mbps_CH56_Aux Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.62 V/m; Power Drift = -0.190 dB
 Peak SAR (extrapolated) = 2.00 W/kg
SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.091 mW/g
 Maximum value of SAR (measured) = 0.776 mW/g

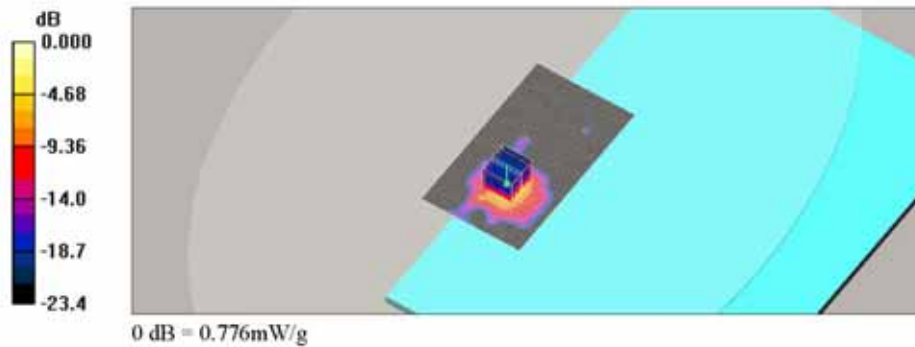

Date: 2014-01-08

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Back Screen_802.11a_6Mbps_CH56_Main Ant.da4](#)

Ambient Temp : 23.3 °C Tissue Temp : 22.0 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Low); Frequency: 5280 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 5.2 \text{ mho/m}$; $\epsilon_r = 49.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4.07, 4.07, 4.07); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Back Screen_802.11a_6Mbps_CH56_Main Ant/Area Scan (141x201x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.031 mW/g

WLAN_Back Screen_802.11a_6Mbps_CH56_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.36 V/m; Power Drift = 0.021 dB
 Peak SAR (extrapolated) = 0.091 W/kg
SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.00913 mW/g
 Maximum value of SAR (measured) = 0.029 mW/g

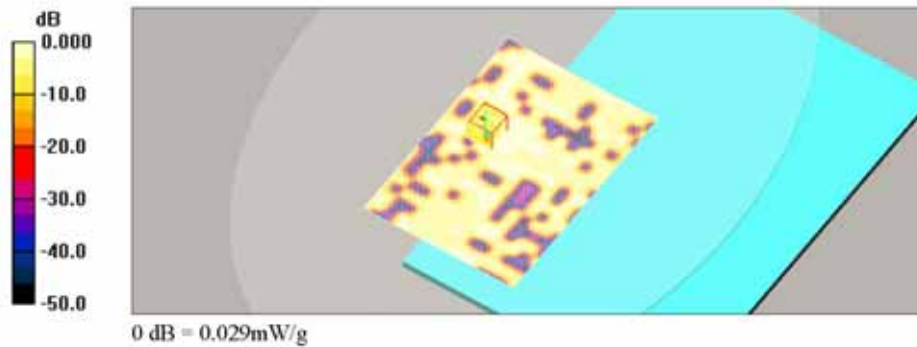

Date: 2014-01-08

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Back Screen_802.11a_6Mbps_CH60_AUX_Ant.da4](#)

Ambient Temp : 23.3 °C Tissue Temp : 22.0 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Low); Frequency: 5300 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 5.22 \text{ mho/m}$; $\epsilon_r = 49.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4.07, 4.07, 4.07); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Back Screen_802.11a_6Mbps_CH60_AUX Ant/Area Scan (141x201x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.039 mW/g

WLAN_Back Screen_802.11a_6Mbps_CH60_AUX Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.10 V/m; Power Drift = -0.049 dB
 Peak SAR (extrapolated) = 0.177 W/kg
SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.0061 mW/g
 Maximum value of SAR (measured) = 0.022 mW/g

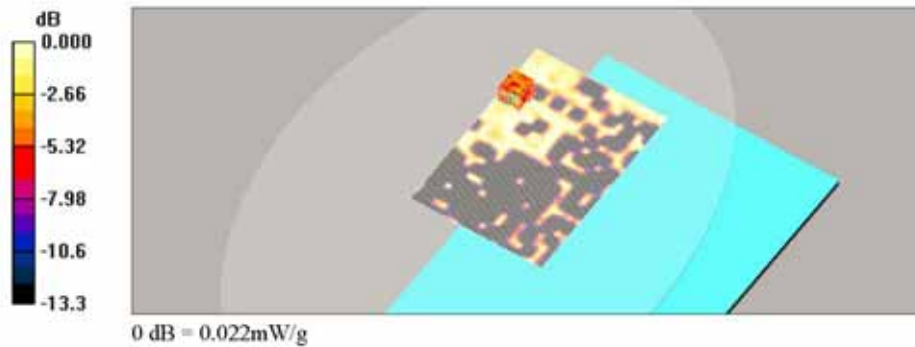

Date: 2014-01-08

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11ac_VHT6_CH58_Main_Ant.da4](#)

Ambient Temp : 23.3 °C Tissue Temp : 22.0 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(802.11ac 80MHz); Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5290$ MHz; $\sigma = 5.21$ mho/m; $\epsilon_r = 49.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4.07, 4.07, 4.07); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11ac_VHT6_CH58_Main Ant/Area Scan (91x161x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.382 mW/g

WLAN_Base_802.11ac_VHT6_CH58_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.13 V/m; Power Drift = 0.194 dB
 Peak SAR (extrapolated) = 1.04 W/kg
SAR(1 g) = 0.170 mW/g; SAR(10 g) = 0.063 mW/g
 Maximum value of SAR (measured) = 0.341 mW/g

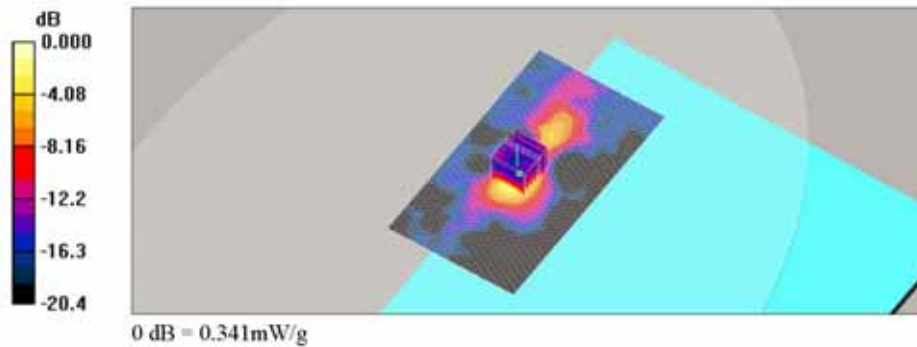

Date: 2014-01-08

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11ac_VHT6_CH58_AUX_Ant.da4](#)

Ambient Temp : 23.3 °C Tissue Temp : 22.0 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(802.11ac 80MHz); Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5290 \text{ MHz}$; $\sigma = 5.21 \text{ mho/m}$; $\epsilon_r = 49.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4.07, 4.07, 4.07); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11ac_VHT6_CH58_Aux Ant/Area Scan (81x131x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.443 mW/g

WLAN_Base_802.11ac_VHT6_CH58_Aux Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.23 V/m; Power Drift = 0.113 dB
 Peak SAR (extrapolated) = 1.50 W/kg
SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.053 mW/g
 Maximum value of SAR (measured) = 0.521 mW/g

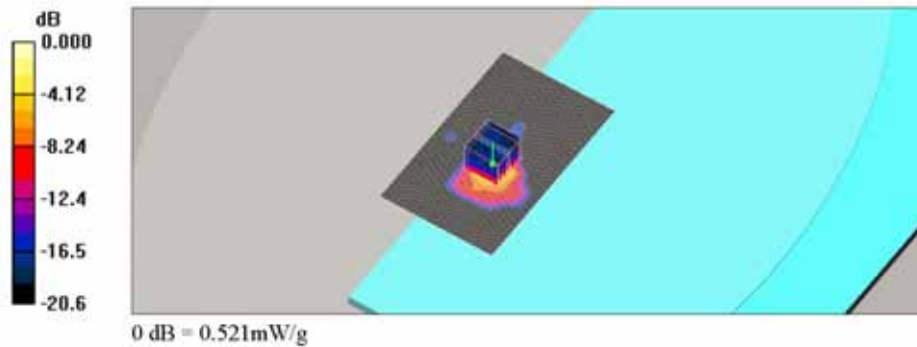

WLAN 5500 Mhz Body SAR Test

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH132_Main_Ant.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_H or CEPT); Frequency: 5660 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5660$ MHz; $\sigma = 5.79$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.79, 3.79, 3.79); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH132_Main Ant/Area Scan (91x161x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.36 mW/g

WLAN_Base_802.11a_6Mbps_CH132_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.46 V/m; Power Drift = 0.111 dB
 Peak SAR (extrapolated) = 5.15 W/kg
SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.186 mW/g
 Maximum value of SAR (measured) = 1.64 mW/g

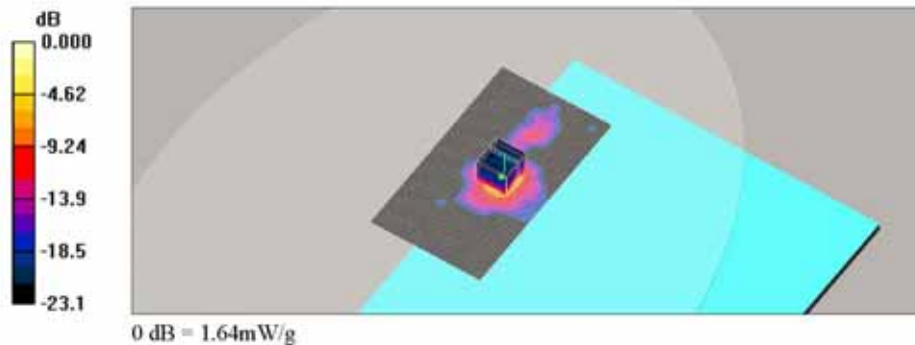

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH116_Main_Ant.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_H or CEPT); Frequency: 5580 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.69 \text{ mho/m}$; $\epsilon_r = 50.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.79, 3.79, 3.79); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH116_Main Ant/Area Scan (91x161x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 2.02 mW/g

WLAN_Base_802.11a_6Mbps_CH116_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.56 V/m; Power Drift = -0.024 dB
 Peak SAR (extrapolated) = 6.69 W/kg
SAR(1 g) = 0.983 mW/g; SAR(10 g) = 0.243 mW/g
 Maximum value of SAR (measured) = 2.36 mW/g

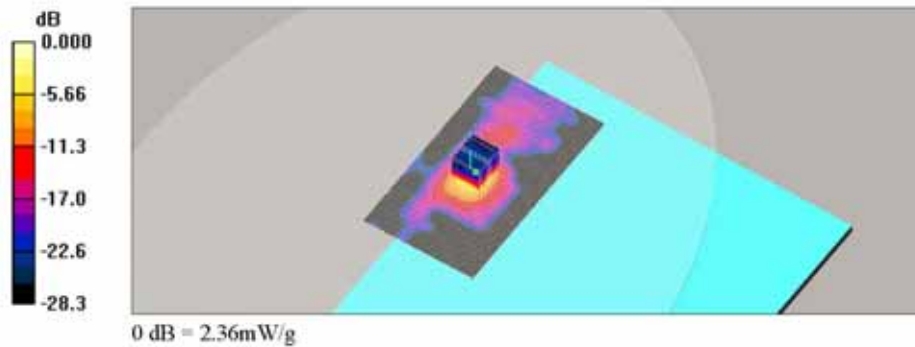

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH104_Main_Ant.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_H or CEPT); Frequency: 5520 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5520$ MHz; $\sigma = 5.61$ mho/m; $\epsilon_r = 50.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.95, 3.95, 3.95); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH104_Main Ant/Area Scan (91x161x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.50 mW/g

WLAN_Base_802.11a_6Mbps_CH104_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.47 V/m; Power Drift = -0.067 dB
 Peak SAR (extrapolated) = 6.01 W/kg
SAR(1 g) = 0.919 mW/g; SAR(10 g) = 0.232 mW/g
 Maximum value of SAR (measured) = 2.15 mW/g

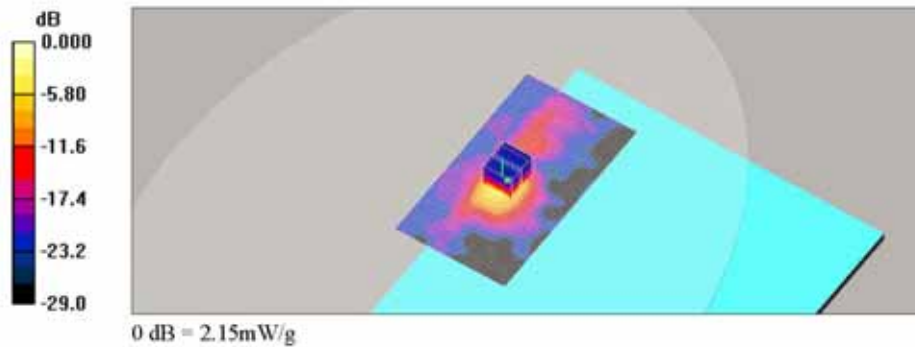

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH136_Main_Ant.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_H or CEPT); Frequency: 5680 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.82$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.79, 3.79, 3.79); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH136_Main Ant/Area Scan (91x161x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.13 mW/g

WLAN_Base_802.11a_6Mbps_CH136_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.26 V/m; Power Drift = 0.067 dB
 Peak SAR (extrapolated) = 4.33 W/kg
SAR(1 g) = 0.636 mW/g; SAR(10 g) = 0.165 mW/g
 Maximum value of SAR (measured) = 1.52 mW/g

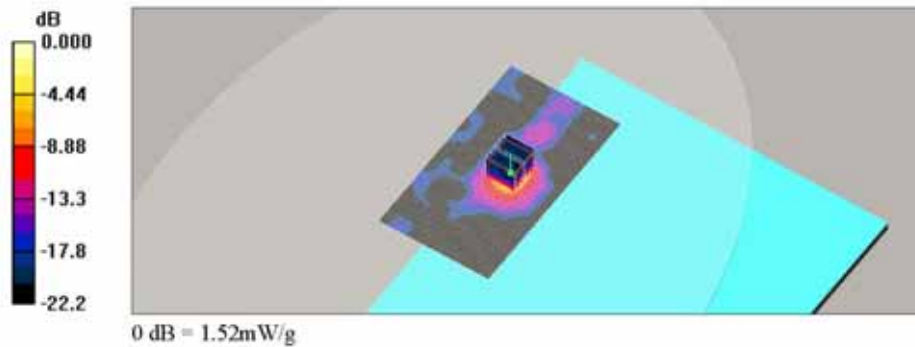

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH116_Aux Ant.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_H or CEPT); Frequency: 5580 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.69$ mho/m; $\epsilon_r = 50.5$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.79, 3.79, 3.79); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH116_Aux Ant/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.725 mW/g

WLAN_Base_802.11a_6Mbps_CH116_Aux Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 2.79 V/m; Power Drift = 0.123 dB
 Peak SAR (extrapolated) = 2.67 W/kg
SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.109 mW/g
 Maximum value of SAR (measured) = 0.943 mW/g

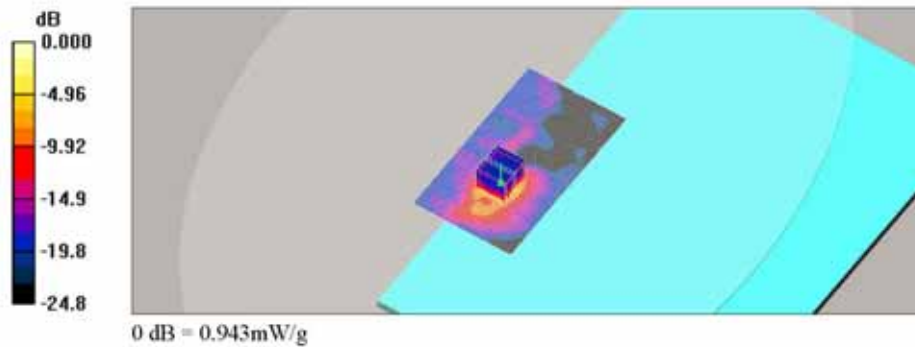

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH104_Aux Ant.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C

DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body


Communication System: WLAN(11a_H or CEPT); Frequency: 5520 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5520 \text{ MHz}$; $\sigma = 5.61 \text{ mho/m}$; $\epsilon_r = 50.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3791; ConvF(3.95, 3.95, 3.95); Calibrated: 2013-06-04
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2013-01-25
- Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH104_Aux Ant/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.849 mW/g

WLAN_Base_802.11a_6Mbps_CH104_Aux Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 2.42 V/m; Power Drift = 0.144 dB
 Peak SAR (extrapolated) = 2.80 W/kg
SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.122 mW/g
 Maximum value of SAR (measured) = 1.04 mW/g

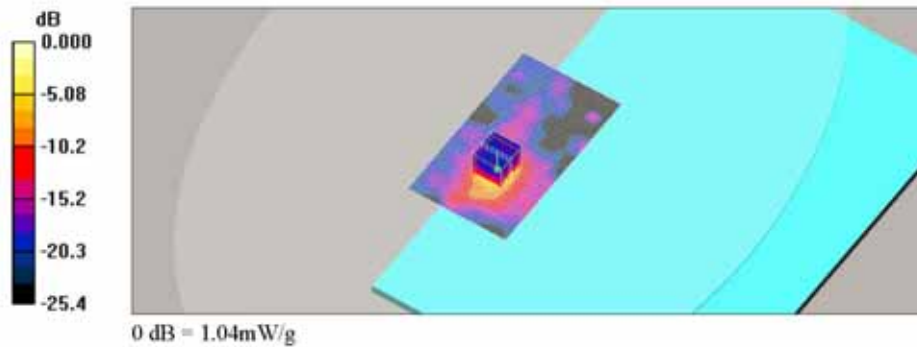

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH136_Aux_Ant.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_H or CEPT); Frequency: 5680 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.82$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.79, 3.79, 3.79); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH136_Aux Ant/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.49 mW/g

WLAN_Base_802.11a_6Mbps_CH136_Aux Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 3.74 V/m; Power Drift = -0.183 dB
 Peak SAR (extrapolated) = 5.63 W/kg
SAR(1 g) = 0.876 mW/g; SAR(10 g) = 0.230 mW/g
 Maximum value of SAR (measured) = 1.99 mW/g

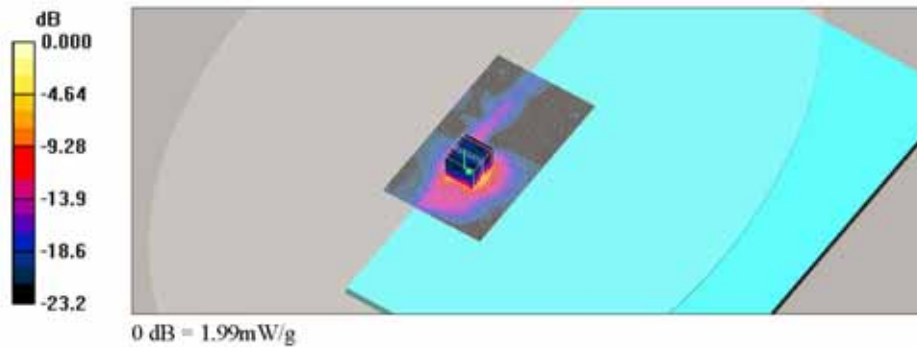

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Back Screen_802.11a_6Mbps_CH132_Main Ant.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_H or CEPT); Frequency: 5660 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5660 \text{ MHz}$; $\sigma = 5.79 \text{ mho/m}$; $\epsilon_r = 50.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.79, 3.79, 3.79); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Back Screen_802.11a_6Mbps_CH132_Main Ant/Area Scan (141x201x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.038 mW/g

WLAN_Back Screen_802.11a_6Mbps_CH132_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.36 V/m; Power Drift = -0.095 dB
 Peak SAR (extrapolated) = 0.058 W/kg
SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00821 mW/g
 Maximum value of SAR (measured) = 0.022 mW/g

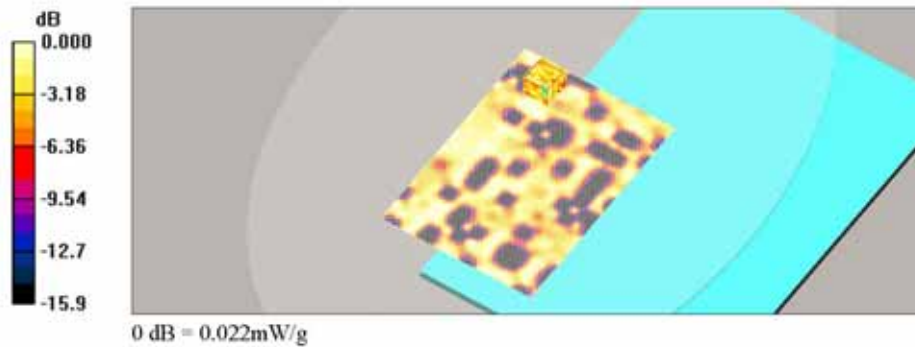

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Back Screen_802.11a_6Mbps_CH116_Aux Ant.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_H or CEPT); Frequency: 5580 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.69 \text{ mho/m}$; $\epsilon_r = 50.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.79, 3.79, 3.79); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Back Screen_802.11a_6Mbps_CH116_Aux Ant/Area Scan (141x201x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.030 mW/g

WLAN_Back Screen_802.11a_6Mbps_CH116_Aux Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.33 V/m; Power Drift = -0.080 dB
 Peak SAR (extrapolated) = 0.049 W/kg
 $\text{SAR}(1 \text{ g}) = 0.00127 \text{ mW/g}$; $\text{SAR}(10 \text{ g}) = 0.000198 \text{ mW/g}$
 Maximum value of SAR (measured) = 0.013 mW/g

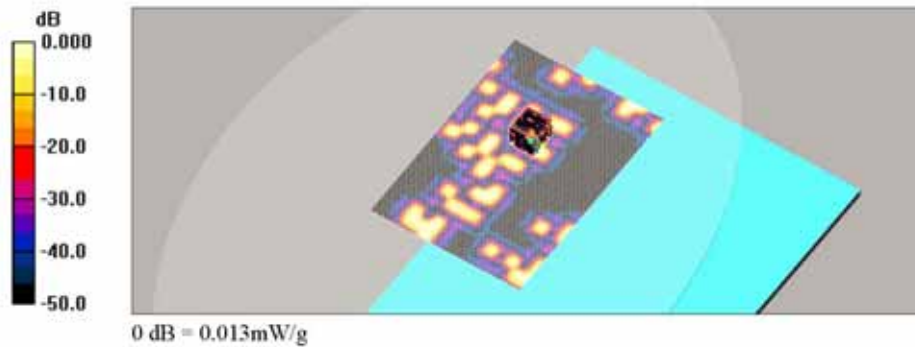

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11ac_VHT6_CH138_Main_Ant.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(802.11ac 80MHz); Frequency: 5690 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5690 \text{ MHz}$; $\sigma = 5.84 \text{ mho/m}$; $\epsilon_r = 50.3$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.79, 3.79, 3.79); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11ac_VHT6_CH138_Main Ant/Area Scan (91x161x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.502 mW/g

WLAN_Base_802.11ac_VHT6_CH138_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.33 V/m; Power Drift = -0.023 dB
 Peak SAR (extrapolated) = 2.34 W/kg
SAR(1 g) = 0.340 mW/g; SAR(10 g) = 0.094 mW/g
 Maximum value of SAR (measured) = 0.801 mW/g

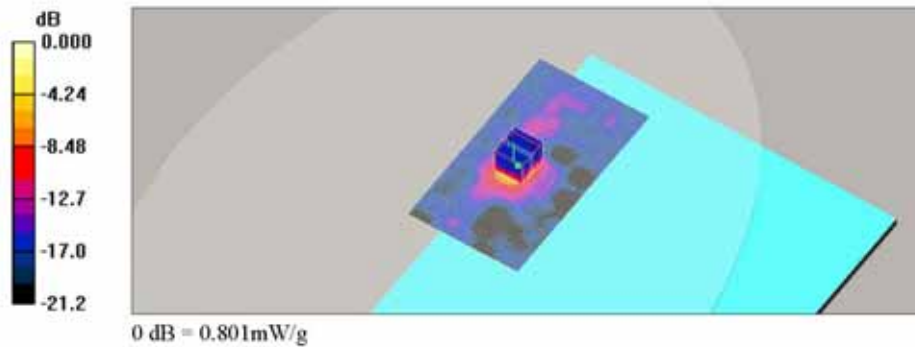

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11ac_VHT6_CH138_Aux_Ant.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(802.11ac 80MHz); Frequency: 5690 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5690$ MHz; $\sigma = 5.84$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.79, 3.79, 3.79); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11ac_VHT6_CH138_Aux Ant/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.913 mW/g

WLAN_Base_802.11ac_VHT6_CH138_Aux Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 2.86 V/m; Power Drift = 0.100 dB
 Peak SAR (extrapolated) = 3.32 W/kg
SAR(1 g) = 0.517 mW/g; SAR(10 g) = 0.136 mW/g
 Maximum value of SAR (measured) = 1.15 mW/g

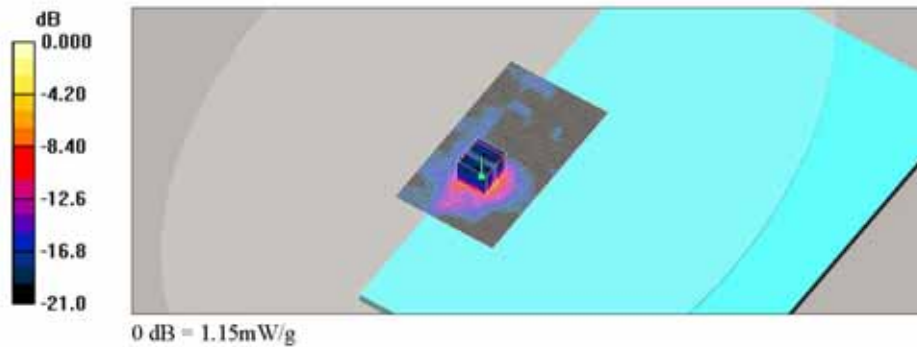

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH116_Main_Ant_Repeat_Test.dad](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_H or CEPT); Frequency: 5580 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.69 \text{ mho/m}$; $\epsilon_r = 50.5$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.79, 3.79, 3.79); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH116_Main_Ant_Repeat_Test/Area Scan (91x161x1): Measurement
 grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 1.83 mW/g

WLAN_Base_802.11a_6Mbps_CH116_Main_Ant_Repeat_Test/Zoom Scan (7x7x12)/Cube 0:
 Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.48 V/m; Power Drift = 0.053 dB
 Peak SAR (extrapolated) = 5.80 W/kg
SAR(1 g) = 0.889 mW/g; SAR(10 g) = 0.225 mW/g
 Maximum value of SAR (measured) = 2.03 mW/g

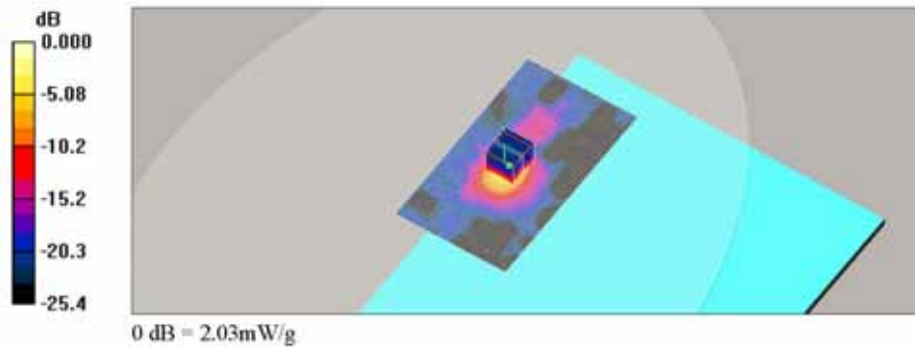

Date: 2014-01-09

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH136_Aux Ant_Repeat Test.da4](#)

Ambient Temp : 23.8 °C Tissue Temp : 22.4 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_H or CEPT); Frequency: 5680 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.82$ mho/m; $\epsilon_r = 50.3$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(3.79, 3.79, 3.79); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH136_Aux Ant_Repeat Test/Area Scan (81x141x1): Measurement
 grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.68 mW/g

WLAN_Base_802.11a_6Mbps_CH136_Aux Ant_Repeat Test/Zoom Scan (7x7x12)/Cube 0:
 Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 3.44 V/m; Power Drift = 0.140 dB
 Peak SAR (extrapolated) = 5.52 W/kg
SAR(1 g) = 0.870 mW/g; SAR(10 g) = 0.227 mW/g
 Maximum value of SAR (measured) = 2.04 mW/g

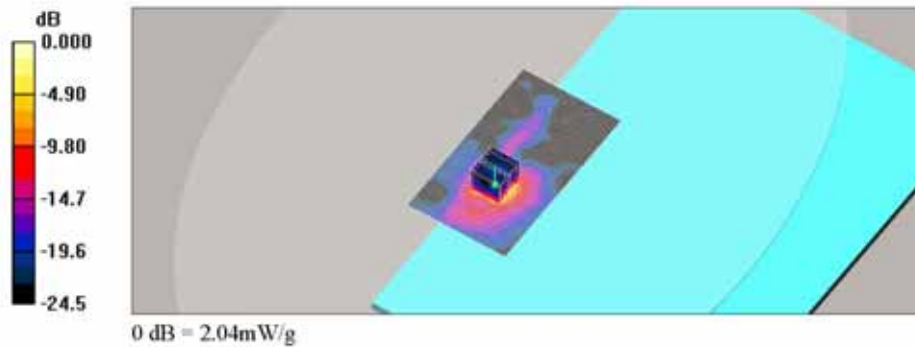

WLAN 5800 Mhz Body SAR Test

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH157_Main_Ant.da4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C

DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body


Communication System: WLAN(11a_U-NII Upper); Frequency: 5785 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.82 \text{ mho/m}$; $\epsilon_r = 48.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2013-01-25
- Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH157_Main Ant/Area Scan (81x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 2.17 mW/g

WLAN_Base_802.11a_6Mbps_CH157_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.28 V/m; Power Drift = 0.082 dB
 Peak SAR (extrapolated) = 5.30 W/kg
SAR(1 g) = 0.804 mW/g; SAR(10 g) = 0.210 mW/g
 Maximum value of SAR (measured) = 1.93 mW/g

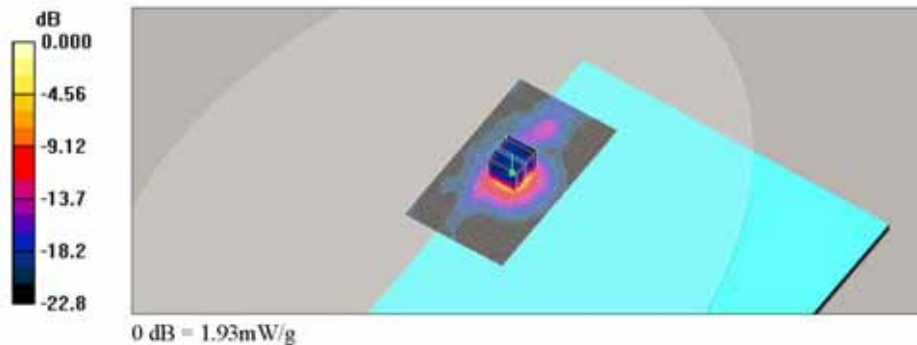

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH149_Main_Ant.da4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Upper); Frequency: 5745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.78 \text{ mho/m}$; $\epsilon_r = 49$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH149_Main Ant/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.73 mW/g

WLAN_Base_802.11a_6Mbps_CH149_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.49 V/m; Power Drift = -0.013 dB
 Peak SAR (extrapolated) = 5.47 W/kg
SAR(1 g) = 0.863 mW/g; SAR(10 g) = 0.225 mW/g
 Maximum value of SAR (measured) = 2.02 mW/g

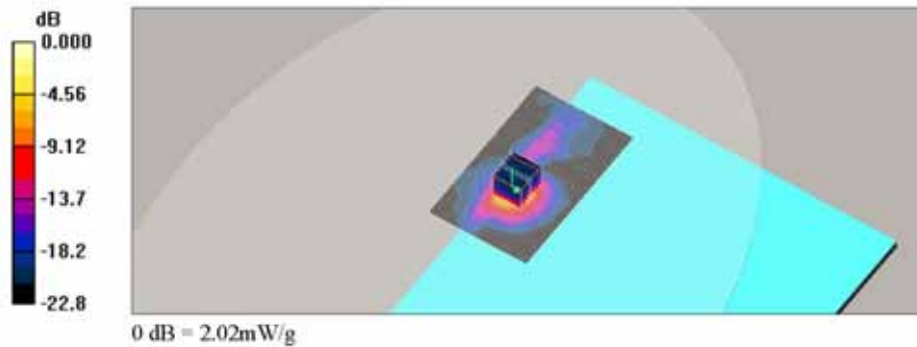

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH165_Main_Ant.da4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Upper); Frequency: 5825 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.87 \text{ mho/m}$; $\epsilon_r = 48.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH165_Main Ant/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.90 mW/g

WLAN_Base_802.11a_6Mbps_CH165_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.47 V/m; Power Drift = -0.046 dB
 Peak SAR (extrapolated) = 4.95 W/kg
SAR(1 g) = 0.751 mW/g; SAR(10 g) = 0.198 mW/g
 Maximum value of SAR (measured) = 1.80 mW/g

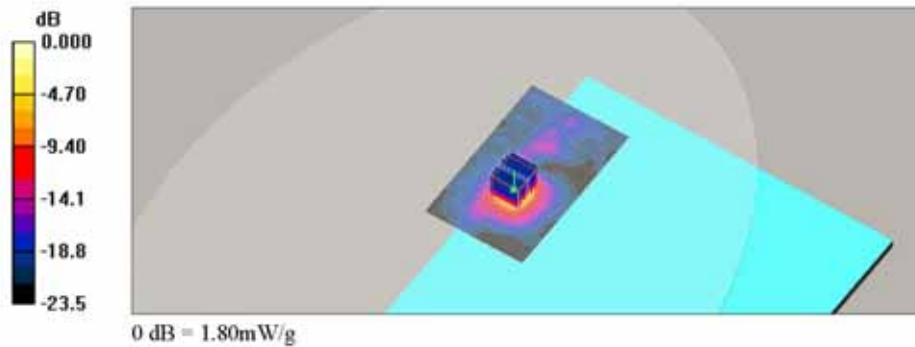

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH157_AUX_Ant.da4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Upper); Frequency: 5785 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.82 \text{ mho/m}$; $\epsilon_r = 48.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH157_AUX Ant/Area Scan (81x131x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 1.52 mW/g

WLAN_Base_802.11a_6Mbps_CH157_AUX Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid:
 $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 3.19 V/m; Power Drift = -0.169 dB
 Peak SAR (extrapolated) = 4.94 W/kg
SAR(1 g) = 0.753 mW/g; SAR(10 g) = 0.195 mW/g
 Maximum value of SAR (measured) = 1.90 mW/g

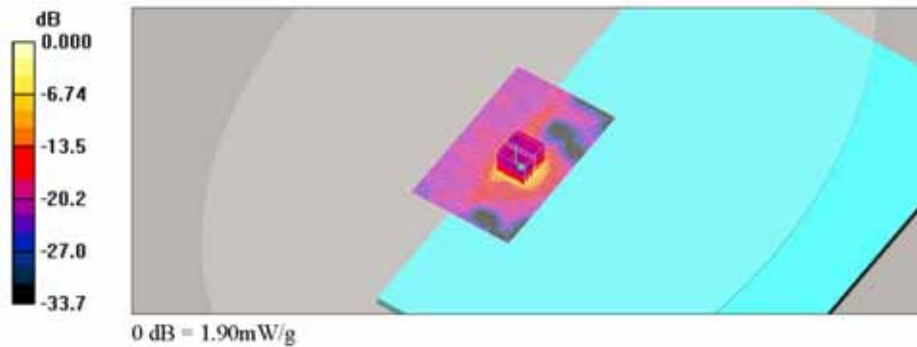

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
File Name: [WLAN_Base_802.11a_6Mbps_CH149_AUX_Ant.da4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Upper); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.78$ mho/m; $\epsilon_r = 49$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:
- Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2013-01-25
- Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH149_AUX Ant/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 2.05 mW/g

WLAN_Base_802.11a_6Mbps_CH149_AUX Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 3.46 V/m; Power Drift = -0.123 dB
Peak SAR (extrapolated) = 6.08 W/kg
SAR(1 g) = 0.948 mW/g; SAR(10 g) = 0.251 mW/g
Maximum value of SAR (measured) = 2.33 mW/g

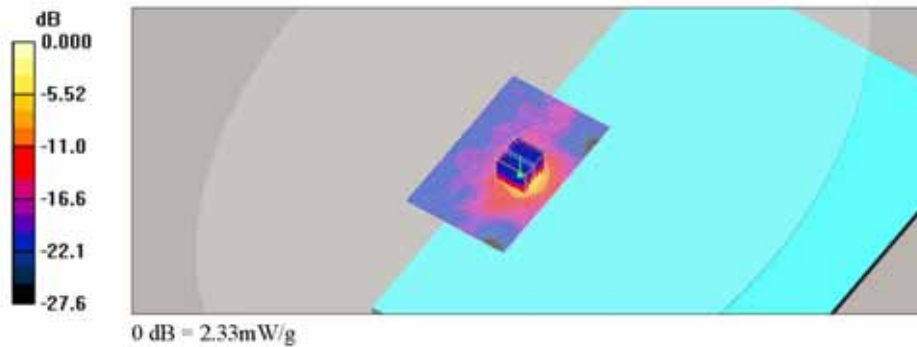

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
File Name: [WLAN_Base_802.11a_6Mbps_CH165_AUX_Ant.da4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Upper); Frequency: 5825 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5825$ MHz; $\sigma = 5.87$ mho/m; $\epsilon_r = 48.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:
- Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2013-01-25
- Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH165_AUX Ant/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.21 mW/g

WLAN_Base_802.11a_6Mbps_CH165_AUX Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.48 V/m; Power Drift = 0.008 dB
Peak SAR (extrapolated) = 3.58 W/kg
SAR(1 g) = 0.527 mW/g; SAR(10 g) = 0.141 mW/g
Maximum value of SAR (measured) = 1.21 mW/g

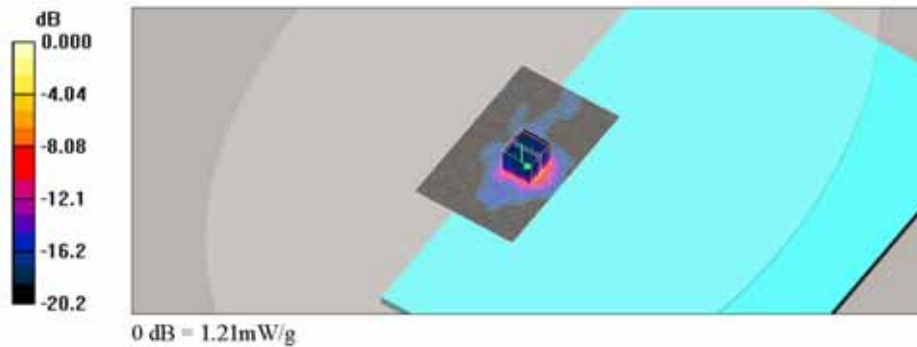

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Back Screen_802.11a_6Mbps_CH157_Main Ant.da4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Upper); Frequency: 5785 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.82 \text{ mho/m}$; $\epsilon_r = 48.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Back Screen_802.11a_6Mbps_CH157_Main Ant 2/Area Scan (141x201x1): Measurement
 grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 0.019 mW/g

WLAN_Back Screen_802.11a_6Mbps_CH157_Main Ant 2/Zoom Scan (7x7x12)/Cube 0:
 Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 1.01 V/m; Power Drift = 0.104 dB
 Peak SAR (extrapolated) = 0.117 W/kg
 SAR(1 g) = 0.00989 mW/g; SAR(10 g) = 0.00349 mW/g
 Maximum value of SAR (measured) = 0.016 mW/g

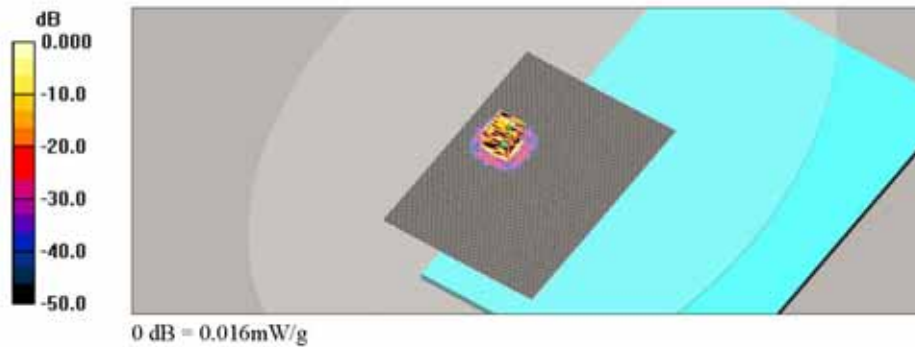

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
File Name: [WLAN_Back Screen_802.11a_6Mbps_CH157_Aux Ant.d4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Upper); Frequency: 5785 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.82 \text{ mho/m}$; $\epsilon_r = 48.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:
- Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2013-01-25
- Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Back Screen_802.11a_6Mbps_CH157_Aux Ant/Area Scan (141x201x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.040 mW/g

WLAN_Back Screen_802.11a_6Mbps_CH157_Aux Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.721 V/m; Power Drift = 0.130 dB
Peak SAR (extrapolated) = 0.169 W/kg
SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.010 mW/g
Maximum value of SAR (measured) = 0.021 mW/g

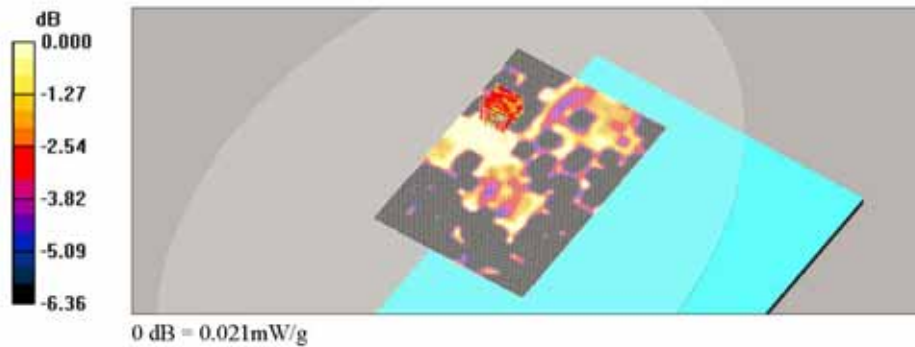

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11ac_VHT6_CH155_Main_Ant.da4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Upper); Frequency: 5775 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.81 \text{ mho/m}$; $\epsilon_r = 48.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11ac_VHT6_CH155_Main Ant/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.87 mW/g

WLAN_Base_802.11ac_VHT6_CH155_Main Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.46 V/m; Power Drift = 0.152 dB
 Peak SAR (extrapolated) = 4.66 W/kg
SAR(1 g) = 0.708 mW/g; SAR(10 g) = 0.183 mW/g
 Maximum value of SAR (measured) = 1.76 mW/g

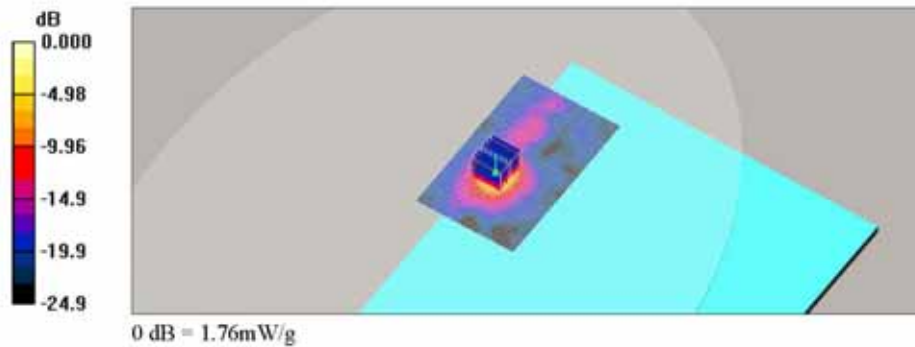

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11ac_VHT6_CH155_AUX_Ant.da4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Upper); Frequency: 5775 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.81$ mho/m; $\epsilon_r = 48.9$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11ac_VHT6_CH155_AUX Ant/Area Scan (81x131x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.40 mW/g

WLAN_Base_802.11ac_VHT6_CH155_AUX Ant/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 3.21 V/m; Power Drift = 0.179 dB
 Peak SAR (extrapolated) = 4.81 W/kg
SAR(1 g) = 0.760 mW/g; SAR(10 g) = 0.196 mW/g
 Maximum value of SAR (measured) = 1.72 mW/g

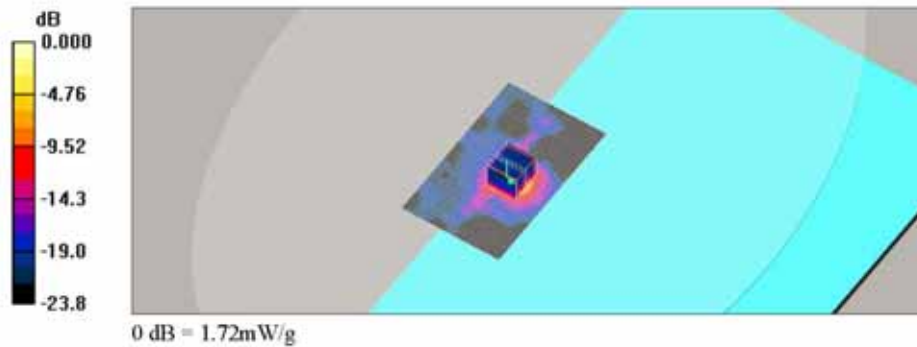

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH149_Main Ant Repeat Test.da4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Upper); Frequency: 5745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.78 \text{ mho/m}$; $\epsilon_r = 49$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH149_Main Ant Repeat Test/Area Scan (81x131x1): Measurement
 grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.70 mW/g

WLAN_Base_802.11a_6Mbps_CH149_Main Ant Repeat Test/Zoom Scan (7x7x12)/Cube 0:
 Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.62 V/m; Power Drift = -0.109 dB
 Peak SAR (extrapolated) = 5.82 W/kg
 SAR(1 g) = 0.886 mW/g; SAR(10 g) = 0.229 mW/g
 Maximum value of SAR (measured) = 1.99 mW/g

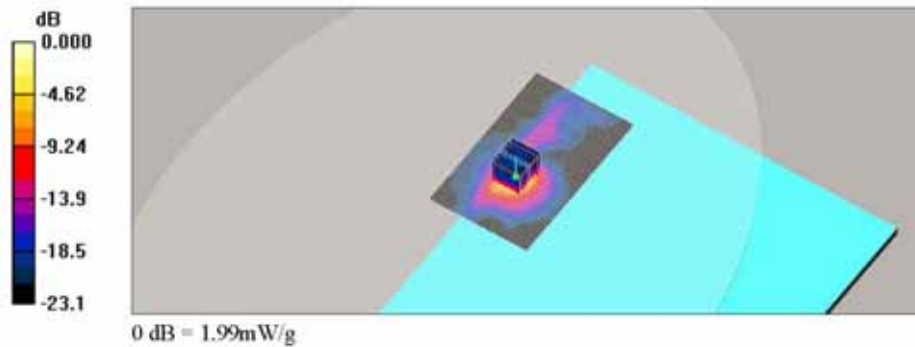

Date: 2014-01-10

Test Laboratory: SGS Korea (Gunpo Laboratory)
 File Name: [WLAN_Base_802.11a_6Mbps_CH149_AUX_Ant Repeat Test.da4](#)

Ambient Temp : 23.1 °C Tissue Temp : 21.9 °C


DUT: NP930X5J; Type: Notebook; Serial: JKHA91KDC00071Y
 Program Name: WLAN_Body

Communication System: WLAN(11a_U-NII Upper); Frequency: 5745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.78 \text{ mho/m}$; $\epsilon_r = 49$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:
 - Probe: EX3DV4 - SN3791; ConvF(4, 4, 4); Calibrated: 2013-06-04
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn567; Calibrated: 2013-01-25
 - Phantom: ELI v4.0 Phantom TP:1169; Type: ELI v4.0 Phantom; Serial: TP:1169
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WLAN_Base_802.11a_6Mbps_CH149_AUX Ant Repeat Test 2/Area Scan (81x131x1): Measurement
 grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (interpolated) = 2.11 mW/g

WLAN_Base_802.11a_6Mbps_CH149_AUX Ant Repeat Test 2/Zoom Scan (7x7x12)/Cube 0:
 Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
 Reference Value = 3.21 V/m; Power Drift = -0.044 dB
 Peak SAR (extrapolated) = 5.74 W/kg
SAR(1 g) = 0.914 mW/g; SAR(10 g) = 0.246 mW/g
 Maximum value of SAR (measured) = 2.17 mW/g

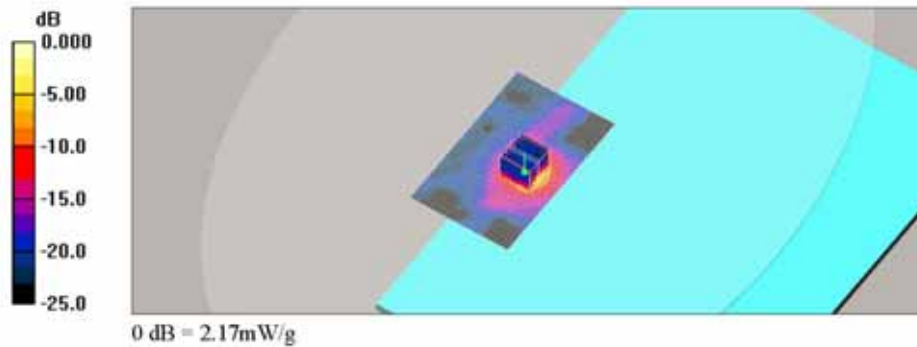

Appendix B

Uncertainty Analysis

a	b	c	d	e = f(d,k)	g	i =	k
						cxg/e	
Uncertainty Component	Section in	Tol	Prob .	Div.	Ci	1g	Vi
	P1528	(%)	Dist.		(1g)	ui (%)	(Veff)
Probe calibration	E.2.1	6.55	N	1	1	6.55	∞
Axial isotropy	E.2.2	0.5	R	1.73	0.71	0.20	∞
hemispherical isotropy	E.2.2	2.6	R	1.73	0.71	1.06	∞
Boundary effect	E.2.3	2.0	R	1.73	1	1.15	∞
Linearity	E.2.4	0.6	R	1.73	1	0.35	∞
System detection limit	E.2.5	1.0	R	1.73	1	0.58	∞
Readout electronics	E.2.6	0.3	N	1	1	0.30	∞
Response time	E.2.7	0.5	R	1.73	1	0.29	∞
Integration time	E.2.8	2.6	R	1.73	1	1.50	∞
RF ambient Condition -Noise	E.6.1	3	R	1.73	1	1.73	∞
RF ambient Condition - reflections	E.6.1	3	R	1.73	1	1.73	∞
Probe positioning- mechanical tolerance	E.6.2	0.4	R	1.73	1	0.23	∞
Probe positioning- with respect to phantom	E.6.3	2.9	R	1.73	1	1.67	∞
Max. SAR evaluation	E.5.2	2.0	R	1.73	1	1.15	∞
Test sample positioning	E.4.2	1.45	N	1	1	1.45	19
Device holder uncertainty	E.4.1	3.6	N	1	1	3.60	∞
Output power variation -SAR drift measurement	6.6.3	5	R	1.73	1	2.89	∞
Phantom uncertainty (shape and thickness tolerances)	E.3.1	6.1	R	1.73	1	3.52	∞
Liquid conductivity - deviation from target values	E.3.2	5	R	1.73	0.64	1.85	∞
Liquid conductivity - measurement uncertainty	E.3.2	1.91	N	1	0.64	1.22	9
Liquid permittivity - deviation from target values	E.3.3	5	R	1.73	0.6	1.73	∞
Liquid permittivity - deviation from target values	E.3.3	1.91	N	1	0.6	1.15	9
Combined standard uncertainty				RSS		10.17	35809
Expanded uncertainty (95% CONFIDENCE INTERVAL)				k=2		20.34	

Appendix C

Calibration Certificate

- PROBE

- DAE

- 2450 MHz, 5000 MHz DIPOLE

- PROBE Calibration Certificate

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Handwritten signature and date: 2013, 6, 21

Client **SGS (Dymstec)**

Certificate No: **EX3-3791_Jun13**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3791**

Calibration procedure(s): **QA CAL-01.v8, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v4
 Calibration procedure for dosimetric E-field probes**

Calibration date: **June 4, 2013.**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	31-Jan-13 (No. DAE4-660_Jan13)	Jan-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP B648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	<i>[Signature]</i>
Approved by:	Katja Pokovic	Technical Manager	<i>[Signature]</i>

Issued: June 4, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV4 – SN:3791

June 4, 2013

Probe EX3DV4

SN:3791

Manufactured: February 18, 2011
Calibrated: June 4, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3791

June 4, 2013

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3791

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.55	0.54	0.53	$\pm 10.1 \%$
DCP (mV) ^B	103.1	99.9	101.4	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	168.0	$\pm 2.7 \%$
		Y	0.0	0.0	1.0		165.4	
		Z	0.0	0.0	1.0		171.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3791

June 4, 2013

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3791

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	41.5	0.90	8.46	8.46	8.46	0.28	1.10	± 12.0 %
900	41.5	0.97	8.33	8.33	8.33	0.61	0.68	± 12.0 %
1750	40.1	1.37	7.85	7.85	7.85	0.58	0.71	± 12.0 %
1900	40.0	1.40	7.61	7.61	7.61	0.57	0.70	± 12.0 %
2450	39.2	1.80	6.74	6.74	6.74	0.49	0.77	± 12.0 %
2600	39.0	1.96	6.56	6.56	6.56	0.36	0.92	± 12.0 %
5200	36.0	4.66	4.71	4.71	4.71	0.45	1.80	± 13.1 %
5300	35.9	4.76	4.68	4.68	4.68	0.30	1.80	± 13.1 %
5500	35.6	4.96	4.52	4.52	4.52	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.31	4.31	4.31	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.24	4.24	4.24	0.45	1.90	± 13.1 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

EX3DV4- SN:3791

June 4, 2013

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3791

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	8.70	8.70	8.70	0.66	0.68	± 12.0 %
900	55.0	1.05	8.58	8.58	8.58	0.77	0.66	± 12.0 %
1750	53.4	1.49	7.52	7.52	7.52	0.35	0.92	± 12.0 %
1900	53.3	1.52	7.15	7.15	7.15	0.25	1.06	± 12.0 %
2450	52.7	1.95	6.62	6.62	6.62	0.76	0.60	± 12.0 %
2600	52.5	2.16	6.33	6.33	6.33	0.80	0.50	± 12.0 %
5200	49.0	5.30	4.23	4.23	4.23	0.40	1.90	± 13.1 %
5300	48.9	5.42	4.07	4.07	4.07	0.40	1.90	± 13.1 %
5500	48.6	5.65	3.95	3.95	3.95	0.40	1.90	± 13.1 %
5600	48.5	5.77	3.79	3.79	3.79	0.40	1.90	± 13.1 %
5800	48.2	6.00	4.00	4.00	4.00	0.50	1.90	± 13.1 %


^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

EX3DV4- SN:3791

June 4, 2013

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


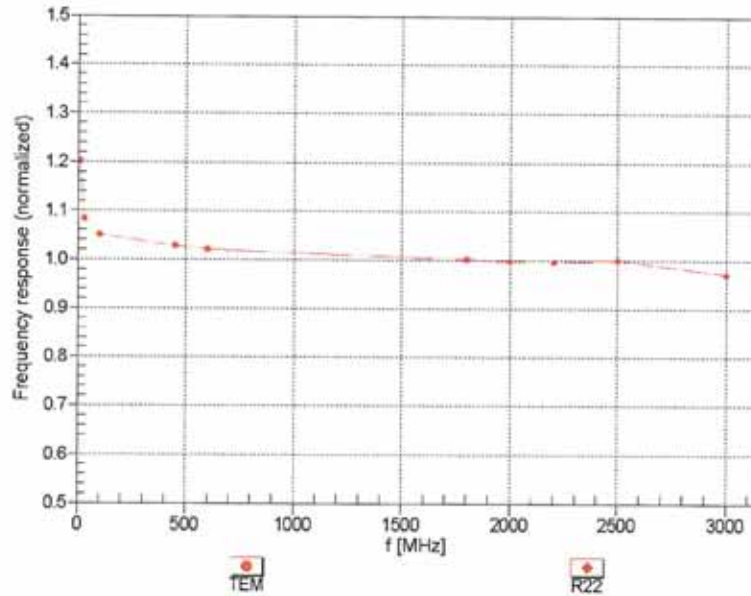


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4- SN:3791

June 4, 2013

Receiving Pattern (ϕ), $\theta = 0^\circ$

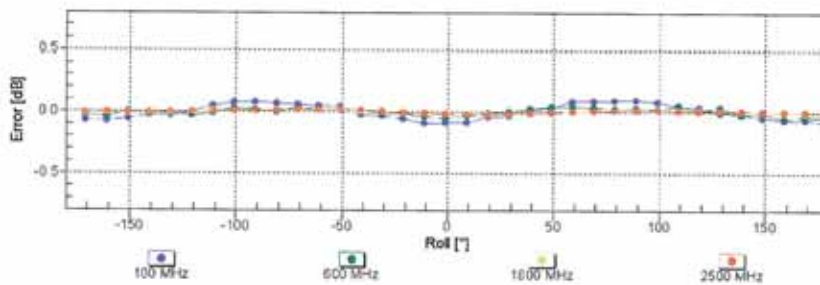
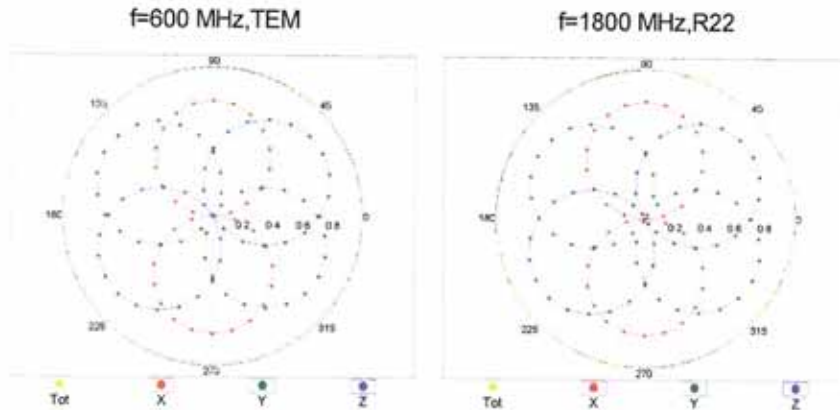


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4- SN:3791

June 4, 2013

Dynamic Range $f(SAR_{head})$ (TEM cell , $f = 900$ MHz)

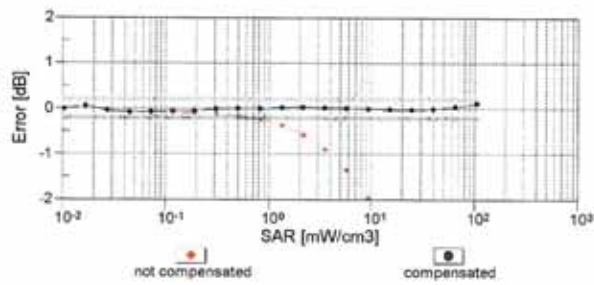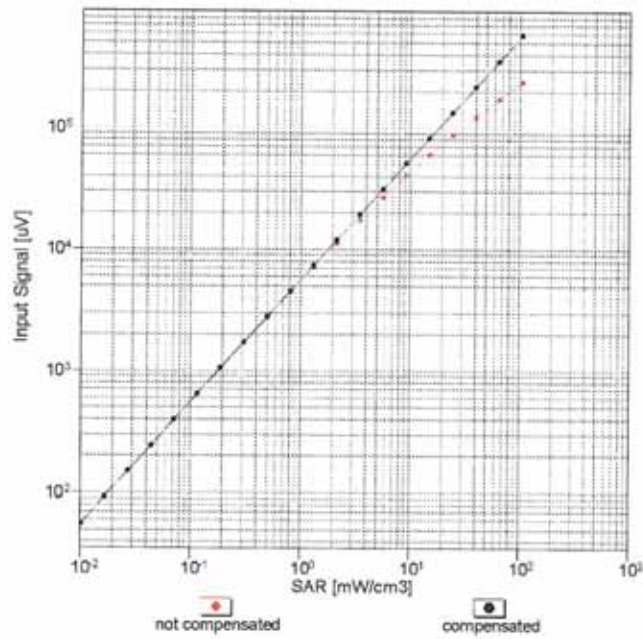


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


EX3DV4- SN:3791

June 4, 2013

Conversion Factor Assessment

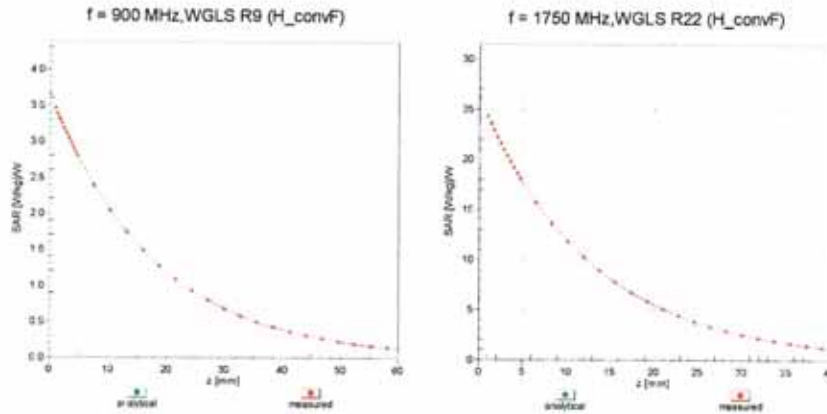

Deviation from Isotropy in Liquid Error (ϕ , θ), f = 900 MHz

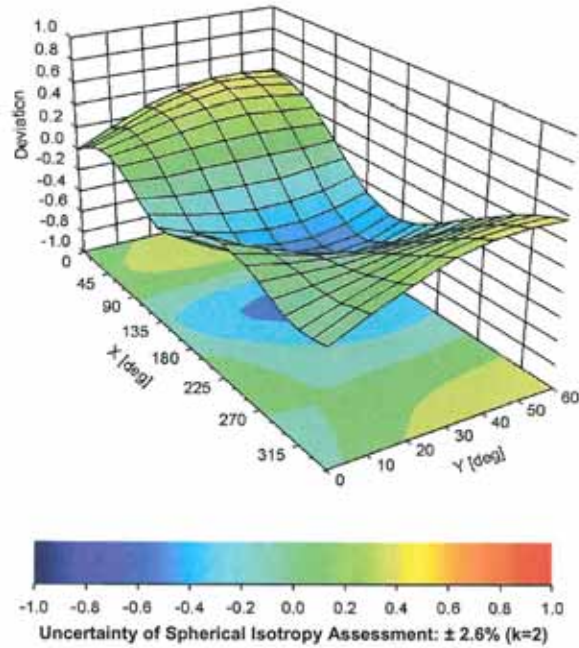

EX3DV4- SN:3791

June 4, 2013

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3791

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-111.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

- DAE3 Calibration Certificate

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS (Dymstec)**

Certificate No: **DAE3-567_Jan13**

CALIBRATION CERTIFICATE

Object: **DAE3 - SD 000 D03 AA - SN: 567**

Calibration procedure(s): **QA CAL-06.v25
 Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **January 25, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0610278	02-Oct-12 (No:12728)	Oct-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	07-Jan-13 (in house check)	In house check: Jan-14
Calibrator Box V2.1	SE UMS 006 AA 1002	07-Jan-13 (in house check)	In house check: Jan-14

Calibrated by:	Name R Mayoraz	Function Technician	Signature <i>R Mayoraz</i>
Approved by:	Name Fin Bomholt	Function Deputy Technical Manager	Signature <i>F Bomholt</i>

Issued: January 25, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V , full range = -100...+300 mV
 Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.652 \pm 0.02% (k=2)	404.401 \pm 0.02% (k=2)	404.491 \pm 0.02% (k=2)
Low Range	3.95362 \pm 1.55% (k=2)	3.97148 \pm 1.55% (k=2)	3.96078 \pm 1.55% (k=2)

Connector Angle

Connector Angle to be used in DASY system	7 $^{\circ}$ \pm 1 $^{\circ}$
---	---------------------------------

Appendix

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	199995.32	-0.62	-0.00
Channel X + Input	20002.46	1.32	0.01
Channel X - Input	-19998.40	1.69	-0.01
Channel Y + Input	199997.71	1.34	0.00
Channel Y + Input	19999.63	-1.28	-0.01
Channel Y - Input	-19997.89	2.47	-0.01
Channel Z + Input	199996.03	0.01	0.00
Channel Z + Input	19998.99	-1.92	-0.01
Channel Z - Input	-19998.51	1.81	-0.01

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2002.18	0.83	0.04
Channel X + Input	201.83	0.08	0.04
Channel X - Input	-198.32	-0.18	0.09
Channel Y + Input	2001.92	0.81	0.04
Channel Y + Input	201.24	-0.29	-0.15
Channel Y - Input	-199.03	-0.72	0.36
Channel Z + Input	2001.88	0.72	0.04
Channel Z + Input	200.70	-0.97	-0.48
Channel Z - Input	-199.17	-0.97	0.49

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	3.30	1.64
	-200	0.20	-1.94
Channel Y	200	-0.21	-0.42
	-200	0.96	0.59
Channel Z	200	4.66	3.87
	-200	-5.94	-6.09

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	-0.86	-3.62
Channel Y	200	7.58	-	-0.08
Channel Z	200	5.96	5.73	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16316	14587
Channel Y	16163	15684
Channel Z	15966	15490

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
 Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	0.52	-0.92	1.43	0.45
Channel Y	-0.20	-2.46	1.17	0.46
Channel Z	-0.70	-1.79	0.17	0.39

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

- 2450 MHz Dipole Calibration Certificate

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
 C Service suisse d'étalonnage
 S Servizio svizzero di taratura
 S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No: SCS 108

아공현
 2013.10.14



Client **SGS (Dymstec)**

Certificate No: D2450V2-892_Sep13

CALIBRATION CERTIFICATE																																															
Object	D2450V2 - SN: 892																																														
Calibration procedure(s)	QA CAL-05.v9 Calibration procedure for dipole validation kits above 700 MHz																																														
Calibration date:	September 26, 2013																																														
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td> <td>GB37480704</td> <td>01-Nov-12 (No. 217-01640)</td> <td>Oct-13</td> </tr> <tr> <td>Power sensor HP B481A</td> <td>US37292783</td> <td>01-Nov-12 (No. 217-01640)</td> <td>Oct-13</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5058 (20k)</td> <td>04-Apr-13 (No. 217-01736)</td> <td>Apr-14</td> </tr> <tr> <td>Type-N mismatch combination</td> <td>SN: 5047.3 / 06327</td> <td>04-Apr-13 (No. 217-01739)</td> <td>Apr-14</td> </tr> <tr> <td>Reference Probe ES3DV3</td> <td>SN: 3205</td> <td>28-Dec-12 (No. ES3-3205_Dec12)</td> <td>Dec-13</td> </tr> <tr> <td>DAE4</td> <td>SN: 601</td> <td>25-Apr-13 (No. DAE4-601_Apr13)</td> <td>Apr-14</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP B481A</td> <td>MY41092317</td> <td>18-Oct-02 (in house check Oct-11)</td> <td>In house check: Oct-13</td> </tr> <tr> <td>RF generator R&S SMT-06</td> <td>100005</td> <td>04-Aug-99 (in house check Oct-11)</td> <td>In house check: Oct-13</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585 S4206</td> <td>18-Oct-01 (in house check Oct-12)</td> <td>In house check: Oct-13</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13	Power sensor HP B481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13	Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14	Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14	Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13	DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power sensor HP B481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13	RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13	Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																												
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13																																												
Power sensor HP B481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13																																												
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14																																												
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14																																												
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13																																												
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14																																												
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																												
Power sensor HP B481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13																																												
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13																																												
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13																																												
Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 																																												
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 																																												
Issued: September 27, 2013																																															
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																															

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
 ConvF sensitivity in TSL / NORM x,y,z
 N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.4 \pm 6 %	1.83 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.4 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.4 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	52.2 \pm 6 %	2.00 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.7 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.1 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.85 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.2 W/kg \pm 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.9 Ω + 2.2 $j\Omega$
Return Loss	- 27.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.1 Ω + 4.3 $j\Omega$
Return Loss	- 27.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.125 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 06, 2011

DASY5 Validation Report for Head TSL

Date: 26.09.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 892


Communication System: UID 0 - CW ; Frequency: 2450 MHz
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.52, 4.52, 4.52); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)


Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 93.764 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 27.5 W/kg
SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.12 W/kg
 Maximum value of SAR (measured) = 16.9 W/kg

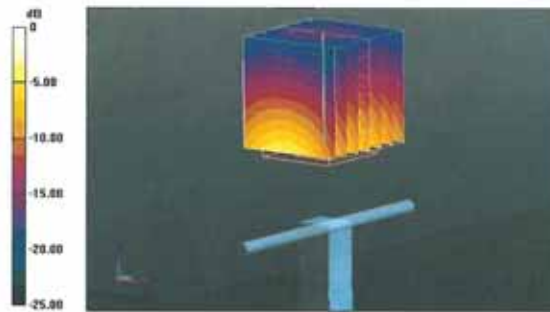

0 dB = 16.9 W/kg = 12.28 dBW/kg

Impedance Measurement Plot for Head TSL

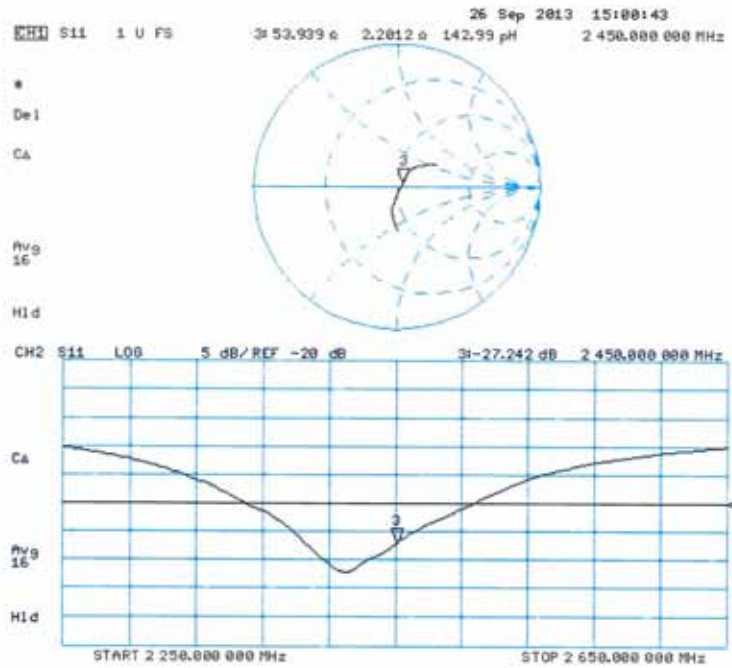

DASY5 Validation Report for Body TSL

Date: 26.09.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 892


Communication System: UID 0 - CW ; Frequency: 2450 MHz
 Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ S/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:


- Probe: ES3DV3 - SN3205; ConvF(4.42, 4.42, 4.42); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 93.764 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 26.5 W/kg
SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.85 W/kg
 Maximum value of SAR (measured) = 16.6 W/kg

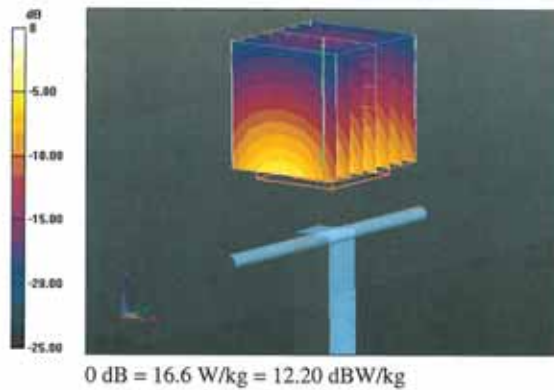

Impedance Measurement Plot for Body TSL

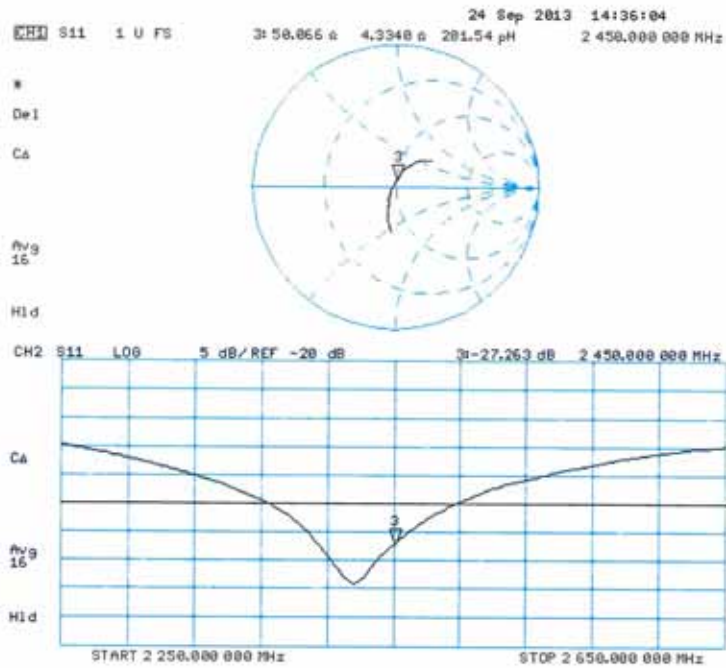

- 5000 Mhz Dipole Calibration Certificate

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Handwritten signature

Cliënt **SGS (Dymstec)**

Certificate No: **D5GHzV2-1106_Mar13**

CALIBRATION CERTIFICATE																																															
Object	D5GHzV2 - SN: 1106																																														
Calibration procedure(s)	QA CAL-22.v2 Calibration procedure for dipole validation kits between 3-6 GHz																																														
Calibration date:	March 15, 2013																																														
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td> <td>GB37480704</td> <td>01-Nov-12 (No. 217-01640)</td> <td>Oct-13</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>US37292783</td> <td>01-Nov-12 (No. 217-01640)</td> <td>Oct-13</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5058 (20k)</td> <td>27-Mar-12 (No. 217-01530)</td> <td>Apr-13</td> </tr> <tr> <td>Type-N mismatch combination</td> <td>SN: 5047.3 / 06327</td> <td>27-Mar-12 (No. 217-01533)</td> <td>Apr-13</td> </tr> <tr> <td>Reference Probe EX3DV4</td> <td>SN: 3503</td> <td>28-Dec-12 (No. EX3-3503_Dec12)</td> <td>Dec-13</td> </tr> <tr> <td>DAE4</td> <td>SN: 601</td> <td>27-Jun-12 (No. DAE4-601_Jun12)</td> <td>Jun-13</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td> <td>MY41082317</td> <td>18-Oct-02 (in house check Oct-11)</td> <td>In house check: Oct-13</td> </tr> <tr> <td>RF generator R&S SMT-06</td> <td>100005</td> <td>04-Aug-99 (in house check Oct-11)</td> <td>In house check: Oct-13</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585 S4206</td> <td>18-Oct-01 (in house check Oct-12)</td> <td>In house check: Oct-13</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13	Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13	Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13	Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13	Reference Probe EX3DV4	SN: 3503	28-Dec-12 (No. EX3-3503_Dec12)	Dec-13	DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power sensor HP 8481A	MY41082317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13	RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13	Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																												
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13																																												
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13																																												
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13																																												
Type-N mismatch combination	SN: 5047.3 / 06327	27-Mar-12 (No. 217-01533)	Apr-13																																												
Reference Probe EX3DV4	SN: 3503	28-Dec-12 (No. EX3-3503_Dec12)	Dec-13																																												
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13																																												
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																												
Power sensor HP 8481A	MY41082317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13																																												
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13																																												
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13																																												
Calibrated by:	Name Israa El-Naouq	Function Laboratory Technician	Signature <i>Israa El-Naouq</i>																																												
Approved by:	Katja Pokovic	Technical Manager	<i>Katja Pokovic</i>																																												
Issued: March 15, 2013																																															
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																															

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
 ConvF sensitivity in TSL / NORM x,y,z
 N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- b) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.5
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	4.52 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.8 W/kg ± 19.9 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.3 ± 6 %	4.62 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.42 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.3 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.7 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.0 ± 6 %	4.80 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.64 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	85.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.46 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.3 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.9 ± 6 %	4.91 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	84.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.43 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.0 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.6 ± 6 %	5.11 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.21 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.0 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.0 ± 6 %	5.42 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.55 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.11 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.9 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.9 ± 6 %	5.55 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.74 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.5 ± 6 %	5.80 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	80.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.3 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.4 ± 6 %	5.94 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	8.20 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	81.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.27 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.5 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.1 ± 6 %	6.21 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.57 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.7 W/kg ± 19.5 % (k=2)

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	50.1 Ω - 9.7 j Ω
Return Loss	- 20.3 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	50.4 Ω - 3.9 j Ω
Return Loss	- 28.3 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	49.0 Ω - 4.1 j Ω
Return Loss	- 27.5 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	53.9 Ω - 5.1 j Ω
Return Loss	- 24.3 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	54.5 Ω - 1.4 j Ω
Return Loss	- 26.9 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	50.3 Ω - 9.3 j Ω
Return Loss	- 20.6 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	50.9 Ω - 3.2 j Ω
Return Loss	- 29.8 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	49.7 Ω - 2.5 j Ω
Return Loss	- 31.9 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	54.5 Ω - 4.2 j Ω
Return Loss	- 24.6 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	54.4 Ω + 1.0 j Ω
Return Loss	- 27.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.198 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

DASY5 Validation Report for Head TSL

Date: 15.03.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1106

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz
 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.52$ S/m; $\epsilon_r = 34.4$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 4.62$ S/m; $\epsilon_r = 34.3$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.8$ S/m; $\epsilon_r = 34$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 4.91$ S/m; $\epsilon_r = 33.9$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 33.6$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 28.12.2012, ConvF(5.1, 5.1, 5.1); Calibrated: 28.12.2012, ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.76, 4.76, 4.76); Calibrated: 28.12.2012, ConvF(4.81, 4.81, 4.81); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 65.348 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 30.6 W/kg
SAR(1 g) = 8.26 W/kg; SAR(10 g) = 2.36 W/kg
 Maximum value of SAR (measured) = 19.2 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 65.418 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 32.1 W/kg
SAR(1 g) = 8.42 W/kg; SAR(10 g) = 2.4 W/kg
 Maximum value of SAR (measured) = 19.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 65.553 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 34.1 W/kg
SAR(1 g) = 8.64 W/kg; SAR(10 g) = 2.46 W/kg
 Maximum value of SAR (measured) = 20.5 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 64.766 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 34.2 W/kg
SAR(1 g) = 8.55 W/kg; SAR(10 g) = 2.43 W/kg
 Maximum value of SAR (measured) = 20.4 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 62.008 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 34.5 W/kg
SAR(1 g) = 8.21 W/kg; SAR(10 g) = 2.33 W/kg
 Maximum value of SAR (measured) = 20.0 W/kg

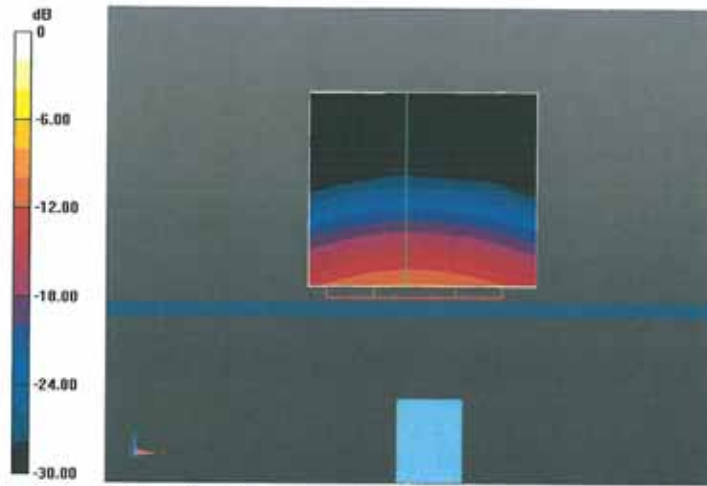

0 dB = 20.0 W/kg = 13.01 dBW/kg

Impedance Measurement Plot for Head TSL

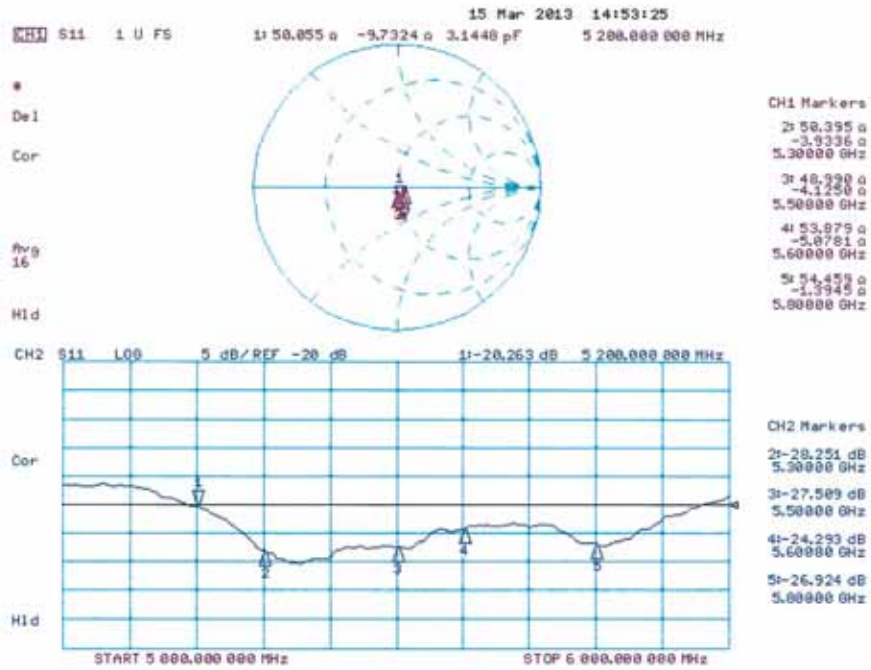

DASY5 Validation Report for Body TSL

Date: 14.03.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1106

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz
 Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.42 \text{ S/m}$; $\epsilon_r = 47$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 5.55 \text{ S/m}$; $\epsilon_r = 46.9$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.8 \text{ S/m}$; $\epsilon_r = 46.5$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.94 \text{ S/m}$; $\epsilon_r = 46.4$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.21 \text{ S/m}$; $\epsilon_r = 46.1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.67, 4.67, 4.67); Calibrated: 28.12.2012, ConvF(4.43, 4.43, 4.43); Calibrated: 28.12.2012, ConvF(4.22, 4.22, 4.22); Calibrated: 28.12.2012, ConvF(4.38, 4.38, 4.38); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 59.488 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 29.8 W/kg
SAR(1 g) = 7.55 W/kg; SAR(10 g) = 2.11 W/kg
 Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 59.529 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 31.5 W/kg
SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.17 W/kg
 Maximum value of SAR (measured) = 18.3 W/kg


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 59.873 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 35.1 W/kg
SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.25 W/kg
 Maximum value of SAR (measured) = 19.7 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 59.492 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 36.4 W/kg
SAR(1 g) = 8.2 W/kg; SAR(10 g) = 2.27 W/kg
Maximum value of SAR (measured) = 20.1 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 56.370 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 35.1 W/kg
SAR(1 g) = 7.57 W/kg; SAR(10 g) = 2.09 W/kg
Maximum value of SAR (measured) = 18.7 W/kg

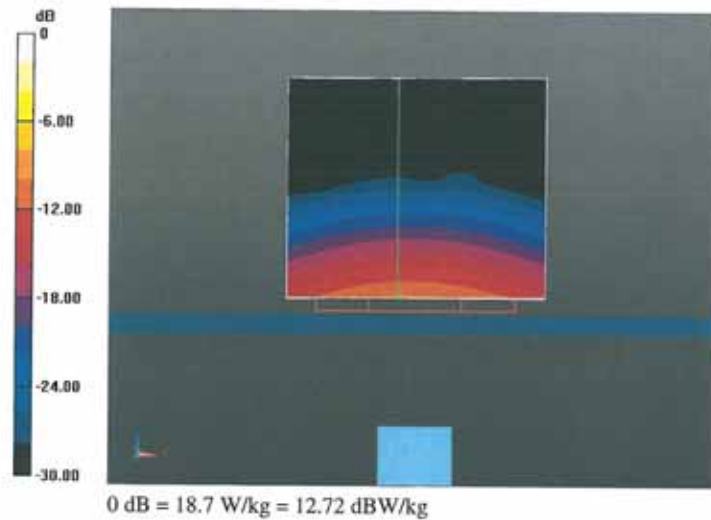

Impedance Measurement Plot for Body TSL

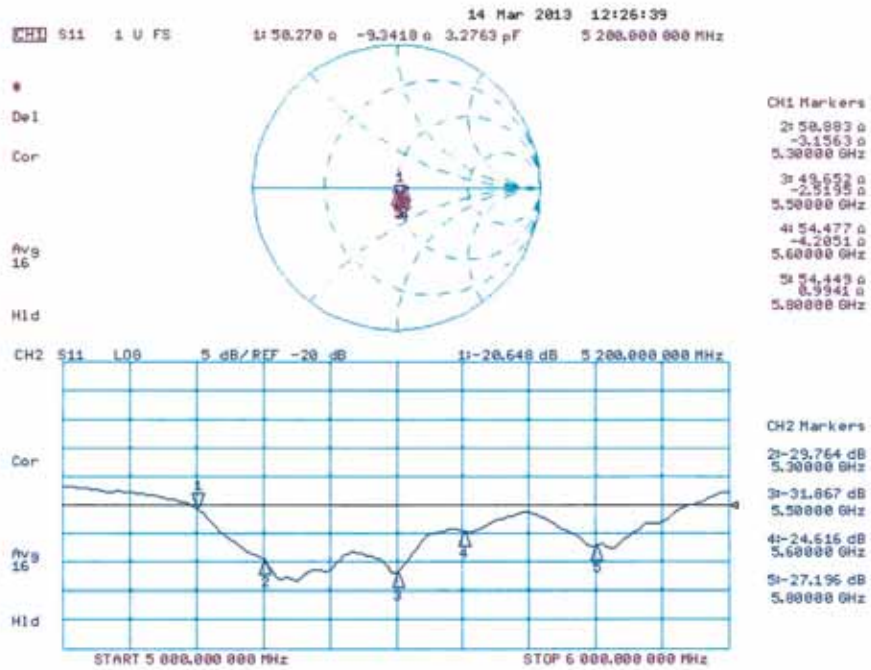

-THE END-