



TESTING CERT #3478.01



# TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 adapter card
Brand Name	Intel
Model Name	Intel® Dual-Band Wireless-AC 8260
Serial Number	TA#: H76739-001 WF MAC: 34:13:E8:42:D1:B4 BT MAC: 34:13:E8:42:D1:B8 (see section 4)
FCC/IC ID	FCC ID: PD98260NGH / PD98260NGHU IC ID: 1000M-8260NGH
Antenna type	SkyCross WIMAX/WLAN Reference Antenna
Hardware Version	HW: TF5 / HVIN : 8260NGWH
Software Version	Op SW: Intel Proset Version 18.10
Date of Sample Receipt	2015-06-01
Date of Test	2015-07-16
Features	802.11 a/n/ac Wireless LAN + BT 1.2 (see section 5)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15E RSS 247 issue 1 (see section 1)
---------------------	---

Test Report number	15051101.TR07
Revision Control	Rev. 00

The test results relate only to the samples tested.  
The test report shall not be reproduced in full, without written approval of the laboratory.

\_\_\_\_\_ Issued by \_\_\_\_\_ Reviewed by \_\_\_\_\_ Approved by \_\_\_\_\_

Olivier FARGANT  
(Test operator)

Jose M. FORTES  
(Technical Manager)

Nawfal ASRIH  
(Laboratory Manager)

Intel Mobile Communications France S.A.S – WRF Lab  
425 rue de Goa – Cargo B6 – 06600, Antibes, France  
Tel. +33493001400 / Fax +33493001401

# Table of Contents

---

<b>1. Standards, reference documents and applicable test methods .....</b>	<b>3</b>
<b>2. General conditions, competences and guarantees .....</b>	<b>3</b>
<b>3. Environmental Conditions.....</b>	<b>3</b>
<b>4. Test samples.....</b>	<b>4</b>
<b>5. EUT features .....</b>	<b>4</b>
<b>6. Remarks and comments.....</b>	<b>4</b>
<b>7. Test Verdicts summary.....</b>	<b>5</b>
<b>8. Document Revision History .....</b>	<b>5</b>
<b>Annex A. Test &amp; System Description .....</b>	<b>6</b>
A.1 TEST CONDITIONS .....	6
A.2 MEASUREMENT SYSTEM .....	6
A.3 TEST EQUIPMENT LIST.....	7
A.4 MEASUREMENT UNCERTAINTY EVALUATION.....	7
<b>Annex B. Test Results.....</b>	<b>8</b>
B.1 TEST RESULTS FOR DYNAMIC FREQUENCY SELECTION (DFS) .....	8
<b>Annex C. Photographs.....</b>	<b>12</b>

## 1. Standards, reference documents and applicable test methods

1. FCC 47 CFR part 15 - Subpart E – Unlicensed National Information Infrastructure Devices.
2. 905462 D02 UNII DFS Compliance Procedures New Rules v01r02 – Compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection.
3. RSS-247 issue 1 — Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
4. ANSI C63.10-2009 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 2. General conditions, competences and guarantees

- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is a testing laboratory accredited by the American Association for Laboratory Accreditation (A2LA).
- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm listed by the FCC, with Designation Number FR0011.
- ✓ Intel Mobile Communications Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by IC, with IC Assigned Code 1000Y.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

## 3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	22°C ± 2°C
Humidity	55% ± 5%

#### 4. Test samples

Sample	Control #	Description	Model	Serial #	Date of reception
#01	15051101.S22	WiFi/BT High End Module	8260NGW H	WF MAC: 34:13:E8:42:D1:B4	2015-06-01
	15051101.S06	Extender board	PCB00496 Ver0.1, Step-02	-	2015-05-12
	15051101.S11	Switching power supply SINPRO 5V 6A	SPU60-102	07990499 1249	2015-05-12
	15051101.S09	Laptop	DELL E5440	9FSYN32	2015-05-12

NA: Not Applicable

#### 5. EUT features

These are the detailed bands and modes supported by the Equipment Under Test:

802.11b/g/n	2.4GHz (2400.0 – 2483.5 MHz)
802.11a/n/ac	5.3GHz (5250.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz)
EDR2/ EDR3/BLE	2.4GHz (2400.0 – 2483.5 MHz)

#### 6. Remarks and comments

1. The operating mode of the sample is only client without radar detection.
2. The maximum antenna gain is 5dBi

## 7. Test Verdicts summary

FCC part 15.407 (h) (2)	
Test name	Verdict
Non Occupancy Period	P
DFS Detection Threshold	NA
Channel Availability Check Time	NA
Uniform Spreading	NA
U-NII Detection Bandwidth	NA
DFS Detection Threshold	NA
Channel Closing Transmission Time	P
Channel Move Time	P
U-NII Detection Bandwidth	NA

P: Pass

F: Fail

NM: Not Measured

NA: Not Applicable

## 8. Document Revision History

Revision #	Date	Modified by	Details
Rev. 00	2015-08-19	O. Fargant	First Issue

# Annex A. Test & System Description

## A.1 Test Conditions


The EUT power supply was provided by the Extender test board,  $V_{nominal} = 3.3V_{dc}$ . The Intel ProSet Wifi software was used to set the EUT in normal operation mode.

## A.2 Measurement system

Measurements were performed using the following setups, made in accordance to the general provisions of 905462 D02 UNII DFS Compliance Procedures New Rules v01r02.

The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. A second laptop computer was used to configure the access point on the DFS channels, a channel was selected randomly by the access point. To enable channel loading, this second laptop computer is also used as a server host, a video was streamed on the UUT.

*Conducted Setup*

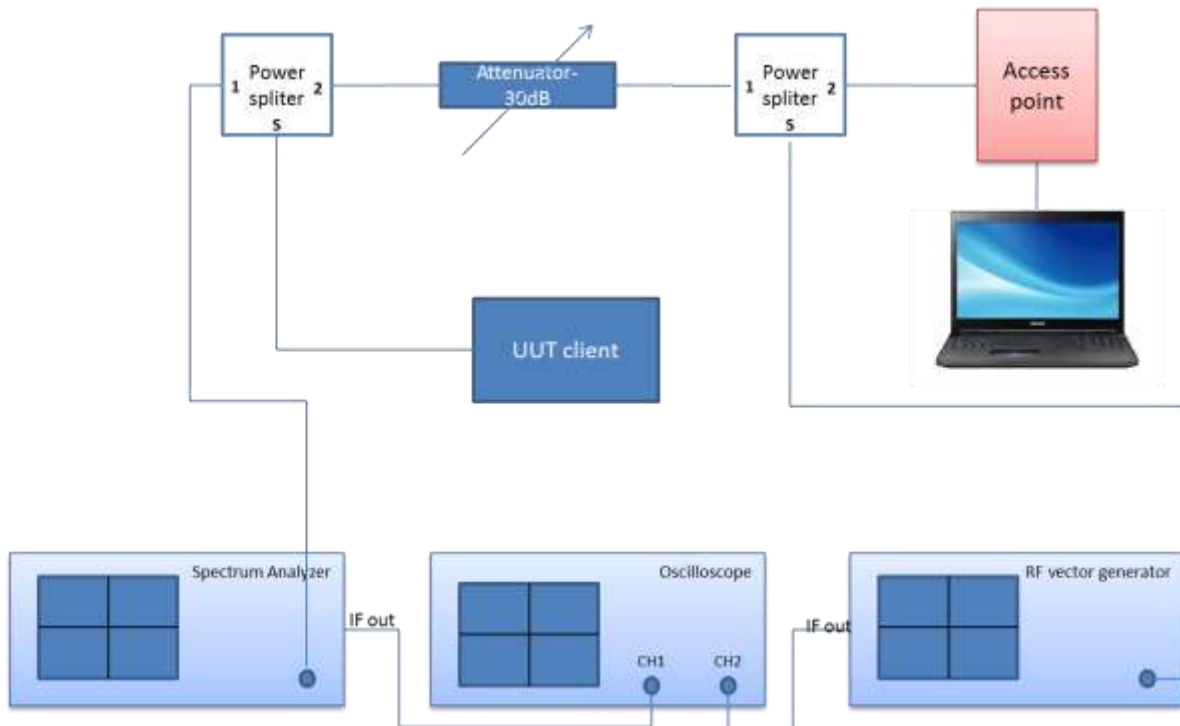

### A.3 Test Equipment List

Conducted Setup

ID#	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0033	Spectrum analyzer	FSV40	101425	Rohde & Schwarz	2015-03-25	2017-03-25
0017	Vector Signal Generator	SMJ100A	100458	Rohde & Schwarz	2013-09-19	2015-09-19
0312	Digital Oscilloscope	RTE1052	101135	Rohde & Schwarz	2015-05-25	2017-03-25
0261	Access point*	Aironet IOS	FTX134390GV	Cisco	NA	NA
-	Laptop DELL	Lattitude 5440	-	DELL	NA	NA

\*: FCC ID: LDK102061

### A.4 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the below table:


Measurement type	Uncertainty
Timing domain	+/- 1ms

# Annex B. Test Results

## B.1 Test results for Dynamic Frequency Selection (DFS)

### Test procedure

The setup below was used to measure verify measure the Non Occupancy Period, Channel Closing Transmission Time and Channel Move Time. Before sending the radar signal with the vector signal generator, the video streaming is launched to establish the channel loading. The Non Occupancy Period is observed on the spectrum analyzer, and the radar signal, the Channel Closing Transmission Time and Channel Move Time are observed on the oscilloscope.

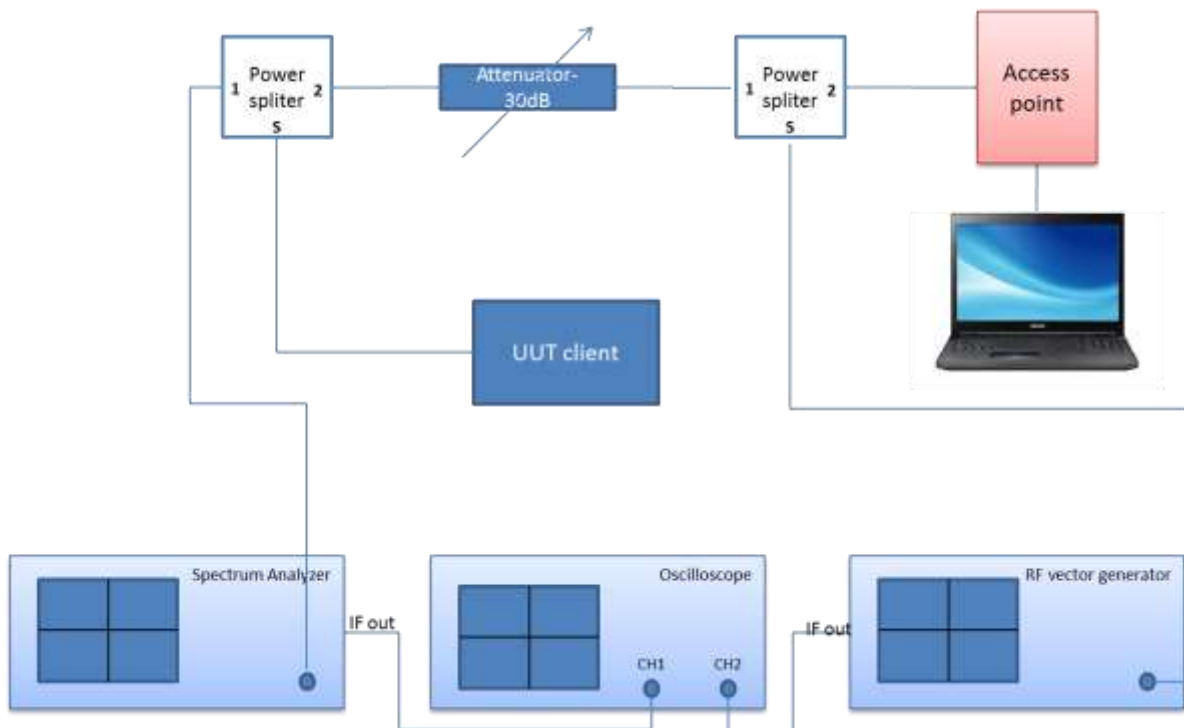


### Results tables

Tested Channel: 100, Frequency: 5500 MHz


Test item	Results	Limit
Channel Closing Transmission Time	< 37.65 ms	200 milliseconds + an aggregate of 60milliseconds over remaining 10 seconds period.
Channel Move Time	37.65 ms	10 seconds
Non-occupancy period	> 30 minutes	Minimum 30 minutes




**Results screenshot**

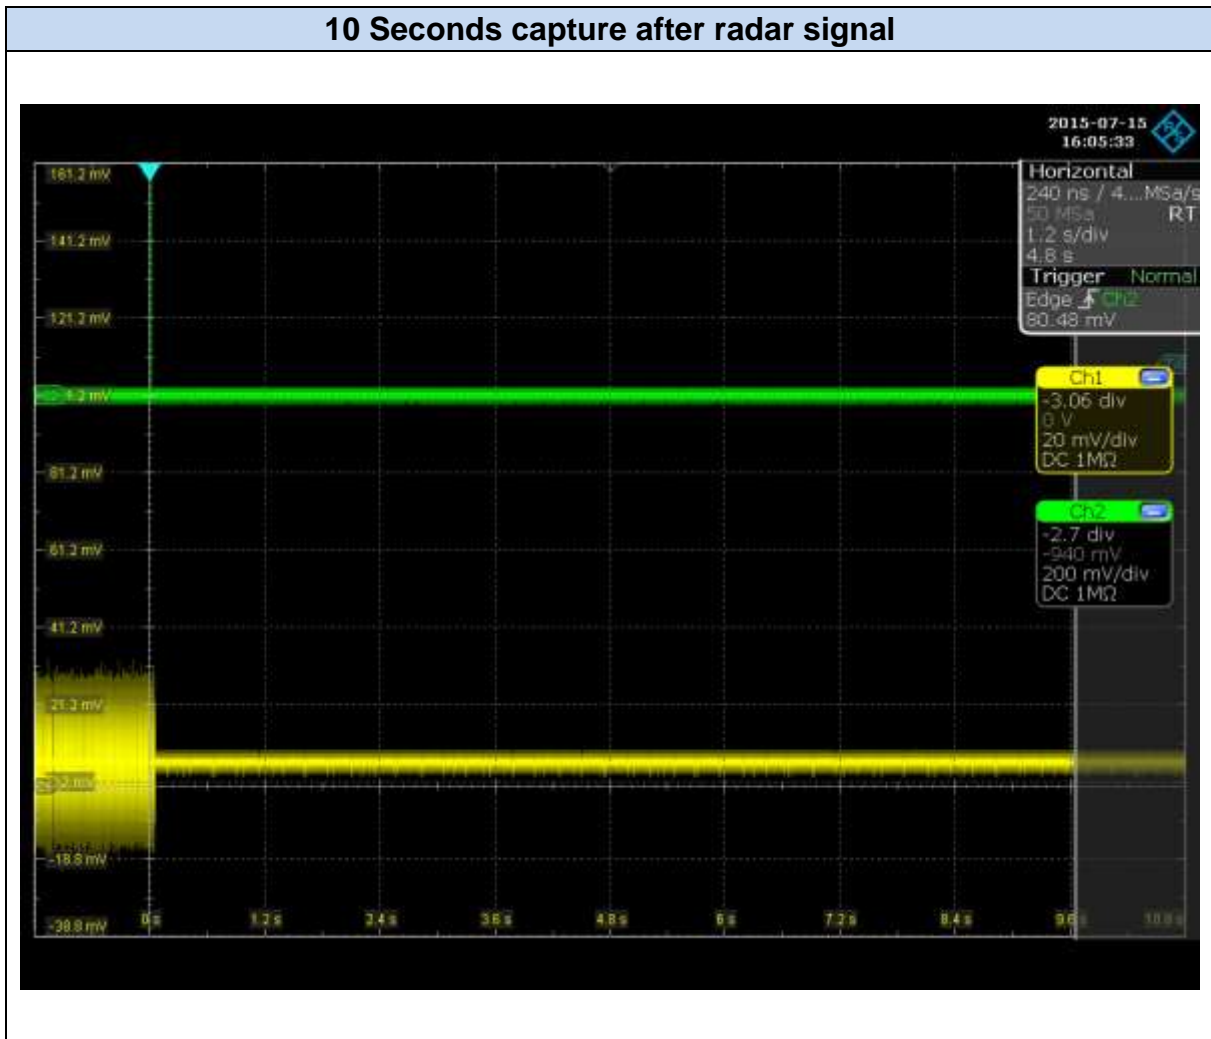

This zoomed screenshot above shows that no transmission from the EUT occur after 200ms following the radar signal.

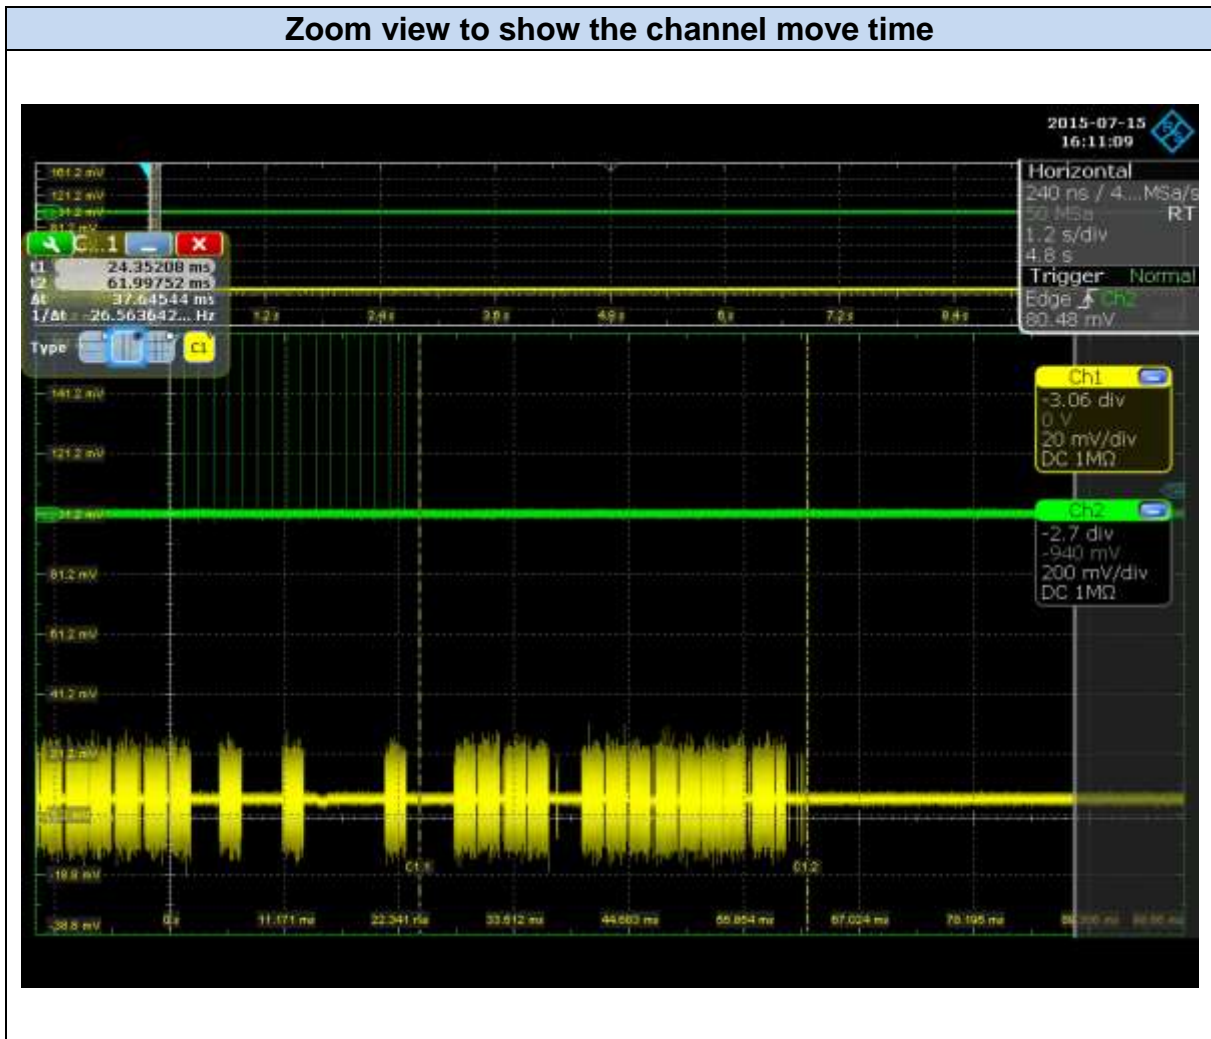

On the screenshot above, the cursors are placed between the latest radar signal and the latest data packet transmitted by the EUT to the master device. The time delta value show the channel move time, here the value is 37.65 ms.

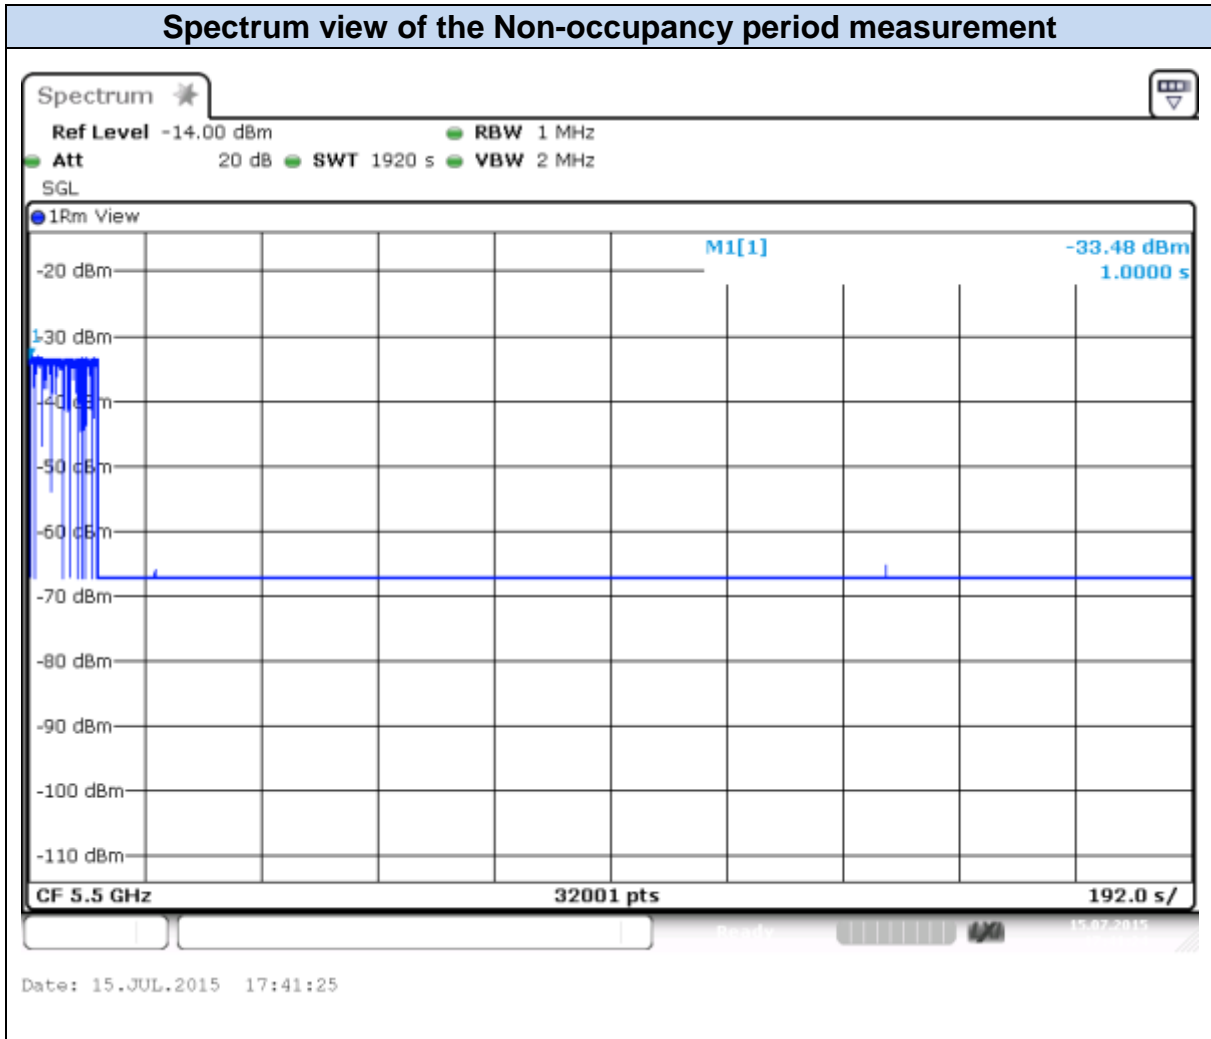

The screenshot above show the Non occupancy period during 30 minutes. No transmission from the EUT occurs during this period.