

# FCC Test Report (Class II Permissive Change)

Product Name	Intel® Dual Band Wireless-AC 8260
Model No.	8260NGW
FCC ID.	PD98260NG, PD98260NGU

\*FCC ID: PD98260NG (for OEM factory install)

\*FCC ID: PD98260NGU (for User Installation w/bios lock feature.)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA

Date of Receipt	June 03, 2015
Issued Date	Oct. 20, 2016
Report No.	1560147R-RFUSP01V00-A
Report Version	V2.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Quietek Corporation.

# Test Report


Issued Date: Oct. 20, 2016  
Report No.: 1560147R-RFUSP01V00-A



Product Name	Intel® Dual Band Wireless-AC 8260
Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Manufacturer	Intel Mobile Communications
Model No.	8260NGW
FCC ID.	PD98260NG, PD98260NGU
EUT Rated Voltage	DC 3.3V (via Mini-PCI Express slot)
EUT Test Voltage	AC 120V/ 60Hz
Trade Name	Intel
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2015 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By : Jinn Chen  
( Senior Adm. Specialist / Jinn Chen )

Tested By : Nick Chen  
( Engineer / Nick Chen )

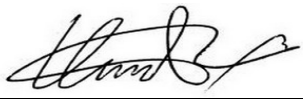Approved By :   
( Director / Vincent Lin )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. EUT Description.....	4
1.2. Operational Description.....	6
1.3. Tested System Details.....	7
1.4. Configuration of Tested System .....	7
1.5. EUT Exercise Software .....	7
1.6. Test Facility .....	8
1.7. List of Test Item and Equipment .....	9
<b>2. PEAK POWER OUTPUT .....</b>	<b>10</b>
2.1. Test Setup .....	10
2.2. Limit .....	10
2.3. Test Procedure .....	10
2.4. Uncertainty .....	10
2.5. Test Result of Peak Power Output.....	11
<b>3. RADIATED EMISSION .....</b>	<b>14</b>
3.1. Test Setup .....	14
3.2. Limits.....	15
3.3. Test Procedure .....	16
3.4. Uncertainty .....	16
3.5. Test Result of Radiated Emission .....	17
<b>4. BAND EDGE .....</b>	<b>29</b>
4.1. Test Setup .....	29
4.2. Limit .....	29
4.3. Test Procedure .....	29
4.4. Uncertainty .....	29
4.5. Test Result of Band Edge .....	30
<b>5. EMI REDUCTION METHOD DURING COMPLIANCE TESTING .....</b>	<b>42</b>
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	Intel® Dual Band Wireless-AC 8260
Trade Name	Intel
Model No.	8260NGW
FCC ID.	PD98260NG, PD98260NGU
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / $\pi$ /4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	Dipole Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”

#### Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	WIESON	GY121HT0321-003-H (External)	Dipole	2.89 dBi for 2.4GHz

Note:

1. The antenna of EUT is conform to FCC 15.203.

Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is an Intel® Dual Band Wireless-AC 8260 with a built-in WLAN & Bluetooth transceiver, this report for Bluetooth.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. This is to request a Class II permissive change for FCC ID: PD98260NG (originally granted on 05/27/2015) and PD98260NGU (originally granted on 05/27/2015).

The major change filed under this application is:

Change #1: Addition of new dipole type antenna, WIESON, part no. GY121HT0321-003-H (External).

This antenna will be restricted to mobile category computers and stationary desktop computers.

Test Mode	Mode 1: Transmit - 1Mbps (GFSK) Mode 2: Transmit - 2Mbps (4DQPSK) Mode 3: Transmit - 3Mbps (8DPSK)
-----------	--


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	N/A	N/A	Non-Shielded, 1.8m
2	Test Fixture	Intel	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A	Test Fixture Cable
	Non-Shielded, 1.0m

### 1.4. Configuration of Tested System

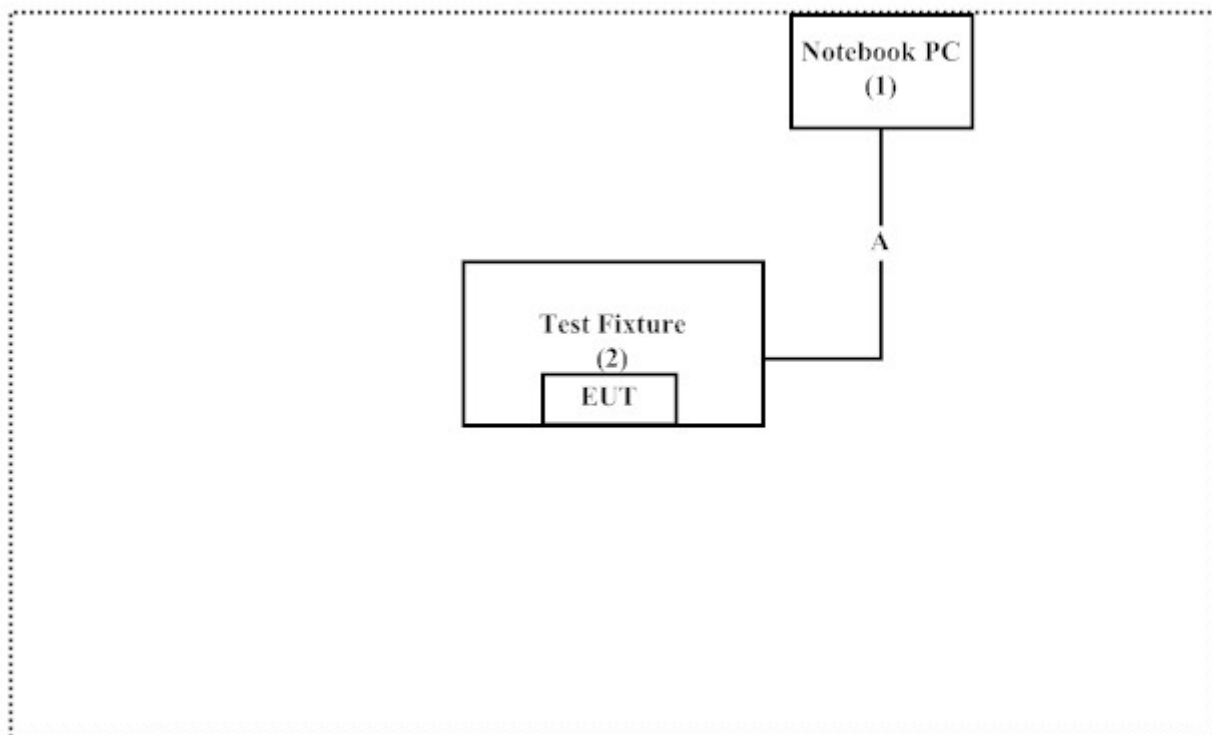

### 1.5. EUT Exercise Software

- (1) Setup the EUT and Peripherals as shown on 1.4
- (2) Execute software “DRTU (Ver 1.8.1-01253)” on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

**1.6. Test Facility**

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site: <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>  
 The address and introduction of Quietek Corporation's laboratories can be founded in our Web site: <http://www.quietek.com/>

Site Description: File on  
 Federal Communications Commission  
 FCC Engineering Laboratory  
 7435 Oakland Mills Road  
 Columbia, MD 21046  
 Registration Number: 92195

Site Name: Quietek Corporation  
 Site Address: No.5-22, Ruishukeng,  
 Linkou Dist. New Taipei City 24451,  
 Taiwan, R.O.C.  
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
 E-Mail : [service@quietek.com](mailto:service@quietek.com)

FCC Accreditation Number: TW1014

## 1.7. List of Test Item and Equipment

### For Conducted measurements /CB3

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	Agilent	N9010A	MY48030495	2016/7/22	2017/7/21
X	Power Meter	Anritsu	ML2495A	6K00003357	2016/6/23	2017/6/22
X	Power Sensor	Agilent	U2021XA	MY53400007	2015/11/26	2016/11/24
X	Power Sensor	Agilent	U2021XA	MY53400006	2015/11/26	2016/11/24
X	Power Sensor	Agilent	U2021XA	MY53360005	2015/11/26	2016/11/24
X	Power Sensor	Agilent	U2021XA	MY53400008	2015/11/26	2016/11/24
	Signal Generator	Agilent	N5182B	MY53050685	2016/5/31	2017/5/30
	Analog Signal Geator	Agilent	E8257DK/E825	MY44320633	2016/9/13	2017/9/12

### For Radiated measurements /Site3/CB10/CB8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSP40	100170	2016/1/5	2017/1/3
	Loop Antenna	TESEQ	HLA6121	37133	2016/3/18	2017/3/17
X	Bi-Log Antenna	Schaffner Chase	CBL6112B	2707	2016/6/11	2017/6/10
X	Horn Antenna	ETS-Lindgren	3117	00203761	2015/10/15	2016/10/13
	Horn Antenna	Schwarzbeck	BBHA9170	209	2016/4/14	2017/4/13
X	Pre-Amplifier	Quietek	QTK-LK-E-I-A	N/A	2016/6/16	2017/6/15
X	Pre-Amplifier	EMCI	EMC012630SE	980210	2016/1/26	2017/1/24
	Pre-Amplifier	NARDA WE	DBL-1840N506	013	2016/8/6	2017/8/4
X	Filter	MicroTRON	BRM50701	019	2015/10/20	2016/10/18
	Filter	Microwave Circuits	N0257881	36681	2015/12/7	2016/12/5
X	EMI Test Receiver	R&S	ESCS 30	838251/001	2016/7/21	2017/7/20
X	Coaxial Cable	QTK(Arnist)	RG 214	LC003-RG	2016/6/16	2017/6/15
X	Coaxial signal switch	Anritsu	MP59B	6201415889	2016/6/16	2017/6/15


Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : Keysight EN300328&EN301893 Test System V2.151229.



## 2. Peak Power Output

### 2.1. Test Setup

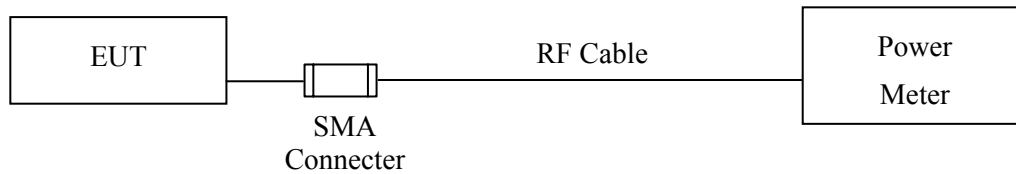

### 2.2. Limit

The maximum peak power shall be less 1Watt.

### 2.3. Test Procedure

The EUT was setup to ANSI C63.4, 2014; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### 2.4. Uncertainty

$\pm 1.27$  dB

## 2.5. Test Result of Peak Power Output

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Peak Power Output  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)  
Test Date : 2016/09/22

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	11.38	1 Watt= 30 dBm	Pass
Channel 39	2441.00	11.34	1 Watt= 30 dBm	Pass
Channel 78	2480.00	11.21	1 Watt= 30 dBm	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Peak Power Output  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)  
 Test Date : 2016/09/22

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	9.36	1 Watt= 30 dBm	Pass
Channel 39	2441.00	9.33	1 Watt= 30 dBm	Pass
Channel 78	2480.00	9.29	1 Watt= 30 dBm	Pass


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Peak Power Output  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)  
 Test Date : 2016/09/22

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	9.28	1 Watt= 30 dBm	Pass
Channel 39	2441.00	9.35	1 Watt= 30 dBm	Pass
Channel 78	2480.00	9.30	1 Watt= 30 dBm	Pass


### 3. Radiated Emission

#### 3.1. Test Setup

Below 1GHz

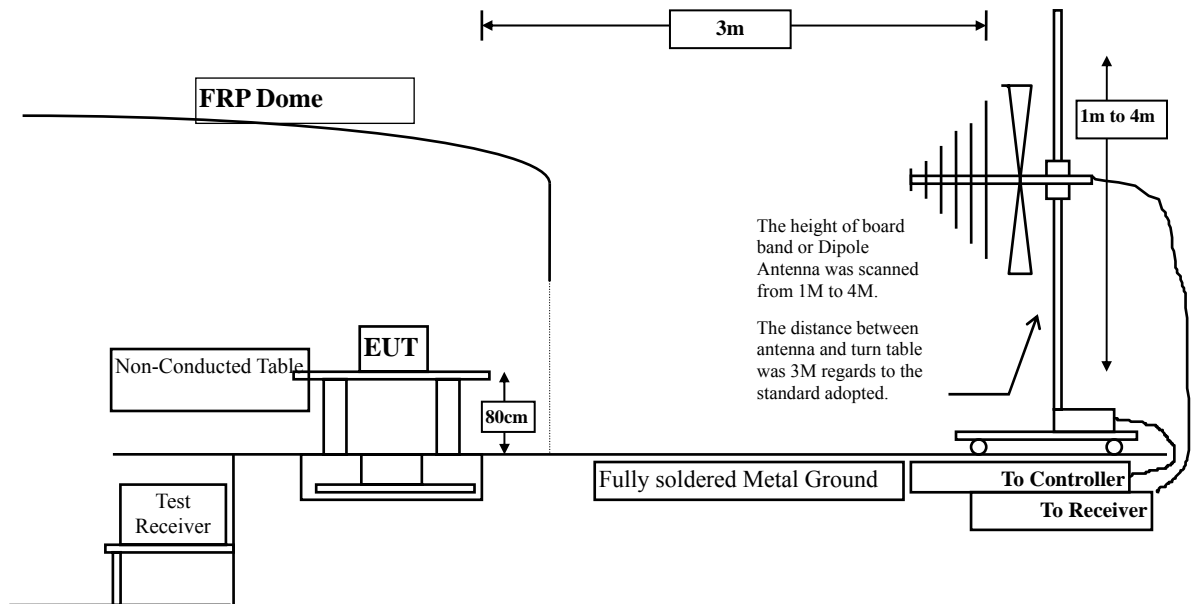

Above 1GHz

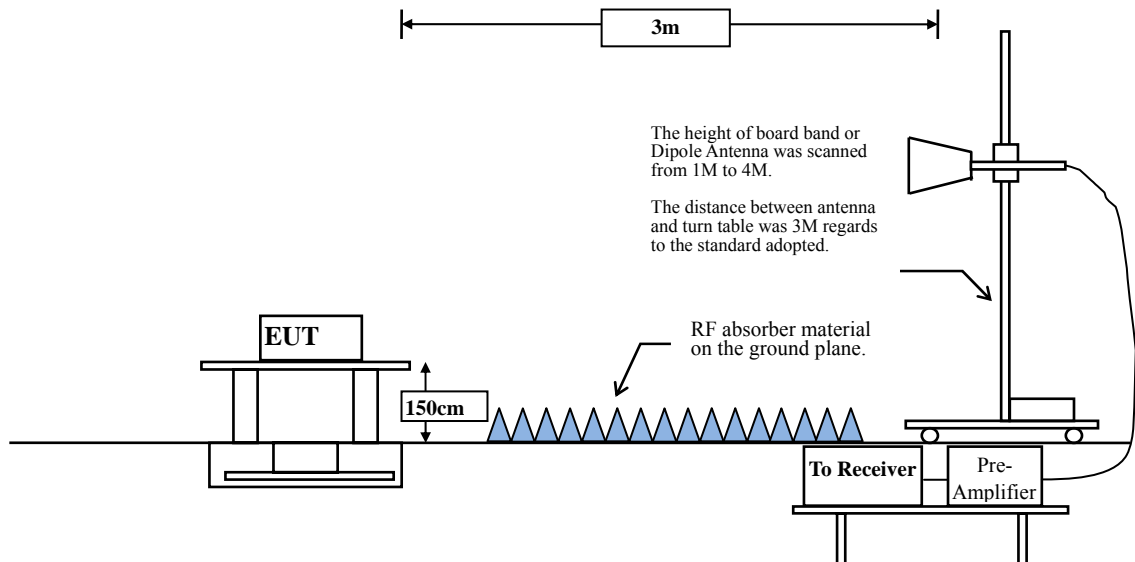

### 3.2. Limits

#### ➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

<b>FCC Part 15 Subpart C Paragraph 15.209 Limits</b>		
Frequency MHz	uV/m @3m	dBµV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks:
1. RF Voltage (dBµV) = 20 log RF Voltage (uV)
  2. In the Above Table, the tighter limit applies at the band edges.
  3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### **3.3. Test Procedure**

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.249 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

### **3.4. Uncertainty**

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

### 3.5. Test Result of Radiated Emission

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)  
 Test Date : 2016/09/26

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4804.000	2.511	40.642	43.152	-30.848	74.000
7206.000	9.511	42.338	51.849	-22.151	74.000
9608.000	10.394	40.922	51.316	-22.684	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4804.000	2.923	47.221	50.143	-23.857	74.000
7206.000	9.988	42.048	52.037	-21.963	74.000
9608.000	10.847	41.317	52.164	-21.836	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)  
 Test Date : 2016/09/26

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4882.000	2.025	40.873	42.898	-31.102	74.000
7323.000	9.762	42.984	52.745	-21.255	74.000
9764.000	9.682	40.781	50.462	-23.538	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4882.000	2.488	45.053	47.541	-26.459	74.000
7323.000	10.375	43.123	53.497	-20.503	74.000
9764.000	10.315	40.202	50.517	-23.483	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)  
 Test Date : 2016/09/26

Frequency MHz	Correct Factor dB	Reading Level dBµV	Measurement Level dBµV/m	Margin dB	Limit dBµV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4960.000	2.582	40.056	42.638	-31.362	74.000
7440.000	10.555	43.236	53.791	-20.209	74.000
9920.000	10.206	40.165	50.371	-23.629	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4960.000	3.398	45.115	48.514	-25.486	74.000
7440.000	11.214	42.380	53.594	-20.406	74.000
9920.000	11.245	40.602	51.847	-22.153	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)(2402MHz)  
 Test Date : 2016/09/26

Frequency MHz	Correct Factor dB	Reading Level dBµV	Measurement Level dBµV/m	Margin dB	Limit dBµV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4804.000	2.511	40.646	43.156	-30.844	74.000
7206.000	9.511	41.886	51.397	-22.603	74.000
9608.000	10.394	40.891	51.285	-22.715	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4804.000	2.923	46.362	49.284	-24.716	74.000
7206.000	9.988	42.508	52.497	-21.503	74.000
9608.000	10.847	40.490	51.337	-22.663	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2441MHz)  
 Test Date : 2016/09/26

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4882.000	2.025	40.699	42.724	-31.276	74.000
7323.000	9.762	43.623	53.384	-20.616	74.000
9764.000	9.682	40.563	50.244	-23.756	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4882.000	2.488	45.196	47.684	-26.316	74.000
7323.000	10.375	43.002	53.376	-20.624	74.000
9764.000	10.315	40.534	50.849	-23.151	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2480MHz)  
 Test Date : 2016/09/26

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4960.000	2.582	40.310	42.892	-31.108	74.000
7440.000	10.555	42.615	53.170	-20.830	74.000
9920.000	10.206	41.509	51.715	-22.285	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4960.000	3.398	44.753	48.152	-25.848	74.000
7440.000	11.214	42.027	53.241	-20.759	74.000
9920.000	11.245	39.744	50.989	-23.011	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)(2402MHz)  
 Test Date : 2016/09/26

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4804.000	2.511	40.743	43.253	-30.747	74.000
7206.000	9.511	42.373	51.884	-22.116	74.000
9608.000	10.394	40.663	51.057	-22.943	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4804.000	2.923	46.296	49.218	-24.782	74.000
7206.000	9.988	42.395	52.384	-21.616	74.000
9608.000	10.847	40.781	51.628	-22.372	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2441MHz)  
 Test Date : 2016/09/26

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4882.000	2.025	40.720	42.745	-31.255	74.000
7323.000	9.762	43.117	52.878	-21.122	74.000
9746.000	9.682	41.082	50.763	-23.237	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4882.000	2.488	45.403	47.891	-26.109	74.000
7323.000	10.375	43.317	53.691	-20.309	74.000
9764.000	10.315	40.172	50.487	-23.513	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2480MHz)  
 Test Date : 2016/09/26

Frequency MHz	Correct Factor dB	Reading Level dBµV	Measurement Level dBµV/m	Margin dB	Limit dBµV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4960.000	2.582	40.292	42.874	-31.126	74.000
7440.000	10.555	43.194	53.749	-20.251	74.000
9920.000	10.206	41.173	51.379	-22.621	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4960.000	3.398	41.415	44.814	-29.186	74.000
7440.000	11.214	42.180	53.394	-20.606	74.000
9920.000	11.245	40.727	51.972	-22.028	74.000
<b>Average Detector:</b>					
--	--	--	--	--	50.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)  
 Test Date : 2016/09/26

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
197.420	-10.212	42.033	31.821	-11.679	43.500
368.710	0.713	34.881	35.594	-10.406	46.000
496.300	1.524	33.948	35.472	-10.528	46.000
619.610	2.101	32.143	34.244	-11.756	46.000
791.830	6.389	26.404	32.793	-13.207	46.000
921.260	6.741	28.019	34.760	-11.240	46.000
<b>Vertical</b>					
121.780	-3.580	34.078	30.498	-13.002	43.500
277.910	-6.072	39.746	33.674	-12.326	46.000
461.340	-2.049	32.841	30.792	-15.208	46.000
562.790	-2.470	38.088	35.617	-10.383	46.000
742.650	0.023	34.838	34.861	-11.139	46.000
942.970	3.410	29.070	32.480	-13.520	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK) (2441MHz)  
 Test Date : 2016/09/26

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
157.180	-8.929	41.501	32.572	-10.928	43.500
308.530	-4.312	36.284	31.972	-14.028	46.000
467.290	3.314	32.770	36.084	-9.916	46.000
621.490	1.841	27.648	29.489	-16.511	46.000
774.330	5.151	31.177	36.328	-9.672	46.000
889.370	6.655	30.426	37.081	-8.919	46.000
<b>Vertical</b>					
129.430	-3.712	36.281	32.569	-10.931	43.500
267.150	-5.748	40.983	35.236	-10.764	46.000
411.810	-4.986	39.359	34.373	-11.627	46.000
570.200	-2.394	39.137	36.743	-9.257	46.000
723.670	-0.767	35.629	34.862	-11.138	46.000
882.600	1.380	37.251	38.631	-7.369	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK) (2441MHz)  
 Test Date : 2016/09/26


Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
215.260	-10.305	41.197	30.892	-12.608	43.500
378.490	1.227	33.507	34.734	-11.266	46.000
519.580	3.203	27.653	30.856	-15.144	46.000
667.700	1.868	25.809	27.676	-18.324	46.000
809.410	6.255	26.572	32.827	-13.173	46.000
921.080	6.752	29.629	36.381	-9.619	46.000
<b>Vertical</b>					
154.870	-5.255	38.096	32.841	-10.659	43.500
314.140	-4.098	40.543	36.445	-9.555	46.000
487.160	-2.300	39.716	37.416	-8.584	46.000
658.910	-1.639	35.132	33.493	-12.507	46.000
816.240	2.938	33.279	36.217	-9.783	46.000
955.370	2.956	33.615	36.571	-9.429	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 4. Band Edge

### 4.1. Test Setup

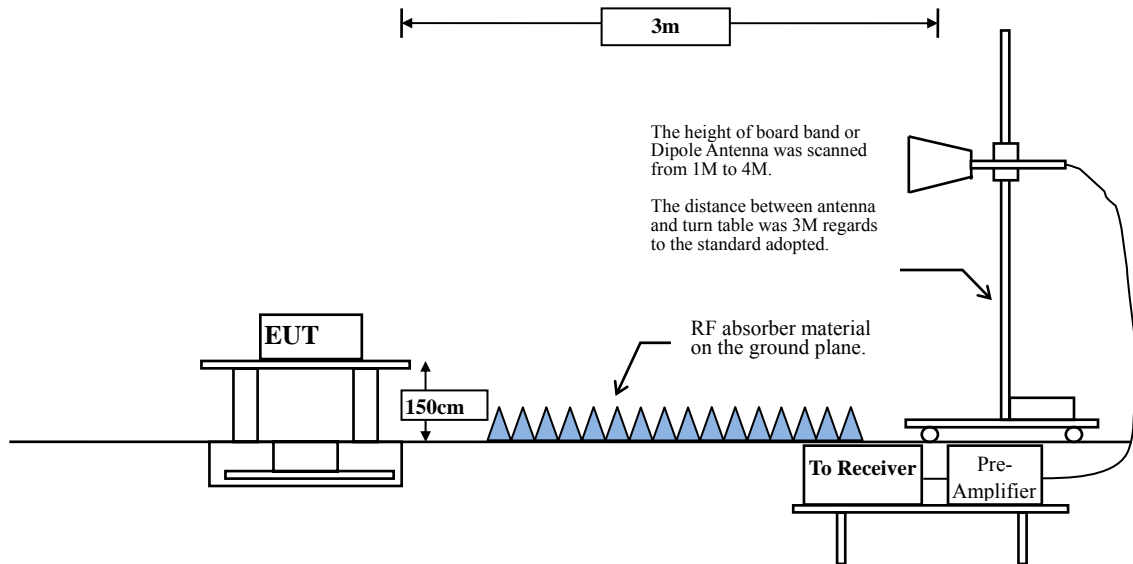

### 4.2. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

### 4.4. Uncertainty

$\pm 3.9$  dB above 1GHz

$\pm 3.8$  dB below 1GHz


#### 4.5. Test Result of Band Edge

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)  
 Test Date : 2016/09/26


#### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2390.000	-1.131	47.864	46.733	74.00	54.00	Pass
00 (Peak)	2400.000	-1.084	68.381	67.298	--	--	--
00 (Peak)	2401.884	-1.073	97.982	96.909	--	--	--
00 (Average)	2390.000	-1.131	33.993	32.862	74.00	54.00	Pass
00 (Average)	2400.000	-1.084	46.308	45.225	--	--	--
00 (Average)	2402.029	-1.073	84.002	82.930	--	--	--

**Figure Channel 00: Horizontal (Peak)**

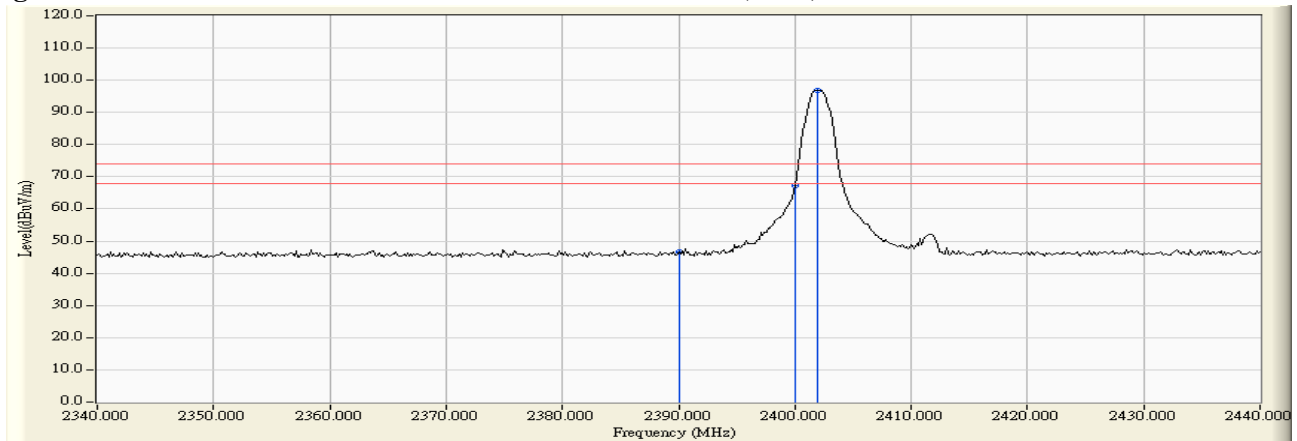

**Figure Channel 00: Horizontal (Average)**

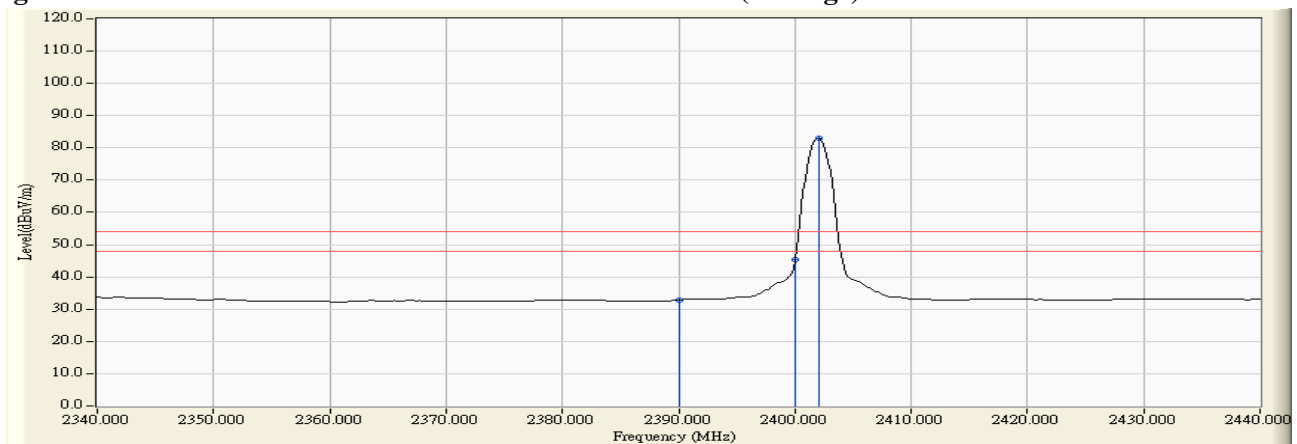


- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
 4. “ \* ”, means this data is the worst emission level.  
 5. Measurement Level = Reading Level + Correct Factor.  
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)  
 Test Date : 2016/09/26


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2389.565	-1.723	49.788	48.065	74.00	54.00	Pass
00 (Peak)	2390.000	-1.725	48.521	46.796	74.00	54.00	Pass
00 (Peak)	2400.000	-1.733	74.106	72.374	--	--	--
00 (Peak)	2402.174	-1.729	106.977	105.249	--	--	--
00 (Average)	2363.478	-1.602	36.297	34.695	74.00	54.00	Pass
00 (Average)	2390.000	-1.725	34.653	32.928	74.00	54.00	Pass
00 (Average)	2400.000	-1.733	51.775	50.043	--	--	--
00 (Average)	2402.029	-1.729	90.690	88.961	--	--	--

**Figure Channel 00: Vertical (Peak)**

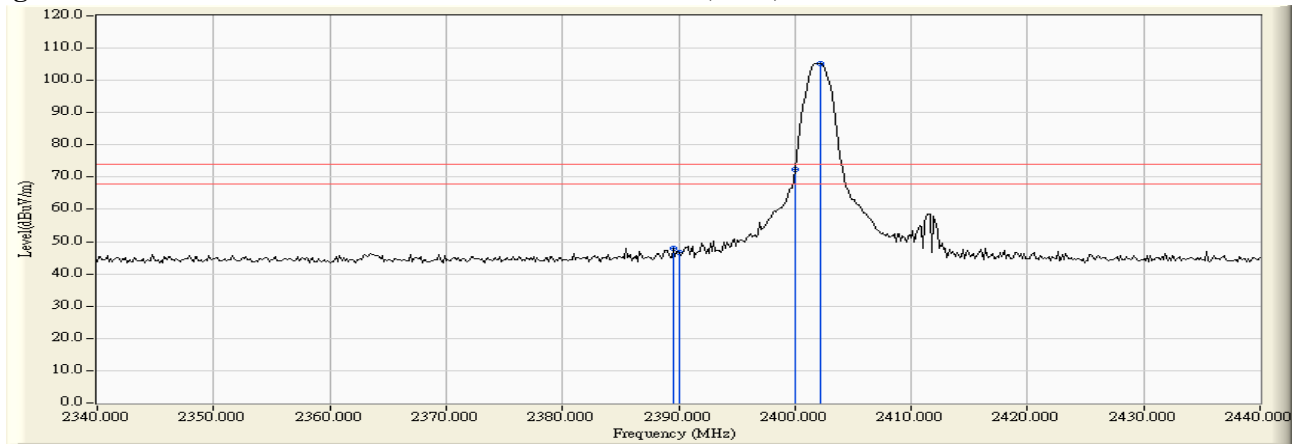

**Figure Channel 00: Vertical (Average)**

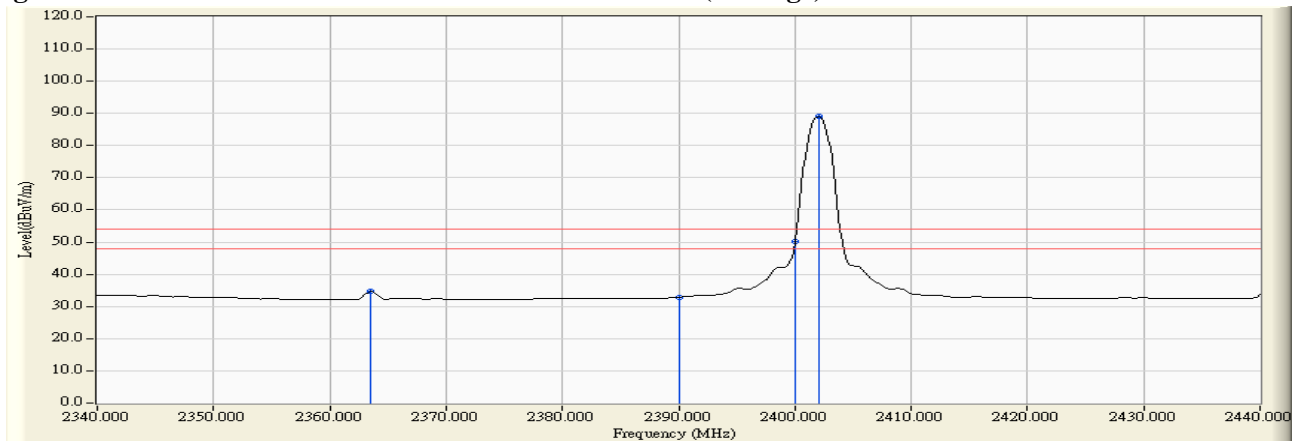


- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
 4. “ \* ”, means this data is the worst emission level.  
 5. Measurement Level = Reading Level + Correct Factor.  
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)  
 Test Date : 2016/09/26


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.877	-0.581	101.197	100.616	--	--	--
78 (Peak)	2483.560	-0.557	59.780	59.222	74.00	54.00	Pass
78 (Average)	2480.022	-0.580	87.301	86.721	--	--	--
78 (Average)	2483.500	-0.558	41.208	40.650	74.00	54.00	Pass

**Figure Channel 78: Horizontal (Peak)**

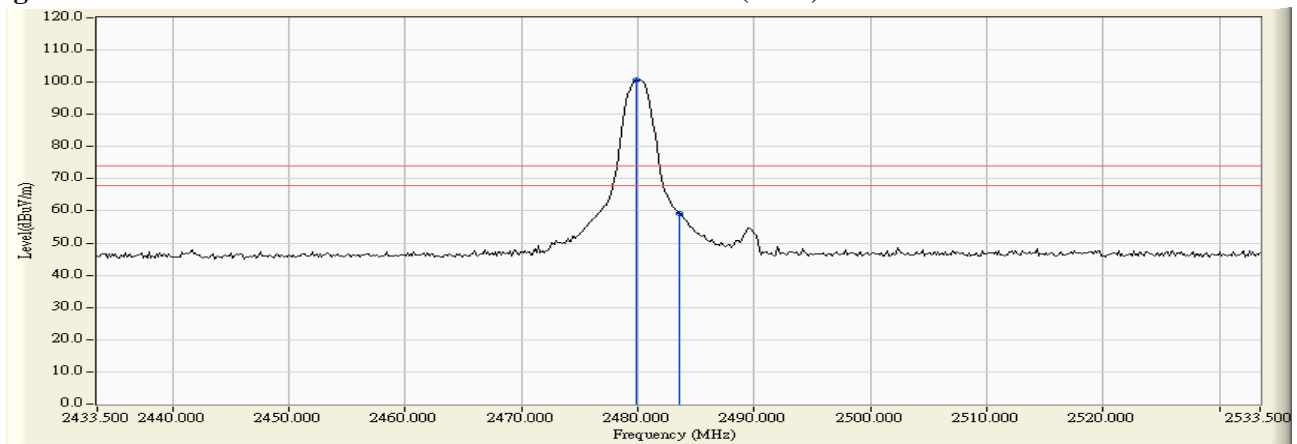

**Figure Channel 78: Horizontal (Average)**

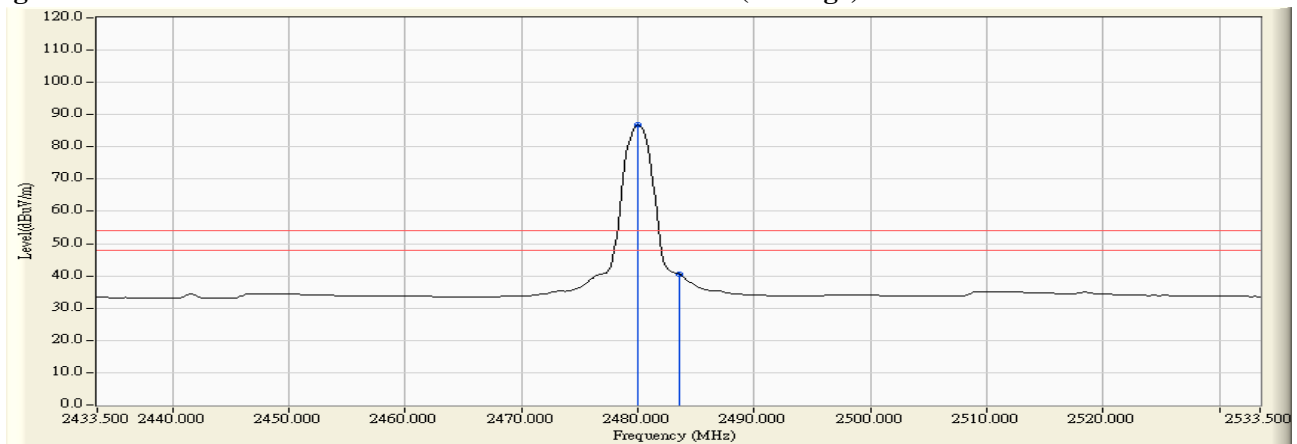


- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
 4. “ \* ”, means this data is the worst emission level.  
 5. Measurement Level = Reading Level + Correct Factor.  
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)  
 Test Date : 2016/09/26


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.877	-1.325	110.840	109.515	--	--	--
78 (Peak)	2483.500	-1.305	67.028	65.723	74.00	54.00	Pass
78 (Average)	2480.022	-1.324	94.289	92.965	--	--	--
78 (Average)	2483.500	-1.305	47.331	46.026	74.00	54.00	Pass

**Figure Channel 78: Vertical (Peak)**

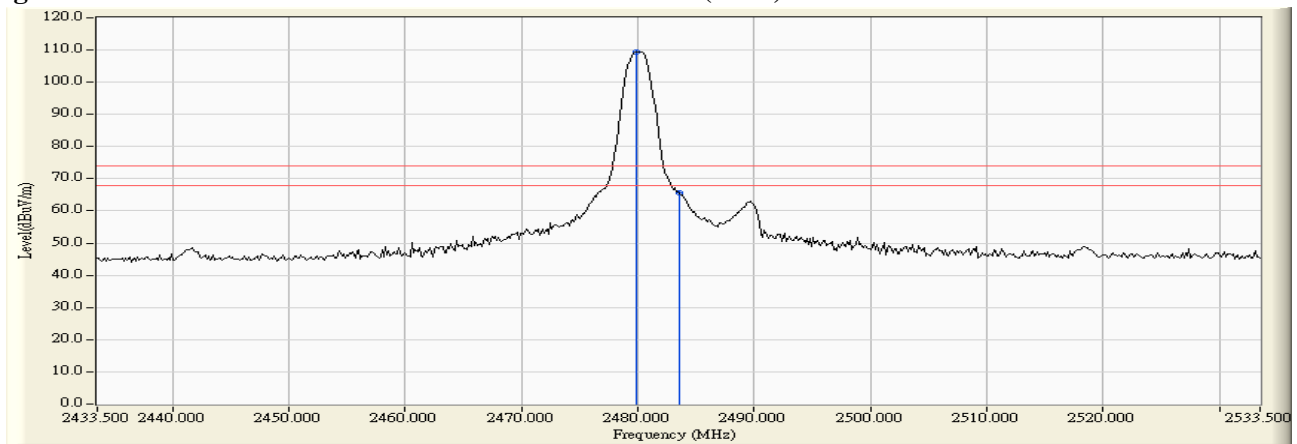

**Figure Channel 78: Vertical (Average)**

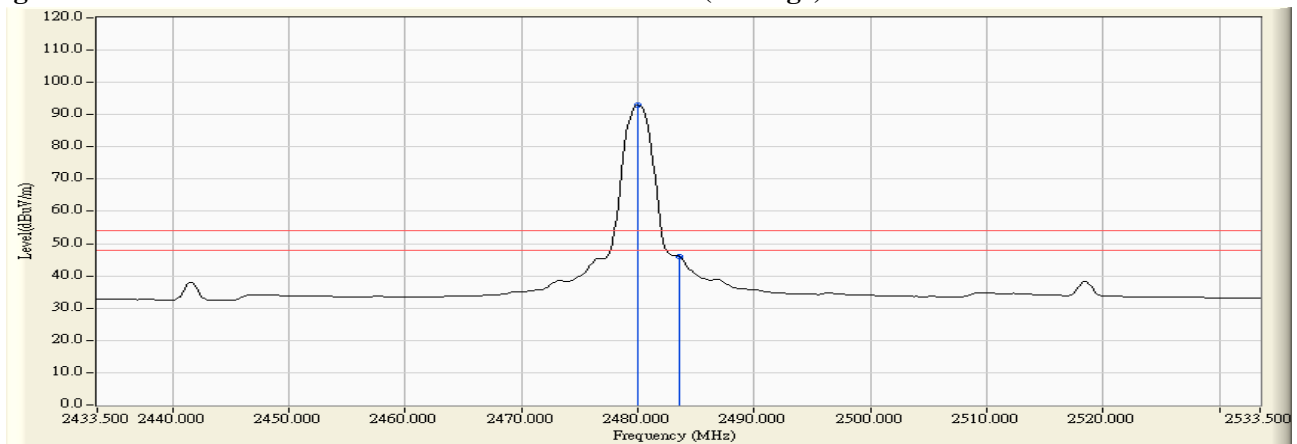

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)  
 Test Date : 2016/09/26


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2390.000	-1.131	47.316	46.185	74.00	54.00	Pass
00 (Peak)	2400.000	-1.084	74.326	73.243	--	--	--
00 (Peak)	2402.174	-1.072	97.439	96.367	--	--	--
00 (Average)	2390.000	-1.131	35.019	33.888	74.00	54.00	Pass
00 (Average)	2400.000	-1.084	54.669	53.586	--	--	--
00 (Average)	2402.029	-1.073	83.409	82.337	--	--	--

**Figure Channel 00: Horizontal (Peak)**

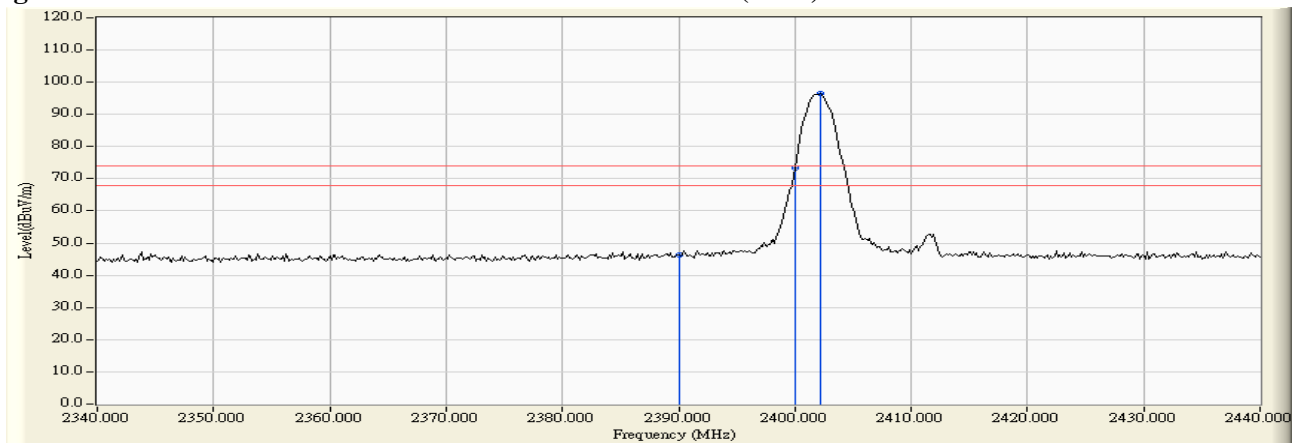

**Figure Channel 00: Horizontal (Average)**

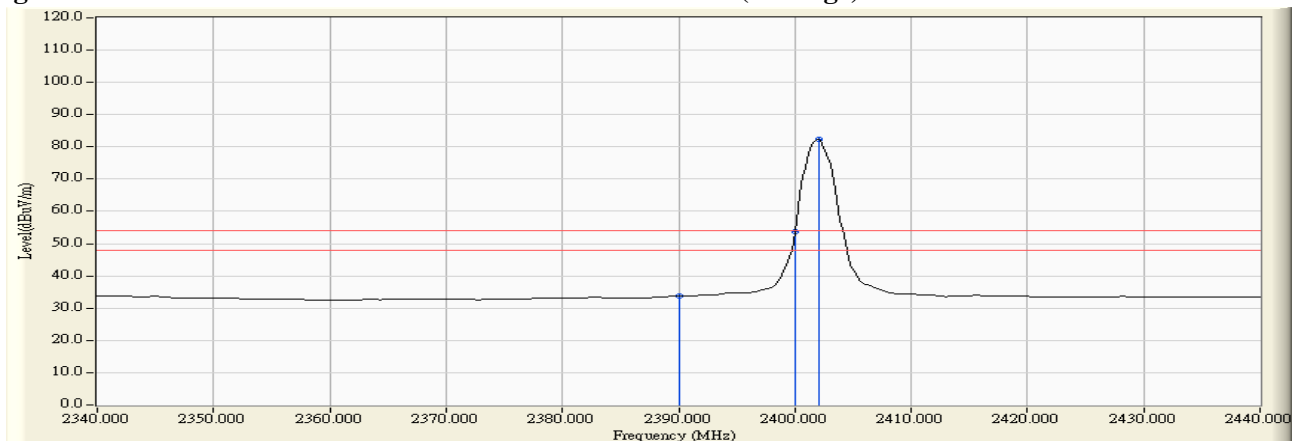


- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
 4. “ \* ”, means this data is the worst emission level.  
 5. Measurement Level = Reading Level + Correct Factor.  
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2389.710	-1.723	52.208	50.485	74.00	54.00	Pass
00 (Peak)	2390.000	-1.725	50.871	49.146	74.00	54.00	Pass
00 (Peak)	2400.000	-1.733	84.018	82.286	--	--	--
00 (Peak)	2401.884	-1.729	106.583	104.854	--	--	--
00 (Average)	2390.000	-1.725	38.127	36.402	74.00	54.00	Pass
00 (Average)	2400.000	-1.733	61.354	59.622	--	--	--
00 (Average)	2402.029	-1.729	89.378	87.649	--	--	--

**Figure Channel 00: Vertical (Peak)**

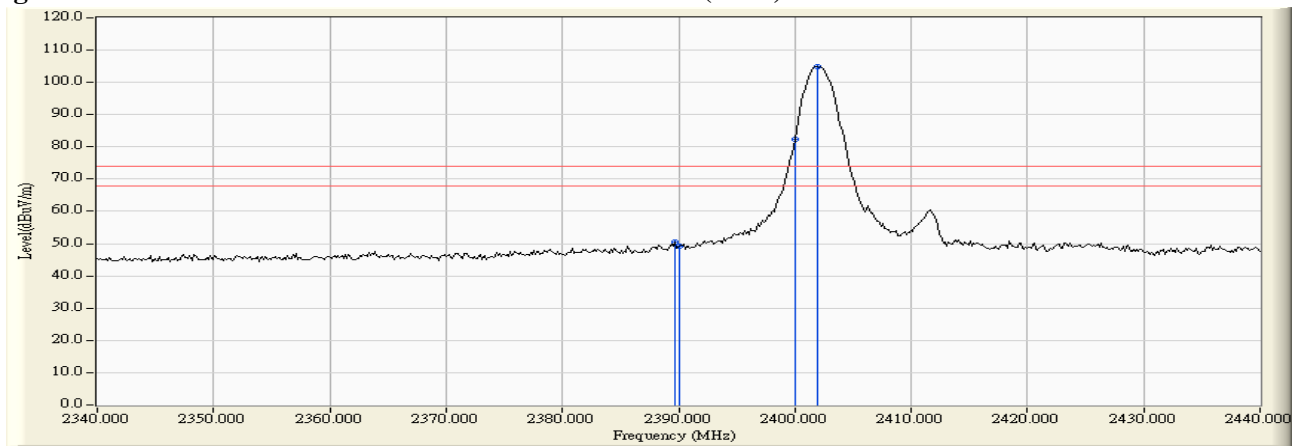

**Figure Channel 00: Vertical (Average)**

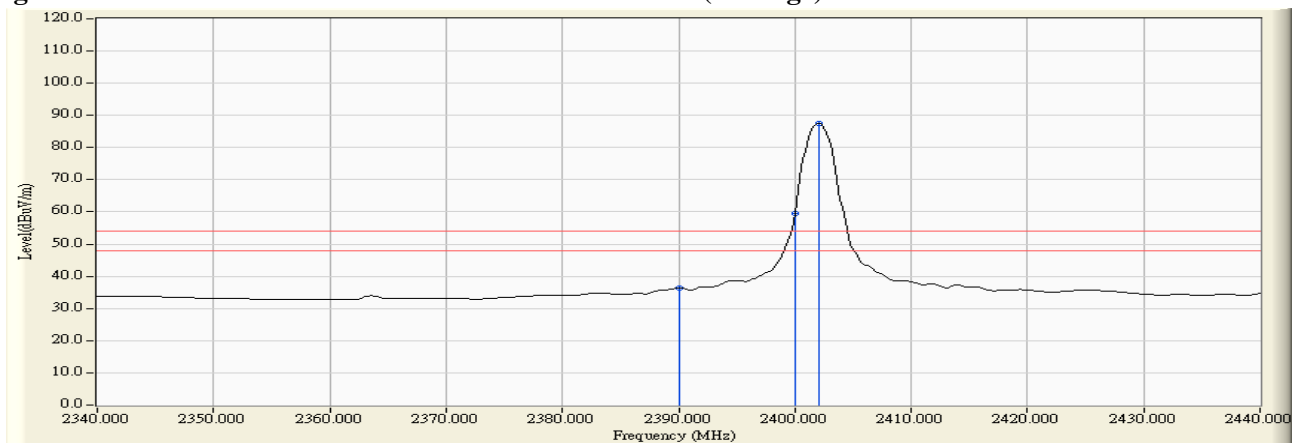


- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
 4. “ \* ”, means this data is the worst emission level.  
 5. Measurement Level = Reading Level + Correct Factor.  
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)  
 Test Date : 2016/09/26


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2480.167	-0.579	99.772	99.193	--	--	--
78 (Peak)	2483.500	-0.558	53.831	53.273	74.00	54.00	Pass
78 (Peak)	2489.587	-0.518	55.341	54.822	74.00	54.00	Pass
78 (Average)	2480.022	-0.580	83.751	83.171	--	--	--
78 (Average)	2483.500	-0.558	40.707	40.149	74.00	54.00	Pass

**Figure Channel 78: Horizontal (Peak)**

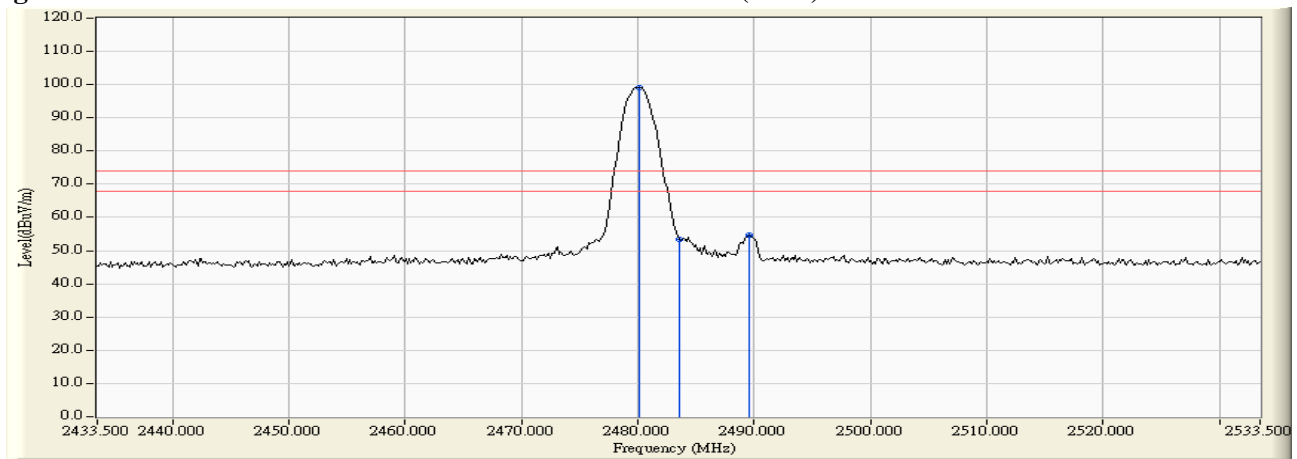

**Figure Channel 78: Horizontal (Average)**

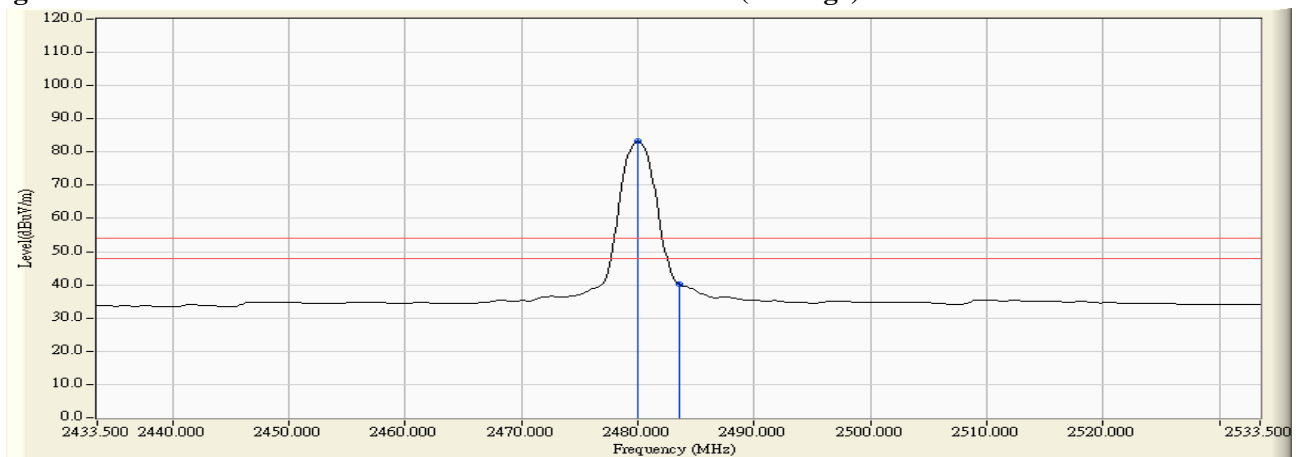


- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
 4. “ \* ”, means this data is the worst emission level.  
 5. Measurement Level = Reading Level + Correct Factor.  
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 2Mbps (4DQPSK)  
 Test Date : 2016/09/26


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.877	-1.325	108.966	107.641	--	--	--
78 (Peak)	2483.500	-1.305	66.537	65.232	74.00	54.00	Pass
78 (Average)	2480.022	-1.324	91.541	90.217	--	--	--
78 (Average)	2483.500	-1.305	48.179	46.874	74.00	54.00	Pass

**Figure Channel 78: Vertical (Peak)**

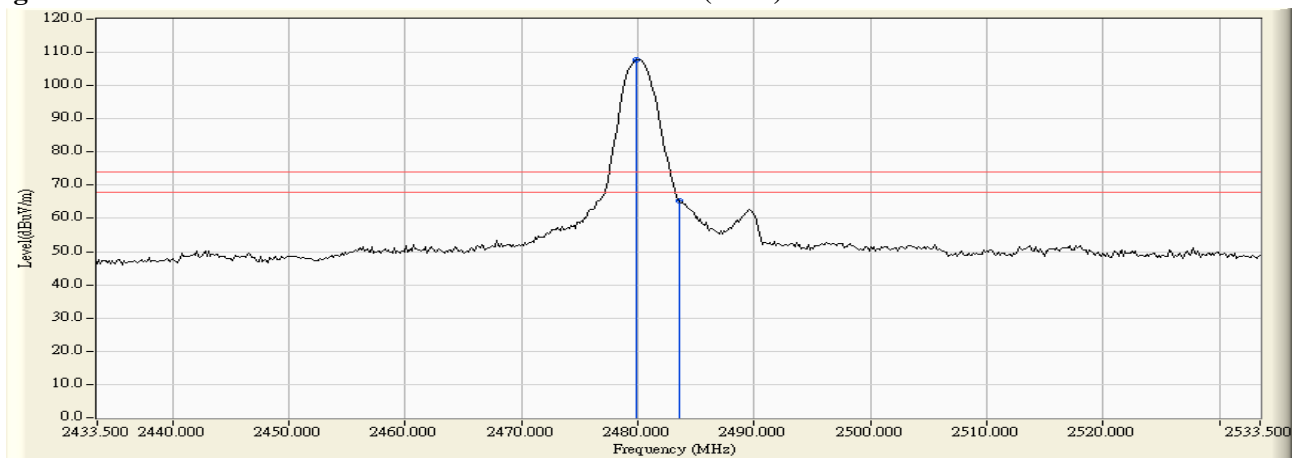

**Figure Channel 78: Vertical (Average)**

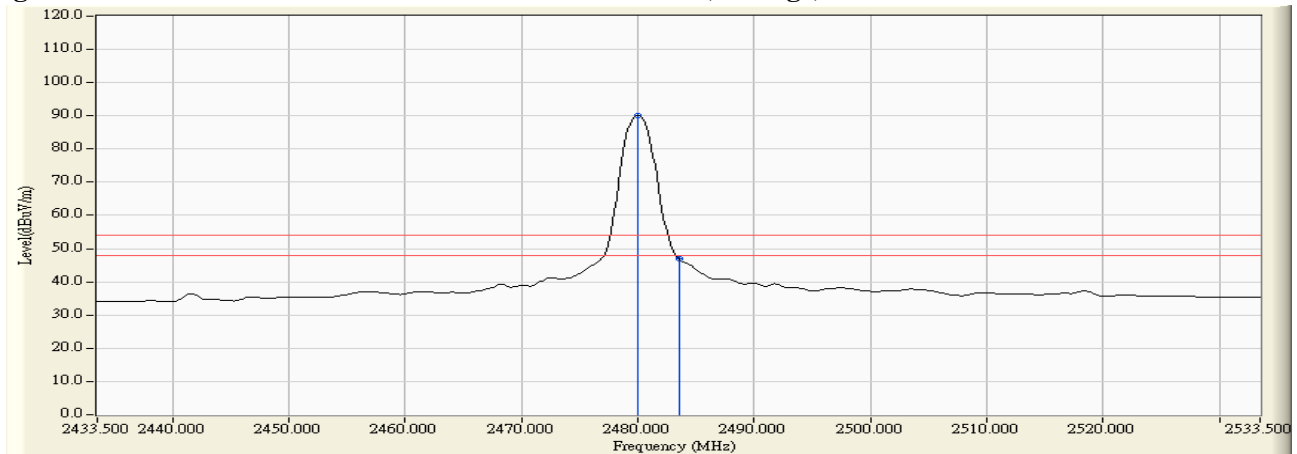


- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
 4. “ \* ”, means this data is the worst emission level.  
 5. Measurement Level = Reading Level + Correct Factor.  
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)  
 Test Date : 2016/09/26


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2390.000	-1.131	47.651	46.520	74.00	54.00	Pass
00 (Peak)	2400.000	-1.084	73.948	72.865	--	--	--
00 (Peak)	2401.884	-1.073	97.630	96.557	--	--	--
00 (Average)	2390.000	-1.131	35.052	33.921	74.00	54.00	Pass
00 (Average)	2400.000	-1.084	54.361	53.278	--	--	--
00 (Average)	2401.884	-1.073	82.683	81.610	--	--	--

**Figure Channel 00: Horizontal (Peak)**

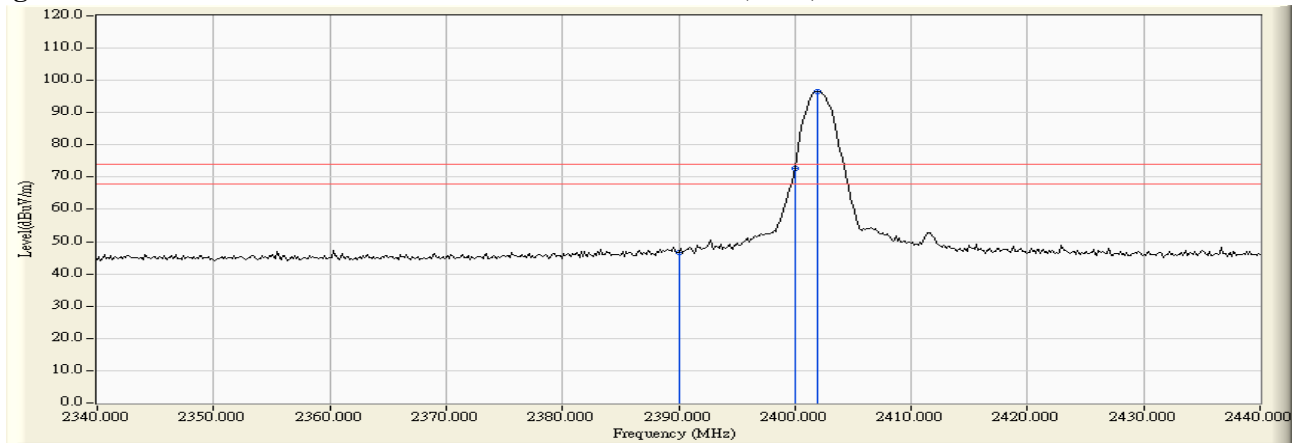

**Figure Channel 00: Horizontal (Average)**

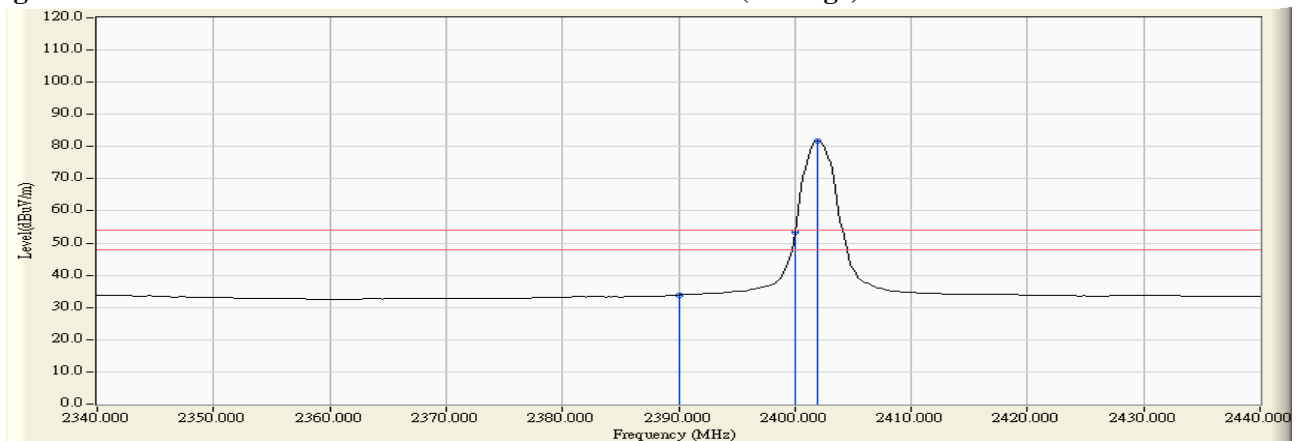


- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
 4. “ \* ”, means this data is the worst emission level.  
 5. Measurement Level = Reading Level + Correct Factor.  
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)  
 Test Date : 2016/09/26


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2388.551	-1.718	54.065	52.347	74.00	54.00	Pass
00 (Peak)	2390.000	-1.725	52.772	51.047	74.00	54.00	Pass
00 (Peak)	2400.000	-1.733	83.579	81.847	--	--	--
00 (Peak)	2401.884	-1.729	105.946	104.217	--	--	--
00 (Average)	2390.000	-1.725	37.519	35.794	74.00	54.00	Pass
00 (Average)	2400.000	-1.733	60.573	58.841	--	--	--
00 (Average)	2401.884	-1.729	88.308	86.579	--	--	--

**Figure Channel 00: Vertical (Peak)**

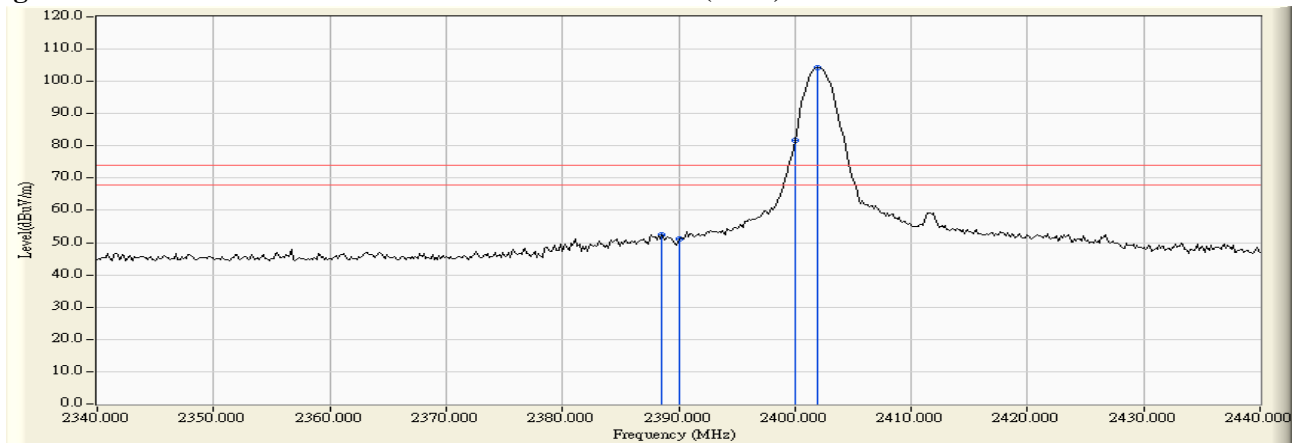

**Figure Channel 00: Vertical (Average)**

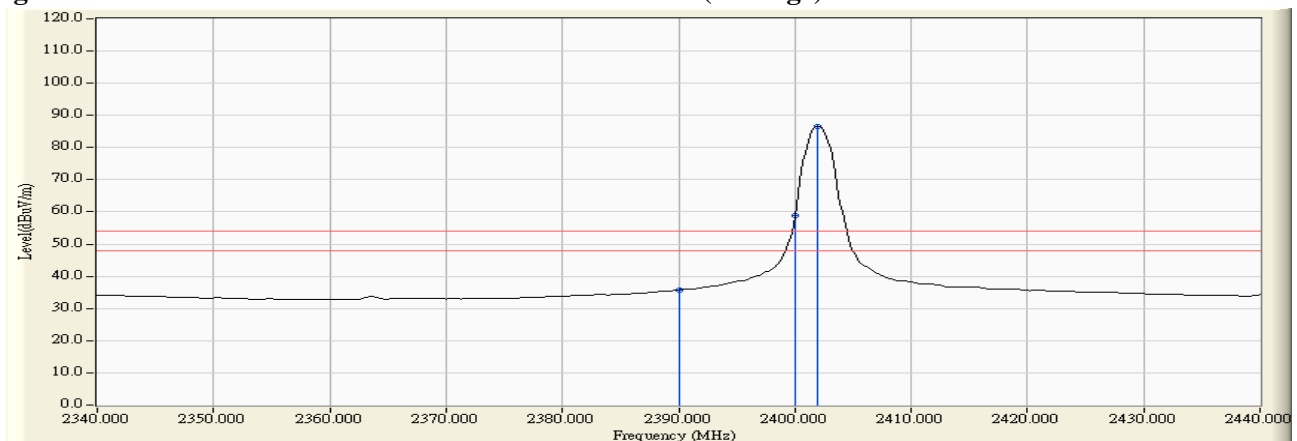


- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
 4. “ \* ”, means this data is the worst emission level.  
 5. Measurement Level = Reading Level + Correct Factor.  
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)  
 Test Date : 2016/09/26


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2480.022	-0.580	100.120	99.540	--	--	--
78 (Peak)	2483.500	-0.558	55.935	55.377	74.00	54.00	Pass
78 (Average)	2479.877	-0.581	84.533	83.952	--	--	--
78 (Average)	2483.500	-0.558	41.116	40.558	74.00	54.00	Pass

**Figure Channel 78: Horizontal (Peak)**

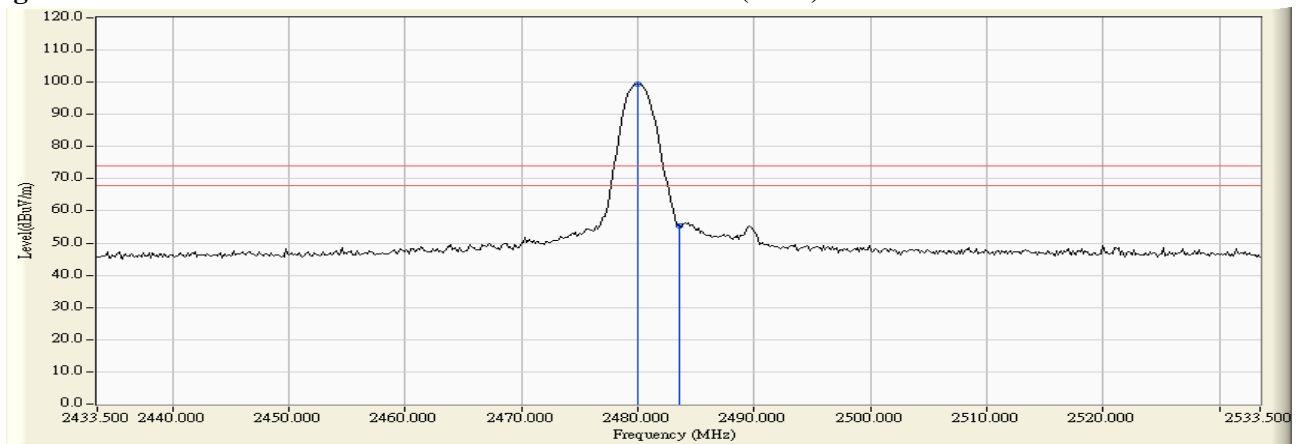

**Figure Channel 78: Horizontal (Average)**

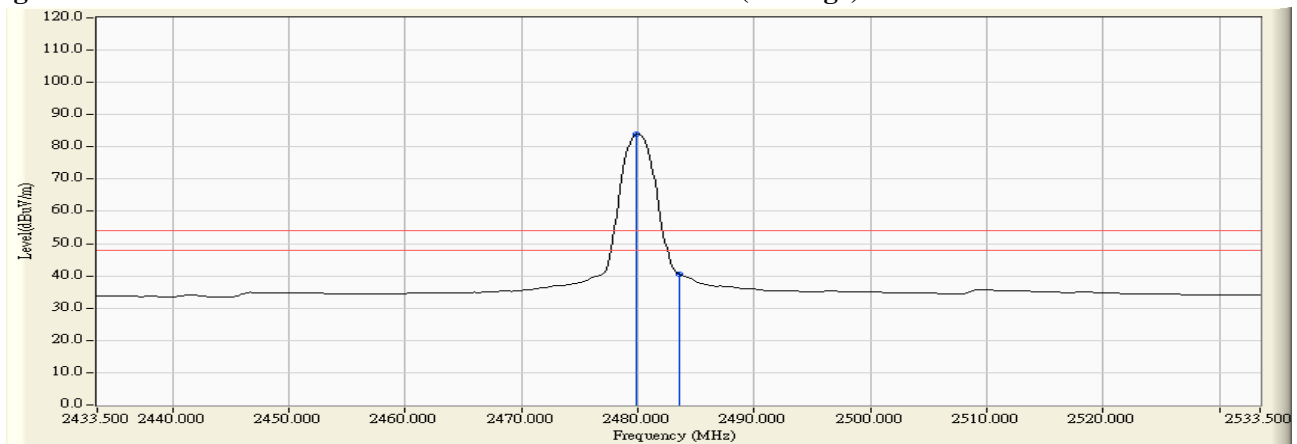


- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
 4. “ \* ”, means this data is the worst emission level.  
 5. Measurement Level = Reading Level + Correct Factor.  
 6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmit - 3Mbps (8DPSK)  
 Test Date : 2016/09/26


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2480.022	-1.324	109.185	107.861	--	--	--
78 (Peak)	2483.500	-1.305	67.262	65.957	74.00	54.00	Pass
78 (Average)	2479.877	-1.325	91.586	90.261	--	--	--
78 (Average)	2483.500	-1.305	48.575	47.270	74.00	54.00	Pass

**Figure Channel 78: Vertical (Peak)**

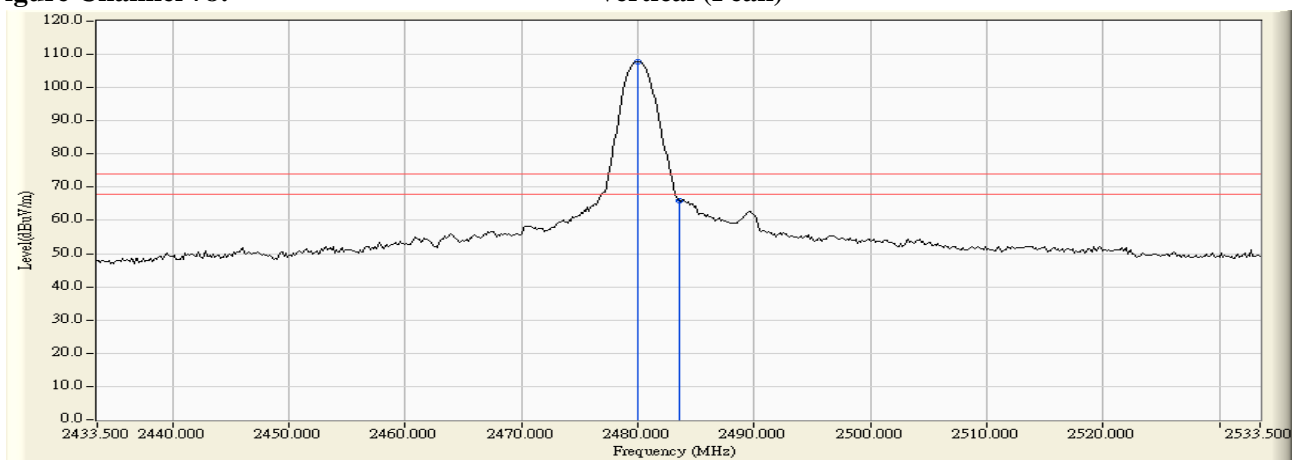

**Figure Channel 78: Vertical (Average)**

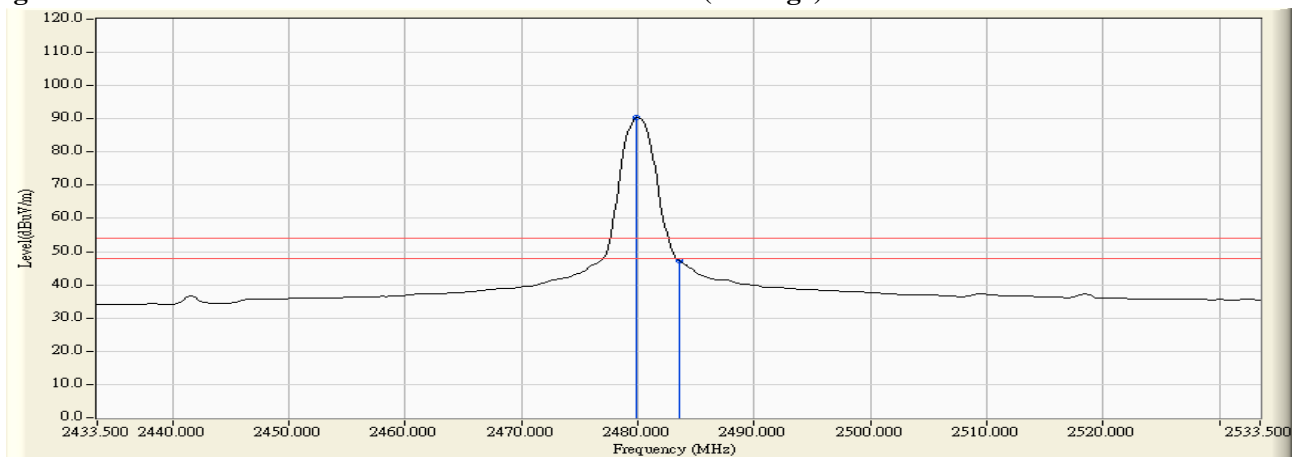

- Note: 1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
 2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
 3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
 4. “ \* ”, means this data is the worst emission level.  
 5. Measurement Level = Reading Level + Correct Factor.  
 6. The average measurement was not performed when the peak measured data under the limit of average detection.



## **5. EMI Reduction Method During Compliance Testing**

No modification was made during testing.

## Attachment 1: EUT Test Photographs

## Attachment 2: EUT Detailed Photographs