

TEST REPORT

EUT Description	Wireless Module installed in Convertible PC
Brand Name	Intel® Dual-Band Wireless-AC 8265
Model Name	8265NGW
FCC / ISED ID	FCC ID: PD98265NG / IC ID: 1000M-8265NG
Date of Test Start/End	2018-03-23 / 2018-03-27
Features	802.11 a/b/g/n/ac Wireless LAN + Bluetooth v4.2 (see section 5)
Description	Platform: Flex 6 – 14IKB series + HongBo antenna

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 / Columbia, SC 29210 / United States
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC 47 CFR Part §2.1093 RSS-102, Issue 5 (see section 1)	
RF Exposure Environment	Portable devices - General population/uncontrolled exposure	
	SAR Result	SAR Limit
Maximum SAR Result & Limit	0.97 W/kg (1g)	1.6 W/kg (1g)
Min. test separation distance	0mm to phantom, 8mm to antenna edge	

Test Report identification	180301-01.TR01
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
The test report shall not be reproduced in full, without written approval of the laboratory.

Issued by



Digitally signed by Rafael
QUIROZ MORENO
Date: 2018.04.10 19:19:36
+02'00'

Rafael QUIROZ
(Test Engineer Lead)

Reviewed by



Digitally signed by Olivier FARGANT
DN: cn=Olivier FARGANT, o=Intel
Mobile Communications, ou=WRF Lab,
email=olivier.fargant@intel.com, c=FR
Date: 2018.04.10 19:40:01 +02'00'

Olivier FARGANT
(Technical Manager)

Intel Mobile Communications France S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	4
2. General conditions, competences and guarantees	4
3. Environmental Conditions	5
4. Test samples	5
5. EUT Features	6
6. Remarks and comments	8
7. Test Verdicts summary	8
8. Document Revision History	8
Annex A. Test & System Description	9
A.1 SAR DEFINITION	9
A.2 SPEAG SAR MEASUREMENT SYSTEM	10
A.2.1 SAR Measurement Setup	10
A.2.2 E-Field Measurement Probe	11
A.2.3 SAM Phantom	11
A.2.4 Flat Phantom	12
A.2.5 Device Positioner	12
A.3 DATA EVALUATION	13
A.4 SYSTEM AND LIQUID CHECK	15
A.4.1 System Check	15
A.4.2 Liquid Check	16
A.5 TEST EQUIPMENT LIST	17
A.5.1 SAR System #1	17
A.5.2 Shared Instrumentation	17
A.5.3 Tissue Simulant Liquid	17
A.6 MEASUREMENT UNCERTAINTY EVALUATION	18
A.7 RF EXPOSURE LIMITS	20
Annex B. Test Results	21
B.1 TEST CONDITIONS	21
B.1.1 Test SAR Test positions relative to the phantom	21
B.1.2 Test signal, Output power and Test Frequencies	21
B.1.3 Evaluation Exclusion and Test Reductions	22
B.2 CONDUCTED POWER MEASUREMENTS	24
B.2.1 WLAN 2.4GHz	24
B.2.2 WLAN 5GHz (U-NII)	25
B.2.3 Bluetooth	29
B.3 TISSUE PARAMETERS MEASUREMENT	30
B.4 SYSTEM CHECK MEASUREMENTS	30
B.5 SAR TEST RESULTS	31
B.5.1 802.11b/g/n – 2.4GHz - DTS	31
B.5.2 802.11a/n/ac – 5.3 GHz – U-NII-2A	31
B.5.3 802.11a/n/ac – 5.6 GHz – U-NII-2C	31
B.5.4 802.11a/n/ac – 5.8 GHz – U-NII-3	32
B.5.5 Bluetooth – 2.4GHz - DSS	32
B.5.6 SAR Measurement Variability	33
B.5.7 Simultaneous Transmission SAR Evaluation	34
Annex C. Test System Plots	36

Annex D. TSL Dielectric Parameters 51

D.1 BODY 2450MHZ 51

D.2 BODY 5200MHZ-5800MHZ 52

Annex E. Calibration Certificates 54

Annex F. Photographs 56

F.1 TEST SAMPLE 56

F.2 TEST POSITIONS..... 57

F.3 ANTENNA HOST PLATFORM LOCATION AND ADJACENT EDGE POSITIONS RELATIVE TO THE BODY 58

F.4 PHANTOM LIQUID LEVEL DURING MEASUREMENTS 59

1. Standards, reference documents and applicable test methods

1. FCC 47 CFR Part §2.1093 – Radiofrequency radiation exposure evaluation: portable devices.
2. FCC OET KDB 248227 D01 – SAR guidance for IEEE 802.11 (Wi-Fi) transmitters.
3. FCC OET KDB 447498 D01 –RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices.
4. FCC OET KDB 616217 D04 – SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers.
5. FCC OET KDB 865664 D01 – SAR Measurement Requirements for 100 MHz to 6 GHz.
6. FCC OET KDB 865664 D02 – RF Exposure Compliance Reporting and Documentation Considerations.
7. ISED RSS 102, Issue 5 – Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands).
8. ISED Notice 2016-DRS001 – Applicability of latest FCC RF Exposure KDB Procedures and Other Procedures.
9. ISED Notice 2012-DRS0529 – SAR correction for measured conductivity and relative permittivity based on IEC 62209-2 standard.
10. IEEE Std 1528-2013 – IEEE Recommended Practice Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques...

2. General conditions, competences and guarantees

- ✓ Intel Mobile Communications France SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2005 testing laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Mobile Communications France SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel Mobile Communications France SAS Wireless RF Lab (Intel WRF Lab) is a Registered Test Site listed by ISED, with ISED Assigned Code 1000Y.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	22°C ± 2°C
Humidity	40% ± 10%
Liquid Temperature	21°C ± 2°C

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	180301-01.S01	Wireless Module installed in Convertible PC	8265NGW+Flex 6 – 14IKB series	WiFi MAC: F8:34:41:63:10:87 BT MAC: F8:34:41:63:10:8B	2018-03-09	

5. EUT Features

Brand Name	Intel® Dual-Band Wireless-AC 8265	
Model Name	8265NGW	
FCC / ISED ID	FCC ID: PD98265NG / IC ID: 1000M-8265NG	
Software Version	1.9.1-04155	
Driver Version	19.50.1.6	
Prototype / Production	Production	
Host Identification	Flex 6 – 14IKB series	
Exposure Conditions	Body worn	
Supported Radios	802.11b/g/n 802.11a/n/ac Bluetooth	2.4GHz (2400.0 – 2483.5 MHz) 5.2GHz (5150.0 – 5250.0 MHz) 5.3GHz (5250.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5825.0 MHz) 2.4GHz (2400.0 – 2483.5 MHz)
Antenna Information	Main WLAN: HongBo PIFA antenna. WiFi 2.4GHz & 5GHz (Chain A on DRTU) P/N: DC33001HV00 Aux WLAN: HongBo PIFA antenna. WiFi 2.4GHz & 5GHz and BT (Chain B on DRTU) P/N: DC33001HV10 See Annex F for more details on antennas location.	
Simultaneous Transmission Configurations	WLAN 2.4GHz Main + BT Aux WLAN 2.4GHz Main + WLAN 2.4GHz Aux WLAN 5GHz Main + BT Aux WLAN 5GHz Main + WLAN 5GHz Aux WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux	
Additional Information	No WWAN transmitter is considered in this report	
	5.60-5.65 GHz band (TDWR) is supported by the device	
	Band gap is supported by the device	

Supported Radios

Mode	Duty Cycle	Modulation	Band	UL Freq Range (MHz)	Measured Max. Conducted Power (dBm)
802.11b/g/n	100%	BPSK QPSK 16QAM 64QAM	2.4GHz	2400-2483.5	19.00
802.11a/n/ac	100%	BPSK QPSK 16QAM 64QAM 256QAM	5.2GHz	5150-5250	NM
			5.3GHz	5250-5350	13.50
			5.6GHz	5475-5725	13.50
			5.8GHz	5725-5850	13.50
BDR/EDR v4.2	78%	GFSK $\pi/4$ DQPSK 8DPSK	2.4GHz	2400-2483.5	11.50
Bluetooth LE v4.2	63%	GFSK	2.4GHz	2400-2483.5	7.00

NM: Not Measured

Maximum Output power specification + Tune up tolerance limit			SISO mode	
Equipment Class	Mode	BW (MHz)	Main (dBm)	Aux (dBm)
DTS	802.11b	20	19.00	19.00
	802.11g	20	19.00	19.00
	802.11n20	20	19.00	19.00
	802.11n40	40	19.00	19.00
U-NII-1	802.11a	20	13.50	13.50
	802.11n20	20	13.50	13.50
	802.11n40	40	13.50	13.50
	802.11ac80	80	13.50	13.50
U-NII-2A	802.11a	20	13.50	13.50
	802.11n20	20	13.50	13.50
	802.11n40	40	13.50	13.50
	802.11ac80	80	13.50	13.50
U-NII-2C	802.11a	20	13.50	13.50
	802.11n20	20	13.50	13.50
	802.11n40	40	13.50	13.50
	802.11ac80	80	13.50	13.50
U-NII-3	802.11a	20	13.50	13.50
	802.11n20	20	13.50	13.50
	802.11n40	40	13.50	13.50
	802.11ac80	80	13.50	13.50
BT	Bluetooth v4.2 BDR	1		11.50
	Bluetooth v4.2 EDR2	1		8.00
	Bluetooth v4.2 EDR3	1		7.00
	BLE	2		7.00

The conducted values are obtained by applying the BIOS SAR power values to the 8265NGW Intel module installed in the FLEX 6 14IKB model identified in this report, as requested by the customer.

6. Remarks and comments

- Only the plots for the test positions with the highest measured SAR per band/mode are included in Annex C as required per FCC OET KDB 865664 D02, paragraph 2.3.8.

7. Test Verdicts summary

Standard	Band	Highest Reported SAR (1g) (W/kg)	Verdict
802.11b/g/n	2.4GHz	0.97	P
802.11a/n/ac	5.2GHz	NM	NA
	5.3GHz	0.90	P
	5.6GHz	0.89	P
	5.8GHz	0.93	P
Bluetooth	2.4GHz	0.07	P

P: Pass
 F: Fail
 NM: Not Measured
 NA: Not Applicable

According to the FCC OET KDB 690783 D01, this is the summary of the values for the Grant Listing:

Exposure Condition	Highest Reported SAR (1g) (W/kg)		
	Equipment Class		
	DTS	DSS	U-NII
Body Worn	0.97	0.07	0.93
Simultaneous Tx	Sum-SAR: 1.46	Sum-SAR: 1.67 SPLSR: 0.02	Sum-SAR: 1.67 SPLSR: 0.02

Considering the results of the performed test according to FCC 47CFR Part 2.1093 and ISED RSS 102, Issue 5 the item under test is IN COMPLIANCE with the requested specifications specified in Section1. Standards, reference documents and applicable test methods

8. Document Revision History

Revision #	Date	Modified by	Revision Details
Rev. 00	2018-04-06	V. Kaculini	First Issue

Annex A. Test & System Description

A.1 SAR Definition

Specific Absorption rate is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) and incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \cdot \left(\frac{dW}{dm} \right) = \frac{d}{dt} \cdot \left(\frac{dW}{\rho \cdot dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

σ = Conductivity of the tissue (S/m)


ρ = Mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

A.2 SPEAG SAR Measurement System

A.2.1 SAR Measurement Setup

The DASY6 system for performing compliance tests consists of the following items:

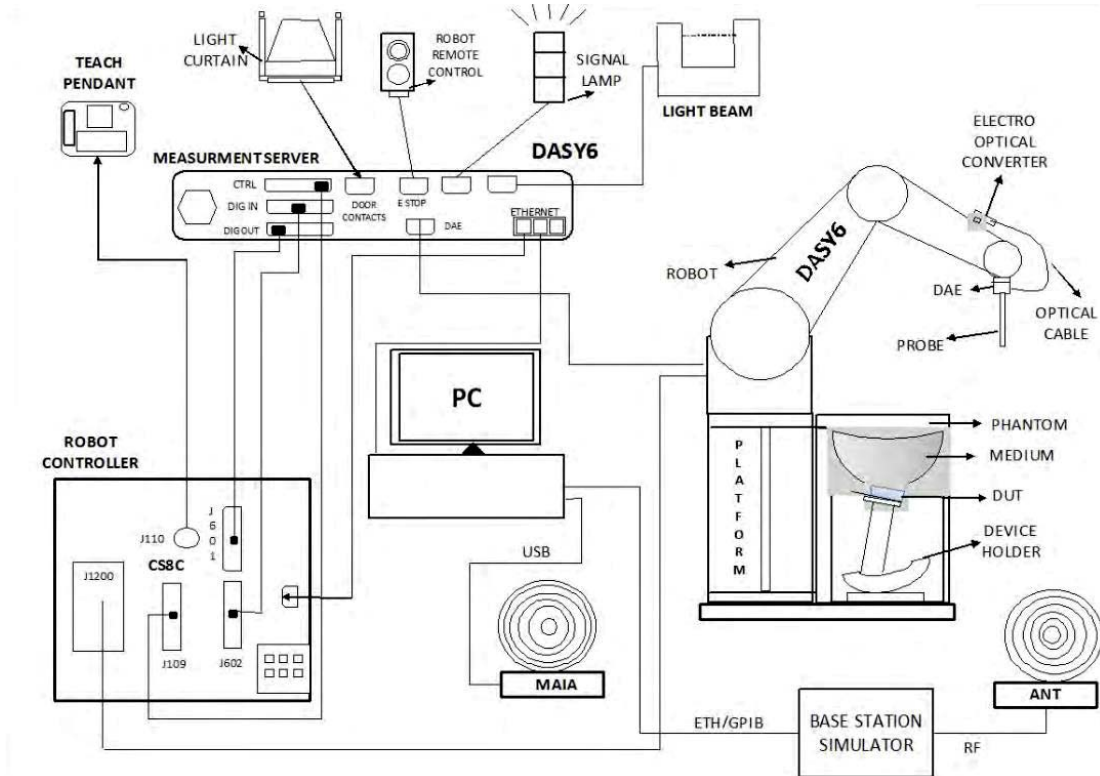

- ✓ A standard high precision 6-axis robot (Stäubli TX/RX family) with controller, teach pendant and software. It includes an arm extension for accommodating the data acquisition electronics (DAE)
- ✓ An isotropic field probe optimized and calibrated for the targeted measurements.
- ✓ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- ✓ The Electro-optical Converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- ✓ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movements interrupts.
- ✓ The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- ✓ A computer running Win7 professional operating system and the DASY6 software.
- ✓ Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- ✓ The phantom, the device holder and other accessories according to the targeted measurement.
- ✓ MAIA is a hardware interface (Antenna) used to evaluate the modulation and audio interference characteristics of RF signals.
- ✓ ANT is an ultra-wideband antenna for use with the base station simulators over 698 MHz to 6GHz.
- ✓ The base station simulator is an equipment used for SAR cellular tests in order to emulate the cellular signals characteristics and behavior between a regular base station and the equipment under test.
- ✓ Tissue simulating liquid.
- ✓ System Validation dipoles.
- ✓ Network emulator or RF test tool

A.2.2 E-Field Measurement Probe

The probe is constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probe has built-in shielding against static charges and is contained within a PEEK cylindrical enclosure material at the tip.



The probe's characteristics are:

Frequency Range	30MHz – 6GHz
Length	337 mm
Probe tip external diameter	2.5 mm
Typical distance between dipoles and the probe tip	1 mm
Axial Isotropy (in human-equivalent liquids)	±0.3 dB
Hemispherical Isotropy (in human-equivalent liquids)	±0.5 dB
Linearity	±0.2 dB
Maximum operating SAR	100 W/kg
Lower SAR detection threshold	0.001 W/kg

A.2.3 SAM Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm ± 0.2 mm
Shell thickness at ERP	6 ± 0.2 mm
Filling volume	25 Liters
Dimensions	Length: 1000mm / Width: 500mm




A.2.4 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

The phantom's characteristics are:

Material	Vinylester, glass fiber reinforced (VE-GF)
Shell thickness	2 mm \pm 0.2 mm
Filling volume	30 Liters approx.
Dimensions	Major axis: 600mm / Minor axis: 400mm

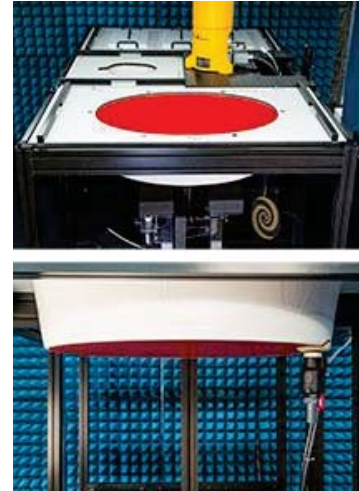

A.2.5 Device Positioner

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of 0.5 mm would produce a SAR uncertainty of 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and other Flat Phantoms.

A.3 Data Evaluation

- **Power Reference measurement**

The robot measures the E field in a specified reference position that can be either the selected section's grid reference point or a user point in this section at 4mm of the inner surface of the phantom, 2mm for frequencies above 3GHz.

- **Area Scan**

Measurement procedures for evaluating SAR from wireless handsets typically start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. The SAR distribution is scanned along the inside surface of one side of the phantom head, at least for an area larger than the projection of the handset and antenna. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (with variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient accuracy. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30° . If this angle is larger than 30° and the closest point on the probe-tip housing to the phantom surface is closer than a probe diameter, the boundary effect may become larger and polarization dependent. This additional uncertainty needs to be analyzed and accounted for. To achieve this, modified test procedures and additional uncertainty analyses not described in this recommended practice may be required. The measurement and interpolation point spacing should be chosen such as to allow identification of the local peak locations to within one-half of the linear dimension of a side of the zoom-scan volume. Because a local peak having specific amplitude and steep gradients may produce a lower peak spatial-average SAR compared to peaks with slightly lower amplitude and less steep gradients, it is necessary to evaluate these other peaks as well. However, since the spatial gradients of local SAR peaks are a function of the wavelength inside the tissue-equivalent liquid and the incident magnetic field strength, it is not necessary to evaluate local peaks that are less than 2 dB or more below the global maximum peak. Two-dimensional spline algorithms (Brishoual et al. 2001; Press et al., 1996) are typically used to determine the peaks and gradients within the scanned area. If a peak is found at a distance from the scan border of less than one-half the edge dimension of the desired 1 g or 10 g cube, the measurement area should be enlarged if possible.

- **Zoom Scan**

To evaluate the peak spatial-average SAR values for 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. The minimum zoom scan volume size should extend at least 1.5 times the edge dimension of a 1 g cube in all directions from the center of the scan volume, for both 1 g and 10 g peak spatial-average SAR evaluations. Along the phantom curved surfaces, the front face of the volume facing the tissue/liquid interface conforms to the curved boundary, to ensure that all SAR peaks are captured. The back face should be equally distorted to maintain the correct averaging mass. The flatness and orientation of the four side faces are unchanged from that of a cube whose orientation is within $\pm 30^\circ$ of the line normal to the phantom at the center of the cube face next to the phantom surface. The peak local SAR locations that were determined in the area scan (interpolated values) should be used for the centers of the zoom scans. If a scan volume cannot be centered due to proximity of a phantom shape feature, the probe should be tilted to allow scan volume enlargement. If probe tilt is not feasible, the zoom-scan origin may be shifted, but not by more than half of the 1 g or 10 g cube edge dimension.

After the zoom-scan measurement, extrapolations from the closest measured points to the surface, for example along lines parallel to the zoom-scan centerline, and interpolations to a finer resolution between all measured and extrapolated points are performed. Extrapolation algorithm considerations are described in 6.5.3, and 3-D spline methods (Brishoual et al., 2001; Kreyszig, 1983; Press et al., 1996) can be used for interpolation. The peak spatial-average SAR is finally determined by a numerical averaging of the local SAR values in the interpolation grid, using for example a trapezoidal algorithm for the integration (averaging).

In some areas of the phantom, such as the jaw and upper head regions, the angle of the probe with respect to the line normal to the surface may be relatively large, e.g., greater than $\pm 30^\circ$, which could increase the boundary effect error to a larger level. In these cases, during the zoom scan a change in the orientation of the probe, the phantom, or both is recommended but not required for the duration of the zoom scan, so that the angle between the probe axis and the line normal to the surface is within 30° for all measurement points.

- **Power Drift measurement**

The robot re-measures the E-Field in the same reference location measured at the Power Reference. The drift measurement gives the field difference in dB from the first to the last reference reading. This allows a user to monitor the power drift of the device under test that must remain within a maximum variation of $\pm 5\%$.

- **Post-processing**

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528 and IEC 62209-1/2 standards. It can be conducted for 1g and 10g.

The software allows evaluations that combine measured data and robot positions, such as:

- ✓ Maximum search
- ✓ Extrapolation
- ✓ Boundary correction
- ✓ Peak search for averaged SAR

Interpolation between the measured points is performed when the resolution of the grid is not fine enough to compute the average SAR over a given mass.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.


A.4 System and Liquid Check

A.4.1 System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results.

The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system check, the EUT is replaced by a calibrated dipole and the power source is replaced by a controlled continuous wave generated by a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the phantom at the correct distance.

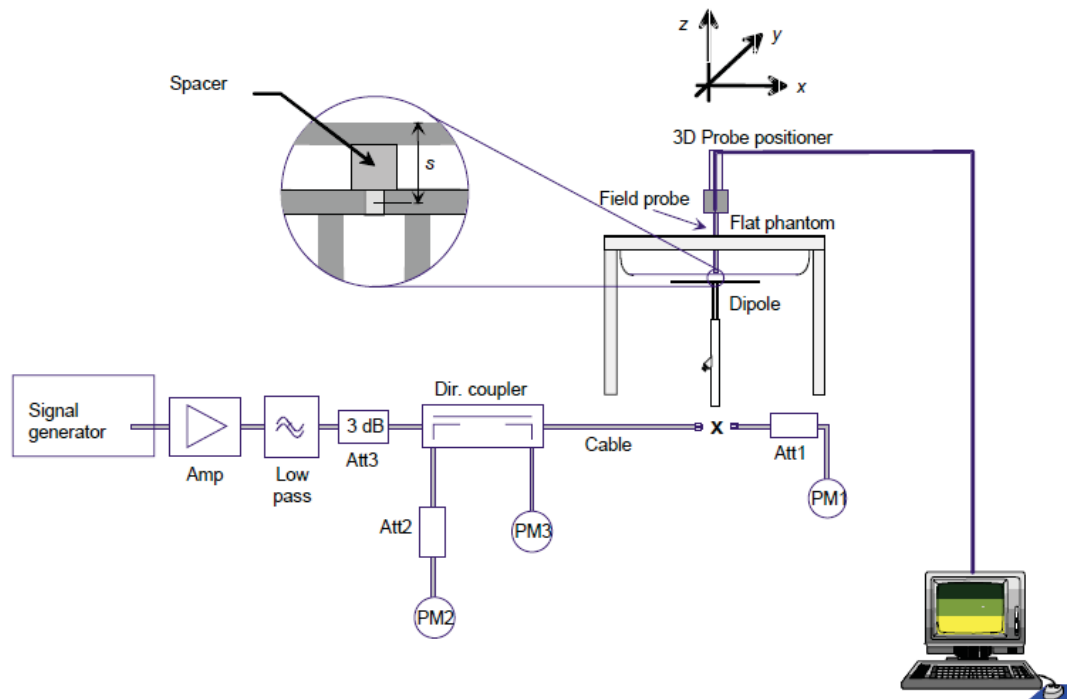

The equipment setup is shown below:

- ✓ Signal Generator
- ✓ Amplifier
- ✓ Directional coupler
- ✓ Power meter
- ✓ Calibrated dipole

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the connector (x) to the system check source. The signal generator is adjusted for the desired forward power at the connector as read by power meter PM1 after attenuation Att1 and also as coupled through Att2 to PM2. After connecting the cable to the source, the signal generator is readjusted for the same reading at power meter PM2.

SAR results are normalized to a forward power of 1W to compare the values with the calibration reports results as described at IEEE 1528 and IEC 62209 standards.

A.4.2 Liquid Check

The dielectric parameters check is done prior to the use of the tissue simulating liquid. The verification is made by comparing the relative permittivity and conductivity to the values recommended by the applicable standards.

The liquid verification was performed using the following test setup:

- ✓ VNA (Vector Network Analyzer)
- ✓ Open-Short-Load calibration kit
- ✓ RF Cable
- ✓ Open-Ended Coaxial probe
- ✓ DAK software tool
- ✓ SAR Liquid
- ✓ De-ionized water
- ✓ Thermometer

These are the target dielectric properties of the tissue-equivalent liquid material as defined in FCC OET KDB 865664 D01.

Frequency (MHz)	Body SAR	
	ϵ_r (F/m)	σ (S/m)
150	61.9	0.80
300	58.2	0.92
450	56.7	0.94
835	55.2	0.97
900	55.0	1.05
1450	54.0	1.30
1800-2000	53.3	1.52
2450	52.7	1.95
3000	52.0	2.73
5800	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

The measurement system implement a SAR error compensation algorithm as documented in IEEE Std 1528-2013 (equivalent to draft standard IEEE P1528-2011) to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters (applied to only scale up the measured SAR, and not downward) so, according to FCC OET KDB 865664 D01, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$.

A.5 Test Equipment List

A.5.1 SAR System #1

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0218	Laptop Holder	P/N SM LH1 001 CD	-	SPEAG	NA	NA
0221	SAM Phantom	Twin SAM v5.0	1838	SPEAG	NA	NA
0223	Measurement SW	DASY6 6.4.0.12171	9-618AE2F1	SPEAG	NA	NA
0229	Light Beam Unit	SE UKS 030 AA	-	Di-soric	NA	NA
0231	6-axis Robot	TX60 L	F12/5MZ3A1/A/01	STAÜBLI	NA	NA
0233	Robot Controller	CS8C	F12/5MZ3A1/C/01	STAÜBLI	NA	NA
0243	Electro-Optical Converter	EOC60	1076	SPEAG	NA	NA
0260	Dosimetric E-field Probe	EX3DV4	7325	SPEAG	2017-12-13	2018-12-13
0418	Data Acquisition Electronics	DAE4	1496	SPEAG	2017-12-07	2018-12-07
0637	Oval Flat Phantom	ELI v8.0	2059	SPEAG	NA	NA
0660	Measurement Server	DASY6 P/N SE UMS 028 BB	1548	SPEAG	NA	NA

A.5.2 Shared Instrumentation

ID #	Device	Type/Model	Serial Number	Manufacturer	Cal. Date	Cal. Due Date
0094	Thermometer	TESTO 922	33622932	Testo	2017-11-29	2019-11-29
0098	USB Power Sensor	NRP-Z81	102278	R&S	2017-09-18	2019-09-18
0099	USB Power Sensor	NRP-Z81	102279	R&S	2017-09-19	2019-09-19
0114	Vector Signal Generator	ESG E4438C	MY45092885	Agilent	NA	NA
0124	5GHz System Validation Dipole	D5GHZv2	1164	SPEAG	2017-05-15	2019-05-15
0170	Power Amplifier	SAM-01	151922	ETS-Lindgren	NA	NA
0224	Liquid measurement SW	DAK-3.5 V2.4.0.761	9-2687B491	SPEAG	NA	NA
0237	Dielectric Probe Kit	DAK-3.5	1037	SPEAG	2017-08-22	2019-08-22
0239	2450MHz System Validation Dipole	D2450V2	937	SPEAG	2016-06-20	2018-06-20
0412	Coupler	CD0.5-8-20-30	1251-002	Amd-group	NA	NA
0583	Temperature & Humidity Logger	RA12E-TH1-RAS	RA12-B9BD6E	AVTECH	2018-01-18	2020-01-18
0655	Vector Reflectometer	PLANAR R140	0190616	Copper Mountain Technologies	2017-09-19	2019-09-19

A.5.3 Tissue Simulant Liquid

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Body WideBand	SPEAG MBBL600-6000V6 Batch 160630-01	600-6000	Ethenediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxylated alcohol

A.6 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the below table:

SPEAG DASY6 Uncertainty Budget								
According to IEEE 1528-2013 and IEC 62209-1/2016 (0.3 - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) v _{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Modulation Response	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.04 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Probe Positioning	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Max. SAR Eval.	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Power Scaling	±0.0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.6 %	R	√3	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.9 %	±1.6 %	∞
Liquid Conductivity (mea.) DAK	±2.5 %	R	√3	0.78	0.71	±2.0 %	±1.8 %	∞
Liquid Permittivity (mea.) DAK	±2.5 %	R	√3	0.23	0.26	±0.6 %	±0.7 %	∞
Temp. unc. - Conductivity BB	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity BB	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.9 %	±11.8 %	569
Expanded STD Uncertainty						±23.8 %	±23.6 %	

SPEAG DASY6 Uncertainty Budget According to IEC 62209-2/2010 (30 MHz - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) v _{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
Modulation Response	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Boundary Effects	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.04 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Probe Positioning	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Post-processing	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Test sample Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Power Scaling	±0.0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	±7.6 %	R	√3	1	1	±4.4 %	±4.4 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.9 %	±1.6 %	∞
Liquid Conductivity (mea.)DAK	±2.5 %	R	√3	0.78	0.71	±2.0 %	±1.8 %	∞
Liquid Permittivity (mea.) DAK	±2.5 %	R	√3	0.23	0.26	±0.6 %	±0.7 %	∞
Temp. unc. - Conductivity BB	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity BB	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.1 %	±12.0 %	605
Expanded STD Uncertainty						±24.1 %	±24.0 %	

A.7 RF Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR Part §2.1093 and RSS 102, Issue 5 on the limitation of exposure of the general population / uncontrolled exposure for portable devices.

Exposure Type	General Population / Uncontrolled Environment
Peak spatial-average SAR (averaged over any 1 gram of tissue)	1.6 W/kg
Whole body average SAR	0.08 W/kg
Peak spatial-average SAR (extremities) (averaged over any 10 grams of tissue)	4.0 W/kg

Annex B. Test Results

B.1 Test Conditions

B.1.1 Test SAR Test positions relative to the phantom

The device under test was an Intel® Dual-Band Wireless-AC 8265 card inside a Convertible PC host platform (Flex 6 – 14IKB series) using a set of PIFA antennas. The card was operated utilizing proprietary software (DRTU version 1.9.1-04155) and each channel was measured using a broadband power meter to determine the maximum average power.

According to FCC OET KDB 616217 D04, laptop position should be tested for SAR compliance with the display screen opened at an angle of 90° to the keyboard compartment and the notebook bottom surface must be touching the phantom.

In tablet mode, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Test Exclusion Threshold in FCC OET KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

Considering the antenna location diagrams in Annex F and the test exclusions described before, the surfaces/edges to be measured for each antenna are:

Antenna	Main	Aux
Position	<ul style="list-style-type: none">• Bottom Edge• Back Face• Laptop	<ul style="list-style-type: none">• Bottom Edge• Back Face• Laptop

See *B.1.3.1* for a more detailed list of the applied reductions.

See *F.2 Test positions* section for more information on the tested positions

B.1.2 Test signal, Output power and Test Frequencies

For 802.11 transmission modes the device was put into operation by using an own control software to program the test mode required to select the continuous transmission with 100% duty cycle.

The output power of the device was set to transmit at maximum power for all tests.

B.1.3 Evaluation Exclusion and Test Reductions

B.1.3.1 SAR evaluation exclusion

The SAR Test Exclusion Threshold in FCC OET KDB 447498 D01 v06 can be applied to determine SAR test exclusion for adjacent edge configurations. For 100MHz to 6GHz and test separation distances ≤50mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following formula:

$$[(\text{max. power of channel, including tune – up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for } 1g \text{ SAR, and } \leq 7.5 \text{ for } 10g \text{ extremity SAR} \quad (1)$$

Where:

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

For test separation distances > 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined using the following formulas:

$$((\text{Power allowed at numeric threshold for } 50 \text{ mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f_{\text{MHz}}/150))\text{mW}, \quad (2)$$

for 100MHz to 1500MHz

$$((\text{Power allowed at numeric threshold for } 50 \text{ mm in (1)}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10)\text{mW}, \quad (3)$$

for 1500MHz and ≤ 6GHz

LAN Antenna	Band Name	Output power		Back Face	Top Edge	Right Edge	Left Edge	Bottom Edge	Laptop	Back Face	Top Edge	Right Edge	Left Edge	Bottom Edge	Laptop
		dBm	mW												
WLAN Main	DTS	19.0	79.4	<50	>50	>50	>50	<50	<50	T	R	R	R	T	T
	U-NII-1	13.5	22.4	<50	>50	>50	>50	<50	<50	R	R	R	R	R	R
	U-NII-2A	13.5	22.4	<50	>50	>50	>50	<50	<50	T	R	R	R	T	T
	U-NII-2C	13.5	22.4	<50	>50	>50	>50	<50	<50	T	R	R	R	T	T
	U-NII-3	13.5	22.4	<50	>50	>50	>50	<50	<50	T	R	R	R	T	T
WLAN Aux	DTS	19.0	79.4	<50	>50	>50	>50	<50	<50	T	R	R	R	T	T
	U-NII-1	13.5	22.4	<50	>50	>50	>50	<50	<50	R	R	R	R	R	R
	U-NII-2A	13.5	22.4	<50	>50	>50	>50	<50	<50	T	R	R	R	T	T
	U-NII-2C	13.5	22.4	<50	>50	>50	>50	<50	<50	T	R	R	R	T	T
	U-NII-3	13.5	22.4	<50	>50	>50	>50	<50	<50	T	R	R	R	T	T
	BT	11.5	14.1	<50	>50	>50	>50	<50	<50	T	R	R	R	T	T

T: Tested position
R: Reduced

See Annex F for a more detailed explanation of the separation distance related to the platform.

B.1.3.2 General SAR test reduction

According to FCC OET KDB 447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

WLAN SAR Test reduction

Transmission Mode	SAR test exclusion/reduction
DSSS	<p>According to FCC OET KDB 248227 D01, SAR is measured for 2.4 GHz 802.11b, SAR test reduction is determined according to the following:</p> <ul style="list-style-type: none"> ▪ When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. ▪ When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. <p>According to FCC OET KDB 248227 D01, SAR is not required for 2.4 GHz OFDM conditions when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.</p>
OFDM	<p>According to FCC OET KDB 248227 D01, 802.11a/g/n/ac modes have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.</p> <p>According to FCC OET KDB 248227 D01, an <i>initial test configuration</i> is determined for OFDM and DSSS transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. SAR test reduction for subsequent highest output test channels is determined according to reported SAR of the initial test configuration.</p> <p>The <i>initial test configuration</i> for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures.</p> <p>According to FCC OET KDB 248227 D01, when the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.</p>

B.2 Conducted Power Measurements

B.2.1 WLAN 2.4GHz

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main		Aux		SAR Test?
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
2.4GHz (DTS)	802.11b	1Mbps	1	2412	18.95	19.00	18.90	19.00	Yes
			6	2437	19.00	19.00	19.00		
			11	2462	18.90	19.00	18.95	19.00	No ³
	802.11g	6Mbps	1	2412	NR ¹	19.00	NR ¹	19.00	No ²
			6	2437		19.00		19.00	
			11	2462		19.00		19.00	
	802.11n20	HT0	1	2412		19.00		19.00	
			6	2437		19.00		19.00	
			11	2462		19.00		19.00	
	3		2422	19.00		19.00			
	802.11n40		6	2437		19.00		19.00	
			9	2452		19.00		19.00	

Initial test configuration

1. NR: Not Required
2. As per FCC OET KDB 248227 D01, conducted output power and SAR testing are not required for 802.11g/n20/n40 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2W/kg$.
3. When the reported SAR of the initial test configuration is $> 0.8 W/kg$, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2 W/kg$ or all required channels are tested.

B.2.2 WLAN 5GHz (U-NII)

B.2.2.1 5.2GHz and 5.3GHz (U-NII-1 and U-NII-2A)

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main		Aux		SAR Test?
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
5.2GHz (U-NII-1)	802.11a	6Mbps	36	5180	NR ^{1,2}	13.50	NR ^{1,2}	13.50	No ²
			40	5200					
			44	5220					
			48	5240					
	802.11n20	HT0	36	5180					
			40	5200					
			44	5220					
			48	5240					
	802.11n40		38	5190					
			46	5230					
	802.11ac80	VHT0	42	5210					

Initial test configuration

1. NR: Not Required
2. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band (see §B.5.2 in this document).
3. Additional conducted power measurement is required when reported SAR is > 1.2 W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
4. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, then ac)
5. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $=1.2$ W/kg or all required channels are tested.
6. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/Kg, SAR is not required for that subsequent test configuration
7. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/Kg or until all required channels are tested.

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main		Aux		SAR Test?			
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)				
5.3GHz (U-NII-2A)	802.11a	6Mbps	52	5260	NR ^{1,3}	13.50	NR ^{1,3}	13.50	No ^{2,5}			
			56	5280		13.50		13.50				
			60	5300		13.50		13.50				
			64	5320		13.50		13.50				
	802.11n20	HT0	52	5260		13.50		13.50				
			56	5280		13.50		13.50				
			60	5300		13.50		13.50				
			64	5320		13.50		13.50				
	802.11n40		54	5270		13.50		13.50				
			62	5310		13.50		13.50				
	802.11ac80	VHT0	58	5290		13.45		13.50		13.50	13.50	Yes

Initial test configuration

1. NR: Not Required
2. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, then ac)
3. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested.
4. When the reported SAR of the initial test configuration is > 0.8W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤1.2W/kg or all required channels are tested.
5. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤1.2 W/Kg, SAR is not required for that subsequent test configuration.
6. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/Kg or until all required channels are tested.

B.2.2.2 5.6 (U-NII-2C)

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main		Aux		SAR Test?
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)	
5.6GHz (U-NII-2C)	802.11a	6Mbps	100	5500	NR ^{1,3}	13.50	NR ^{1,3}	13.50	No ^{4,6}
			104	5520		13.50		13.50	
			108	5540		13.50		13.50	
			112	5560		13.50		13.50	
			116	5580		13.50		13.50	
			120	5600		13.50		13.50	
			124	5620		13.50		13.50	
			128	5640		13.50		13.50	
	802.11n20	HT0	100	5500		13.50		13.50	
			104	5520		13.50		13.50	
			108	5540		13.50		13.50	
			112	5560		13.50		13.50	
			116	5580		13.50		13.50	
			120	5600		13.50		13.50	
			124	5620		13.50		13.50	
			128	5640		13.50		13.50	
	802.11n40		102	5510		13.50		13.50	
			110	5550		13.50		13.50	
			118	5590		13.50		13.50	
			126	5630		13.50		13.50	
802.11ac80	VHT0	106	5530	13.40	13.50	13.50	13.50	Yes	
		122	5610	13.50	13.50	13.50	13.50		

Initial test configuration

1. NR: Not Required
2. When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
3. Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
4. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, then ac)
5. When the reported SAR of the initial test configuration is > 0.8W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤1.2W/kg or all required channels are tested.
6. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤1.2 W/Kg, SAR is not required for that subsequent test configuration.
7. SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/Kg or until all required channels are tested.

B.2.2.3 5.8GHz (U-NII-3)

Band	Mode	Data Rate	Ch #	Freq (MHz)	Main		Aux		SAR Test?			
					Avg Pwr (dBm)	Tune-up Pwr (dBm)	Avg Pwr (dBm)	Tune-up Pwr (dBm)				
5.6-5.8GHz (U-NII-3)	802.11a	6Mbps	132	5660	NR ^{1,3}	13.50	NR ^{1,3}	13.50	No ^{4,6}			
			136	5680		13.50						
			140	5700		13.50						
			149	5745		13.50						
			153	5765		13.50						
			157	5785		13.50						
			161	5805		13.50						
			165	5825		13.50						
	802.11n20	HT0	132	5660		13.50		13.50				
			136	5680		13.50		13.50				
			140	5700		13.50		13.50				
			149	5745		13.50		13.50				
			153	5765		13.50		13.50				
			157	5785		13.50		13.50				
			161	5805		13.50		13.50				
			165	5825		13.50		13.50				
	802.11n40	HT0	134	5670		13.50		13.50				
			142	5710		13.50		13.50				
			151	5755		13.50		13.50				
			159	5795		13.50		13.50				
	802.11ac80	VHT0	138	5690		13.45		13.50		13.40	13.50	Yes
			155	5775		13.40		13.50		13.50	13.50	

Initial test configuration

- NR: Not Required
- When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
- Additional conducted power measurement is required when reported SAR is > 1.2W/kg. In case the subsequent test configuration and the channel bandwidth is smaller than the initial test configuration, all channels that overlap with the larger channel bandwidth in the initial configuration should be tested
- The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, then ac)
- When the reported SAR of the initial test configuration is > 0.8W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤1.2W/kg or all required channels are tested.
- When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure requirements, is adjusted by the ratio of the subsequent test configuration to the initial test configuration specified maximum output power and the adjusted SAR is ≤1.2 W/Kg, SAR is not required for that subsequent test configuration.
- SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is >1.2 W/Kg or until all required channels are tested.

B.2.3 Bluetooth

Band	Mode	Data Rate	Channel	Frequency (MHz)	Antenna	Avg Pwr (dBm)	Tune-up Pwr (dBm)
2.4GHz	Bluetooth v4.2	Basic rate GFSK	0	2402	Aux	11.20	11.50
			39	2441		11.50	11.50
			78	2480		11.45	11.50
	Bluetooth v4.2	Basic rate $\pi/4$ DQPSK	0	2402		NR ¹	8.00
			39	2441			8.00
			78	2480			8.00
	Bluetooth v4.2	Basic rate 8-DPSK	0	2402			7.00
			39	2441			7.00
			78	2480			7.00
	Bluetooth v4.2	Low energy GFSK	0	2412			7.00
			20	2437			7.00
			39	2480			7.00

Initial test configuration

1. NR: Not Required

B.3 Tissue Parameters Measurement

Body TSL

Freq. (MHz)	Target Parameters		Measured TSL Parameters		Deviation (%)		Date
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)	ϵ'	σ	
2450	52.70	1.95	51.07	2.05	-3.10	5.09	2018-03-26
5300	48.88	5.41	46.40	5.67	-5.08	4.70	2018-03-26
5500	48.61	5.65	46.00	5.99	-5.37	6.08	2018-03-26
5600	48.47	5.76	45.79	6.17	-5.54	6.97	2018-03-26
5800	48.20	6.00	45.34	6.51	-5.94	8.53	2018-03-26

See *Annex D* for more details

B.4 System Check Measurements

Body Measurements

Frequency (MHz)	Average	Target SAR (W/Kg)	Measured SAR (W/Kg)	Deviation to target (%)	Limit (%)	Date
2450	1g	49.40	49.00	-0.81	±10	2018-03-26
	10g	23.40	22.60	-3.42		2018-03-26
5300	1g	74.30	71.60	-3.63		2018-03-26
	10g	20.90	20.80	-0.48		2018-03-27
5500	1g	78.90	82.60	4.69		2018-03-27
	10g	21.90	23.80	8.68		2018-03-27
5600	1g	78.60	78.20	-0.51		2018-03-27
	10g	22.10	23.40	5.88		2018-03-27
5800	1g	74.40	75.20	1.08		2018-03-27
	10g	20.70	22.40	8.21		

See *Annex C* for more details.

B.5 SAR Test Results

B.5.1 802.11b/g/n – 2.4GHz - DTS

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11b 1Mbps	20	1	2412	Bottom Edge	0.05	0.86	0.87	
					Bottom Edge	0.00	0.97	0.97	1
			6	2437	Back Face	0.00	0.20	0.20	
					Laptop	0.00	0.30	0.30	
Aux	802.11b 1Mbps	20	6	2437	Bottom Edge	0.00	0.49	0.49	2
					Back Face	0.00	0.15	0.15	
					Laptop	0.00	0.12	0.12	

B.5.2 802.11a/n/ac – 5.3 GHz – U-NII-2A

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11ac VHT0	80	58	5290	Bottom Edge	0.05	0.89	0.90	3
					Back Face	0.05	0.14	0.14	
					Laptop	0.05	0.14	0.14	
Aux	802.11ac VHT0	80	58	5290	Bottom Edge	0.00	0.47	0.47	4
					Back Face	0.00	0.07	0.07	
					Laptop	0.00	0.10	0.10	

B.5.3 802.11a/n/ac – 5.6 GHz – U-NII-2C

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11ac VHT0	80	106	5530	Bottom Edge	0.10	0.87	0.89	5
					Bottom Edge	0.00	0.87	0.87	
			122	5610	Back Face	0.00	0.14	0.14	
					Laptop	0.00	0.17	0.17	
Aux	802.11ac VHT0	80	122	5610	Bottom Edge	0.00	0.67	0.67	6
					Back Face	0.00	0.09	0.09	
					Laptop	0.00	0.10	0.10	

B.5.4 802.11a/n/ac – 5.8 GHz – U-NII-3

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Main	802.11ac VHT0	80	138	5690	Bottom Edge	0.05	0.85	0.86	
					Back Face	0.05	0.12	0.12	
					Laptop	0.05	0.18	0.18	
			155	5775	Bottom Edge	0.10	0.91	0.93	7
Aux	802.11ac VHT0	80	155	5775	Bottom Edge	0.00	0.60	0.60	8
					Back Face	0.00	0.07	0.07	
					Laptop	0.00	0.11	0.11	

B.5.5 Bluetooth – 2.4GHz - DSS

Ant.	Mode Data rate	BW (MHz)	Ch #	Freq (MHz)	Position	Correct. Factor (dB)	SAR 1g (W/kg)	Reported SAR 1g (W/kg)	Plot #
Aux	802.15 DH5	1	39	2441	Bottom Edge	0.00	0.07	0.07	9
					Back Face	0.00	0.02	0.02	
					Laptop	0.00	0.02	0.02	

B.5.6 SAR Measurement Variability

According to FCC OET KDB 865664, SAR Measurement variability is assessed when the maximum initial measured SAR is >0.8 W/kg for a certain band/mode. If the measured SAR value of the initial repeated measurement is <1.45 W/kg with $<20\%$ variation, only one repeated measurement is required to confirm that the results are not expected to have substantial variations.

A second repeated measurement is required only if the measured results for the initial repeated measurement are within 10% of the SAR limit or vary by more than 20%.

A third repeated measurement is required only if the original, first or second repeated measurement ≥ 1.5 W/Kg and the ratio of largest to smallest SAR for the original, first and second repeated measurement is > 1.2 .

Band / Mode	Position	Ch #	Freq. (MHz)	Measured SAR 1g (W/kg)	1 st Repeated SAR 1g (W/Kg)	2 nd Repeated SAR 1g (W/Kg)	Highest Ratio
2.4GHz 802.11b 1Mbps	Bottom Edge	6	2437	0.97	0.96		1.01
5.3GHz 802.11ac80 VHT0	Bottom Edge	58	5290	0.89	0.89		1.00
5.5GHz 802.11ac80 VHT0	Bottom Edge	106	5530	0.87	0.87		1.00
5.6GHz 802.11ac80 VHT0	Bottom Edge	122	5610	0.87	0.85		1.02
5.8GHz 802.11ac80 VHT0	Bottom Edge	155	5775	0.91	0.91		1.00

B.5.7 Simultaneous Transmission SAR Evaluation

According to FCC OET KDB 447498 D01, when the sum of 1g SAR for all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

All the values stated in the table below are the worst case found for standalone measurement with disregard of the transmission mode or channel where the worst case was found

Antenna	Position	Highest Reported SAR (1g) (W/Kg)		
		WLAN 2.4GHz	WLAN 5GHz	Bluetooth
Main	Bottom Edge	0.97	0.93	
	Back Face	0.20	0.14	
	Laptop	0.30	0.18	
Aux	Bottom Edge	0.49	0.67	0.07
	Back Face	0.15	0.09	0.02
	Laptop	0.12	0.11	0.02

Position	Simultaneous Tx Antenna Combination		Σ SAR 1g (W/Kg)	Limit (W/kg)
	Main Antenna	Aux Antenna		
Bottom Edge	WLAN 5GHz	WLAN 5GHz	1.60	1.6
	WLAN 5GHz	WLAN 5GHz + BT	1.67	
	WLAN 5GHz	BT	1.00	
	WLAN 2.4GHz	WLAN 2.4GHz	1.46	
	WLAN 2.4GHz	BT	1.04	
Back Face	WLAN 5GHz	WLAN 5GHz	0.23	
	WLAN 5GHz	WLAN 5GHz + BT	0.25	
	WLAN 5GHz	BT	0.16	
	WLAN 2.4GHz	WLAN 2.4GHz	0.35	
	WLAN 2.4GHz	BT	0.22	
Laptop	WLAN 5GHz	WLAN 5GHz	0.29	
	WLAN 5GHz	WLAN 5GHz + BT	0.31	
	WLAN 5GHz	BT	0.20	
	WLAN 2.4GHz	WLAN 2.4GHz	0.42	
	WLAN 2.4GHz	BT	0.32	

In case the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio:

Position	Antenna	Reported SAR 1g (W/kg)	Σ SAR 1g (W/kg)	Peak Location (mm) (x,y,z)	SAR to peak location separation ratio	Limit
Bottom Edge*	Main WLAN 5GHz	0.93	1.67	Max.1 at (1.0, -89.0, -177.4)	0.02	0.04
	Aux WLAN 5GHz	0.67		Max.2 at (0.0, 20.0, -177.6)		
	Aux BT	0.07		Max.3 at (1.2, 4.4, -177.7)		

* The worst case for simultaneous SAR to peak location separation ratio calculation was made considering the sum of 3 SAR results and the closest maxima distance between Main and Aux antenna (i.e. the closest distance between the peak location between Main WLAN to Aux WLAN and Main WLAN to Aux BT).

Considering the results described above and according to the simultaneous transmission evaluation exclusions described in FCC OET KDB 447498 D01, no enlarged zoom scan measurements are required

Annex C. Test System Plots

1. DTS - 802.11b, CH6, Main Antenna – Bottom Edge.....	37
2. DTS - 802.11b, CH6, Aux Antenna – Bottom Edge	38
3. U-NII-2A - 802.11ac80, CH58, Main Antenna – Bottom Edge	39
4. U-NII-2A - 802.11ac80, CH58, Aux Antenna – Bottom Edge	40
5. U-NII-2C - 802.11ac80, CH106, Main Antenna – Bottom Edge.....	41
6. U-NII-2C - 802.11ac80, CH122, Aux Antenna – Bottom Edge	42
7. U-NII-3 - 802.11ac80, CH155, Main Antenna – Bottom Edge	43
8. U-NII-3 - 802.11ac80, CH155, Aux Antenna – Bottom Edge	44
9. BT - 802.15, CH39, Aux Antenna – Bottom Edge.....	45
10. System Check Body Liquid 2450MHz	46
11. System Check Body Liquid 5300MHz	47
12. System Check Body Liquid 5500MHz	48
13. System Check Body Liquid 5600MHz	49
14. System Check Body Liquid 5800MHz	50

1. DTS - 802.11b, CH6, Main Antenna – Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WIFI MAC	DUT Type
FLEX 6-14IKB, LENOVO	230.0 x 330.0 x 15.0	F8:34:41:63:10:87	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid	EDGE BOTTOM, 0	WLAN 2.4GHz	WLAN, 10012-CAB	2437.0, 6	7.77	2.04	51.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	No
Grading Ratio	n/a	n/a
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-26, 11:44	2018-03-26, 11:50
SAR 1g [W/Kg]	1.05	0.972
SAR 10g [W/Kg]	0.469	0.430
Power Drift [dB]	-0.05	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

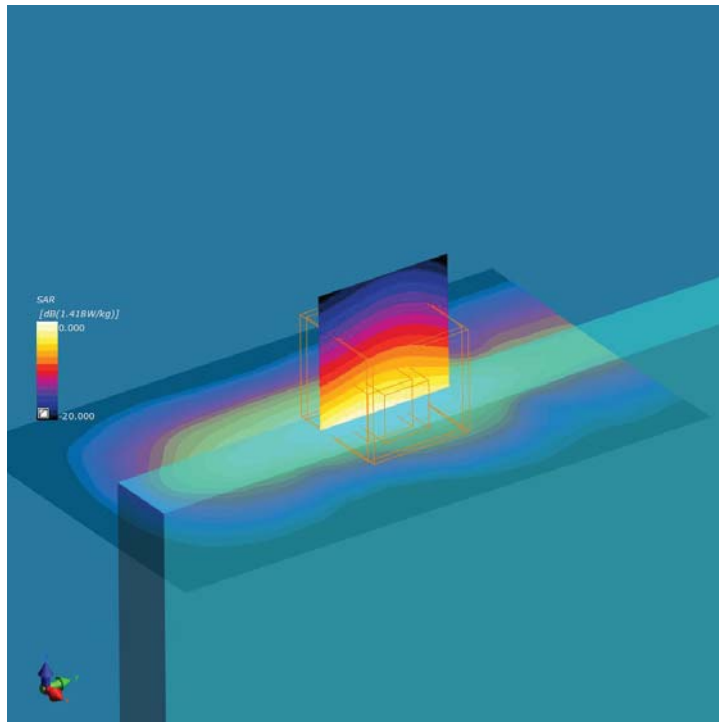

2. DTS - 802.11b, CH6, Aux Antenna – Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WIFI MAC	DUT Type
FLEX 6-14IKB, LENOVO	230.0 x 330.0 x 15.0	F8:34:41:63:10:87	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid	EDGE BOTTOM. 0	WLAN 2.4GHz	WLAN, 10012-CAB	2437.0, 6	7.77	2.04	51.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 168.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	No
Grading Ratio	n/a	n/a
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-26, 12:09	2018-03-26, 12:20
SAR 1g [W/Kg]	0.614	0.494
SAR 10g [W/Kg]	0.279	0.228
Power Drift [dB]	0.00	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

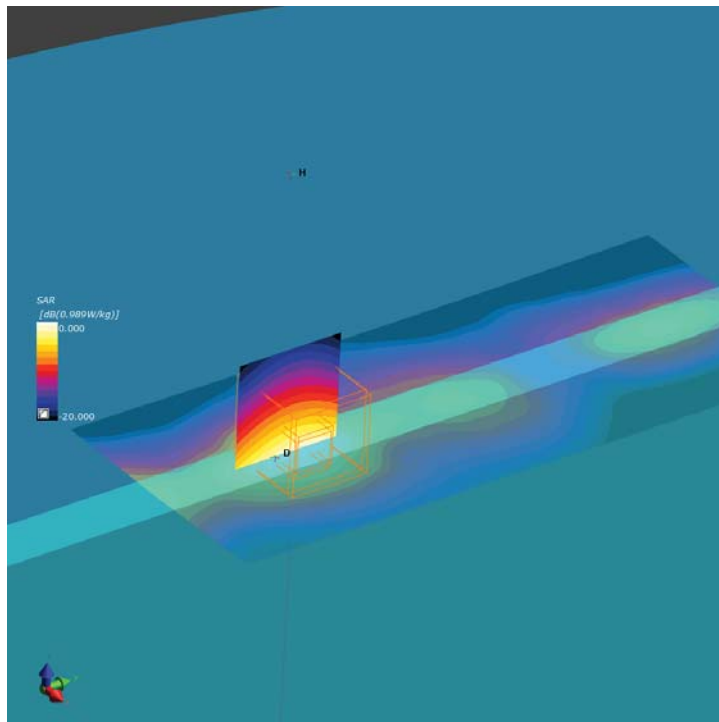

3. U-NII-2A - 802.11ac80, CH58, Main Antenna – Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WIFI MAC	DUT Type
FLEX 6-14IKB, LENOVO	230.0 x 330.0 x 15.0	F8:34:41:63:10:87	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid	EDGE BOTTOM, 0	WLAN 5GHz	WLAN, 10402-AAC	5290.0, 58	4.67	5.65	46.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-26, 14:44	2018-03-26, 14:50
SAR 1g [W/Kg]	1.08	0.891
SAR 10g [W/Kg]	0.330	0.274
Power Drift [dB]	-0.00	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

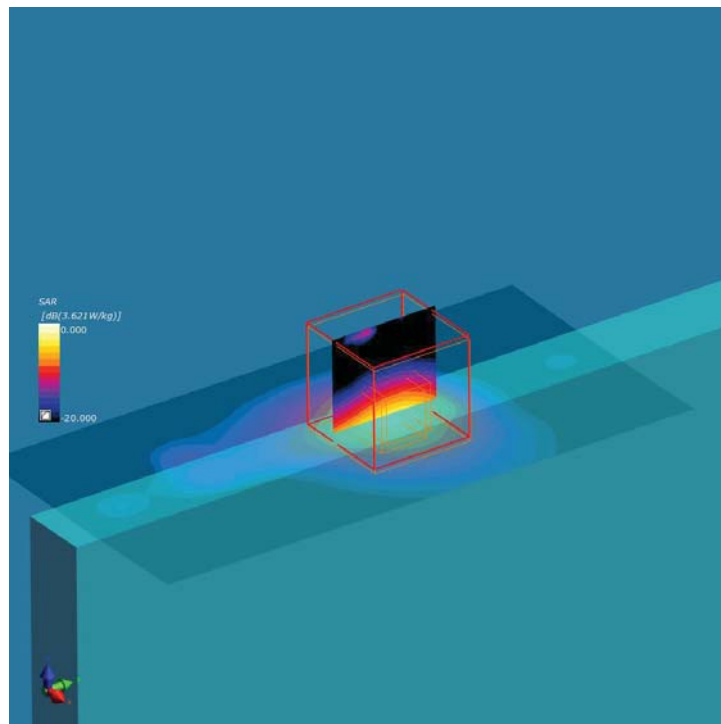

4. U-NII-2A - 802.11ac80, CH58, Aux Antenna – Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WIFI MAC	DUT Type
FLEX 6-14IKB, LENOVO	230.0 x 330.0 x 15.0	F8:34:41:63:10:87	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid	EDGE BOTTOM, 0	WLAN 5GHz	WLAN, 10402-AAC	5290.0, 58	4.67	5.65	46.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 160.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-26, 14:29	2018-03-26, 14:39
SAR 1g [W/Kg]	0.646	0.469
SAR 10g [W/Kg]	0.179	0.131
Power Drift [dB]	-0.04	0.04
Power Scaling	Disabled	Disabled
Scaling Factor		
TSL Correction	No correction	No correction

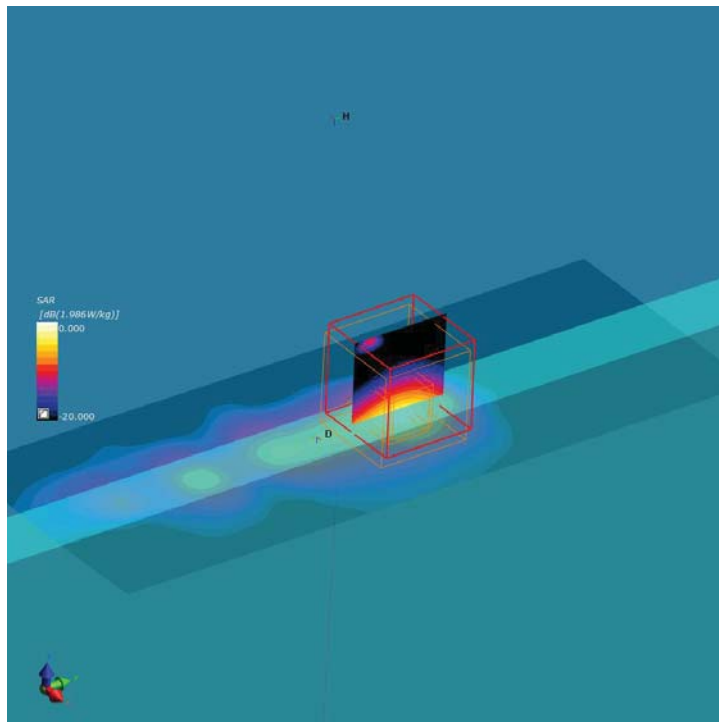

5. U-NII-2C - 802.11ac80, CH106, Main Antenna – Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WIFI MAC	DUT Type
FLEX 6-14IKB, LENOVO	230.0 x 330.0 x 15.0	F8:34:41:63:10:87	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid	EDGE BOTTOM, 0	WLAN 5GHz	WLAN, 10402-AAC	5530.0, 106	4.25	6.04	45.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-27, 11:50	2018-03-27, 11:56
SAR 1g [W/Kg]	1.04	0.874
SAR 10g [W/Kg]	0.331	0.267
Power Drift [dB]	0.02	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

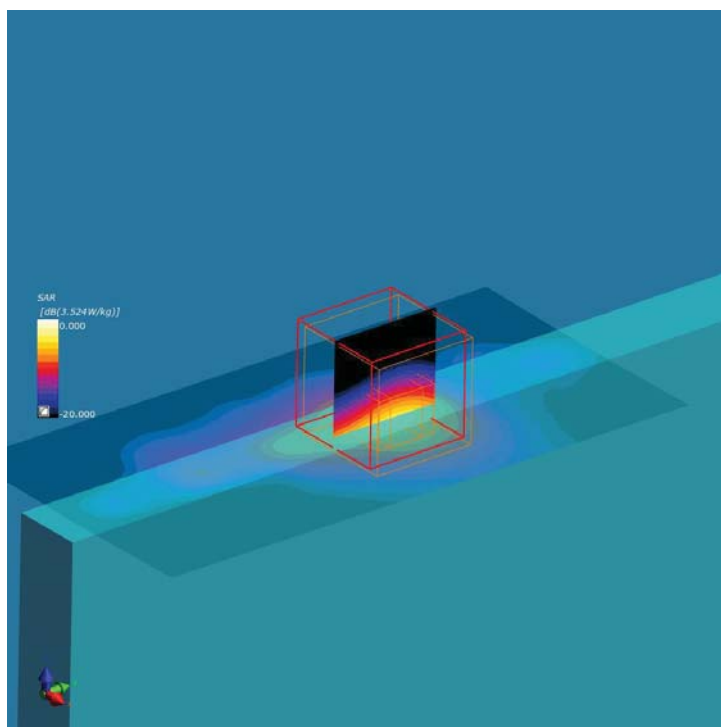

6. U-NII-2C - 802.11ac80, CH122, Aux Antenna – Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WIFI MAC	DUT Type
FLEX 6-14IKB, LENOVO	230.0 x 330.0 x 15.0	F8:34:41:63:10:87	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid	EDGE BOTTOM, 0	WLAN 5GHz	WLAN, 10402-AAC	5610.0, 122	4.06	6.18	45.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 140.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-27, 10:43	2018-03-27, 10:49
SAR 1g [W/Kg]	0.903	0.665
SAR 10g [W/Kg]	0.248	0.182
Power Drift [dB]	-0.04	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

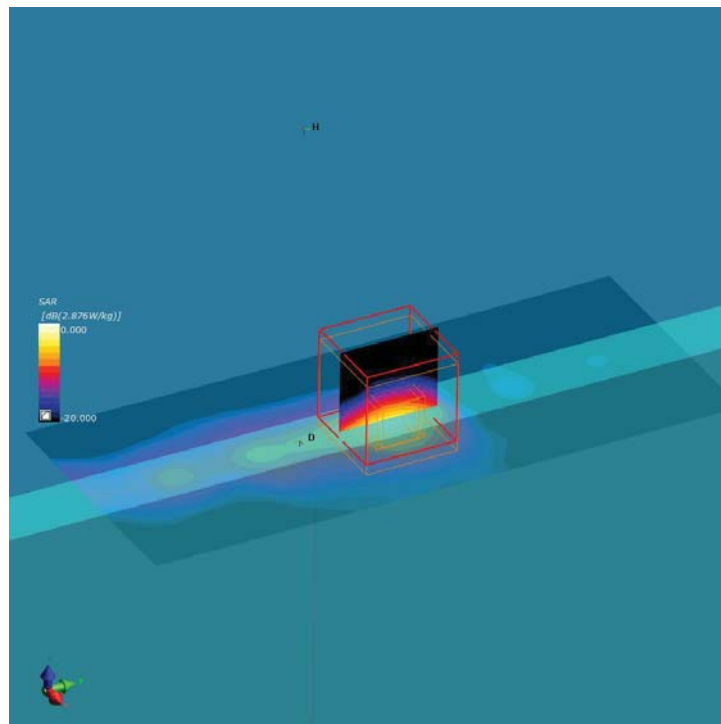

7. U-NII-3 - 802.11ac80, CH155, Main Antenna – Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WIFI MAC	DUT Type
FLEX 6-14IKB, LENOVO	230.0 x 330.0 x 15.0	F8:34:41:63:10:87	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid	EDGE BOTTOM, 0	WLAN 5GHz	WLAN, 10402-AAC	5775.0, 155	4.26	6.47	45.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-27, 11:41	2018-03-27, 11:47
SAR 1g [W/Kg]	1.05	0.911
SAR 10g [W/Kg]	0.326	0.263
Power Drift [dB]	0.05	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

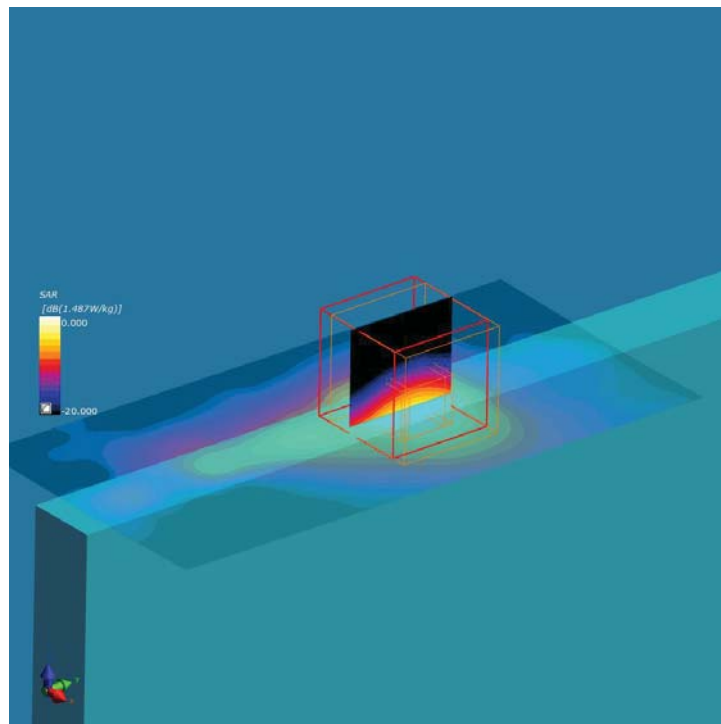

8. U-NII-3 - 802.11ac80, CH155, Aux Antenna – Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WIFI MAC	DUT Type
FLEX 6-14IKB, LENOVO	230.0 x 330.0 x 15.0	F8:34:41:63:10:87	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid	EDGE BOTTOM, 0	WLAN 5GHz	WLAN, 10402-AAC	5775.0, 155	4.26	6.47	45.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 120.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-27, 10:52	2018-03-27, 10:59
SAR 1g [W/Kg]	0.820	0.604
SAR 10g [W/Kg]	0.227	0.163
Power Drift [dB]	-0.04	-0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

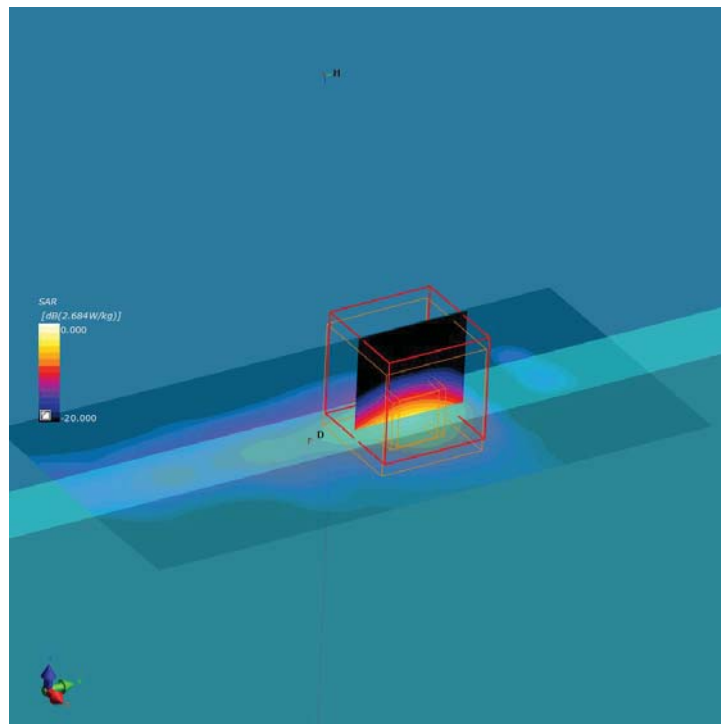

9. BT - 802.15, CH39, Aux Antenna – Bottom Edge

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	WIFI MAC	DUT Type
Flex 6-14IKB, Lenovo	230.0 x 330.0 x 15.0	F8:34:41:63:10:8B	Convertible PC

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid	EDGE BOTTOM, 0	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2441.0, 39	7.77	2.04	51.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 168.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	No
Grading Ratio	n/a	n/a
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-26, 12:34	2018-03-26, 12:45
SAR 1g [W/Kg]	0.083	0.067
SAR 10g [W/Kg]	0.038	0.031
Power Drift [dB]	-0.12	-0.14
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

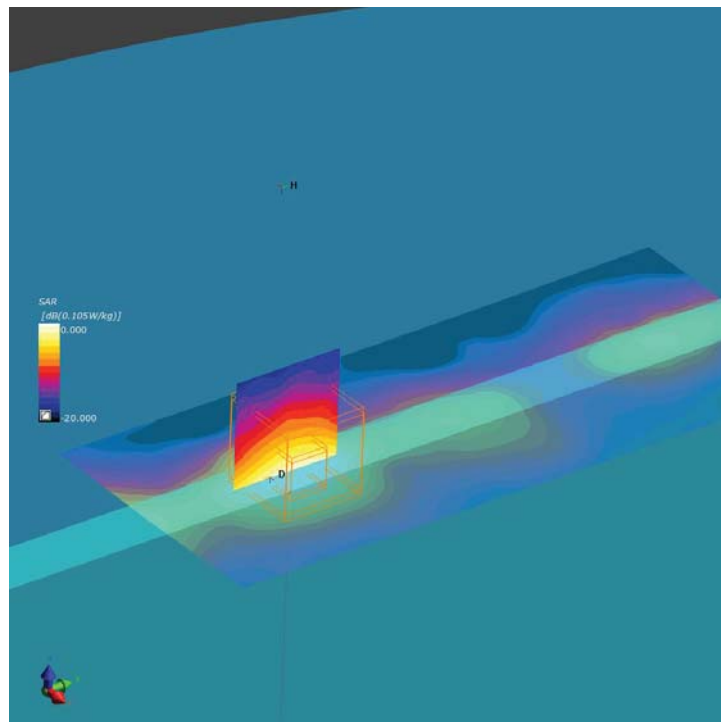

10. System Check Body Liquid 2450MHz

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
2.45 GHz Dipole, SPEAG	50.0 x 10.0 x 24.0	0937	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid				2450.0, 0	7.77	2.05	51.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	No
Grading Ratio	n/a	n/a
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-26, 17:21	2018-03-26, 17:28
SAR 1g [W/Kg]	2.62	2.45
SAR 10g [W/Kg]	1.18	1.13
Power Drift [dB]	-0.01	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

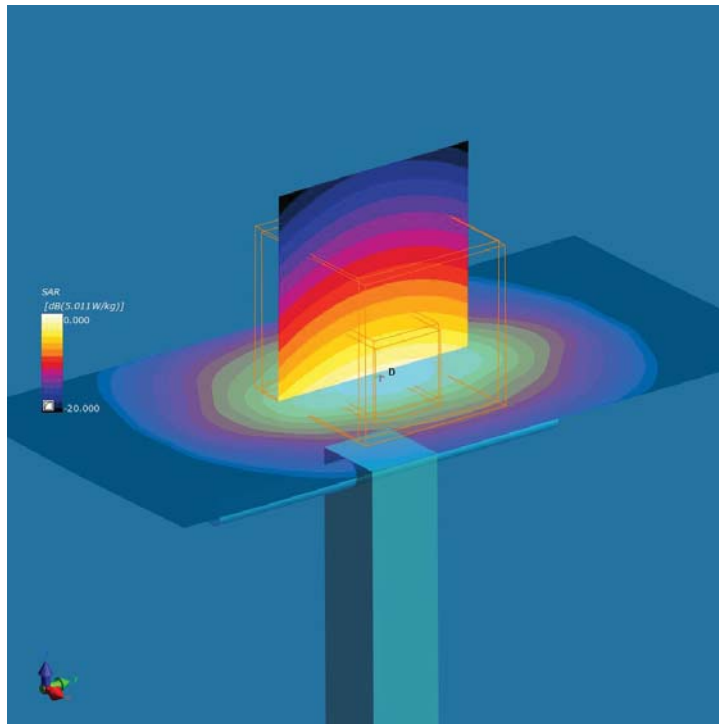

11. System Check Body Liquid 5300MHz

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
5GHz Dipole, SPEAG	50.0 x 10.0 x 23.0	1164	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid				5300.0, 0	4.67	5.67	46.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-26, 17:33	2018-03-26, 17:39
SAR 1g [W/Kg]	4.07	3.58
SAR 10g [W/Kg]	1.17	1.04
Power Drift [dB]	-0.02	0.02
Power Scaling	Disabled	Disabled
Scaling Factor		
[dB]		
TSL Correction	No correction	No correction

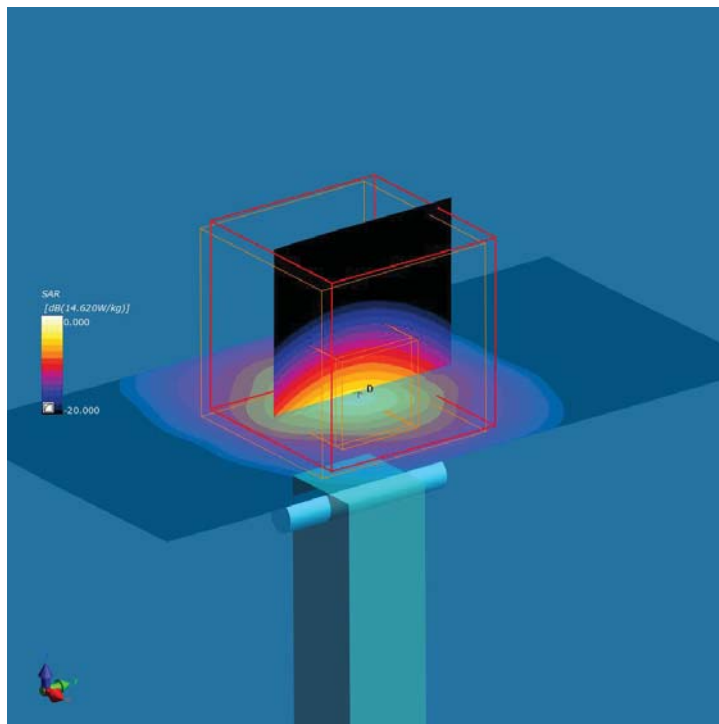

12. System Check Body Liquid 5500MHz

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
5GHz Dipole, SPEAG	50.0 x 10.0 x 23.0	1164	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid				5500.0, 0	4.25	5.99	46.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-27, 16:09	2018-03-27, 16:15
SAR 1g [W/Kg]	4.52	4.13
SAR 10g [W/Kg]	1.29	1.19
Power Drift [dB]	0.01	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

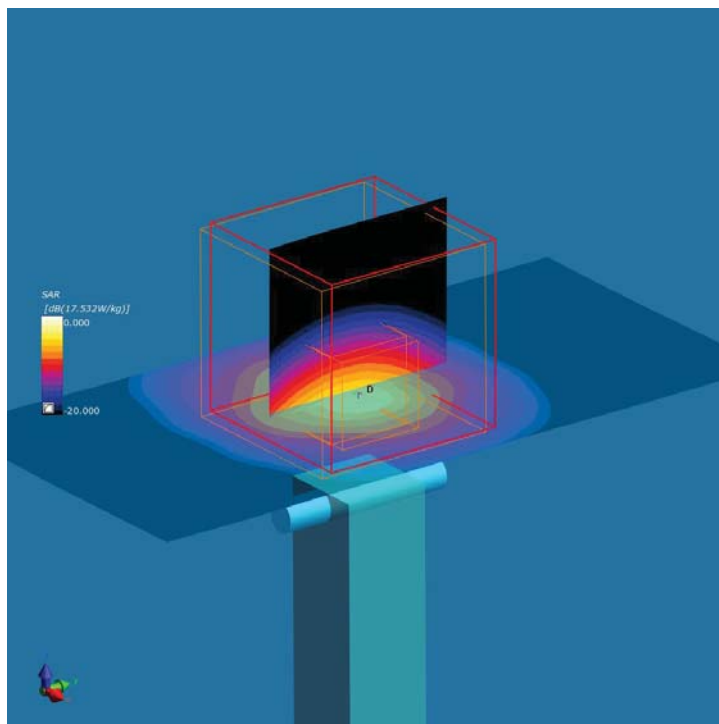

13. System Check Body Liquid 5600MHz

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
5GHz Dipole, SPEAG	50.0 x 10.0 x 23.0	1164	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid				5600.0, 0	4.06	6.17	45.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2018-03-27, 16:56	2018-03-27, 17:02
SAR 1g [W/Kg]	4.37	3.91
SAR 10g [W/Kg]	1.28	1.17
Power Drift [dB]	0.02	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

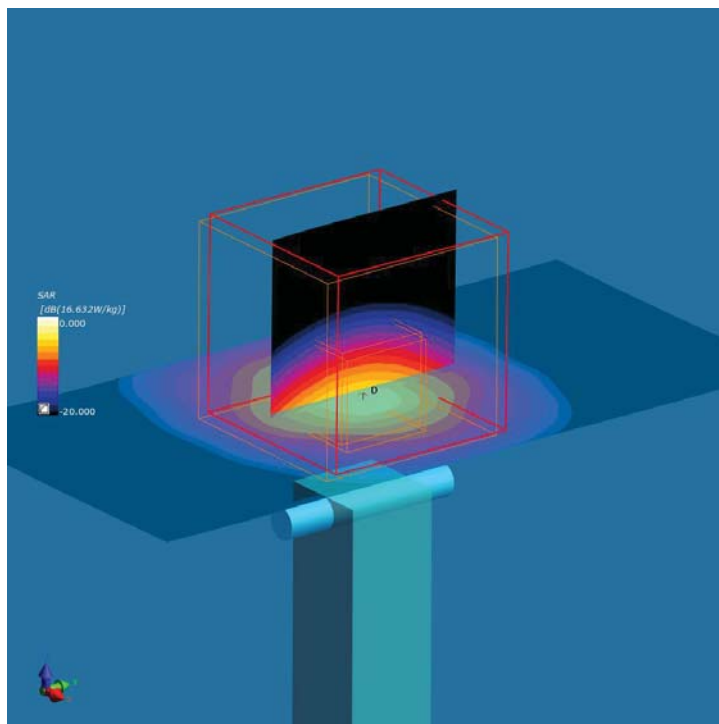

14. System Check Body Liquid 5800MHz

Device under Test Properties

Name, Manufacturer	Dimensions [mm]	S/N	DUT Type
5GHz Dipole, SPEAG	50.0 x 10.0 x 23.0	1164	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, MuscleSimulating Liquid				5800.0, 0	4.26	6.51	45.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2059	MBBL-600-6000v5, 2018-Mar-26	EX3DV4 - SN7325, 2017-12-13	DAE4 Sn1496, 2017-12-07

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	n/a	1.4
MAIA	Confirmed by MAIA	Confirmed by MAIA
Surface Detection	Yes	Yes
Scan Method	Measured	Measured

Measurement Results


	Area Scan	Zoom Scan
Date	2018-03-27, 17:15	2018-03-27, 17:21
SAR 1g [W/Kg]	4.22	3.76
SAR 10g [W/Kg]	1.22	1.12
Power Drift [dB]	-0.02	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction

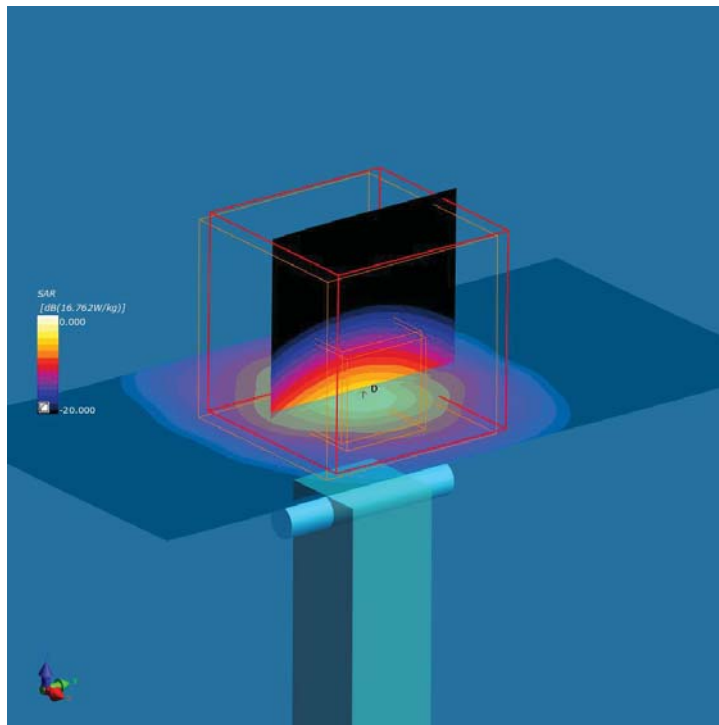

Annex D. TSL Dielectric Parameters

D.1 Body 2450MHz


		2018-03-26		
Freq. (MHz)	Target		Measured	
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)
2400	52.77	1.90	51.14	2.00
2410	52.75	1.91	51.13	2.01
2420	52.74	1.92	51.11	2.02
2430	52.73	1.93	51.10	2.03
2440	52.71	1.94	51.08	2.04
2450	52.70	1.95	51.07	2.05
2460	52.69	1.96	51.05	2.06
2470	52.67	1.98	51.04	2.07
2480	52.66	1.99	51.02	2.08
2490	52.65	2.01	51.01	2.08
2500	52.64	2.02	50.99	2.09

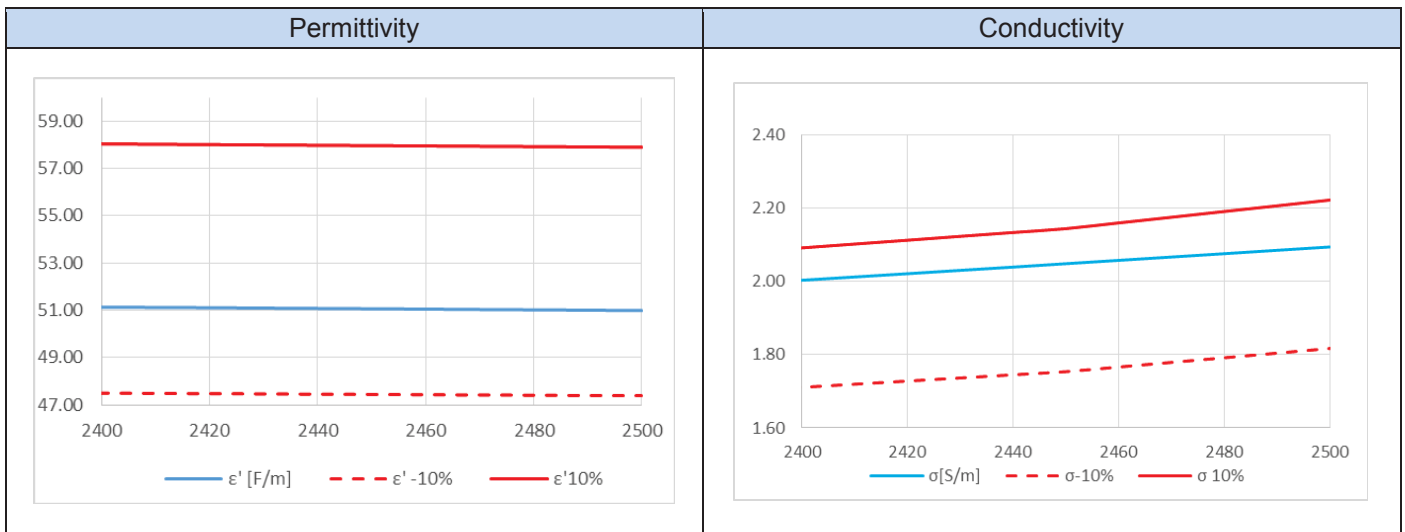


D.2 Body 5200MHz-5800MHz

Freq. (MHz)	Target		2018-03-26 Measured	
	ϵ' (F/m)	σ (S/m)	ϵ' (F/m)	σ (S/m)
	5180	49.04	5.27	46.60
5190	49.03	5.29	46.58	5.49
5200	49.01	5.30	46.56	5.51
5210	49.00	5.31	46.54	5.52
5220	48.99	5.32	46.52	5.54
5230	48.97	5.33	46.51	5.56
5240	48.96	5.34	46.49	5.57
5250	48.95	5.36	46.48	5.59
5260	48.93	5.37	46.46	5.60
5270	48.92	5.38	46.45	5.62
5280	48.91	5.39	46.43	5.64
5290	48.89	5.40	46.41	5.65
5300	48.88	5.41	46.40	5.67
5310	48.87	5.43	46.38	5.68
5320	48.85	5.44	46.36	5.70
5330	48.84	5.45	46.34	5.72
5340	48.82	5.46	46.32	5.73
5350	48.81	5.47	46.31	5.75
5360	48.80	5.48	46.29	5.76
5370	48.78	5.50	46.27	5.77
5380	48.77	5.51	46.25	5.79
5390	48.76	5.52	46.22	5.81
5400	48.74	5.53	46.21	5.82
5500	48.61	5.65	46.00	5.99
5510	48.59	5.66	45.97	6.01
5520	48.58	5.67	45.95	6.03
5530	48.57	5.68	45.93	6.04
5540	48.55	5.69	45.91	6.06
5550	48.54	5.71	45.89	6.07
5560	48.53	5.72	45.87	6.09
5570	48.51	5.73	45.85	6.11
5580	48.50	5.74	45.83	6.13
5590	48.49	5.75	45.81	6.15
5600	48.47	5.76	45.79	6.17
5610	48.46	5.78	45.77	6.18
5620	48.44	5.79	45.75	6.20
5630	48.43	5.80	45.73	6.21
5640	48.42	5.81	45.71	6.23
5650	48.40	5.82	45.69	6.25
5660	48.39	5.83	45.66	6.27
5670	48.38	5.85	45.63	6.28
5680	48.36	5.86	45.61	6.30
5690	48.35	5.87	45.59	6.32
5700	48.34	5.88	45.57	6.34
5710	48.32	5.88	45.55	6.36
5720	48.31	5.89	45.53	6.37
5730	48.30	5.91	45.50	6.39
5740	48.28	5.92	45.48	6.41
5750	48.27	5.93	45.45	6.43
5760	48.25	5.94	45.43	6.44
5770	48.24	5.95	45.40	6.46
5780	48.23	5.96	45.38	6.48
5790	48.21	5.98	45.36	6.49
5800	48.20	5.99	45.34	6.51
5810	48.19	6.00	45.31	6.53
5820	48.17	6.01	45.29	6.54
5830	48.16	6.02	45.27	6.56
5840	48.15	6.03	45.25	6.57
5850	48.13	6.05	45.23	6.59
5860	48.12	6.06	45.20	6.61
5870	48.10	6.07	45.18	6.62
5880	48.09	6.08	45.15	6.64
5890	48.08	6.09	45.13	6.66
5900	48.06	6.10	45.11	6.68

Permittivity

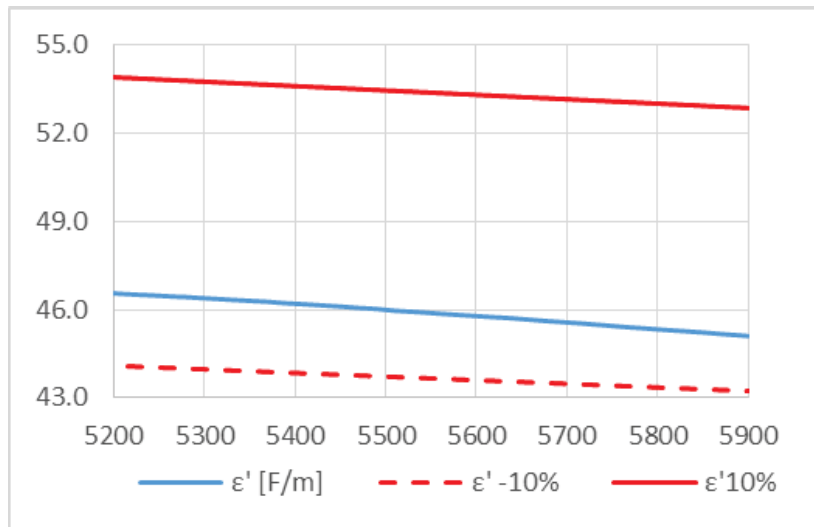

Conductivity

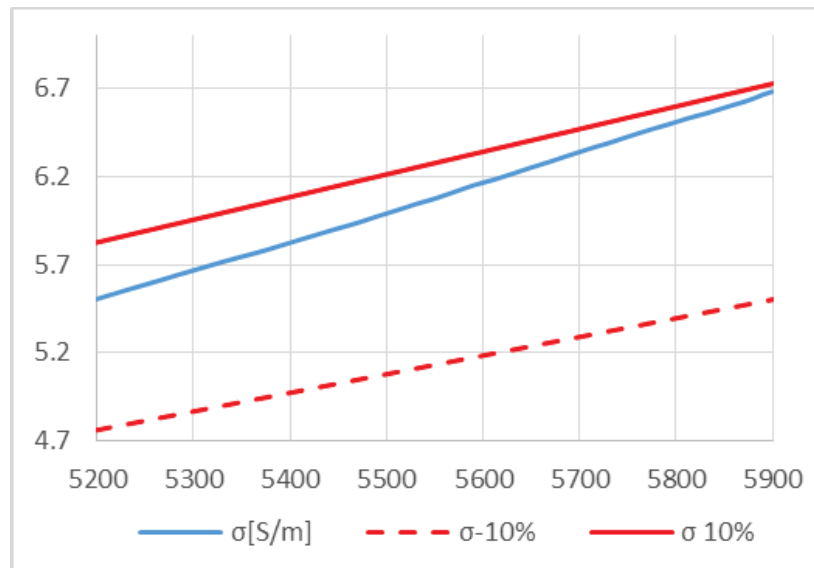

Annex E. Calibration Certificates

ID	Device	Type/Model	Serial Number	Manufacturer	Calibration Certificate
0260	Dosimetric E-field Probe	EX3DV4	7325	SPEAG	See attached
0239	2450MHz System Validation Dipole	D2450V2	937	SPEAG	See attached
0124	5GHz System Validation Dipole	D5GHzV2	1164	SPEAG	See attached

Dipole calibration

According to the KDB 865664 D01, a dipole must be calibrated using a fully validated SAR system according to the tissue dielectric parameters and SAR probe calibration frequency required for device testing. However, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements.

1. When the most recent return-loss result, measured at least annually, deviates by more than 20% from the previous measurement (i.e. value in dB \times 0.2) or not meeting the required 20 dB minimum return-loss requirement.
2. When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Intel France**

Certificate No: **D5GHzV2-1164_May17**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1164**

Calibration procedure(s) **QA CAL-22.v2
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **May 15, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 3503	31-Dec-16 (No. EX3-3503_Dec16)	Dec-17
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by:	Name Johannes Kurikka	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: May 15, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Intel France**

Certificate No: **D2450V2-937_Jun16**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:937**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **June 20, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Michael Weber** Name: Michael Weber Function: Laboratory Technician

Signature

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Issued: June 22, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Intel France**

Certificate No: **EX3-7325_Dec17**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:7325**

Calibration procedure(s): **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **December 13, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	31-Dec-16 (No. ES3-3013_Dec16)	Dec-17
DAE4	SN: 654	24-Jul-17 (No. DAE4-654_Jul17)	Jul-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Leif Klysner	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Technical Manager	

Issued: December 13, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:7325

Manufactured:	April 28, 2014
Repaired:	December 6, 2017
Calibrated:	December 13, 2017

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7325

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.47	0.54	0.45	$\pm 10.1\%$
DCP (mV) ^B	103.5	100.9	102.8	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	133.3	$\pm 2.5\%$
		Y	0.0	0.0	1.0		129.0	
		Z	0.0	0.0	1.0		133.0	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V ⁻¹	T1 ms.V ⁻²	T2 ms.V ⁻¹	T3 ms	T4 V ⁻²	T5 V ⁻¹	T6
X	36.87	276.3	35.79	13.76	0.912	5.050	0.205	0.499	1.006
Y	49.20	364.9	35.24	25.95	1.081	5.100	0.950	0.465	1.008
Z	38.50	289.1	35.90	14.97	0.970	5.069	0.295	0.479	1.007

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7325

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.23	10.23	10.23	0.35	1.02	± 12.0 %
835	41.5	0.90	9.72	9.72	9.72	0.47	0.80	± 12.0 %
900	41.5	0.97	9.60	9.60	9.60	0.44	0.84	± 12.0 %
1750	40.1	1.37	8.62	8.62	8.62	0.41	0.80	± 12.0 %
1900	40.0	1.40	8.29	8.29	8.29	0.30	0.85	± 12.0 %
2000	40.0	1.40	8.15	8.15	8.15	0.37	0.80	± 12.0 %
2300	39.5	1.67	7.67	7.67	7.67	0.29	0.85	± 12.0 %
2450	39.2	1.80	7.40	7.40	7.40	0.38	0.85	± 12.0 %
2600	39.0	1.96	7.21	7.21	7.21	0.37	0.89	± 12.0 %
5200	36.0	4.66	5.31	5.31	5.31	0.35	1.80	± 14.0 %
5300	35.9	4.76	5.19	5.19	5.19	0.35	1.80	± 14.0 %
5500	35.6	4.96	4.82	4.82	4.82	0.40	1.80	± 14.0 %
5600	35.5	5.07	4.71	4.71	4.71	0.40	1.80	± 14.0 %
5800	35.3	5.27	4.78	4.78	4.78	0.40	1.80	± 14.0 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies up to 6 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7325

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	10.18	10.18	10.18	0.43	0.88	± 12.0 %
835	55.2	0.97	9.86	9.86	9.86	0.45	0.82	± 12.0 %
900	55.0	1.05	9.79	9.79	9.79	0.43	0.87	± 12.0 %
1750	53.4	1.49	8.23	8.23	8.23	0.42	0.80	± 12.0 %
1900	53.3	1.52	7.95	7.95	7.95	0.43	0.82	± 12.0 %
2000	53.3	1.52	8.17	8.17	8.17	0.36	0.86	± 12.0 %
2300	52.9	1.81	7.89	7.89	7.89	0.37	0.86	± 12.0 %
2450	52.7	1.95	7.77	7.77	7.77	0.39	0.87	± 12.0 %
2600	52.5	2.16	7.40	7.40	7.40	0.32	1.02	± 12.0 %
5200	49.0	5.30	4.84	4.84	4.84	0.35	1.90	± 14.0 %
5300	48.9	5.42	4.67	4.67	4.67	0.35	1.90	± 14.0 %
5500	48.6	5.65	4.25	4.25	4.25	0.40	1.90	± 14.0 %
5600	48.5	5.77	4.06	4.06	4.06	0.40	1.90	± 14.0 %
5800	48.2	6.00	4.26	4.26	4.26	0.40	1.90	± 14.0 %


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies up to 6 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

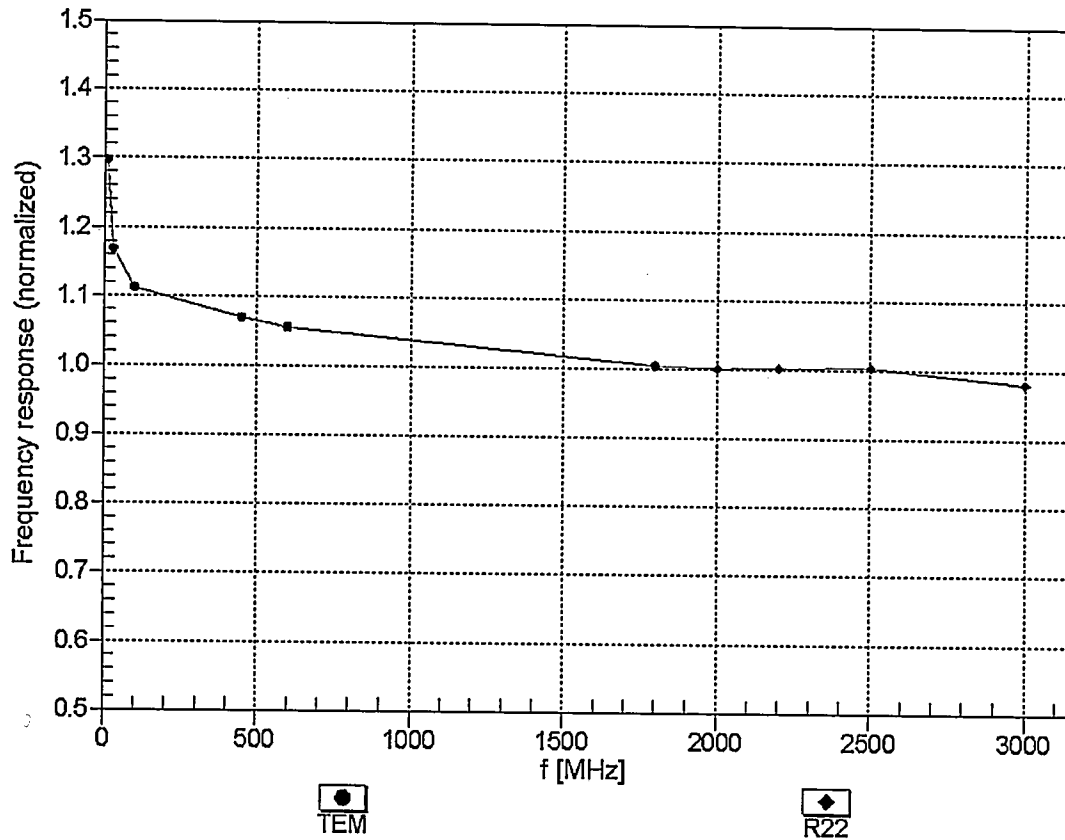



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM


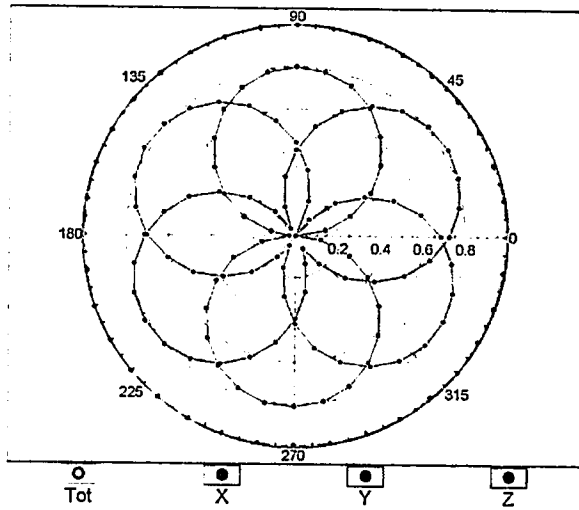


f=1800 MHz, R22

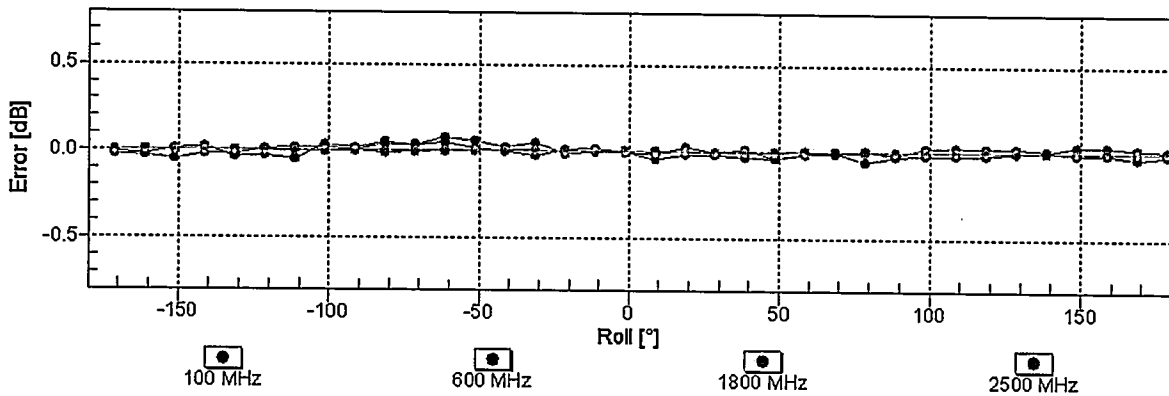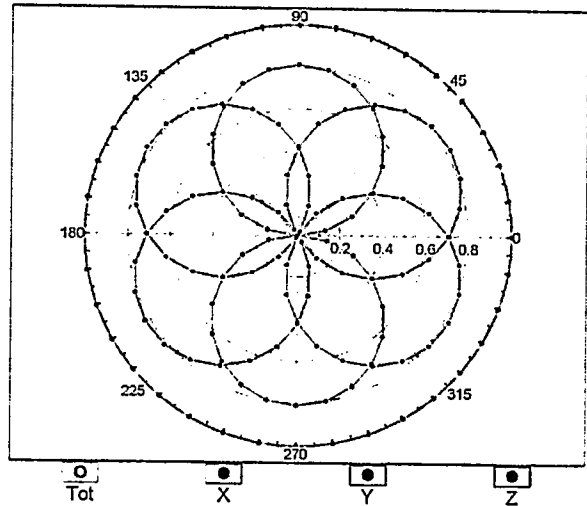

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)


Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$)

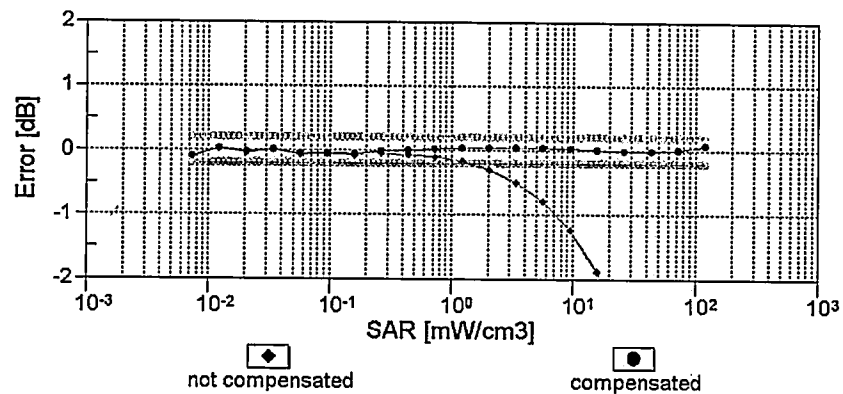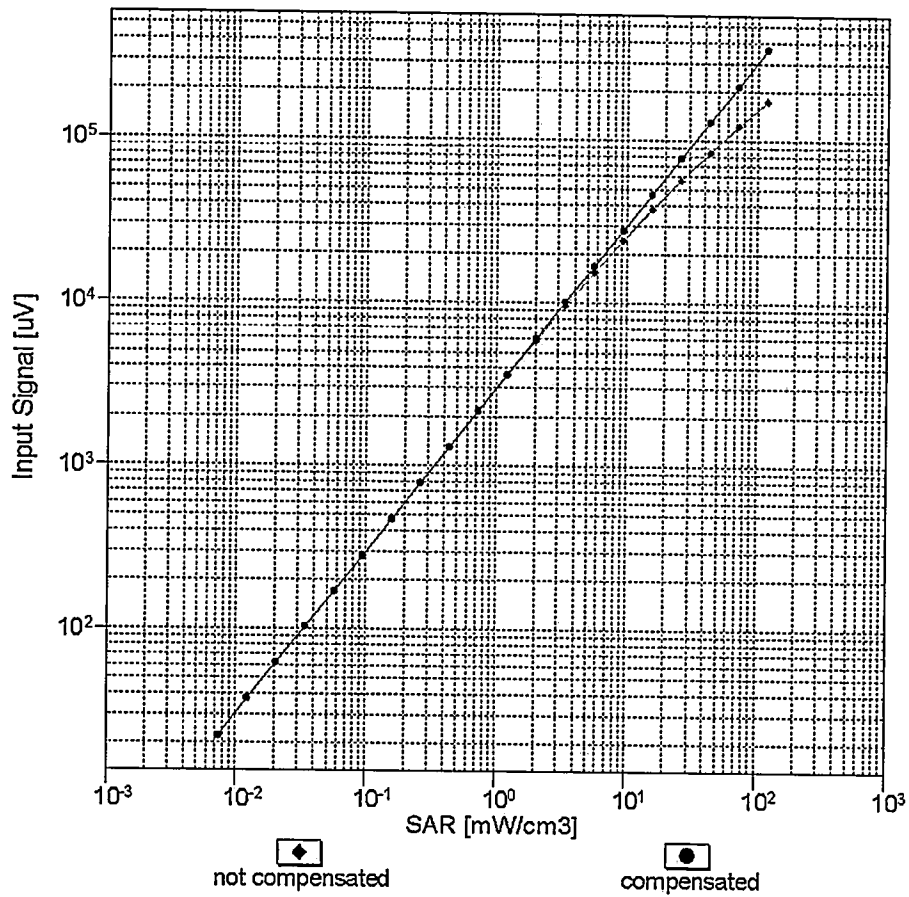


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

f = 900 MHz, WGLS R9 (H_convF)


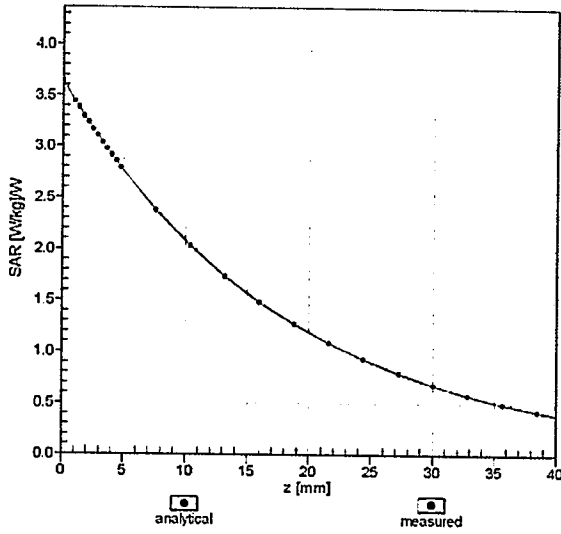


f = 1750 MHz, WGLS R22 (H_convF)

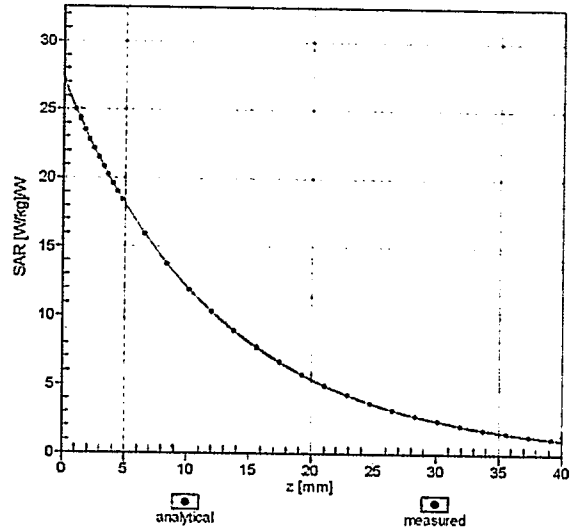

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

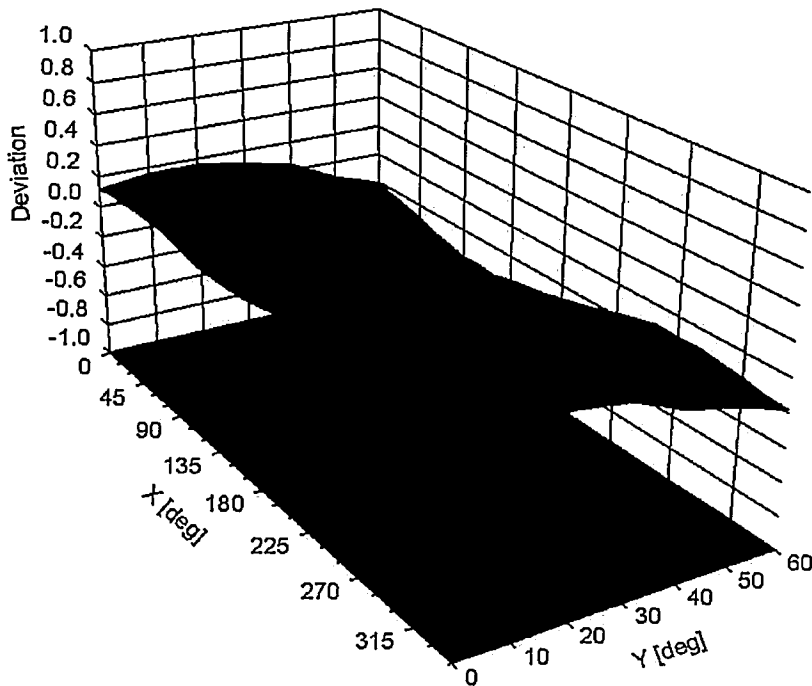

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7325

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	58.6
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB μ V	C	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	133.3	$\pm 2.5\%$
		Y	0.00	0.00	1.00		129.0	
		Z	0.00	0.00	1.00		133.0	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	2.41	65.40	10.18	10.00	20.0	$\pm 9.6\%$
		Y	7.72	78.62	16.76		20.0	
		Z	2.71	66.70	11.03		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	0.84	66.08	13.86	0.00	150.0	$\pm 9.6\%$
		Y	1.06	68.53	15.83		150.0	
		Z	0.83	65.69	13.61		150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.07	63.60	14.73	0.41	150.0	$\pm 9.6\%$
		Y	1.23	65.07	15.94		150.0	
		Z	1.08	63.53	14.67		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.66	66.74	16.94	1.46	150.0	$\pm 9.6\%$
		Y	4.95	67.01	17.30		150.0	
		Z	4.70	66.76	16.98		150.0	
10021- DAC	GSM-FDD (TDMA, GMSK)	X	100.00	111.92	26.60	9.39	50.0	$\pm 9.6\%$
		Y	100.00	117.20	29.89		50.0	
		Z	100.00	113.81	27.62		50.0	
10023- DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	91.73	110.56	26.26	9.57	50.0	$\pm 9.6\%$
		Y	100.00	117.09	29.89		50.0	
		Z	100.00	113.51	27.53		50.0	
10024- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	108.73	24.05	6.56	60.0	$\pm 9.6\%$
		Y	100.00	114.59	27.70		60.0	
		Z	100.00	110.79	25.14		60.0	
10025- DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	4.20	69.09	24.76	12.57	50.0	$\pm 9.6\%$
		Y	18.29	112.43	43.93		50.0	
		Z	4.27	69.29	24.94		50.0	
10026- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	9.28	91.36	31.88	9.56	60.0	$\pm 9.6\%$
		Y	30.73	118.89	41.23		60.0	
		Z	10.04	92.99	32.56		60.0	
10027- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	107.14	22.57	4.80	80.0	$\pm 9.6\%$
		Y	100.00	114.12	26.72		80.0	
		Z	100.00	109.37	23.71		80.0	
10028- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	105.87	21.35	3.55	100.0	$\pm 9.6\%$
		Y	100.00	114.77	26.32		100.0	
		Z	100.00	108.28	22.54		100.0	
10029- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	6.01	81.87	27.14	7.80	80.0	$\pm 9.6\%$
		Y	14.01	99.30	33.69		80.0	
		Z	6.44	83.20	27.72		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	100.00	106.08	22.38	5.30	70.0	$\pm 9.6\%$
		Y	100.00	113.09	26.55		70.0	
		Z	100.00	108.24	23.50		70.0	
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	100.00	95.70	15.87	1.88	100.0	$\pm 9.6\%$
		Y	100.00	114.53	24.79		100.0	
		Z	100.00	98.52	17.14		100.0	

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	0.22	60.00	4.43	1.17	100.0	± 9.6 %
		Y	100.00	118.30	25.32		100.0	
		Z	0.26	60.59	4.99		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	10.36	88.77	22.04	5.30	70.0	± 9.6 %
		Y	100.00	125.15	33.55		70.0	
		Z	16.59	96.03	24.61		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	2.48	72.83	14.67	1.88	100.0	± 9.6 %
		Y	18.48	100.54	25.56		100.0	
		Z	3.06	75.41	15.94		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	1.58	68.95	12.76	1.17	100.0	± 9.6 %
		Y	6.13	86.65	21.23		100.0	
		Z	1.78	70.24	13.56		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	14.90	94.07	23.69	5.30	70.0	± 9.6 %
		Y	100.00	125.46	33.70		70.0	
		Z	27.40	103.47	26.73		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	2.26	71.83	14.26	1.88	100.0	± 9.6 %
		Y	15.91	98.50	24.96		100.0	
		Z	2.75	74.24	15.49		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	1.61	69.38	13.06	1.17	100.0	± 9.6 %
		Y	6.47	87.74	21.69		100.0	
		Z	1.82	70.72	13.88		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	0.97	65.51	10.81	0.00	150.0	± 9.6 %
		Y	2.07	73.94	16.49		150.0	
		Z	1.01	65.70	11.07		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	71.31	103.15	22.58	7.78	50.0	± 9.6 %
		Y	100.00	112.64	26.97		50.0	
		Z	100.00	108.49	24.34		50.0	
10044-CAA	IS-91/EI/TIA-553 FDD (FDMA, FM)	X	0.15	125.40	5.02	0.00	150.0	± 9.6 %
		Y	0.01	117.14	9.69		150.0	
		Z	0.17	125.17	6.51		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	11.07	81.91	19.78	13.80	25.0	± 9.6 %
		Y	100.00	119.01	32.09		25.0	
		Z	20.63	91.44	23.22		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	13.11	85.67	19.85	10.79	40.0	± 9.6 %
		Y	100.00	117.37	30.32		40.0	
		Z	30.27	97.59	23.82		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	13.43	89.00	22.82	9.03	50.0	± 9.6 %
		Y	54.94	113.52	31.53		50.0	
		Z	17.85	93.93	24.75		50.0	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	4.65	77.10	24.45	6.55	100.0	± 9.6 %
		Y	8.97	89.53	29.44		100.0	
		Z	4.94	78.16	24.94		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.13	64.85	15.38	0.61	110.0	± 9.6 %
		Y	1.38	67.24	17.04		110.0	
		Z	1.14	64.88	15.39		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	39.45	118.21	29.48	1.30	110.0	± 9.6 %
		Y	100.00	133.29	34.12		110.0	
		Z	70.82	125.97	31.26		110.0	

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	3.53	83.16	22.44	2.04	110.0	± 9.6 %
		Y	21.03	111.10	31.44		110.0	
		Z	4.09	85.36	23.30		110.0	
10062-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.44	66.62	16.32	0.49	100.0	± 9.6 %
		Y	4.70	66.85	16.63		100.0	
		Z	4.46	66.60	16.32		100.0	
10063-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.46	66.74	16.42	0.72	100.0	± 9.6 %
		Y	4.73	66.99	16.76		100.0	
		Z	4.49	66.72	16.43		100.0	
10064-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	4.71	66.95	16.63	0.86	100.0	± 9.6 %
		Y	5.03	67.27	17.00		100.0	
		Z	4.75	66.95	16.66		100.0	
10065-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.59	66.85	16.73	1.21	100.0	± 9.6 %
		Y	4.92	67.26	17.16		100.0	
		Z	4.63	66.87	16.77		100.0	
10066-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.61	66.89	16.90	1.46	100.0	± 9.6 %
		Y	4.96	67.34	17.36		100.0	
		Z	4.66	66.93	16.96		100.0	
10067-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	4.92	67.19	17.40	2.04	100.0	± 9.6 %
		Y	5.27	67.54	17.83		100.0	
		Z	4.97	67.24	17.47		100.0	
10068-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	4.96	67.16	17.58	2.55	100.0	± 9.6 %
		Y	5.35	67.72	18.13		100.0	
		Z	5.02	67.23	17.67		100.0	
10069-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	5.04	67.20	17.78	2.67	100.0	± 9.6 %
		Y	5.43	67.70	18.32		100.0	
		Z	5.10	67.27	17.87		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.77	66.86	17.26	1.99	100.0	± 9.6 %
		Y	5.07	67.18	17.66		100.0	
		Z	4.81	66.89	17.31		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.75	67.17	17.47	2.30	100.0	± 9.6 %
		Y	5.09	67.65	17.96		100.0	
		Z	4.80	67.23	17.54		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	4.83	67.41	17.83	2.83	100.0	± 9.6 %
		Y	5.19	67.94	18.36		100.0	
		Z	4.89	67.48	17.92		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	4.85	67.40	18.01	3.30	100.0	± 9.6 %
		Y	5.20	67.94	18.57		100.0	
		Z	4.91	67.48	18.10		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	4.90	67.49	18.29	3.82	90.0	± 9.6 %
		Y	5.29	68.24	18.99		90.0	
		Z	4.96	67.59	18.41		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	4.94	67.38	18.47	4.15	90.0	± 9.6 %
		Y	5.31	68.04	19.12		90.0	
		Z	5.00	67.48	18.59		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	4.98	67.49	18.58	4.30	90.0	± 9.6 %
		Y	5.34	68.13	19.23		90.0	
		Z	5.04	67.59	18.70		90.0	

10081-CAB	CDMA2000 (1xRTT, RC3)	X	0.47	61.55	8.03	0.00	150.0	± 9.6 %
		Y	0.87	66.86	12.94		150.0	
		Z	0.49	61.68	8.26		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	0.80	60.00	4.51	4.77	80.0	± 9.6 %
		Y	1.24	60.73	6.02		80.0	
		Z	0.84	60.00	4.70		80.0	
10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	108.83	24.11	6.56	60.0	± 9.6 %
		Y	100.00	114.67	27.75		60.0	
		Z	100.00	110.89	25.21		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	1.65	67.36	14.84	0.00	150.0	± 9.6 %
		Y	1.85	68.21	15.96		150.0	
		Z	1.63	67.00	14.68		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	1.61	67.29	14.80	0.00	150.0	± 9.6 %
		Y	1.81	68.18	15.94		150.0	
		Z	1.59	66.93	14.64		150.0	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	9.34	91.46	31.91	9.56	60.0	± 9.6 %
		Y	30.81	118.89	41.22		60.0	
		Z	10.10	93.10	32.59		60.0	
10100-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	2.82	69.49	16.15	0.00	150.0	± 9.6 %
		Y	3.20	70.91	16.93		150.0	
		Z	2.81	69.30	16.02		150.0	
10101-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	2.99	67.02	15.52	0.00	150.0	± 9.6 %
		Y	3.25	67.76	16.04		150.0	
		Z	2.99	66.92	15.45		150.0	
10102-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.10	67.06	15.65	0.00	150.0	± 9.6 %
		Y	3.35	67.70	16.11		150.0	
		Z	3.10	66.97	15.58		150.0	
10103-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.18	75.72	20.28	3.98	65.0	± 9.6 %
		Y	8.83	80.30	22.18		65.0	
		Z	6.47	76.35	20.60		65.0	
10104-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	6.10	73.58	20.14	3.98	65.0	± 9.6 %
		Y	8.10	77.42	21.91		65.0	
		Z	6.31	74.04	20.40		65.0	
10105-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	5.66	72.01	19.75	3.98	65.0	± 9.6 %
		Y	7.57	76.07	21.65		65.0	
		Z	5.83	72.40	19.98		65.0	
10108-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	2.42	68.81	15.96	0.00	150.0	± 9.6 %
		Y	2.79	70.11	16.76		150.0	
		Z	2.42	68.60	15.82		150.0	
10109-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	2.63	66.92	15.34	0.00	150.0	± 9.6 %
		Y	2.91	67.63	15.96		150.0	
		Z	2.64	66.79	15.27		150.0	
10110-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	1.91	67.90	15.35	0.00	150.0	± 9.6 %
		Y	2.26	69.24	16.40		150.0	
		Z	1.91	67.65	15.21		150.0	
10111-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.36	67.97	15.49	0.00	150.0	± 9.6 %
		Y	2.63	68.52	16.29		150.0	
		Z	2.35	67.72	15.39		150.0	

10112-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	2.76	67.01	15.45	0.00	150.0	± 9.6 %
		Y	3.03	67.59	16.00		150.0	
		Z	2.77	66.88	15.37		150.0	
10113-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	2.51	68.20	15.67	0.00	150.0	± 9.6 %
		Y	2.79	68.63	16.41		150.0	
		Z	2.50	67.96	15.57		150.0	
10114-CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	4.87	66.95	16.23	0.00	150.0	± 9.6 %
		Y	5.10	67.23	16.44		150.0	
		Z	4.89	66.92	16.20		150.0	
10115-CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.12	67.03	16.28	0.00	150.0	± 9.6 %
		Y	5.40	67.38	16.52		150.0	
		Z	5.14	67.00	16.26		150.0	
10116-CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	4.95	67.14	16.26	0.00	150.0	± 9.6 %
		Y	5.20	67.43	16.46		150.0	
		Z	4.97	67.11	16.23		150.0	
10117-CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	4.86	66.90	16.23	0.00	150.0	± 9.6 %
		Y	5.07	67.11	16.39		150.0	
		Z	4.88	66.86	16.19		150.0	
10118-CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.19	67.21	16.38	0.00	150.0	± 9.6 %
		Y	5.48	67.57	16.62		150.0	
		Z	5.21	67.18	16.35		150.0	
10119-CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	4.95	67.13	16.26	0.00	150.0	± 9.6 %
		Y	5.18	67.37	16.44		150.0	
		Z	4.97	67.09	16.23		150.0	
10140-CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.12	67.06	15.56	0.00	150.0	± 9.6 %
		Y	3.39	67.70	16.03		150.0	
		Z	3.13	66.97	15.49		150.0	
10141-CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.25	67.25	15.78	0.00	150.0	± 9.6 %
		Y	3.51	67.78	16.19		150.0	
		Z	3.26	67.15	15.71		150.0	
10142-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	1.65	67.57	14.51	0.00	150.0	± 9.6 %
		Y	2.04	69.32	16.12		150.0	
		Z	1.65	67.31	14.42		150.0	
10143-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.11	68.03	14.45	0.00	150.0	± 9.6 %
		Y	2.52	69.41	16.09		150.0	
		Z	2.12	67.81	14.43		150.0	
10144-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	1.83	65.22	12.51	0.00	150.0	± 9.6 %
		Y	2.27	66.97	14.41		150.0	
		Z	1.86	65.20	12.59		150.0	
10145-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	0.69	60.54	7.24	0.00	150.0	± 9.6 %
		Y	1.26	65.77	12.19		150.0	
		Z	0.73	60.85	7.64		150.0	
10146-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	1.03	60.66	6.92	0.00	150.0	± 9.6 %
		Y	2.28	67.98	12.58		150.0	
		Z	1.11	61.19	7.46		150.0	
10147-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.08	61.04	7.22	0.00	150.0	± 9.6 %
		Y	2.87	70.82	13.98		150.0	
		Z	1.18	61.66	7.82		150.0	

10149-CAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	2.64	66.99	15.40	0.00	150.0	± 9.6 %
		Y	2.92	67.69	16.00		150.0	
		Z	2.65	66.86	15.32		150.0	
10150-CAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	2.77	67.08	15.49	0.00	150.0	± 9.6 %
		Y	3.04	67.65	16.04		150.0	
		Z	2.78	66.94	15.42		150.0	
10151-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.77	78.93	21.56	3.98	65.0	± 9.6 %
		Y	9.94	83.82	23.59		65.0	
		Z	7.14	79.67	21.93		65.0	
10152-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	5.63	73.52	19.68	3.98	65.0	± 9.6 %
		Y	7.77	77.80	21.79		65.0	
		Z	5.85	74.04	19.99		65.0	
10153-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	6.09	74.83	20.63	3.98	65.0	± 9.6 %
		Y	8.22	78.79	22.55		65.0	
		Z	6.32	75.33	20.93		65.0	
10154-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	1.95	68.31	15.60	0.00	150.0	± 9.6 %
		Y	2.32	69.69	16.67		150.0	
		Z	1.95	68.05	15.46		150.0	
10155-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	2.36	68.01	15.52	0.00	150.0	± 9.6 %
		Y	2.64	68.54	16.31		150.0	
		Z	2.35	67.75	15.41		150.0	
10156-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	1.45	67.08	13.79	0.00	150.0	± 9.6 %
		Y	1.90	69.54	15.98		150.0	
		Z	1.46	66.87	13.75		150.0	
10157-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	1.61	65.16	12.02	0.00	150.0	± 9.6 %
		Y	2.12	67.66	14.52		150.0	
		Z	1.64	65.18	12.16		150.0	
10158-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	2.52	68.30	15.73	0.00	150.0	± 9.6 %
		Y	2.79	68.69	16.46		150.0	
		Z	2.51	68.04	15.63		150.0	
10159-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	1.69	65.48	12.23	0.00	150.0	± 9.6 %
		Y	2.24	68.16	14.82		150.0	
		Z	1.72	65.52	12.38		150.0	
10160-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	2.47	68.23	15.82	0.00	150.0	± 9.6 %
		Y	2.76	68.98	16.46		150.0	
		Z	2.47	68.03	15.70		150.0	
10161-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	2.66	67.02	15.36	0.00	150.0	± 9.6 %
		Y	2.93	67.59	15.98		150.0	
		Z	2.66	66.88	15.29		150.0	
10162-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	2.77	67.26	15.52	0.00	150.0	± 9.6 %
		Y	3.04	67.72	16.08		150.0	
		Z	2.78	67.11	15.44		150.0	
10166-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	3.22	69.04	18.74	3.01	150.0	± 9.6 %
		Y	3.75	70.41	19.50		150.0	
		Z	3.26	69.14	18.79		150.0	
10167-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	3.86	71.63	18.99	3.01	150.0	± 9.6 %
		Y	4.84	73.93	20.15		150.0	
		Z	3.94	71.80	19.07		150.0	

10168-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	4.42	74.59	20.70	3.01	150.0	± 9.6 %
		Y	5.44	76.42	21.53		150.0	
		Z	4.51	74.74	20.77		150.0	
10169-CAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	2.66	67.69	18.08	3.01	150.0	± 9.6 %
		Y	3.27	70.73	19.64		150.0	
		Z	2.69	67.87	18.18		150.0	
10170-CAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	3.55	73.18	20.31	3.01	150.0	± 9.6 %
		Y	5.00	78.20	22.40		150.0	
		Z	3.63	73.56	20.49		150.0	
10171-AAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	2.88	68.86	17.32	3.01	150.0	± 9.6 %
		Y	3.94	73.22	19.39		150.0	
		Z	2.92	69.12	17.46		150.0	
10172-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	5.87	84.54	25.79	6.02	65.0	± 9.6 %
		Y	37.30	118.11	36.38		65.0	
		Z	6.82	87.40	26.99		65.0	
10173-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	10.80	91.97	26.38	6.02	65.0	± 9.6 %
		Y	95.89	128.00	36.57		65.0	
		Z	14.38	97.11	28.20		65.0	
10174-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	7.53	85.02	23.54	6.02	65.0	± 9.6 %
		Y	49.11	114.35	32.53		65.0	
		Z	9.67	89.28	25.17		65.0	
10175-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	2.63	67.38	17.82	3.01	150.0	± 9.6 %
		Y	3.23	70.38	19.38		150.0	
		Z	2.66	67.55	17.92		150.0	
10176-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	3.56	73.20	20.32	3.01	150.0	± 9.6 %
		Y	5.00	78.22	22.41		150.0	
		Z	3.63	73.59	20.50		150.0	
10177-CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.65	67.51	17.91	3.01	150.0	± 9.6 %
		Y	3.26	70.55	19.48		150.0	
		Z	2.68	67.69	18.01		150.0	
10178-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	3.53	73.02	20.22	3.01	150.0	± 9.6 %
		Y	4.94	77.96	22.28		150.0	
		Z	3.60	73.39	20.40		150.0	
10179-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	3.17	70.82	18.65	3.01	150.0	± 9.6 %
		Y	4.42	75.54	20.74		150.0	
		Z	3.23	71.14	18.80		150.0	
10180-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	2.88	68.81	17.29	3.01	150.0	± 9.6 %
		Y	3.93	73.13	19.33		150.0	
		Z	2.92	69.06	17.42		150.0	
10181-CAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	2.64	67.50	17.90	3.01	150.0	± 9.6 %
		Y	3.25	70.53	19.47		150.0	
		Z	2.67	67.68	18.00		150.0	
10182-CAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	3.52	73.00	20.21	3.01	150.0	± 9.6 %
		Y	4.93	77.93	22.27		150.0	
		Z	3.59	73.37	20.38		150.0	
10183-AAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	2.87	68.79	17.28	3.01	150.0	± 9.6 %
		Y	3.92	73.11	19.32		150.0	
		Z	2.92	69.04	17.41		150.0	

10184-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	2.65	67.54	17.92	3.01	150.0	± 9.6 %
		Y	3.26	70.58	19.49		150.0	
		Z	2.68	67.72	18.02		150.0	
10185-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	3.54	73.07	20.25	3.01	150.0	± 9.6 %
		Y	4.96	78.01	22.31		150.0	
		Z	3.61	73.45	20.43		150.0	
10186-AAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	2.88	68.85	17.31	3.01	150.0	± 9.6 %
		Y	3.94	73.18	19.36		150.0	
		Z	2.93	69.10	17.44		150.0	
10187-CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	2.66	67.62	18.00	3.01	150.0	± 9.6 %
		Y	3.27	70.64	19.56		150.0	
		Z	2.69	67.79	18.10		150.0	
10188-CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	3.65	73.73	20.64	3.01	150.0	± 9.6 %
		Y	5.15	78.80	22.72		150.0	
		Z	3.73	74.13	20.83		150.0	
10189-AAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	2.94	69.24	17.58	3.01	150.0	± 9.6 %
		Y	4.05	73.68	19.66		150.0	
		Z	2.99	69.51	17.72		150.0	
10193-CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.28	66.56	15.92	0.00	150.0	± 9.6 %
		Y	4.51	66.66	16.16		150.0	
		Z	4.29	66.48	15.88		150.0	
10194-CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.42	66.81	16.06	0.00	150.0	± 9.6 %
		Y	4.68	66.98	16.28		150.0	
		Z	4.44	66.74	16.02		150.0	
10195-CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.46	66.83	16.07	0.00	150.0	± 9.6 %
		Y	4.72	67.01	16.30		150.0	
		Z	4.48	66.76	16.04		150.0	
10196-CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.26	66.56	15.91	0.00	150.0	± 9.6 %
		Y	4.51	66.73	16.18		150.0	
		Z	4.28	66.49	15.88		150.0	
10197-CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	4.43	66.82	16.06	0.00	150.0	± 9.6 %
		Y	4.70	67.00	16.30		150.0	
		Z	4.45	66.75	16.03		150.0	
10198-CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.45	66.83	16.08	0.00	150.0	± 9.6 %
		Y	4.72	67.03	16.31		150.0	
		Z	4.47	66.77	16.04		150.0	
10219-CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.21	66.59	15.88	0.00	150.0	± 9.6 %
		Y	4.46	66.74	16.15		150.0	
		Z	4.23	66.51	15.84		150.0	
10220-CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.42	66.78	16.05	0.00	150.0	± 9.6 %
		Y	4.69	66.98	16.29		150.0	
		Z	4.44	66.71	16.01		150.0	
10221-CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.47	66.78	16.07	0.00	150.0	± 9.6 %
		Y	4.73	66.95	16.30		150.0	
		Z	4.49	66.71	16.03		150.0	
10222-CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	4.83	66.88	16.21	0.00	150.0	± 9.6 %
		Y	5.05	67.12	16.39		150.0	
		Z	4.85	66.84	16.17		150.0	

10223-CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.11	67.09	16.33	0.00	150.0	± 9.6 %
		Y	5.35	67.30	16.50		150.0	
		Z	5.13	67.05	16.30		150.0	
10224-CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	4.87	66.99	16.19	0.00	150.0	± 9.6 %
		Y	5.10	67.23	16.37		150.0	
		Z	4.88	66.94	16.15		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	2.54	65.84	14.59	0.00	150.0	± 9.6 %
		Y	2.80	66.29	15.42		150.0	
		Z	2.55	65.72	14.58		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	11.71	93.50	26.96	6.02	65.0	± 9.6 %
		Y	100.00	128.98	36.90		65.0	
		Z	15.82	98.95	28.85		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	11.01	91.17	25.58	6.02	65.0	± 9.6 %
		Y	74.29	121.47	34.39		65.0	
		Z	14.86	96.37	27.42		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	7.86	90.50	27.96	6.02	65.0	± 9.6 %
		Y	62.27	128.65	39.20		65.0	
		Z	9.56	94.33	29.43		65.0	
10229-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	10.88	92.08	26.42	6.02	65.0	± 9.6 %
		Y	96.22	128.06	36.59		65.0	
		Z	14.50	97.24	28.24		65.0	
10230-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	10.20	89.81	25.07	6.02	65.0	± 9.6 %
		Y	65.73	119.19	33.75		65.0	
		Z	13.57	94.74	26.84		65.0	
10231-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	7.44	89.36	27.49	6.02	65.0	± 9.6 %
		Y	55.58	126.20	38.49		65.0	
		Z	9.00	93.03	28.91		65.0	
10232-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	10.86	92.07	26.42	6.02	65.0	± 9.6 %
		Y	96.38	128.09	36.60		65.0	
		Z	14.47	97.22	28.24		65.0	
10233-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	10.17	89.78	25.07	6.02	65.0	± 9.6 %
		Y	65.75	119.21	33.75		65.0	
		Z	13.53	94.70	26.83		65.0	
10234-CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	7.12	88.36	27.02	6.02	65.0	± 9.6 %
		Y	49.99	123.79	37.75		65.0	
		Z	8.56	91.91	28.41		65.0	
10235-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	10.88	92.11	26.43	6.02	65.0	± 9.6 %
		Y	97.12	128.25	36.64		65.0	
		Z	14.50	97.27	28.25		65.0	
10236-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	10.27	89.91	25.10	6.02	65.0	± 9.6 %
		Y	66.94	119.47	33.81		65.0	
		Z	13.69	94.86	26.87		65.0	
10237-CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	7.45	89.40	27.51	6.02	65.0	± 9.6 %
		Y	56.50	126.55	38.58		65.0	
		Z	9.01	93.09	28.94		65.0	
10238-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	10.84	92.05	26.41	6.02	65.0	± 9.6 %
		Y	96.52	128.13	36.60		65.0	
		Z	14.44	97.20	28.23		65.0	

10239-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	10.14	89.74	25.05	6.02	65.0	± 9.6 %
		Y	65.73	119.22	33.75		65.0	
		Z	13.49	94.67	26.82		65.0	
10240-CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	7.43	89.38	27.50	6.02	65.0	± 9.6 %
		Y	56.25	126.47	38.56		65.0	
		Z	8.99	93.06	28.93		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	8.06	81.96	25.32	6.98	65.0	± 9.6 %
		Y	12.11	88.43	28.15		65.0	
		Z	8.46	82.76	25.76		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	7.04	79.23	24.15	6.98	65.0	± 9.6 %
		Y	10.64	85.65	27.02		65.0	
		Z	7.36	79.92	24.54		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	5.73	75.92	23.68	6.98	65.0	± 9.6 %
		Y	8.19	81.74	26.46		65.0	
		Z	5.94	76.44	24.00		65.0	
10244-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	4.35	70.63	14.89	3.98	65.0	± 9.6 %
		Y	9.59	81.68	20.84		65.0	
		Z	5.01	72.65	16.09		65.0	
10245-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	4.22	70.01	14.56	3.98	65.0	± 9.6 %
		Y	9.16	80.73	20.43		65.0	
		Z	4.83	71.89	15.70		65.0	
10246-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	4.34	74.02	16.70	3.98	65.0	± 9.6 %
		Y	11.69	88.11	23.25		65.0	
		Z	5.10	76.28	17.88		65.0	
10247-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	4.45	71.77	16.54	3.98	65.0	± 9.6 %
		Y	7.52	78.97	20.68		65.0	
		Z	4.82	72.92	17.28		65.0	
10248-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	4.37	71.09	16.23	3.98	65.0	± 9.6 %
		Y	7.31	78.04	20.30		65.0	
		Z	4.72	72.17	16.94		65.0	
10249-CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	6.48	80.59	20.52	3.98	65.0	± 9.6 %
		Y	13.99	91.86	25.39		65.0	
		Z	7.38	82.60	21.48		65.0	
10250-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	5.87	76.40	20.67	3.98	65.0	± 9.6 %
		Y	8.52	81.44	23.20		65.0	
		Z	6.18	77.16	21.12		65.0	
10251-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	5.37	73.61	19.08	3.98	65.0	± 9.6 %
		Y	7.75	78.49	21.71		65.0	
		Z	5.63	74.28	19.51		65.0	
10252-CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	7.21	82.16	22.54	3.98	65.0	± 9.6 %
		Y	12.12	89.30	25.49		65.0	
		Z	7.78	83.32	23.10		65.0	
10253-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	5.54	73.10	19.41	3.98	65.0	± 9.6 %
		Y	7.54	77.12	21.51		65.0	
		Z	5.75	73.59	19.72		65.0	
10254-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	5.94	74.23	20.23	3.98	65.0	± 9.6 %
		Y	7.97	78.05	22.20		65.0	
		Z	6.16	74.72	20.54		65.0	

10255-CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.45	78.30	21.47	3.98	65.0	± 9.6 %
		Y	9.39	83.11	23.56		65.0	
		Z	6.79	79.00	21.84		65.0	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	3.05	65.86	11.46	3.98	65.0	± 9.6 %
		Y	7.39	77.07	18.09		65.0	
		Z	3.46	67.35	12.51		65.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	2.99	65.34	11.10	3.98	65.0	± 9.6 %
		Y	6.97	75.87	17.53		65.0	
		Z	3.36	66.68	12.09		65.0	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	2.81	67.60	12.78	3.98	65.0	± 9.6 %
		Y	8.15	81.68	20.20		65.0	
		Z	3.24	69.36	13.90		65.0	
10259-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	5.01	73.63	18.10	3.98	65.0	± 9.6 %
		Y	7.92	79.86	21.58		65.0	
		Z	5.37	74.63	18.73		65.0	
10260-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	5.01	73.28	17.95	3.98	65.0	± 9.6 %
		Y	7.83	79.36	21.39		65.0	
		Z	5.36	74.25	18.57		65.0	
10261-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	6.45	80.42	21.04	3.98	65.0	± 9.6 %
		Y	12.09	89.42	25.01		65.0	
		Z	7.11	81.94	21.79		65.0	
10262-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	5.84	76.30	20.61	3.98	65.0	± 9.6 %
		Y	8.50	81.37	23.15		65.0	
		Z	6.15	77.06	21.06		65.0	
10263-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	5.36	73.59	19.08	3.98	65.0	± 9.6 %
		Y	7.74	78.47	21.70		65.0	
		Z	5.62	74.25	19.50		65.0	
10264-CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	7.11	81.88	22.41	3.98	65.0	± 9.6 %
		Y	11.96	89.04	25.37		65.0	
		Z	7.67	83.03	22.97		65.0	
10265-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	5.62	73.52	19.68	3.98	65.0	± 9.6 %
		Y	7.76	77.81	21.79		65.0	
		Z	5.85	74.04	20.00		65.0	
10266-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	6.08	74.81	20.62	3.98	65.0	± 9.6 %
		Y	8.22	78.78	22.54		65.0	
		Z	6.31	75.31	20.92		65.0	
10267-CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.75	78.87	21.53	3.98	65.0	± 9.6 %
		Y	9.91	83.76	23.57		65.0	
		Z	7.12	79.61	21.90		65.0	
10268-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	6.27	73.56	20.23	3.98	65.0	± 9.6 %
		Y	8.16	77.04	21.88		65.0	
		Z	6.47	73.97	20.47		65.0	
10269-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	6.26	73.17	20.10	3.98	65.0	± 9.6 %
		Y	8.06	76.51	21.72		65.0	
		Z	6.45	73.56	20.34		65.0	
10270-CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	6.48	75.91	20.57	3.98	65.0	± 9.6 %
		Y	8.68	79.49	22.12		65.0	
		Z	6.73	76.41	20.84		65.0	

10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.36	66.31	14.56	0.00	150.0	± 9.6 %
		Y	2.58	66.71	15.36		150.0	
		Z	2.36	66.13	14.51		150.0	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.38	67.01	14.49	0.00	150.0	± 9.6 %
		Y	1.64	68.65	15.91		150.0	
		Z	1.37	66.68	14.32		150.0	
10277-CAA	PHS (QPSK)	X	2.18	61.15	6.73	9.03	50.0	± 9.6 %
		Y	3.43	64.74	9.96		50.0	
		Z	2.33	61.63	7.23		50.0	
10278-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	3.56	67.10	12.20	9.03	50.0	± 9.6 %
		Y	9.12	80.78	19.71		50.0	
		Z	3.99	68.71	13.31		50.0	
10279-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	3.63	67.31	12.36	9.03	50.0	± 9.6 %
		Y	9.31	81.03	19.84		50.0	
		Z	4.08	68.94	13.46		50.0	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	0.80	63.34	9.42	0.00	150.0	± 9.6 %
		Y	1.54	69.80	14.44		150.0	
		Z	0.83	63.58	9.71		150.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	0.47	61.43	7.94	0.00	150.0	± 9.6 %
		Y	0.84	66.57	12.79		150.0	
		Z	0.48	61.56	8.17		150.0	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	0.55	63.75	9.52	0.00	150.0	± 9.6 %
		Y	1.23	72.58	15.93		150.0	
		Z	0.57	63.77	9.70		150.0	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	0.91	69.01	12.49	0.00	150.0	± 9.6 %
		Y	2.49	82.73	20.31		150.0	
		Z	0.87	68.39	12.39		150.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	11.64	85.97	22.60	9.03	50.0	± 9.6 %
		Y	13.82	90.97	26.22		50.0	
		Z	12.27	87.39	23.50		50.0	
10297-AAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	2.43	68.92	16.03	0.00	150.0	± 9.6 %
		Y	2.80	70.22	16.83		150.0	
		Z	2.43	68.71	15.89		150.0	
10298-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	1.02	63.87	10.59	0.00	150.0	± 9.6 %
		Y	1.62	68.47	14.50		150.0	
		Z	1.05	64.03	10.82		150.0	
10299-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	1.54	63.97	10.01	0.00	150.0	± 9.6 %
		Y	3.15	71.82	15.27		150.0	
		Z	1.66	64.69	10.59		150.0	
10300-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	1.25	61.46	7.96	0.00	150.0	± 9.6 %
		Y	2.16	66.08	11.93		150.0	
		Z	1.33	61.89	8.41		150.0	
10301-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	4.65	66.27	17.47	4.17	50.0	± 9.6 %
		Y	5.29	67.56	18.48		50.0	
		Z	4.75	66.45	17.57		50.0	
10302-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	X	5.04	66.38	17.90	4.96	50.0	± 9.6 %
		Y	5.63	67.54	18.86		50.0	
		Z	5.13	66.48	17.96		50.0	

10303-AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	4.82	66.10	17.73	4.96	50.0	± 9.6 %
		Y	5.42	67.37	18.79		50.0	
		Z	4.90	66.21	17.80		50.0	
10304-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	4.61	65.93	17.23	4.17	50.0	± 9.6 %
		Y	5.16	66.99	18.13		50.0	
		Z	4.69	66.00	17.27		50.0	
10305-AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	4.80	70.22	19.95	6.02	35.0	± 9.6 %
		Y	5.81	73.38	22.42		35.0	
		Z	4.99	70.80	20.30		35.0	
10306-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	4.84	68.24	19.35	6.02	35.0	± 9.6 %
		Y	5.54	70.09	21.01		35.0	
		Z	4.98	68.59	19.58		35.0	
10307-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	4.77	68.47	19.32	6.02	35.0	± 9.6 %
		Y	5.56	70.71	21.16		35.0	
		Z	4.91	68.87	19.57		35.0	
10308-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	4.78	68.80	19.52	6.02	35.0	± 9.6 %
		Y	5.59	71.17	21.41		35.0	
		Z	4.93	69.23	19.78		35.0	
10309-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	4.87	68.34	19.45	6.02	35.0	± 9.6 %
		Y	5.63	70.39	21.18		35.0	
		Z	5.01	68.72	19.69		35.0	
10310-AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	4.81	68.39	19.37	6.02	35.0	± 9.6 %
		Y	5.54	70.34	21.06		35.0	
		Z	4.95	68.76	19.60		35.0	
10311-AAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	2.79	68.19	15.74	0.00	150.0	± 9.6 %
		Y	3.17	69.46	16.45		150.0	
		Z	2.78	68.00	15.61		150.0	
10313-AAA	iDEN 1:3	X	3.45	71.64	15.03	6.99	70.0	± 9.6 %
		Y	8.83	82.02	19.41		70.0	
		Z	3.91	73.05	15.73		70.0	
10314-AAA	iDEN 1:6	X	5.91	81.21	21.38	10.00	30.0	± 9.6 %
		Y	19.07	98.09	27.25		30.0	
		Z	7.08	83.93	22.46		30.0	
10315-AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	0.98	63.42	14.60	0.17	150.0	± 9.6 %
		Y	1.11	64.65	15.70		150.0	
		Z	0.98	63.29	14.49		150.0	
10316-AAB	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)	X	4.32	66.57	16.06	0.17	150.0	± 9.6 %
		Y	4.59	66.81	16.37		150.0	
		Z	4.35	66.53	16.05		150.0	
10317-AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.32	66.57	16.06	0.17	150.0	± 9.6 %
		Y	4.59	66.81	16.37		150.0	
		Z	4.35	66.53	16.05		150.0	
10400-AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.38	66.81	16.03	0.00	150.0	± 9.6 %
		Y	4.68	67.04	16.28		150.0	
		Z	4.41	66.75	15.99		150.0	
10401-AAD	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.05	66.69	16.09	0.00	150.0	± 9.6 %
		Y	5.36	67.18	16.42		150.0	
		Z	5.10	66.74	16.11		150.0	

10402-AAD	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.39	67.22	16.25	0.00	150.0	± 9.6 %
		Y	5.62	67.51	16.43		150.0	
		Z	5.40	67.19	16.21		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	0.80	63.34	9.42	0.00	115.0	± 9.6 %
		Y	1.54	69.80	14.44		115.0	
		Z	0.83	63.58	9.71		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	0.80	63.34	9.42	0.00	115.0	± 9.6 %
		Y	1.54	69.80	14.44		115.0	
		Z	0.83	63.58	9.71		115.0	
10406-AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	56.31	110.84	26.51	0.00	100.0	± 9.6 %
		Y	100.00	120.00	29.77		100.0	
		Z	83.19	115.94	27.78		100.0	
10410-AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	X	29.47	104.50	25.33	3.23	80.0	± 9.6 %
		Y	100.00	120.31	30.04		80.0	
		Z	100.00	120.80	29.42		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	0.90	62.52	13.99	0.00	150.0	± 9.6 %
		Y	0.98	63.25	14.84		150.0	
		Z	0.89	62.33	13.83		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.27	66.56	15.99	0.00	150.0	± 9.6 %
		Y	4.51	66.70	16.23		150.0	
		Z	4.29	66.49	15.96		150.0	
10417-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.27	66.56	15.99	0.00	150.0	± 9.6 %
		Y	4.51	66.70	16.23		150.0	
		Z	4.29	66.49	15.96		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.27	66.75	16.04	0.00	150.0	± 9.6 %
		Y	4.50	66.87	16.25		150.0	
		Z	4.28	66.67	16.00		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.28	66.69	16.03	0.00	150.0	± 9.6 %
		Y	4.52	66.81	16.25		150.0	
		Z	4.30	66.61	15.99		150.0	
10422-AAB	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.39	66.67	16.05	0.00	150.0	± 9.6 %
		Y	4.64	66.81	16.26		150.0	
		Z	4.41	66.60	16.01		150.0	
10423-AAB	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.52	66.93	16.14	0.00	150.0	± 9.6 %
		Y	4.81	67.13	16.38		150.0	
		Z	4.54	66.87	16.10		150.0	
10424-AAB	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.45	66.88	16.11	0.00	150.0	± 9.6 %
		Y	4.73	67.08	16.35		150.0	
		Z	4.47	66.82	16.08		150.0	
10425-AAB	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.07	67.11	16.32	0.00	150.0	± 9.6 %
		Y	5.31	67.35	16.50		150.0	
		Z	5.09	67.07	16.29		150.0	
10426-AAB	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.09	67.19	16.35	0.00	150.0	± 9.6 %
		Y	5.32	67.36	16.50		150.0	
		Z	5.11	67.14	16.32		150.0	

10427-AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.06	67.00	16.25	0.00	150.0	± 9.6 %
		Y	5.33	67.35	16.50		150.0	
		Z	5.08	66.98	16.24		150.0	
10430-AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.18	72.19	18.25	0.00	150.0	± 9.6 %
		Y	4.25	70.92	18.22		150.0	
		Z	4.14	71.78	18.12		150.0	
10431-AAB	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	3.89	67.09	15.84	0.00	150.0	± 9.6 %
		Y	4.20	67.29	16.25		150.0	
		Z	3.91	67.00	15.81		150.0	
10432-AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.21	66.96	16.02	0.00	150.0	± 9.6 %
		Y	4.50	67.14	16.31		150.0	
		Z	4.23	66.88	15.99		150.0	
10433-AAB	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.47	66.92	16.13	0.00	150.0	± 9.6 %
		Y	4.74	67.12	16.37		150.0	
		Z	4.49	66.85	16.10		150.0	
10434-AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.28	73.00	18.00	0.00	150.0	± 9.6 %
		Y	4.37	71.84	18.22		150.0	
		Z	4.23	72.57	17.90		150.0	
10435-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	25.65	102.56	24.79	3.23	80.0	± 9.6 %
		Y	100.00	120.11	29.94		80.0	
		Z	100.00	120.55	29.30		80.0	
10447-AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.11	66.77	14.63	0.00	150.0	± 9.6 %
		Y	3.50	67.35	15.61		150.0	
		Z	3.14	66.69	14.66		150.0	
10448-AAB	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.75	66.88	15.71	0.00	150.0	± 9.6 %
		Y	4.04	67.07	16.11		150.0	
		Z	3.77	66.79	15.67		150.0	
10449-AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.05	66.79	15.92	0.00	150.0	± 9.6 %
		Y	4.31	66.98	16.21		150.0	
		Z	4.06	66.71	15.88		150.0	
10450-AAB	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.26	66.69	15.99	0.00	150.0	± 9.6 %
		Y	4.50	66.89	16.23		150.0	
		Z	4.28	66.62	15.95		150.0	
10451-AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	2.90	66.47	13.84	0.00	150.0	± 9.6 %
		Y	3.40	67.55	15.23		150.0	
		Z	2.94	66.46	13.93		150.0	
10456-AAB	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	5.99	67.68	16.50	0.00	150.0	± 9.6 %
		Y	6.17	67.88	16.64		150.0	
		Z	6.03	67.73	16.52		150.0	
10457-AAA	UMTS-FDD (DC-HSDPA)	X	3.62	65.29	15.72	0.00	150.0	± 9.6 %
		Y	3.76	65.34	15.94		150.0	
		Z	3.62	65.20	15.67		150.0	
10458-AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3.65	70.95	16.51	0.00	150.0	± 9.6 %
		Y	4.01	71.12	17.63		150.0	
		Z	3.67	70.84	16.59		150.0	
10459-AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	4.89	69.40	18.05	0.00	150.0	± 9.6 %
		Y	5.04	68.30	18.09		150.0	
		Z	4.91	69.24	18.06		150.0	

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	0.73	66.97	14.67	0.00	150.0	± 9.6 %
		Y	0.93	69.68	16.86		150.0	
		Z	0.71	66.39	14.31		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	57.00	115.61	28.78	3.29	80.0	± 9.6 %
		Y	100.00	125.68	32.53		80.0	
		Z	100.00	124.56	31.22		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.98	60.95	8.44	3.23	80.0	± 9.6 %
		Y	100.00	106.73	23.66		80.0	
		Z	1.27	63.22	9.74		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.90	60.00	7.43	3.23	80.0	± 9.6 %
		Y	18.92	87.29	-18.23		80.0	
		Z	0.91	60.00	7.65		80.0	
10464-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	19.88	99.98	24.22	3.23	80.0	± 9.6 %
		Y	100.00	123.30	31.27		80.0	
		Z	100.00	121.18	29.52		80.0	
10465-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.93	60.47	8.14	3.23	80.0	± 9.6 %
		Y	100.00	106.11	23.37		80.0	
		Z	1.16	62.36	9.27		80.0	
10466-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.90	60.00	7.38	3.23	80.0	± 9.6 %
		Y	8.90	79.89	16.11		80.0	
		Z	0.91	60.00	7.60		80.0	
10467-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	26.99	103.90	25.23	3.23	80.0	± 9.6 %
		Y	100.00	123.56	31.39		80.0	
		Z	100.00	121.54	29.67		80.0	
10468-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.95	60.62	8.23	3.23	80.0	± 9.6 %
		Y	100.00	106.30	23.45		80.0	
		Z	1.19	62.61	9.41		80.0	
10469-AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.90	60.00	7.38	3.23	80.0	± 9.6 %
		Y	9.12	80.13	16.18		80.0	
		Z	0.91	60.00	7.60		80.0	
10470-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	27.51	104.14	25.28	3.23	80.0	± 9.6 %
		Y	100.00	123.59	31.40		80.0	
		Z	100.00	121.54	29.67		80.0	
10471-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.94	60.58	8.20	3.23	80.0	± 9.6 %
		Y	100.00	106.24	23.42		80.0	
		Z	1.18	62.55	9.37		80.0	
10472-AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.90	60.00	7.37	3.23	80.0	± 9.6 %
		Y	8.98	79.96	-16.11		80.0	
		Z	0.91	60.00	7.59		80.0	
10473-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	27.01	103.89	25.21	3.23	80.0	± 9.6 %
		Y	100.00	123.56	31.38		80.0	
		Z	100.00	121.50	29.65		80.0	
10474-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.94	60.56	8.19	3.23	80.0	± 9.6 %
		Y	100.00	106.24	23.42		80.0	
		Z	1.18	62.53	9.36		80.0	
10475-AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.89	60.00	7.37	3.23	80.0	± 9.6 %
		Y	8.84	79.82	16.08		80.0	
		Z	0.91	60.00	7.59		80.0	

10477-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	0.93	60.43	8.10	3.23	80.0	± 9.6 %
		Y	100.00	106.05	23.33		80.0	
		Z	1.15	62.32	9.24		80.0	
10478-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	0.90	60.00	7.36	3.23	80.0	± 9.6 %
		Y	8.62	79.55	15.99		80.0	
		Z	0.91	60.00	7.58		80.0	
10479-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	13.32	93.77	24.17	3.23	80.0	± 9.6 %
		Y	37.02	109.32	29.75		80.0	
		Z	22.05	101.21	26.51		80.0	
10480-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.50	74.18	15.77	3.23	80.0	± 9.6 %
		Y	31.58	99.19	24.95		80.0	
		Z	7.18	79.79	17.96		80.0	
10481-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.02	69.13	13.45	3.23	80.0	± 9.6 %
		Y	20.31	92.26	22.64		80.0	
		Z	4.32	73.16	15.26		80.0	
10482-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.93	66.63	13.04	2.23	80.0	± 9.6 %
		Y	6.99	82.79	20.77		80.0	
		Z	2.29	68.59	14.15		80.0	
10483-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.19	64.81	11.62	2.23	80.0	± 9.6 %
		Y	9.72	83.33	20.46		80.0	
		Z	2.81	67.60	13.17		80.0	
10484-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.11	64.17	11.31	2.23	80.0	± 9.6 %
		Y	8.30	81.01	19.70		80.0	
		Z	2.63	66.62	12.74		80.0	
10485-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	2.92	72.05	16.77	2.23	80.0	± 9.6 %
		Y	6.78	83.14	21.91		80.0	
		Z	3.29	73.57	17.56		80.0	
10486-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.52	66.75	13.78	2.23	80.0	± 9.6 %
		Y	4.77	74.51	18.30		80.0	
		Z	2.78	67.89	14.50		80.0	
10487-AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.50	66.32	13.57	2.23	80.0	± 9.6 %
		Y	4.64	73.76	17.99		80.0	
		Z	2.75	67.42	14.27		80.0	
10488-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.34	72.34	18.15	2.23	80.0	± 9.6 %
		Y	5.76	79.26	21.28		80.0	
		Z	3.57	73.18	18.58		80.0	
10489-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.25	68.89	16.60	2.23	80.0	± 9.6 %
		Y	4.54	72.73	18.83		80.0	
		Z	3.40	69.39	16.94		80.0	
10490-AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.32	68.71	16.53	2.23	80.0	± 9.6 %
		Y	4.58	72.32	18.68		80.0	
		Z	3.47	69.19	16.86		80.0	
10491-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.54	70.77	17.80	2.23	80.0	± 9.6 %
		Y	5.29	75.70	20.08		80.0	
		Z	3.72	71.36	18.11		80.0	
10492-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.59	68.19	16.81	2.23	80.0	± 9.6 %
		Y	4.67	71.13	18.48		80.0	
		Z	3.71	68.55	17.05		80.0	

10493-AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.64	68.06	16.76	2.23	80.0	± 9.6 %
		Y	4.71	70.87	18.38		80.0	
		Z	3.77	68.40	16.99		80.0	
10494-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.82	72.12	18.25	2.23	80.0	± 9.6 %
		Y	6.08	78.02	20.78		80.0	
		Z	4.04	72.82	18.58		80.0	
10495-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.62	68.49	17.04	2.23	80.0	± 9.6 %
		Y	4.76	71.66	18.72		80.0	
		Z	3.75	68.87	17.27		80.0	
10496-AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.70	68.27	16.98	2.23	80.0	± 9.6 %
		Y	4.78	71.18	18.56		80.0	
		Z	3.82	68.62	17.20		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	1.09	60.48	8.70	2.23	80.0	± 9.6 %
		Y	4.69	76.56	17.57		80.0	
		Z	1.27	61.79	9.69		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	1.22	60.00	7.33	2.23	80.0	± 9.6 %
		Y	2.41	65.58	12.11		80.0	
		Z	1.26	60.00	7.64		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.24	60.00	7.18	2.23	80.0	± 9.6 %
		Y	2.27	64.61	11.52		80.0	
		Z	1.27	60.00	7.49		80.0	
10500-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.09	72.17	17.34	2.23	80.0	± 9.6 %
		Y	6.01	80.74	21.40		80.0	
		Z	3.38	73.31	17.95		80.0	
10501-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	2.89	68.03	15.06	2.23	80.0	± 9.6 %
		Y	4.66	73.73	18.47		80.0	
		Z	3.11	68.89	15.61		80.0	
10502-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	2.92	67.79	14.88	2.23	80.0	± 9.6 %
		Y	4.68	73.38	18.28		80.0	
		Z	3.13	68.63	15.43		80.0	
10503-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.28	72.10	18.03	2.23	80.0	± 9.6 %
		Y	5.66	78.98	21.16		80.0	
		Z	3.51	72.93	18.46		80.0	
10504-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.23	68.76	16.53	2.23	80.0	± 9.6 %
		Y	4.52	72.61	18.77		80.0	
		Z	3.37	69.27	16.86		80.0	
10505-AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.30	68.59	16.46	2.23	80.0	± 9.6 %
		Y	4.55	72.21	18.62		80.0	
		Z	3.45	69.07	16.79		80.0	
10506-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	3.79	71.96	18.16	2.23	80.0	± 9.6 %
		Y	6.01	77.83	20.70		80.0	
		Z	4.00	72.65	18.50		80.0	
10507-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.60	68.42	16.99	2.23	80.0	± 9.6 %
		Y	4.73	71.59	18.68		80.0	
		Z	3.73	68.80	17.23		80.0	

10508-AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.68	68.18	16.92	2.23	80.0	± 9.6 %
		Y	4.76	71.10	18.51		80.0	
		Z	3.80	68.53	17.14		80.0	
10509-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.13	70.75	17.74	2.23	80.0	± 9.6 %
		Y	5.82	75.01	19.64		80.0	
		Z	4.31	71.25	17.99		80.0	
10510-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.07	68.08	17.05	2.23	80.0	± 9.6 %
		Y	5.12	70.79	18.43		80.0	
		Z	4.19	68.40	17.24		80.0	
10511-AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.13	67.89	17.01	2.23	80.0	± 9.6 %
		Y	5.13	70.40	18.32		80.0	
		Z	4.25	68.18	17.18		80.0	
10512-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.28	72.05	18.12	2.23	80.0	± 9.6 %
		Y	6.53	77.54	20.44		80.0	
		Z	4.50	72.69	18.42		80.0	
10513-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.96	68.26	17.13	2.23	80.0	± 9.6 %
		Y	5.06	71.27	18.63		80.0	
		Z	4.08	68.61	17.32		80.0	
10514-AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.00	67.90	17.03	2.23	80.0	± 9.6 %
		Y	5.01	70.65	18.43		80.0	
		Z	4.11	68.22	17.21		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	0.86	62.66	14.01	0.00	150.0	± 9.6 %
		Y	0.95	63.46	14.92		150.0	
		Z	0.85	62.46	13.84		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.46	68.95	15.31	0.00	150.0	± 9.6 %
		Y	0.69	74.27	19.02		150.0	
		Z	0.44	67.92	14.65		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.69	64.20	14.31	0.00	150.0	± 9.6 %
		Y	0.81	65.76	15.74		150.0	
		Z	0.68	63.88	14.05		150.0	
10518-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.26	66.65	15.98	0.00	150.0	± 9.6 %
		Y	4.50	66.78	16.21		150.0	
		Z	4.28	66.58	15.94		150.0	
10519-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.41	66.83	16.07	0.00	150.0	± 9.6 %
		Y	4.69	67.01	16.32		150.0	
		Z	4.43	66.76	16.04		150.0	
10520-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.27	66.76	15.98	0.00	150.0	± 9.6 %
		Y	4.54	66.98	16.25		150.0	
		Z	4.29	66.69	15.95		150.0	
10521-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.20	66.73	15.96	0.00	150.0	± 9.6 %
		Y	4.48	66.98	16.24		150.0	
		Z	4.22	66.66	15.93		150.0	
10522-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.25	66.85	16.06	0.00	150.0	± 9.6 %
		Y	4.54	67.07	16.32		150.0	
		Z	4.28	66.79	16.03		150.0	

10523-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.18	66.83	15.97	0.00	150.0	± 9.6 %
		Y	4.42	66.94	16.17		150.0	
		Z	4.19	66.74	15.92		150.0	
10524-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.20	66.80	16.05	0.00	150.0	± 9.6 %
		Y	4.48	66.98	16.29		150.0	
		Z	4.22	66.73	16.01		150.0	
10525-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.23	65.91	15.68	0.00	150.0	± 9.6 %
		Y	4.47	66.04	15.89		150.0	
		Z	4.25	65.82	15.63		150.0	
10526-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.35	66.19	15.79	0.00	150.0	± 9.6 %
		Y	4.64	66.41	16.03		150.0	
		Z	4.37	66.12	15.75		150.0	
10527-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.29	66.15	15.73	0.00	150.0	± 9.6 %
		Y	4.56	66.37	15.97		150.0	
		Z	4.30	66.08	15.69		150.0	
10528-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.30	66.17	15.76	0.00	150.0	± 9.6 %
		Y	4.57	66.39	16.00		150.0	
		Z	4.32	66.10	15.72		150.0	
10529-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.30	66.17	15.76	0.00	150.0	± 9.6 %
		Y	4.57	66.39	16.00		150.0	
		Z	4.32	66.10	15.72		150.0	
10531-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.27	66.19	15.74	0.00	150.0	± 9.6 %
		Y	4.56	66.49	16.02		150.0	
		Z	4.29	66.13	15.70		150.0	
10532-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.15	66.05	15.67	0.00	150.0	± 9.6 %
		Y	4.43	66.35	15.95		150.0	
		Z	4.17	65.99	15.63		150.0	
10533-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.31	66.25	15.76	0.00	150.0	± 9.6 %
		Y	4.58	66.44	16.00		150.0	
		Z	4.32	66.17	15.72		150.0	
10534-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	4.86	66.20	15.85	0.00	150.0	± 9.6 %
		Y	5.10	66.46	16.04		150.0	
		Z	4.88	66.15	15.81		150.0	
10535-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	4.90	66.33	15.91	0.00	150.0	± 9.6 %
		Y	5.16	66.63	16.12		150.0	
		Z	4.93	66.30	15.88		150.0	
10536-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	4.80	66.33	15.89	0.00	150.0	± 9.6 %
		Y	5.04	66.60	16.08		150.0	
		Z	4.81	66.28	15.85		150.0	
10537-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	4.86	66.31	15.88	0.00	150.0	± 9.6 %
		Y	5.09	66.56	16.07		150.0	
		Z	4.87	66.26	15.84		150.0	
10538-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	4.92	66.28	15.91	0.00	150.0	± 9.6 %
		Y	5.18	66.57	16.11		150.0	
		Z	4.94	66.24	15.88		150.0	
10540-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	4.85	66.24	15.91	0.00	150.0	± 9.6 %
		Y	5.11	66.59	16.14		150.0	
		Z	4.87	66.21	15.88		150.0	

10541-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	4.84	66.16	15.85	0.00	150.0	± 9.6 %
		Y	5.09	66.46	16.07		150.0	
		Z	4.86	66.12	15.81		150.0	
10542-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	4.99	66.27	15.92	0.00	150.0	± 9.6 %
		Y	5.24	66.53	16.11		150.0	
		Z	5.01	66.22	15.89		150.0	
10543-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.06	66.33	15.98	0.00	150.0	± 9.6 %
		Y	5.31	66.55	16.15		150.0	
		Z	5.08	66.26	15.94		150.0	
10544-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.21	66.28	15.85	0.00	150.0	± 9.6 %
		Y	5.41	66.57	16.04		150.0	
		Z	5.22	66.25	15.82		150.0	
10545-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.38	66.72	16.02	0.00	150.0	± 9.6 %
		Y	5.59	66.96	16.17		150.0	
		Z	5.39	66.68	15.99		150.0	
10546-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.24	66.41	15.88	0.00	150.0	± 9.6 %
		Y	5.47	66.78	16.10		150.0	
		Z	5.25	66.38	15.85		150.0	
10547-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.32	66.51	15.93	0.00	150.0	± 9.6 %
		Y	5.54	66.81	16.11		150.0	
		Z	5.33	66.47	15.89		150.0	
10548-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	5.46	67.14	16.21	0.00	150.0	± 9.6 %
		Y	5.76	67.65	16.50		150.0	
		Z	5.49	67.14	16.20		150.0	
10550-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.29	66.58	15.98	0.00	150.0	± 9.6 %
		Y	5.50	66.79	16.12		150.0	
		Z	5.30	66.53	15.94		150.0	
10551-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.23	66.38	15.84	0.00	150.0	± 9.6 %
		Y	5.50	66.84	16.10		150.0	
		Z	5.26	66.37	15.82		150.0	
10552-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.21	66.39	15.85	0.00	150.0	± 9.6 %
		Y	5.42	66.65	16.02		150.0	
		Z	5.23	66.35	15.81		150.0	
10553-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.27	66.35	15.86	0.00	150.0	± 9.6 %
		Y	5.50	66.68	16.06		150.0	
		Z	5.29	66.32	15.83		150.0	
10554-AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	5.62	66.62	15.93	0.00	150.0	± 9.6 %
		Y	5.81	66.93	16.12		150.0	
		Z	5.64	66.59	15.90		150.0	
10555-AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	5.72	66.85	16.03	0.00	150.0	± 9.6 %
		Y	5.93	67.21	16.24		150.0	
		Z	5.73	66.84	16.01		150.0	
10556-AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	5.76	66.96	16.07	0.00	150.0	± 9.6 %
		Y	5.95	67.26	16.25		150.0	
		Z	5.77	66.93	16.04		150.0	
10557-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	5.71	66.83	16.03	0.00	150.0	± 9.6 %
		Y	5.92	67.17	16.23		150.0	
		Z	5.73	66.80	16.00		150.0	

10558-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	5.73	66.90	16.08	0.00	150.0	± 9.6 %
		Y	5.97	67.33	16.32		150.0	
		Z	5.75	66.91	16.07		150.0	
10560-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	5.74	66.82	16.08	0.00	150.0	± 9.6 %
		Y	5.97	67.19	16.29		150.0	
		Z	5.76	66.81	16.06		150.0	
10561-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	5.68	66.81	16.10	0.00	150.0	± 9.6 %
		Y	5.89	67.15	16.31		150.0	
		Z	5.69	66.79	16.08		150.0	
10562-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	5.73	66.98	16.19	0.00	150.0	± 9.6 %
		Y	6.00	67.52	16.49		150.0	
		Z	5.75	66.99	16.18		150.0	
10563-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	5.82	66.93	16.13	0.00	150.0	± 9.6 %
		Y	6.21	67.75	16.57		150.0	
		Z	5.84	66.91	16.11		150.0	
10564-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)	X	4.58	66.68	16.11	0.46	150.0	± 9.6 %
		Y	4.83	66.87	16.38		150.0	
		Z	4.60	66.62	16.09		150.0	
10565-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle)	X	4.78	67.11	16.45	0.46	150.0	± 9.6 %
		Y	5.06	67.31	16.69		150.0	
		Z	4.80	67.06	16.42		150.0	
10566-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle)	X	4.61	66.92	16.24	0.46	150.0	± 9.6 %
		Y	4.90	67.17	16.51		150.0	
		Z	4.64	66.87	16.22		150.0	
10567-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle)	X	4.66	67.37	16.65	0.46	150.0	± 9.6 %
		Y	4.93	67.55	16.86		150.0	
		Z	4.68	67.31	16.62		150.0	
10568-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle)	X	4.51	66.63	15.96	0.46	150.0	± 9.6 %
		Y	4.82	66.97	16.30		150.0	
		Z	4.54	66.59	15.94		150.0	
10569-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle)	X	4.65	67.61	16.79	0.46	150.0	± 9.6 %
		Y	4.89	67.65	16.93		150.0	
		Z	4.66	67.53	16.75		150.0	
10570-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle)	X	4.64	67.35	16.66	0.46	150.0	± 9.6 %
		Y	4.92	67.49	16.86		150.0	
		Z	4.67	67.30	16.63		150.0	
10571-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.06	64.06	14.93	0.46	130.0	± 9.6 %
		Y	1.26	65.96	16.37		130.0	
		Z	1.07	64.04	14.90		130.0	
10572-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.08	64.65	15.30	0.46	130.0	± 9.6 %
		Y	1.29	66.69	16.79		130.0	
		Z	1.08	64.62	15.26		130.0	
10573-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	1.87	83.97	21.28	0.46	130.0	± 9.6 %
		Y	23.44	122.83	33.22		130.0	
		Z	1.81	83.10	20.89		130.0	
10574-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.18	70.62	18.27	0.46	130.0	± 9.6 %
		Y	1.61	74.73	20.56		130.0	
		Z	1.18	70.41	18.13		130.0	

10575-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	X	4.37	66.49	16.15	0.46	130.0	± 9.6 %
		Y	4.64	66.73	16.48		130.0	
		Z	4.40	66.46	16.15		130.0	
10576-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	X	4.40	66.70	16.25	0.46	130.0	± 9.6 %
		Y	4.67	66.90	16.54		130.0	
		Z	4.43	66.66	16.24		130.0	
10577-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	X	4.57	66.94	16.40	0.46	130.0	± 9.6 %
		Y	4.87	67.17	16.70		130.0	
		Z	4.60	66.90	16.39		130.0	
10578-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	X	4.48	67.10	16.52	0.46	130.0	± 9.6 %
		Y	4.77	67.34	16.80		130.0	
		Z	4.50	67.07	16.51		130.0	
10579-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	X	4.22	66.22	15.71	0.46	130.0	± 9.6 %
		Y	4.54	66.65	16.14		130.0	
		Z	4.25	66.21	15.72		130.0	
10580-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	X	4.26	66.28	15.73	0.46	130.0	± 9.6 %
		Y	4.58	66.69	16.16		130.0	
		Z	4.29	66.27	15.75		130.0	
10581-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	X	4.39	67.18	16.49	0.46	130.0	± 9.6 %
		Y	4.67	67.41	16.76		130.0	
		Z	4.41	67.14	16.47		130.0	
10582-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	X	4.15	65.96	15.47	0.46	130.0	± 9.6 %
		Y	4.48	66.42	15.93		130.0	
		Z	4.18	65.96	15.49		130.0	
10583-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.37	66.49	16.15	0.46	130.0	± 9.6 %
		Y	4.64	66.73	16.48		130.0	
		Z	4.40	66.46	16.15		130.0	
10584-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.40	66.70	16.25	0.46	130.0	± 9.6 %
		Y	4.67	66.90	16.54		130.0	
		Z	4.43	66.66	16.24		130.0	
10585-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	4.57	66.94	16.40	0.46	130.0	± 9.6 %
		Y	4.87	67.17	16.70		130.0	
		Z	4.60	66.90	16.39		130.0	
10586-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	4.48	67.10	16.52	0.46	130.0	± 9.6 %
		Y	4.77	67.34	16.80		130.0	
		Z	4.50	67.07	16.51		130.0	
10587-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.22	66.22	15.71	0.46	130.0	± 9.6 %
		Y	4.54	66.65	16.14		130.0	
		Z	4.25	66.21	15.72		130.0	
10588-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.26	66.28	15.73	0.46	130.0	± 9.6 %
		Y	4.58	66.69	16.16		130.0	
		Z	4.29	66.27	15.75		130.0	
10589-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.39	67.18	16.49	0.46	130.0	± 9.6 %
		Y	4.67	67.41	16.76		130.0	
		Z	4.41	67.14	16.47		130.0	
10590-AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.15	65.96	15.47	0.46	130.0	± 9.6 %
		Y	4.48	66.42	15.93		130.0	
		Z	4.18	65.96	15.49		130.0	

10591-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.53	66.59	16.29	0.46	130.0	± 9.6 %
		Y	4.79	66.78	16.57		130.0	
		Z	4.56	66.55	16.28		130.0	
10592-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	4.65	66.88	16.41	0.46	130.0	± 9.6 %
		Y	4.94	67.11	16.69		130.0	
		Z	4.68	66.85	16.41		130.0	
10593-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	4.57	66.74	16.26	0.46	130.0	± 9.6 %
		Y	4.86	67.03	16.58		130.0	
		Z	4.60	66.72	16.26		130.0	
10594-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.62	66.94	16.44	0.46	130.0	± 9.6 %
		Y	4.92	67.19	16.73		130.0	
		Z	4.65	66.91	16.44		130.0	
10595-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	4.59	66.90	16.34	0.46	130.0	± 9.6 %
		Y	4.89	67.15	16.63		130.0	
		Z	4.62	66.88	16.34		130.0	
10596-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.52	66.86	16.33	0.46	130.0	± 9.6 %
		Y	4.83	67.16	16.64		130.0	
		Z	4.55	66.84	16.32		130.0	
10597-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.47	66.72	16.17	0.46	130.0	± 9.6 %
		Y	4.78	67.06	16.53		130.0	
		Z	4.50	66.70	16.18		130.0	
10598-AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.47	66.99	16.47	0.46	130.0	± 9.6 %
		Y	4.76	67.30	16.78		130.0	
		Z	4.50	66.97	16.46		130.0	
10599-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.21	67.04	16.54	0.46	130.0	± 9.6 %
		Y	5.45	67.28	16.75		130.0	
		Z	5.23	67.01	16.52		130.0	
10600-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.30	67.38	16.68	0.46	130.0	± 9.6 %
		Y	5.56	67.63	16.89		130.0	
		Z	5.33	67.36	16.67		130.0	
10601-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.21	67.17	16.59	0.46	130.0	± 9.6 %
		Y	5.46	67.42	16.81		130.0	
		Z	5.23	67.15	16.58		130.0	
10602-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.31	67.24	16.54	0.46	130.0	± 9.6 %
		Y	5.55	67.45	16.74		130.0	
		Z	5.36	67.29	16.57		130.0	
10603-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.38	67.54	16.83	0.46	130.0	± 9.6 %
		Y	5.63	67.74	17.01		130.0	
		Z	5.43	67.60	16.86		130.0	
10604-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.27	67.20	16.64	0.46	130.0	± 9.6 %
		Y	5.45	67.25	16.76		130.0	
		Z	5.31	67.24	16.67		130.0	
10605-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.29	67.27	16.67	0.46	130.0	± 9.6 %
		Y	5.55	67.54	16.90		130.0	
		Z	5.33	67.27	16.67		130.0	
10606-AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.07	66.67	16.22	0.46	130.0	± 9.6 %
		Y	5.31	66.94	16.47		130.0	
		Z	5.09	66.64	16.21		130.0	

10607-AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.38	65.92	15.93	0.46	130.0	± 9.6 %
		Y	4.63	66.11	16.20		130.0	
		Z	4.40	65.87	15.92		130.0	
10608-AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.52	66.25	16.07	0.46	130.0	± 9.6 %
		Y	4.82	66.51	16.36		130.0	
		Z	4.54	66.22	16.07		130.0	
10609-AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.41	66.07	15.89	0.46	130.0	± 9.6 %
		Y	4.71	66.37	16.21		130.0	
		Z	4.44	66.04	15.88		130.0	
10610-AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.46	66.25	16.07	0.46	130.0	± 9.6 %
		Y	4.76	66.53	16.37		130.0	
		Z	4.49	66.22	16.06		130.0	
10611-AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4.38	66.04	15.90	0.46	130.0	± 9.6 %
		Y	4.67	66.33	16.22		130.0	
		Z	4.40	66.01	15.90		130.0	
10612-AAB	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.36	66.15	15.93	0.46	130.0	± 9.6 %
		Y	4.68	66.50	16.27		130.0	
		Z	4.40	66.13	15.93		130.0	
10613-AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.36	65.96	15.77	0.46	130.0	± 9.6 %
		Y	4.69	66.38	16.15		130.0	
		Z	4.39	65.95	15.77		130.0	
10614-AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	4.33	66.23	16.05	0.46	130.0	± 9.6 %
		Y	4.63	66.56	16.38		130.0	
		Z	4.36	66.20	16.05		130.0	
10615-AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	4.36	65.84	15.65	0.46	130.0	± 9.6 %
		Y	4.67	66.17	16.00		130.0	
		Z	4.39	65.81	15.64		130.0	
10616-AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.01	66.24	16.12	0.46	130.0	± 9.6 %
		Y	5.27	66.54	16.36		130.0	
		Z	5.04	66.22	16.11		130.0	
10617-AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.06	66.37	16.16	0.46	130.0	± 9.6 %
		Y	5.33	66.71	16.42		130.0	
		Z	5.09	66.38	16.17		130.0	
10618-AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	4.97	66.44	16.22	0.46	130.0	± 9.6 %
		Y	5.22	66.73	16.44		130.0	
		Z	5.00	66.44	16.21		130.0	
10619-AAB	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	4.98	66.23	16.04	0.46	130.0	± 9.6 %
		Y	5.23	66.53	16.28		130.0	
		Z	5.00	66.21	16.03		130.0	
10620-AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.05	66.24	16.09	0.46	130.0	± 9.6 %
		Y	5.33	66.58	16.35		130.0	
		Z	5.08	66.23	16.09		130.0	
10621-AAB	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.07	66.39	16.30	0.46	130.0	± 9.6 %
		Y	5.33	66.69	16.53		130.0	
		Z	5.10	66.38	16.30		130.0	
10622-AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.05	66.47	16.33	0.46	130.0	± 9.6 %
		Y	5.33	66.85	16.60		130.0	
		Z	5.09	66.49	16.34		130.0	

10623-AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	4.94	65.99	15.95	0.46	130.0	± 9.6 %
		Y	5.22	66.40	16.25		130.0	
		Z	4.97	65.99	15.95		130.0	
10624-AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.14	66.27	16.16	0.46	130.0	± 9.6 %
		Y	5.40	66.58	16.40		130.0	
		Z	5.17	66.26	16.15		130.0	
10625-AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	5.24	66.45	16.31	0.46	130.0	± 9.6 %
		Y	5.75	67.49	16.91		130.0	
		Z	5.30	66.54	16.36		130.0	
10626-AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.34	66.26	16.08	0.46	130.0	± 9.6 %
		Y	5.56	66.59	16.31		130.0	
		Z	5.36	66.26	16.08		130.0	
10627-AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	5.56	66.86	16.35	0.46	130.0	± 9.6 %
		Y	5.78	67.11	16.53		130.0	
		Z	5.59	66.85	16.34		130.0	
10628-AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.33	66.23	15.96	0.46	130.0	± 9.6 %
		Y	5.59	66.68	16.26		130.0	
		Z	5.36	66.24	15.96		130.0	
10629-AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.43	66.40	16.04	0.46	130.0	± 9.6 %
		Y	5.66	66.73	16.27		130.0	
		Z	5.45	66.38	16.03		130.0	
10630-AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	5.67	67.35	16.52	0.46	130.0	± 9.6 %
		Y	6.05	68.08	16.95		130.0	
		Z	5.72	67.41	16.54		130.0	
10631-AAB	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	5.66	67.42	16.76	0.46	130.0	± 9.6 %
		Y	5.98	67.98	17.08		130.0	
		Z	5.69	67.45	16.76		130.0	
10632-AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.57	67.05	16.59	0.46	130.0	± 9.6 %
		Y	5.75	67.18	16.70		130.0	
		Z	5.58	67.01	16.57		130.0	
10633-AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	5.37	66.37	16.07	0.46	130.0	± 9.6 %
		Y	5.66	66.86	16.37		130.0	
		Z	5.41	66.42	16.09		130.0	
10634-AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.39	66.52	16.20	0.46	130.0	± 9.6 %
		Y	5.64	66.88	16.44		130.0	
		Z	5.42	66.52	16.19		130.0	
10635-AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.24	65.73	15.52	0.46	130.0	± 9.6 %
		Y	5.52	66.23	15.86		130.0	
		Z	5.27	65.74	15.52		130.0	
10636-AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	5.77	66.61	16.17	0.46	130.0	± 9.6 %
		Y	5.96	66.94	16.39		130.0	
		Z	5.79	66.62	16.16		130.0	
10637-AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	5.89	66.92	16.31	0.46	130.0	± 9.6 %
		Y	6.11	67.30	16.55		130.0	
		Z	5.92	66.94	16.31		130.0	
10638-AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	5.91	66.97	16.31	0.46	130.0	± 9.6 %
		Y	6.12	67.29	16.52		130.0	
		Z	5.93	66.96	16.30		130.0	

10639-AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	5.87	66.86	16.30	0.46	130.0	± 9.6 %
		Y	6.10	67.25	16.54		130.0	
		Z	5.89	66.87	16.30		130.0	
10640-AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	5.83	66.76	16.18	0.46	130.0	± 9.6 %
		Y	6.10	67.26	16.50		130.0	
		Z	5.87	66.80	16.20		130.0	
10641-AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	5.93	66.82	16.24	0.46	130.0	± 9.6 %
		Y	6.14	67.15	16.46		130.0	
		Z	5.95	66.83	16.24		130.0	
10642-AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	5.96	67.05	16.53	0.46	130.0	± 9.6 %
		Y	6.19	67.41	16.75		130.0	
		Z	5.98	67.06	16.53		130.0	
10643-AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	5.80	66.71	16.24	0.46	130.0	± 9.6 %
		Y	6.02	67.10	16.50		130.0	
		Z	5.82	66.73	16.25		130.0	
10644-AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	5.86	66.92	16.37	0.46	130.0	± 9.6 %
		Y	6.18	67.59	16.76		130.0	
		Z	5.90	66.97	16.39		130.0	
10645-AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	5.99	66.98	16.36	0.46	130.0	± 9.6 %
		Y	6.49	68.10	16.98		130.0	
		Z	6.03	67.03	16.38		130.0	
10646-AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	12.61	100.82	34.02	9.30	60.0	± 9.6 %
		Y	100.00	145.59	46.83		60.0	
		Z	15.08	104.80	35.48		60.0	
10647-AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	11.12	98.74	33.49	9.30	60.0	± 9.6 %
		Y	100.00	146.81	47.36		60.0	
		Z	13.27	102.66	34.96		60.0	
10648-AAA	CDMA2000 (1x Advanced)	X	0.39	60.00	6.53	0.00	150.0	± 9.6 %
		Y	0.67	63.72	10.75		150.0	
		Z	0.40	60.08	6.74		150.0	
10652-AAB	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.41	66.87	16.04	2.23	80.0	± 9.6 %
		Y	4.14	68.74	17.41		80.0	
		Z	3.49	67.05	16.20		80.0	
10653-AAB	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	3.95	66.20	16.38	2.23	80.0	± 9.6 %
		Y	4.57	67.68	17.37		80.0	
		Z	4.02	66.33	16.49		80.0	
10654-AAB	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	3.96	65.83	16.43	2.23	80.0	± 9.6 %
		Y	4.52	67.28	17.35		80.0	
		Z	4.02	65.96	16.53		80.0	
10655-AAB	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.03	65.75	16.47	2.23	80.0	± 9.6 %
		Y	4.58	67.25	17.38		80.0	
		Z	4.09	65.88	16.56		80.0	
10658-AAA	Pulse Waveform (200Hz, 10%)	X	7.98	78.81	17.15	10.00	50.0	± 9.6 %
		Y	100.00	115.44	29.28		50.0	
		Z	14.28	86.81	20.20		50.0	
10659-AAA	Pulse Waveform (200Hz, 20%)	X	33.61	94.74	20.35	6.99	60.0	± 9.6 %
		Y	100.00	112.33	26.83		60.0	
		Z	100.00	107.95	24.05		60.0	

10660-AAA	Pulse Waveform (200Hz, 40%)	X	100.00	101.82	19.87	3.98	80.0	± 9.6 %
		Y	100.00	110.96	24.90		80.0	
		Z	100.00	104.09	21.00		80.0	
10661-AAA	Pulse Waveform (200Hz, 60%)	X	100.00	96.37	16.46	2.22	100.0	± 9.6 %
		Y	100.00	112.03	24.11		100.0	
		Z	100.00	98.96	17.66		100.0	
10662-AAA	Pulse Waveform (200Hz, 80%)	X	0.21	60.00	3.63	0.97	120.0	± 9.6 %
		Y	100.00	114.12	23.23		120.0	
		Z	0.21	60.00	3.89		120.0	

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	38.2 \pm 6 %	1.87 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.3 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.20 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	52.1 \pm 6 %	2.02 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.6 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.4 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.91 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.4 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.2 Ω + 1.2 j Ω
Return Loss	- 26.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.1 Ω + 4.8 j Ω
Return Loss	- 26.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.158 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 13, 2014

DASY5 Validation Report for Head TSL

Date: 20.06.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 937

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.72, 7.72, 7.72); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 114.8 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.2 W/kg

Maximum value of SAR (measured) = 22.3 W/kg

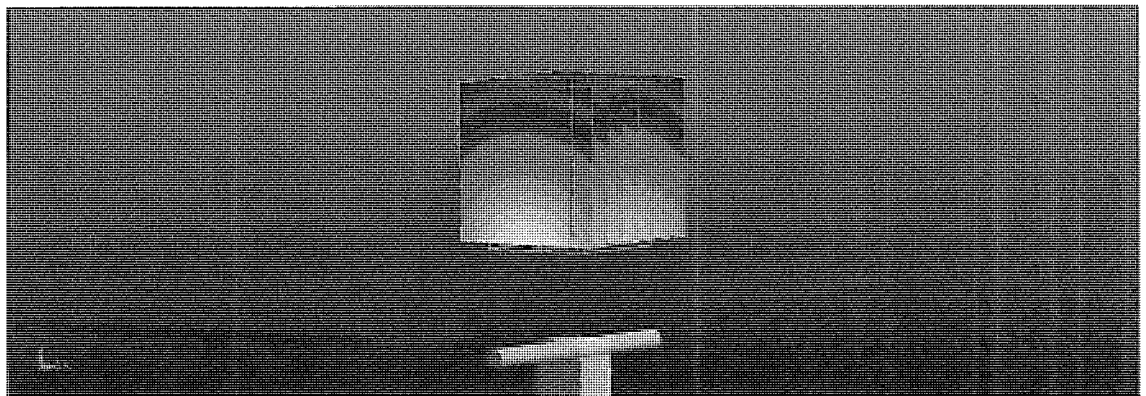

0 dB = 22.3 W/kg = 13.48 dBW/kg

Impedance Measurement Plot for Head TSL


20 Jun 2016 14:55:54

[CH1] S11 1 U FS

1: 55.170 Ω 1.1563 Ω 75.111 μH

2 450.000 000 MHz

*
De1
CA
Avg
16
H1d

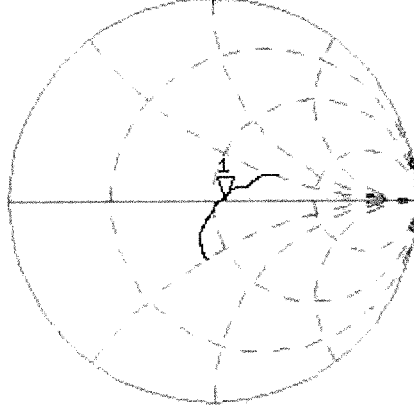


CH2 S11 LOG

5 dB/REF -20 dB

1:-25.963 dB

2 450.000 000 MHz

CA
H1d

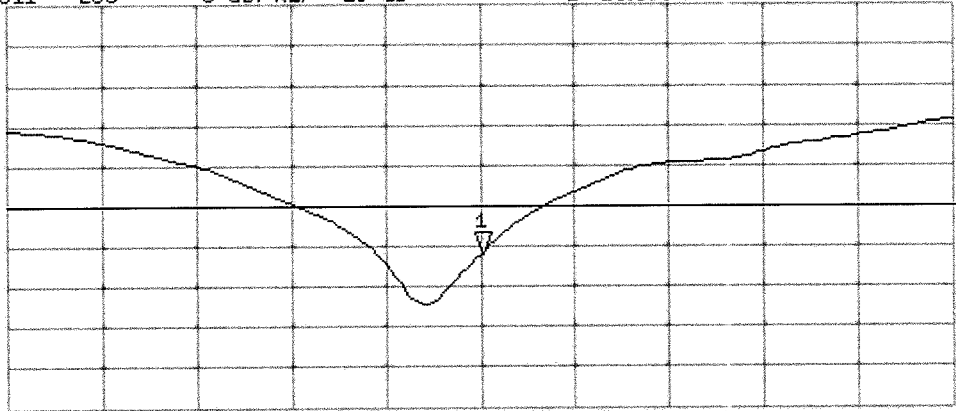

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 20.06.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 937

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (8x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.08 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 25.0 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.91 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

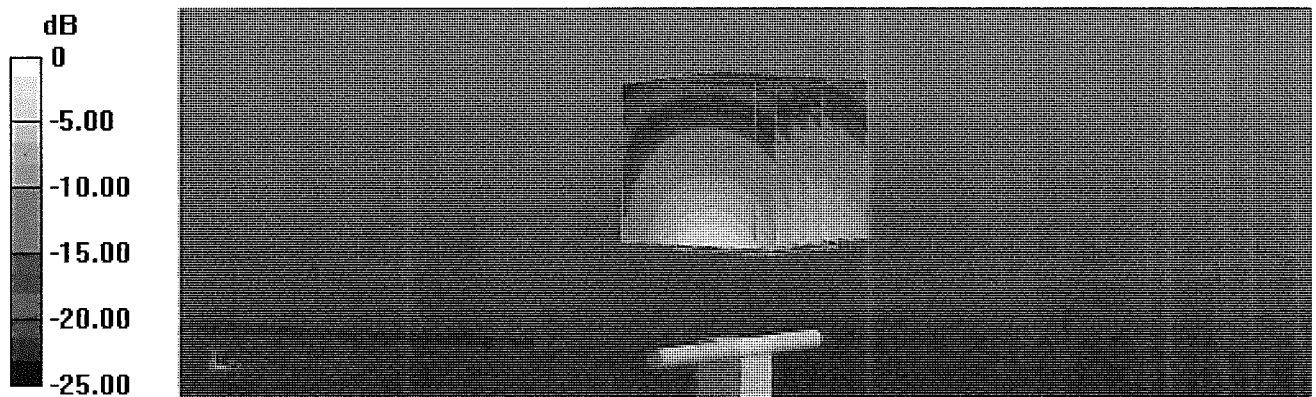


0 dB = 20.7 W/kg = 13.16 dBW/kg

Impedance Measurement Plot for Body TSL

20 Jun 2016 08:27:25


CH1 S11 1 U FS 1: 51.148 Ω 4.8027 Ω 311.99 pH 2 450.000 000 MHz

*
De1
Cor
Avg
16
H1d

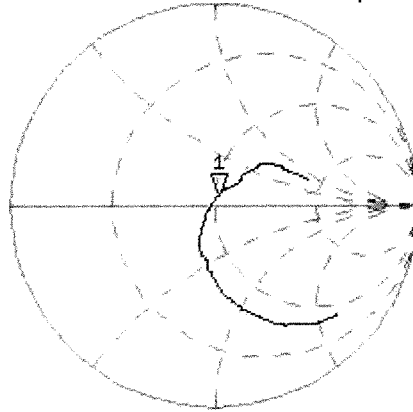

CH2 S11 L06 5 dB/REF -20 dB 1:-26.260 dB 2 450.000 000 MHz

Cor
H1d

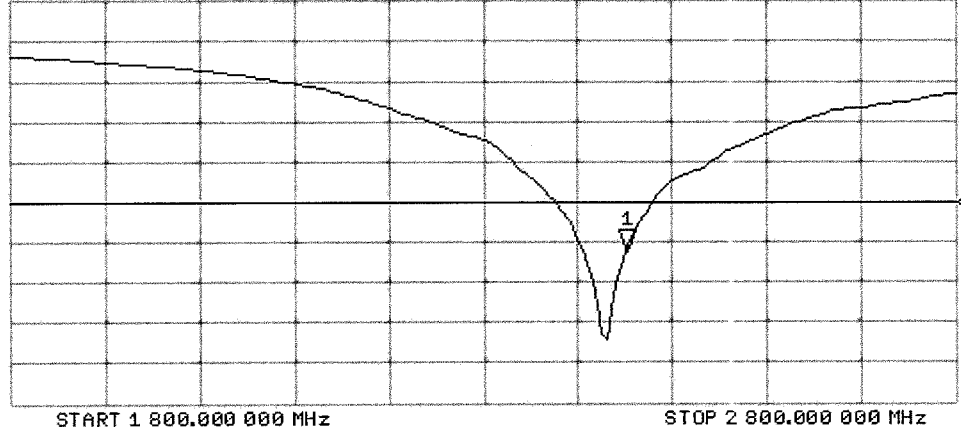



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	4.55 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.93 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	78.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.27 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.5 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	4.64 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.8 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	4.84 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.4 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.2 ± 6 %	4.95 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.43 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	83.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.42 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.9 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.0 ± 6 %	5.16 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.94 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	78.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.6 ± 6 %	5.44 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	71.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.02 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.4 ± 6 %	5.57 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.3 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.10 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.9 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.0 ± 6 %	5.84 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.93 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.21 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.9 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.9 ± 6 %	5.98 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.90 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	78.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.1 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.5 ± 6 %	6.26 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.48 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.4 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.7 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	45.9 Ω - 6.9 j Ω
Return Loss	- 21.6 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	45.8 Ω - 5.4 j Ω
Return Loss	- 22.9 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	47.9 Ω - 6.2 j Ω
Return Loss	- 23.6 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	51.0 Ω - 5.8 j Ω
Return Loss	- 24.7 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	51.0 Ω - 8.0 j Ω
Return Loss	- 21.9 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	47.7 Ω - 8.9 j Ω
Return Loss	- 20.6 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	47.6 Ω - 6.0 j Ω
Return Loss	- 23.6 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	50.2 Ω - 5.1 j Ω
Return Loss	- 25.8 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	53.9 Ω - 5.2 j Ω
Return Loss	- 24.1 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	54.5 Ω - 6.7 j Ω
Return Loss	- 22.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.205 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 06, 2013

DASY5 Validation Report for Head TSL

Date: 15.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1164

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.55$ S/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 4.64$ S/m; $\epsilon_r = 34.7$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 4.84$ S/m; $\epsilon_r = 34.4$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 4.95$ S/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.16$ S/m; $\epsilon_r = 34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.76, 5.76, 5.76); Calibrated: 31.12.2016, ConvF(5.35, 5.35, 5.35); Calibrated: 31.12.2016, ConvF(5.2, 5.2, 5.2); Calibrated: 31.12.2016, ConvF(5.09, 5.09, 5.09); Calibrated: 31.12.2016, ConvF(5.01, 5.01, 5.01); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.10.0(1444); SEMCAD X 14.6.10(7416)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.06 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 29.4 W/kg

SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 18.0 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.25 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.13 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 32.1 W/kg

SAR(1 g) = 8.26 W/kg; SAR(10 g) = 2.36 W/kg

Maximum value of SAR (measured) = 19.3 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.97 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 8.43 W/kg; SAR(10 g) = 2.42 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.42 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 32.2 W/kg

SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

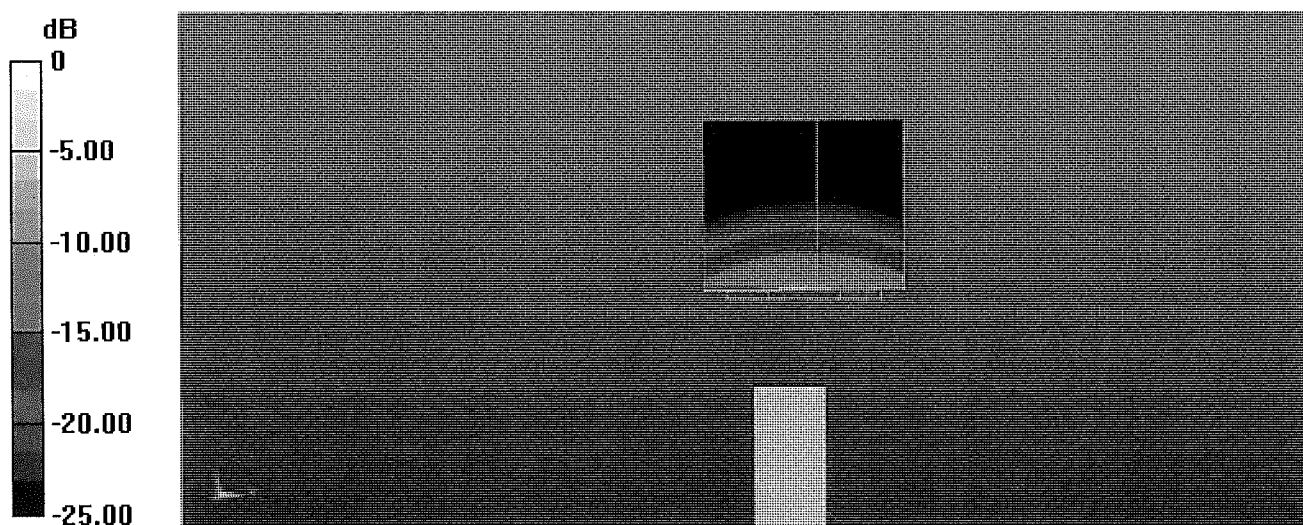


0 dB = 18.0 W/kg = 12.55 dBW/kg

Impedance Measurement Plot for Head TSL

15 May 2017 12:59:55

CH1 S11 1 U FS 1: 45.883 Ω -6.8887 Ω 4.4431 μ F 5 200.000 000 MHz


*
De1
Cor
Avg
16
H1d

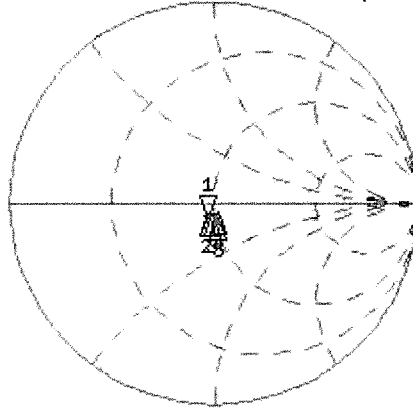

CH1 Markers
2: 45.818 Ω
-5.4434 Ω
5.30000 GHz
3: 47.910 Ω
-6.1523 Ω
5.50000 GHz
4: 50.961 Ω
-5.7949 Ω
5.60000 GHz
5: 51.010 Ω
-8.0469 Ω
5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -21.568 dB 5 200.000 000 MHz

Cor
Avg
16
H1d

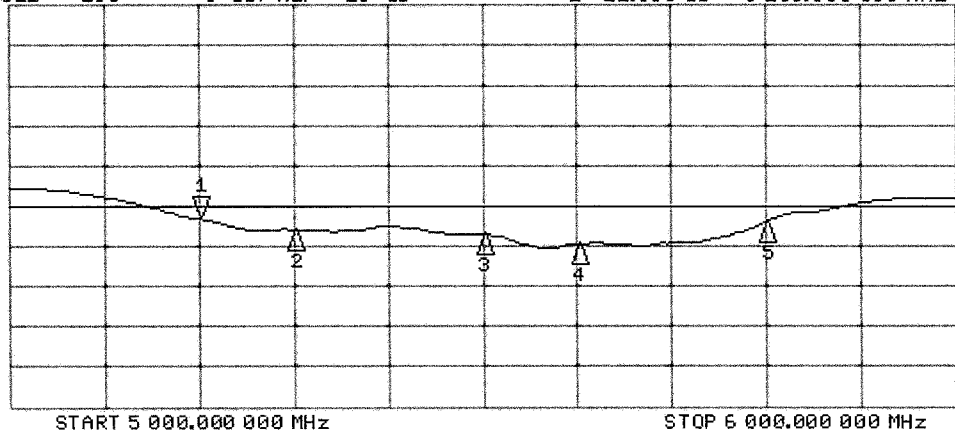

CH2 Markers
2: -22.910 dB
5.30000 GHz
3: -23.580 dB
5.50000 GHz
4: -24.718 dB
5.60000 GHz
5: -21.930 dB
5.80000 GHz

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1164

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.44$ S/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5300$ MHz; $\sigma = 5.57$ S/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5500$ MHz; $\sigma = 5.84$ S/m; $\epsilon_r = 47$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.98$ S/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 6.26$ S/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.29, 5.29, 5.29); Calibrated: 31.12.2016, ConvF(5.04, 5.04, 5.04); Calibrated: 31.12.2016, ConvF(4.62, 4.62, 4.62); Calibrated: 31.12.2016, ConvF(4.57, 4.57, 4.57); Calibrated: 31.12.2016, ConvF(4.48, 4.48, 4.48); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1444); SEMCAD X 14.6.10(7416)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.62 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 7.17 W/kg; SAR(10 g) = 2.02 W/kg

Maximum value of SAR (measured) = 16.4 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.19 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 7.47 W/kg; SAR(10 g) = 2.1 W/kg

Maximum value of SAR (measured) = 18.3 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.53 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 20.0 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.97 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 19.8 W/kg


Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.28 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 7.48 W/kg; SAR(10 g) = 2.09 W/kg

Maximum value of SAR (measured) = 19.0 W/kg

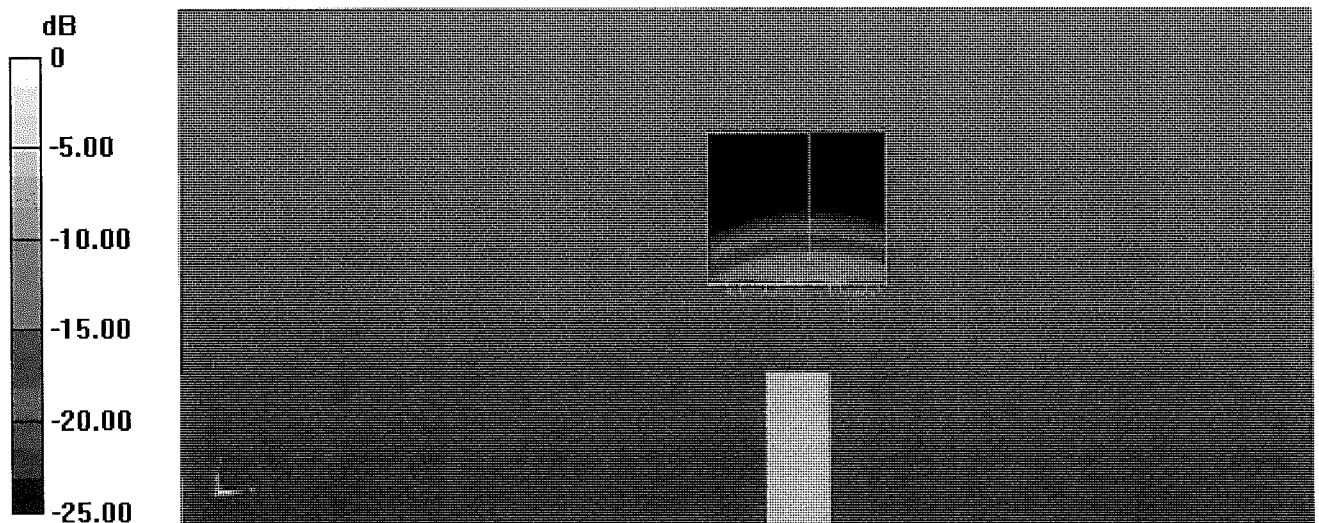


0 dB = 19.0 W/kg = 12.79 dBW/kg

Impedance Measurement Plot for Body TSL

12 May 2017 10:17:42

CH1 S11 1 U FS 1: 47.723 Ω -8.9180 Ω 3.4320 pF 5 200.000 000 MHz


*
Del
Cor
Avg
16
H1d

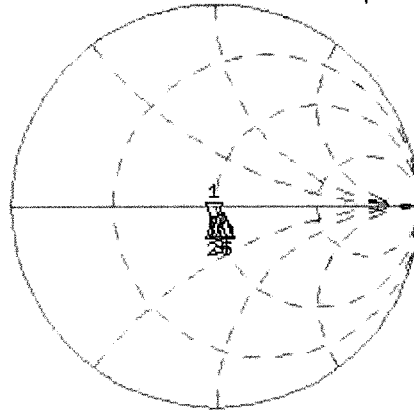

CH1 Markers
2: 47.584 Ω
-5.9883 Ω
5.30000 GHz
3: 50.189 Ω
-5.1172 Ω
5.50000 GHz
4: 53.879 Ω
-5.2188 Ω
5.60000 GHz
5: 54.498 Ω
-6.7480 Ω
5.80000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1:-20.556 dB 5 200.000 000 MHz

Cor
Avg
16
H1d

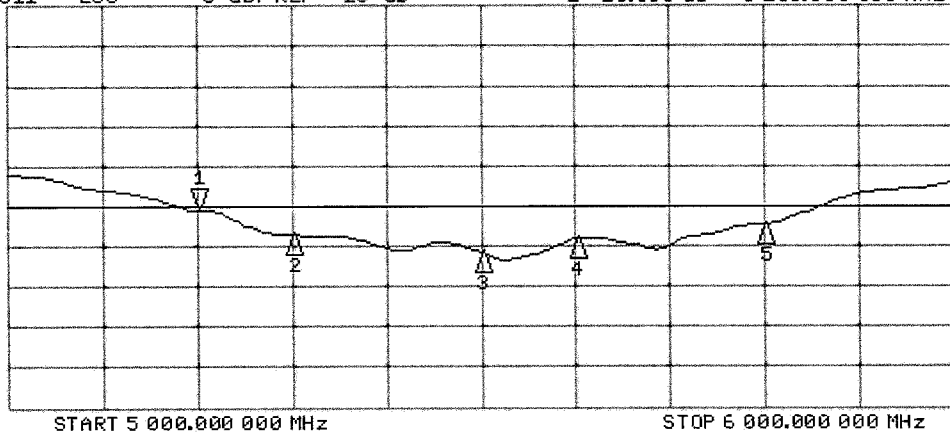

CH2 Markers
2:-23.606 dB
5.30000 GHz
3:-25.833 dB
5.50000 GHz
4:-24.079 dB
5.60000 GHz
5:-22.217 dB
5.80000 GHz

The below results show the latest return loss and impedance measurements for each dipole performed by the lab:

Dipole ID #0239			
Dipole 2450MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Previous	-28.82	47.5 – 2.5 j	2017-03-17
Last	-27.60	45.5 – 0.5 j	2018-03-07
Dipole ID #0124			
Dipole 5200MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Last	-20.6	47.7 – 8.9 j	2017-05-15
Dipole 5300MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Last	-23.6	47.6 – 6.0 j	2017-05-15
Dipole 5500MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Last	-25.8	50.2 - 5.1 j	2017-05-15
Dipole 5600MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Last	-24.1	53.9 – 5.2 j	2017-05-15
Dipole 5800MHz Body TSL			
	Return Loss [dB]	Impedance [Ω]	Date
Last	-22.2	54.5 – 6.7 j	2017-05-15