


Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 38 (5190MHz)

**Horizontal**

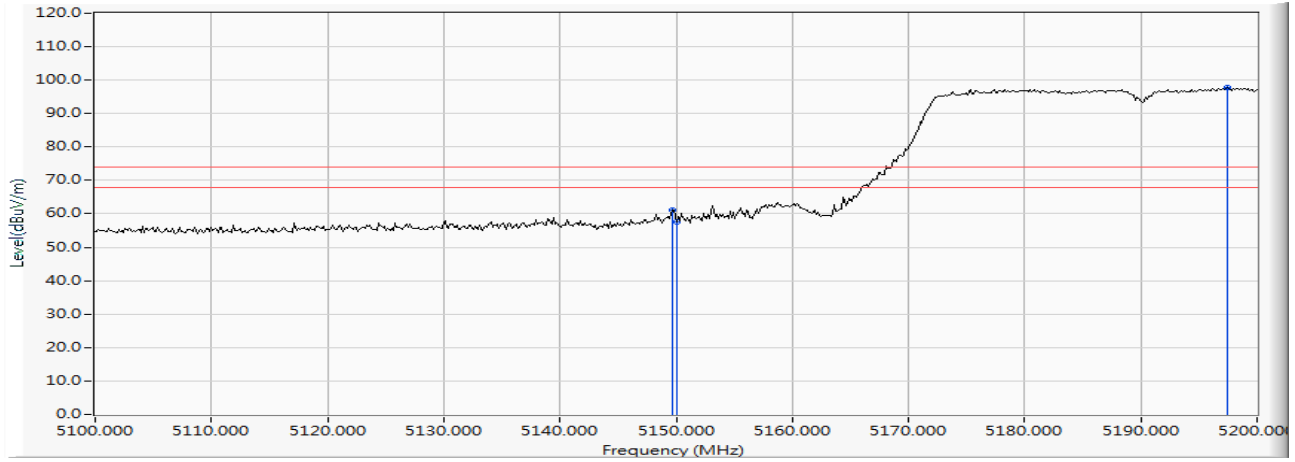


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.710	10.472	50.618	61.089	-12.911	74.000	PEAK
2		5150.000	10.470	47.170	57.641	-16.359	74.000	PEAK
3	*	5197.391	10.341	87.358	97.699	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/25  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 38 (5190MHz)

**Horizontal**

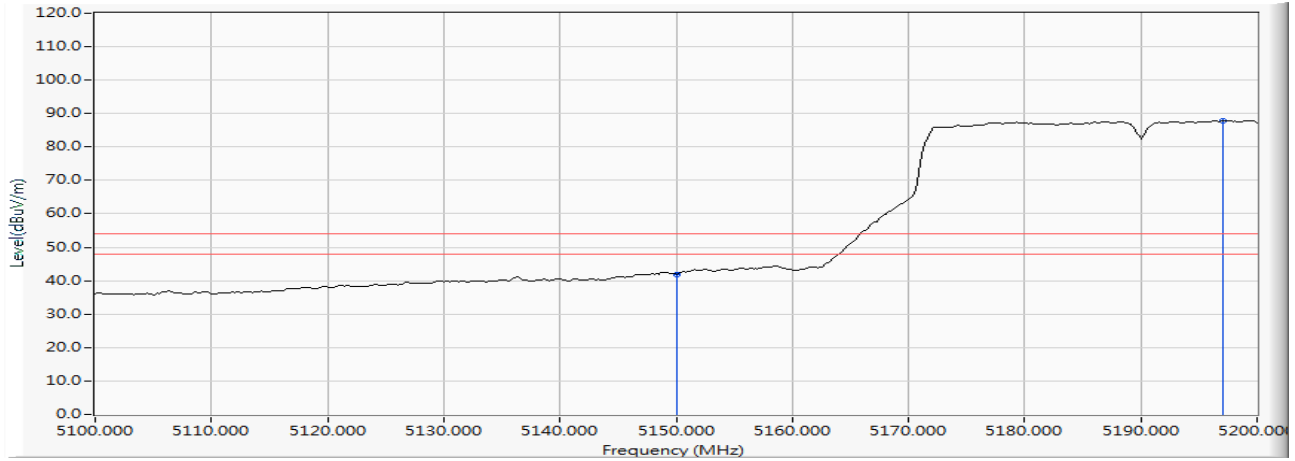


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	31.478	41.949	-12.051	54.000	AVERAGE
2	*	5197.101	10.342	77.588	87.930	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 38 (5190MHz)

**Vertical**

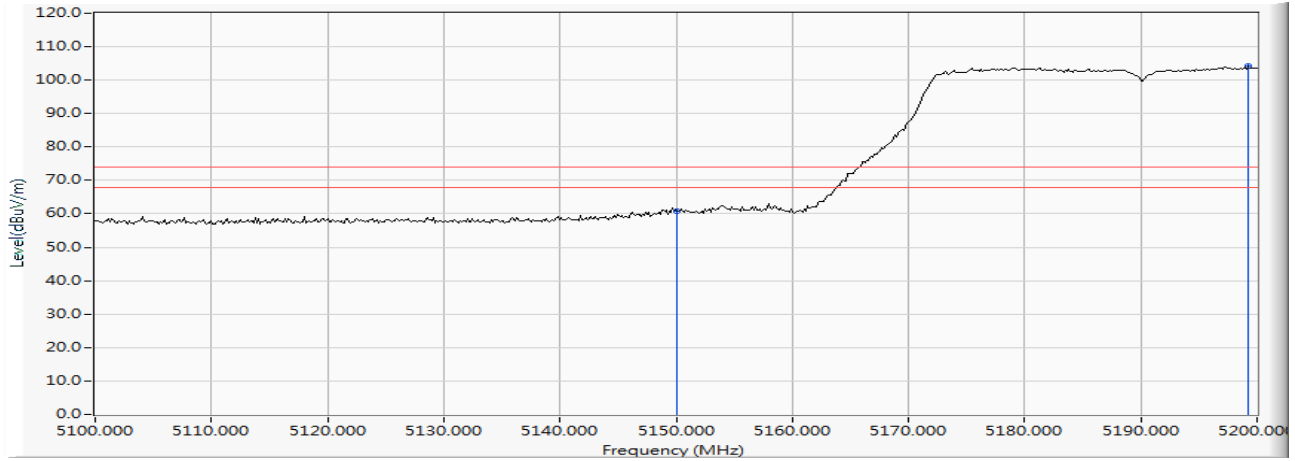


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	48.435	60.825	-13.175	74.000	PEAK
2	*	5199.275	12.564	91.527	104.091	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 38 (5190MHz)

**Vertical**

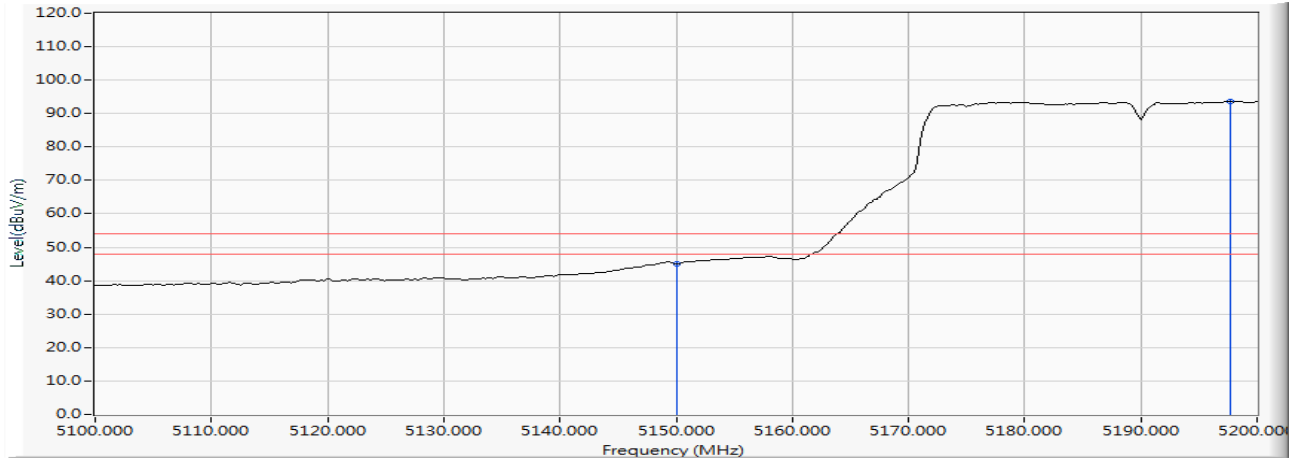


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	32.604	44.994	-9.006	54.000	AVERAGE
2	*	5197.681	12.558	81.059	93.617	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 62 (5310MHz)

**Horizontal**

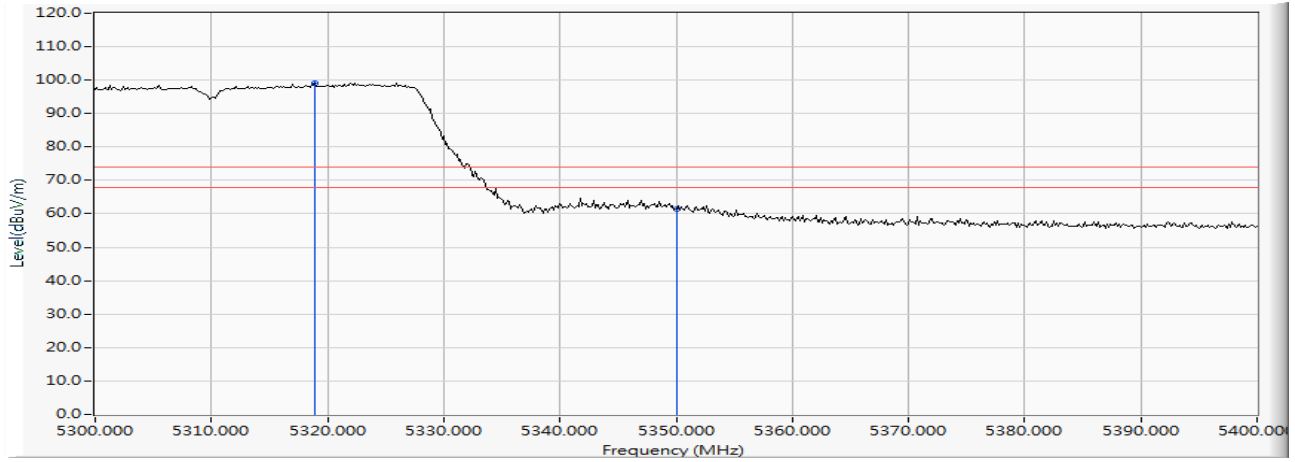


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5318.841	11.104	88.091	99.195	--	--	PEAK
2		5350.000	11.024	50.453	61.477	-12.523	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 62 (5310MHz)

**Horizontal**

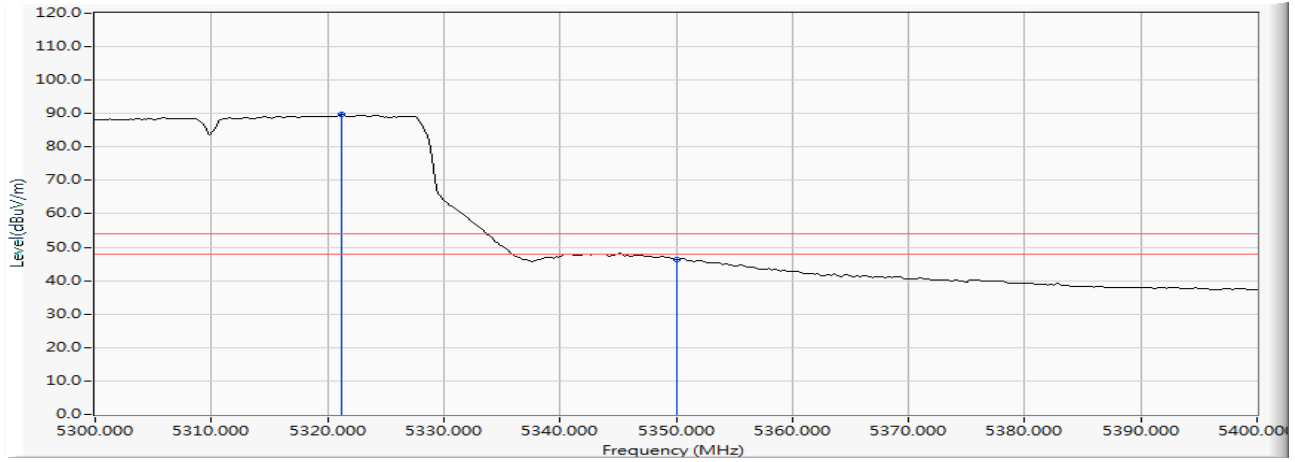


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5321.159	11.098	78.528	89.626	--	--	AVERAGE
2		5350.000	11.024	35.214	46.238	-7.762	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/25  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 62 (5310MHz)

**Vertical**

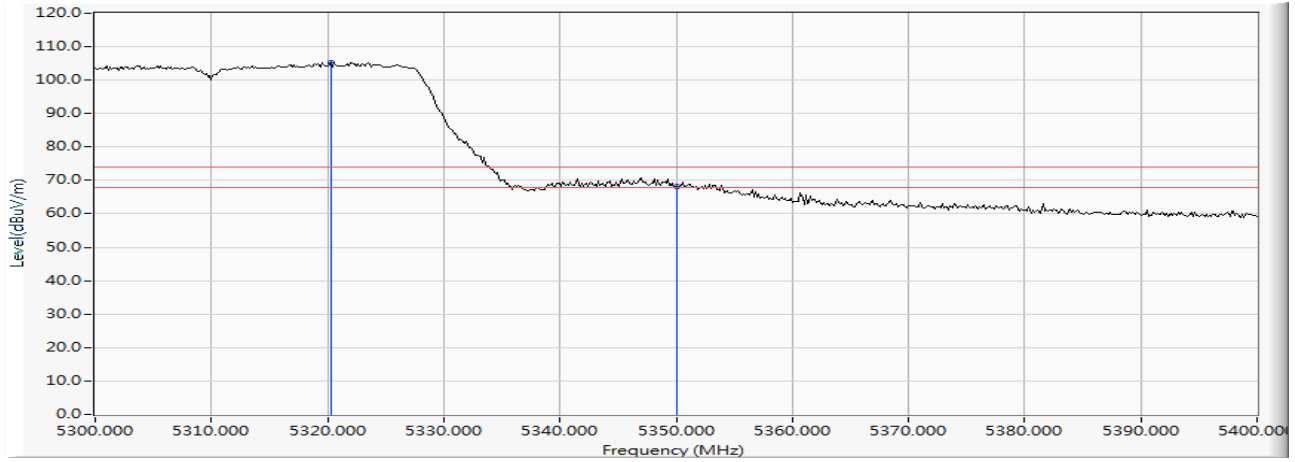


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5320.290	13.018	92.167	105.185	--	--	PEAK
2		5350.000	12.999	55.209	68.208	-5.792	74.000	PEAK

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/25  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 62 (5310MHz)

**Vertical**

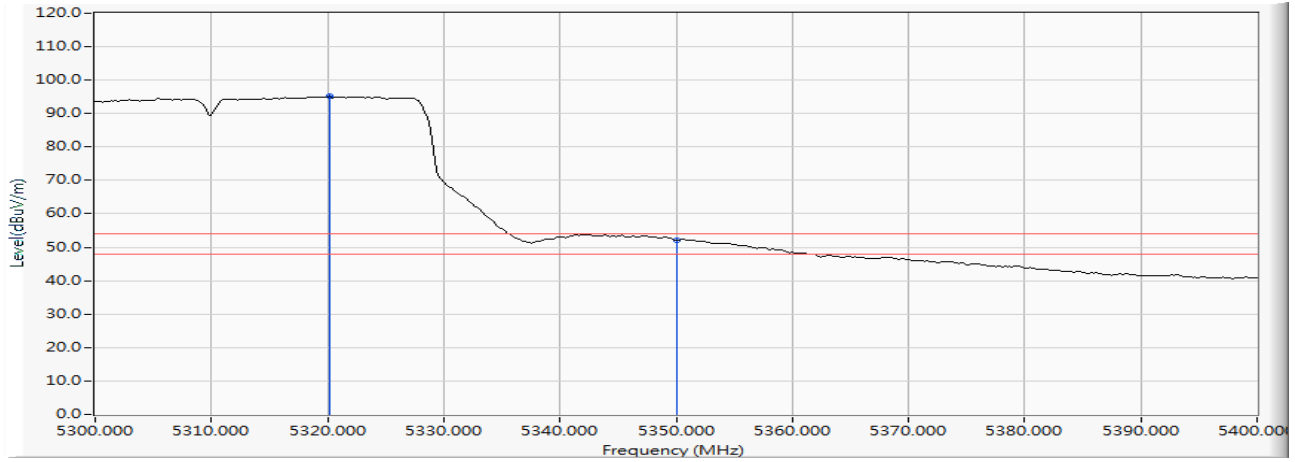

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5320.145	13.017	82.061	95.079	--	--	AVERAGE
2		5350.000	12.999	39.039	52.038	-1.962	54.000	AVERAGE


**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 102 (5510MHz)

**Horizontal**

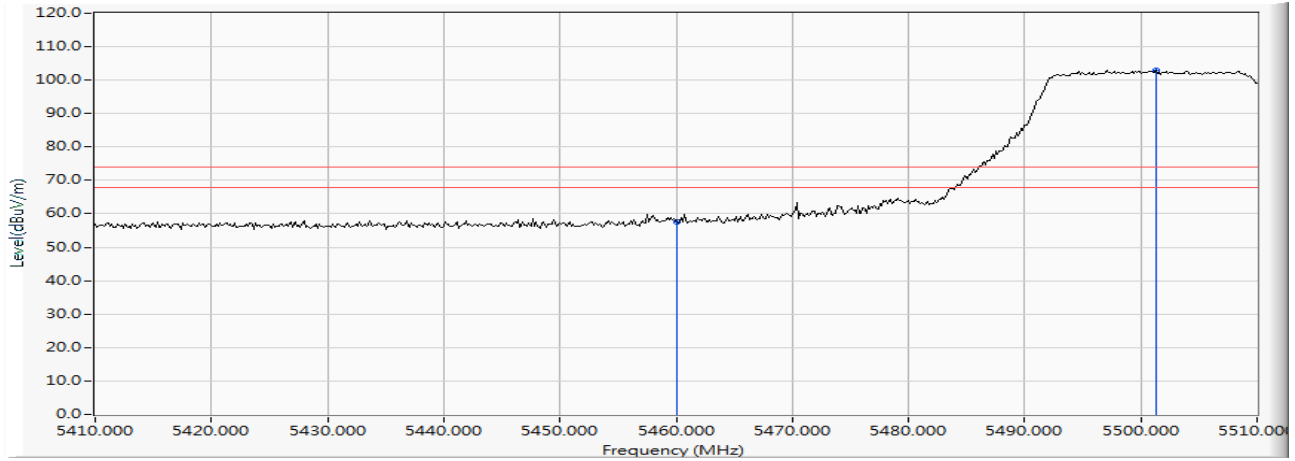


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	45.914	57.617	-16.383	74.000	PEAK
2	*	5501.304	12.178	90.887	103.065	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 102 (5510MHz)

**Horizontal**

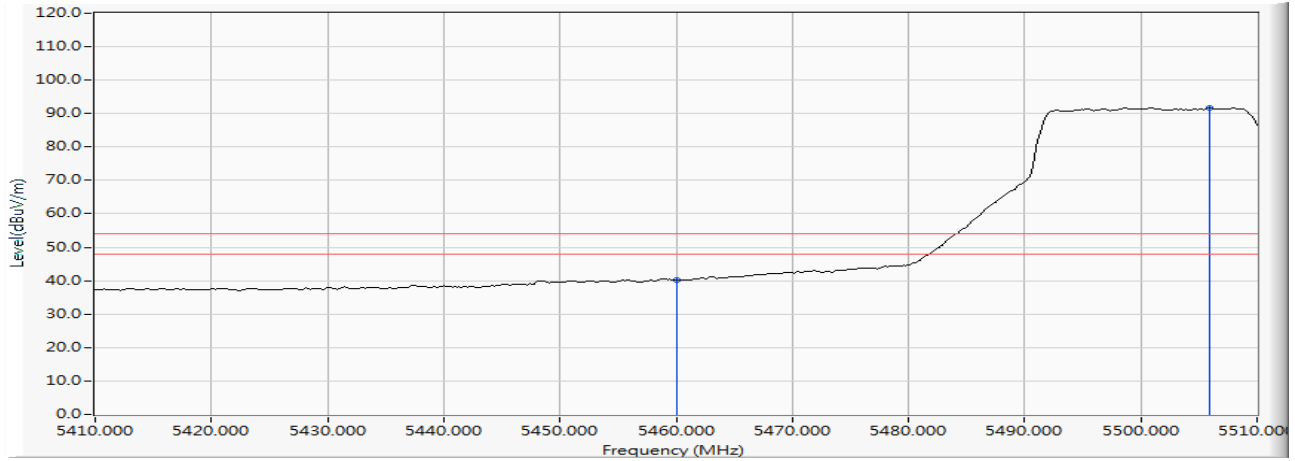


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	28.608	40.311	-13.689	54.000	AVERAGE
2	*	5505.942	12.196	79.617	91.813	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 102 (5510MHz)

**Vertical**

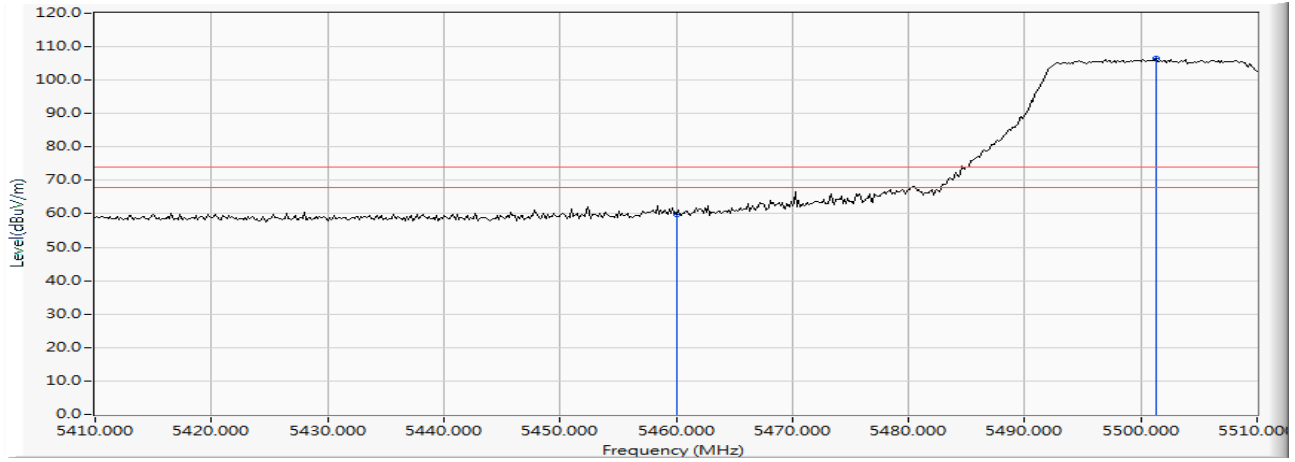


		<b>Frequency (MHz)</b>	<b>Correct Factor (dB)</b>	<b>Reading Level (dBuV)</b>	<b>Measure Level (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Limit (dBuV/m)</b>	<b>Detector Type</b>
1		5460.000	13.390	46.292	59.682	-14.318	74.000	PEAK
2	*	5501.304	13.633	92.903	106.536	--	--	PEAK

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 102 (5510MHz)

**Vertical**

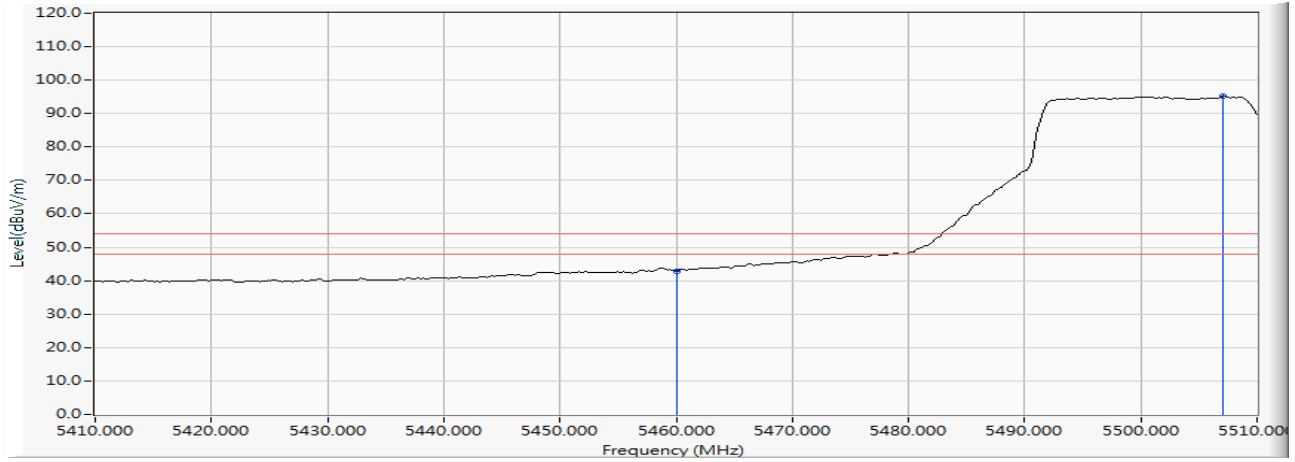


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	29.536	42.926	-11.074	54.000	AVERAGE
2	*	5507.101	13.631	81.463	95.094	--	--	AVERAGE

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 102 (5510MHz)


**Horizontal**

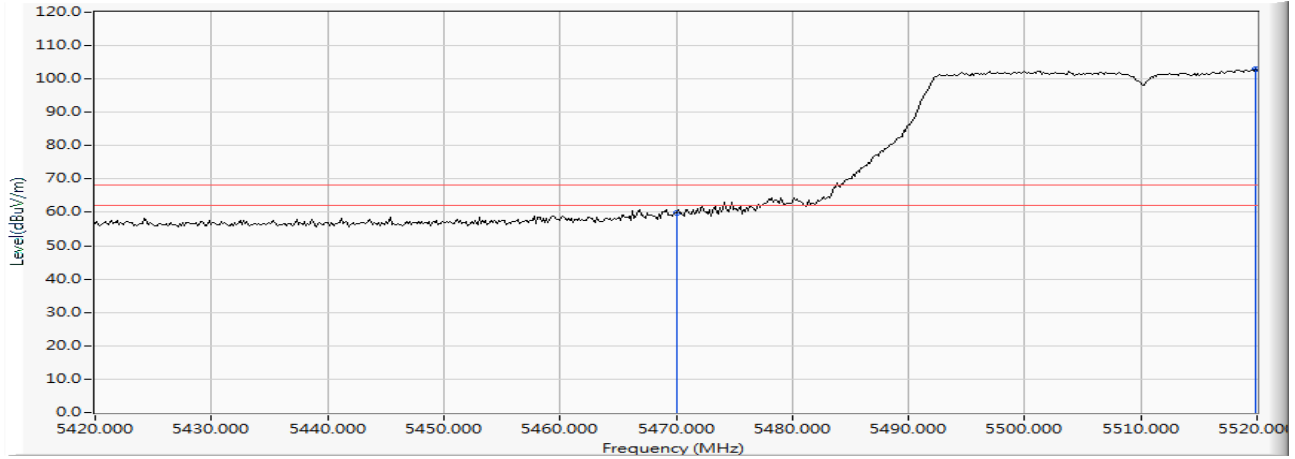

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	11.838	48.040	59.878	-8.342	68.220	PEAK
2	*	5519.855	12.083	90.730	102.814	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 102 (5510MHz)


**Vertical**

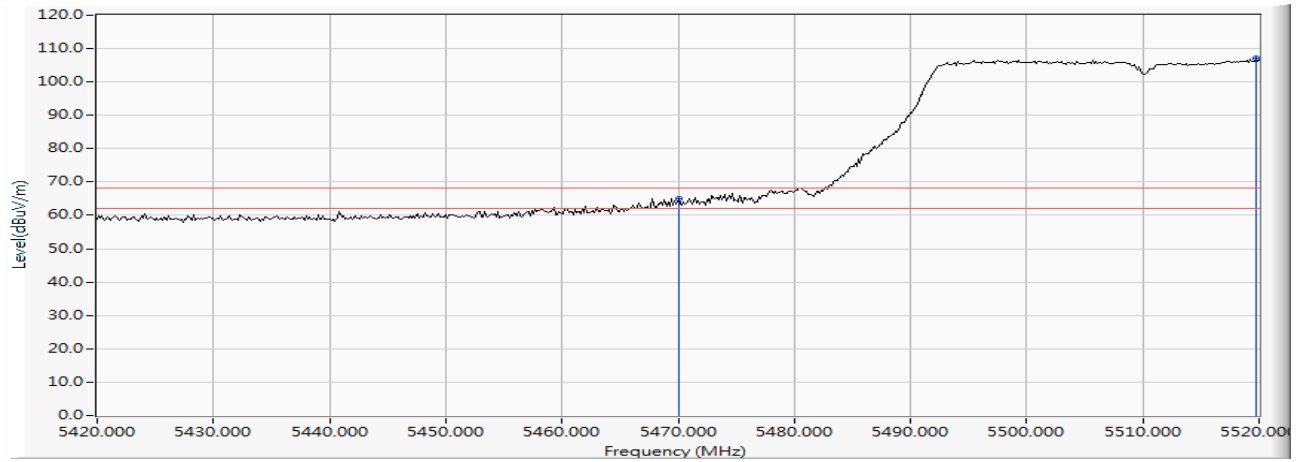

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	13.462	51.613	65.075	-3.145	68.220	PEAK
2	*	5519.710	13.550	93.455	107.005	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 134 (5670MHz)


**Horizontal**

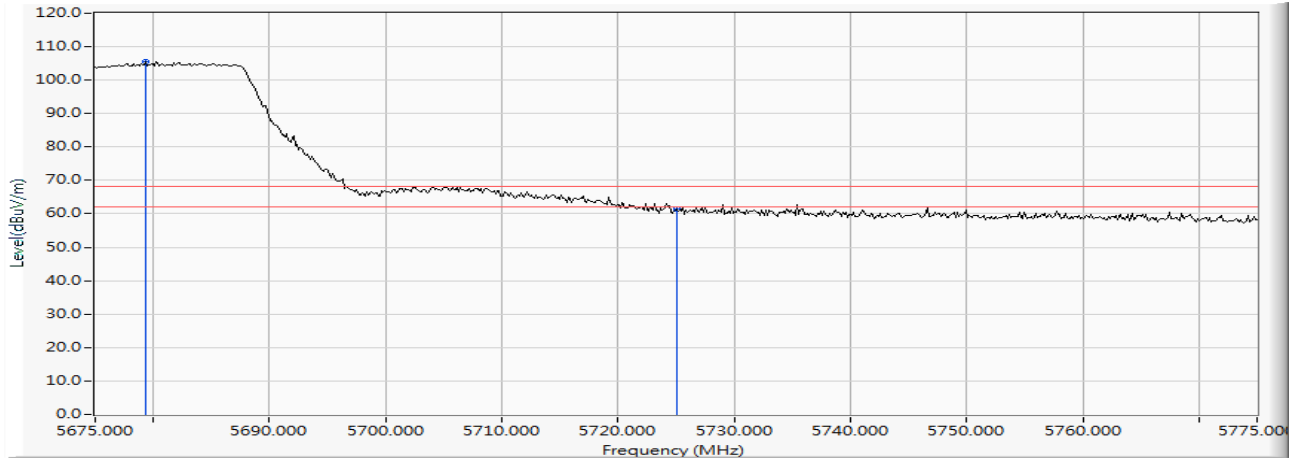

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5679.348	11.623	94.007	105.630	--	--	PEAK
2		5725.000	11.592	50.007	61.599	-6.621	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 134 (5670MHz)

**Vertical**

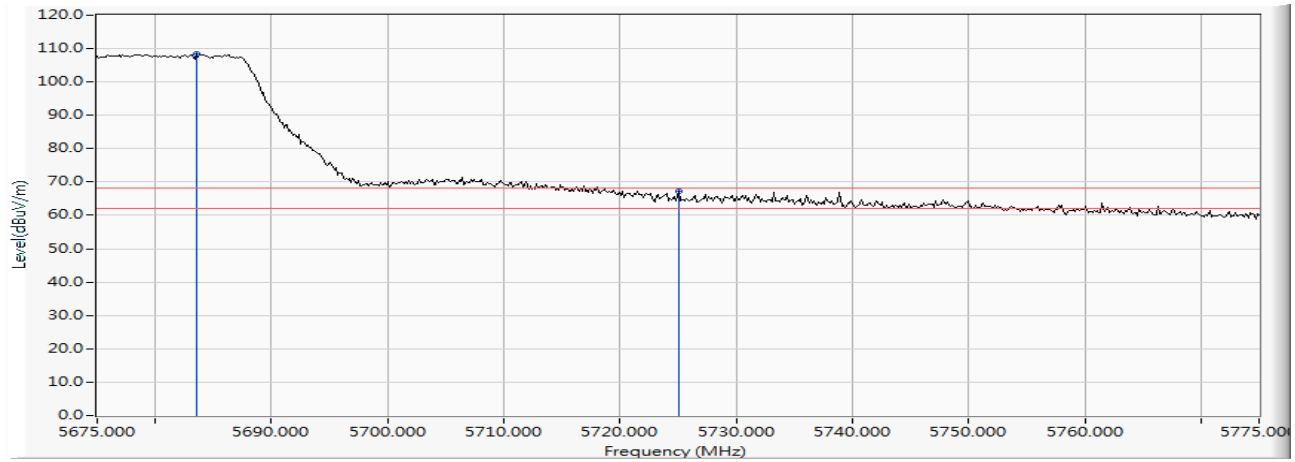


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5683.551	13.021	95.430	108.451	--	--	PEAK
2		5725.000	12.930	54.178	67.108	-1.112	68.220	PEAK



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 151 (5755MHz)


**Horizontal**

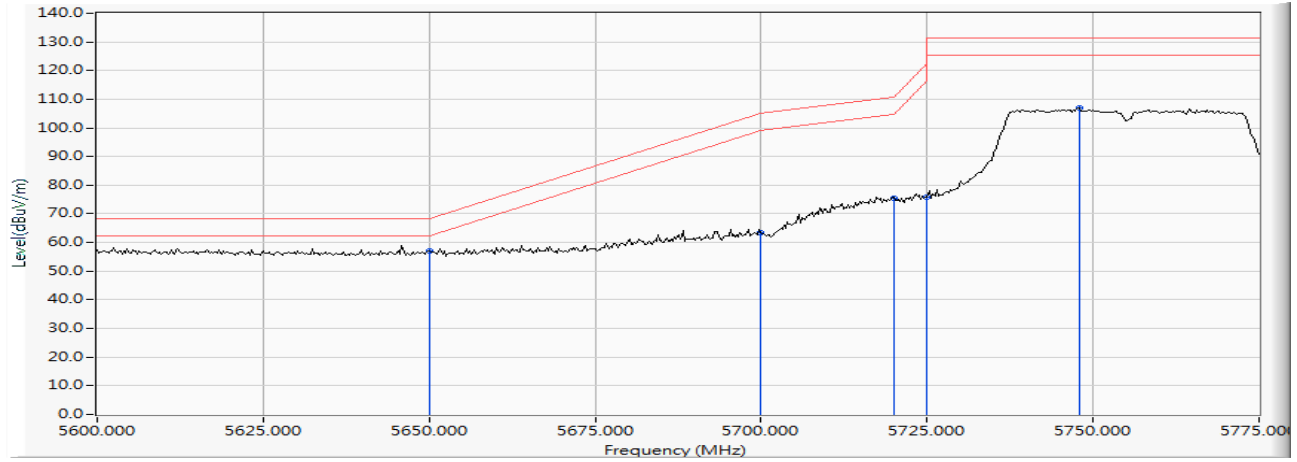

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	11.554	45.486	57.041	-11.179	68.220	PEAK
2		5700.000	11.647	51.757	63.404	-41.796	105.200	PEAK
3		5720.000	11.607	63.958	75.565	-35.235	110.800	PEAK
4		5725.000	11.592	64.349	75.941	-46.259	122.200	PEAK
5		5747.862	11.519	95.264	106.783	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 151 (5755MHz)


**Vertical**

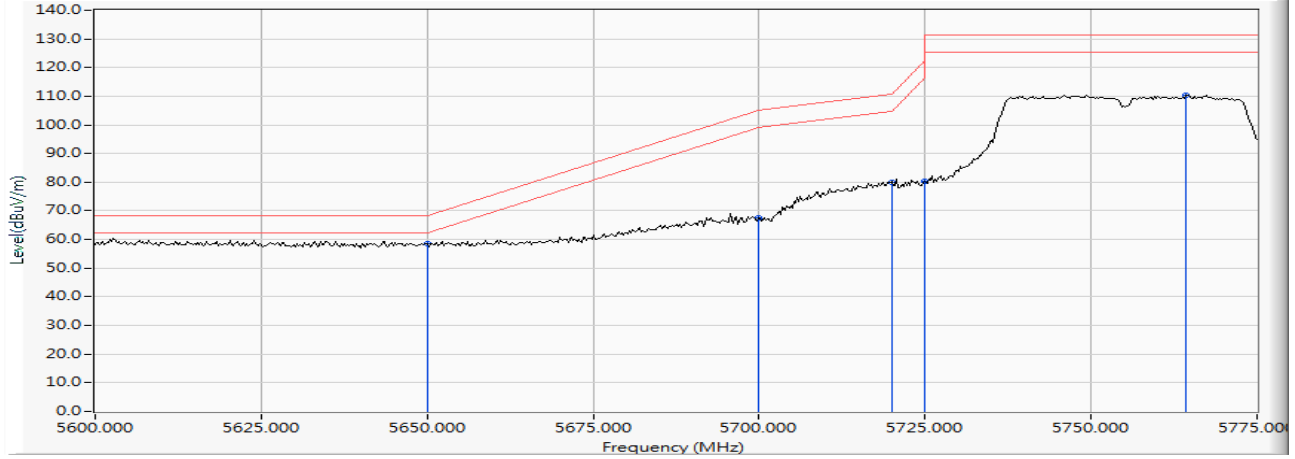

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	13.029	45.385	58.414	-9.806	68.220	PEAK
2		5700.000	13.003	54.451	67.454	-37.746	105.200	PEAK
3		5720.000	12.947	67.115	80.062	-30.738	110.800	PEAK
4		5725.000	12.930	67.337	80.267	-41.933	122.200	PEAK
5		5764.348	12.792	97.545	110.337	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 159 (5795MHz)


**Horizontal**

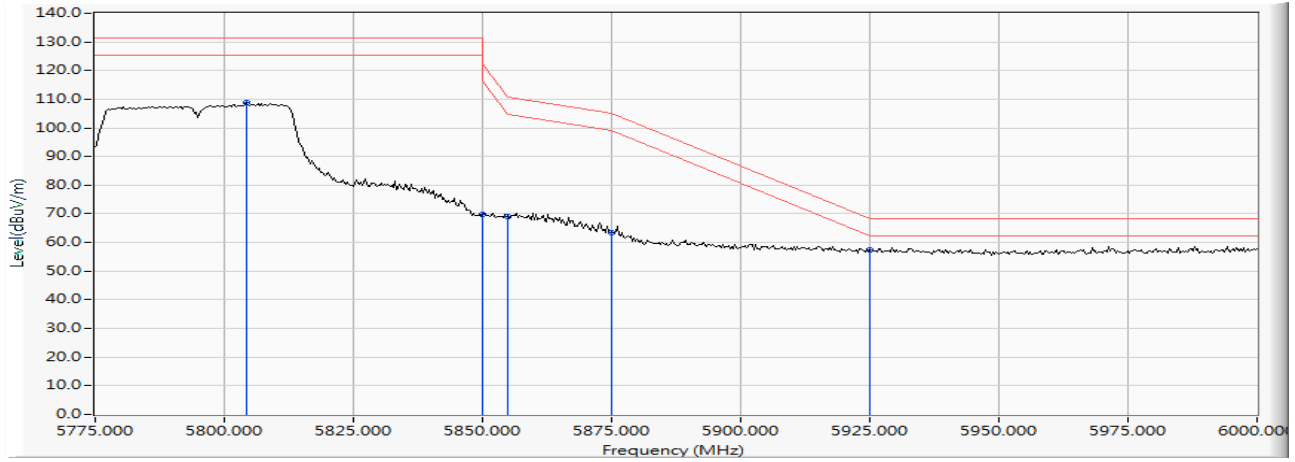

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5804.348	11.406	97.389	108.795	--	--	PEAK
2		5850.000	11.701	58.100	69.801	-52.399	122.200	PEAK
3		5855.000	11.735	57.283	69.018	-41.782	110.800	PEAK
4		5875.000	11.873	51.741	63.614	-41.586	105.200	PEAK
5	*	5925.000	12.068	45.477	57.546	-10.674	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 159 (5795MHz)


**Vertical**

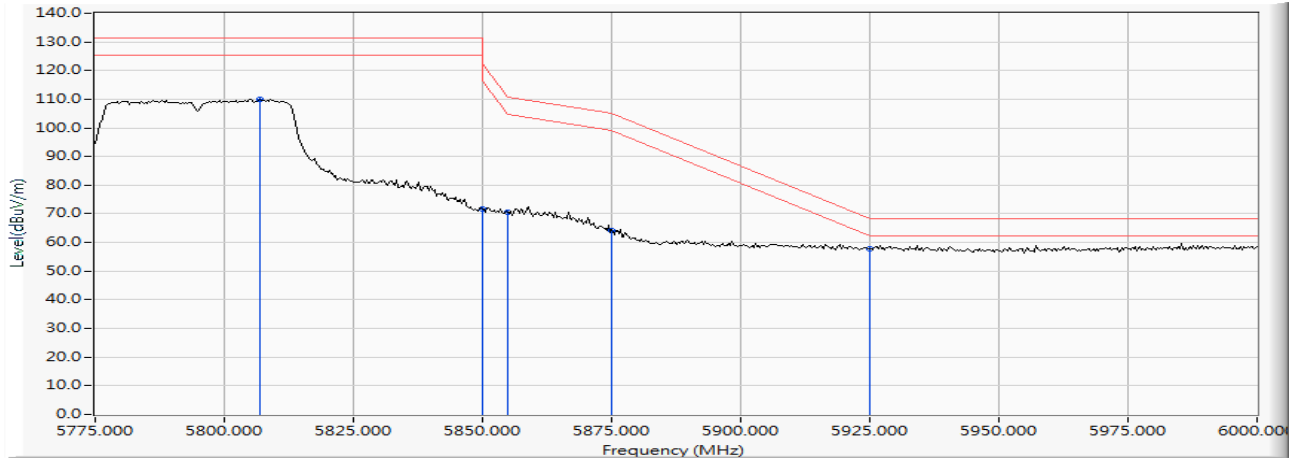

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5806.957	12.690	97.240	109.930	--	--	PEAK
2		5850.000	12.774	58.945	71.719	-50.481	122.200	PEAK
3		5855.000	12.784	57.596	70.380	-40.420	110.800	PEAK
4		5875.000	12.825	51.411	64.236	-40.964	105.200	PEAK
5	*	5925.000	12.911	44.783	57.694	-10.526	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/25  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 42 (5210MHz)

**Horizontal**

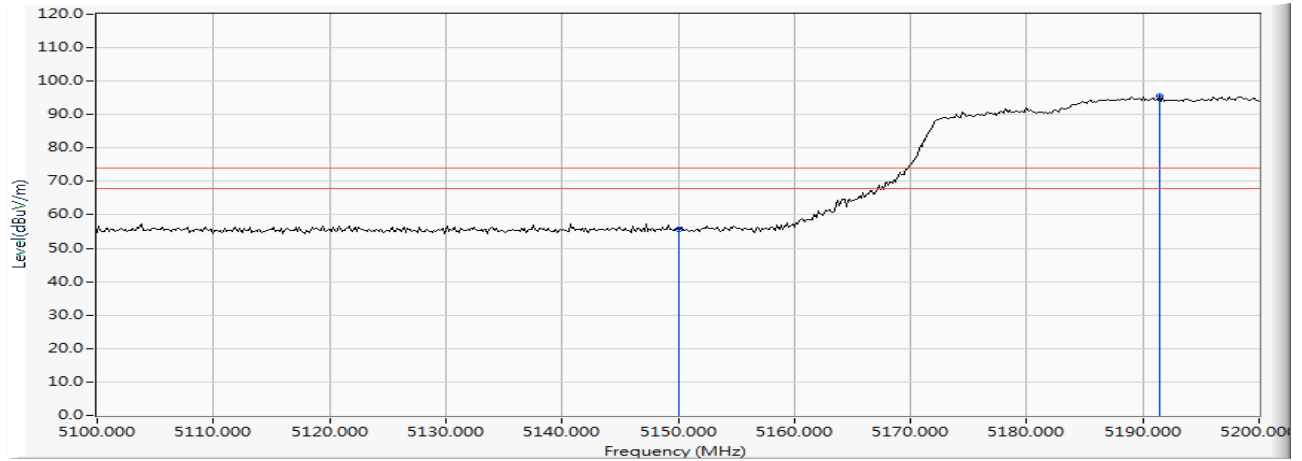


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	45.253	55.724	-18.276	74.000	PEAK
2	*	5191.449	10.361	85.057	95.419	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/25  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 42 (5210MHz)

**Horizontal**

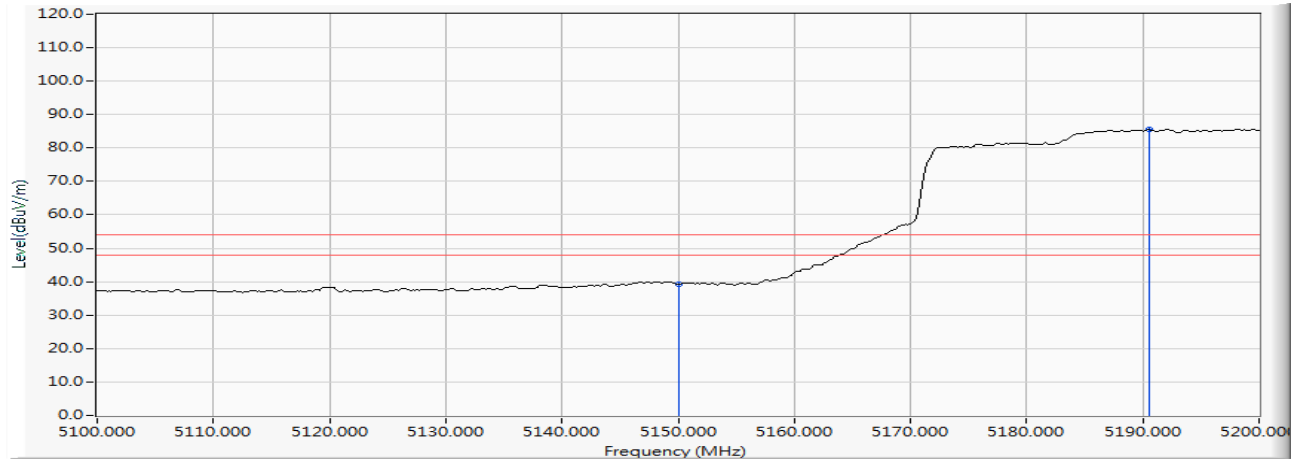


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	28.730	39.201	-14.799	54.000	AVERAGE
2	*	5190.580	10.365	75.198	85.563	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 42 (5210MHz)

**Vertical**

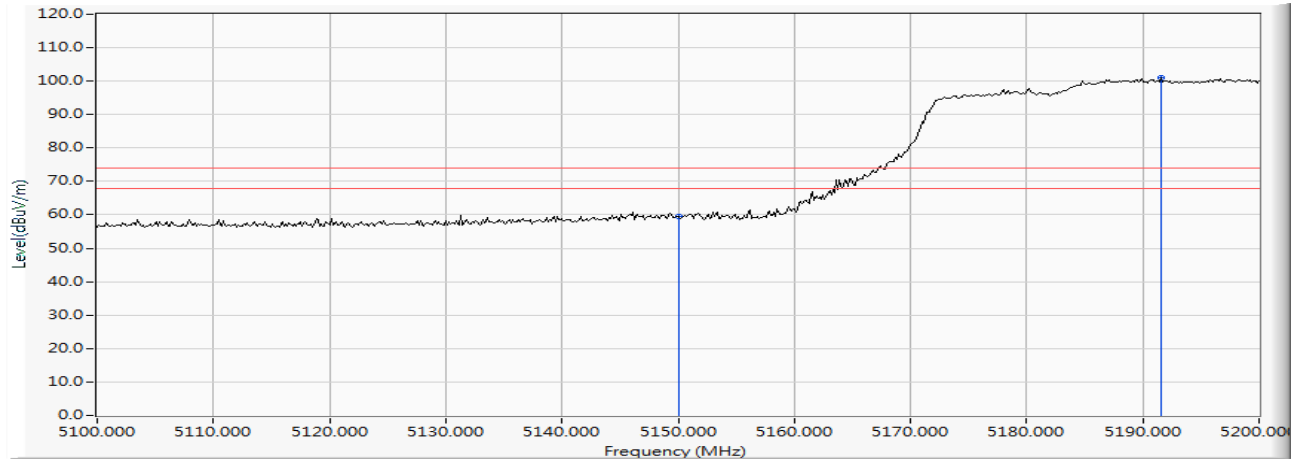


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	47.112	59.502	-14.498	74.000	PEAK
2	*	5191.594	12.542	88.412	100.953	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 42 (5210MHz)

**Vertical**

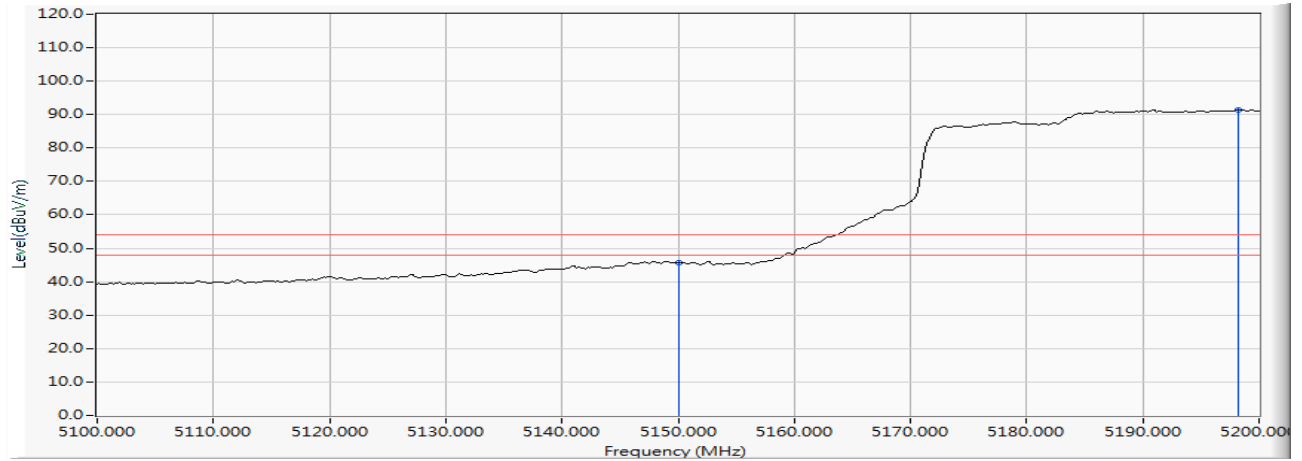

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	33.252	45.642	-8.358	54.000	AVERAGE
2	*	5198.261	12.560	78.756	91.316	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 58 (5290MHz)

**Horizontal**

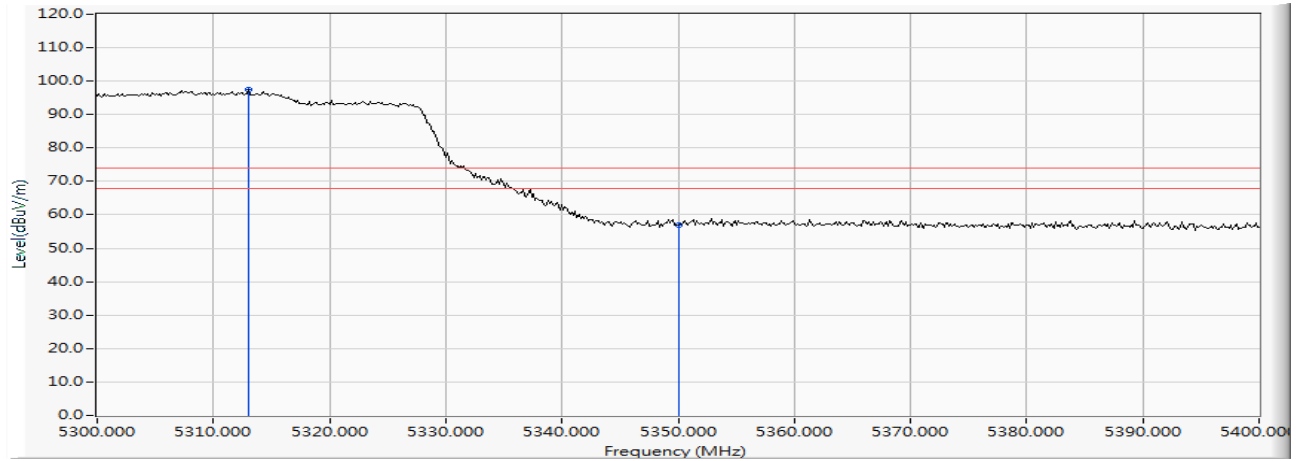


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.043	11.119	86.343	97.461	--	--	PEAK
2		5350.000	11.024	46.027	57.051	-16.949	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 58 (5290MHz)

**Horizontal**

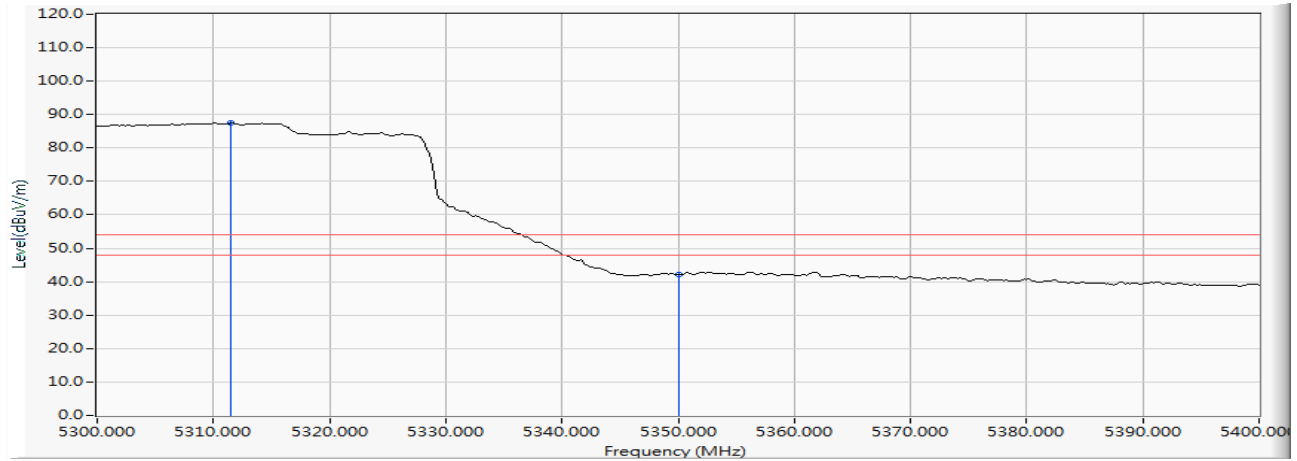


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5311.449	11.123	76.391	87.513	--	--	AVERAGE
2		5350.000	11.024	31.067	42.091	-11.909	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/25  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 58 (5290MHz)

**Vertical**

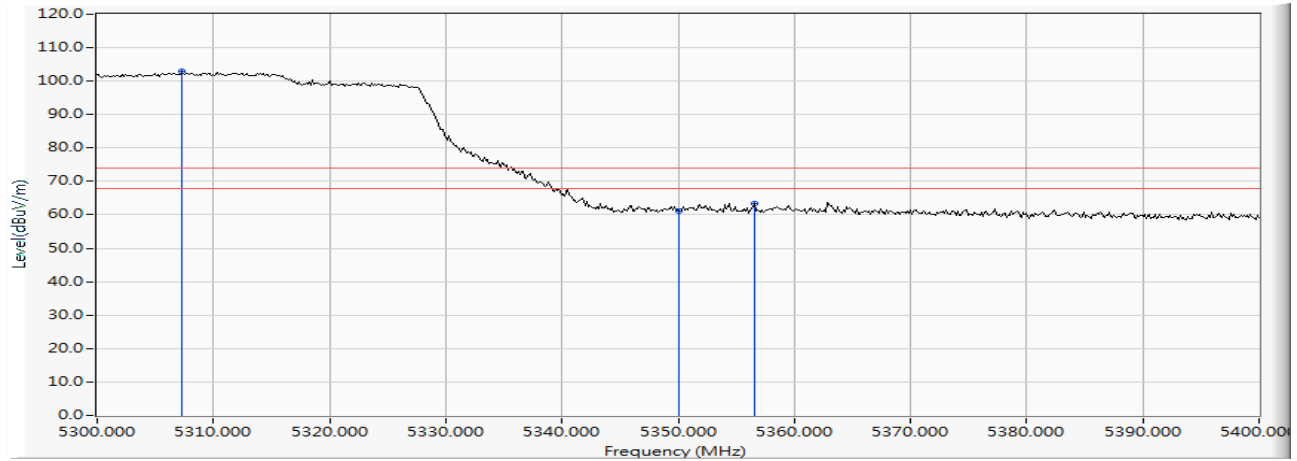


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5307.246	13.026	89.956	102.982	--	--	PEAK
2		5350.000	12.999	48.069	61.068	-12.932	74.000	PEAK
3		5356.522	12.994	50.401	63.396	-10.604	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/25  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 58 (5290MHz)

**Vertical**

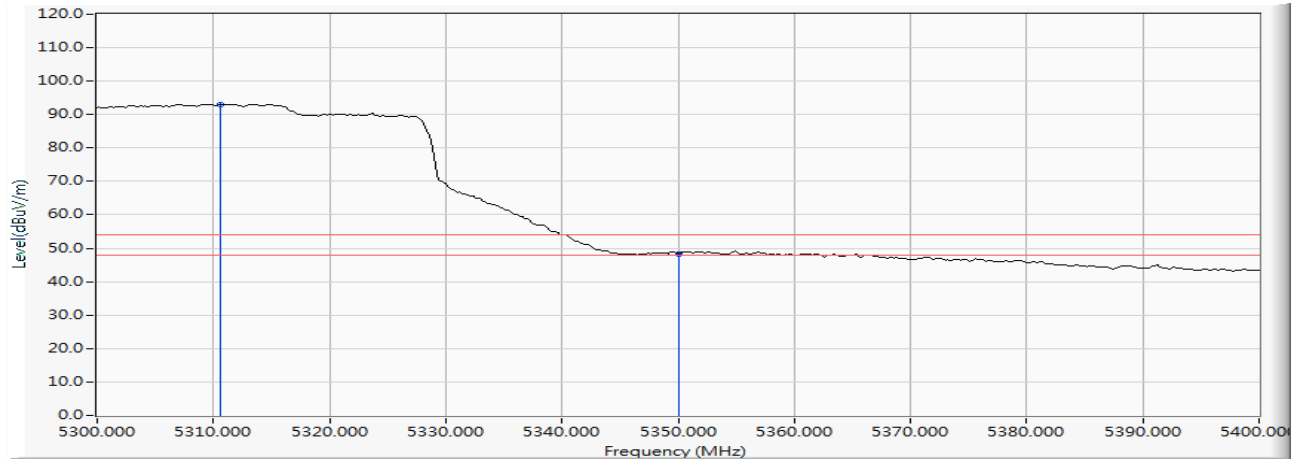


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5310.580	13.023	80.037	93.060	--	--	AVERAGE
2		5350.000	12.999	35.383	48.382	-5.618	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 106 (5530MHz)

**Horizontal**

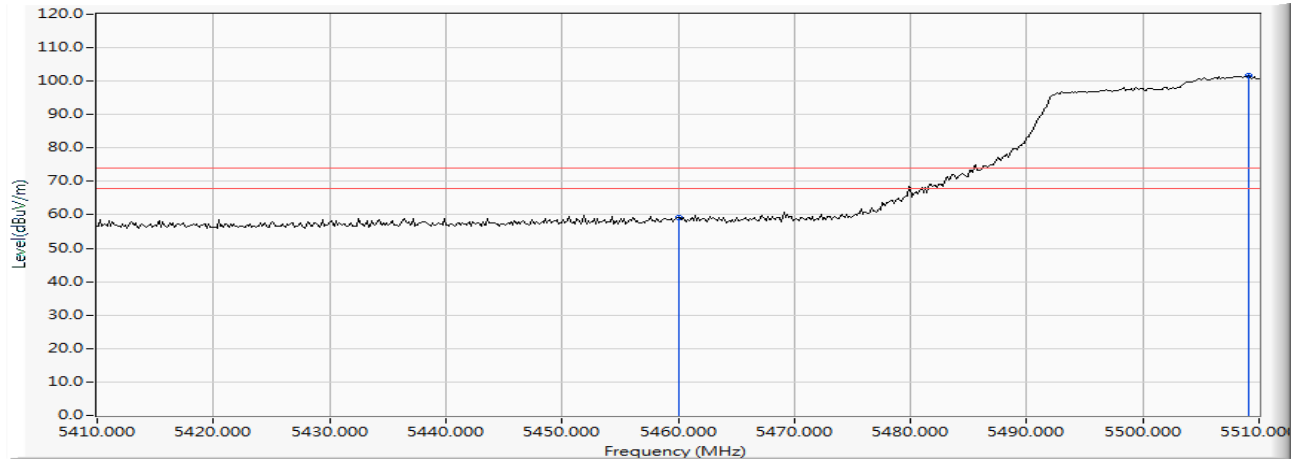


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	47.502	59.205	-14.795	74.000	PEAK
2	*	5509.130	12.170	89.481	101.651	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 106 (5530MHz)

**Horizontal**

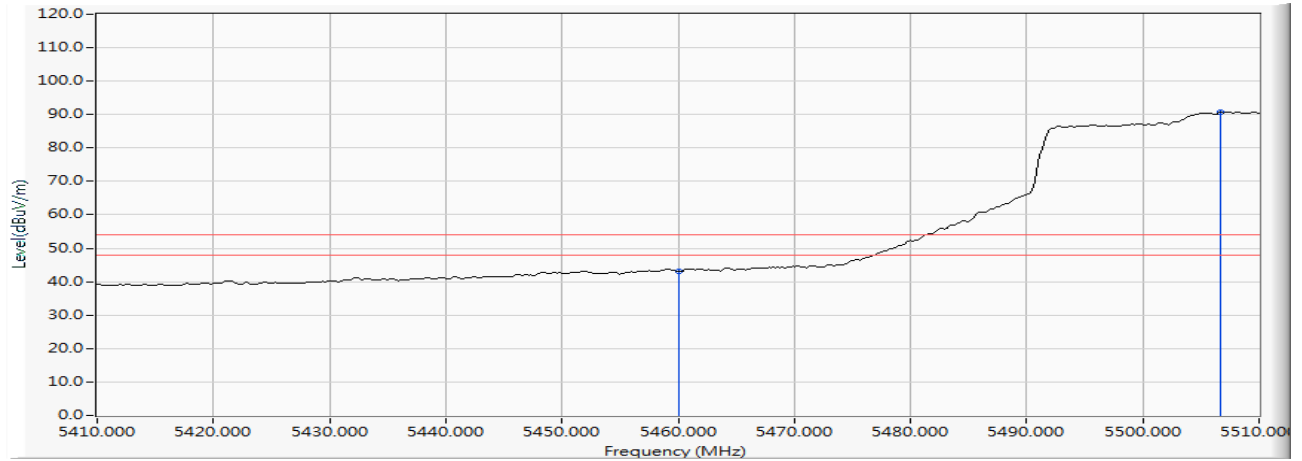


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	31.376	43.079	-10.921	54.000	AVERAGE
2	*	5506.667	12.190	78.549	90.739	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 106 (5530MHz)

**Vertical**

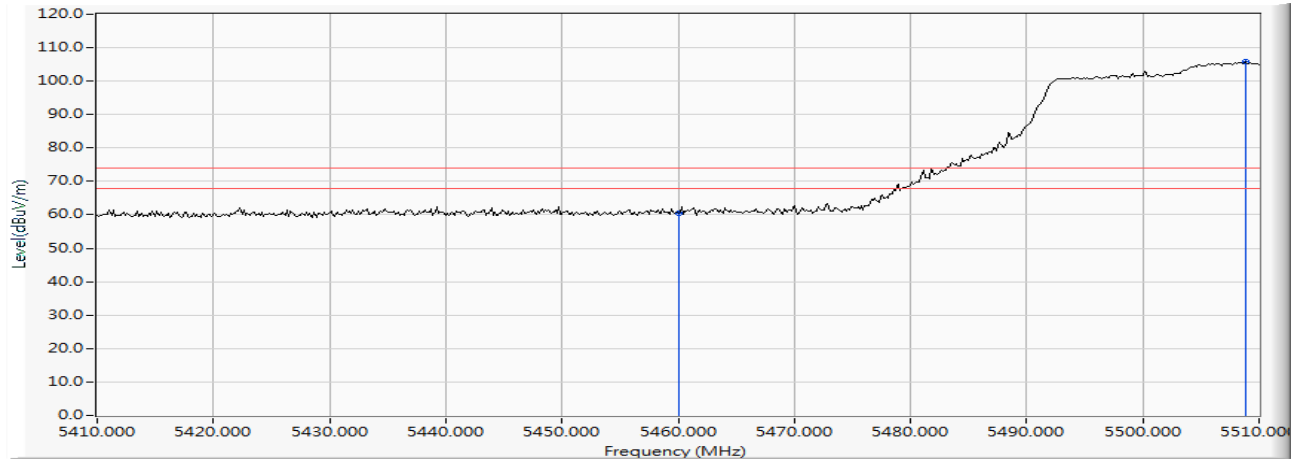


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	47.054	60.444	-13.556	74.000	PEAK
2	*	5508.841	13.619	92.086	105.706	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 106 (5530MHz)

**Vertical**

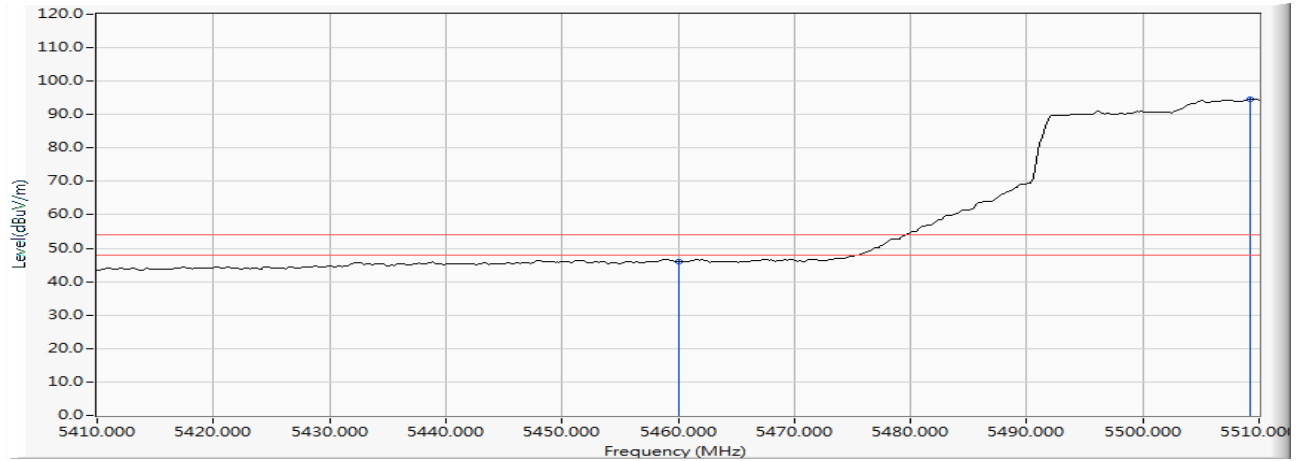

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	32.531	45.921	-8.079	54.000	AVERAGE
2	*	5509.275	13.617	80.954	94.571	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 106 (5530MHz)


**Horizontal**

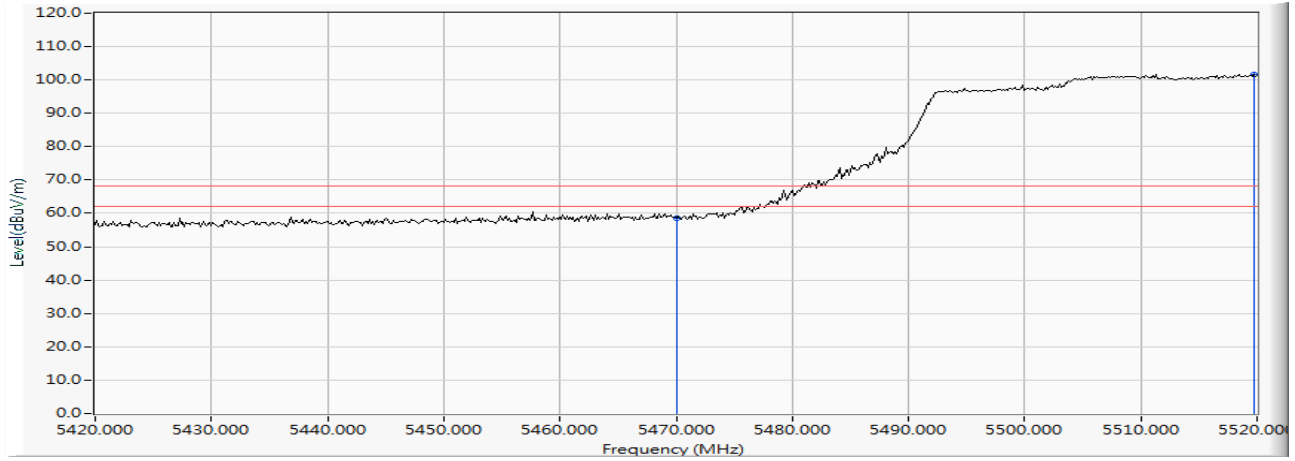

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	11.838	46.784	58.622	-9.598	68.220	PEAK
2	*	5519.710	12.085	89.662	101.747	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 106 (5530MHz)


**Vertical**

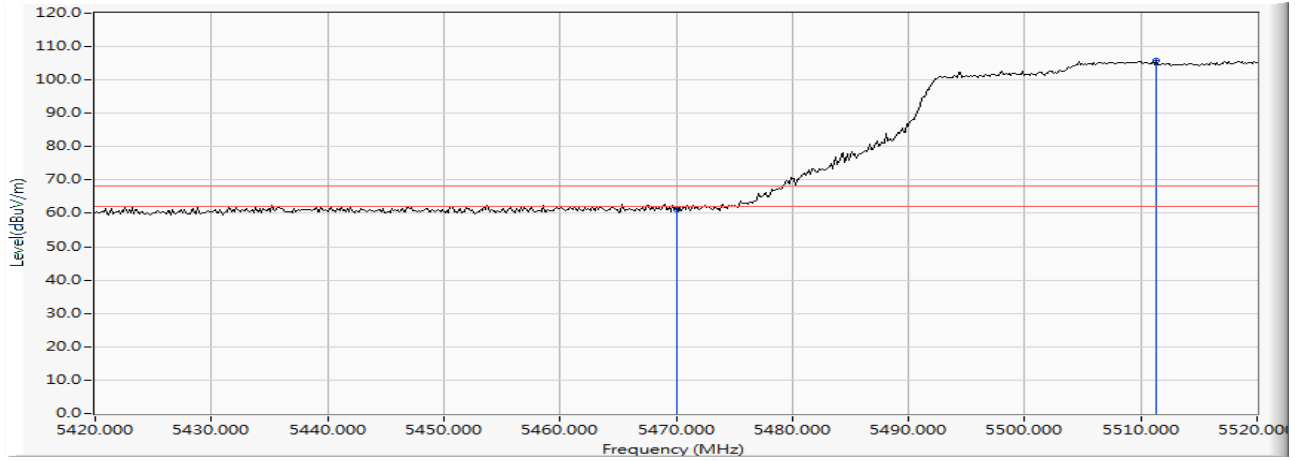

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	13.462	47.771	61.233	-6.987	68.220	PEAK
2	*	5511.304	13.604	92.302	105.906	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 155 (5775MHz)


**Horizontal**

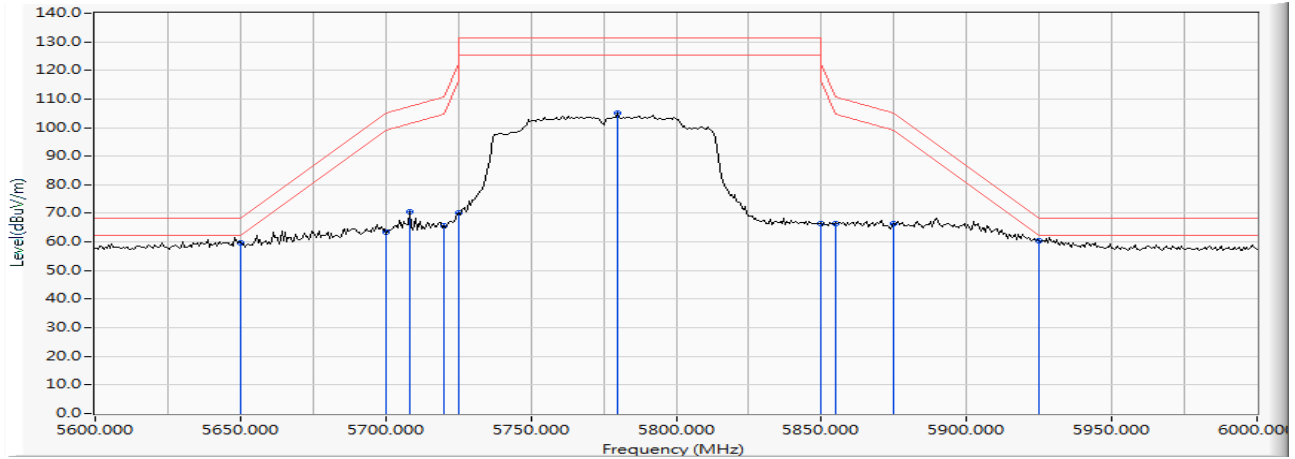

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5650.000	11.554	48.257	59.812	-8.408	68.220	PEAK
2		5700.000	11.647	51.927	63.574	-41.626	105.200	PEAK
3		5708.406	11.641	58.787	70.428	-37.126	107.554	PEAK
4		5720.000	11.607	54.146	65.753	-45.047	110.800	PEAK
5		5725.000	11.592	58.554	70.146	-52.054	122.200	PEAK
6		5779.710	11.419	93.689	105.107	--	--	PEAK
7		5850.000	11.701	54.816	66.517	-55.683	122.200	PEAK
8		5855.000	11.735	54.855	66.590	-44.210	110.800	PEAK
9		5875.000	11.873	54.507	66.380	-38.820	105.200	PEAK
10	*	5925.000	12.068	48.198	60.267	-7.953	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 155 (5775MHz)


**Vertical**

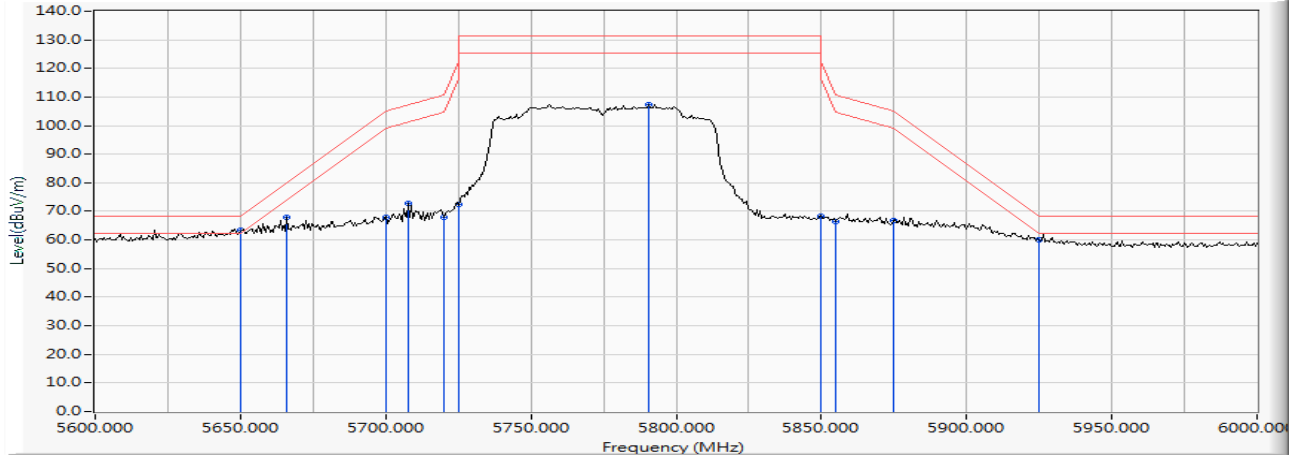

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	13.029	50.255	63.284	-4.936	68.220	PEAK
2		5666.087	13.026	55.005	68.031	-12.087	80.118	PEAK
3		5700.000	13.003	54.757	67.760	-37.440	105.200	PEAK
4		5707.826	12.988	59.876	72.863	-34.528	107.391	PEAK
5		5720.000	12.947	54.823	67.770	-43.030	110.800	PEAK
6		5725.000	12.930	59.493	72.423	-49.777	122.200	PEAK
7		5790.725	12.700	94.730	107.430	--	--	PEAK
8		5850.000	12.774	55.685	68.459	-53.741	122.200	PEAK
9		5855.000	12.784	53.825	66.609	-44.191	110.800	PEAK
10		5875.000	12.825	54.049	66.874	-38.326	105.200	PEAK
11		5925.000	12.911	47.153	60.064	-8.156	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 50 (5250MHz)

**Horizontal**

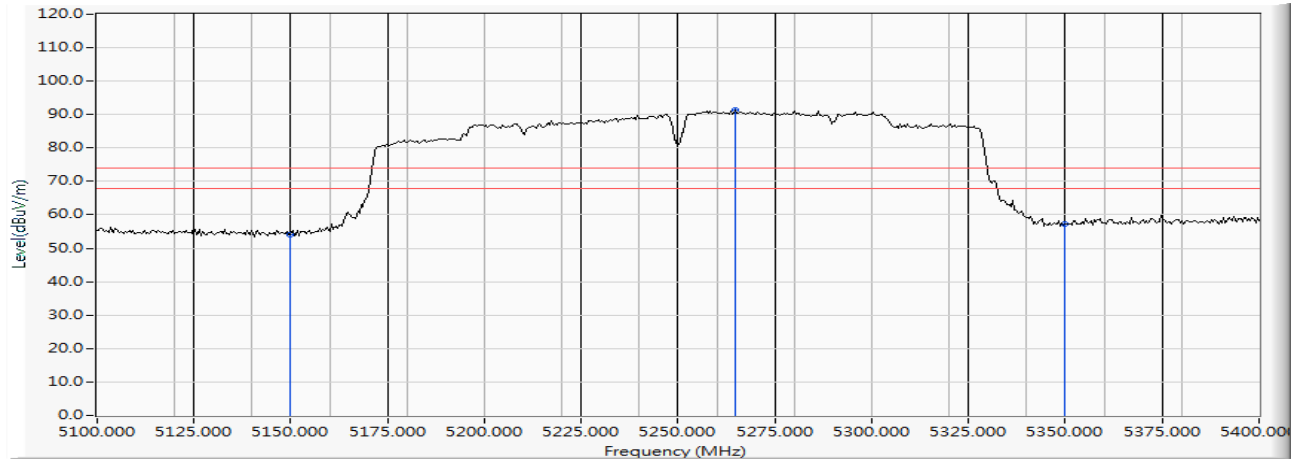


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	43.609	54.080	-19.920	74.000	PEAK
2	*	5264.783	10.866	80.403	91.269	--	--	PEAK
3		5350.000	11.024	46.146	57.170	-16.830	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 50 (5250MHz)

**Horizontal**

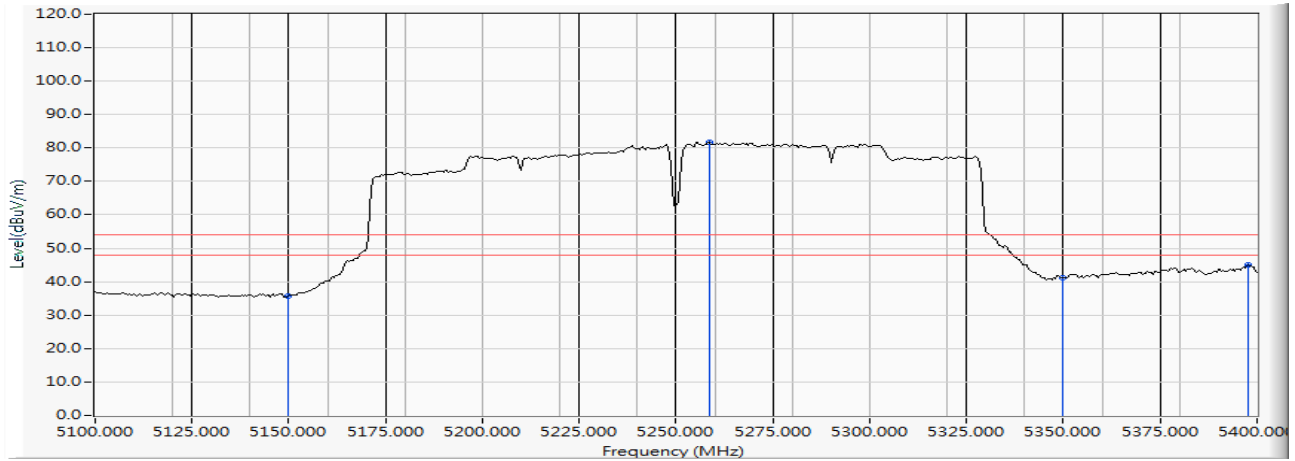


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	25.239	35.710	-18.290	54.000	AVERAGE
2	*	5258.696	10.818	70.962	81.780	--	--	AVERAGE
3		5350.000	11.024	30.239	41.263	-12.737	54.000	AVERAGE
4		5397.826	10.934	34.013	44.946	-9.054	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 50 (5250MHz)

**Vertical**

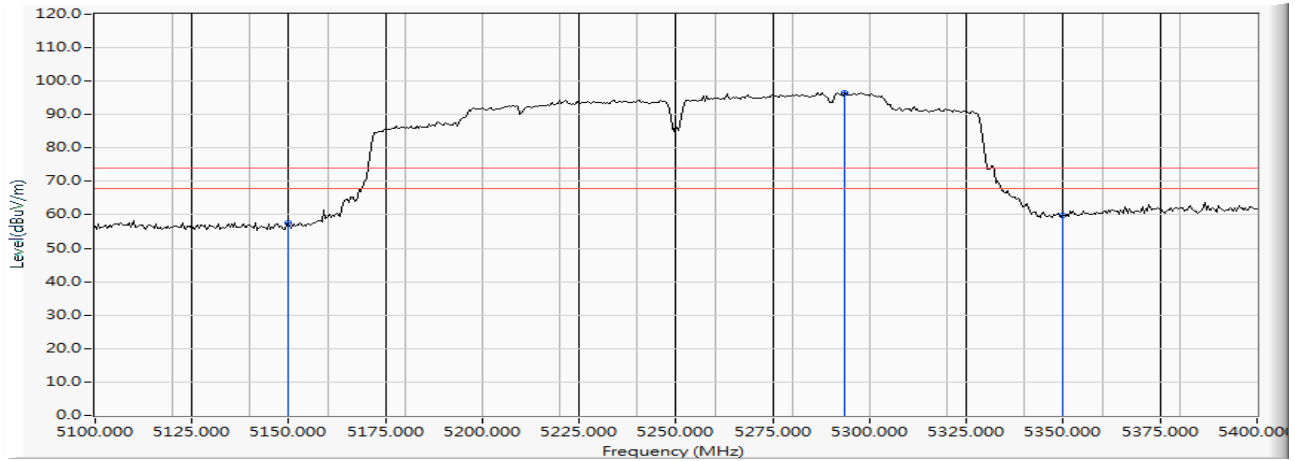


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	45.204	57.594	-16.406	74.000	PEAK
2	*	5293.478	12.998	83.642	96.640	--	--	PEAK
3		5350.000	12.999	46.945	59.944	-14.056	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 50 (5250MHz)

**Vertical**

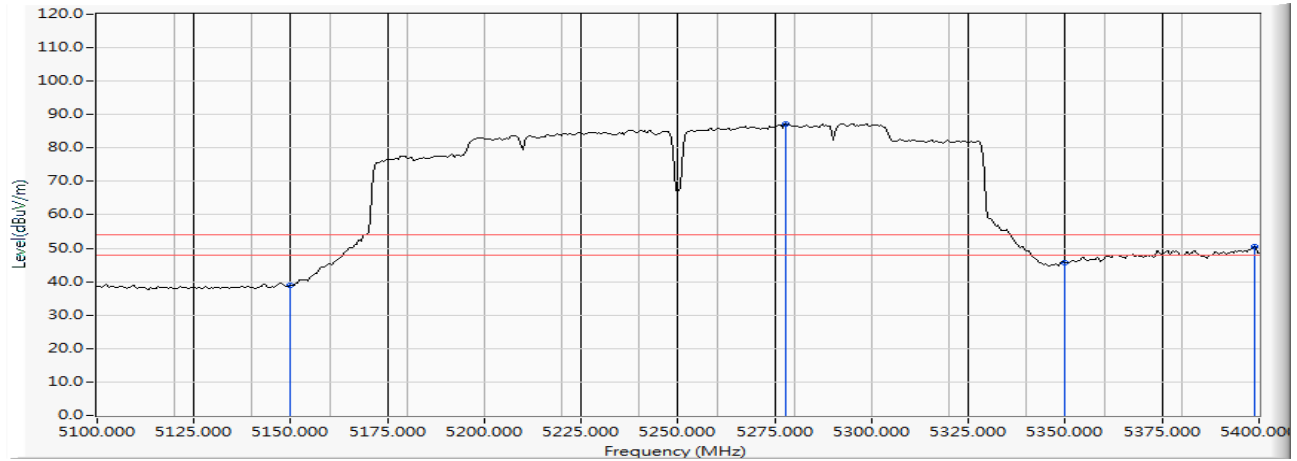

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	26.539	38.929	-15.071	54.000	AVERAGE
2	*	5277.826	12.930	74.407	87.337	--	--	AVERAGE
3		5350.000	12.999	32.758	45.757	-8.243	54.000	AVERAGE
4		5398.696	12.984	37.509	50.493	-3.507	54.000	AVERAGE


**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 114 (5570MHz)

**Horizontal**

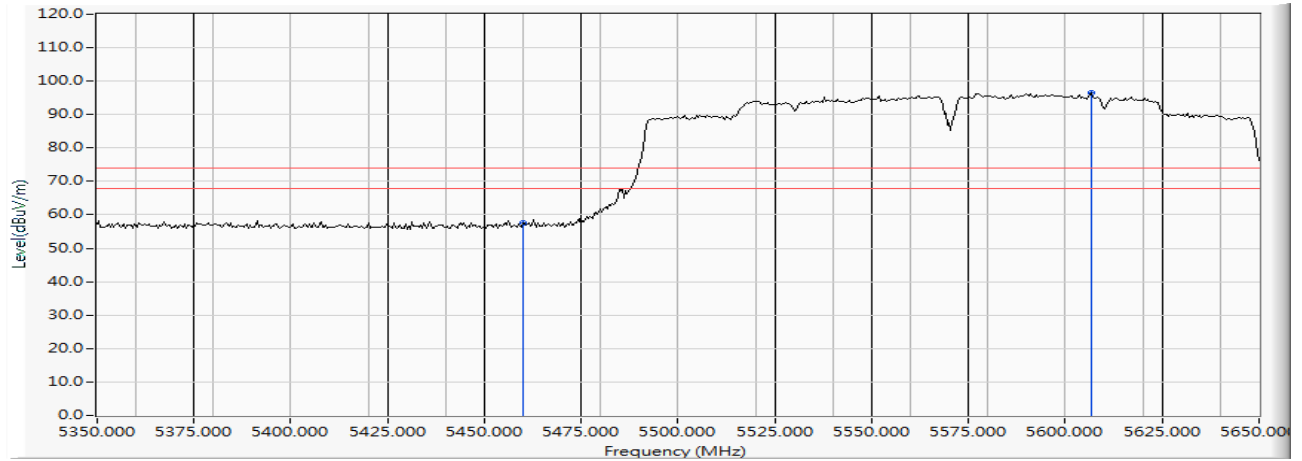


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	45.908	57.611	-16.389	74.000	PEAK
2	*	5606.522	11.453	85.130	96.584	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 114 (5570MHz)

**Horizontal**

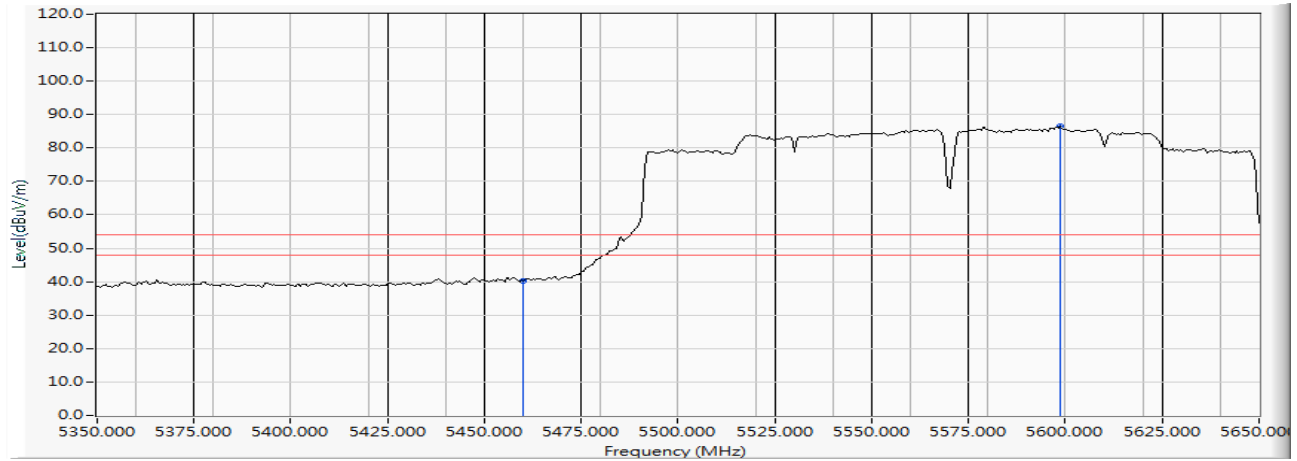


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	28.396	40.099	-13.901	54.000	AVERAGE
2	*	5598.696	11.474	74.910	86.384	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 114 (5570MHz)

**Vertical**

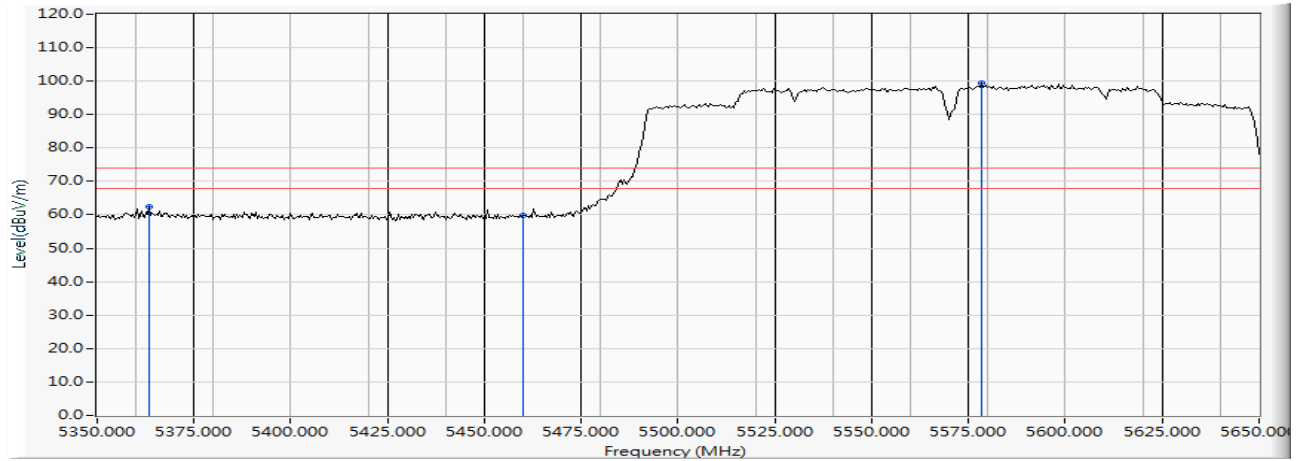


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5363.478	12.989	49.362	62.351	-11.649	74.000	PEAK
2		5460.000	36.194	46.523	59.913	-14.087	74.000	PEAK
3	*	5578.261	35.928	86.344	99.523	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 114 (5570MHz)

**Vertical**

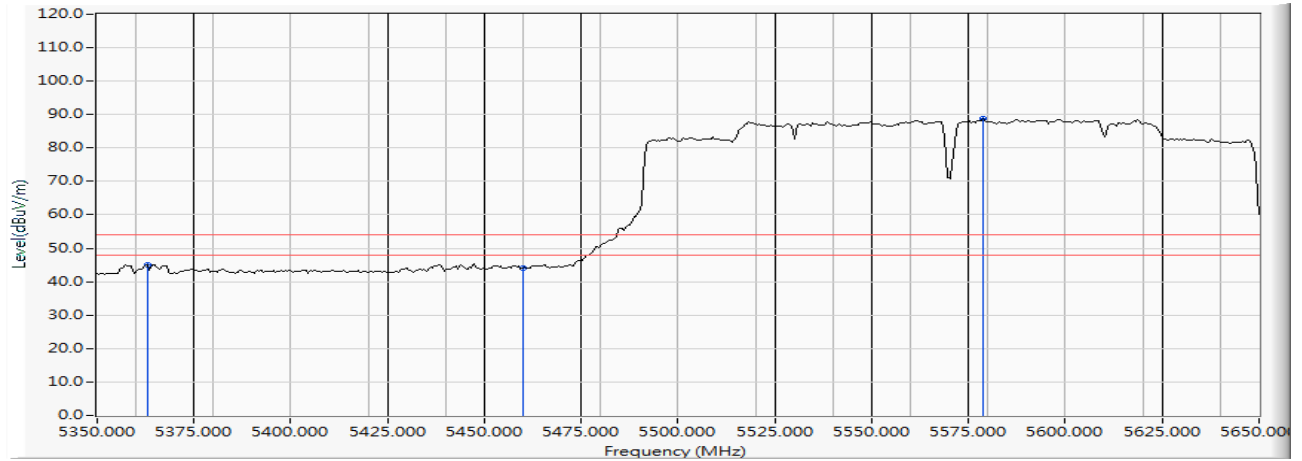


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5363.043	12.990	32.064	45.053	-8.947	54.000	AVERAGE
2		5460.000	13.390	30.726	44.116	-9.884	54.000	AVERAGE
3	*	5578.696	13.176	75.496	88.672	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 114 (5570MHz)


**Horizontal**

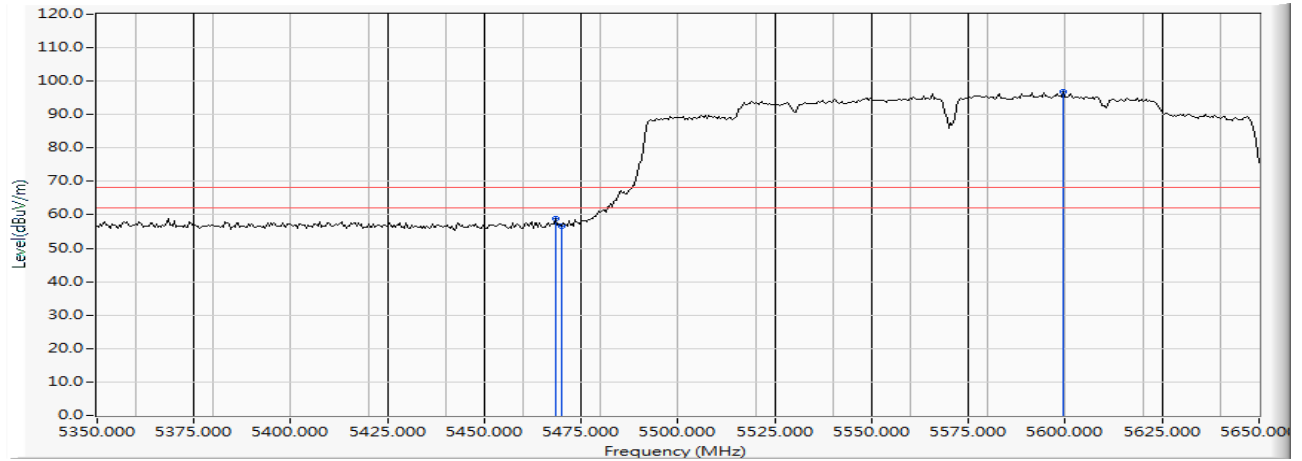

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.261	11.815	46.964	58.779	-9.441	68.220	PEAK
2		5470.000	11.838	44.657	56.495	-11.725	68.220	PEAK
3	*	5599.565	11.469	85.274	96.744	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/01  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 114 (5570MHz)


**Vertical  
Vertical**

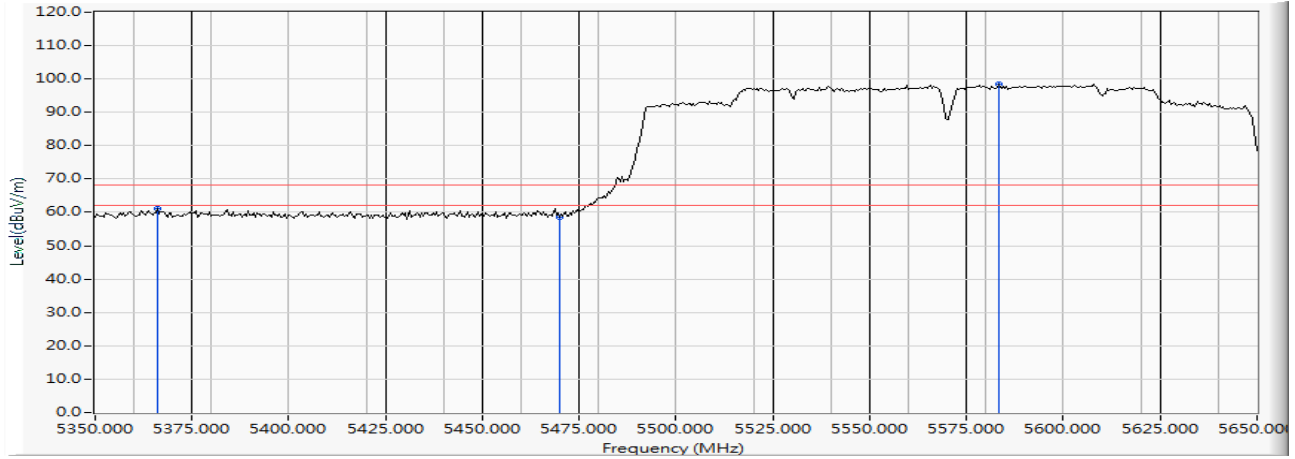

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5366.087	12.987	48.038	61.025	-7.195	68.220	PEAK
2		5470.000	13.462	45.104	58.566	-9.654	68.220	PEAK
3	*	5583.478	13.146	85.294	98.440	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 36 (5180MHz)

**Horizontal**

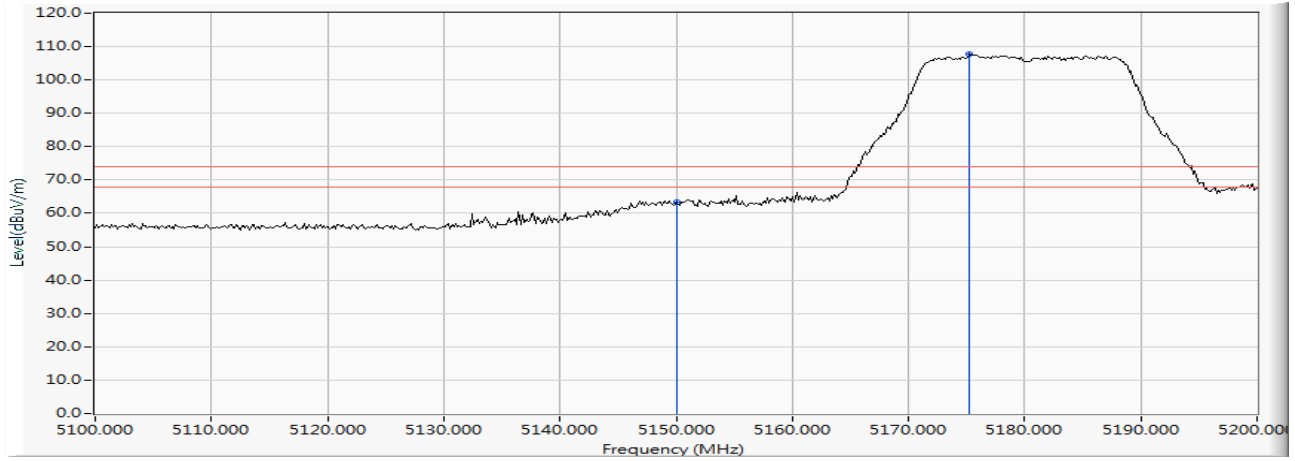


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	53.029	63.500	-10.500	74.000	PEAK
2	*	5175.217	10.406	97.229	107.635	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 36 (5180MHz)

**Horizontal**

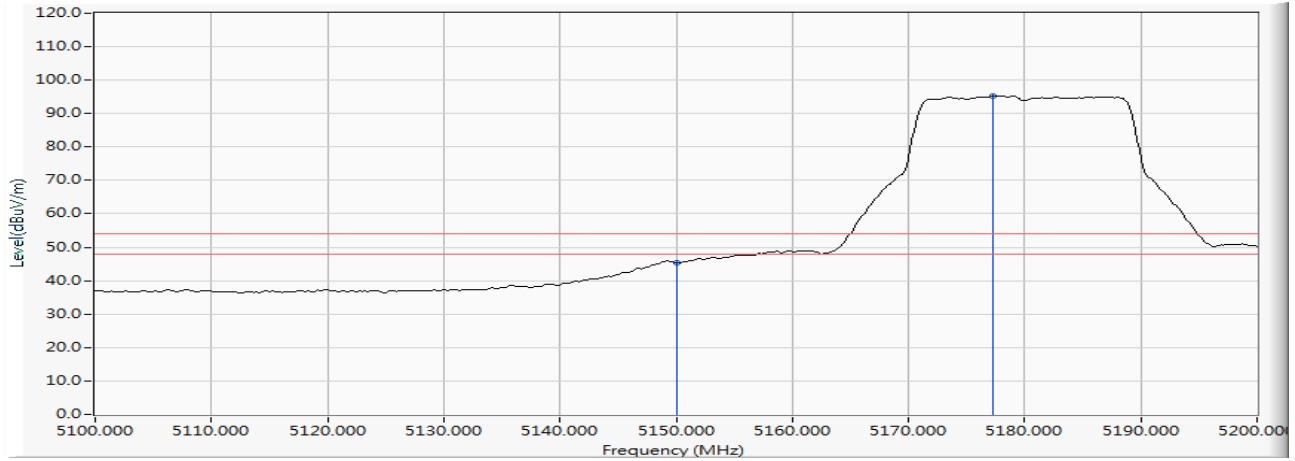

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	34.771	45.242	-8.758	54.000	AVERAGE
2	*	5177.246	10.400	84.916	95.317	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 36 (5180MHz)

**Vertical**

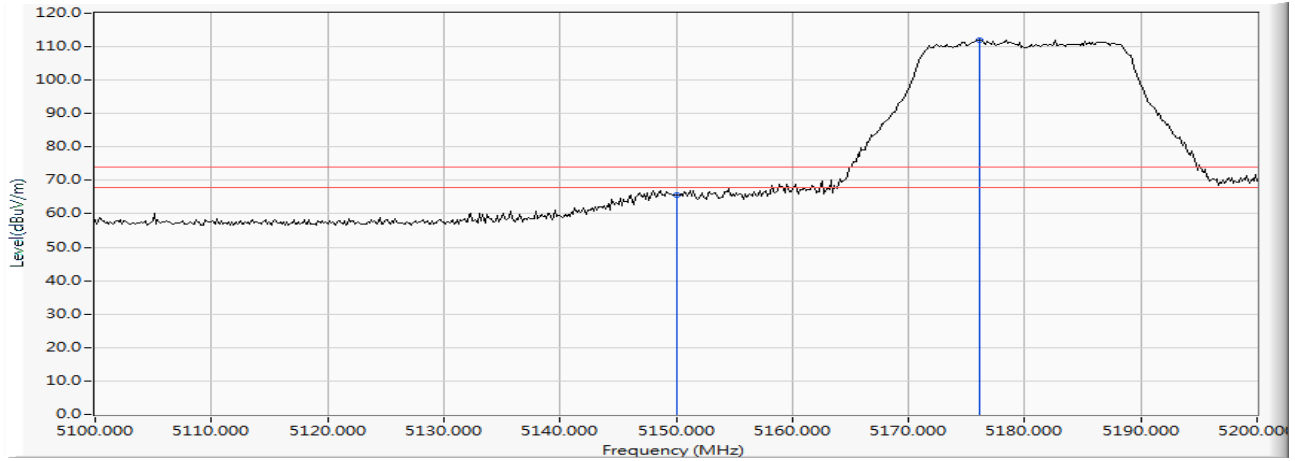


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	53.199	65.589	-8.411	74.000	PEAK
2	*	5176.087	12.488	99.418	111.905	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 36 (5180MHz)

**Vertical**

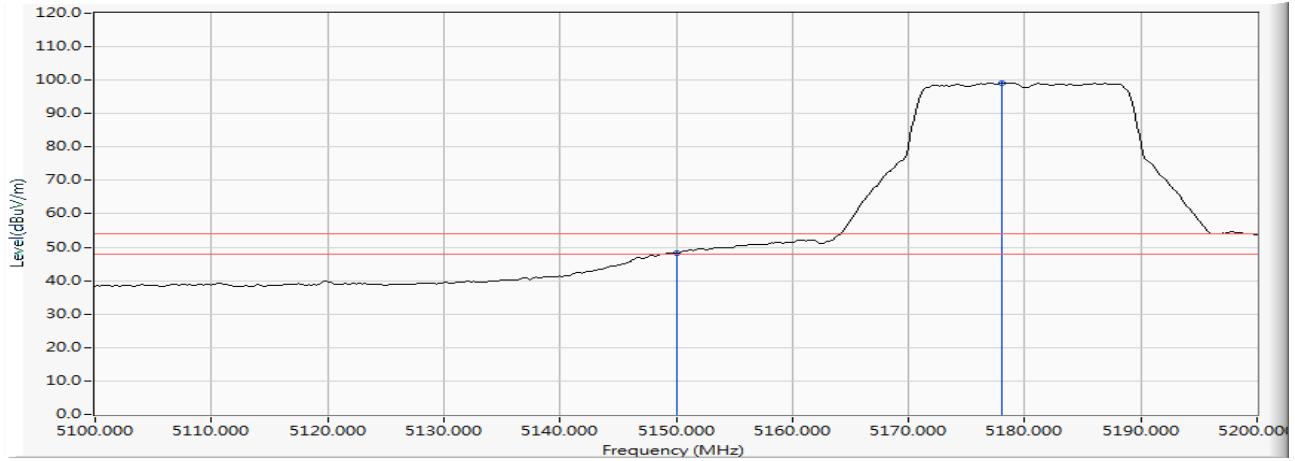


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	35.756	48.146	-5.854	54.000	AVERAGE
2	*	5177.971	12.493	86.719	99.213	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 64 (5320MHz)

**Horizontal**

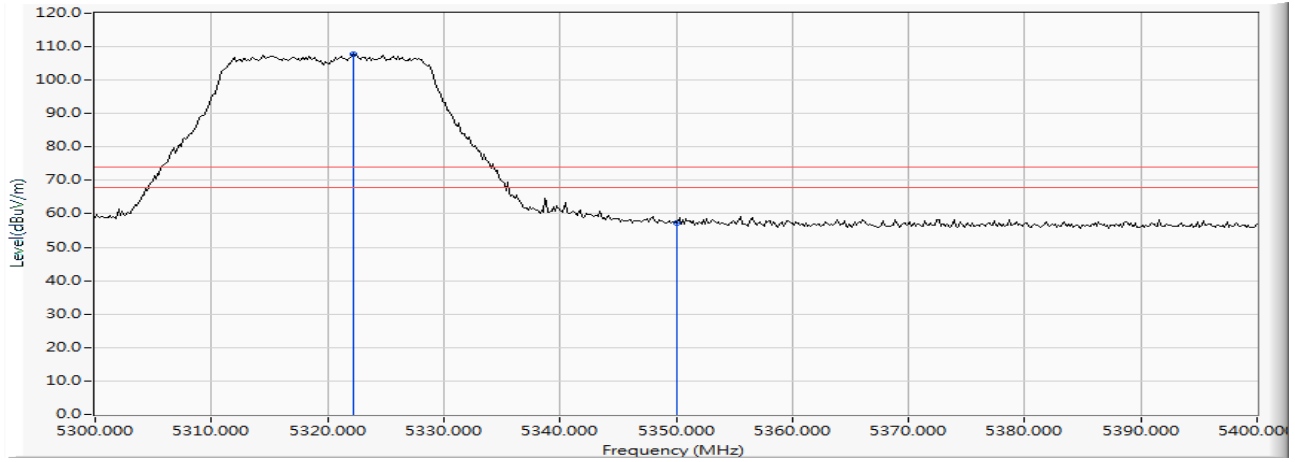


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5322.174	11.095	96.522	107.617	--	--	PEAK
2		5350.000	11.024	46.130	57.154	-16.846	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 64 (5320MHz)

**Horizontal**

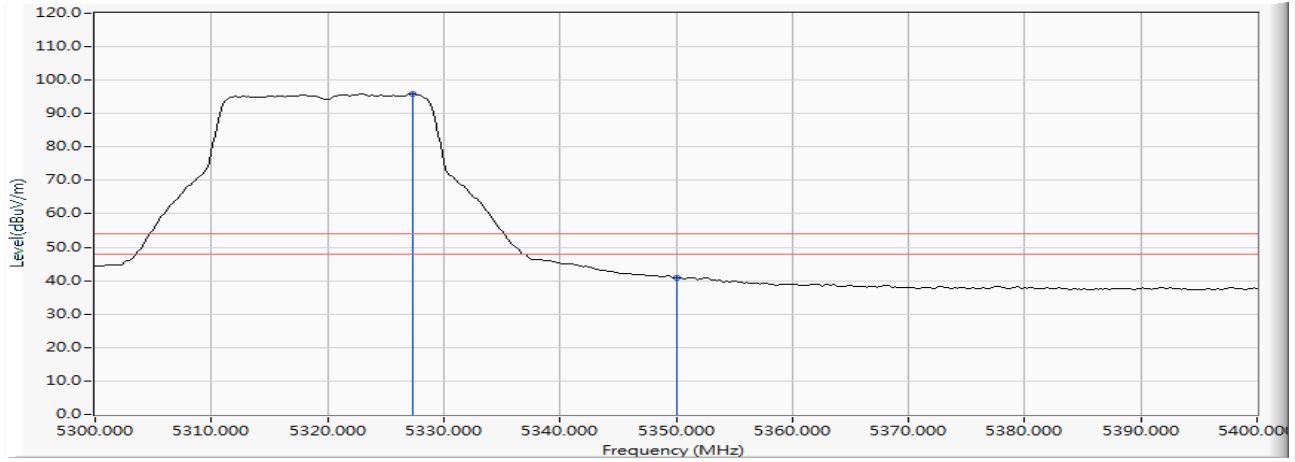


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5327.391	11.082	84.822	95.904	--	--	AVERAGE
2		5350.000	11.024	29.800	40.824	-13.176	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 64 (5320MHz)

**Vertical**

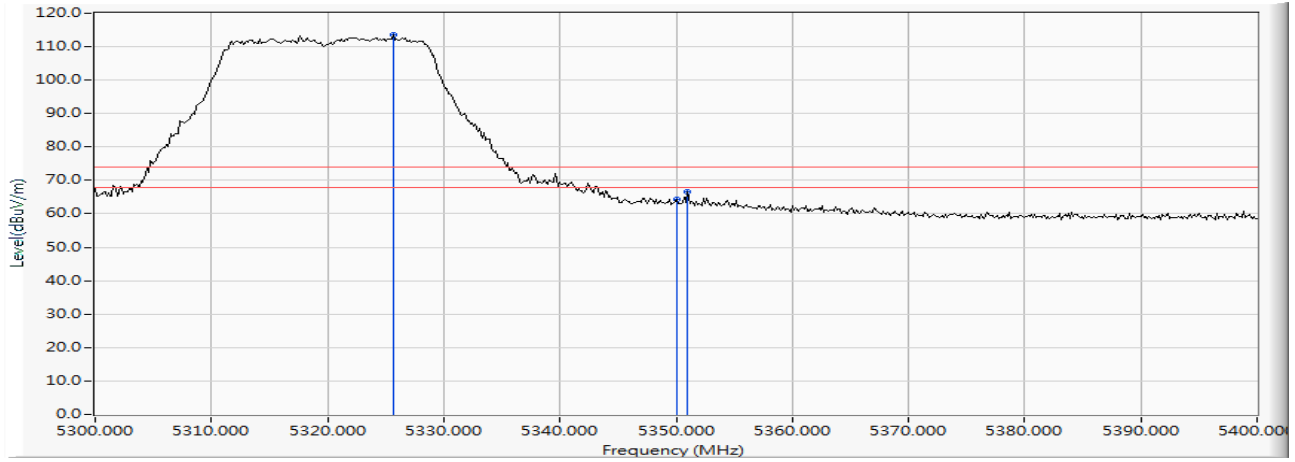


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5325.652	13.013	100.414	113.428	--	--	PEAK
2		5350.000	12.999	51.306	64.305	-9.695	74.000	PEAK
3		5351.014	12.999	53.473	66.472	-7.528	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 64 (5320MHz)

**Vertical**

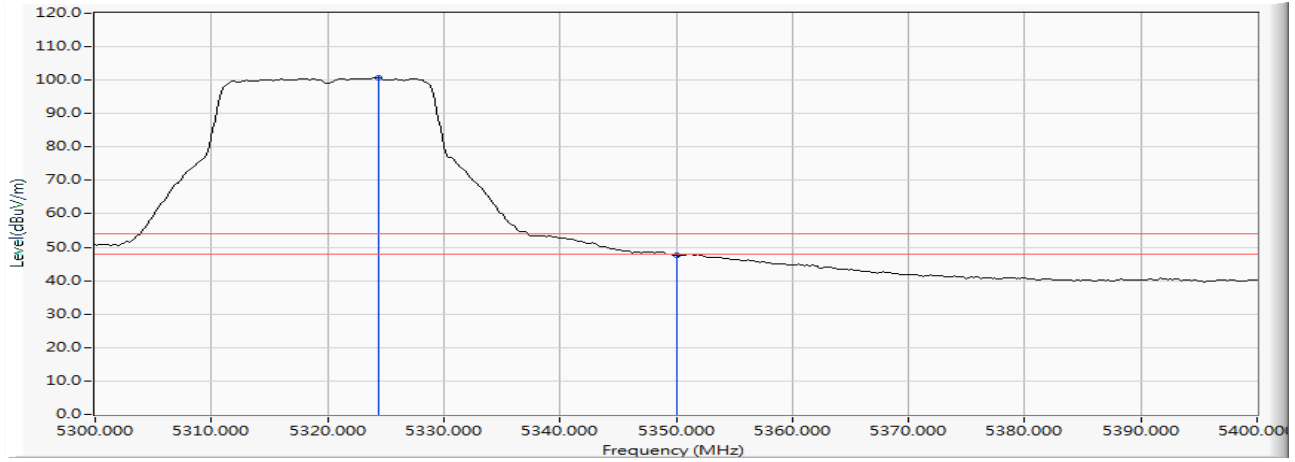


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5324.348	13.014	87.649	100.664	--	--	AVERAGE
2		5350.000	12.999	34.589	47.588	-6.412	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 100 (5500MHz)

**Horizontal**

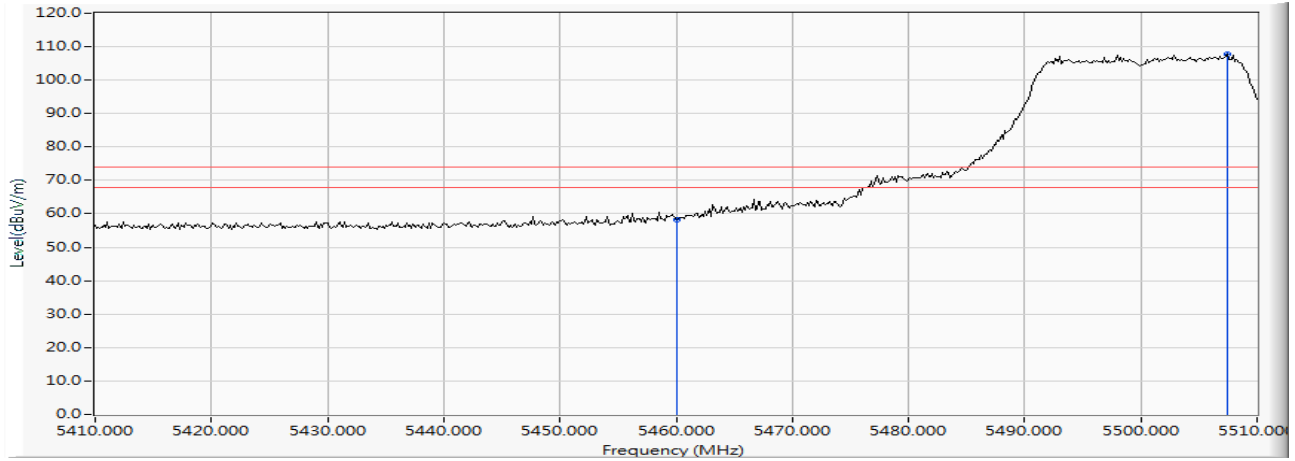


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	46.670	58.373	-15.627	74.000	PEAK
2	*	5507.391	12.185	95.711	107.895	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 100 (5500MHz)

**Horizontal**

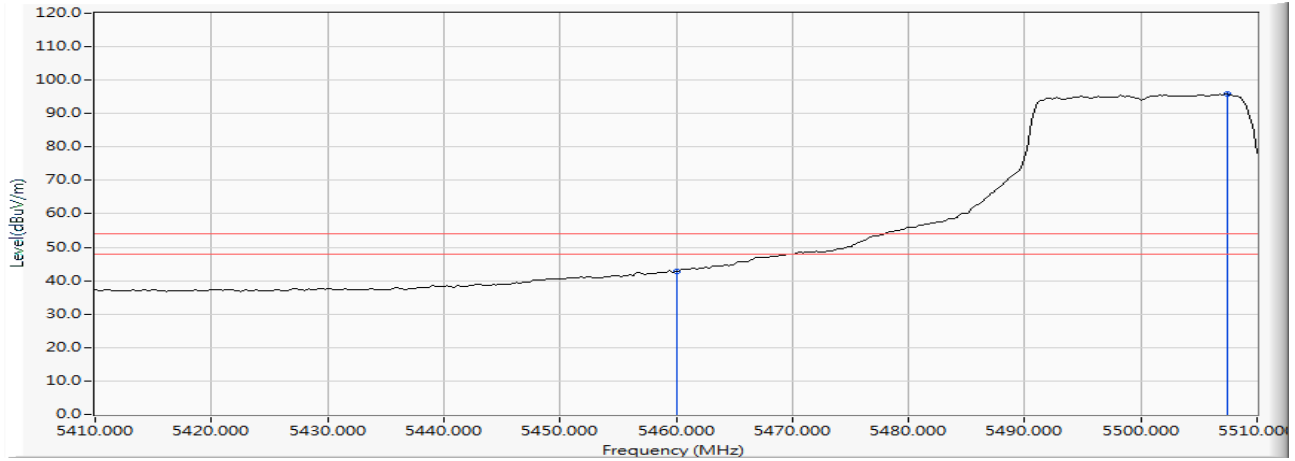

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	31.039	42.742	-11.258	54.000	AVERAGE
2	*	5507.391	12.185	83.605	95.789	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 100 (5500MHz)

**Vertical**

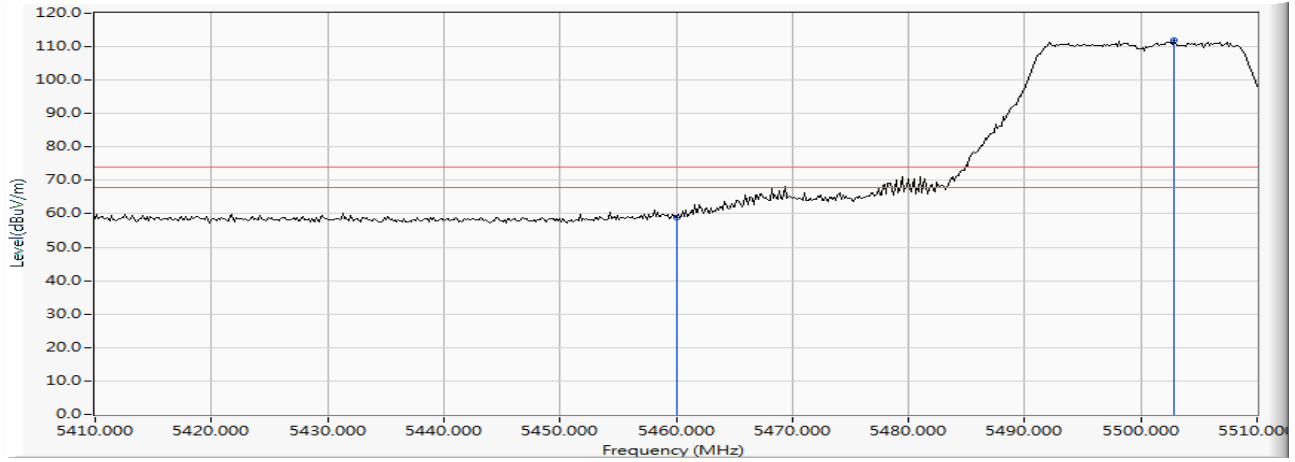


		<b>Frequency (MHz)</b>	<b>Correct Factor (dB)</b>	<b>Reading Level (dBuV)</b>	<b>Measure Level (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Limit (dBuV/m)</b>	<b>Detector Type</b>
1		5460.000	13.390	45.454	58.844	-15.156	74.000	PEAK
2	*	5502.899	13.639	98.223	111.861	--	--	PEAK

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 100 (5500MHz)

**Vertical**

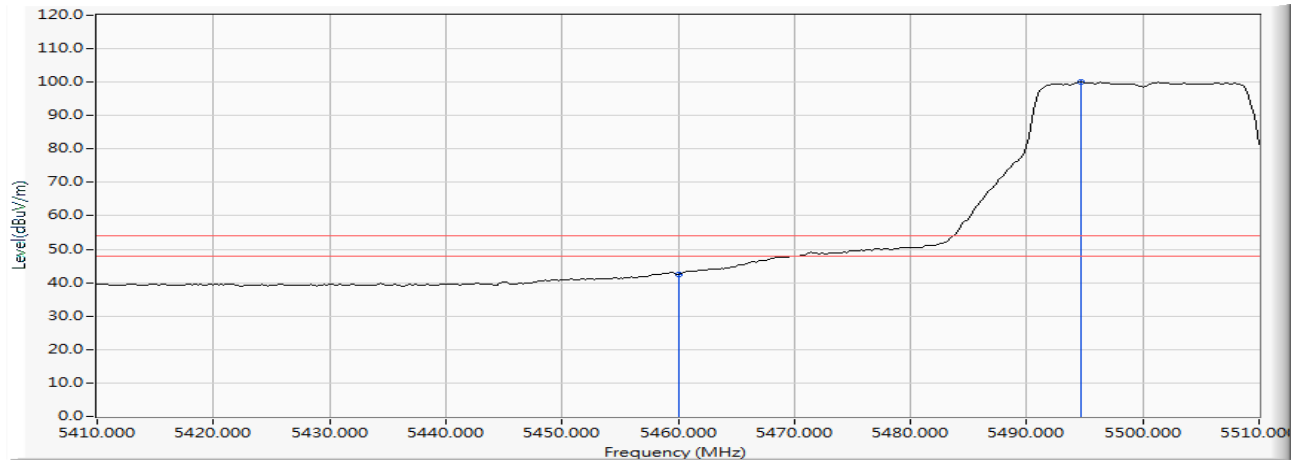


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	29.152	42.542	-11.458	54.000	AVERAGE
2	*	5494.638	13.612	86.423	100.035	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 100 (5500MHz)


**Horizontal**

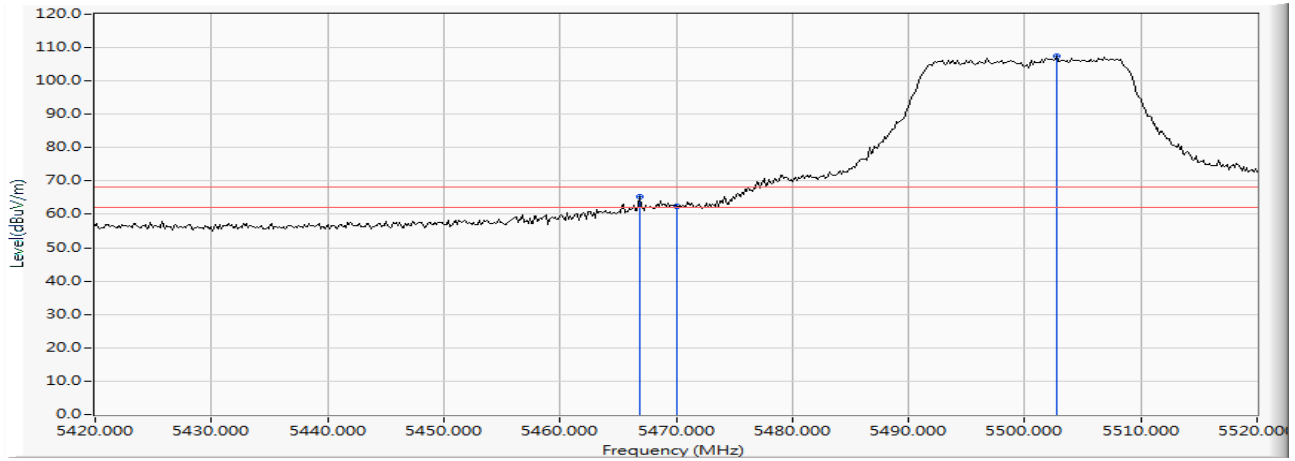

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5466.812	11.795	53.595	65.390	-2.830	68.220	PEAK
2		5470.000	11.838	50.426	62.264	-5.956	68.220	PEAK
3	*	5502.754	12.188	95.164	107.352	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 100 (5500MHz)


**Vertical**

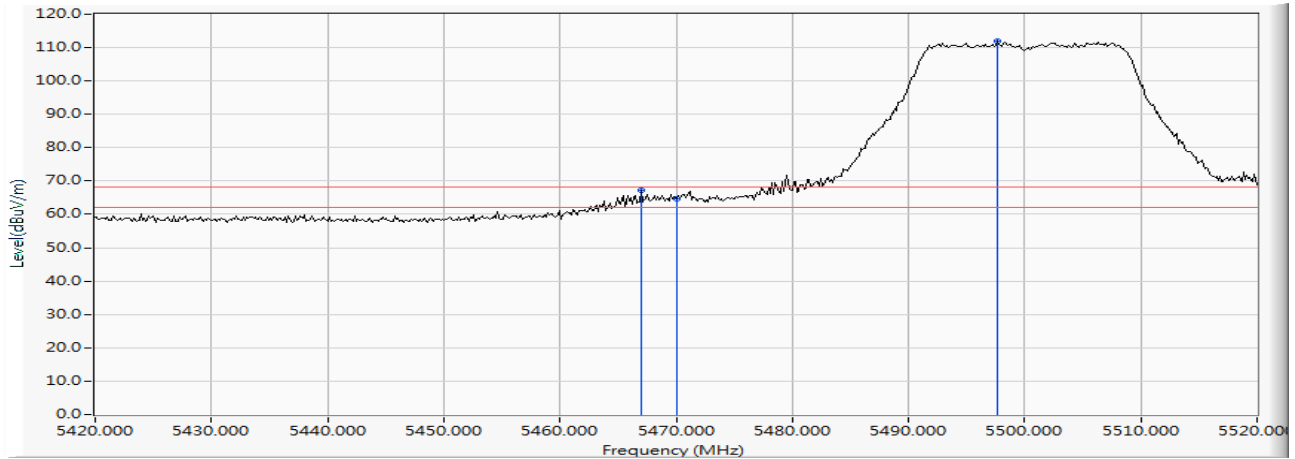

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5466.957	13.441	53.648	67.088	-1.132	68.220	PEAK
2		5470.000	13.462	51.176	64.638	-3.582	68.220	PEAK
3	*	5497.681	13.622	98.233	111.855	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 140 (5700MHz)


**Horizontal**

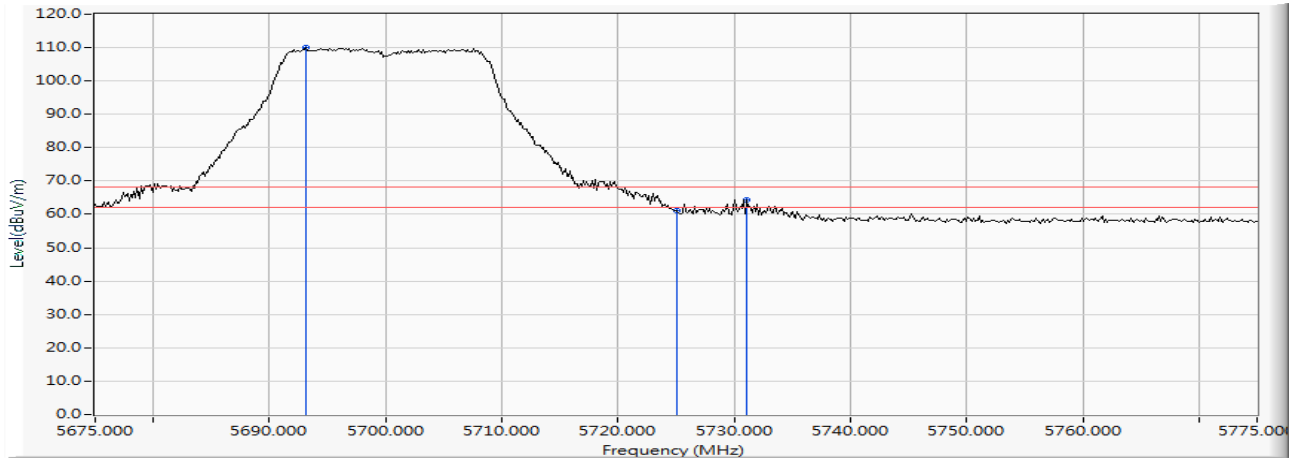

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5693.116	11.652	98.458	110.110	--	--	PEAK
2		5725.000	11.592	49.461	61.053	-7.167	68.220	PEAK
3		5731.087	11.574	52.787	64.360	-3.860	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 140 (5700MHz)


**Vertical**

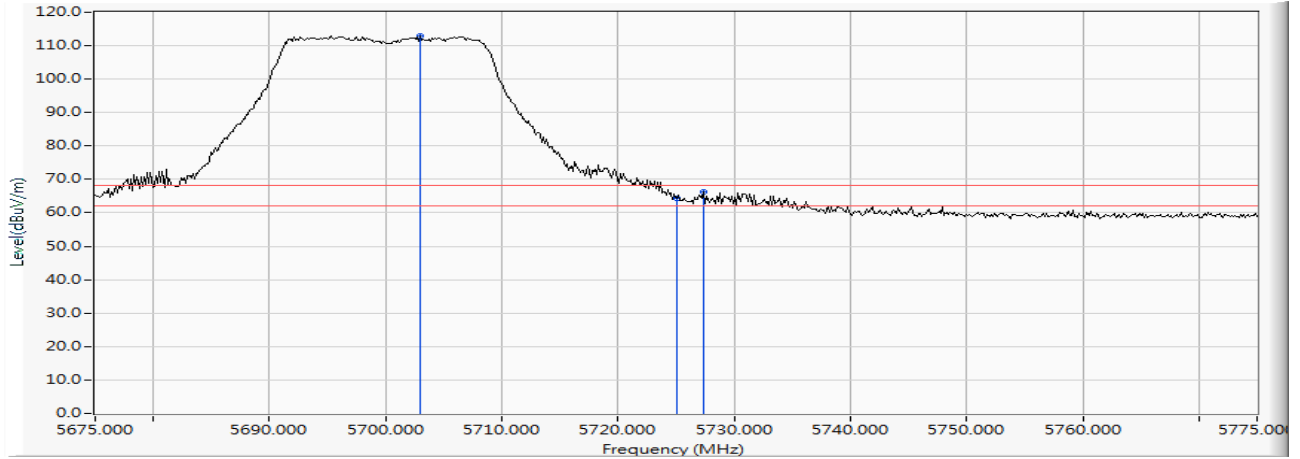

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5702.971	12.998	99.918	112.915	--	--	PEAK
2		5725.000	12.930	51.452	64.382	-3.838	68.220	PEAK
3		5727.319	12.922	53.275	66.197	-2.023	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 149 (5745MHz)


**Horizontal**

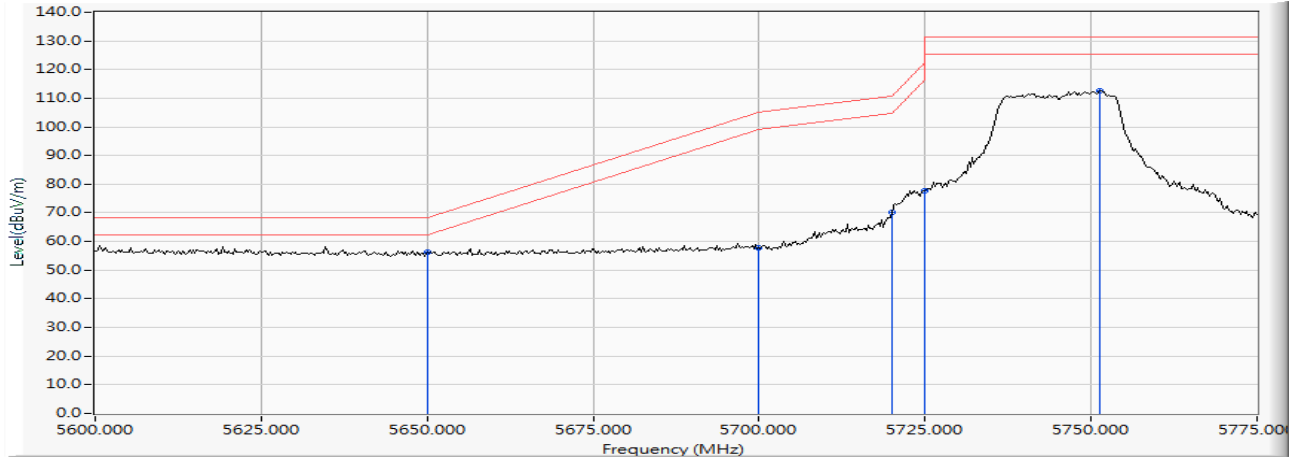

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	11.554	44.574	56.129	-12.091	68.220	PEAK
2		5700.000	11.647	45.993	57.640	-47.560	105.200	PEAK
3		5720.000	11.607	58.673	70.280	-40.520	110.800	PEAK
4		5725.000	11.592	66.185	77.777	-44.423	122.200	PEAK
5		5751.413	11.507	101.026	112.534	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 149 (5745MHz)

**Vertical**

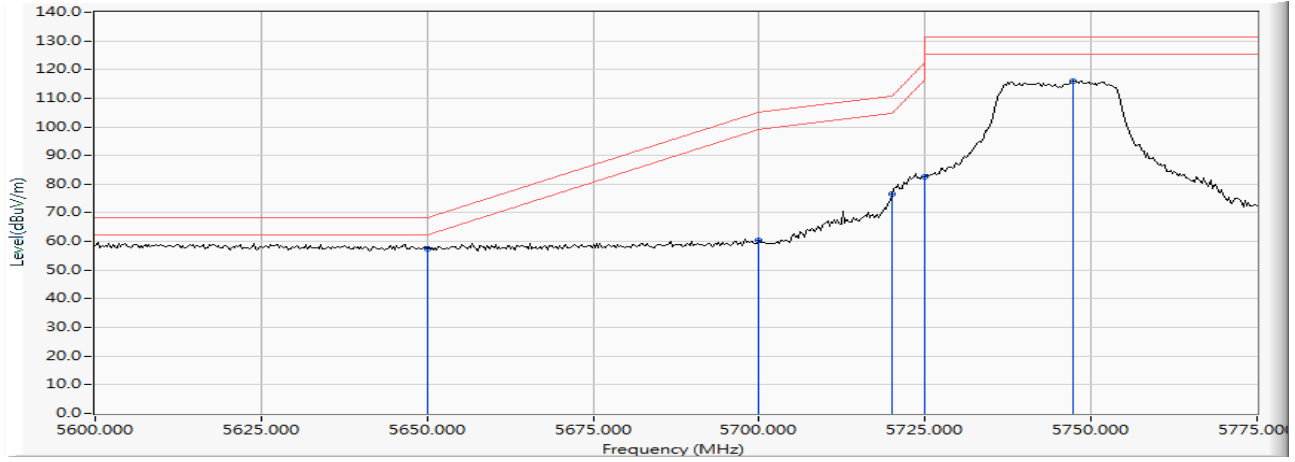


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	13.029	44.456	57.485	-10.735	68.220	PEAK
2		5700.000	13.003	47.412	60.415	-44.785	105.200	PEAK
3		5720.000	12.947	63.453	76.400	-34.400	110.800	PEAK
4		5725.000	12.930	69.705	82.635	-39.565	122.200	PEAK
5		5747.355	12.852	103.215	116.067	--	--	PEAK



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/12  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 165 (5825MHz)


**Horizontal**

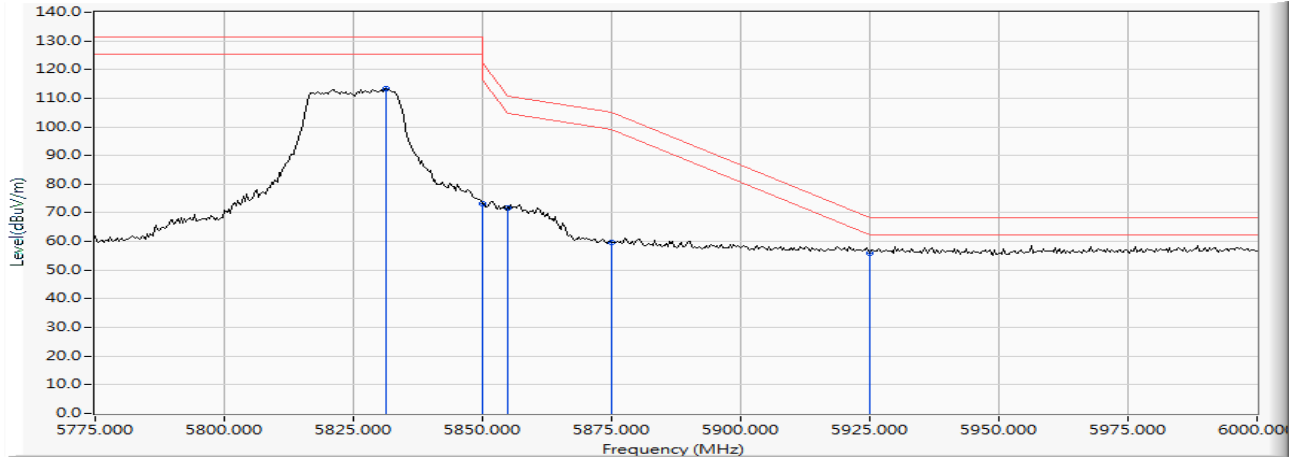

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5831.413	11.573	101.785	113.357	--	--	PEAK
2		5850.000	11.701	61.602	73.303	-48.897	122.200	PEAK
3		5855.000	11.735	60.069	71.804	-38.996	110.800	PEAK
4		5875.000	11.873	47.922	59.795	-45.405	105.200	PEAK
5	*	5925.000	12.068	43.907	55.976	-12.244	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 165 (5825MHz)


**Vertical**

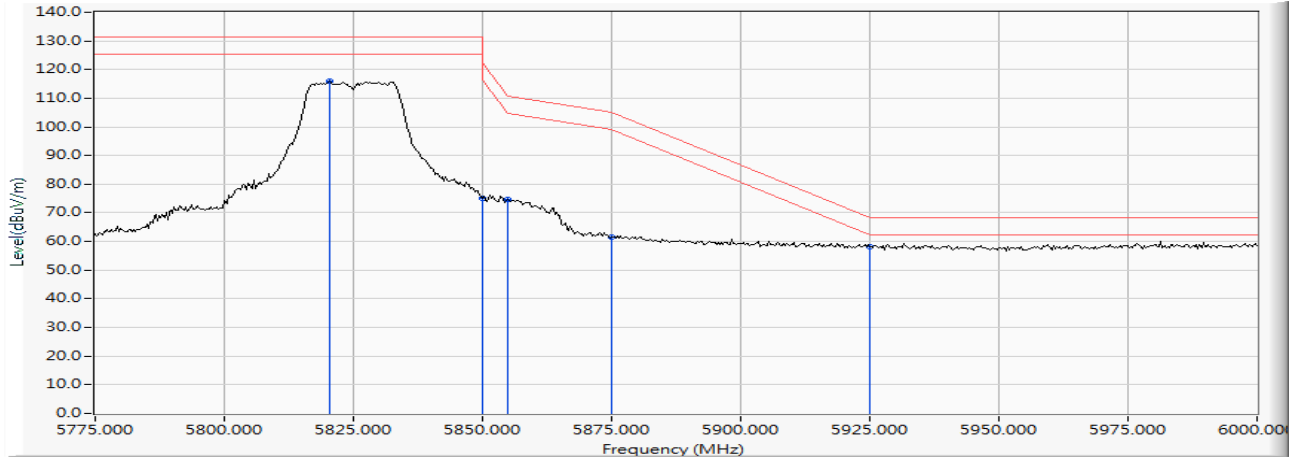

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5820.326	12.712	103.094	115.805	--	--	PEAK
2		5850.000	12.774	62.344	75.118	-47.082	122.200	PEAK
3		5855.000	12.784	61.754	74.538	-36.262	110.800	PEAK
4		5875.000	12.825	48.586	61.411	-43.789	105.200	PEAK
5	*	5925.000	12.911	45.227	58.138	-10.082	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 38 (5190MHz)

**Horizontal**

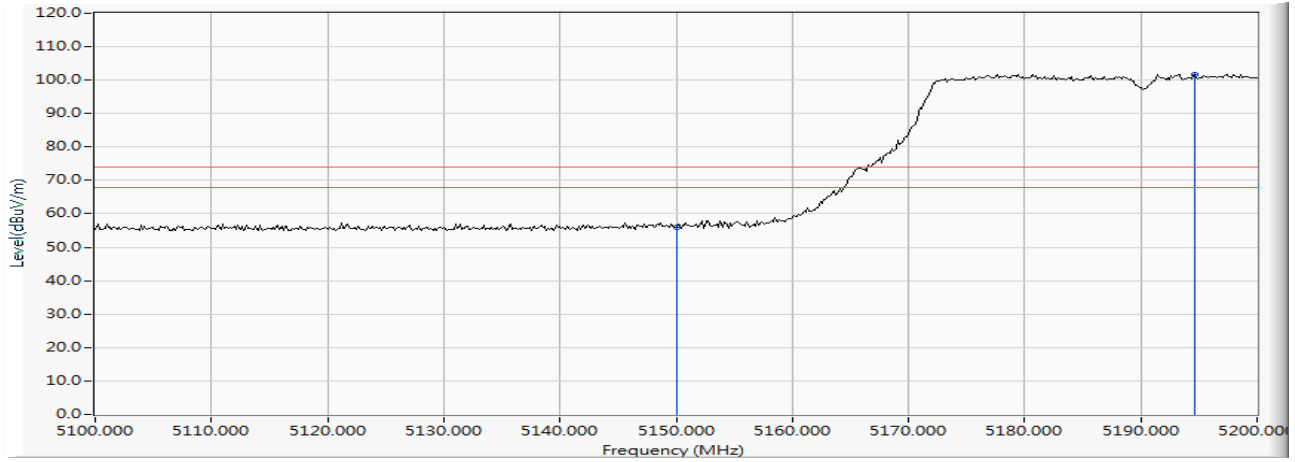


		<b>Frequency (MHz)</b>	<b>Correct Factor (dB)</b>	<b>Reading Level (dBuV)</b>	<b>Measure Level (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Limit (dBuV/m)</b>	<b>Detector Type</b>
1		5150.000	10.470	45.376	55.847	-18.153	74.000	PEAK
2	*	5194.638	10.350	91.399	101.749	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 38 (5190MHz)

**Horizontal**

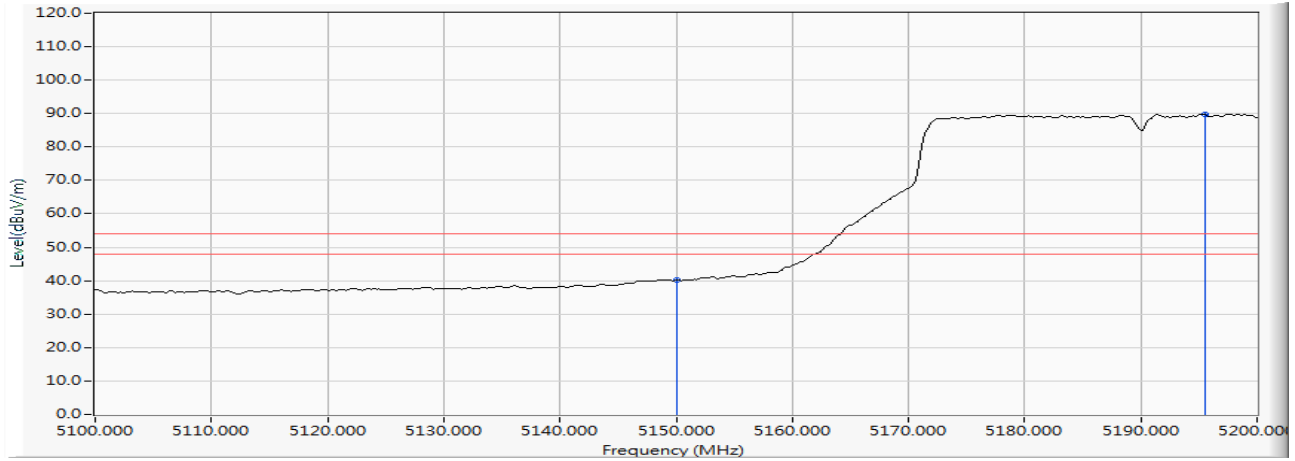


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	29.674	40.145	-13.855	54.000	AVERAGE
2	*	5195.507	10.347	79.491	89.838	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 38 (5190MHz)

**Vertical**

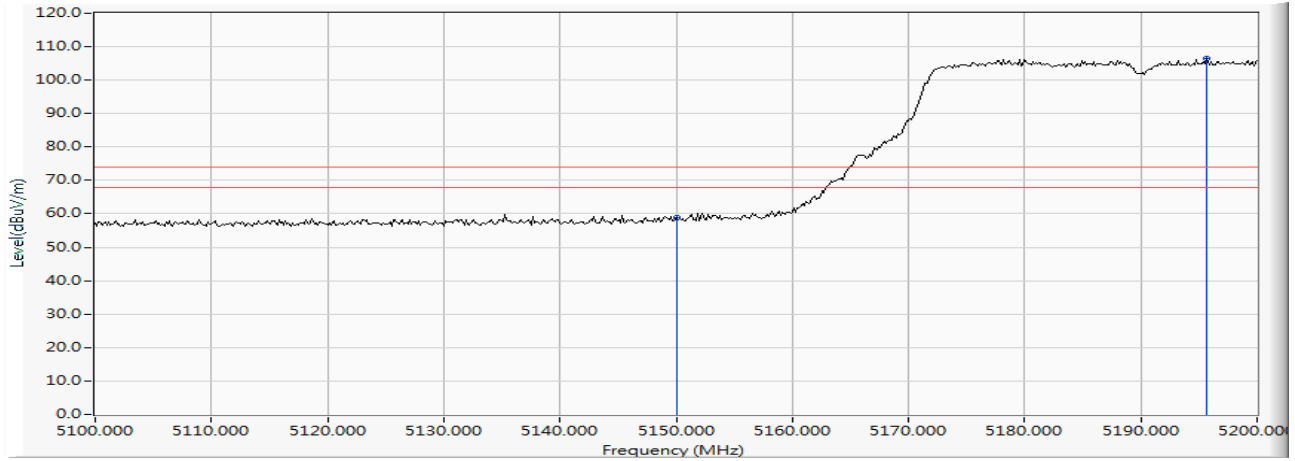


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	46.407	58.797	-15.203	74.000	PEAK
2	*	5195.652	12.553	94.048	106.601	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 38 (5190MHz)

**Vertical**

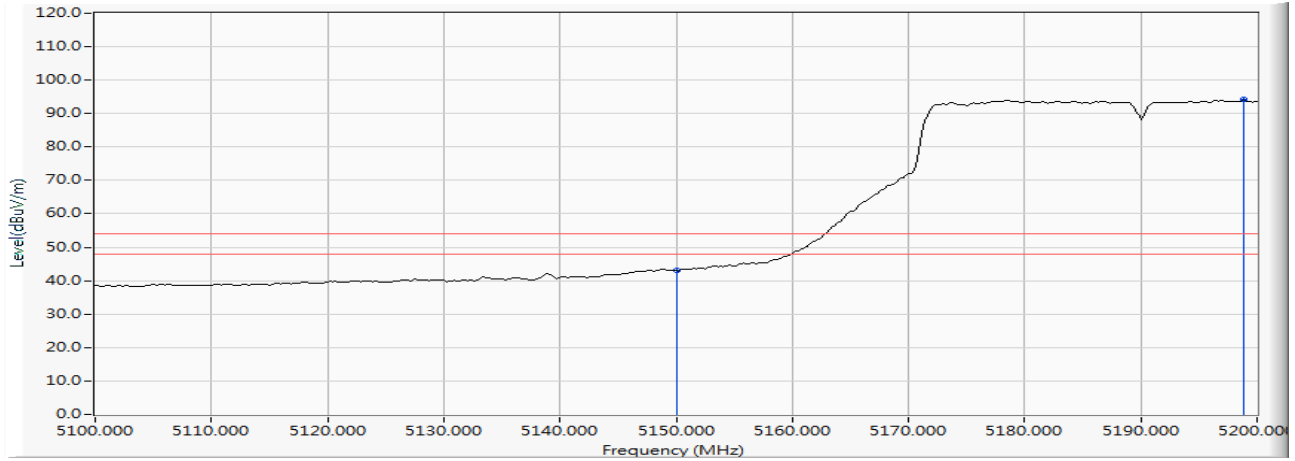


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	30.590	42.980	-11.020	54.000	AVERAGE
2	*	5198.841	12.561	81.633	94.195	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 62 (5310MHz)

**Horizontal**

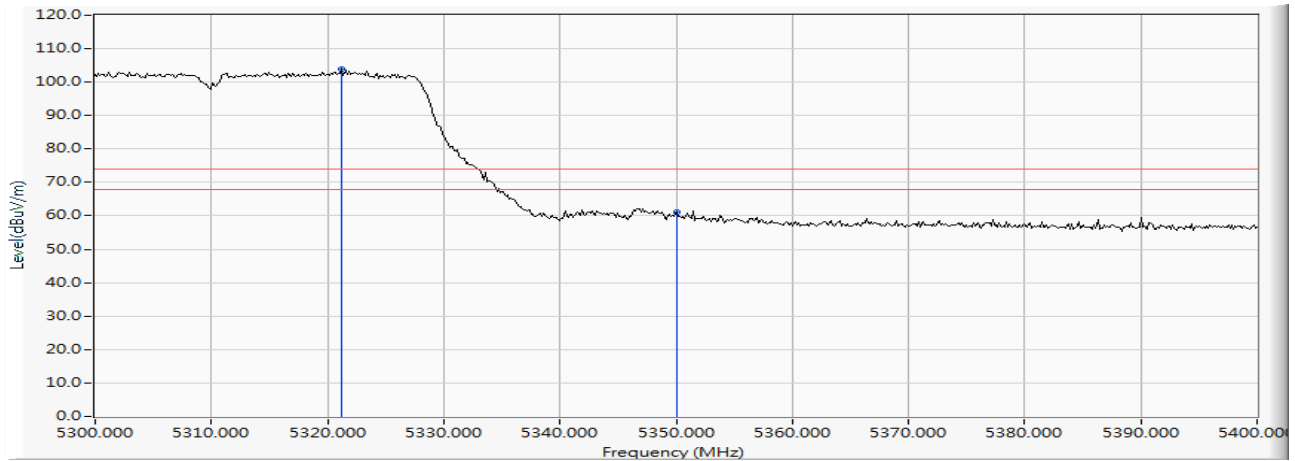


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5321.159	11.098	92.805	103.903	--	--	PEAK
2		5350.000	11.024	50.208	61.232	-12.768	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 62 (5310MHz)

**Horizontal**

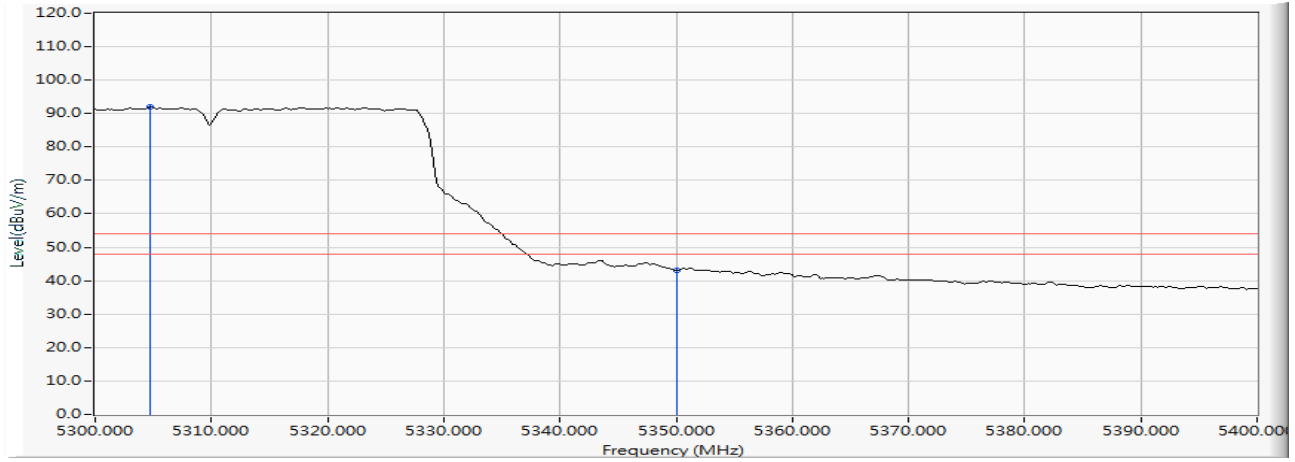

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5304.783	11.141	80.711	91.851	--	--	AVERAGE
2		5350.000	11.024	32.174	43.198	-10.802	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 62 (5310MHz)

**Vertical**

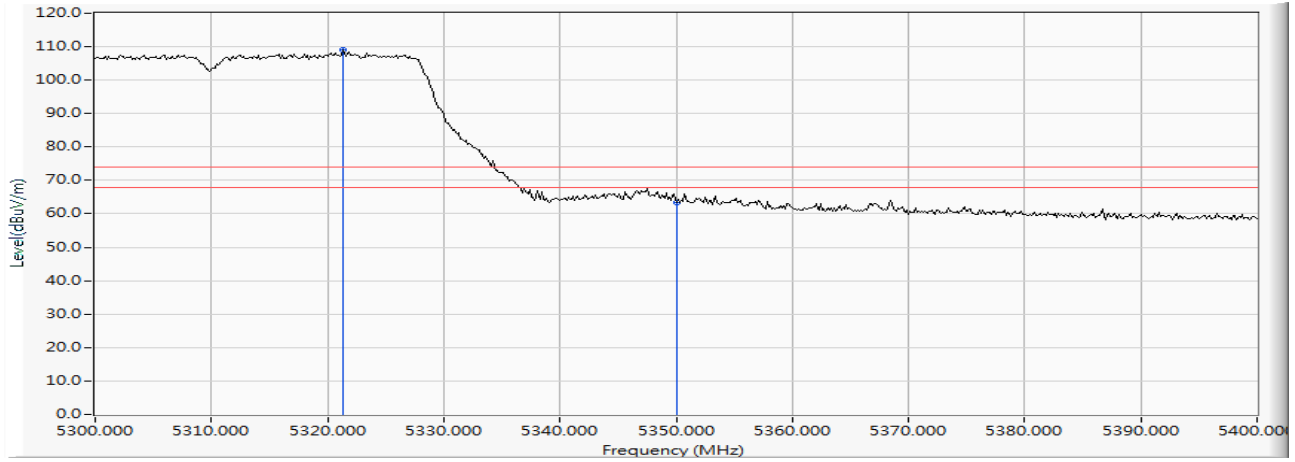


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5321.304	13.017	95.942	108.959	--	--	PEAK
2		5350.000	12.999	50.509	63.508	-10.492	74.000	PEAK

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 62 (5310MHz)

**Vertical**

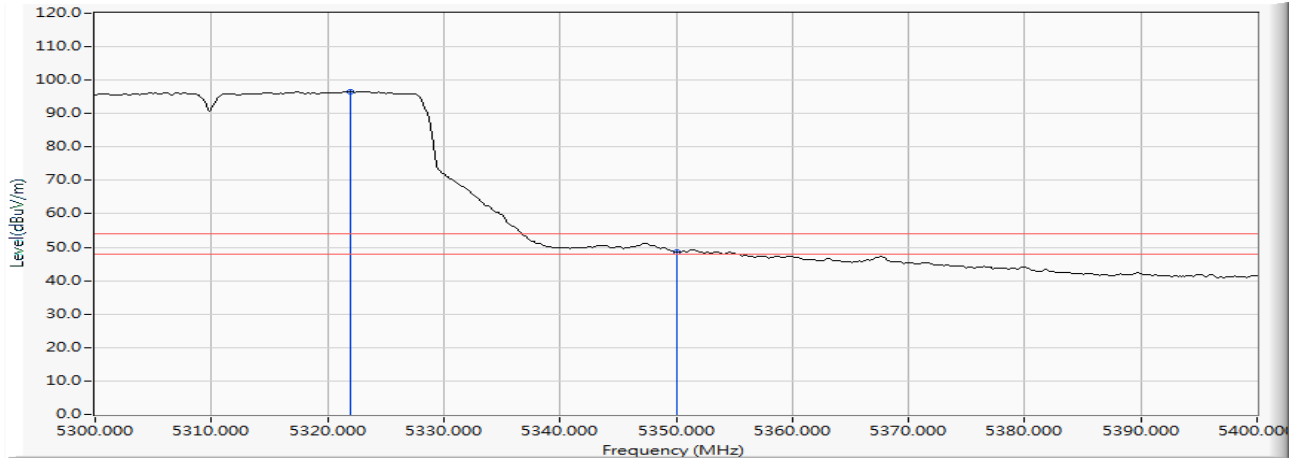


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5322.029	13.016	83.626	96.642	--	--	AVERAGE
2		5350.000	12.999	35.507	48.506	-5.494	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 102 (5510MHz)

**Horizontal**

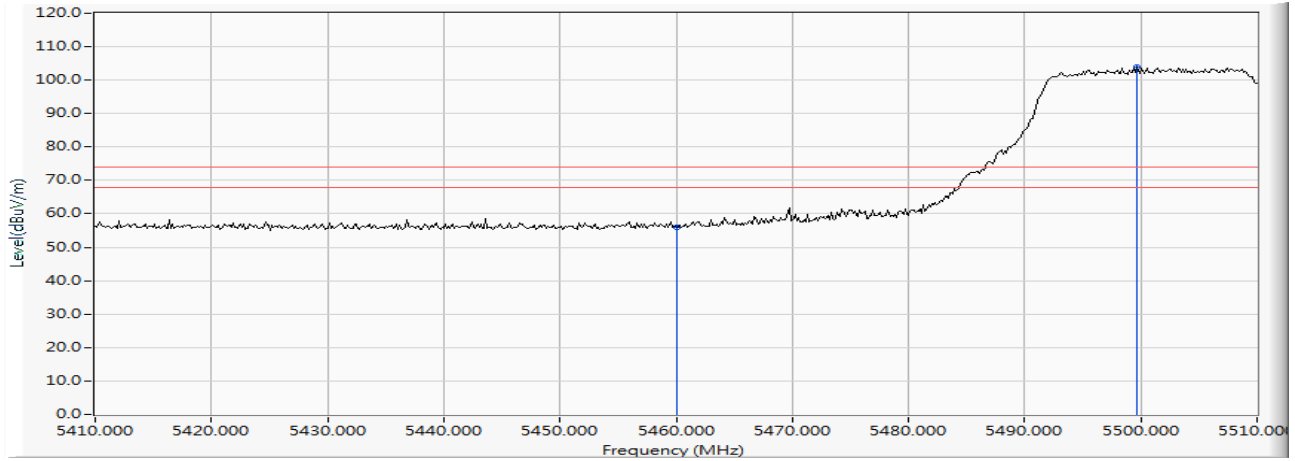


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	44.244	55.947	-18.053	74.000	PEAK
2	*	5499.710	12.166	91.871	104.038	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 102 (5510MHz)

**Horizontal**

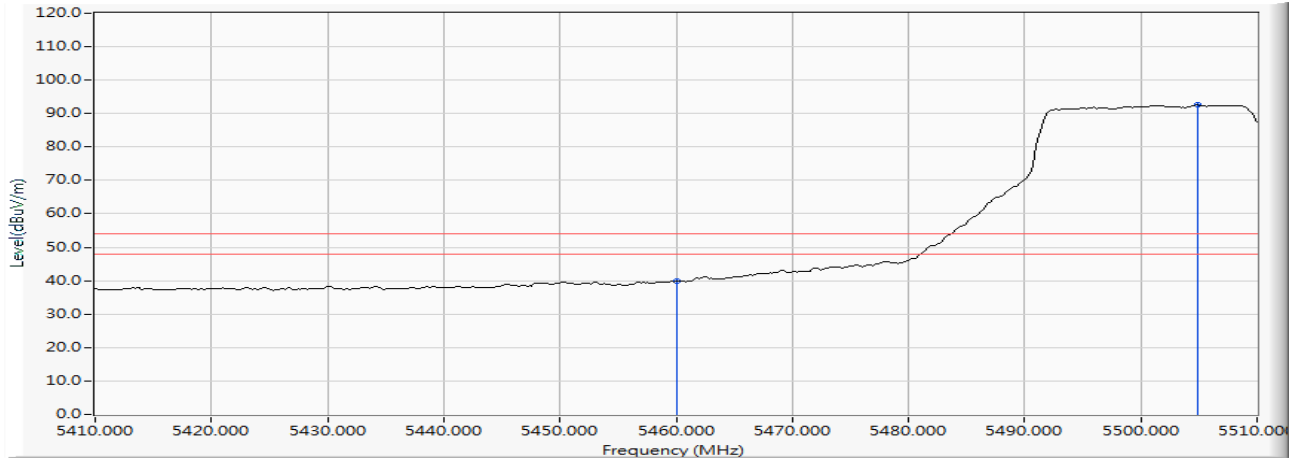


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	28.054	39.757	-14.243	54.000	AVERAGE
2	*	5504.928	12.203	80.323	92.526	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 102 (5510MHz)

**Vertical**

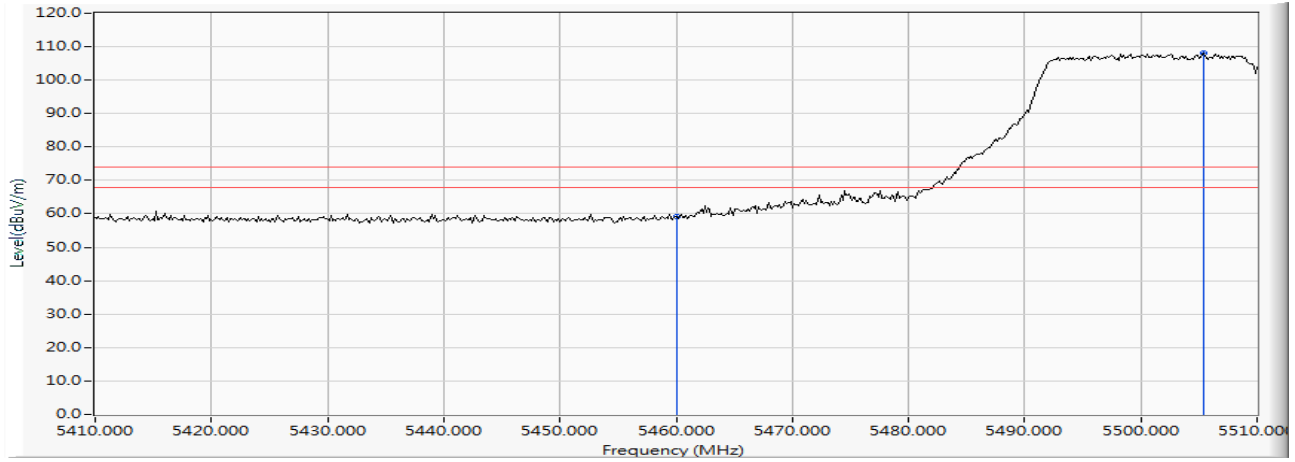


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	45.787	59.177	-14.823	74.000	PEAK
2	*	5505.362	13.642	94.412	108.054	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 102 (5510MHz)

**Vertical**

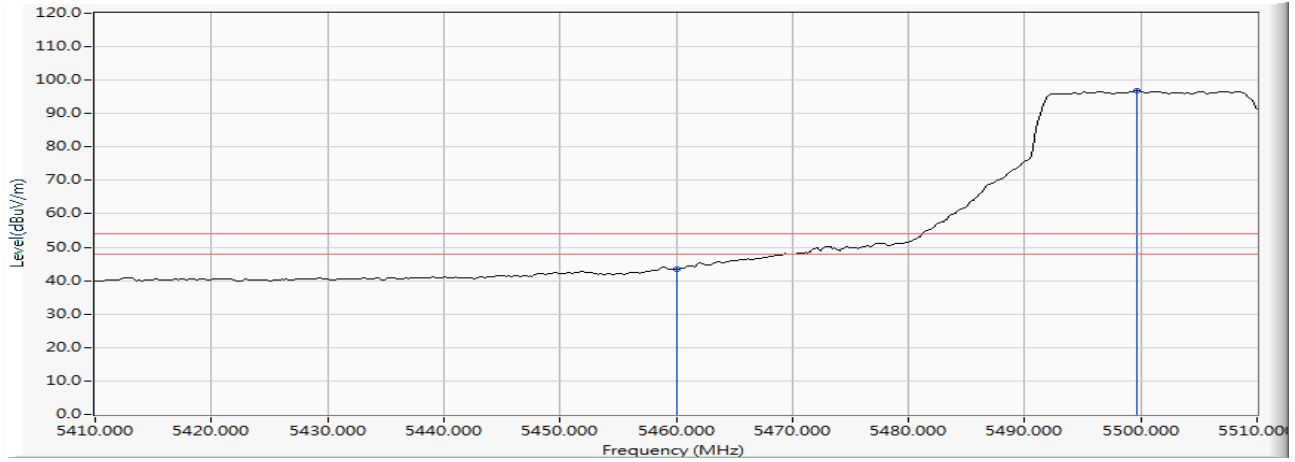


		<b>Frequency (MHz)</b>	<b>Correct Factor (dB)</b>	<b>Reading Level (dBuV)</b>	<b>Measure Level (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Limit (dBuV/m)</b>	<b>Detector Type</b>
1		5460.000	13.390	29.969	43.359	-10.641	54.000	AVERAGE
2	*	5499.710	13.628	83.174	96.802	--	--	AVERAGE

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 102 (5510MHz)


**Horizontal**

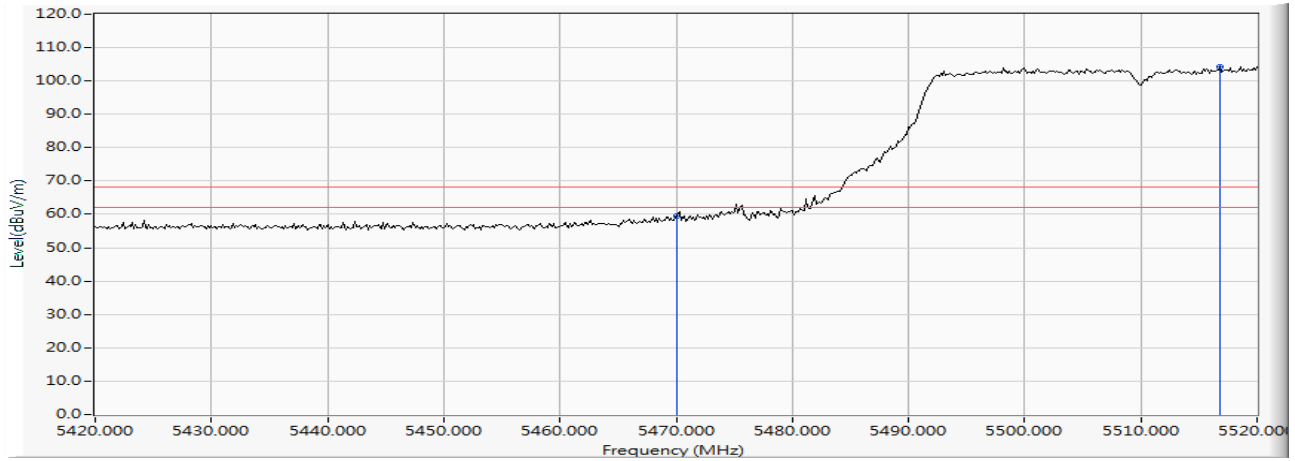

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	11.838	47.733	59.571	-8.649	68.220	PEAK
2	*	5516.812	12.108	92.130	104.238	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 102 (5510MHz)

**Vertical**

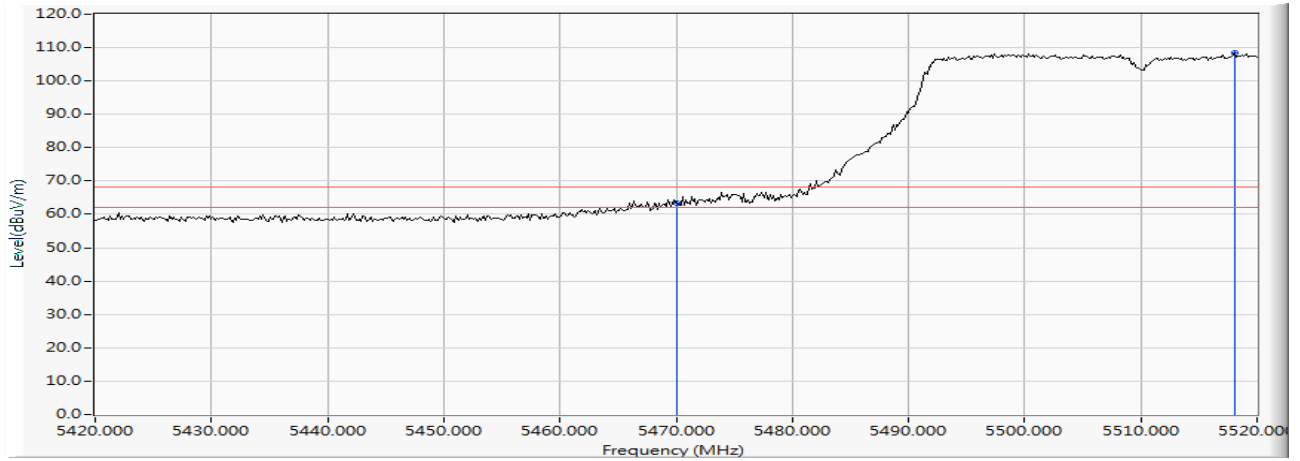


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	13.462	49.841	63.303	-4.917	68.220	PEAK
2	*	5518.116	13.560	94.757	108.317	--	--	PEAK



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/12  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 134 (5670MHz)


**Horizontal**

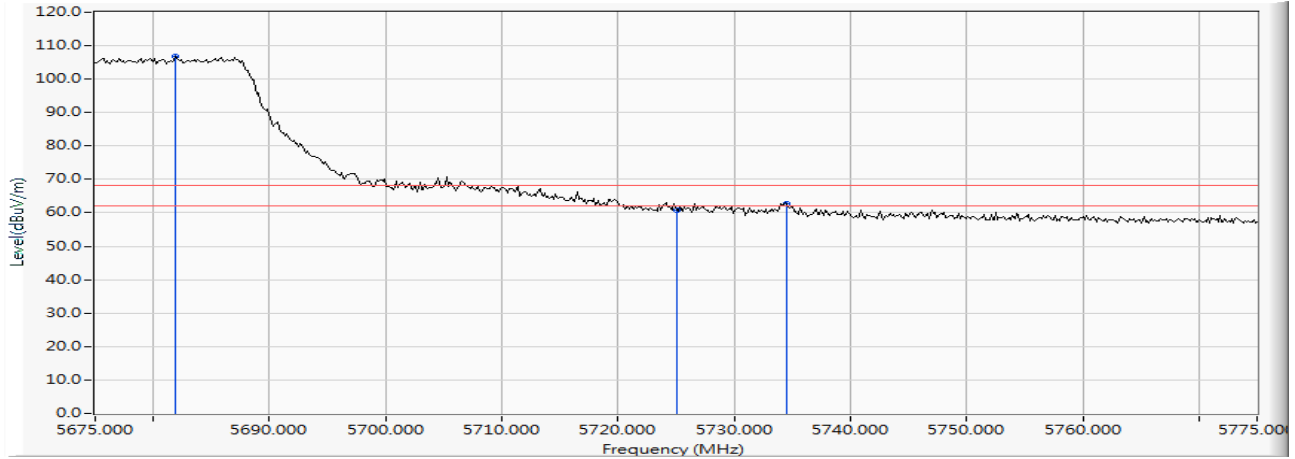

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5681.957	11.630	95.098	106.727	--	--	PEAK
2		5725.000	11.592	49.052	60.644	-7.576	68.220	PEAK
3		5734.565	11.561	51.267	62.829	-5.391	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/12  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 134 (5670MHz)


**Vertical**

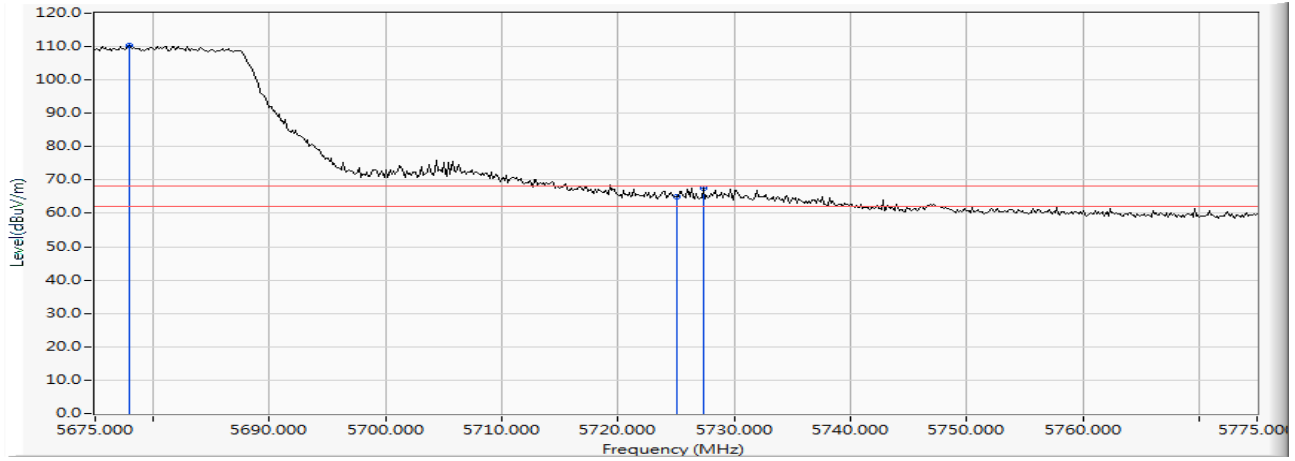

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5677.899	13.023	97.463	110.485	--	--	PEAK
2		5725.000	12.930	52.160	65.090	-3.130	68.220	PEAK
3		5727.319	12.922	54.796	67.718	-0.502	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 151 (5755MHz)


**Horizontal**

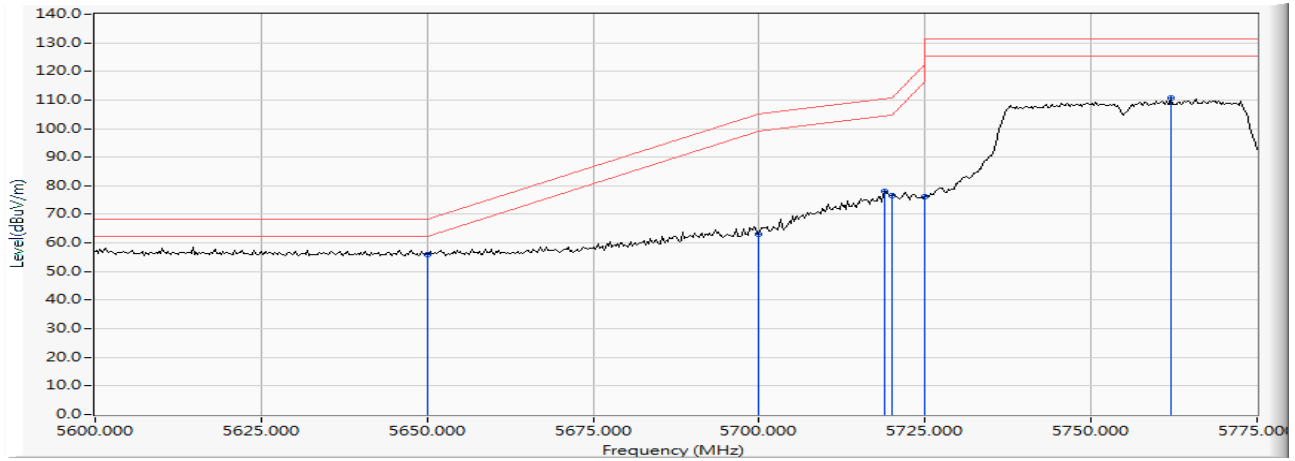

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	11.554	44.540	56.095	-12.125	68.220	PEAK
2		5700.000	11.647	51.591	63.238	-41.962	105.200	PEAK
3		5718.949	11.610	66.413	78.023	-32.483	110.506	PEAK
4		5720.000	11.607	64.868	76.475	-34.325	110.800	PEAK
5		5725.000	11.592	64.550	76.142	-46.058	122.200	PEAK
6		5762.065	11.475	99.247	110.722	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 151 (5755MHz)


**Vertical**

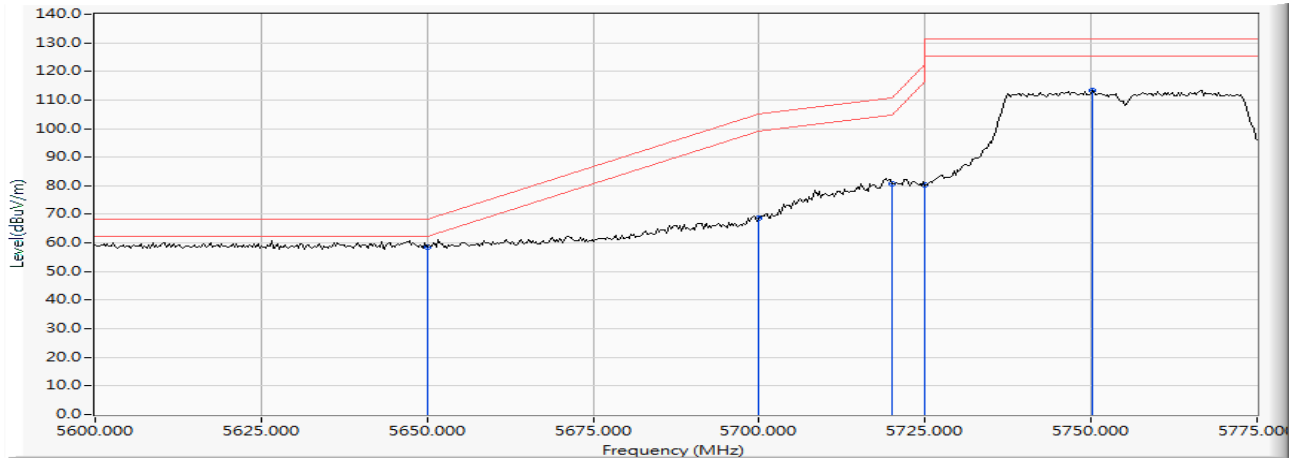

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	13.029	45.516	58.545	-9.675	68.220	PEAK
2		5700.000	13.003	55.523	68.526	-36.674	105.200	PEAK
3		5720.000	12.947	67.686	80.633	-30.167	110.800	PEAK
4		5725.000	12.930	67.214	80.144	-42.056	122.200	PEAK
5		5750.145	12.843	100.544	113.386	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/12  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 159 (5795MHz)


**Horizontal**

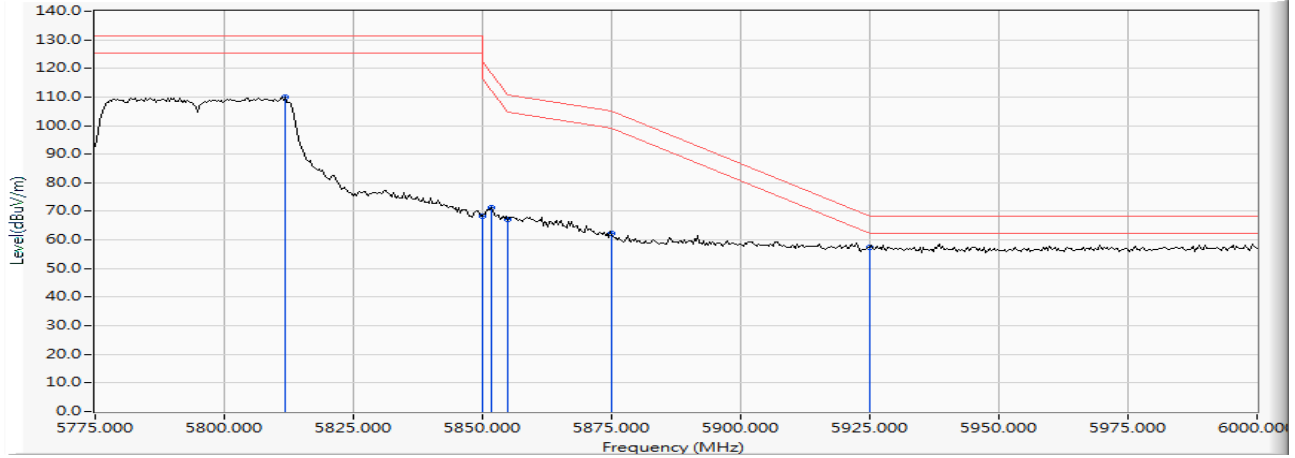

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5811.848	11.439	98.610	110.049	--	--	PEAK
2		5850.000	11.701	56.788	68.489	-53.711	122.200	PEAK
3		5851.630	11.711	59.537	71.249	-47.235	118.484	PEAK
4		5855.000	11.735	55.431	67.166	-43.634	110.800	PEAK
5		5875.000	11.873	50.294	62.167	-43.033	105.200	PEAK
6	*	5925.000	12.068	45.432	57.501	-10.719	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/06/12  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 159 (5795MHz)


**Vertical**

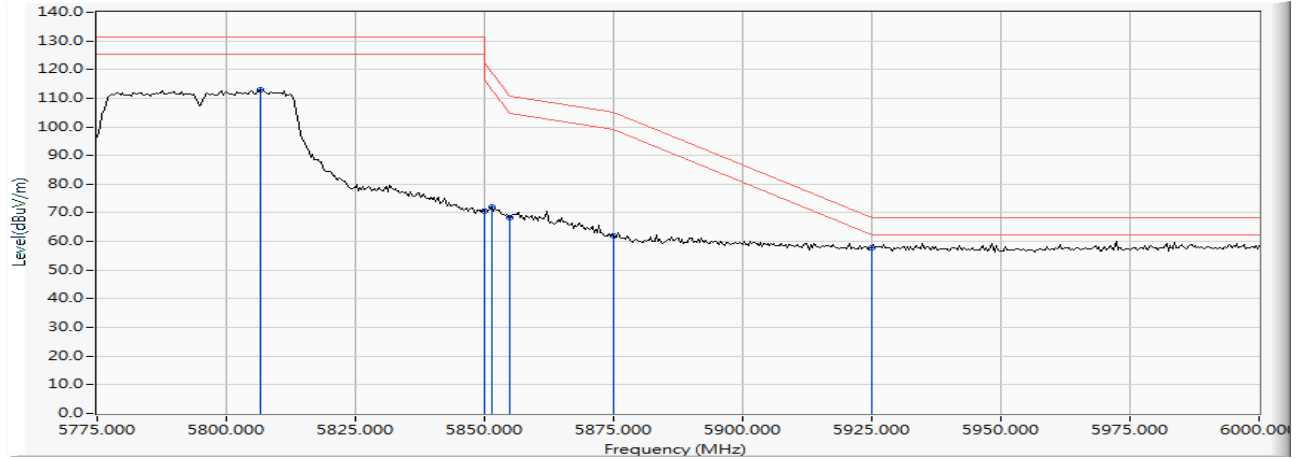

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5806.630	12.689	100.335	113.024	--	--	PEAK
2		5850.000	12.774	57.659	70.433	-51.767	122.200	PEAK
3		5851.304	12.776	59.328	72.104	-47.123	119.227	PEAK
4		5855.000	12.784	55.518	68.302	-42.498	110.800	PEAK
5		5875.000	12.825	49.104	61.929	-43.271	105.200	PEAK
6	*	5925.000	12.911	44.949	57.860	-10.360	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 42 (5210MHz)

**Horizontal**

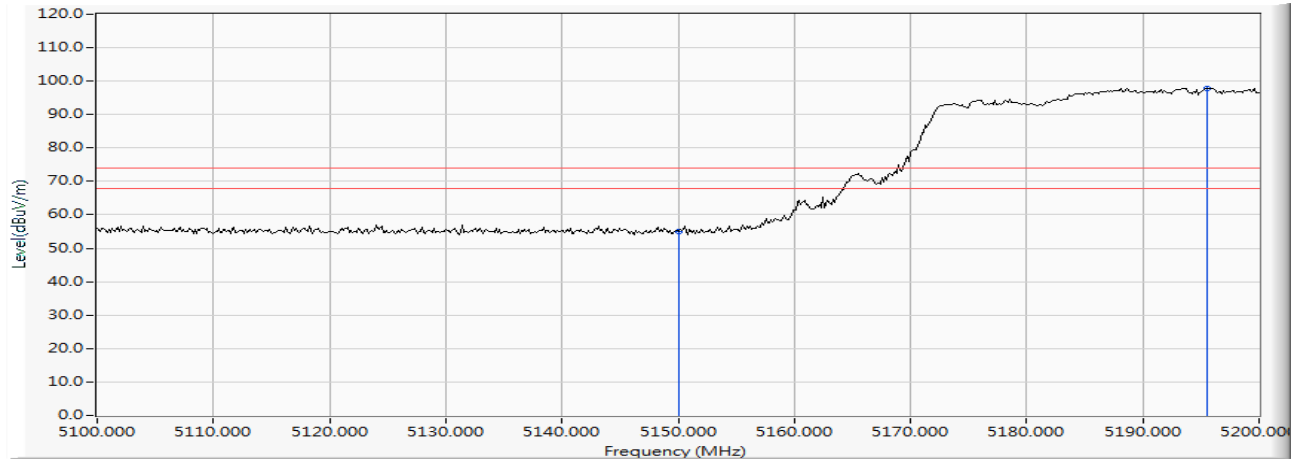


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	44.669	55.140	-18.860	74.000	PEAK
2	*	5195.507	10.347	87.572	97.919	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 42 (5210MHz)

**Horizontal**

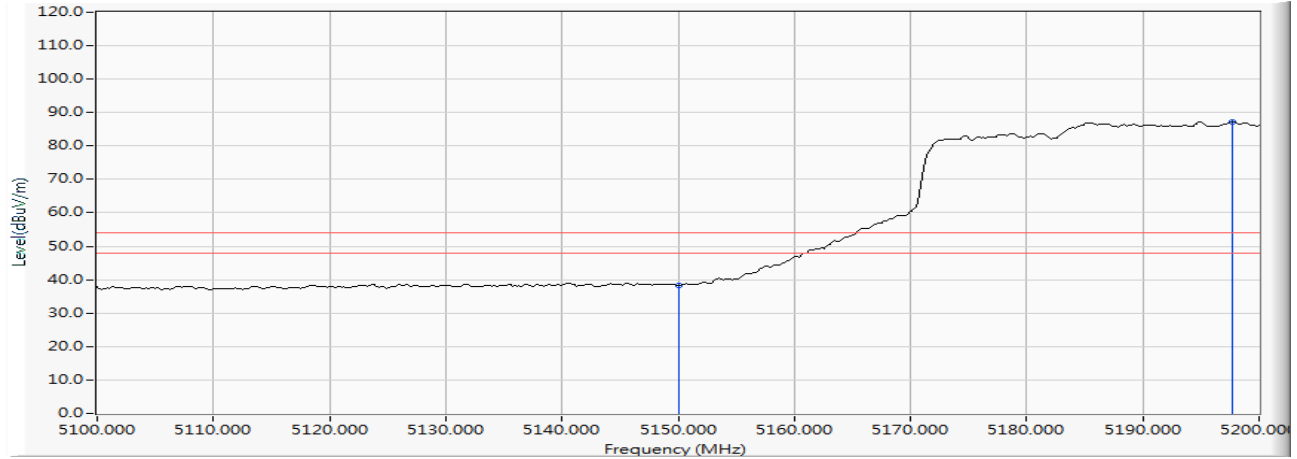

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	27.824	38.295	-15.705	54.000	AVERAGE
2	*	5197.681	10.339	76.972	87.312	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 42 (5210MHz)

**Vertical**

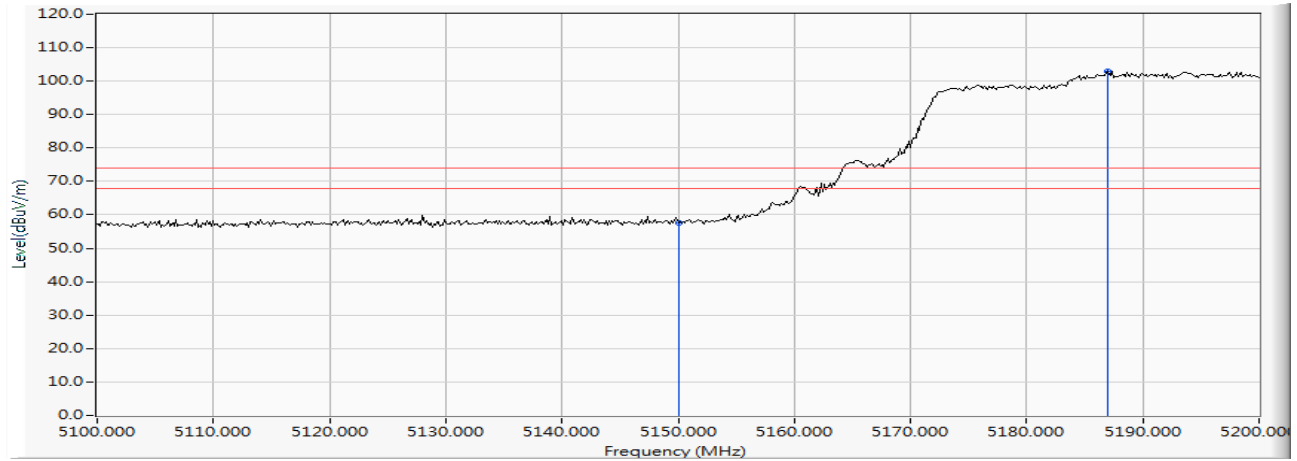


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	45.330	57.720	-16.280	74.000	PEAK
2	*	5186.957	12.528	90.550	103.078	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/28  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 42 (5210MHz)

**Vertical**

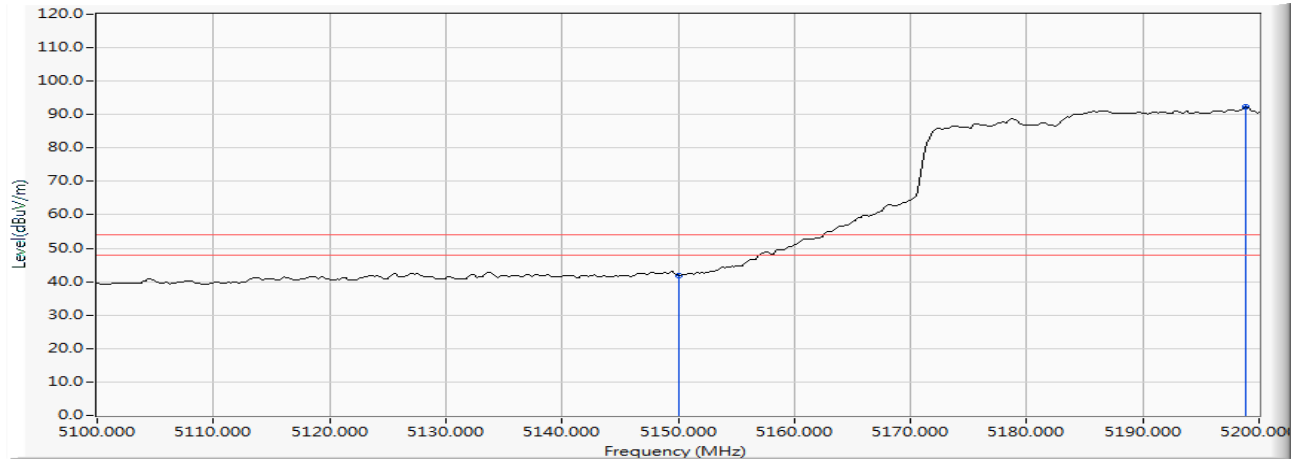


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	29.500	41.890	-12.110	54.000	AVERAGE
2	*	5198.841	12.561	79.628	92.190	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 58 (5290MHz)

**Horizontal**

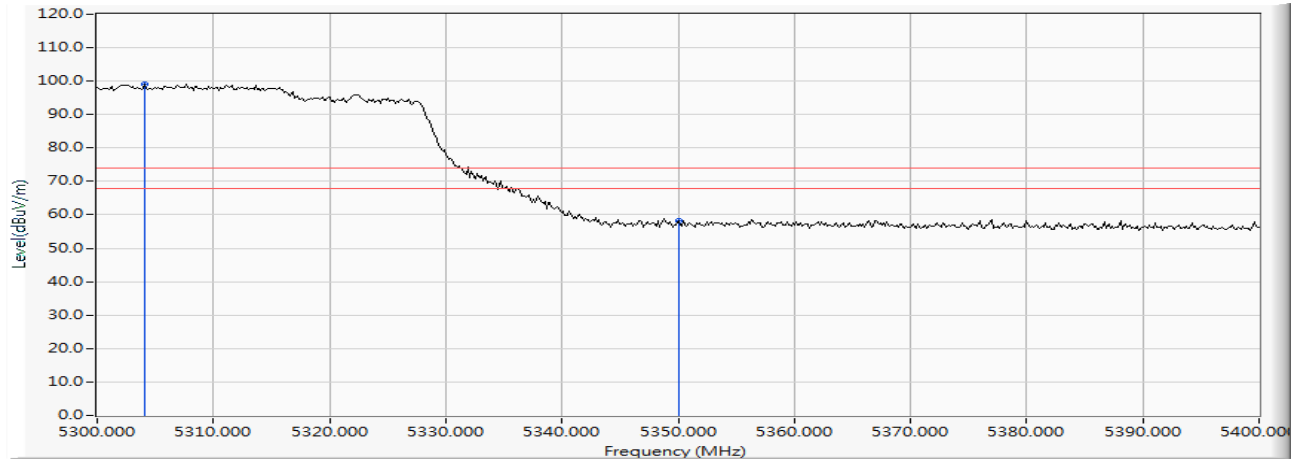


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5304.058	11.142	88.030	99.172	--	--	PEAK
2		5350.000	11.024	47.090	58.114	-15.886	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 58 (5290MHz)

**Horizontal**

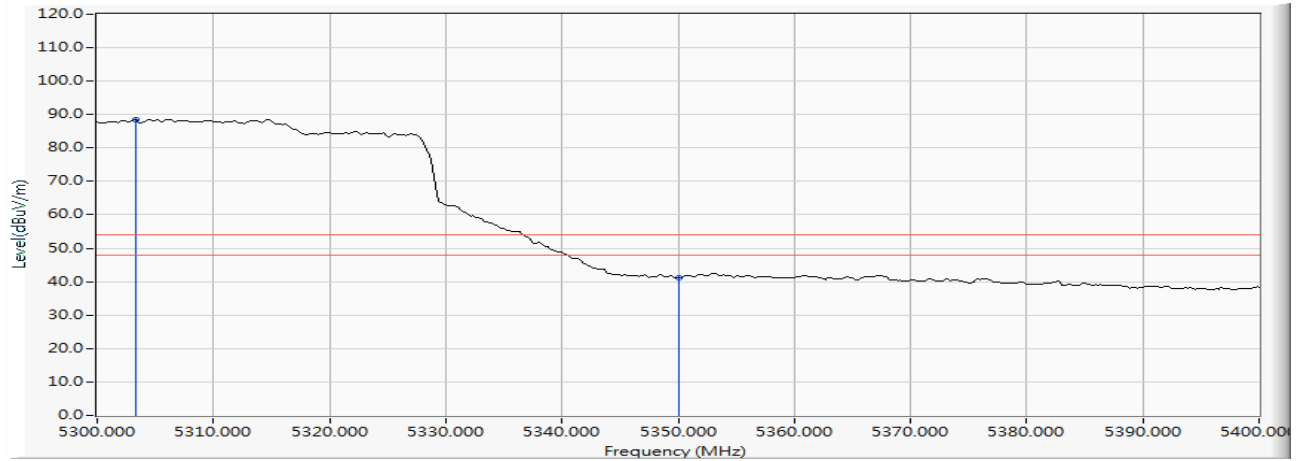


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5303.333	11.144	77.403	88.546	--	--	AVERAGE
2		5350.000	11.024	30.163	41.187	-12.813	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 58 (5290MHz)

**Vertical**

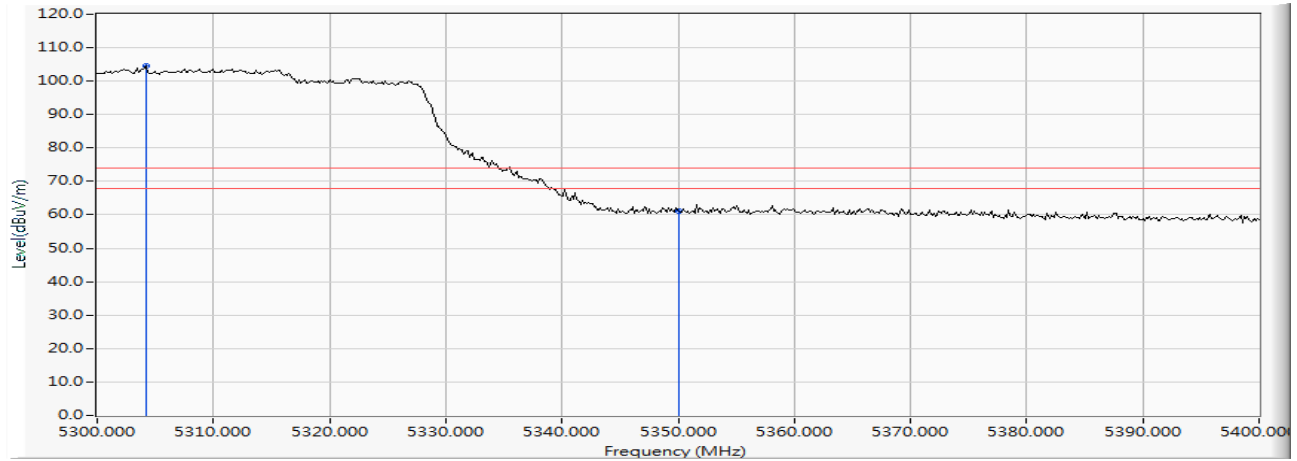


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5304.203	13.027	91.495	104.523	--	--	PEAK
2		5350.000	12.999	48.122	61.121	-12.879	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 58 (5290MHz)

**Vertical**

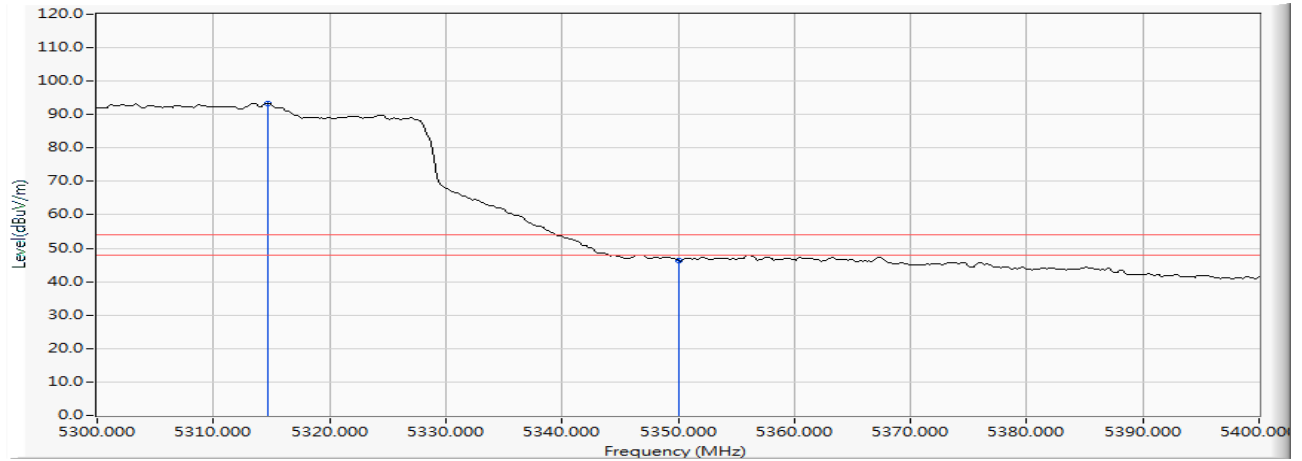


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.638	13.021	80.420	93.441	--	--	AVERAGE
2		5350.000	12.999	33.268	46.267	-7.733	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 106 (5530MHz)

**Horizontal**

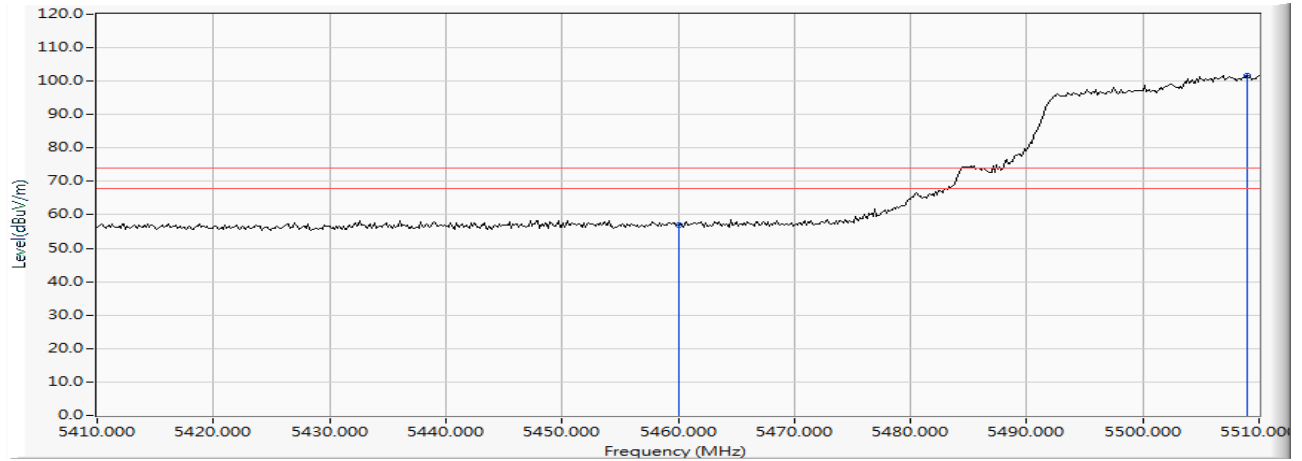


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	45.114	56.817	-17.183	74.000	PEAK
2	*	5508.986	12.172	89.509	101.681	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 106 (5530MHz)

**Horizontal**

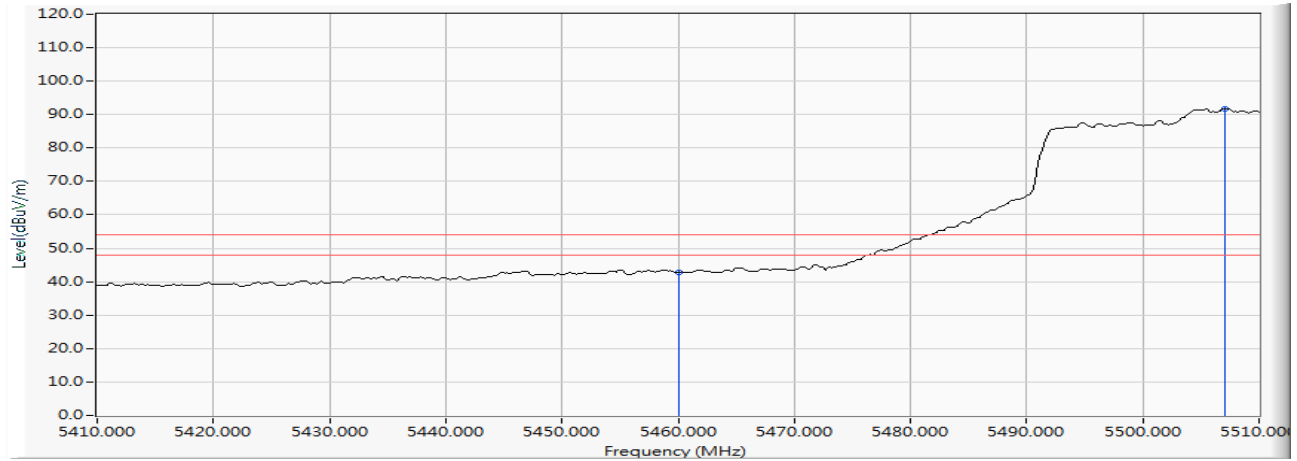

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	11.703	31.042	42.745	-11.255	54.000	AVERAGE
2	*	5507.101	12.187	79.651	91.838	--	--	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 106 (5530MHz)

**Vertical**

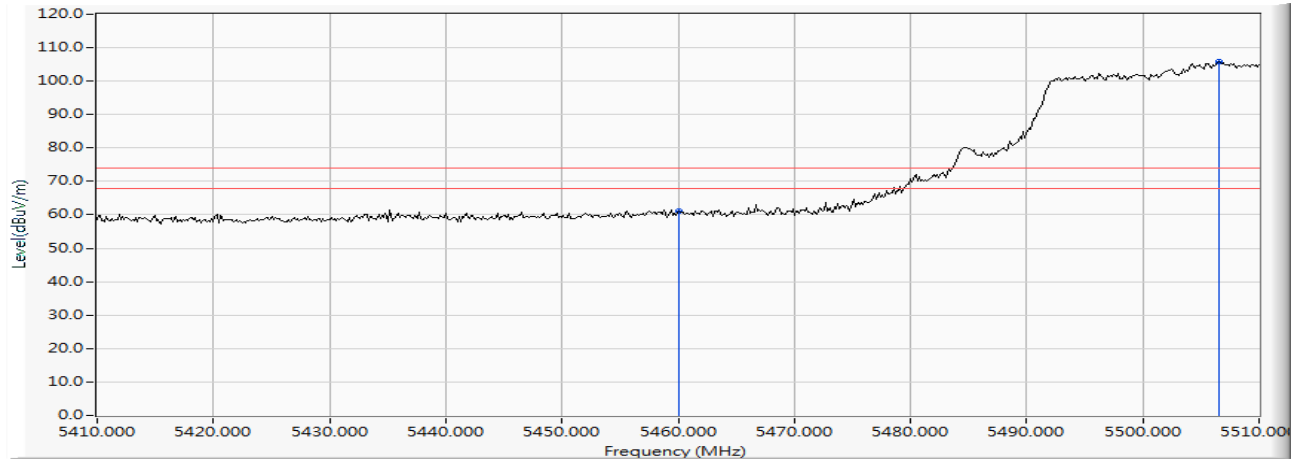


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	47.756	61.146	-12.854	74.000	PEAK
2	*	5506.522	13.635	92.139	105.774	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 106 (5530MHz)

**Vertical**

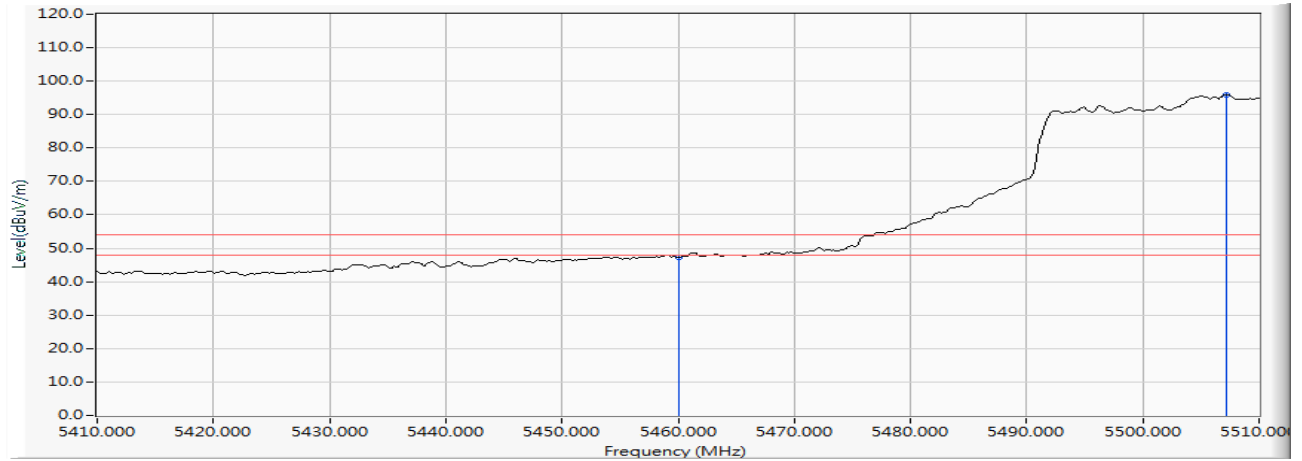


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	33.864	47.254	-6.746	54.000	AVERAGE
2	*	5507.246	13.631	82.295	95.925	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 13 MIMO: Transmit (802.11 ac-80BW\_65Mbps)-Channel 106 (5530MHz)


**Horizontal**

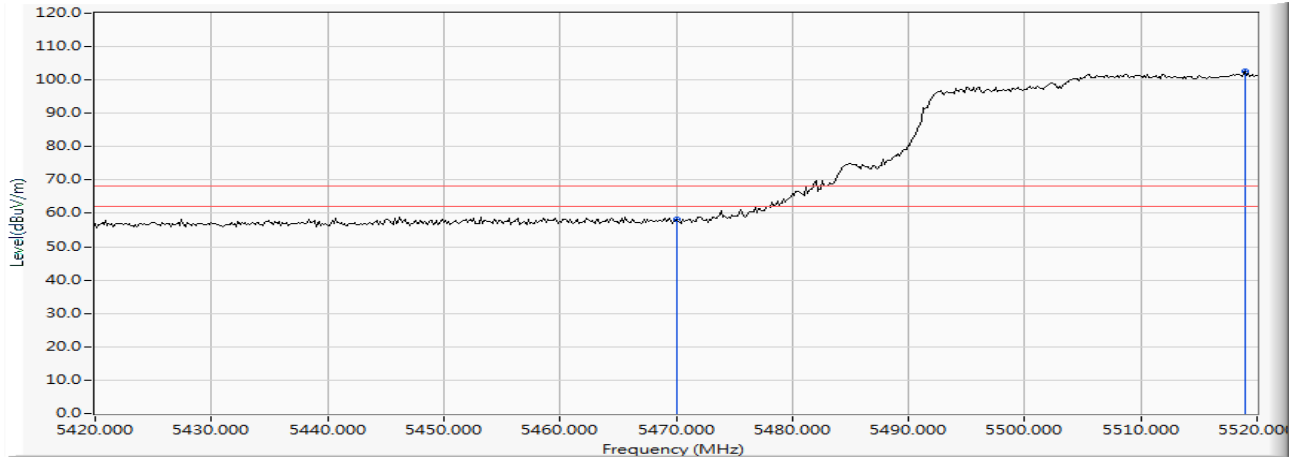

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	11.838	46.397	58.235	-9.985	68.220	PEAK
2	*	5518.986	12.091	90.431	102.522	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/29  
 Test Mode : Mode 13 MIMO: Transmit (802.11 ac-80BW\_65Mbps)-Channel 106 (5530MHz)


**Vertical**

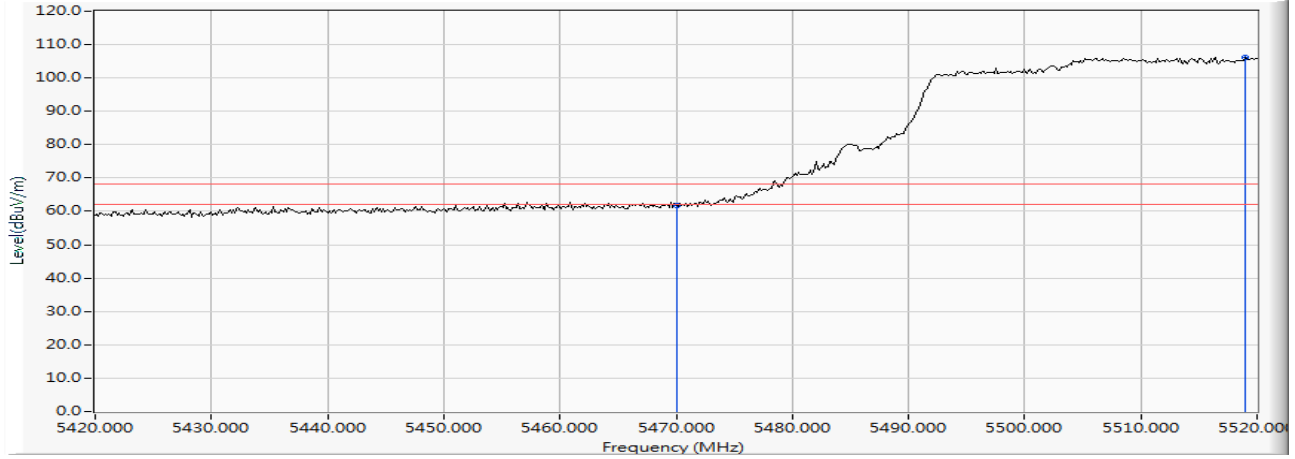

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	13.462	48.158	61.620	-6.600	68.220	PEAK
2	*	5518.986	13.555	92.473	106.028	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 155 (5775MHz)


**Horizontal**

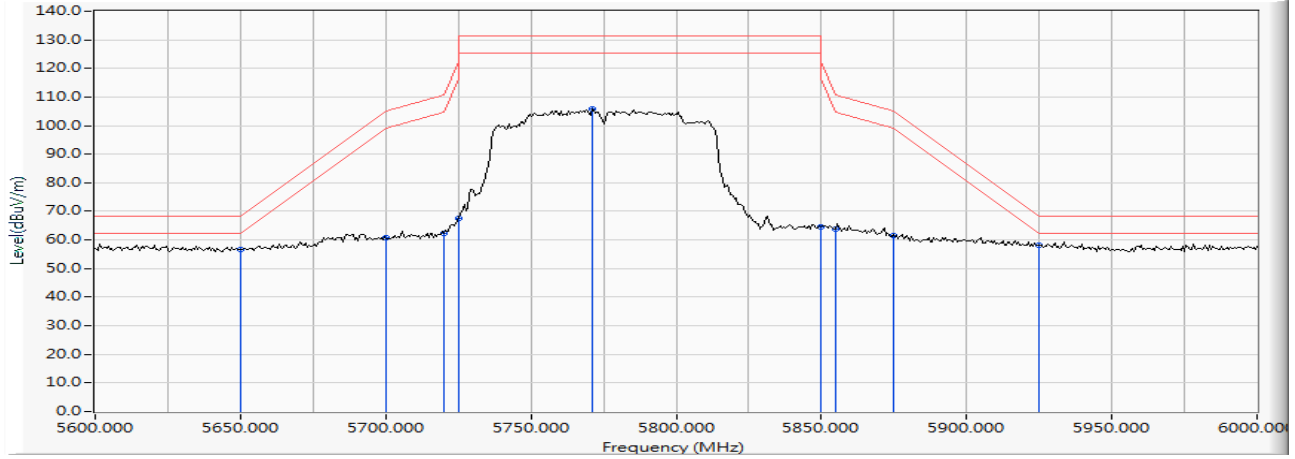

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5650.000	11.554	44.970	56.525	-11.695	68.220	PEAK
2		5700.000	11.647	49.007	60.654	-44.546	105.200	PEAK
3		5720.000	11.607	50.615	62.222	-48.578	110.800	PEAK
4		5725.000	11.592	55.848	67.440	-54.760	122.200	PEAK
5		5771.014	11.447	94.234	105.680	--	--	PEAK
6		5850.000	11.701	52.920	64.621	-57.579	122.200	PEAK
7		5855.000	11.735	51.943	63.678	-47.122	110.800	PEAK
8		5875.000	11.873	49.718	61.591	-43.609	105.200	PEAK
9	*	5925.000	12.068	46.166	58.235	-9.985	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 13 MIMO: Transmit (802.11 ac-80BW\_65Mbps)-Channel 155 (5775MHz)


**Vertical**

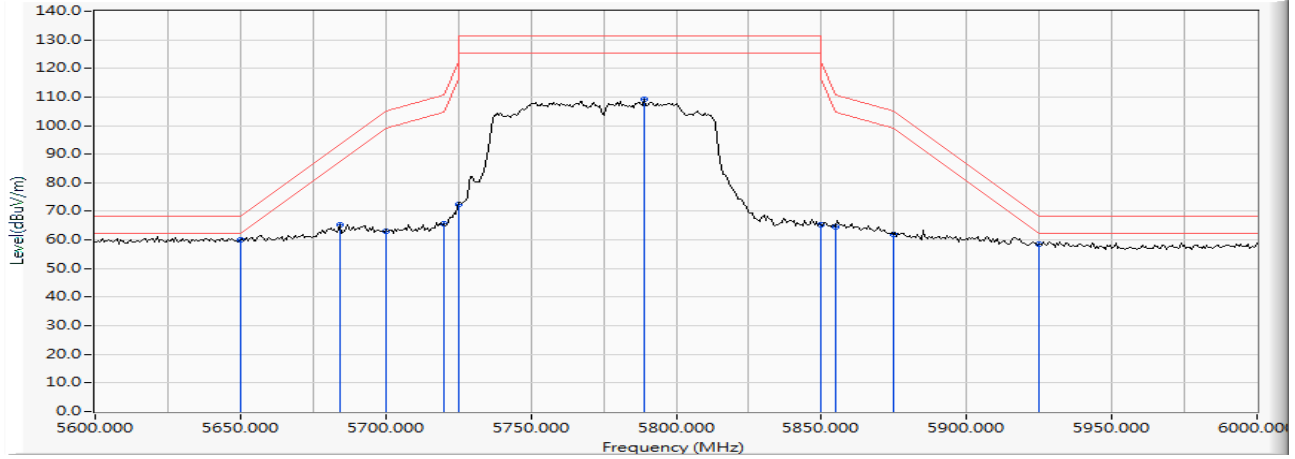

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	13.029	47.000	60.029	-8.191	68.220	PEAK
2		5684.058	13.020	52.176	65.197	-28.212	93.409	PEAK
3		5700.000	13.003	50.203	63.206	-41.994	105.200	PEAK
4		5720.000	12.947	52.809	65.756	-45.044	110.800	PEAK
5		5725.000	12.930	59.529	72.459	-49.741	122.200	PEAK
6		5788.986	12.706	96.566	109.272	--	--	PEAK
7		5850.000	12.774	52.594	65.368	-56.832	122.200	PEAK
8		5855.000	12.784	51.831	64.615	-46.185	110.800	PEAK
9		5875.000	12.825	49.233	62.058	-43.142	105.200	PEAK
10		5925.000	12.911	45.546	58.457	-9.763	68.220	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 50 (5250MHz)

**Horizontal**

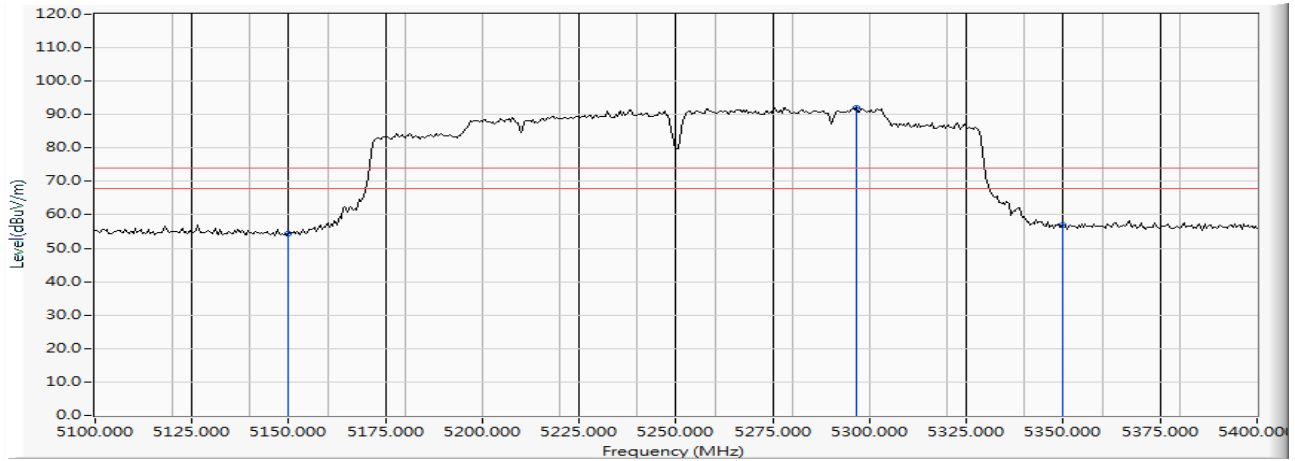


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	43.834	54.305	-19.695	74.000	PEAK
2	*	5296.522	11.116	80.936	92.052	--	--	PEAK
3		5350.000	11.024	46.032	57.056	-16.944	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 50 (5250MHz)

**Horizontal**

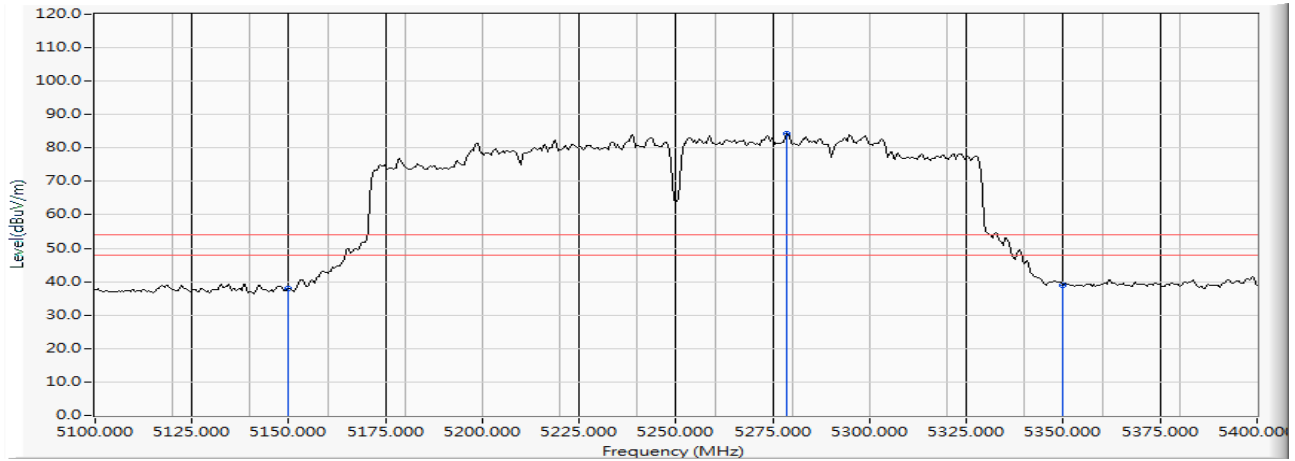

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	10.470	27.370	37.841	-16.159	54.000	AVERAGE
2	*	5278.696	10.979	73.164	84.143	--	--	AVERAGE
3		5350.000	11.024	27.928	38.952	-15.048	54.000	AVERAGE


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 50 (5250MHz)

**Vertical**

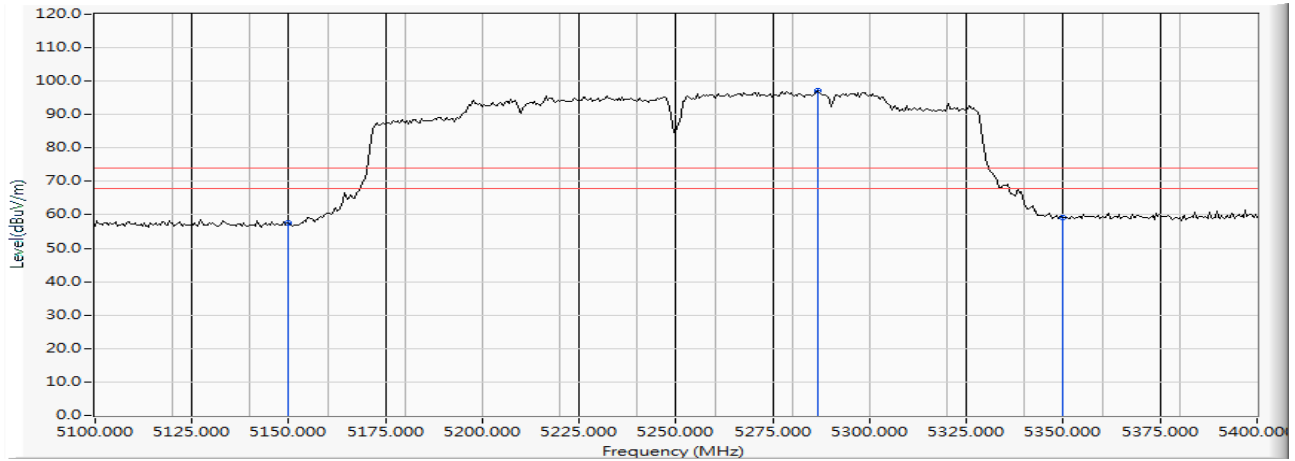


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	12.390	45.163	57.553	-16.447	74.000	PEAK
2	*	5286.522	12.968	84.109	97.077	--	--	PEAK
3		5350.000	12.999	46.229	59.228	-14.772	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 50 (5250MHz)

**Vertical**

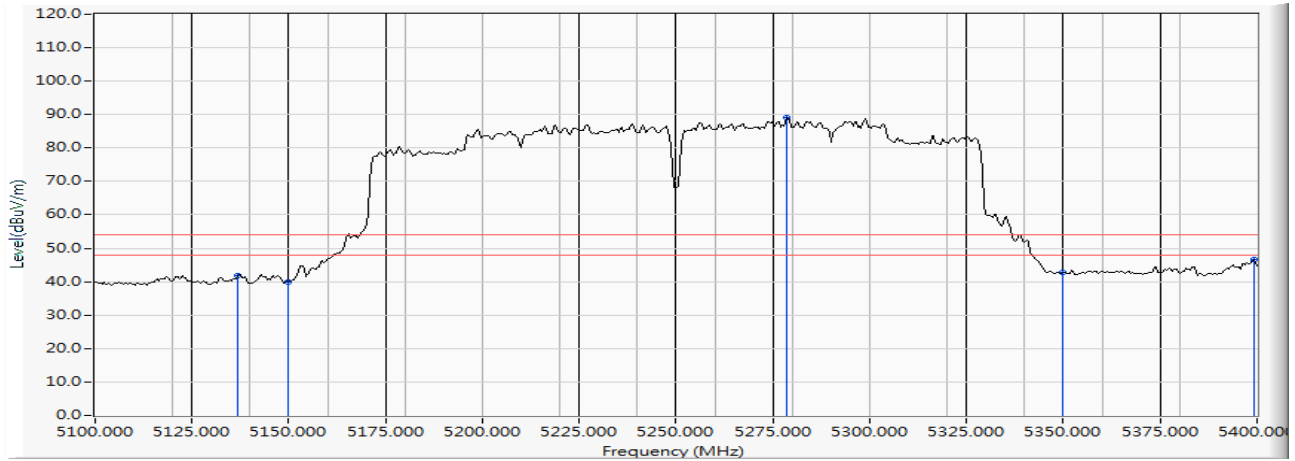


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5136.957	12.340	29.438	41.779	-12.221	54.000	AVERAGE
2		5150.000	12.390	27.463	39.853	-14.147	54.000	AVERAGE
3	*	5278.696	12.933	76.140	89.073	--	--	AVERAGE
4		5350.000	12.999	29.863	42.862	-11.138	54.000	AVERAGE
5		5399.130	12.984	33.575	46.559	-7.441	54.000	AVERAGE

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 114 (5570MHz)

**Horizontal**

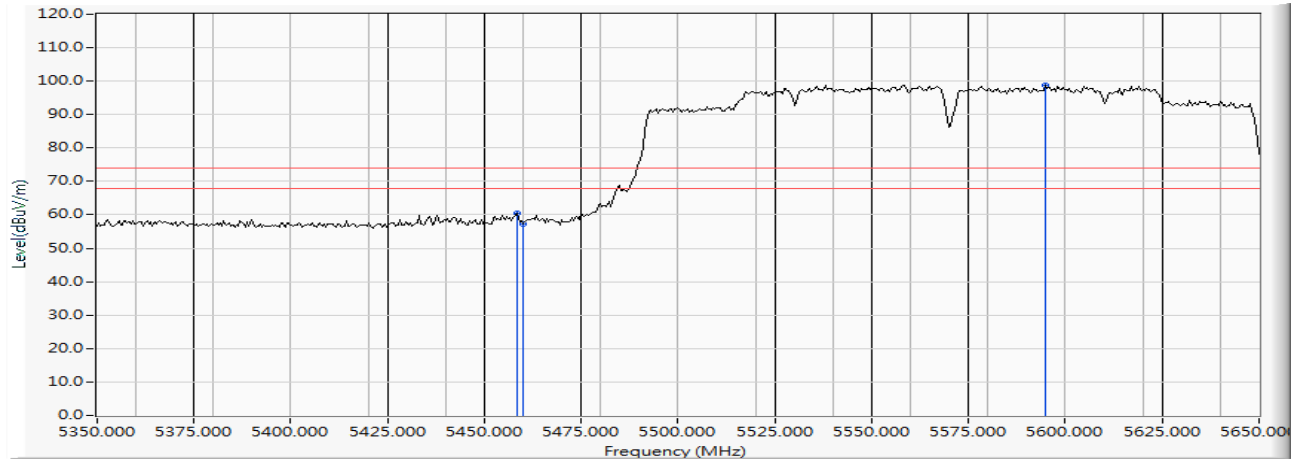


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.261	11.680	48.818	60.497	-13.503	74.000	PEAK
2		5460.000	11.703	45.475	57.178	-16.822	74.000	PEAK
3	*	5594.783	11.493	87.174	98.668	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 114 (5570MHz)

**Horizontal**

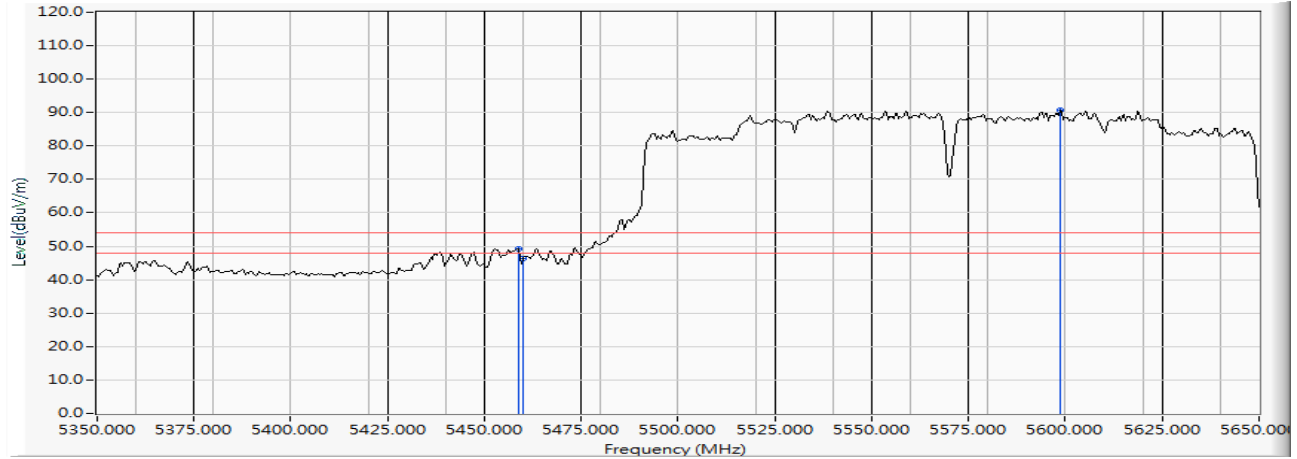


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.696	11.685	37.589	49.274	-4.726	54.000	AVERAGE
2		5460.000	11.703	34.744	46.447	-7.553	54.000	AVERAGE
3	*	5598.696	11.474	79.188	90.662	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 114 (5570MHz)

**Vertical**

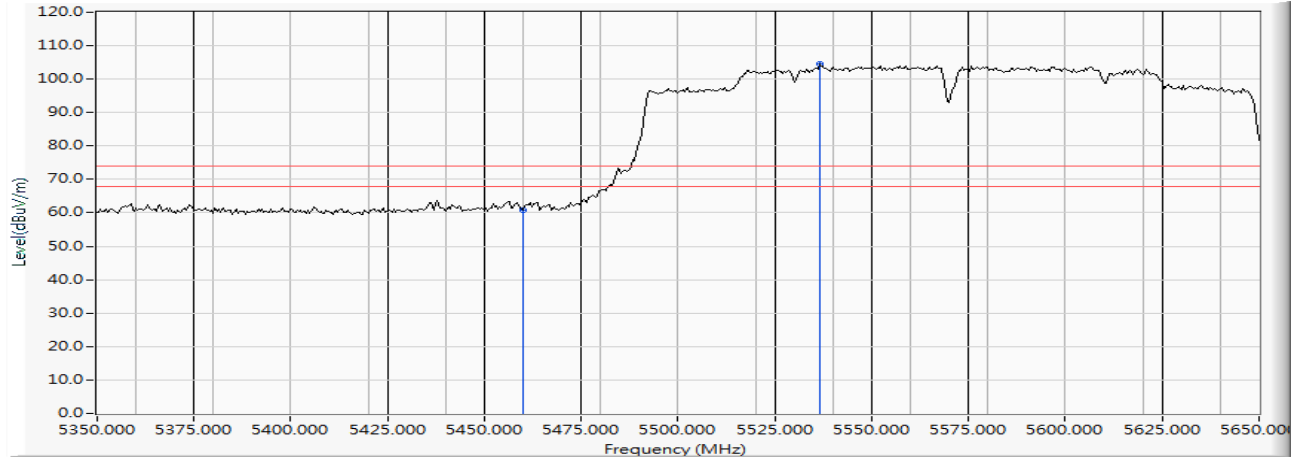


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	13.390	47.402	60.792	-13.208	74.000	PEAK
2	*	5536.522	13.442	91.077	104.519	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 114 (5570MHz)

**Vertical**

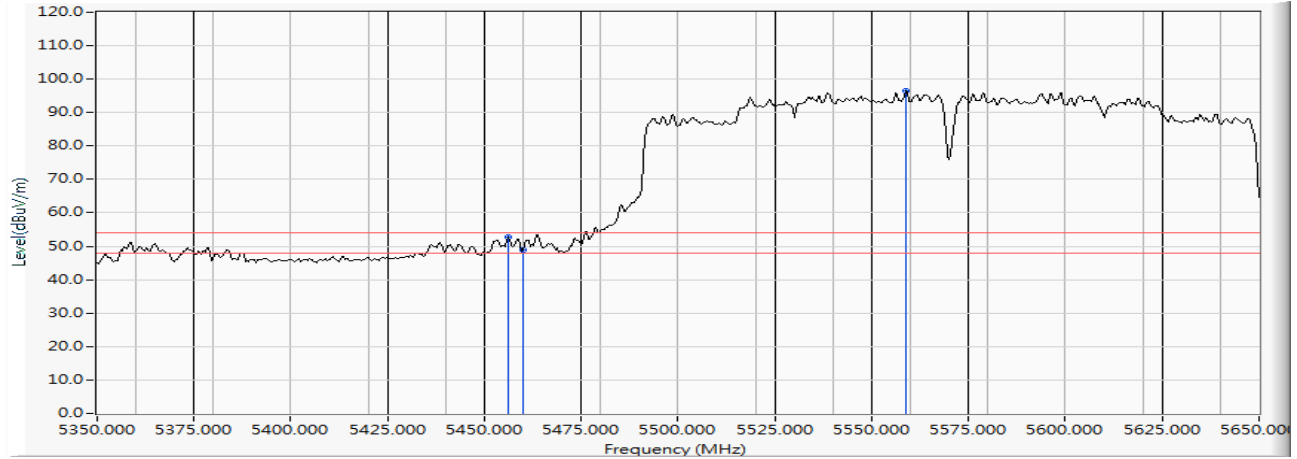


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5456.087	13.361	39.388	52.750	-1.250	54.000	AVERAGE
2		5460.000	13.390	35.594	48.984	-5.016	54.000	AVERAGE
3	*	5558.696	13.303	83.136	96.439	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 114 (5570MHz)


**Horizontal**

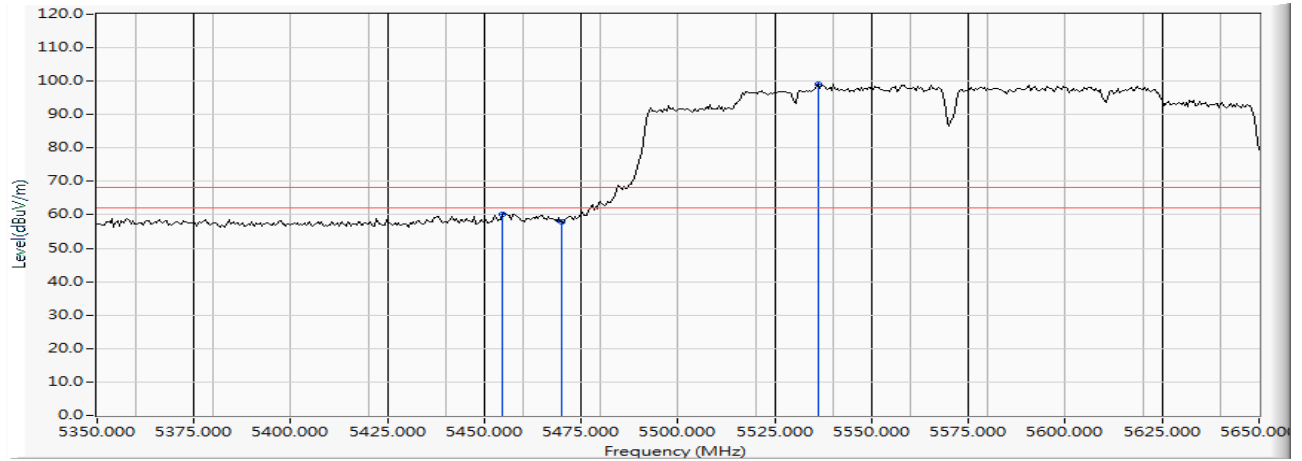

		<b>Frequency (MHz)</b>	<b>Correct Factor (dB)</b>	<b>Reading Level (dBuV)</b>	<b>Measure Level (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Limit (dBuV/m)</b>	<b>Detector Type</b>
1		5454.783	11.633	48.689	60.321	-7.899	68.220	PEAK
2		5470.000	11.838	46.059	57.897	-10.323	68.220	PEAK
3	*	5536.087	11.951	87.081	99.032	--	--	PEAK

Product : Intel® Wireless-AC 9260D2WL  
 Test Item : Band Edge Data  
 Test Date : 2019/05/30  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 114 (5570MHz)

**Vertical**

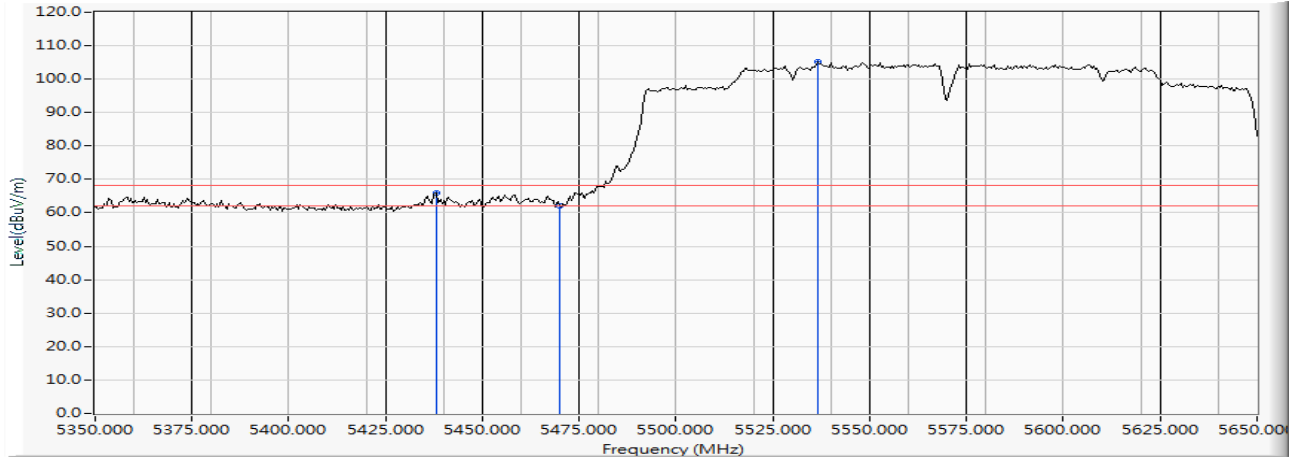


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5438.261	13.237	52.573	65.810	-2.410	68.220	PEAK
2		5470.000	13.462	48.534	61.996	-6.224	68.220	PEAK
3	*	5536.522	13.442	91.789	105.231	--	--	PEAK



## 5. Duty Cycle

### 5.1. Test Setup

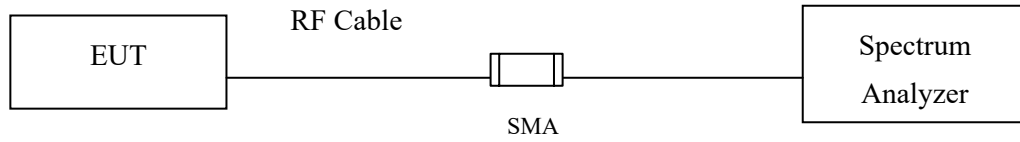

### 5.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to U-NII test procedure of KDB789033 for compliance to FCC 47CFR 15.407 requirements.

### 5.3. Uncertainty

$\pm 2.31\text{msec}$

#### 5.4. Test Result of Duty Cycle

Product : Intel® Wireless-AC 9260D2WL  
Test Item : Duty Cycle  
Test Mode : Mode 15: Transmit-SISO A

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	2.0362	2.0971	97.10	0.13
802.11n20	1.8942	1.9449	97.39	0.11
802.11n40	0.8870	0.9884	89.74	0.47
802.11ac80	0.4304	0.5029	85.59	0.68
802.11ac160	0.2565	0.2971	86.34	0.64

### 802.11a (SISO A)

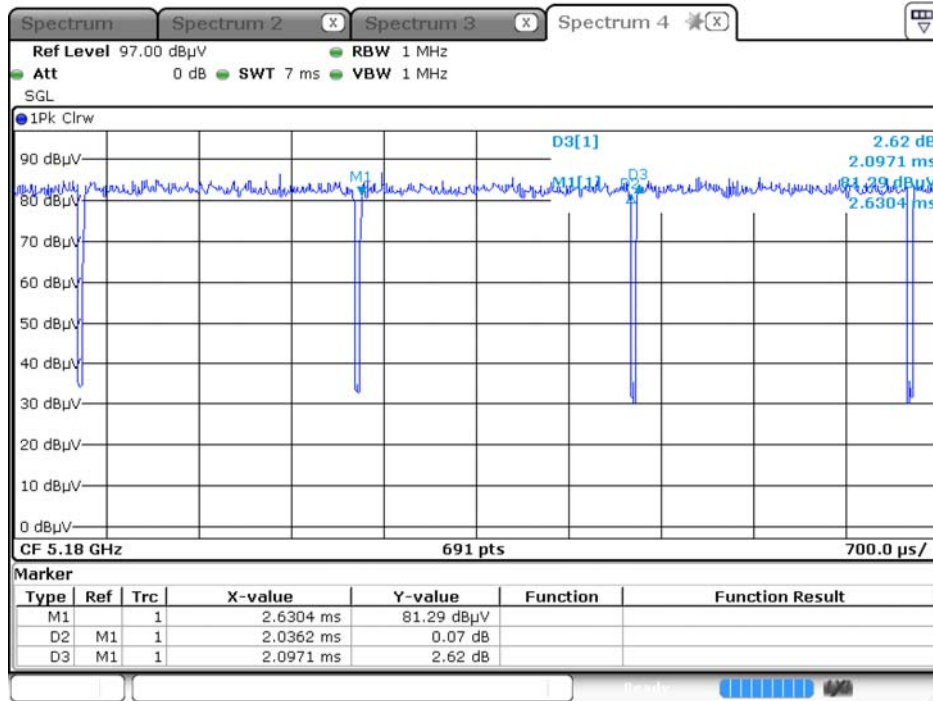


Date: 2.JAN.2007 03:57:04

### 802.11n20 (SISO A)

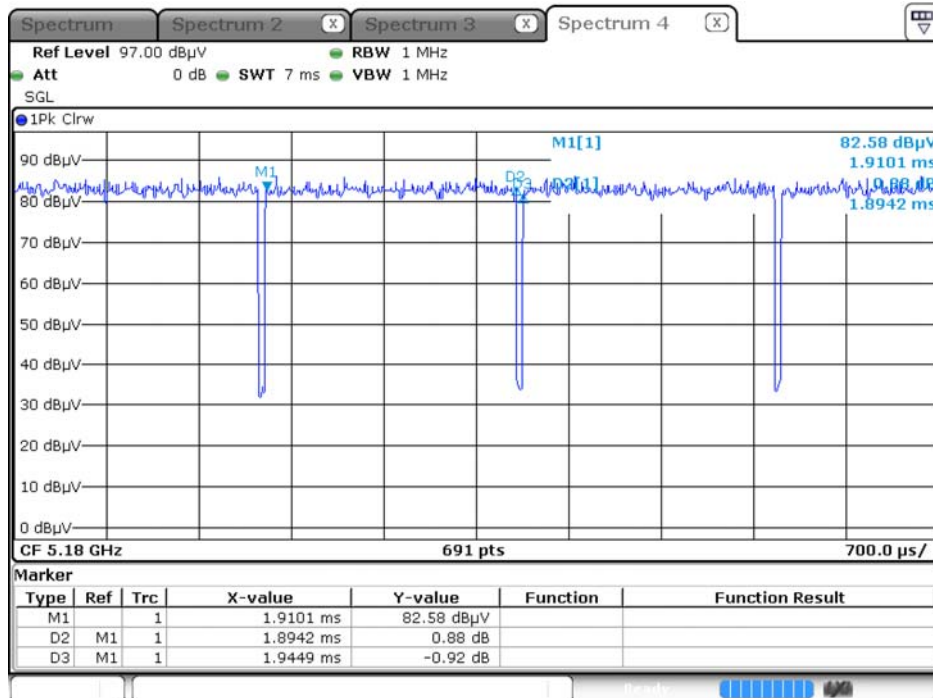


Date: 2.JAN.2007 04:08:42

### 802.11n40 (SISO A)

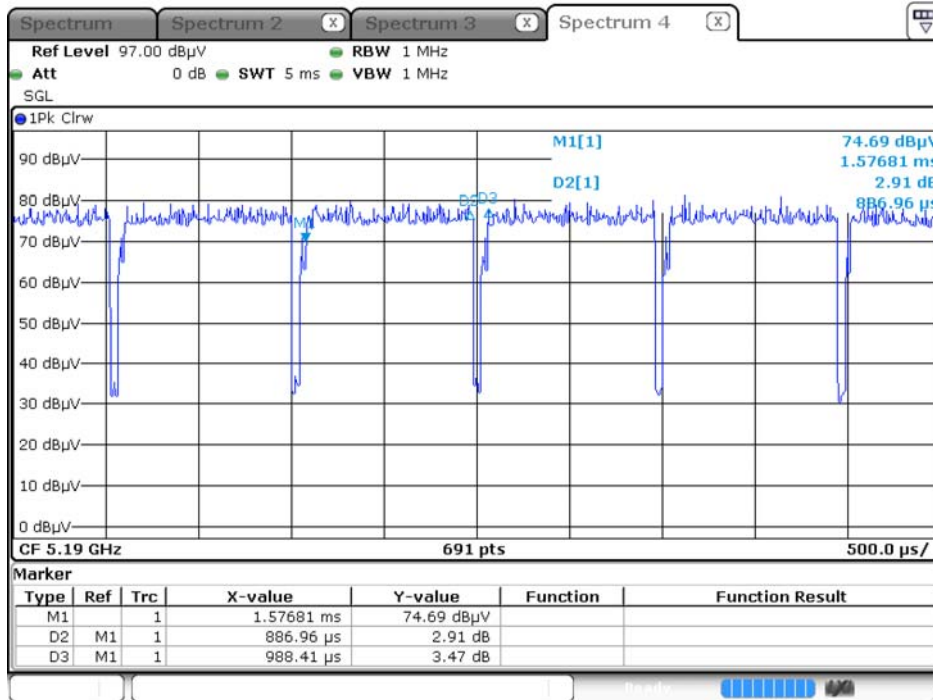


Date: 2.JAN.2007 05:23:39

### 802.11ac80 (SISO A)

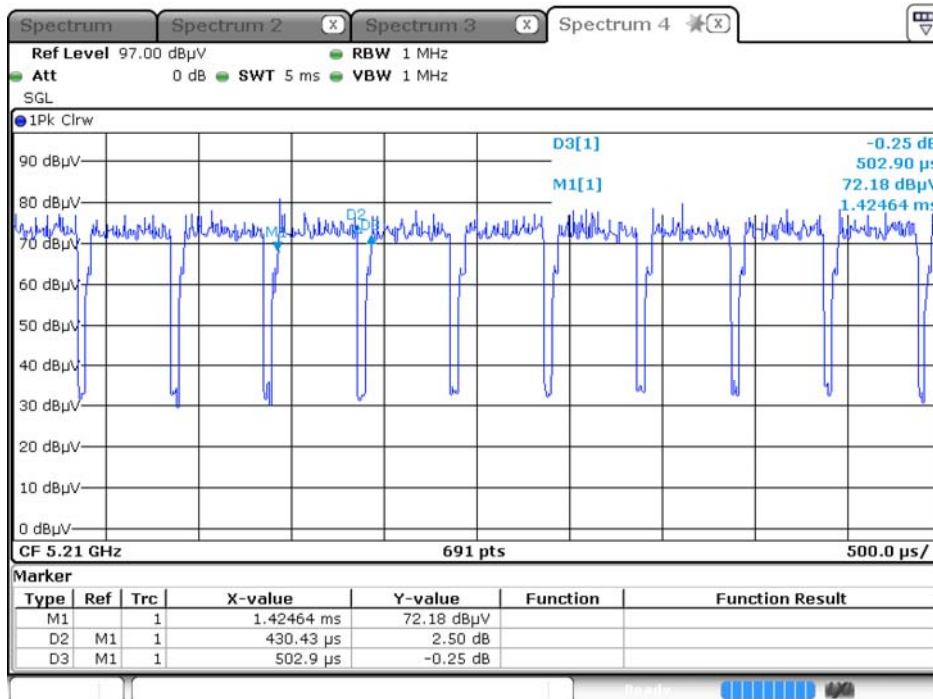

Date: 2.JAN.2007 05:36:42

802.11ac160 (SISO A)

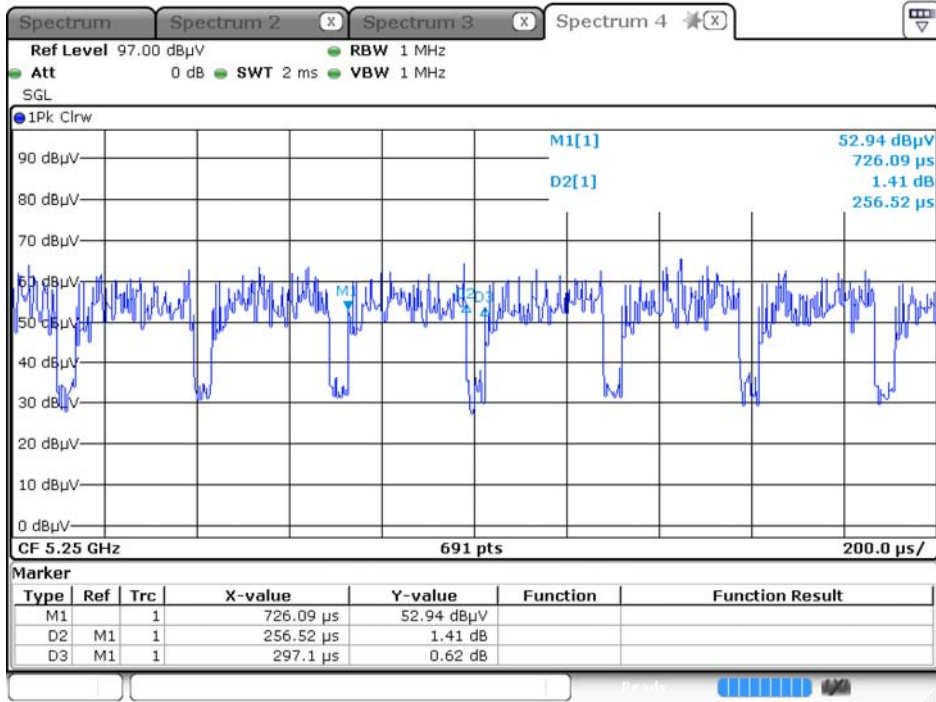

Date: 2.JAN.2007 06:09:54

Product : Intel® Wireless-AC 9260D2WL  
Test Item : Duty Cycle  
Test Mode : Mode 16: Transmit-SISO B

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	2.0493	2.1101	97.12	0.13
802.11n20	1.8971	1.9478	97.40	0.11
802.11n40	0.9058	0.9855	91.91	0.37
802.11ac80	0.4275	0.5073	84.29	0.74
802.11ac160	0.2493	0.2986	83.50	0.78

### 802.11a (SISO B)

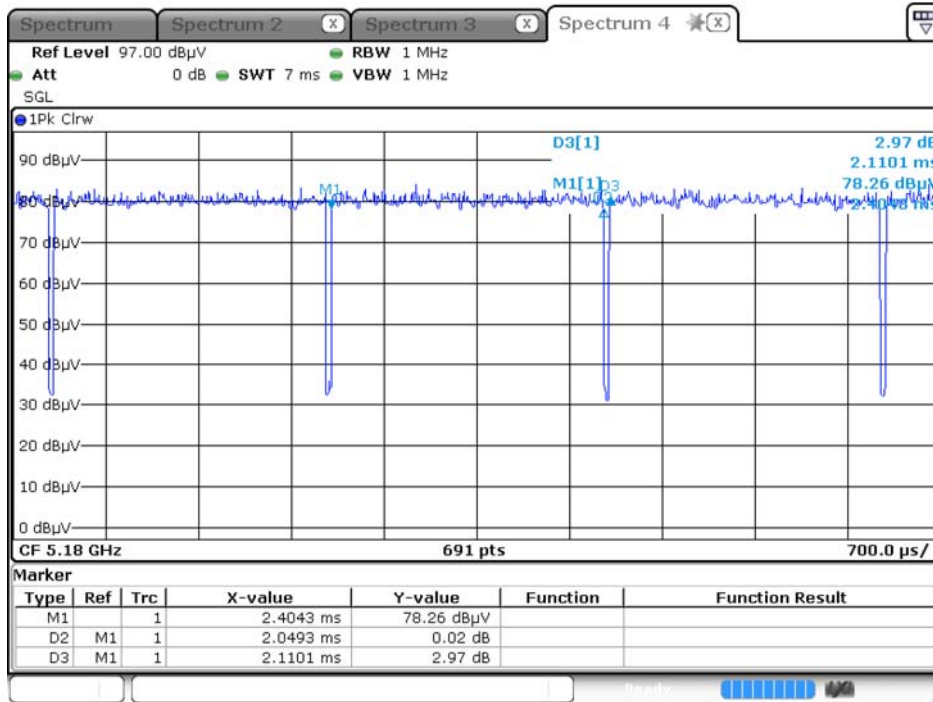


Date: 4.JAN.2007 00:46:08

### 802.11n20 (SISO B)

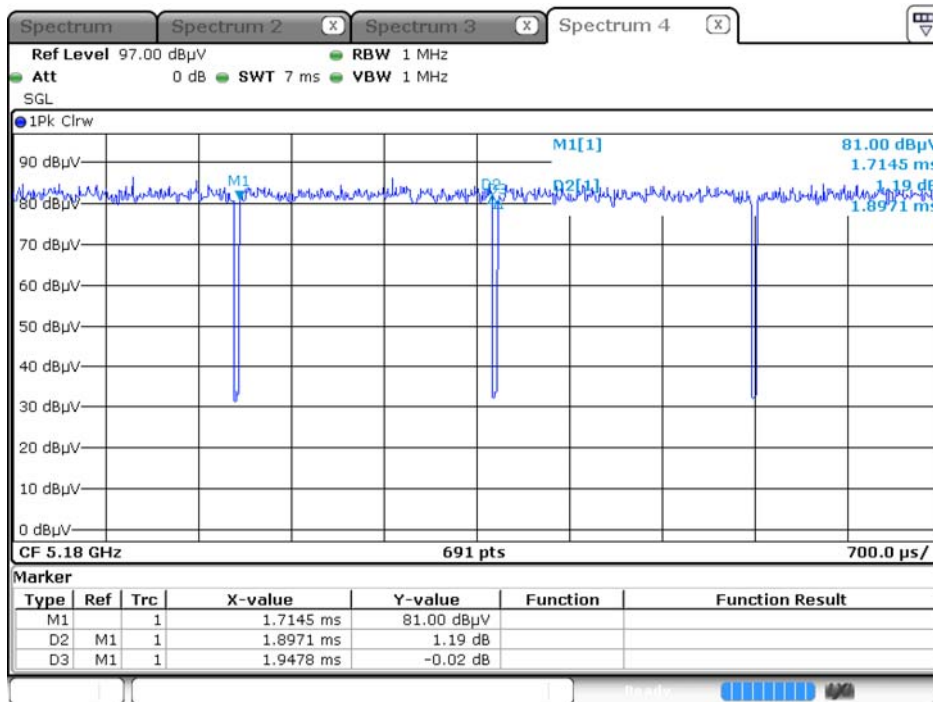


Date: 4.JAN.2007 00:55:33

### 802.11n40 (SISO B)

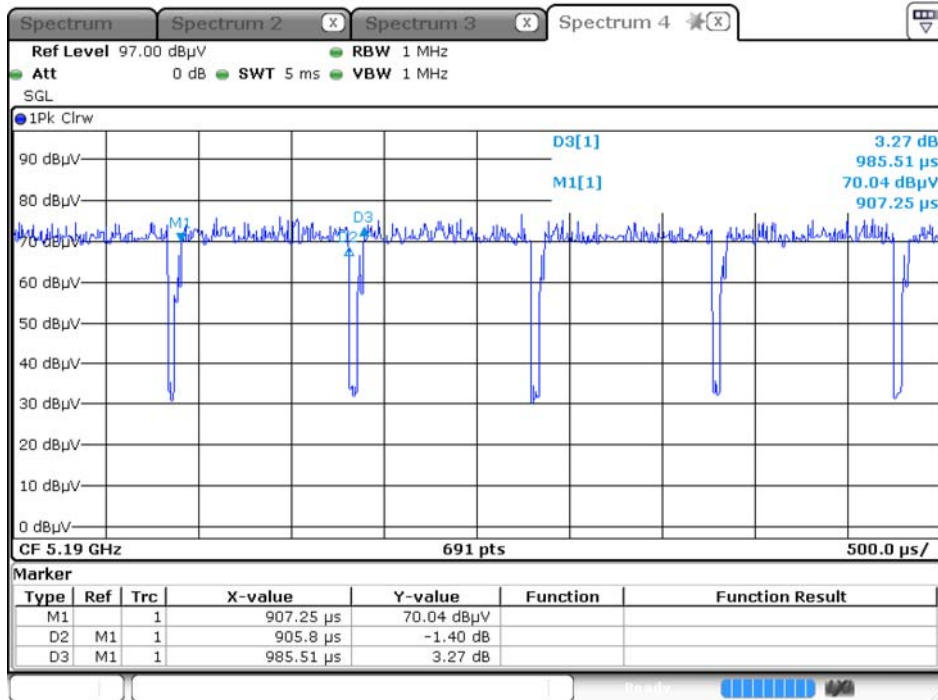

Date: 4.JAN.2007 01:35:33


### 802.11ac80 (SISO B)

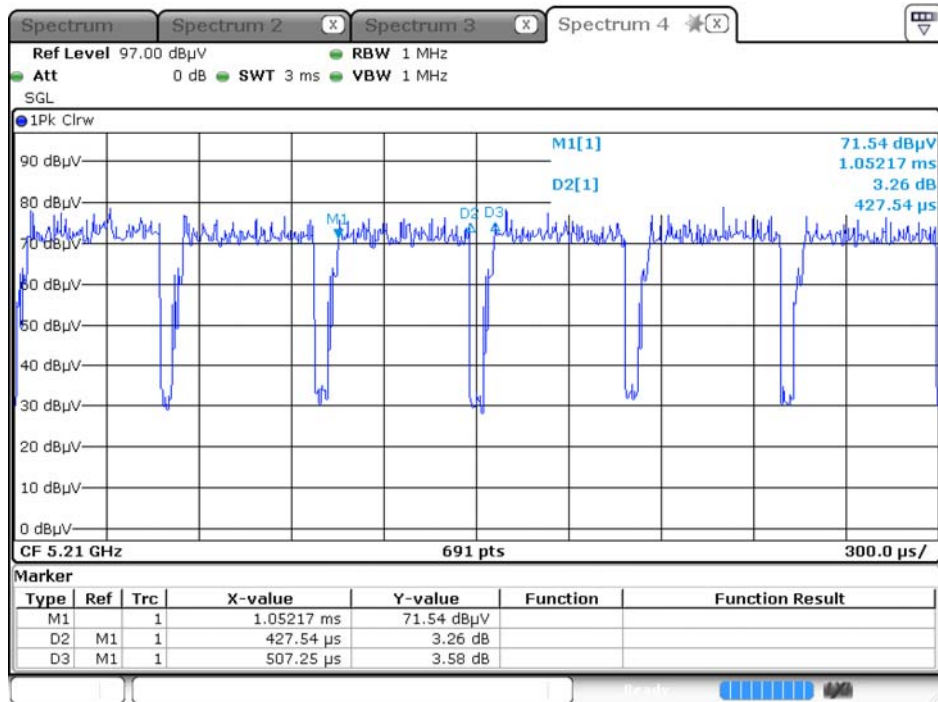

Date: 4.JAN.2007 01:16:07



802.11ac160 (SISO B)

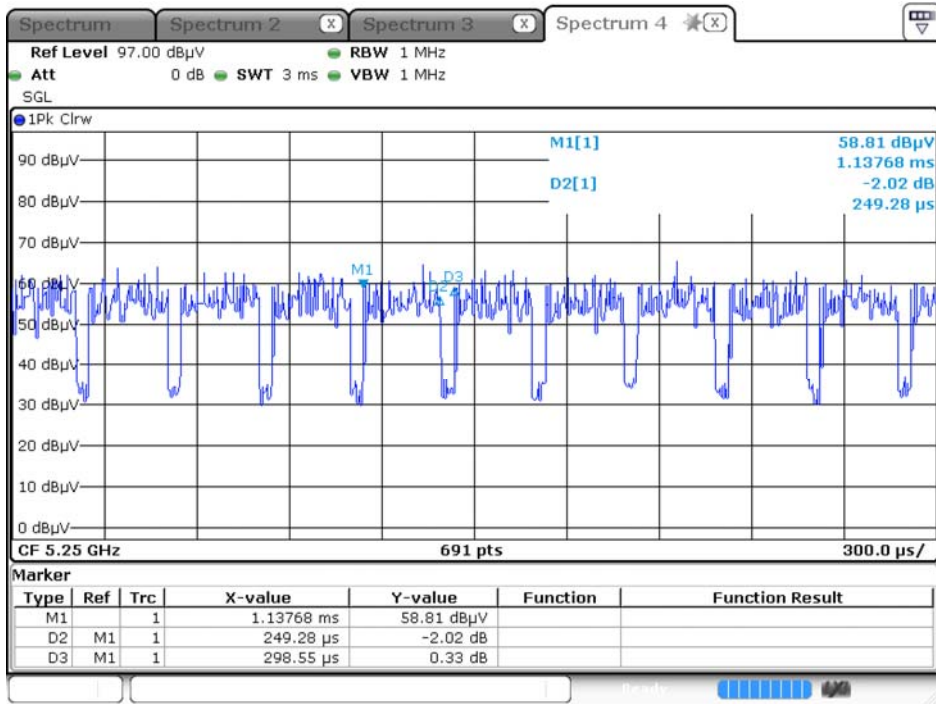

Date: 4.JAN.2007 02:19:13

Product : Intel® Wireless-AC 9260D2WL  
Test Item : Duty Cycle  
Test Mode : Mode 17: Transmit-MIMO

Duty Cycle Formula:


Duty Cycle =  $T_{on} / (T_{on} + T_{off})$

Duty Factor =  $10 \text{ Log} (1/\text{Duty Cycle})$

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11n20	0.9710	1.0290	94.37	0.25
802.11n40	0.4565	0.5435	84.00	0.76
802.11ac80	0.2420	0.3464	69.87	1.56
802.11ac160	0.1508	0.2073	72.74	1.38

### 802.11n20 (MIMO)

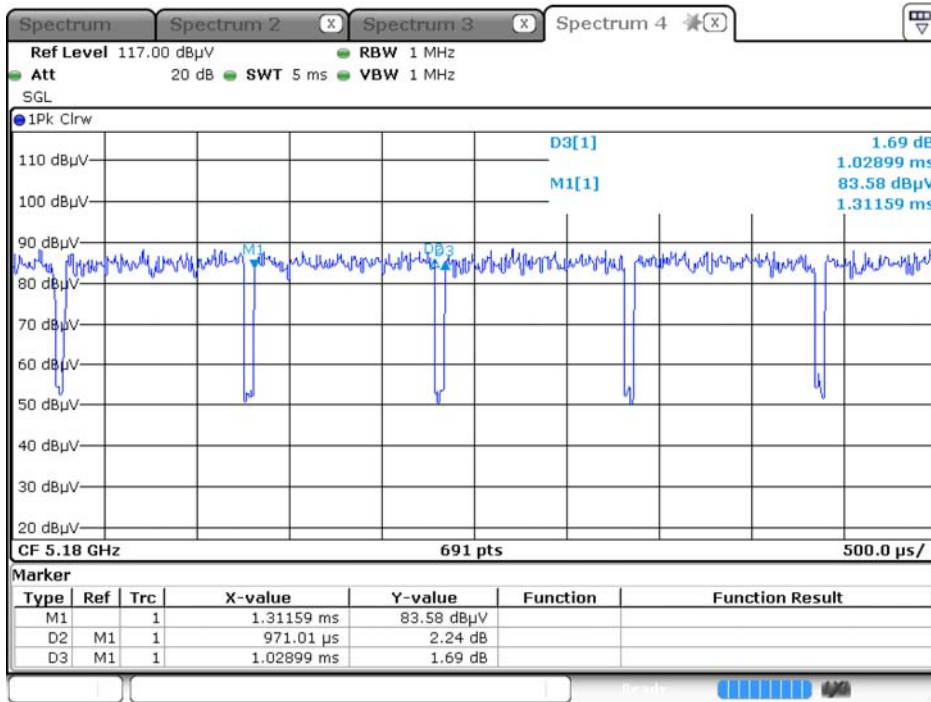


Date: 4.JAN.2007 10:02:42

### 802.11n40 (MIMO)

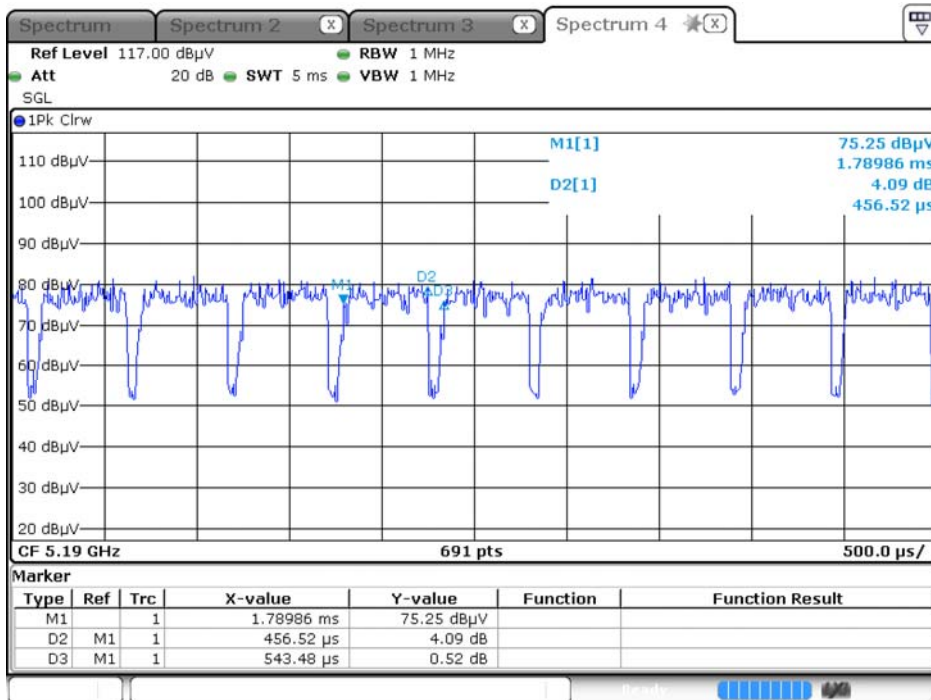


Date: 4.JAN.2007 10:13:52

### 802.11ac80 (MIMO)

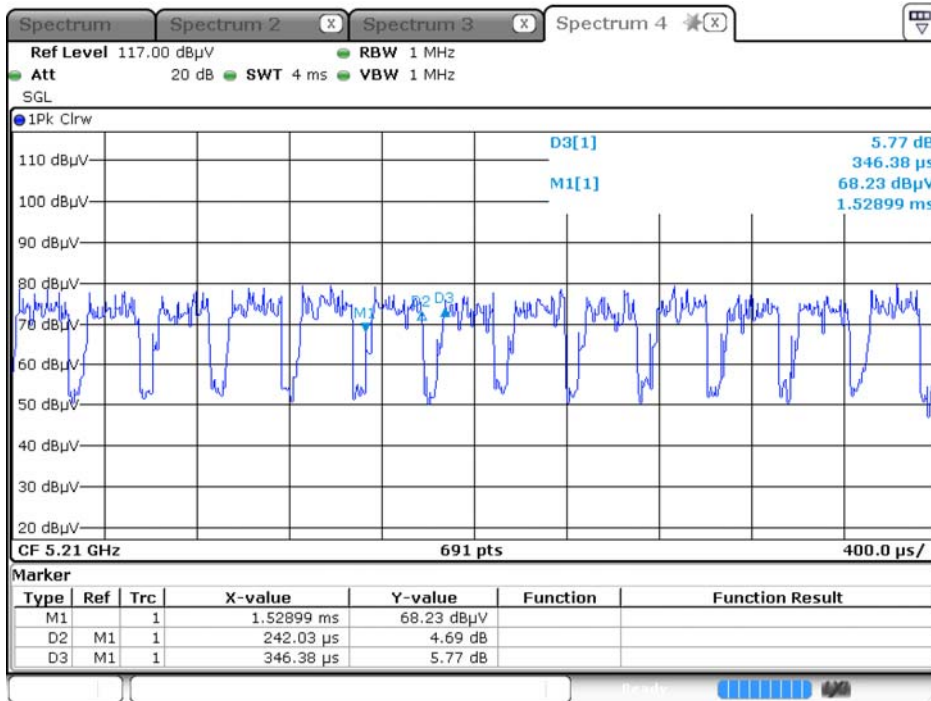

Date: 4.JAN.2007 10:16:55

### 802.11ac160 (MIMO)

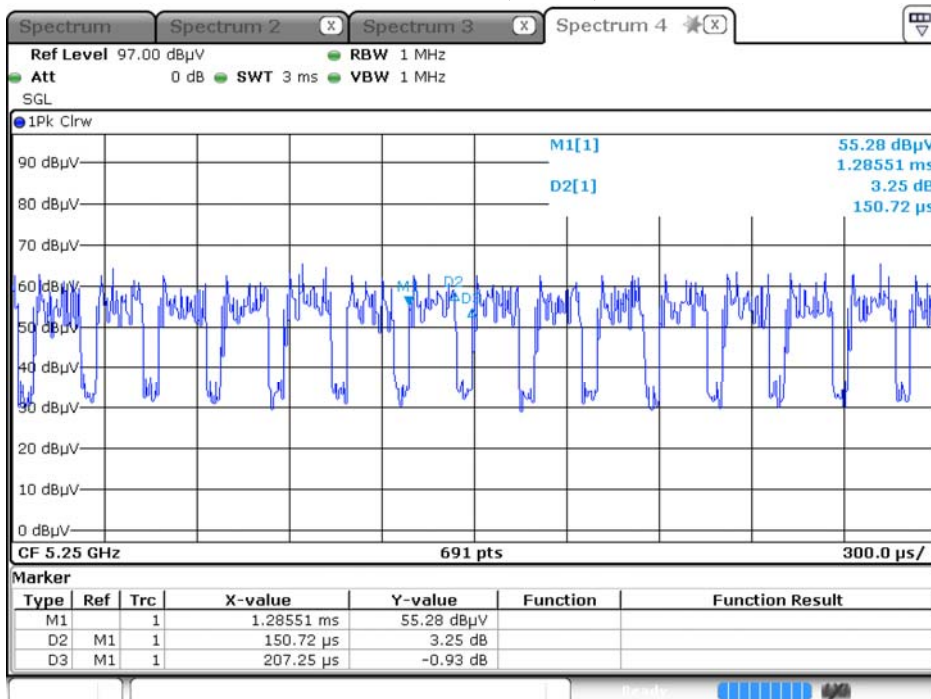

Date: 4.JAN.2007 10:53:34

## **6. EMI Reduction Method During Compliance Testing**

No modification was made during testing.