

# TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card, LTE Coexistence
Brand Name	Intel® Wireless-AC 9560
Model Name	9560D2WL
FCC ID	PD99560D2L
Date of Test Start/End	2018-02-16 / 2018-03-16
Features	802.11ac, Dual Band, 2x2 Wi-Fi + Bluetooth® 5 (see section 5)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15 E (see section 1)
---------------------	---

Test Report identification	180201-02.TR01
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.

The test report shall not be reproduced in full, without written approval of the laboratory.

Issued by

Reviewed by

Gregory ROUSTAN  
(Test Engineer Lead)

Olivier FARGANT  
(Technical Manager)

Intel Mobile Communications France S.A.S – WRF Lab  
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France  
Tel. +33493001400 / Fax +33493001401

# Table of Contents

<b>1. Standards, reference documents and applicable test methods .....</b>	<b>3</b>
<b>2. General conditions, competences and guarantees .....</b>	<b>3</b>
<b>3. Environmental Conditions .....</b>	<b>3</b>
<b>4. Test samples .....</b>	<b>4</b>
<b>5. EUT Features .....</b>	<b>4</b>
<b>6. Remarks and comments .....</b>	<b>4</b>
<b>7. Test Verdicts summary .....</b>	<b>5</b>
7.1. 802.11 A/N/AC – U-NII-1 .....	5
7.2. 802.11 A/N/AC – U-NII-2A .....	5
<b>8. Document Revision History .....</b>	<b>5</b>
<b>Annex A. Test &amp; System Description .....</b>	<b>6</b>
A.1 MEASUREMENT SYSTEM .....	6
A.2 TEST EQUIPMENT LIST .....	8
A.3 MEASUREMENT UNCERTAINTY EVALUATION .....	9
<b>Annex B. Test Results U-NII-1 &amp; U-NII-2A .....</b>	<b>10</b>
B.1 TEST CONDITIONS .....	10
B.2 TEST RESULTS TABLES U-NII-1 .....	11
B.2.1 26dB & 99% Bandwidth .....	11
B.2.2 Power Limits. Maximum Output power & Peak power spectral density .....	13
B.2.3 Undesirable emission limits : Band Edge (Conducted) .....	19
B.2.4 Radiated spurious emission .....	21
B.2.5 AC power-line conducted emission .....	36
B.3 TEST RESULTS SCREENSHOT U-NII-1 .....	39
B.3.1 26dB Bandwidth .....	39
B.3.2 99% Bandwidth .....	44
B.3.3 Power Limits. Maximum Output power & Peak power spectral density .....	49
B.3.4 Undesirable emission limits : Band Edge (Conducted) .....	60
B.4 TEST RESULTS TABLES U-NII-2A .....	88
B.4.1 26dB & 99% Bandwidth .....	88
B.4.2 Power Limits. Maximum Output power & Peak power spectral density .....	90
B.4.3 Undesirable emissions limits : Band Edge (Conducted) .....	94
B.4.4 Radiated spurious emission .....	96
B.4.5 AC power-line conducted emission .....	110
B.5 TEST RESULTS SCREENSHOT U-NII-2A .....	113
B.5.1 26dB Bandwidth .....	113
B.5.2 99% Bandwidth .....	117
B.5.3 Power Limits. Maximum Output power & Peak power spectral density .....	121
B.5.4 Undesirable emissions limits : Band Edge (Conducted) .....	130
<b>Annex C. Photographs .....</b>	<b>141</b>
C.1 TEST SETUP .....	141
C.2 TEST SAMPLE .....	144

## 1. Standards, reference documents and applicable test methods

1. FCC 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices.
2. FCC 47 CFR part 15 - Subpart C – §15.209 Radiated emission limits; general requirements.
3. FCC OET KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 – Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E).
4. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 2. General conditions, competences and guarantees

- ✓ Intel Mobile Communications France SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2005 testing laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Mobile Communications France SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

## 3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	22 °C ±2 °C
Humidity	35 % ± 15 %

#### 4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	180201-02.S01	Module	9560D2WL	WFM: 3413E87ED82B	2018-02-14	Used for conducted tests
	170524-02.S15	Extender Board	PCB00609_01	6092416-442	2017-05-30	
	170000-01.S01	Laptop	Latitude E5470	DPBLMC2	2017-03-28	
	170220-04.S04	Adapter 1216SD to M.2	JfP Adapter M2	N/A	2017-04-10	
#02	180201-02.S03	Module	9560D2WL	WFM:3413E87ED853	2018-02-14	Used for Spurious Emission tests from 30 MHz to 1 GHz and AC power-line conducted emission measurements
	170220-02.S03	Extender Board	PCB00609_01	6092416-446	2017-02-20	
	170000-01.S13	Laptop	Latitude E5470	FT6LMC2	2017-05-30	
	170727-02.S16	Adapter 1216SD to M.2	JfP Adapter M2	N/A	2017-07-27	
#03	180201-02.S04	Module	9560D2WL	WFM:3413E87ED803	2018-02-14	Used for Spurious Emission tests from 1GHz to 40 GHz
	170220-02.S04	Extender Board	PCB00609_01	6092416-493	2017-02-20	
	170000-01.S16	Laptop	Latitude E5470	C2HTPF2	2017-06-13	
	170727-02.S13	Adapter 1216SD to M.2	JfP Adapter M2	N/A	2017-08-09	

#### 5. EUT Features

Brand Name	Intel® Wireless-AC 9560		
Model Name	9560D2WL		
FCC ID	PD99560D2L		
Software Version	11.1807.0-07027		
Driver Version	99.0.28.6		
Prototype / Production	Production		
Supported Radios	802.11b/g/n	2.4GHz (2400.0 – 2483.5 MHz)	
	802.11a/n/ac	5.2GHz (5150.0 – 5350.0 MHz)	
		5.6GHz (5470.0 – 5725.0 MHz)	
		5.8GHz (5725.0 – 5850.0 MHz)	
	Bluetooth 5	2.4GHz (2400.0 – 2483.5 MHz)	
Antenna Information	CHAIN A: PIFA antenna. WiFi 2.4GHz & 5GHz and BT CHAIN B: PIFA antenna. WiFi 2.4GHz & 5GHz		
Additional Information			

#### 6. Remarks and comments

N/A

## 7. Test Verdicts summary

### 7.1. 802.11 a/n/ac – U-NII-1

FCC part	Test name	Verdict
15.407 (a) (1)	Power Limits. Maximum output power	P
15.407 (a) (1)	Peak power spectral density	P
15.407 (b) (1) 15.209	Undesirable emissions limits: Band Edge (conducted)	P
15.407 (b) (1) 15.209	Undesirable emissions limits (radiated)	P
15.407 (6) 15.207	AC power-line conducted emission measurements	P

### 7.2. 802.11 a/n/ac – U-NII-2A

FCC part	Test name	Verdict
15.407 (a) (2)	Power Limits. Maximum output power	P
15.407 (a) (2)	Peak power spectral density	P
15.407 (b) (2) 15.209	Undesirable emissions limits: Band Edge (conducted)	P
15.407 (b) (2) 15.209	Undesirable emissions limits (radiated)	P
15.407 (6) 15.207	AC power-line conducted emission measurements	P

P: Pass  
 F: Fail  
 NM: Not Measured  
 NA: Not Applicable

## 8. Document Revision History

Revision #	Date	Modified by	Revision Details
Rev.00	2018-03-19	F. Nsengiyumva I. Kharrat	First Issue


# Annex A. Test & System Description

## A.1 Measurement System


Measurements were performed using the following setups, made in accordance to the general provisions of FCC KDB 789033 D02 General UNII Test Procedures.

The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.


### Conducted Setup

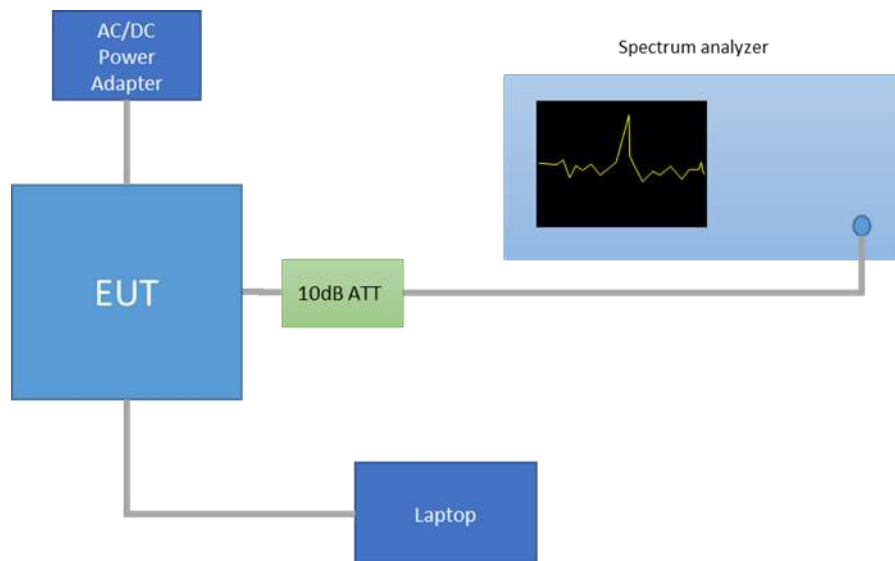


### Radiated Setup 30 MHz - 1GHz

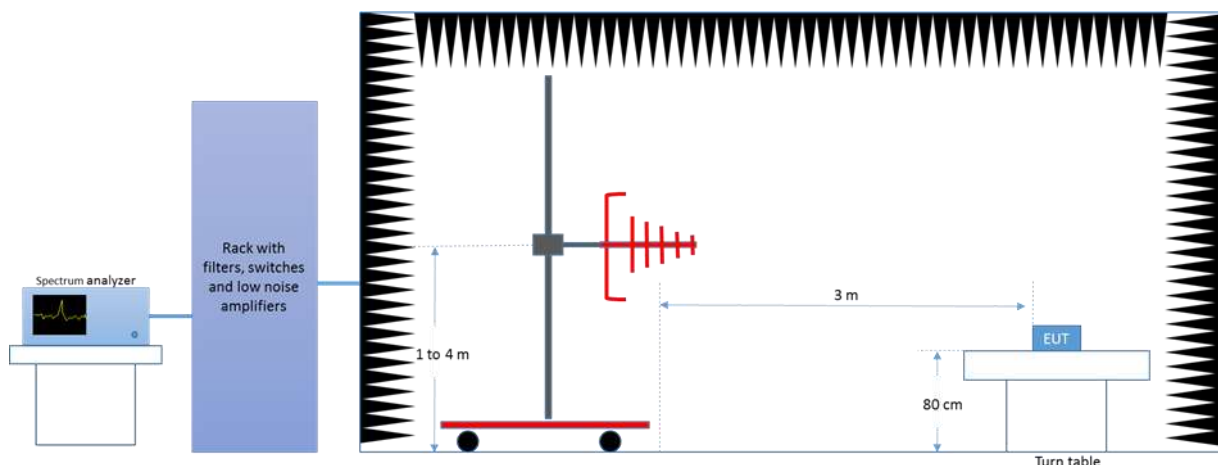


### *Radiated Setup 1 GHz – 18 GHz*

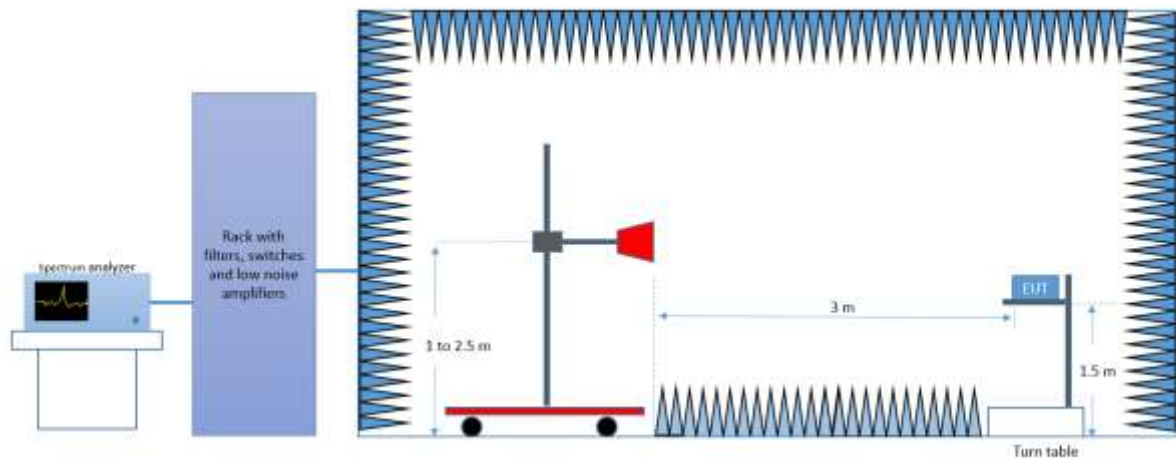

### *Radiated Setup 18 GHz – 40 GHz*

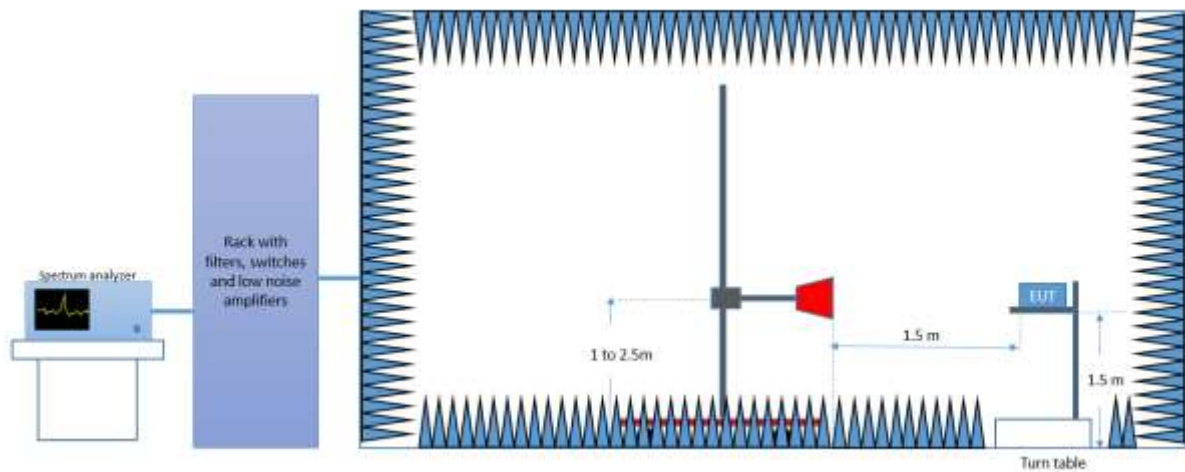

### *AC power-line conducted emission Setup 150 kHz – 30 MHz*

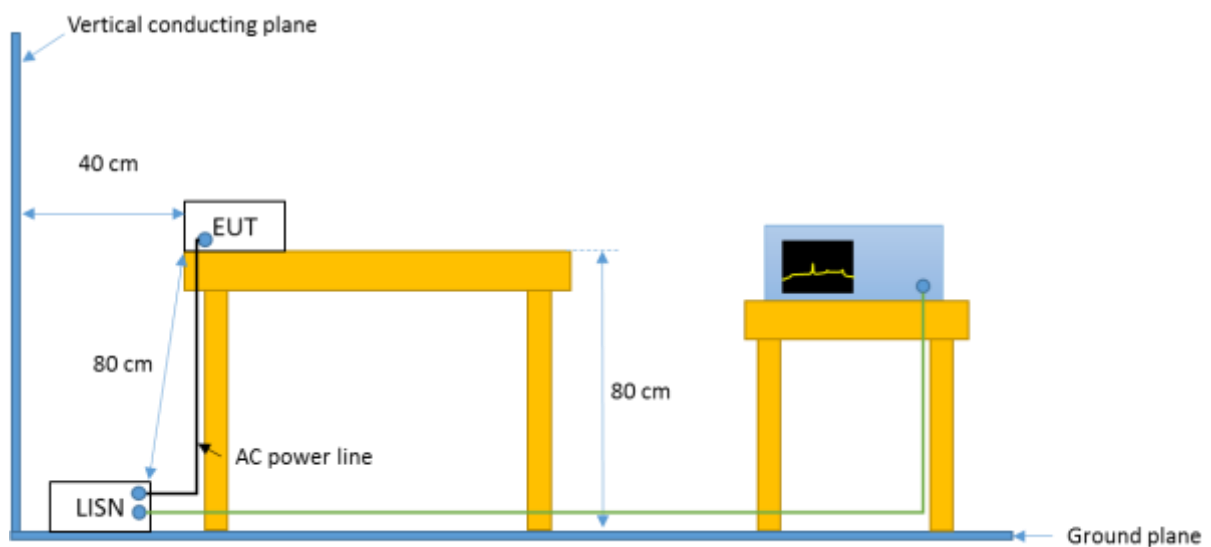

## A.2 Test Equipment List

### Conducted Setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0316	Spectrum analyzer	FSV30	103309	Rohde & Schwarz	2017-09-22	2019-09-22

### Radiated Setup-1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0133	Spectrum analyzer	FSV40	101358	Rohde & Schwarz	2016-04-15	2018-04-15
0137	Log antenna 30 MHz – 1 GHz	3142E	00156946	ETS Lindgren	2017-12-19	2019-12-19
0135	Semi Anechoic chamber	FACT 3	5720	ETS Lindgren	2016-04-28	2018-04-28
0530	Measurement Software	EMC32	100623	Rohde & Schwarz	N/A	N/A

N/A: Not Applicable

### Radiated Setup-2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0420	Spectrum analyzer	FSV40	101556	Rohde & Schwarz	2016-04-14	2018-04-14
0138	Horn antenna 1 GHz – 6.4 GHz	3117	00152266	ETS Lindgren	2016-03-14	2018-03-14
0141	Double Ridged Horn Antenna 1 GHz – 18 GHz	3117	00157736	ETS Lindgren	2016-04-13	2018-04-13
0334	Double Ridged Horn Antenna 18 GHz – 40 GHz	3116C-PA	00196308	ETS Lindgren	2017-08-22	2019-08-22
0337	Full Anechoic chamber	RFD_FA_100	5996	ETS Lindgren	2016-04-28	2018-04-28
0329	Measurement Software	EMC32	100401	Rohde & Schwarz	N/A	N/A

N/A: Not Applicable

### Radiated Setup - shared equipments

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0617	Power Sensor 50MHz-18GHz	NRP-Z81	104386	Rohde & Schwarz	2017-05-24	2019-05-24
0618	Power Sensor 50MHz-18GHz	NRP-Z81	104382	Rohde & Schwarz	2017-05-24	2019-05-24



#### AC power-line conducted emission Setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0027	Measurement software	EMC32	1300.7010.02	Rohde & Schwarz	NA	NA
0317	Spectrum Analyzer	FSV30	103308	Rohde & Schwarz	2017-08-05	2019-08-05
0532	LISN	ENV216	101321	Rohde & Schwarz	2016-09-13	2018-09-13
0607	LISN	ENV216	101342	Rohde & Schwarz	2017-09-06	2018-09-06
0538	Transformer	Monophase	TIMM3.15	Montelem	NA	NA
0299	Multimeter	34401A	US36065790	HP	2017-11-14	2019-11-14
0624	AC power source	61604	SM135546	CHROMA	NA	NA
0299	Multimeter	34401A	US36065790	HP	2017-11-14	2019-11-14

N/A: Not Applicable

### A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the below table:

Measurement type	Uncertainty [ ±dB]
Conducted Power	±1.0
Conducted Spurious Emission	±2.9
Radiated tests <1GHz	±3.8
Radiated tests 1GHz - 40 GHz	±4.7
AC power-line conducted emission	±1.45

# Annex B. Test Results U-NII-1 & U-NII-2A

## B.1 Test Conditions

For 802.11a mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, but not simultaneously.

For 802.11n20 (20 MHz channel bandwidth), 802.11n40 (40MHz channel bandwidth), 802.11ac80 (80MHz channel bandwidth) and 802.11ac160 (160MHz channel bandwidth) modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, and also simultaneously.

The conducted RF output power at each chain was adjusted according to the client's supplied Target values (see following table) using the Intel DRTU tool and measuring the power by using a spectrum analyser with the channel integration method according to point II) E) 2) e) (Method SA-2 Alternative) of Guidance 789033 D02.

Measured values for adjustment were within +/- 0.25 dB from the declared Target values.

U-NII-1					Conducted Power, Target Value (dBm)		
Mode	BW (MHz)	Data Rate	CH #	Freq. (MHz)	SISO Chain A	SISO Chain B	MIMO at both ports A and B
802.11a	20	6Mbps	36	5180	18.0	18.5	-
			40	5200	21.5	21.5	-
			48	5240	21.5	21.5	-
802.11n	20	HT0 HT8*	36	5180	18.0	18.0	21.0
			40	5200	21.0	21.0	23.0
			48	5240	21.0	21.0	23.0
	40	HT0 HT8*	38F	5190	18.5	18.5	18.0
			46F	5230	21.5	21.5	23.0
802.11ac	80	VHT0	42ac80	5210	18.0	18.0	16.5
802.11ac	160	VHT0	50ac160	5250	13.5	13.5	14.0

U-NII-2A					Conducted Power, Target Value (dBm)		
Mode	BW (MHz)	Data Rate	CH #	Freq. (MHz)	SISO Chain A	SISO Chain B	MIMO at both ports A and B
802.11a	20	6Mbps	52	5260	21.0	21.0	-
			56	5280	21.0	21.0	-
			64	5320	18.0	18.0	-
802.11n	20	HT0 HT8*	52	5260	21.0	21.0	22.5
			56	5280	21.0	21.0	23.0
			64	5320	18.0	18.0	19.5
	40	HT0 HT8*	54F	5270	21.5	21.5	23.5
			62F	5310	16.0	16.0	18.0
802.11ac	80	VHT0	58ac80	5290	16.5	17.5	16.0

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

802.11a → 6Mbps

802.11n20 and 802.11n40 (SISO) → HT0

802.11n20 and 802.11n40 (MIMO) → HT8

802.11ac80 (SISO) → VHT0

802.11ac80 (MIMO) → VHT0

802.11ac160 (SISO) → VHT0

802.11ac160 (MIMO) → VHT0


Alternative channels to the lowest and highest channels per band have been also tested for Band Edge compliance.

## B.2 Test Results Tables U-NII-1

### B.2.1 26dB & 99% Bandwidth

#### Test procedure

The setup below was used to measure the 26dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

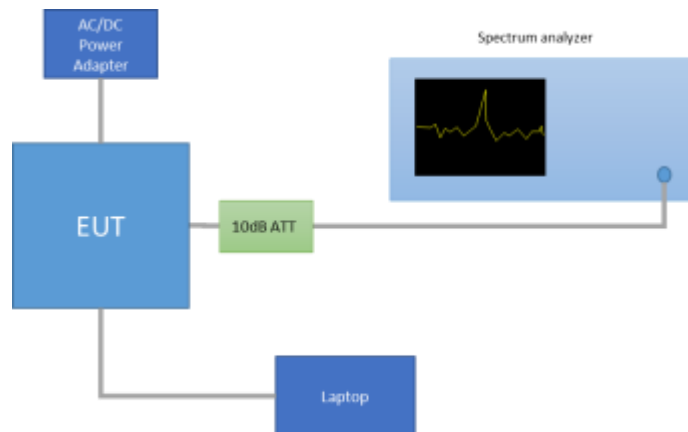

#### Results tables

Mode	Rate	Antenna	Channel	Frequency [MHz]	26dB BW [MHz]	99% BW [MHz]
802.11a	6Mbps	SISO CHAIN A	36	5180	23.97	16.84
			40	5200	24.82	16.92
			48	5240	25.58	16.96
		SISO CHAIN B	36	5180	24.42	16.80
			40	5200	25.08	16.92
			48	5240	24.98	16.92
802.11n20	HT0	SISO CHAIN A	36	5180	24.82	17.92
			40	5200	24.87	17.96
			48	5240	25.23	17.96
		SISO CHAIN B	36	5180	24.37	17.92
			40	5200	24.87	18.00
			48	5240	26.13	17.96
802.11n20	HT8	MIMO CHAIN A	36	5180	25.03	17.96
			40	5200	24.67	17.88
			48	5240	27.88	18.16
		MIMO CHAIN B	36	5180	24.72	17.88
			40	5200	24.72	17.92
			48	5240	25.18	17.92

Mode	Rate	Antenna	Channel	Frequency [MHz]	26dB BW [MHz]	99% BW [MHz]
802.11n40	HT0	SISO CHAIN A	38F	5190	44.68	36.56
			46F	5230	45.14	36.64
		SISO CHAIN B	38F	5190	45.23	36.64
			46F	5230	47.57	36.80
	HT8	MIMO CHAIN A	38F	5190	43.04	36.72
			46F	5230	47.66	36.72
		MIMO CHAIN B	38F	5190	44.68	36.40
			46F	5230	45.77	36.48
802.11ac80	VHT0	SISO CHAIN A	42ac80	5210	83.96	75.04
		SISO CHAIN B	42ac80	5210	85.39	75.24
	VHT0	MIMO CHAIN A	42ac80	5210	87.29	75.12
		MIMO CHAIN B	42ac80	5210	86.35	75.12
802.11ac160	VHT0	SISO CHAIN A	50ac160	5250	165.17	153.00
		SISO CHAIN B	50ac160	5250	165.17	153.20
	VHT0	MIMO CHAIN A	50ac160	5250	165.17	153.00
		MIMO CHAIN B	50ac160	5250	165.50	153.20

Max Value

See Section B.3.1 and Section B.3.2 for the screenshot results.

## B.2.2 Power Limits. Maximum Output power & Peak power spectral density

### Test limits

FCC part	Limits
15.407 (a) (1) (iv)	For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to point E) 2) e) (Method SA-2 Alternative) of KDB 789033 D02.


The maximum power spectral density (PSD) was measured using the method according to point F) (Method SA-2 Alternative) of KDB 789033 D02.

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The setup below was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

The declared maximum antenna gain is 5dBi.

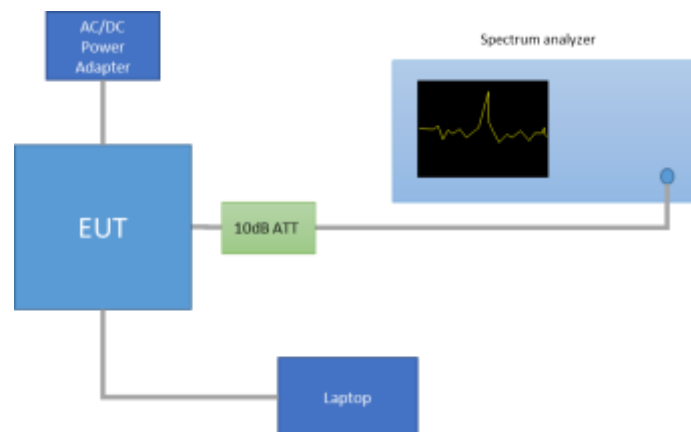

## Results tables

### Duty cycle

Mode	Rate	Antenna	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
802.11a	6Mbps	SISO-A	2.03	2.07	98.30%
		SISO-B	2.03	2.07	98.30%
802.11n20	HT0	SISO-A	1.89	1.93	98.12%
		SISO-B	1.89	1.93	98.12%
	HT8	MIMO-A	0.97	1.01	95.99%
		MIMO-B	0.97	1.01	95.99%
802.11n40	HT0	SISO-A	0.93	0.96	96.40%
		SISO-B	0.93	0.96	96.40%
	HT8	MIMO-A	0.49	0.53	92.32%
		MIMO-B	0.49	0.53	92.32%
802.11ac80	VHT0	SISO-A	0.46	0.49	93.22%
		SISO-B	0.46	0.49	93.22%
		MIMO-A	0.26	0.30	86.31%
		MIMO-B	0.26	0.30	86.31%
802.11ac160	VHT0	SISO-A	0.25	0.28	87.83%
		SISO-B	0.25	0.28	87.83%
		MIMO-A	0.15	0.19	78.50%
		MIMO-B	0.15	0.19	78.50%

### Maximum output power

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average Conducted Output Power [dBm]	Maximum* Conducted Output Power [dBm]	Maximum* Conducted Output Power [mW]	Max of EIRP [dBm]
802.11a	6Mbps	36	5180	SISO CHAIN A	18.21	18.21	66.22	23.21
				SISO CHAIN B	18.26	18.26	66.99	23.26
		40	5200	SISO CHAIN A	21.38	21.38	137.40	26.38
				SISO CHAIN B	21.32	21.32	135.52	26.32
		48	5240	SISO CHAIN A	21.43	21.43	139.00	26.43
				SISO CHAIN B	21.26	21.26	133.66	26.26
802.11n20	HT0	36	5180	SISO CHAIN A	18.18	18.18	65.77	23.18
				SISO CHAIN B	18.18	18.18	65.77	23.18
		40	5200	SISO CHAIN A	21.09	21.09	128.53	26.09
				SISO CHAIN B	21.12	21.12	129.42	26.12
		48	5240	SISO CHAIN A	21.16	21.16	130.62	26.16
				SISO CHAIN B	21.24	21.24	133.05	26.24
	HT8	36	5180	MIMO CHAIN A	17.73	17.91	61.77	22.91
				MIMO CHAIN B	17.70	17.88	61.34	22.88
				Combined A+B	20.73	20.90	123.11	25.90
		40	5200	MIMO CHAIN A	19.75	19.93	98.35	24.93
				MIMO CHAIN B	19.51	19.69	93.06	24.69
				Combined A+B	22.64	22.82	191.41	27.82
		48	5240	MIMO CHAIN A	19.52	19.70	93.27	24.70
				MIMO CHAIN B	19.73	19.91	97.89	24.91
				Combined A+B	22.64	22.81	191.17	27.81

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average Conducted Output Power [dBm]	Maximum* Conducted Output Power [dBm]	Maximum* Conducted Output Power [mW]	Max of EIRP [dBm]
802.11n40	HT0	38F	5190	SISO CHAIN A	18.37	18.53	71.28	23.53
				SISO CHAIN B	18.30	18.46	70.14	23.46
		46F	5230	SISO CHAIN A	21.10	21.26	133.64	26.26
				SISO CHAIN B	21.27	21.43	138.98	26.43
	HT8	38F	5190	MIMO CHAIN A	14.39	14.74	29.76	19.74
				MIMO CHAIN B	15.05	15.40	34.65	20.40
				Combined A+B	17.74	18.09	64.41	23.09
		46F	5230	MIMO CHAIN A	19.95	20.30	107.07	25.30
				MIMO CHAIN B	19.70	20.05	101.08	25.05
				Combined A+B	22.84	23.18	208.16	28.18
802.11ac80	VHT0	42ac80	5210	SISO CHAIN A	17.91	18.21	66.30	23.21
				SISO CHAIN B	17.70	18.00	63.17	23.00
				MIMO CHAIN A	12.11	12.75	18.83	17.75
				MIMO CHAIN B	13.39	14.03	25.29	19.03
				Combined A+B	15.81	16.45	44.13	21.45
802.11ac160	VHT0	50ac160	5250	SISO CHAIN A	12.90	13.46	22.20	18.46
				SISO CHAIN B	12.74	13.30	21.40	18.30
				MIMO CHAIN A	9.38	10.43	11.04	15.43
				MIMO CHAIN B	10.76	11.81	15.18	16.81
				Combined A+B	13.13	14.19	26.22	19.19

\* Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value



Maximum power spectral Density (PSD)

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]
802.11a	6Mbps	36	5180	SISO CHAIN A	6.56	6.56
				SISO CHAIN B	6.61	6.61
		40	5200	SISO CHAIN A	9.70	9.70
				SISO CHAIN B	9.65	9.65
		48	5240	SISO CHAIN A	9.77	9.77
				SISO CHAIN B	9.63	9.63
802.11n20	HT0	36	5180	SISO CHAIN A	6.23	6.23
				SISO CHAIN B	6.25	6.25
		40	5200	SISO CHAIN A	9.14	9.14
				SISO CHAIN B	9.18	9.18
		48	5240	SISO CHAIN A	9.25	9.25
				SISO CHAIN B	9.31	9.31
	HT8	36	5180	MIMO CHAIN A	5.77	5.95
				MIMO CHAIN B	5.76	5.94
				Combined A+B	8.78	8.95
		40	5200	MIMO CHAIN A	7.80	7.98
				MIMO CHAIN B	7.56	7.74
				Combined A+B	10.69	10.87
		48	5240	MIMO CHAIN A	7.54	7.72
				MIMO CHAIN B	7.80	7.98
				Combined A+B	10.68	10.86

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]
802.11n40	HT0	38F	5190	SISO CHAIN A	3.30	3.46
				SISO CHAIN B	3.25	3.41
		46F	5230	SISO CHAIN A	6.04	6.20
				SISO CHAIN B	6.18	6.34
	HT8	38F	5190	MIMO CHAIN A	-0.57	-0.22
				MIMO CHAIN B	0.12	0.47
				Combined A+B	2.80	3.15
		46F	5230	MIMO CHAIN A	4.88	5.23
				MIMO CHAIN B	4.73	5.08
				Combined A+B	7.82	8.16
802.11ac80	VHT0	42ac80	5210	SISO CHAIN A	0.48	0.78
				SISO CHAIN B	0.23	0.53
				MIMO CHAIN A	-5.20	-4.56
				MIMO CHAIN B	-3.90	-3.26
				Combined A+B	-1.49	-0.85
802.11ac160	VHT0	50ac160	5250	SISO CHAIN A	-7.06	-6.50
				SISO CHAIN B	-7.20	-6.64
				MIMO CHAIN A	-10.54	-9.49
				MIMO CHAIN B	-9.27	-8.22
				Combined A+B	-6.85	-5.80

\* Maximum values are the duty cycle compensated values calculated from the measured average values

**See Section B.3.3 for the screenshot results.**


### B.2.3 Undesirable emission limits : Band Edge (Conducted)

#### Test limits

FCC part	Limits																				
15.407 (b) (1)	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.																				
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

#### Test procedure

The setup below was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared Antenna Gain.

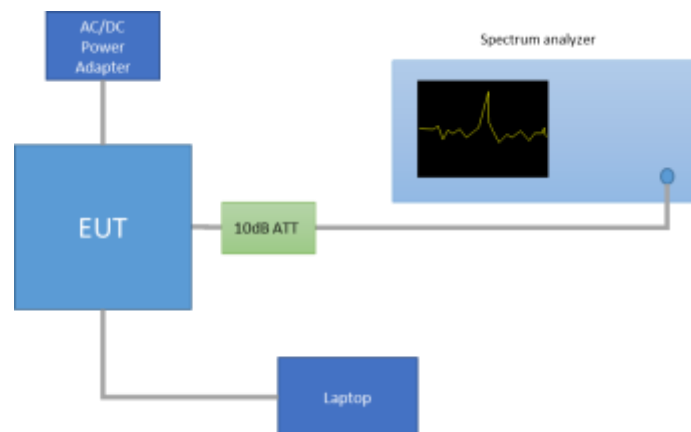

For Band Edge measurements in average mode on the low frequency section, one of the two methods is used according to section G) 6) (KDB 789033 D02):

- 1) Method AD (Average Detection) as per paragraph II.G.6.c.
- 2) Method VB (Averaging using reduced video bandwidth) as per paragraph II.G.6.d.

In case of Band Edge measurements falling in restricted bands, the declared Antenna Gain is also compensated in the graph. The declared maximum antenna gain is 5dBi.

For Band Edge measurements falling in restricted bands, the following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dBµV/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.

§15.209(a)			Converted values	
Freq Range (MHz)	Distance (m)	Field strength (microvolts/meter)	Field strength (dB microvolts/meter)	Power (dBm)
Above 960	3	500	54.0	-41.2

**See Section B.3.4 for the screenshot results.**

## B.2.4 Radiated spurious emission

### Standard references

FCC part	Limits																																
15.407 (b) (1)	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.																																
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>0.009-0.490</td><td>2400/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>1.705-30.0</td><td>30</td><td>-</td><td>30</td></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	0.009-0.490	2400/f(kHz)	-	300	0.490-1.705	24000/f(kHz)	-	300	1.705-30.0	30	-	30	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																														
0.009-0.490	2400/f(kHz)	-	300																														
0.490-1.705	24000/f(kHz)	-	300																														
1.705-30.0	30	-	30																														
30-88	100	40	3																														
88-216	150	43.5	3																														
216-960	200	46	3																														
Above 960	500	54	3																														

### Test procedure

The setup below was used to measure the radiated spurious emissions.


Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.


The radiated spurious emission was measured on the worst case configuration selected from the chapter B.2.2 and using the low, middle and high channel.

For technologies 802.11n20, 802.11n40, 802.11ac80, 802.11ac160, the worst case in terms of spurious emissions found among the low, mid and high channels when tested on chain A and B separately is used to perform the test in MIMO mode (Chain A+B).


*Radiated Setup 30 MHz - 1GHz*

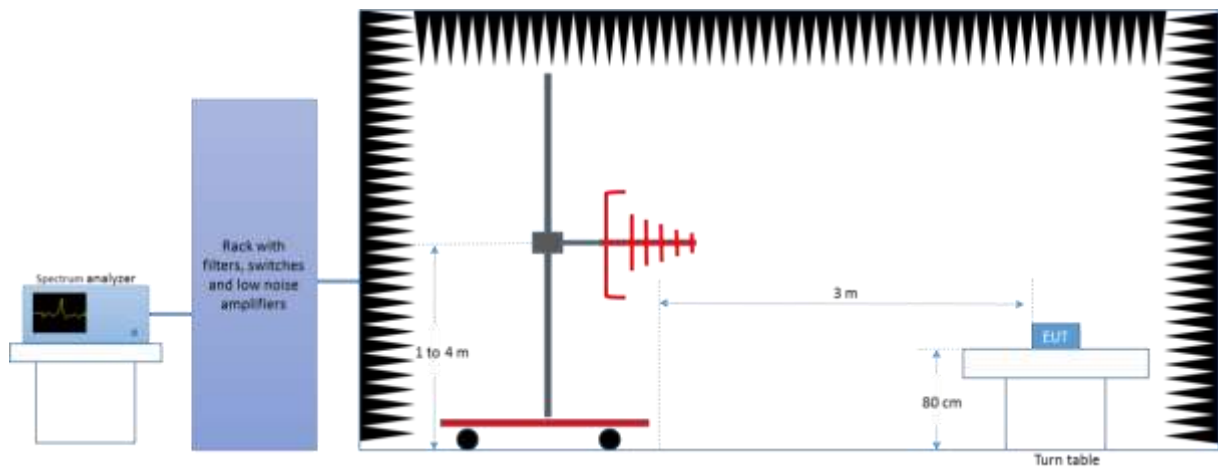

*Radiated Setup 1 GHz - 18 GHz*

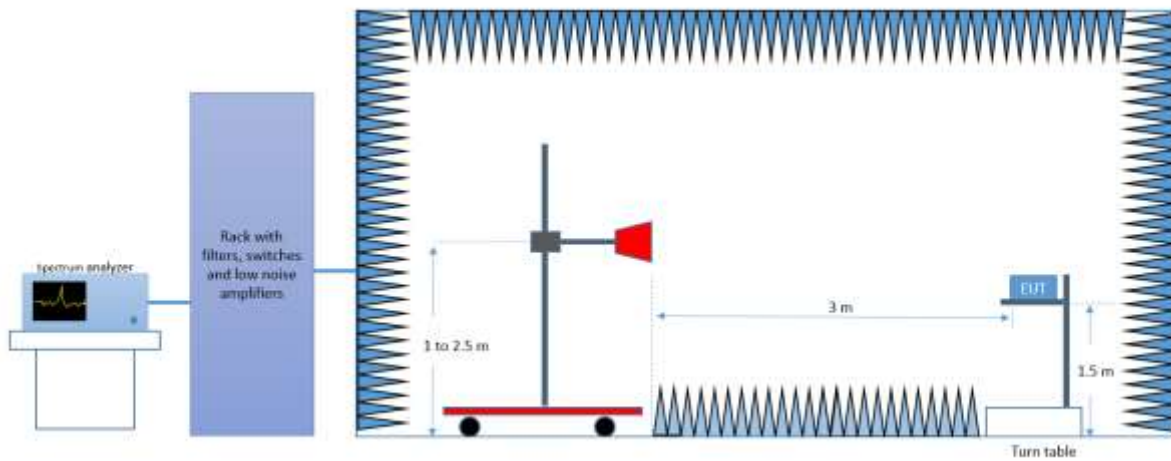

*Radiated Setup 18 GHz - 40 GHz*

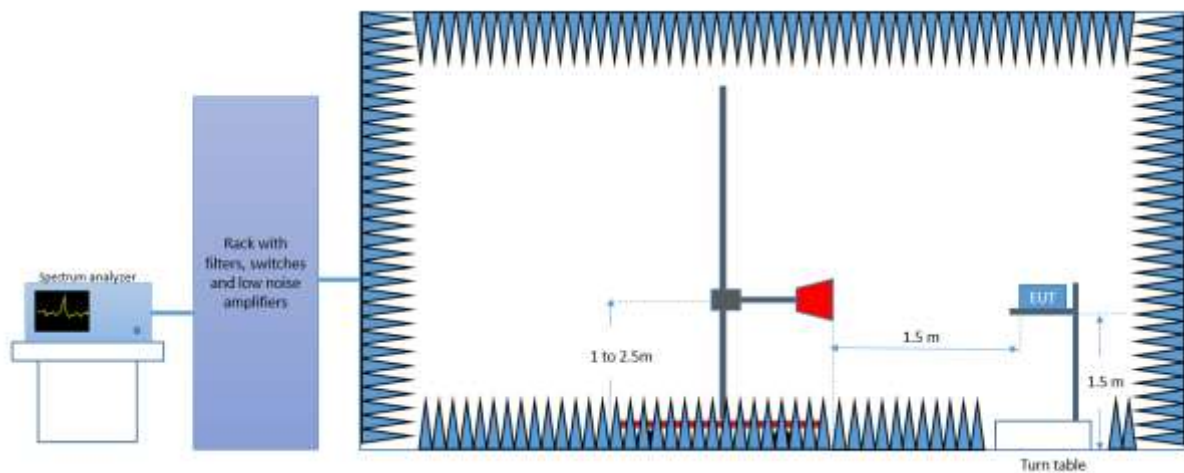

Sample Calculation

The field strength is deduced from the radiated measurement using the following equation:

$$E = 126.8 - 20\log(\lambda) + P - G$$

where

*E* is the field strength of the emission at the measurement distance, in dBμV/m

*P* is the power measured at the output of the test antenna, in dBm

*λ* is the wavelength of the emission under investigation  $[300/f_{MHz}]$ , in m

*G* is the gain of the test antenna, in dBi

NOTE – The measured power P includes all applicable instrument correction factors up to the connection to the test Antenna e.g. cable losses, amplifier gains.

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{SpecLimit} = E_{Meas} + 20\log(D_{Meas}/D_{SpecLimit})$$

where

*E<sub>SpecLimit</sub>* is the field strength of the emission at the distance specified by the limit, in dBμV/m

*E<sub>Meas</sub>* is the field strength of the emission at the measurement distance, in dBμV/m

*D<sub>Meas</sub>* is the measurement distance, in m

*D<sub>SpecLimit</sub>* is the distance specified by the limit, in m

# Test Results

## 30 MHz – 40 GHz, 802.11a, 6Mbps, Chain A

### Radiated Spurious – CH36

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	28.1	---	43.6	15.5
144.0	27.3	---	43.6	16.3
216.0	30.5	---	43.6	13.1
576.0	36.2	---	46.0	9.8
640.0	37.0	---	46.0	9.0
1113.4	---	37.2	54.0	16.8
1113.9	43.6	---	74.0	30.4
1190.2	---	39.3	54.0	14.7
1190.5	44.6	---	74.0	29.4
15928.5	---	44.2	54.0	9.8
17988.0	59.4	---	74.0	14.6
26629.5	48.7	---	74.0	25.3
26741.7	---	38.1	54.0	15.9

### Radiated Spurious – CH40

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	28.0	---	43.6	15.6
216.0	30.6	---	43.6	13.0
576.0	36.0	---	46.0	10.0
718.3	37.5	---	46.0	<b>8.5</b>
1113.4	---	36.9	54.0	17.1
1113.4	43.6	---	74.0	30.4
1190.2	---	40.2	54.0	13.8
1190.5	45.2	---	74.0	28.8
10399.3	---	39.9	54.0	14.1
10401.1	50.2	---	74.0	23.8
34507.2	50.5	---	74.0	23.5
34520.7	---	39.6	54.0	14.4



**Radiated Spurious – CH48**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	28.2	---	43.6	15.4
216.0	30.1	---	43.6	13.5
576.0	35.1	---	46.0	10.9
640.0	35.8	---	46.0	10.2
1190.2	---	39.8	54.0	14.2
1190.5	44.8	---	74.0	29.2
10481.0	50.3	---	74.0	23.7
10481.0	---	38.7	54.0	15.3
20960.1	---	38.3	54.0	15.7
20975.8	50.2	---	74.0	23.8

**30 MHz – 40 GHz, 802.11a, 6Mbps, Chain B**
**Radiated Spurious – CH36**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	29.4	---	43.6	14.2
168.5	30.1	---	43.6	13.5
216.0	30.6	---	43.6	13.0
576.0	36.1	---	46.0	9.9
1113.4	---	36.8	54.0	17.2
1113.6	43.2	---	74.0	30.8
1190.5	45.0	---	74.0	29.0
1190.5	---	39.7	54.0	14.3
10359.6	---	40.4	54.0	13.6
10361.4	51.9	---	74.0	22.1
34899.5	---	40.2	54.0	13.8
34915.6	51.2	---	74.0	22.8

**Radiated Spurious – CH40**

Frequency	MaxPeak	Avg	Limit	Margin
115.2	28.8	---	43.6	14.8
144.0	28.1	---	43.6	15.5
215.9	31.0	---	43.6	12.6
576.0	36.1	---	46.0	9.9
640.0	36.2	---	46.0	9.8
1113.2	42.4	---	74.0	31.6
1113.6	---	36.3	54.0	17.7
1190.2	---	39.7	54.0	14.3
1190.5	44.6	---	74.0	29.4
10398.4	51.1	---	74.0	22.9
10399.3	---	39.5	54.0	14.5
34853.1	---	39.7	54.0	14.3
34856.1	50.2	---	74.0	23.8

**Radiated Spurious – CH48**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	28.4	---	43.6	15.2
144.0	27.6	---	43.6	16.0
216.0	31.3	---	43.6	12.3
576.0	36.2	---	46.0	9.8
1113.2	43.1	---	74.0	30.9
1113.6	---	36.6	54.0	17.4
1190.2	---	39.6	54.0	14.4
1190.2	44.6	---	74.0	29.4
10482.8	50.3	---	74.0	23.7
10647.8	---	38.8	54.0	15.2
34844.3	50.4	---	74.0	23.6
34845.1	---	39.5	54.0	14.5

# 30 MHz – 40 GHz, 802.11n20, HT0, Chain A

## Radiated Spurious – CH36

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	28.4	---	43.6	15.2
215.9	30.3	---	43.6	13.3
576.0	37.2	---	46.0	8.8
640.0	37.6	---	46.0	8.4
1113.6	---	36.4	54.0	17.6
1113.9	42.6	---	74.0	31.4
1190.2	---	39.3	54.0	14.7
1190.5	45.0	---	74.0	29.0
10358.7	---	40.5	54.0	13.5
10361.0	51.0	---	74.0	23.0
31817.3	50.4	---	74.0	23.6
31843.9	---	39.1	54.0	14.9

## Radiated Spurious – CH40

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	28.8	---	43.6	14.8
215.9	31.1	---	43.6	12.5
576.0	36.4	---	46.0	9.6
640.0	35.2	---	46.0	10.8
1113.4	---	36.6	54.0	17.4
1113.6	44.0	---	74.0	30.0
1190.2	---	39.0	54.0	15.0
1190.5	45.5	---	74.0	28.5
10399.8	---	39.7	54.0	14.3
10403.8	50.4	---	74.0	23.6
34539.7	50.2	---	74.0	23.8
34541.8	---	39.7	54.0	14.3

**Radiated Spurious – CH48**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	28.6	---	43.6	15.0
172.4	27.9	---	43.6	15.8
216.0	33.2	---	43.6	10.4
576.0	36.6	---	46.0	9.4
1113.4	43.5	---	74.0	30.5
1113.4	---	36.9	54.0	17.1
1190.2	---	39.3	54.0	14.7
1190.5	44.6	---	74.0	29.4
10472.9	---	38.9	54.0	15.1
10603.2	50.6	---	74.0	23.4
20958.3	---	39.9	54.0	14.1
20959.3	50.0	---	74.0	24.0

**30 MHz – 40 GHz, 802.11n20, HT0, Chain B**
**Radiated Spurious – CH36**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	28.2	---	43.6	15.4
144.0	27.1	---	43.6	16.5
216.0	30.9	---	43.6	12.7
576.0	36.1	---	46.0	9.9
640.0	36.0	---	46.0	10.0
1151.7	---	34.5	54.0	19.5
1151.9	43.4	---	74.0	30.6
1190.0	44.8	---	74.0	29.2
1190.2	---	39.1	54.0	14.9
10360.1	---	41.2	54.0	12.8
10360.1	52.2	---	74.0	21.8
31067.2	---	38.2	54.0	15.8
31067.2	50.1	---	74.0	23.9

**Radiated Spurious – CH40**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	28.2	---	43.6	15.4
216.0	31.6	---	43.6	12.0
240.0	28.9	---	46.0	17.1
576.0	36.0	---	46.0	10.0
1113.4	---	36.3	54.0	17.7
1113.6	43.5	---	74.0	30.5
1190.2	---	39.2	54.0	14.8
1190.5	44.8	---	74.0	29.2
10398.9	---	39.7	54.0	14.3
10405.6	49.2	---	74.0	24.8
34724.9	---	38.7	54.0	15.3
34729.5	50.6	---	74.0	23.4

**Radiated Spurious – CH48**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	28.4	---	43.6	15.2
143.9	26.2	---	43.6	17.4
216.0	32.5	---	43.6	11.1
576.0	35.6	---	46.0	10.4
1113.4	---	36.7	54.0	17.3
1190.2	---	39.2	54.0	14.9
1190.5	44.9	---	74.0	29.1
16677.2	55.5	---	74.0	18.5
16720.9	---	44.6	54.0	9.4
34891.9	---	40.1	54.0	13.9
34896.2	50.6	---	74.0	23.4

# 30 MHz – 40 GHz, 802.11n20, HT8, Chain A+B

## Radiated Spurious – CH36

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
182.3	36.8	---	43.6	6.8
576.0	37.5	---	46.0	8.5
640.0	38.9	---	46.0	<b>7.1</b>
5816.3	57.1	---	74.0	16.9
5822.0	---	46.8	54.0	7.2
10352.9	53.1	---	74.0	20.9
10363.6	---	42.6	54.0	11.4
26694.9	47.8	---	74.0	26.2
26767.0	---	37.3	54.0	16.7

# 30 MHz – 40 GHz, 802.11n40, HT0, Chain A

## Radiated Spurious – CH38F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	28.4	---	43.6	15.2
144.0	26.6	---	43.6	17.0
215.9	31.8	---	43.6	11.8
360.0	32.2	---	46.0	13.8
576.0	35.7	---	46.0	10.3
1113.4	43.1	---	74.0	30.9
1113.4	---	36.8	54.0	17.2
1190.0	45.3	---	74.0	28.7
1190.5	---	39.4	54.0	14.6
10369.9	---	39.8	54.0	14.2
10456.4	51.2	---	74.0	22.8
27458.5	47.4	---	74.0	26.6
27461.9	---	38.2	54.0	15.8

**Radiated Spurious – CH46F**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	28.2	---	43.6	15.4
144.0	27.8	---	43.6	15.8
216.0	31.9	---	43.6	11.7
576.0	36.0	---	46.0	10.0
640.0	35.5	---	46.0	10.5
1113.4	43.5	---	74.0	30.5
1113.4	---	36.6	54.0	17.4
1190.2	---	39.2	54.0	14.8
1190.5	45.2	---	74.0	28.8
16669.1	---	44.0	54.0	10.0
16673.1	56.1	---	74.0	17.9
37770.0	49.9	---	74.0	24.1
37772.5	---	37.9	54.0	16.1

**30 MHz – 40 GHz, 802.11n40, HT0, Chain B**
**Radiated Spurious – CH38F**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	29.1	---	43.6	14.5
144.0	27.1	---	43.6	16.5
216.0	31.6	---	43.6	12.0
576.0	35.7	---	46.0	10.3
776.1	38.9	---	46.0	<b>7.1</b>
1113.4	---	36.4	54.0	17.6
1113.6	43.5	---	74.0	30.5
1190.0	45.7	---	74.0	28.3
1190.2	---	39.3	54.0	14.7
10371.7	49.3	---	74.0	24.7
10375.2	---	39.3	54.0	14.7
19991.1	48.0	---	74.0	26.0
19993.0	---	35.8	54.0	18.2

**Radiated Spurious – CH46F**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	28.6	---	43.6	15.0
144.0	27.3	---	43.6	16.3
215.9	31.6	---	43.6	12.0
576.0	35.7	---	46.0	10.3
640.1	34.9	---	46.0	11.1
1113.2	43.4	---	74.0	30.6
1113.4	---	36.5	54.0	17.5
1190.5	---	39.1	54.0	14.9
1190.5	45.1	---	74.0	28.9
16700.4	---	44.2	54.0	9.8
16739.2	54.7	---	74.0	19.3
38698.1	---	39.7	54.0	14.3
38707.8	51.3	---	74.0	22.7

**30 MHz – 40 GHz, 802.11n40, HT8, Chain A+B**
**Radiated Spurious – CH38F**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	27.5	---	43.6	16.1
170.5	29.2	---	43.6	14.4
640.0	38.3	---	46.0	7.7
1111.4	42.3	---	74.0	31.7
1113.4	---	33.7	54.0	20.3
1190.0	43.6	---	74.0	30.4
1190.2	---	37.7	54.0	16.3
10380.1	---	41.5	54.0	12.5
10382.8	52.3	---	74.0	21.7
36313.2	---	40.1	54.0	13.9
36321.3	52.8	---	74.0	21.2



### 30 MHz – 40 GHz, 802.11ac80, VHT0, Chain A

#### Radiated Spurious – CH42ac80

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	28.5	---	43.6	15.1
215.9	31.5	---	43.6	12.1
576.0	35.6	---	46.0	10.4
1113.4	---	35.9	54.0	18.1
1113.9	43.0	---	74.0	31.0
1190.2	45.4	---	74.0	28.6
1190.5	---	39.2	54.0	14.8
16662.9	---	44.7	54.0	9.3
16691.4	55.4	---	74.0	18.6
39663.3	53.2	---	74.0	20.8
39762.1	---	42.7	54.0	11.3

### 30 MHz – 40 GHz, 802.11ac80, VHT0, Chain B

#### Radiated Spurious – CH42ac80

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	28.6	---	43.6	15.0
144.0	27.8	---	43.6	15.8
216.0	30.7	---	43.6	12.9
576.0	36.1	---	46.0	9.9
640.0	35.2	---	46.0	10.8
1113.4	---	36.6	54.0	17.4
1124.9	43.9	---	74.0	30.1
1190.5	---	39.2	54.0	14.8
1190.5	45.3	---	74.0	28.7
16683.4	---	44.4	54.0	9.6
16684.3	55.8	---	74.0	18.2
39796.7	---	42.8	54.0	11.2
39836.7	53.3	---	74.0	20.7

### 30 MHz – 40 GHz, 802.11ac80, VHT0, Chain A+B

#### Radiated Spurious – CH42ac80

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	27.6	---	43.6	16.0
181.0	40.4	---	43.6	<b>3.2</b>
640.0	37.6	---	46.0	8.4
1124.9	---	37.4	54.0	16.6
1125.2	45.0	---	74.0	29.0
1190.0	45.1	---	74.0	29.0
1190.5	---	37.6	54.0	16.4
16646.8	---	44.6	54.0	9.4
16720.4	54.8	---	74.0	19.2
39738.0	54.0	---	74.0	20.0
39794.1	---	42.5	54.0	11.5

### 30 MHz – 40 GHz, 802.11ac160, VHT0, Chain A

#### Radiated Spurious – CH50ac160

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	28.4	---	43.6	15.2
216.0	32.1	---	43.6	11.5
576.1	35.2	---	46.0	10.8
640.0	36.9	---	46.0	9.1
1113.2	42.7	---	74.0	31.3
1113.6	---	36.7	54.0	17.3
1190.5	---	39.2	54.0	14.8
1190.5	45.0	---	74.0	29.0
16671.8	---	44.3	54.0	9.7
16742.7	55.5	---	74.0	18.5
39652.4	53.2	---	74.0	20.8
39709.8	---	42.9	54.0	11.1

### 30 MHz – 40 GHz, 802.11ac160, VHT0, Chain B

#### Radiated Spurious – CH50ac160

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	29.0	---	43.6	14.6
144.0	27.1	---	43.6	16.5
216.0	32.3	---	43.6	11.3
576.0	35.7	---	46.0	10.3
640.0	36.4	---	46.0	9.6
1113.6	43.8	---	74.0	30.2
1113.6	---	37.2	54.0	16.8
1190.2	---	39.0	54.0	15.0
1190.5	45.2	---	74.0	28.8
16721.3	55.1	---	74.0	18.9
16736.9	---	45.0	54.0	9.0
39773.5	53.3	---	74.0	20.7
39778.5	---	42.7	54.0	11.3

### 30 MHz – 40 GHz, 802.11ac160, VHT0, Chain A+B

#### Radiated Spurious – CH50ac160

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	27.7	---	43.6	15.9
320.0	31.9	---	46.0	14.1
640.0	38.2	---	46.0	<b>7.8</b>
1190.2	44.5	---	74.0	29.5
1190.5	---	37.1	54.0	16.9
1279.8	---	37.5	54.0	16.5
1280.1	44.7	---	74.0	29.3
16644.6	---	45.1	54.0	8.9
16672.7	54.4	---	74.0	19.6
21100.4	---	38.6	54.0	15.4
21100.4	48.2	---	74.0	25.8

## B.2.5 AC power-line conducted emission

### Standard references:

FCC part	Limits														
15.407 (6) 15.207	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.														
	<table><tr><th rowspan="2">Frequency of emission (MHz)</th><th colspan="2">Conducted limit (dB<math>\mu</math>V)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
	Frequency of emission (MHz)		Conducted limit (dB $\mu$ V)												
		Quasi-peak	Average												
	0.15-0.5	66 to 56*	56 to 46*												
	0.5-5	56	46												
	5-30	60	50												
	*Decreases with the logarithm of the frequency.														

### Test procedure:


The EUT and peripherals are placed on a wooden table with a nominal size of 1.0 m by 1.5 m, raised 80 cm above the reference ground plane. The EUT is connected to AC-Power line through a Line Impedance Stabilization Network (LISN) to accommodate a 50  $\Omega$ /50  $\mu$ H coupling impedance for the measurement system. The EUT control PC is considered as a peripheric and therefore is connected to a second LISN which has the measurement port connected to a 50 ohms impedance.

Each measurement is done for each current-carrying conductor (Line and Neutral) at the end plug of the EUT power cord. The EUT is tested for several transmission modes (frequency channel, modulation, etc.) and the result providing the maximum measured emission is reported.

The exploratory measurement is done over the frequency range from 150 kHz to 30 MHz, while the measurement receiver is recording the Peak and Average signal at 10 kHz steps in Max Hold mode. The cables manipulation is performed within the range of likely configurations to determine the maximum emission. Once the EUT cable configuration, arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is found the six highest AC power-line conducted emissions relative to 20 dB of the limit are reported as the final measurement. If fewer than six emission frequencies are within 20 dB of the limit, the noise level is reported. For the final measurement, the measurement receiver records the Quasi Peak values with 9 kHz resolution bandwidth and the average values with 10 kHz resolution bandwidth.

The reported results correspond to the configuration of the worst case spurious level detected among all modes.

### EUT arrangement for AC power-line conducted emission tests

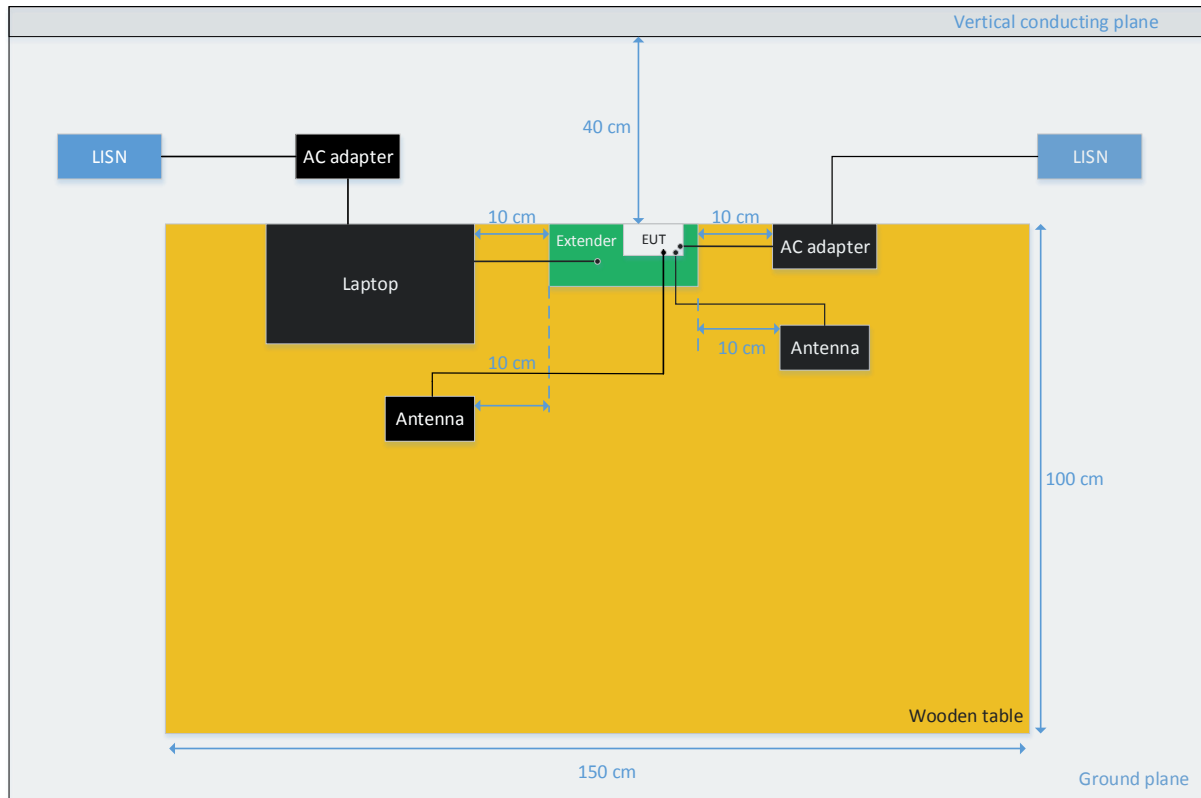

#### Sample Calculation:

The measured level at the spectrum analyzer in dBuV is corrected by a transducer factor taking into account the losses of the RF cable and the LISN as follows:

$$\text{Conducted Emission level (dBuV)} = \text{SA}_{\text{Level}} + \text{RFCable}_{\text{Losses}} + \text{LISN}_{\text{Losses}}$$

Where:

$\text{SA}_{\text{Level}}$  is the voltage level displayed on the measurement receiver, in dBuV.

$\text{RFCable}_{\text{Losses}}$  is the value of the cable losses between the LISN and the measurement receiver, in dB.

$\text{LISN}_{\text{Losses}}$  is the value of the insertion losses of the LISN, in dB.

**Test Results:**
**150kHz – 30MHz, all modes**
**AC power-line conducted – Phase L1**

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBµV	dBµV	dBµV	dB
0.16	53.0	---	65.7	12.7
0.16	---	29.1	55.7	26.6
0.38	44.6	---	59.5	14.9
0.37	---	28.8	49.7	20.9
3.94	41.8	---	56.0	14.2
4.03	---	27.7	46.0	18.3
7.90	44.2	---	60.0	15.8
8.02	---	30.2	50.0	19.8
13.56	54.0	---	60.0	6.0
13.56	---	40.2	50.0	9.8
18.25	38.0	---	60.0	22.0
18.12	---	26.6	50.0	23.4

Note: The emissions found do not change with the modulation and/or frequency.

**AC power-line conducted – Neutral N**

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBµV	dBµV	dBµV	dB
0.16	53.5	---	65.7	12.2
0.16	---	28.1	55.7	27.6
0.38	42.2	---	59.4	17.2
0.38	---	27.6	49.5	21.9
4.00	42.5	---	56.0	13.5
4.02	---	26.2	46.0	19.8
11.13	44.2	---	60.0	15.8
11.17	---	31.6	50.0	18.4
13.56	46.4	---	60.0	13.6
13.56	---	38.0	50.0	12.0
23.73	31.2	---	60.0	28.8
23.96	---	18.7	50.0	31.3


Note: The emissions found do not change with the modulation and/or frequency.

### B.3 Test Results Screenshot U-NII-1

#### B.3.1 26dB Bandwidth


## SISO-A, 802.11a, 6Mbps

Channel 48

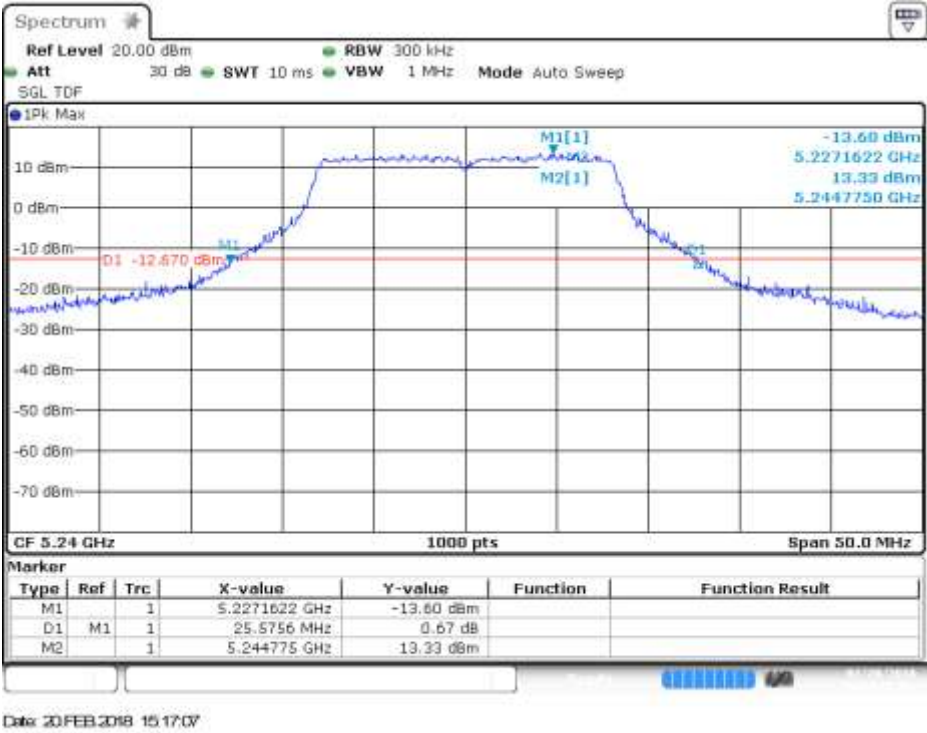


## SISO-B, 802.11n20, HT0

Channel 48

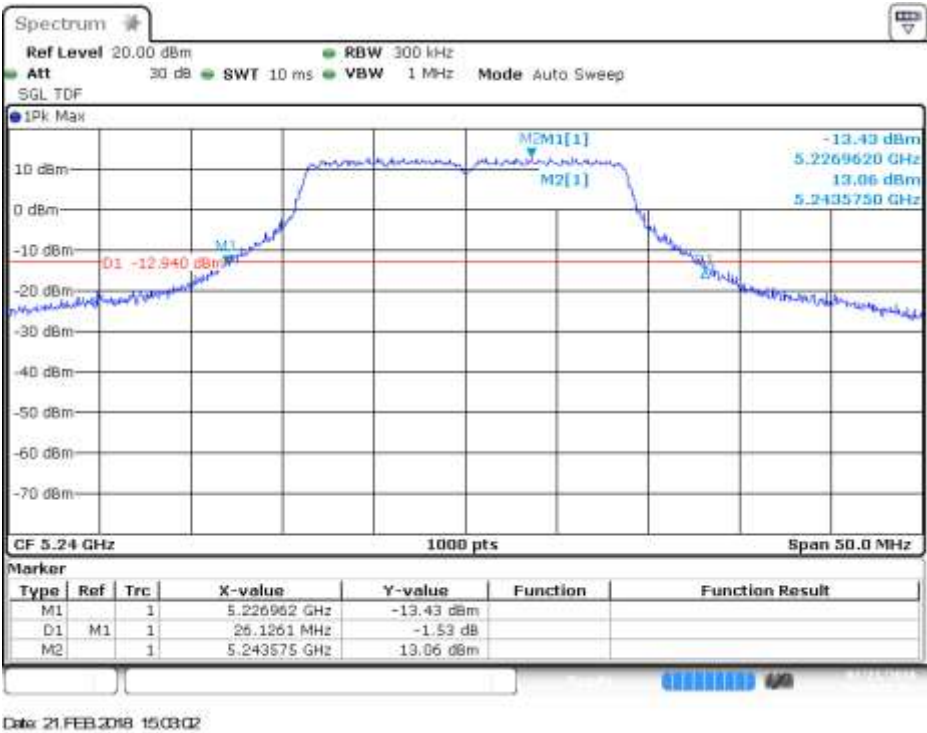


## SISO-B, 802.11n40, HT0

Channel 46F

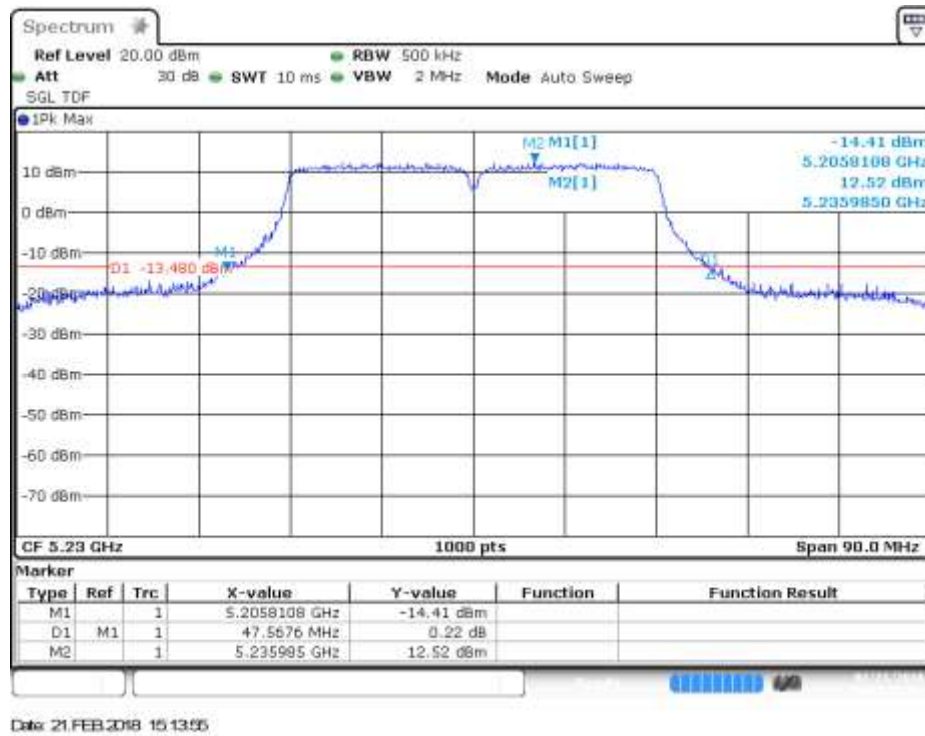

## MIMO-A, 802.11n20, HT8


Channel 48

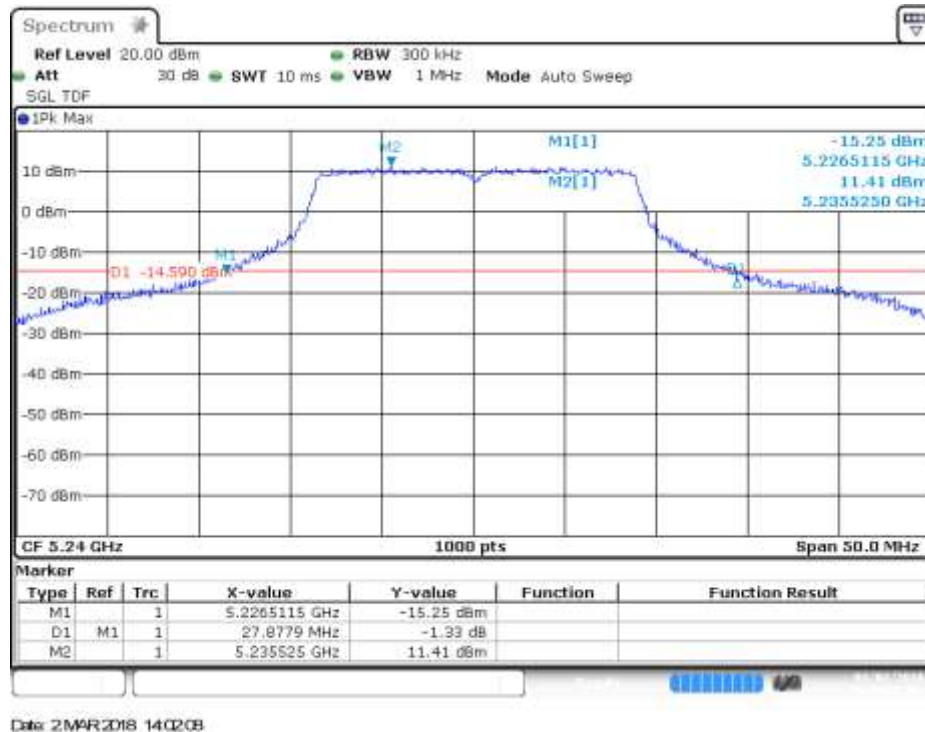




## MIMO-A, 802.11n40, HT8

Channel 46F

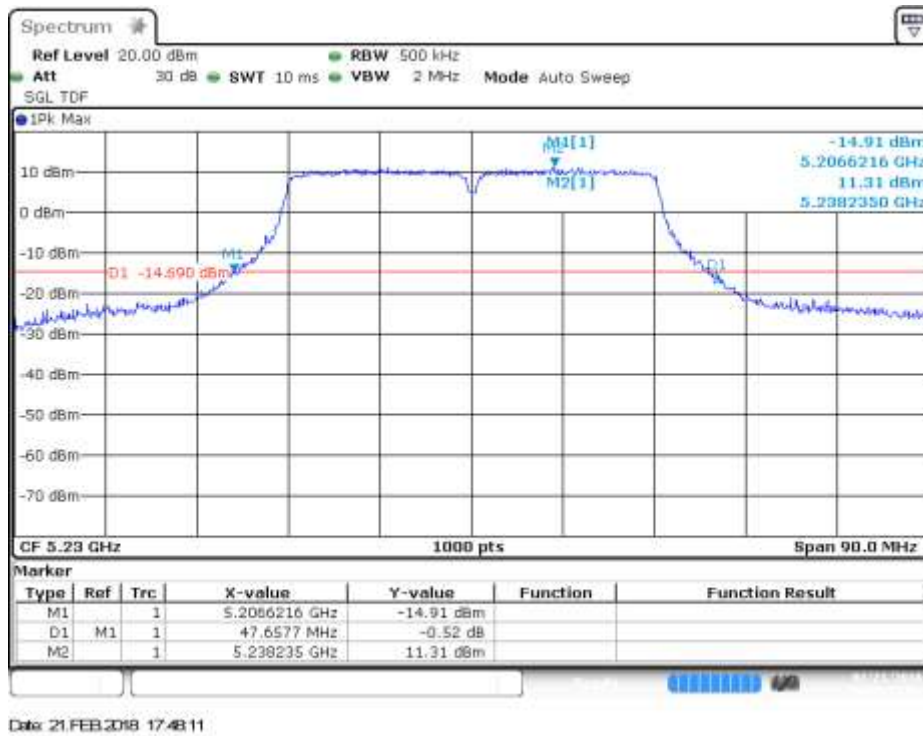


## SISO-B, 802.11ac80, VHT0

Channel 42ac80

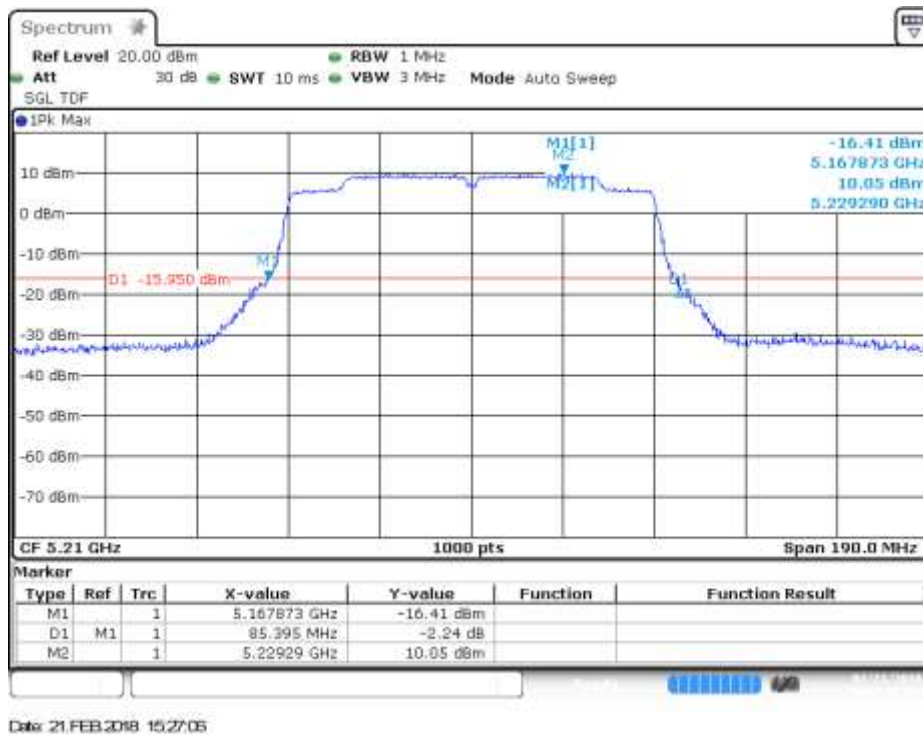

## MIMO-A, 802.11ac80, VHT0

Channel 42ac80

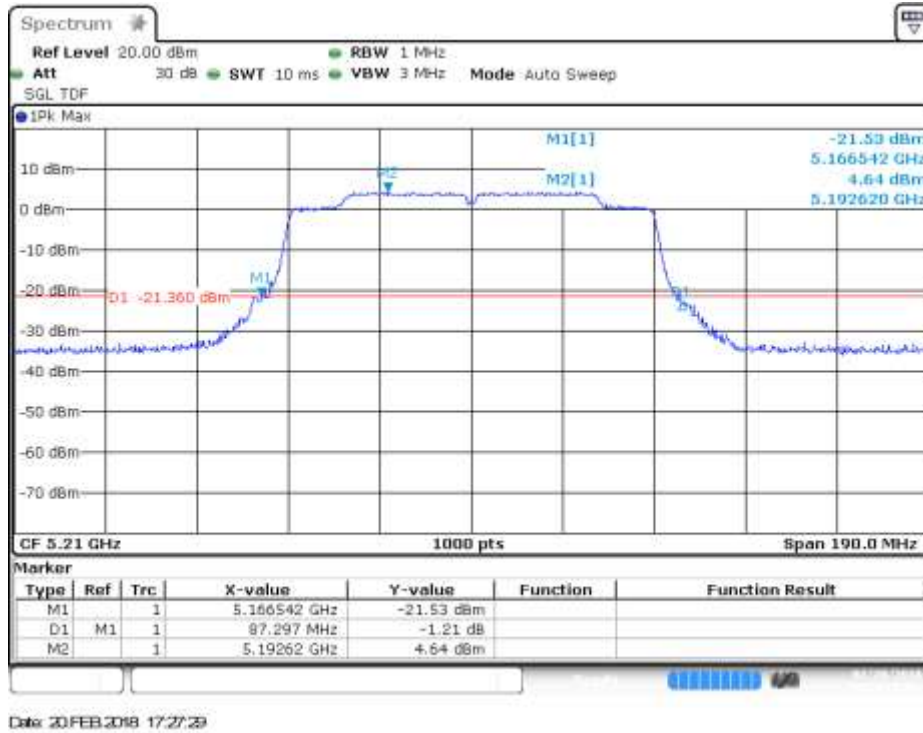


## SISO-A, 802.11ac160, VHT0

Channel 50ac160



## MIMO-B, 802.11ac160, VHT0

Channel 50ac160

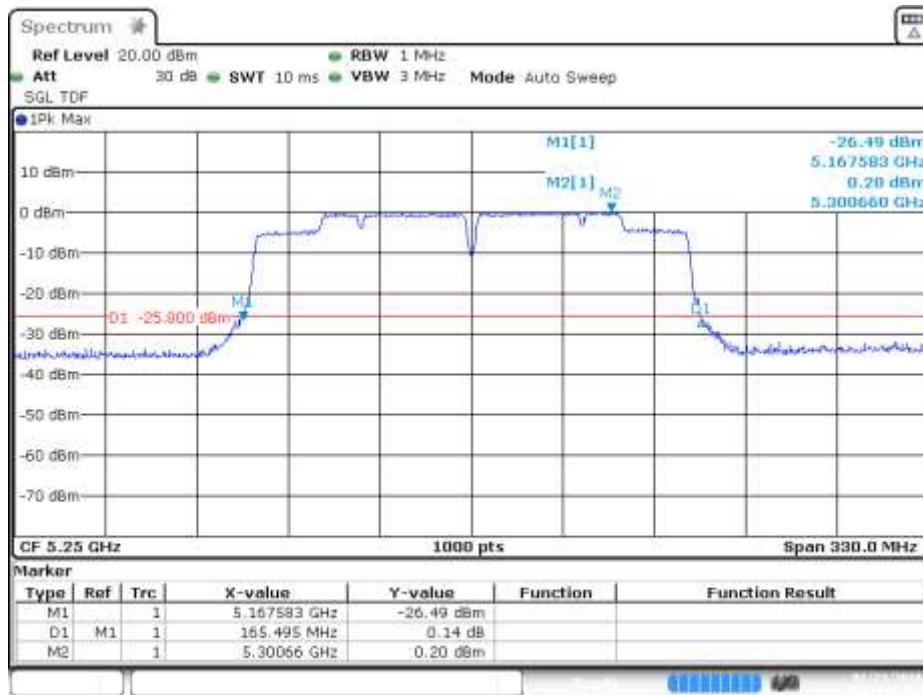


Date: 23.FEB.2018 14:41:45

### B.3.2 99% Bandwidth


## SISO-B, 802.11a, 6Mbps

Channel 48

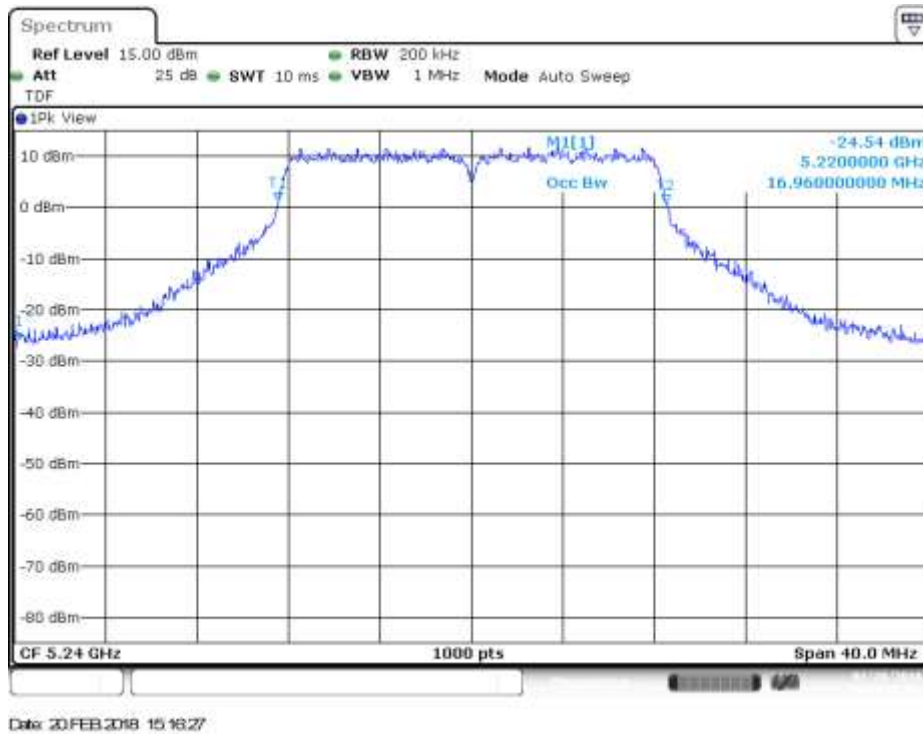


## SISO-B, 802.11n20, HT0

Channel 40

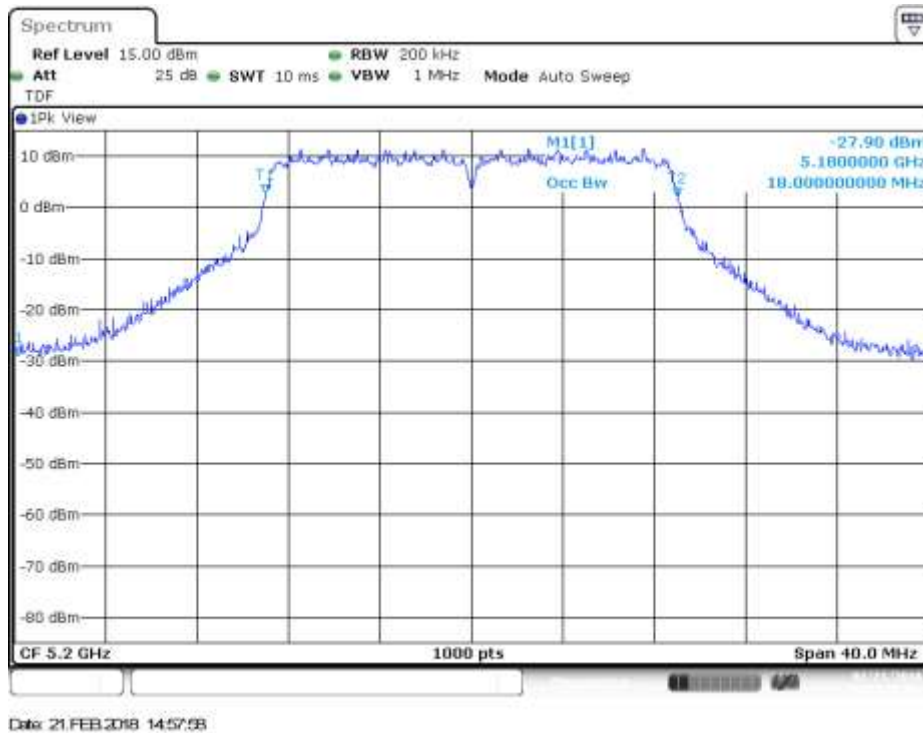


## SISO-B, 802.11n40, HT0

Channel 46F

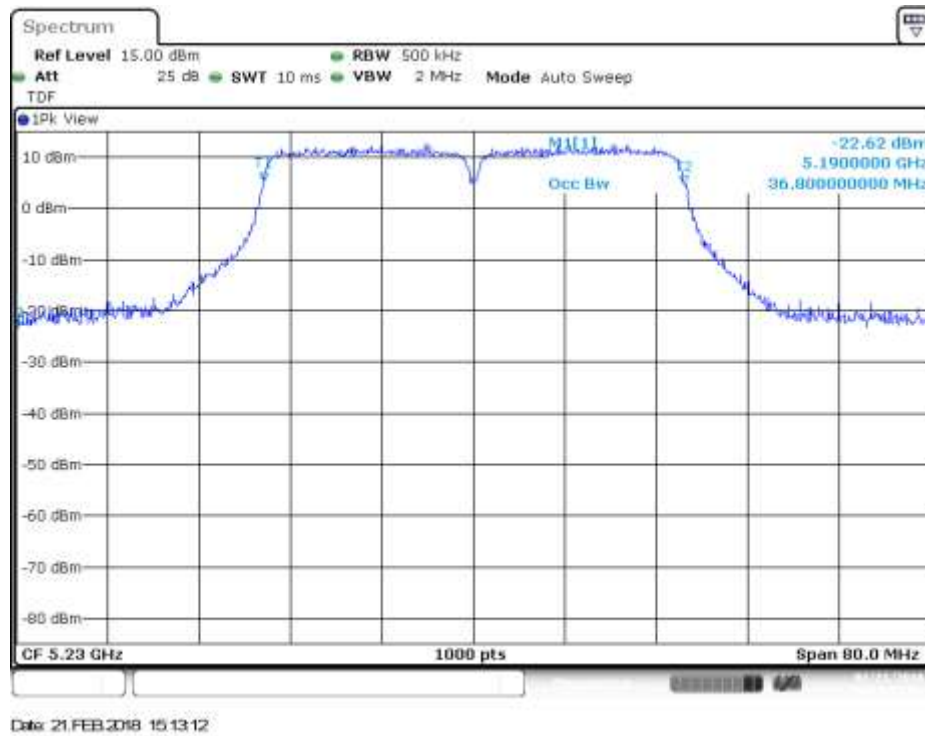


## MIMO-A, 802.11n20, HT8

Channel 48

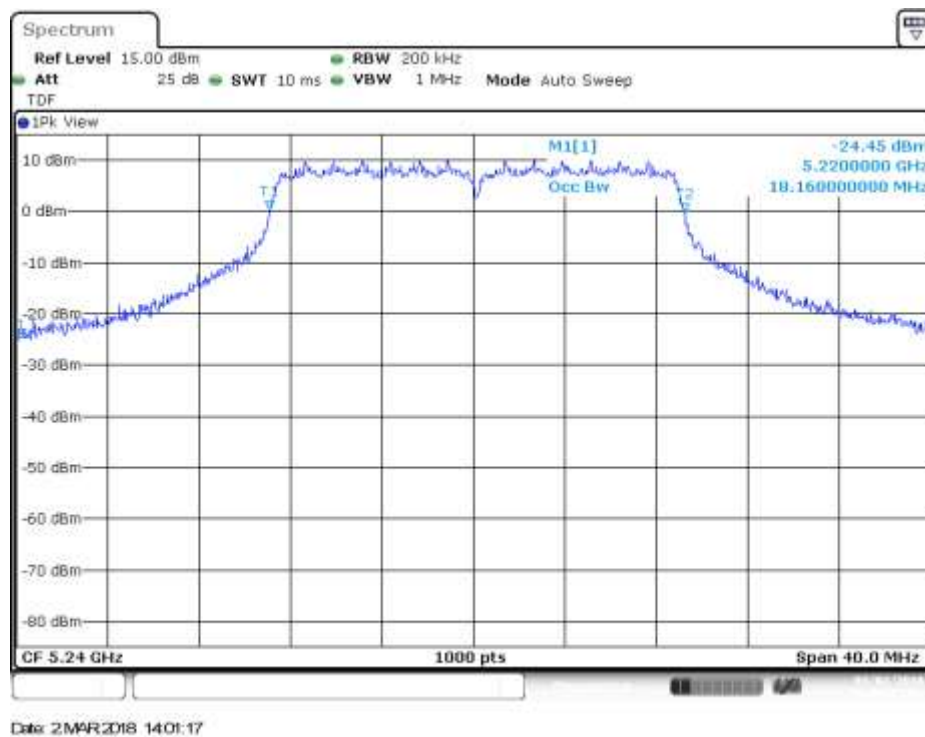


## MIMO-A, 802.11n40, HT8

Channel 38F

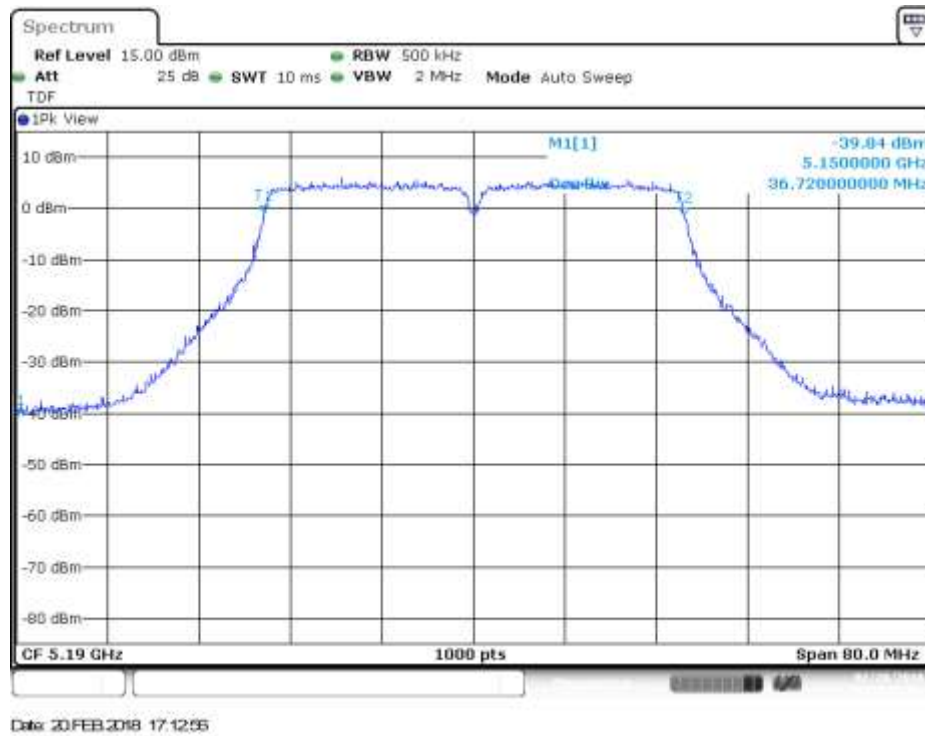

## SISO-B, 802.11ac80, VHT0

Channel 42ac80

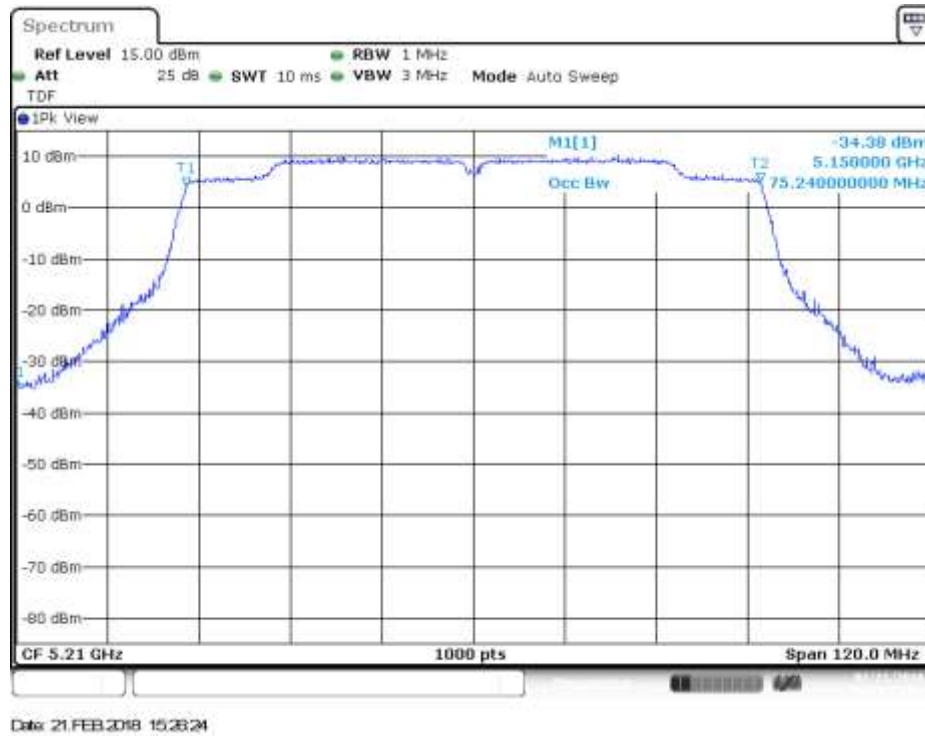






## MIMO-B, 802.11ac160, VHT0

Channel 50ac160

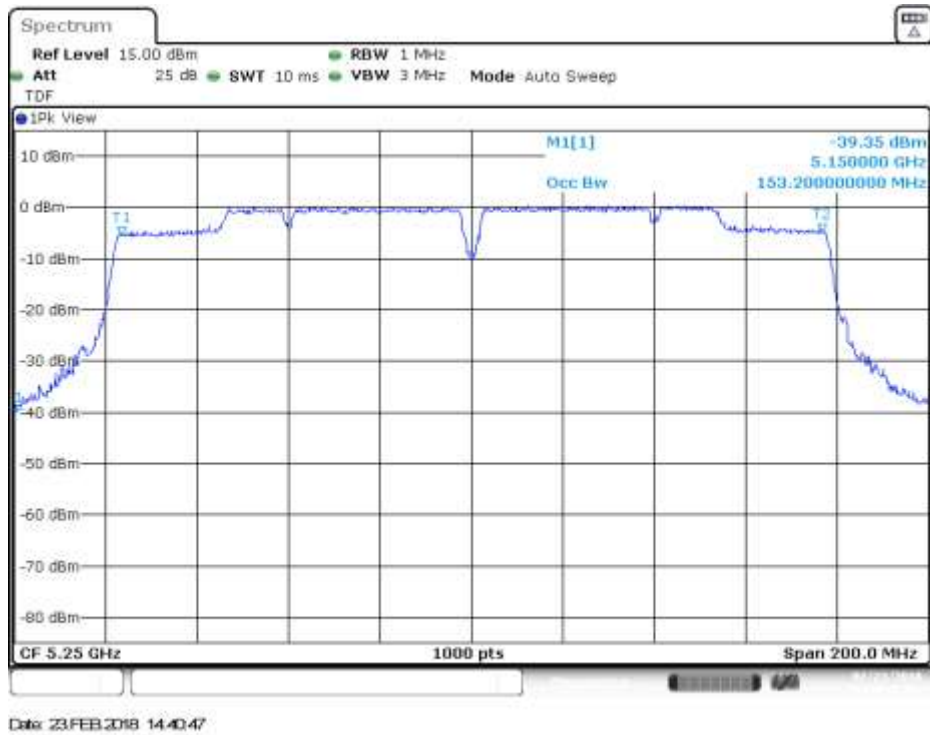




**B.3.3 Power Limits. Maximum Output power & Peak power spectral density**


**SISO-B, 802.11a, 6Mbps**

Channel 36

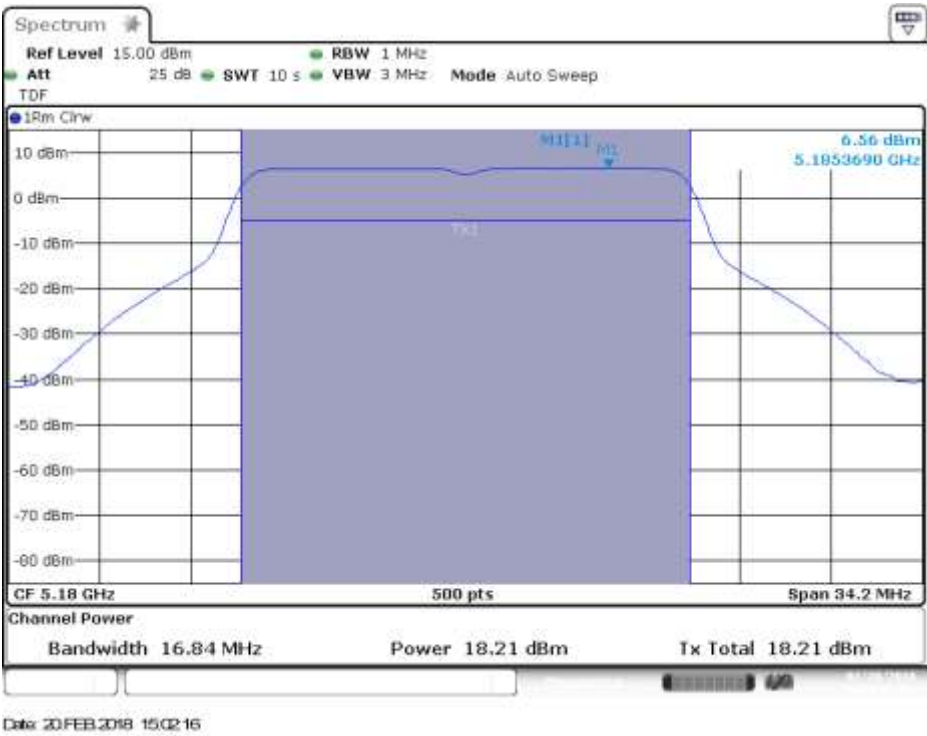


**SISO-A, 802.11a, 6Mbps**

Channel 48

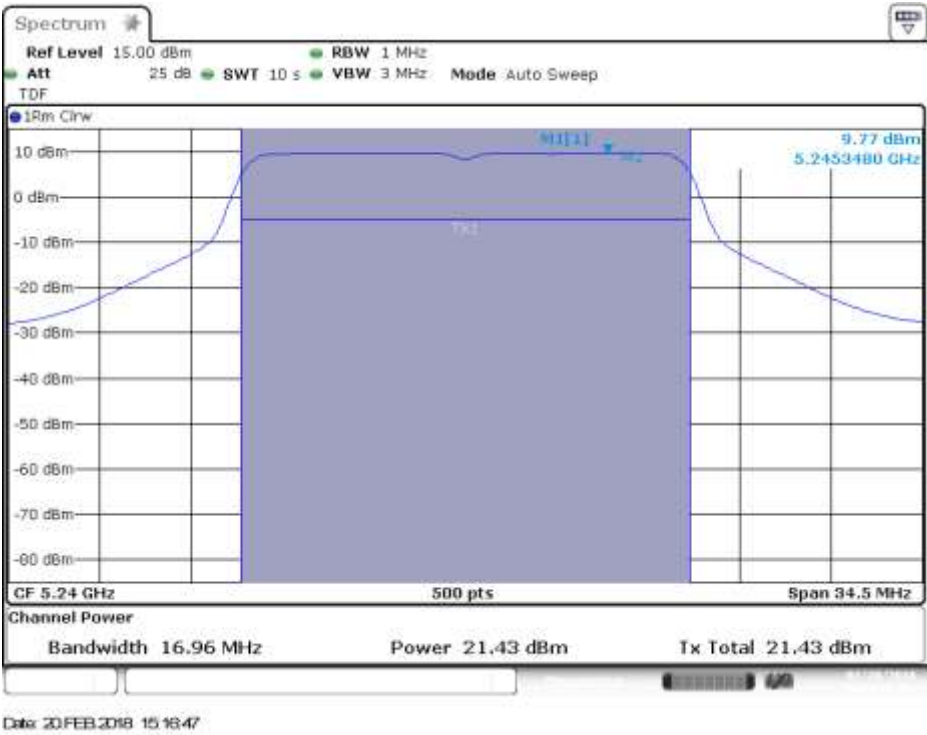


## SISO-A, 802.11n20, HT0

Channel 36

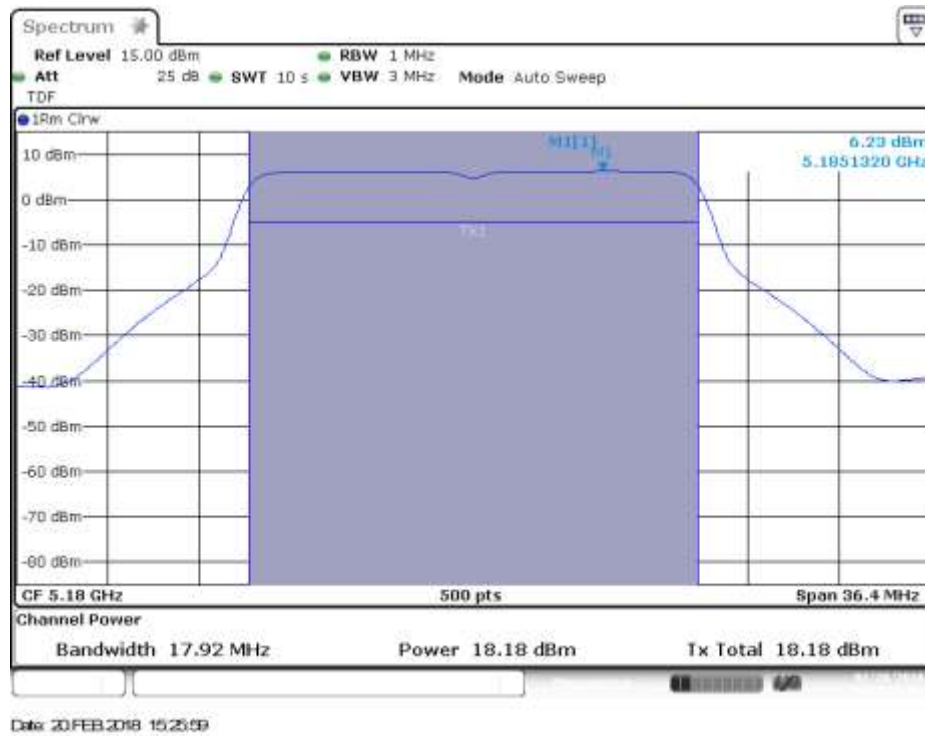


## SISO-B, 802.11n20, HT0

Channel 48

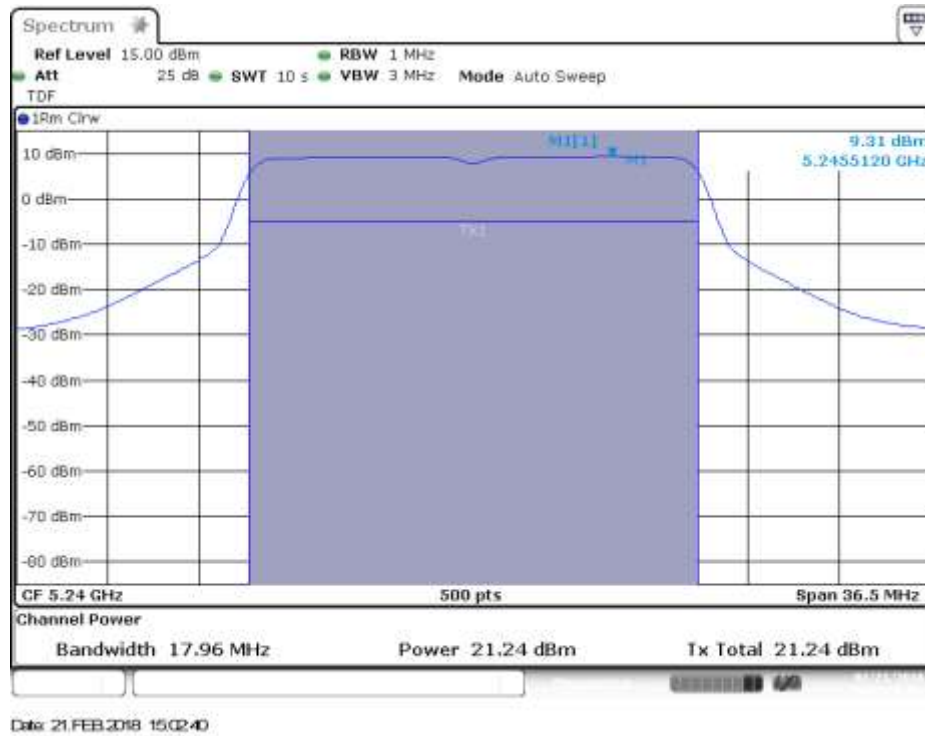


## SISO-B, 802.11n40, HT0

Channel 38F

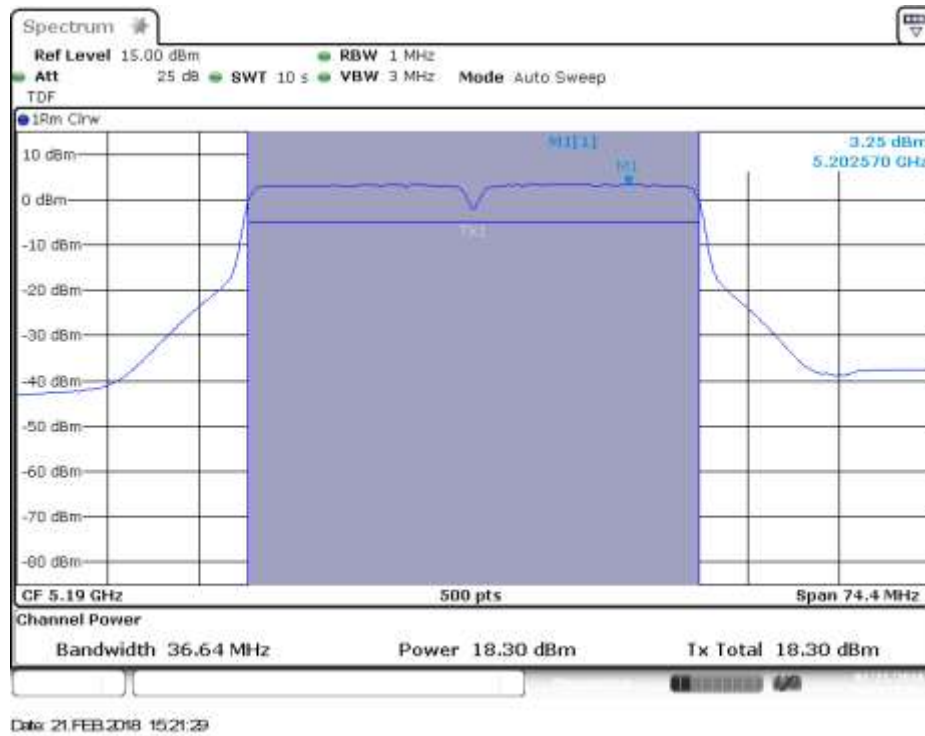


## SISO-B, 802.11n40, HT0

Channel 46F

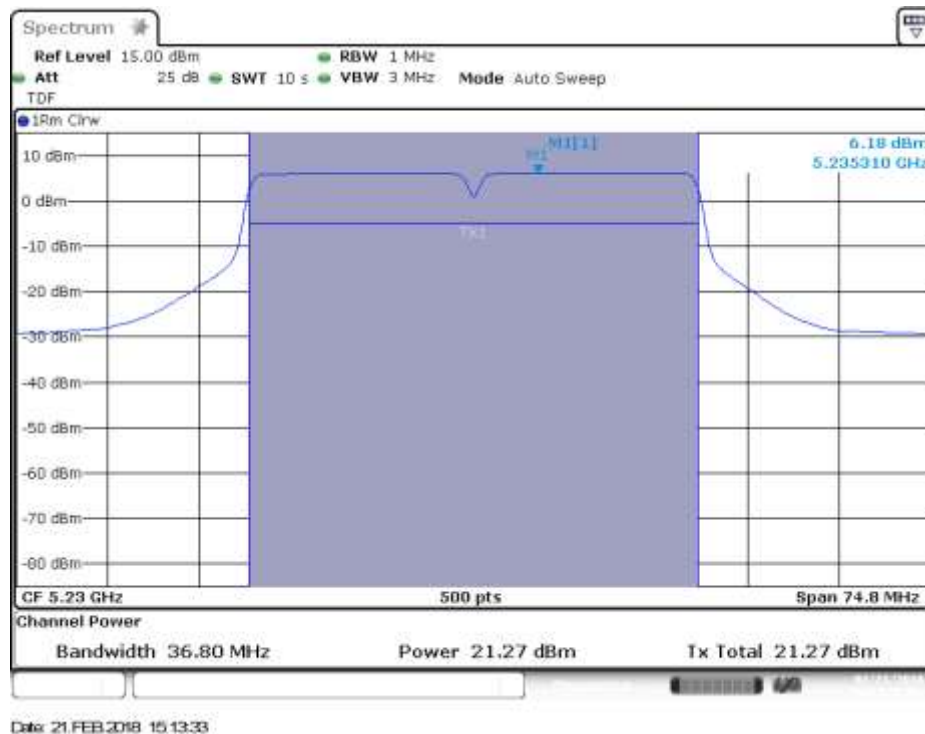


## MIMO-A, 802.11n20, HT8

Channel 36

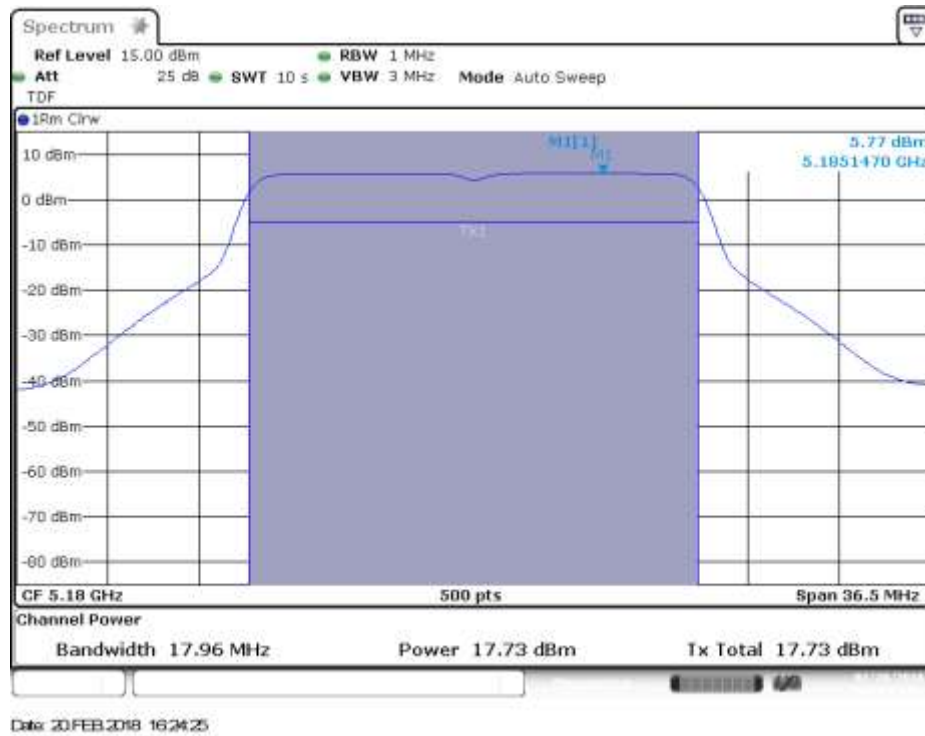


## MIMO-B, 802.11n20, HT8

Channel 36

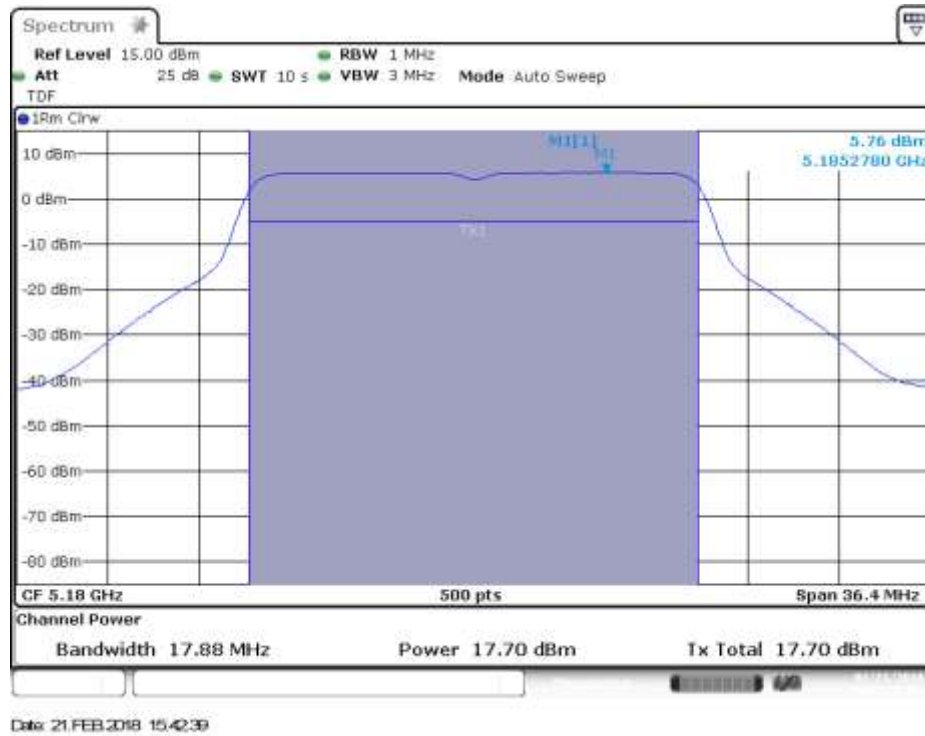


## MIMO-A, 802.11n20, HT8

Channel 40

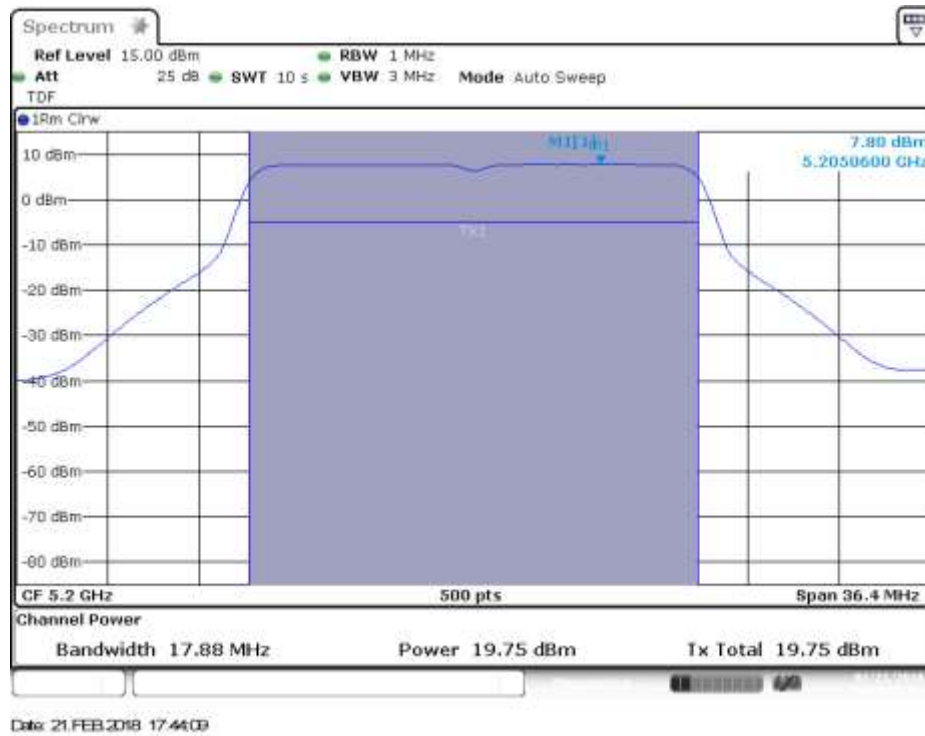


## MIMO-B, 802.11n20, HT8

Channel 40

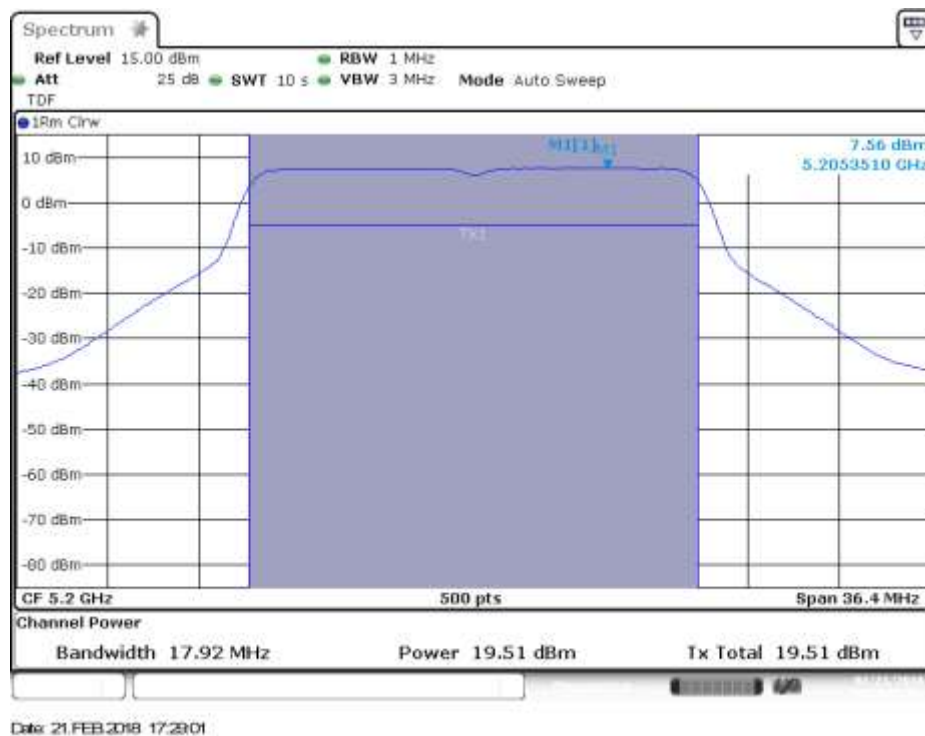


## MIMO-A, 802.11n40, HT8

Channel 38F

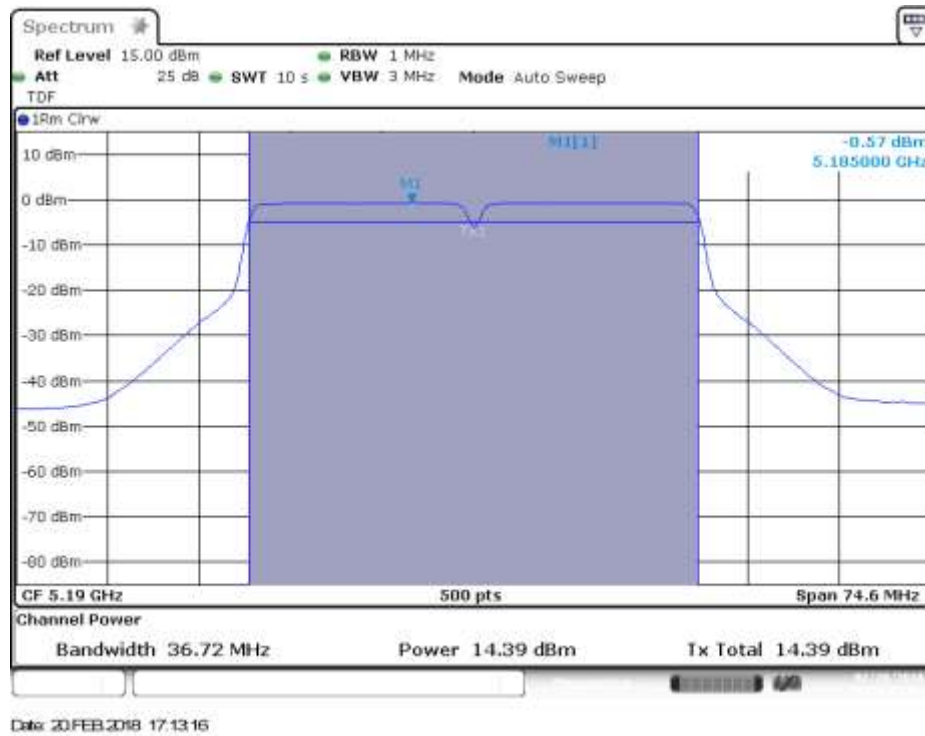


## MIMO-B, 802.11n40, HT8

Channel 38F

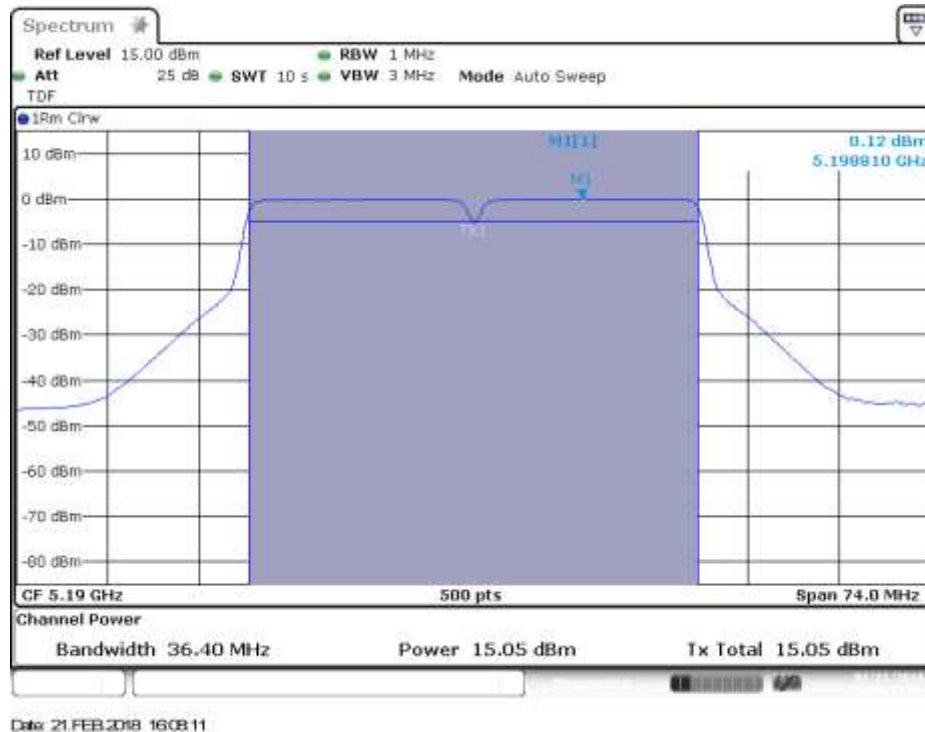


## MIMO-A, 802.11n40, HT8

Channel 46F

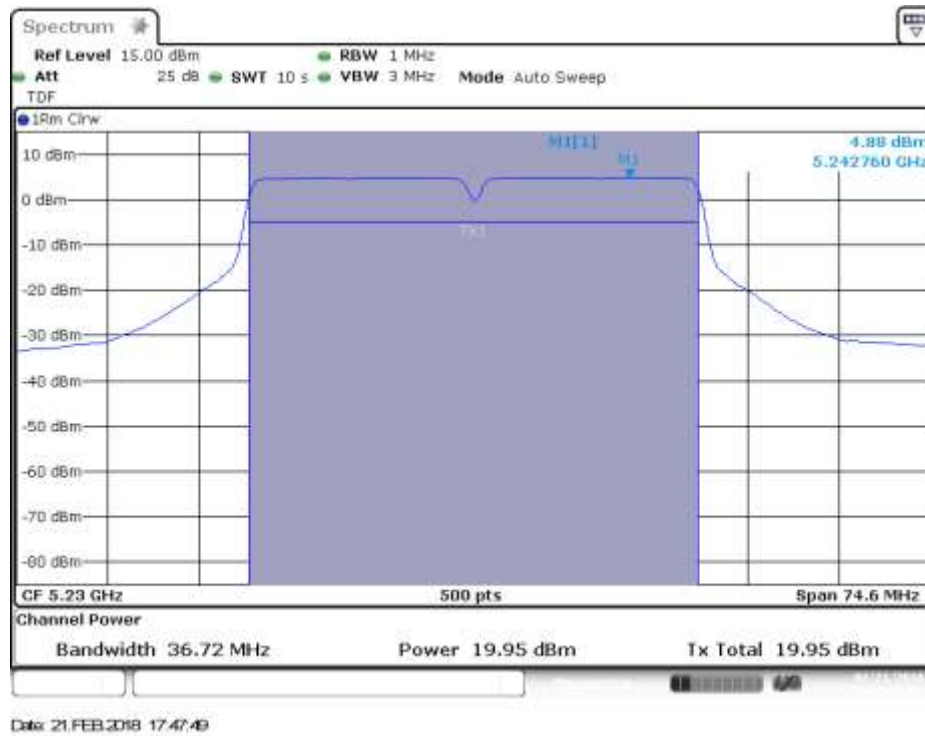

## MIMO-B, 802.11n40, HT8


Channel 46F

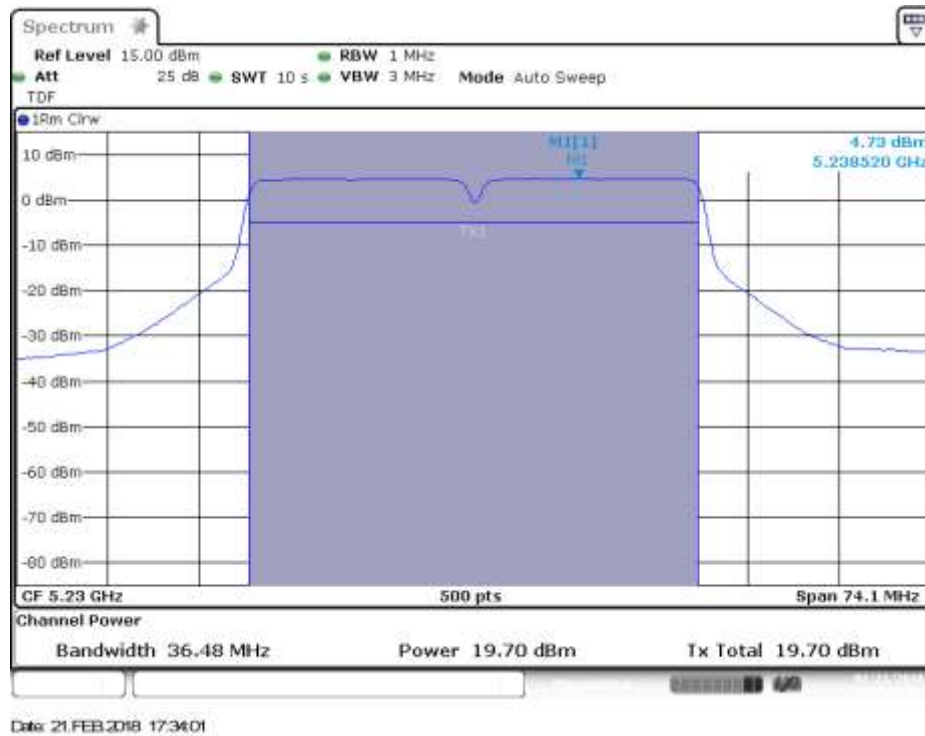




## SISO-A, 802.11ac80, VHT0

Channel 42ac80

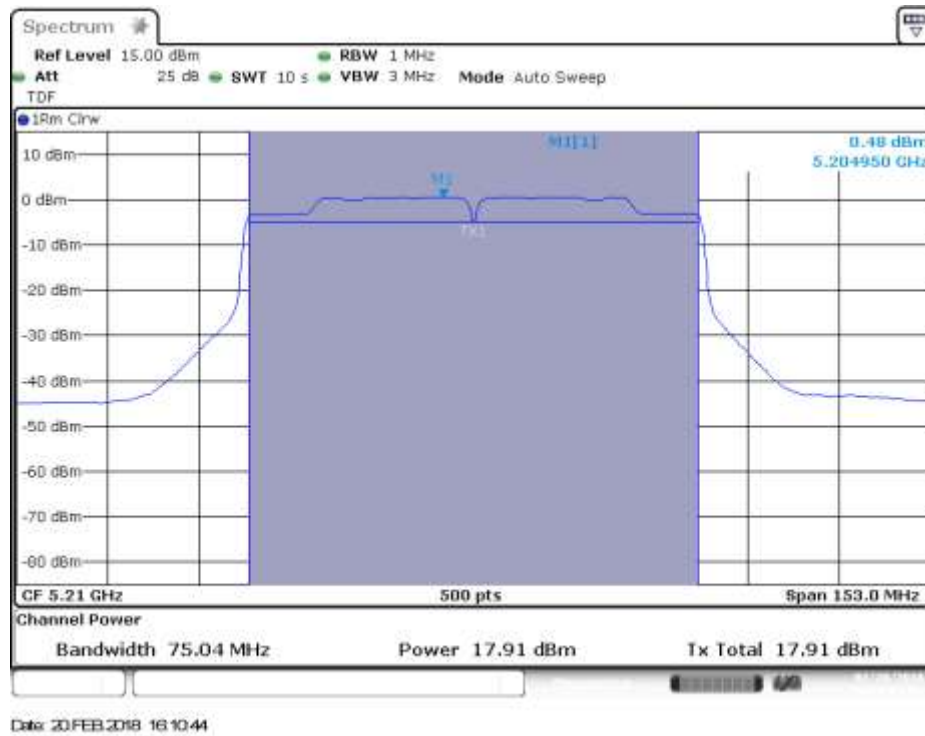

## SISO-B, 802.11ac80, VHT0


Channel 42ac80

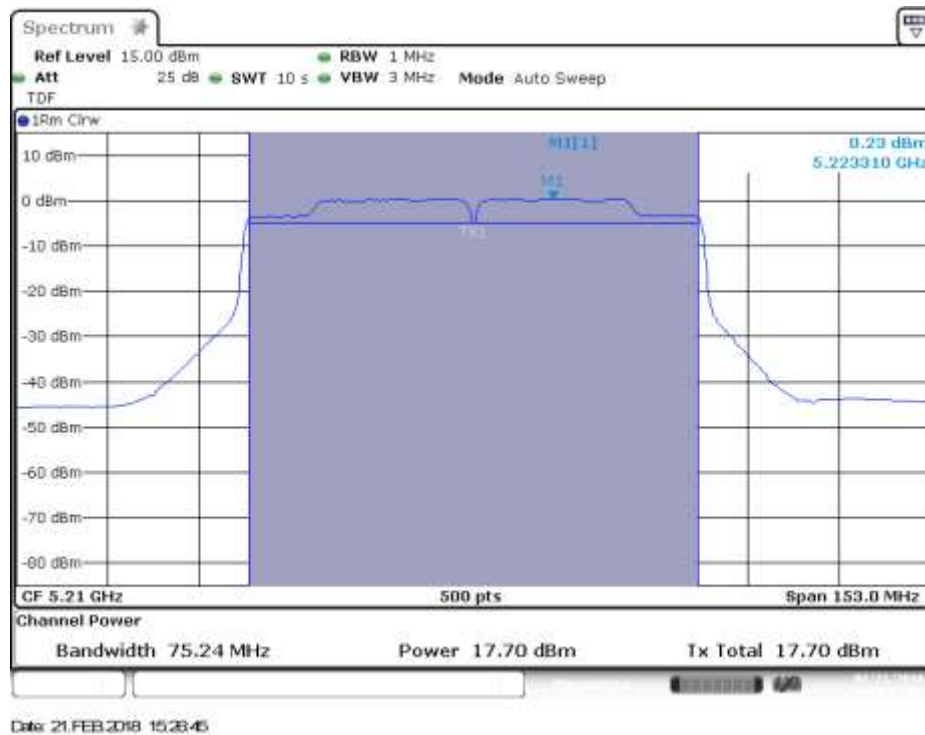




## MIMO-A, 802.11ac80, VHT0

Channel 42ac80

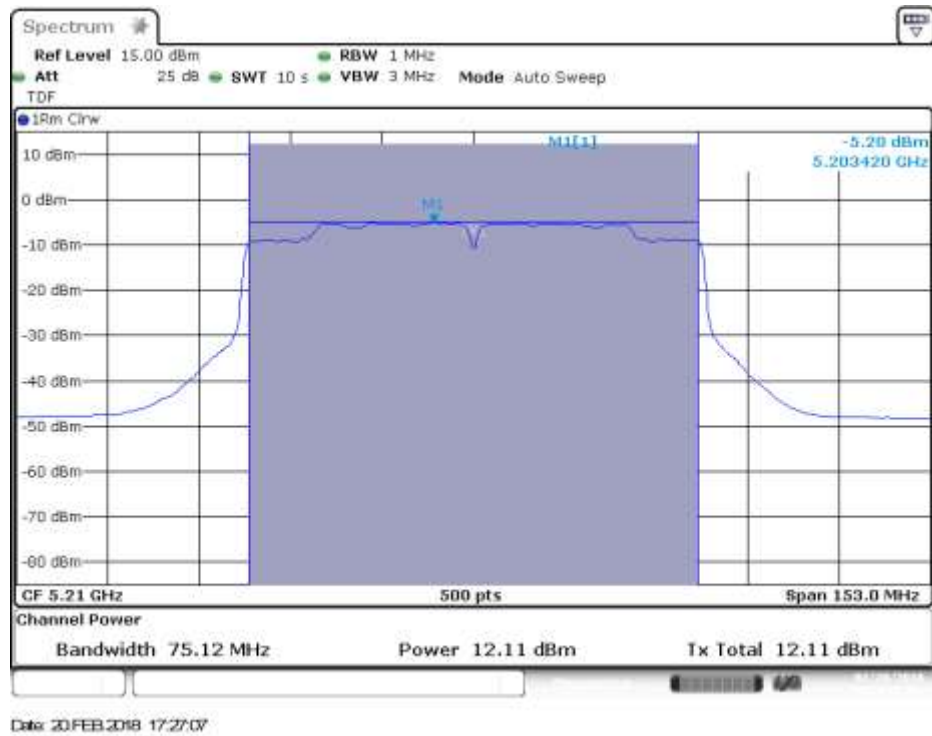


## MIMO-B, 802.11ac80, VHT0

Channel 42ac80

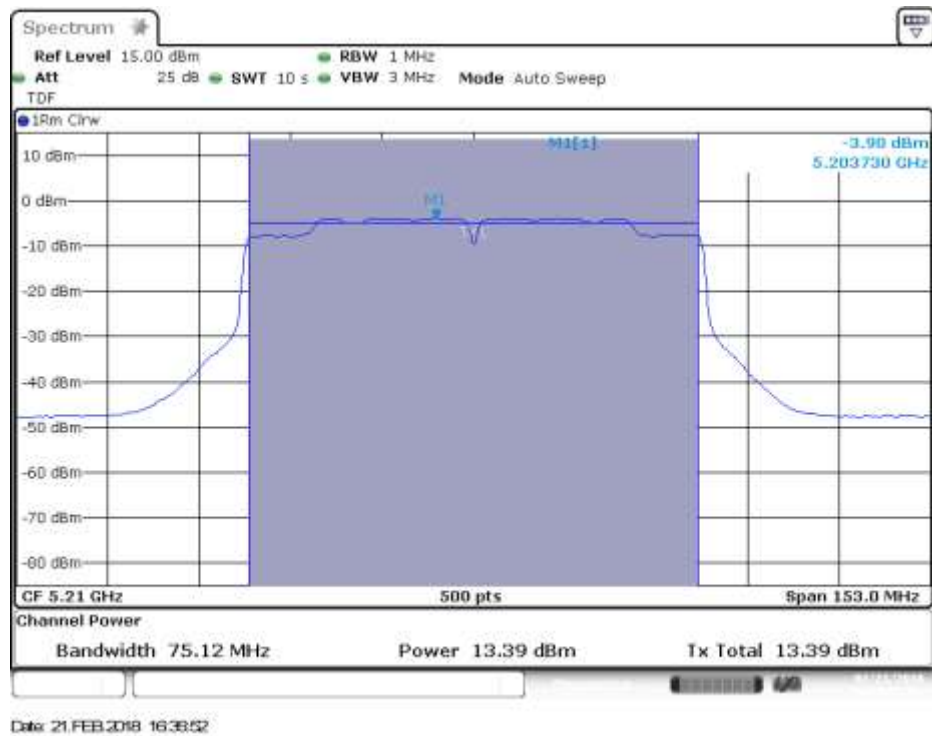


# SISO-A, 802.11ac160, VHT0

Channel 50ac160

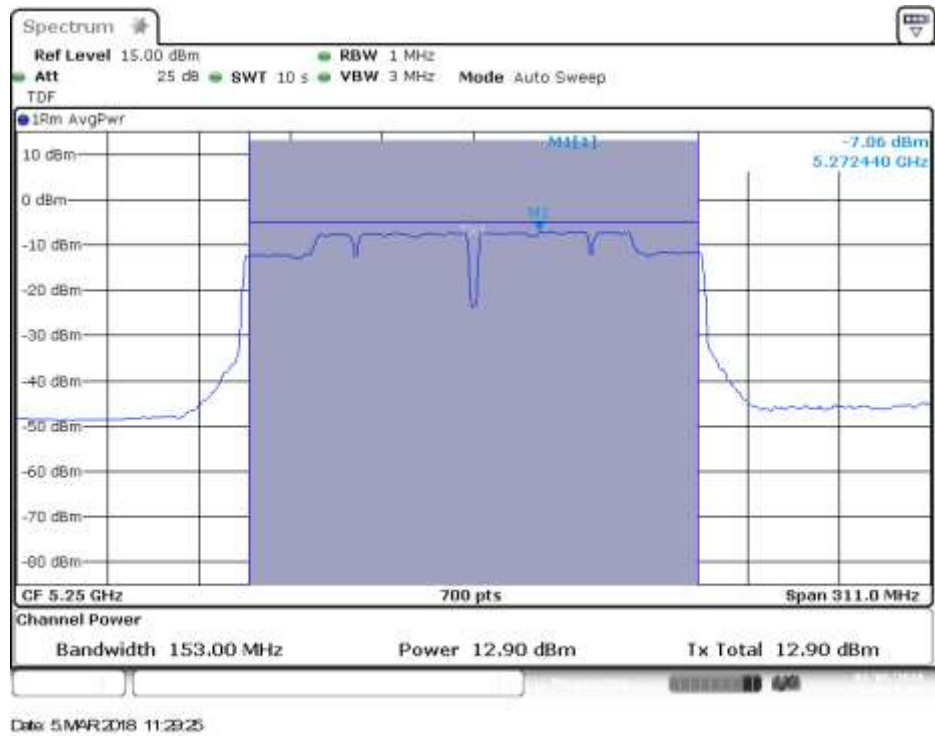


# SISO-B, 802.11ac160, VHT0

Channel 50ac160

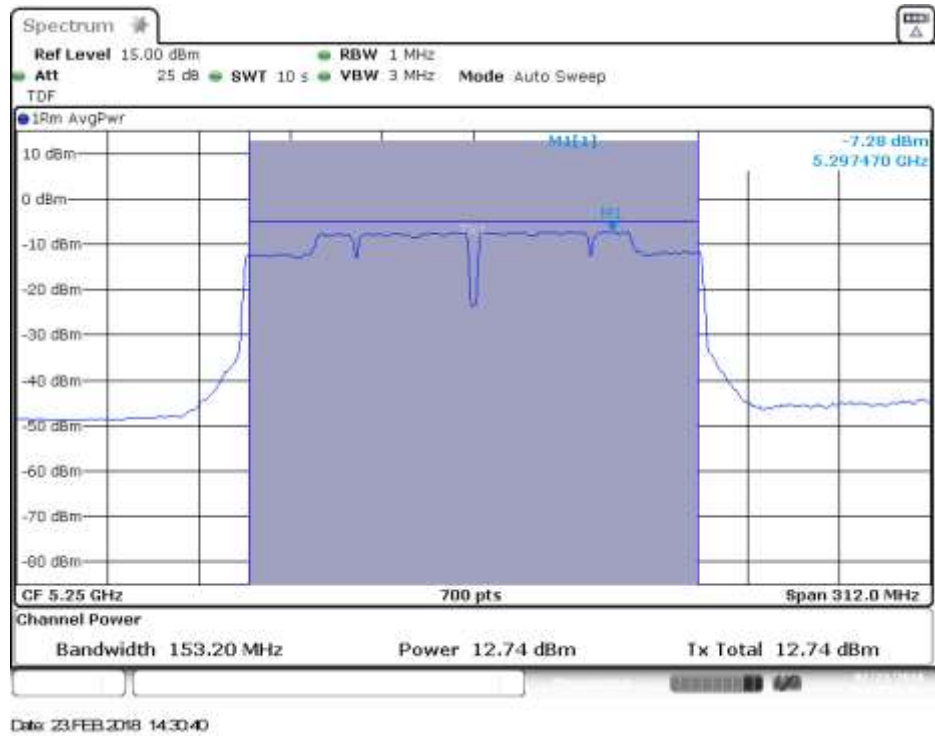


## MIMO-A, 802.11ac160, VHT0

Channel 50ac160

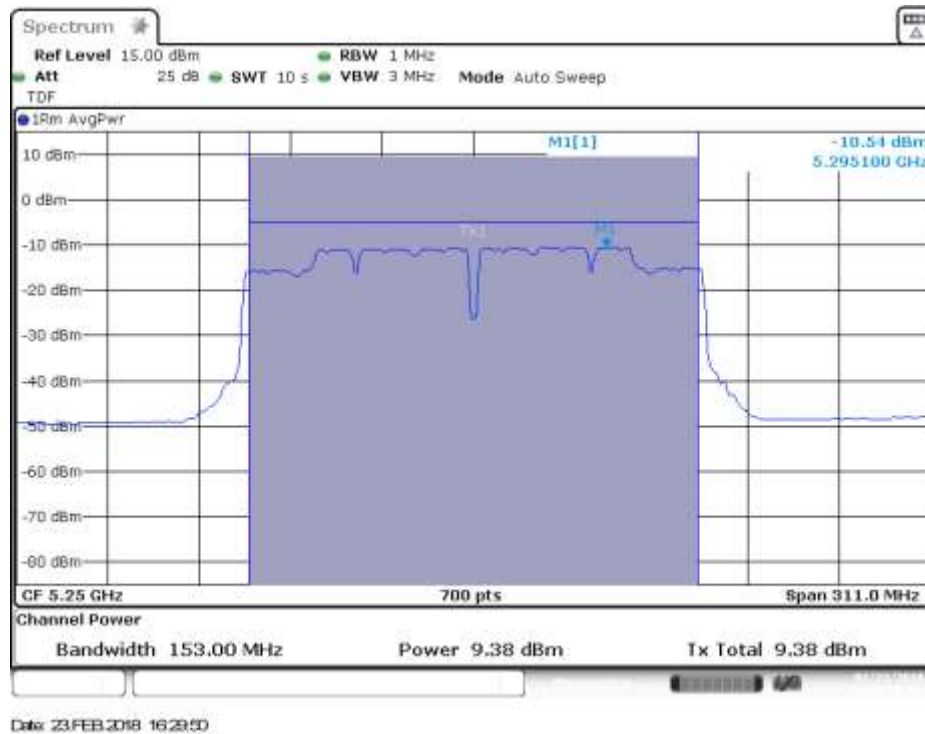

## MIMO-B, 802.11ac160, VHT0


Channel 50ac160

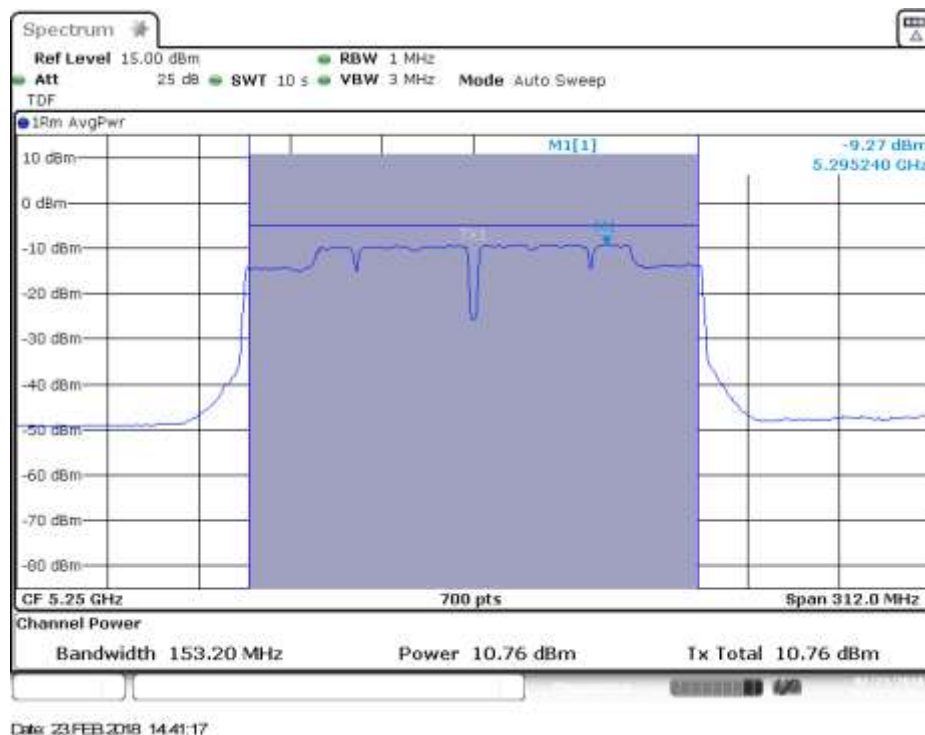


### B.3.4 Undesirable emission limits : Band Edge (Conducted)

#### 802.11a, 6Mbps – Chain A

##### BE Low Freq Section , Peak, RMS – CH36

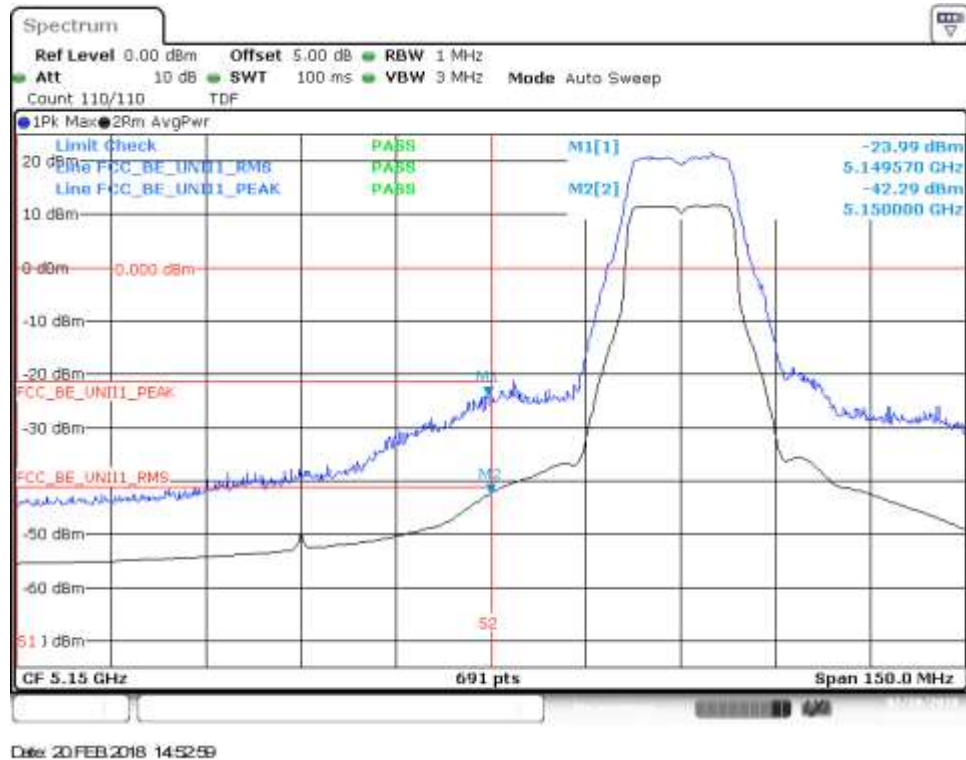




## 802.11a, 6Mbps – Chain B

### BE Low Freq Section , Peak, RMS – CH36




## BE Low Freq Section, Peak – CH40

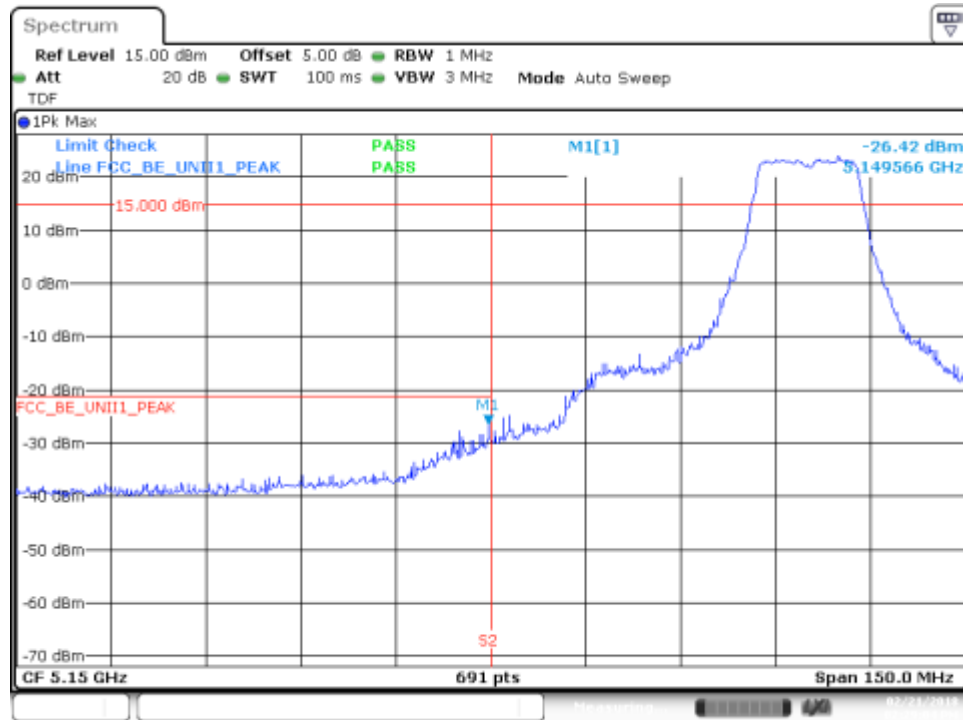

Date: 21.FEB.2018 14:29:05

## BE Low Freq Section, RMS – CH40

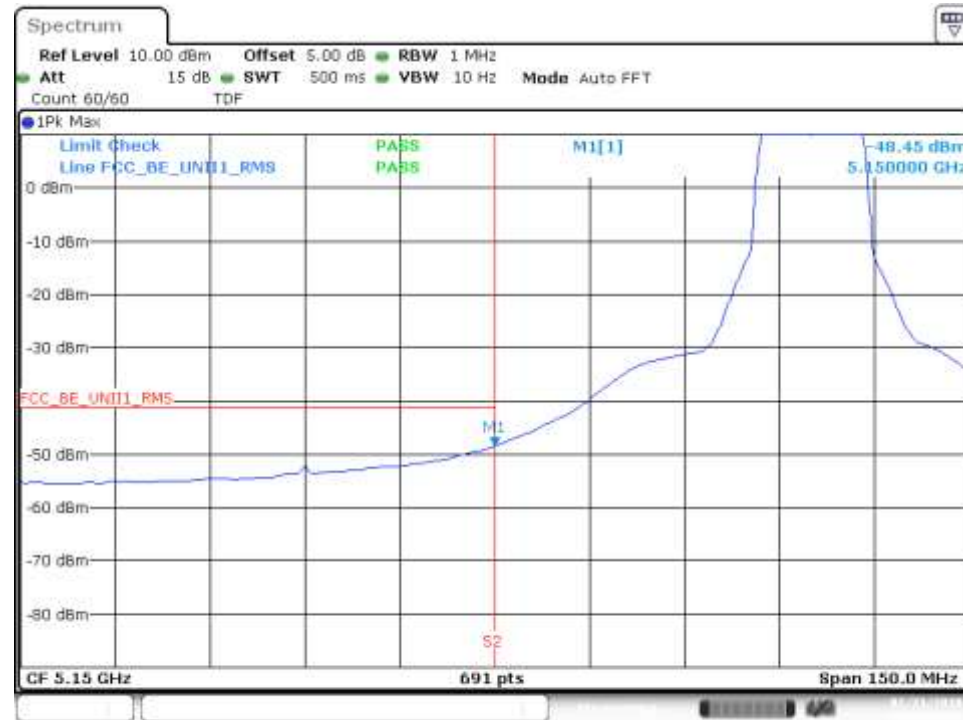

Date: 21.FEB.2018 14:28:51


## 802.11n20, HT0 (SISO) – Chain A

### BE Low Freq Section, Peak, RMS – CH36





## BE Low Freq Section, Peak – CH40

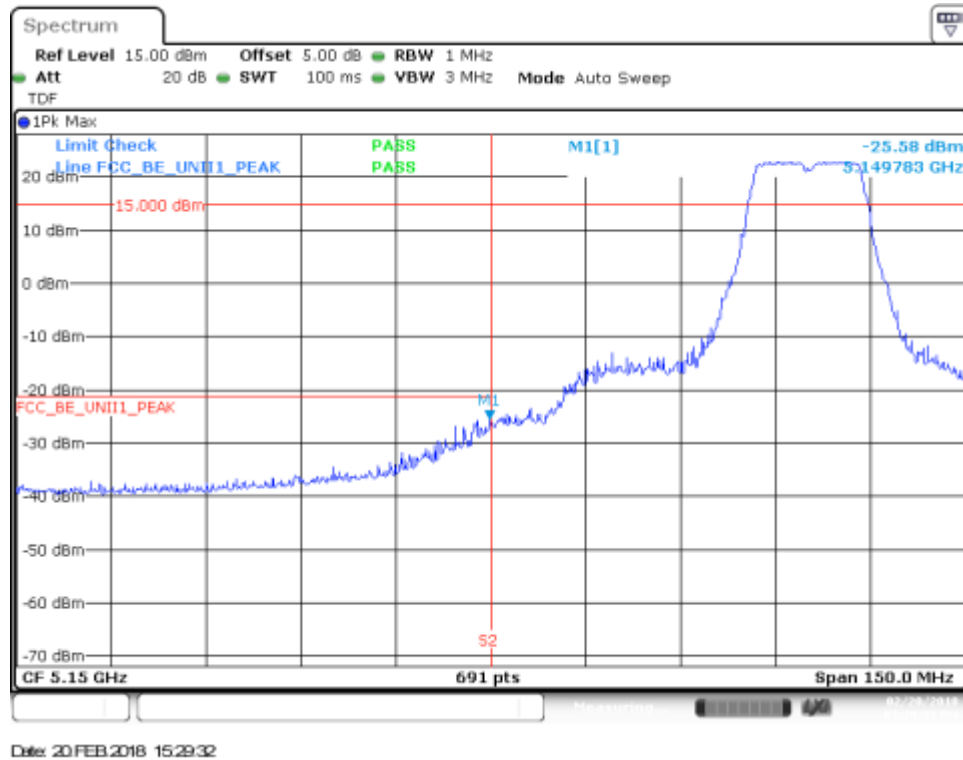


## BE Low Freq Section, RMS – CH40




## 802.11n20, HT0 (SISO) – Chain B

### BE Low Freq Section, Peak, RMS – CH36

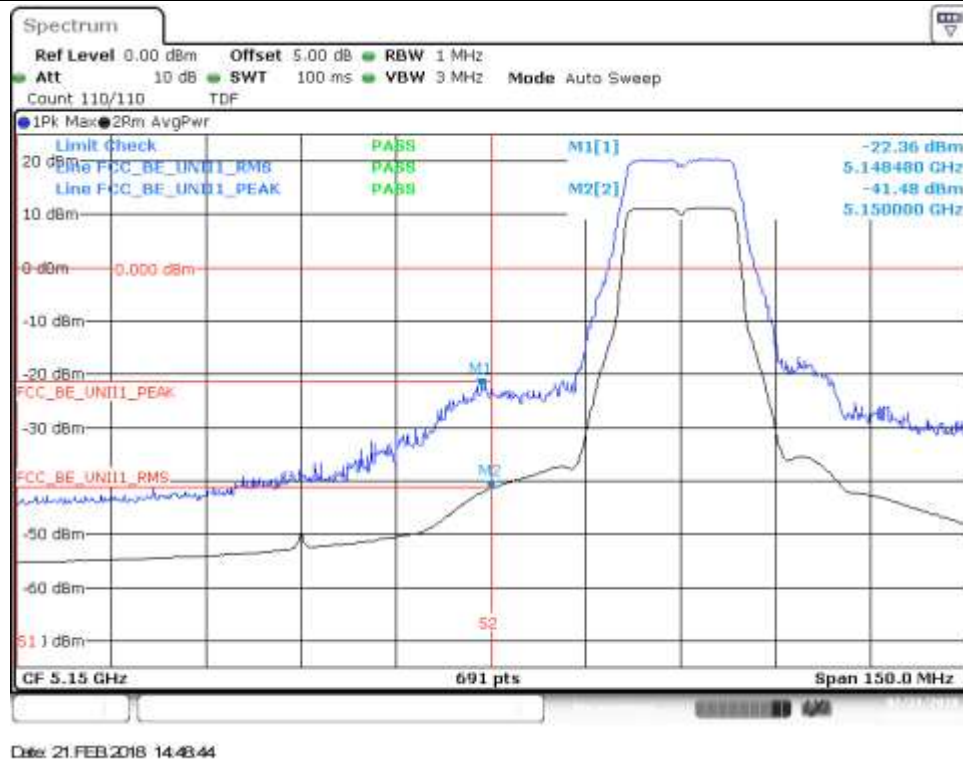


## BE Low Freq Section, Peak – CH40

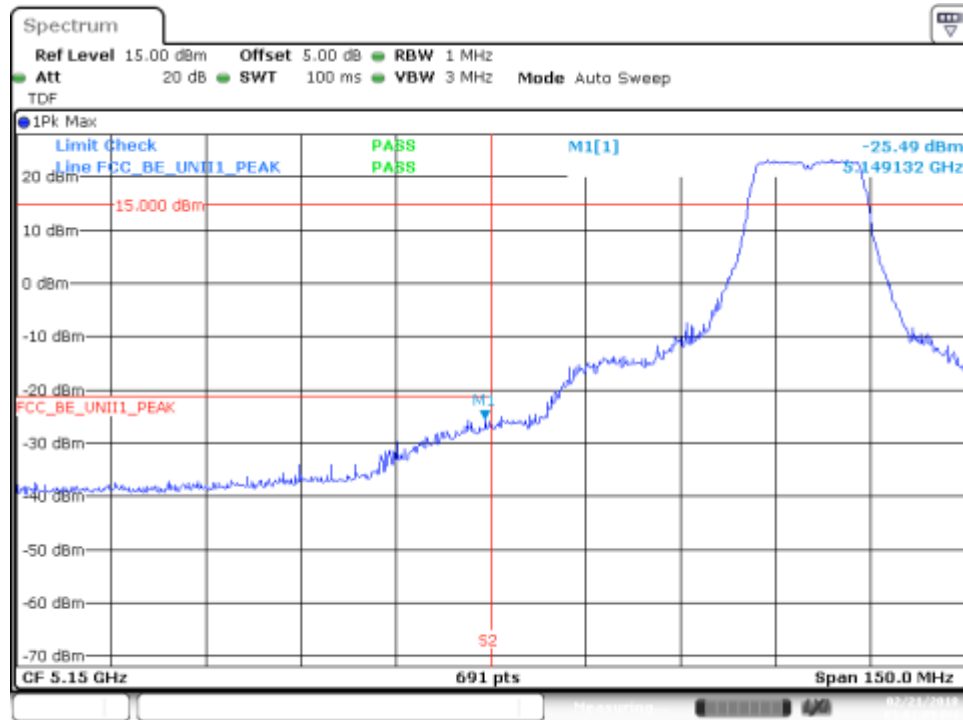

Date: 21.FEB.2018 15:01:10


## BE Low Freq Section, RMS – CH40

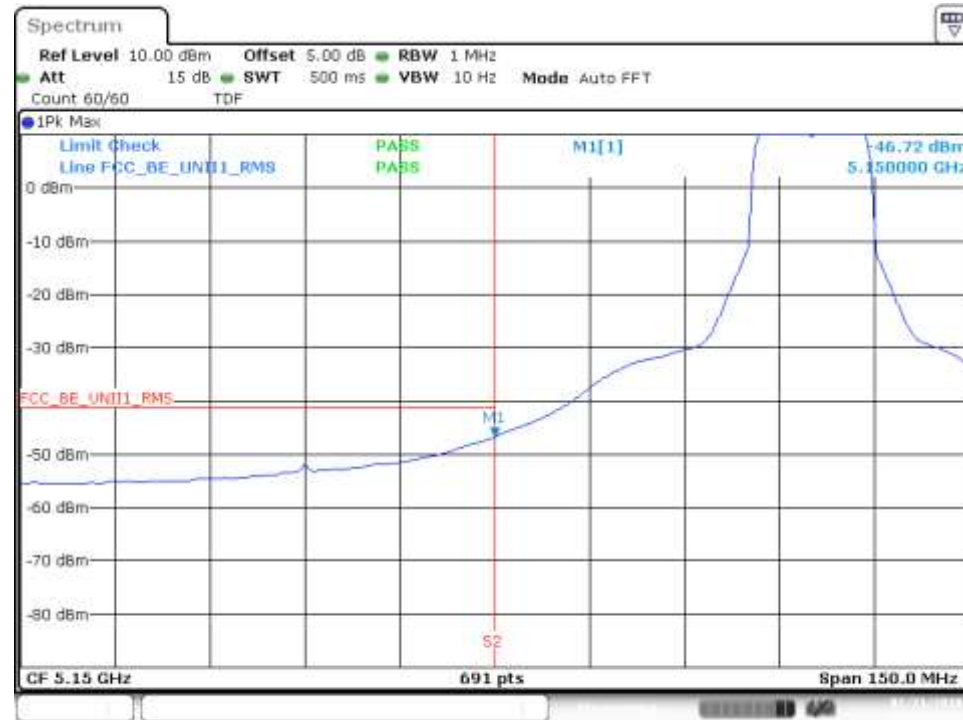


Date: 21.FEB.2018 15:00:36

## 802.11n20, HT8 (MIMO) – Chain A


### BE Low Freq Section, Peak – CH36

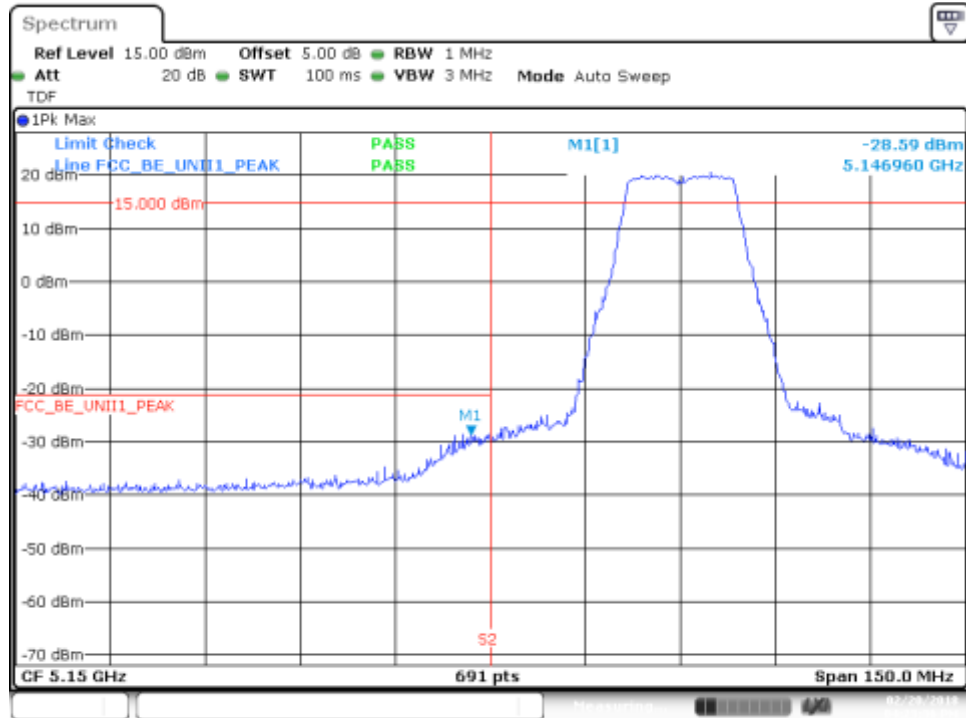

### BE Low Freq Section, RMS – CH36

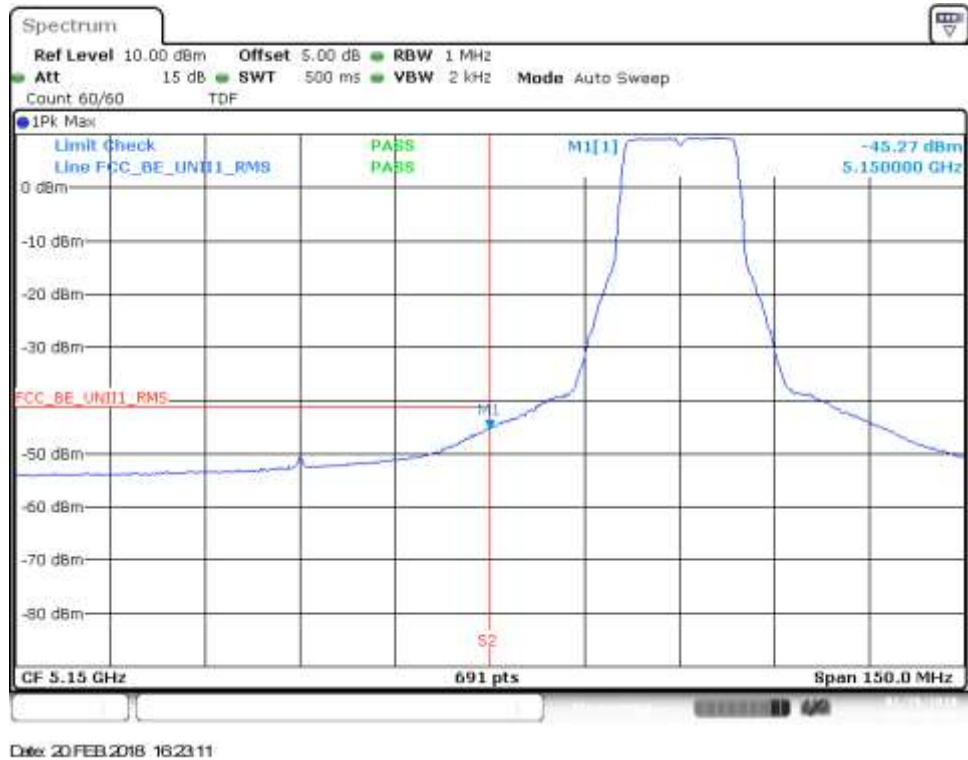

### BE Low Freq Section, Peak – CH40

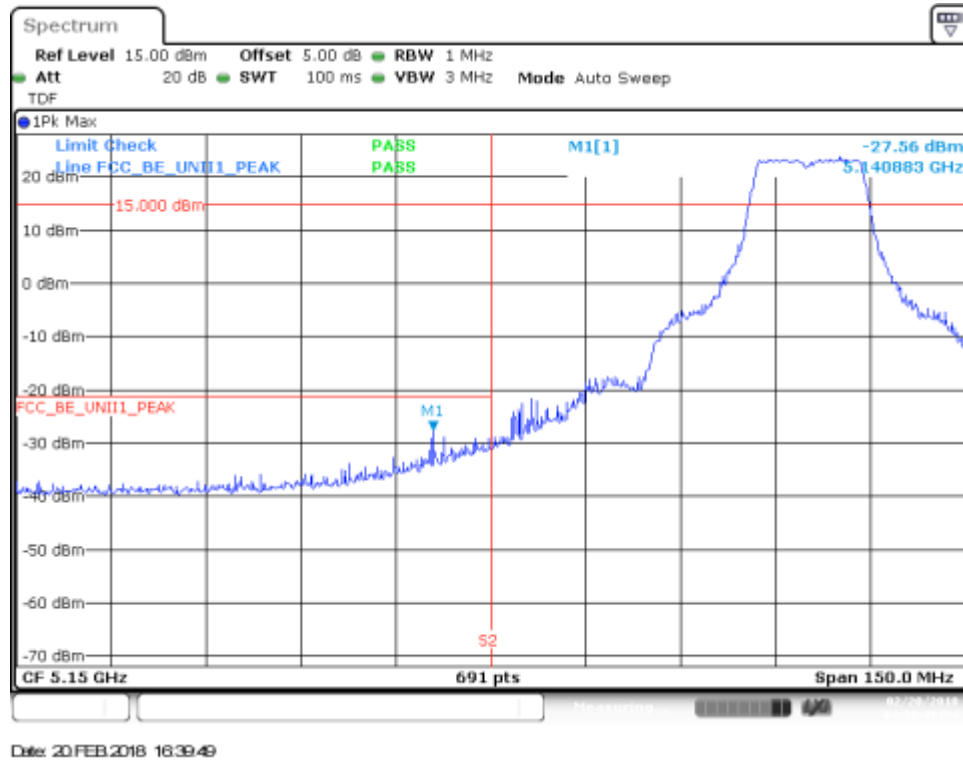


### BE Low Freq Section, RMS – CH40




## 802.11n20, HT8 (MIMO) – Chain B

### BE Low Freq Section, Peak – CH36

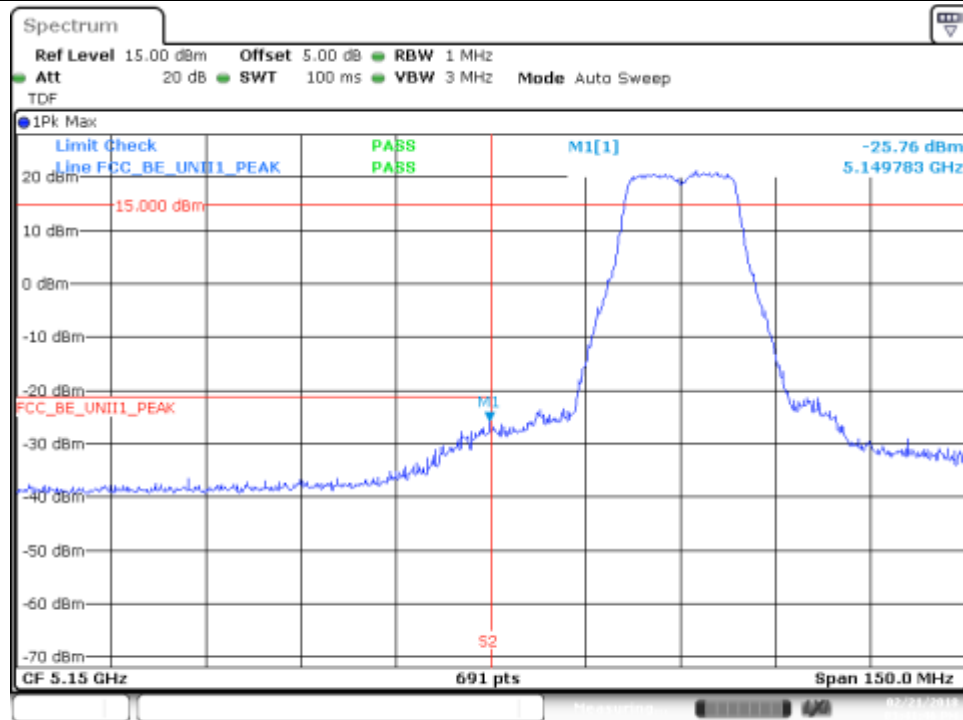


Date: 21.FEB.2018 15:41:46

### BE Low Freq Section, RMS – CH36

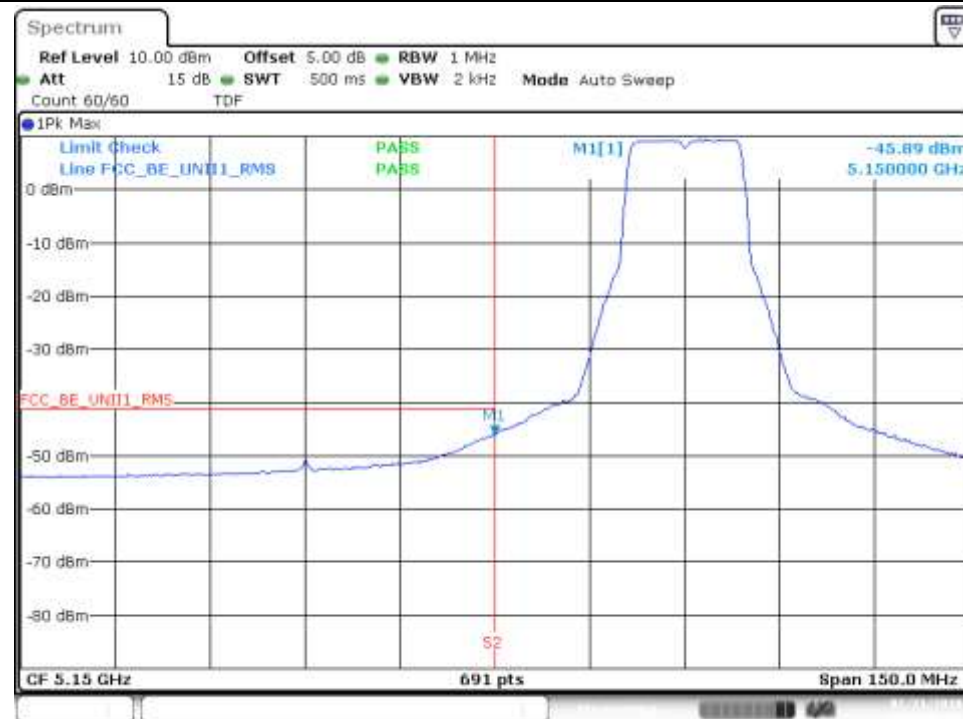


Date: 21.FEB.2018 15:40:56

## BE Low Freq Section, Peak – CH40

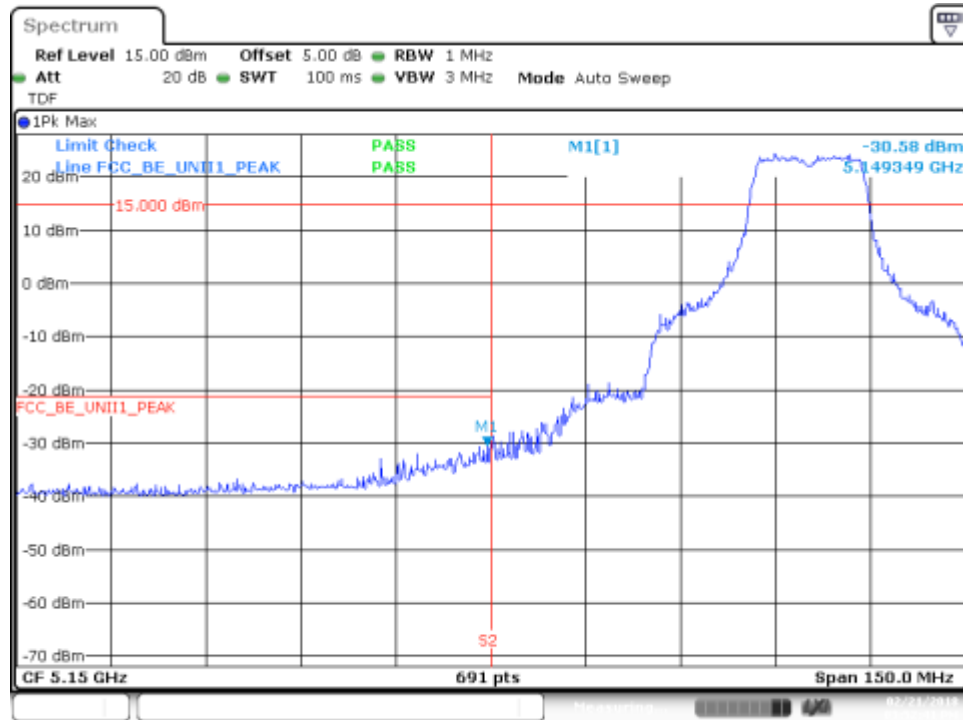


## BE Low Freq Section, RMS – CH40

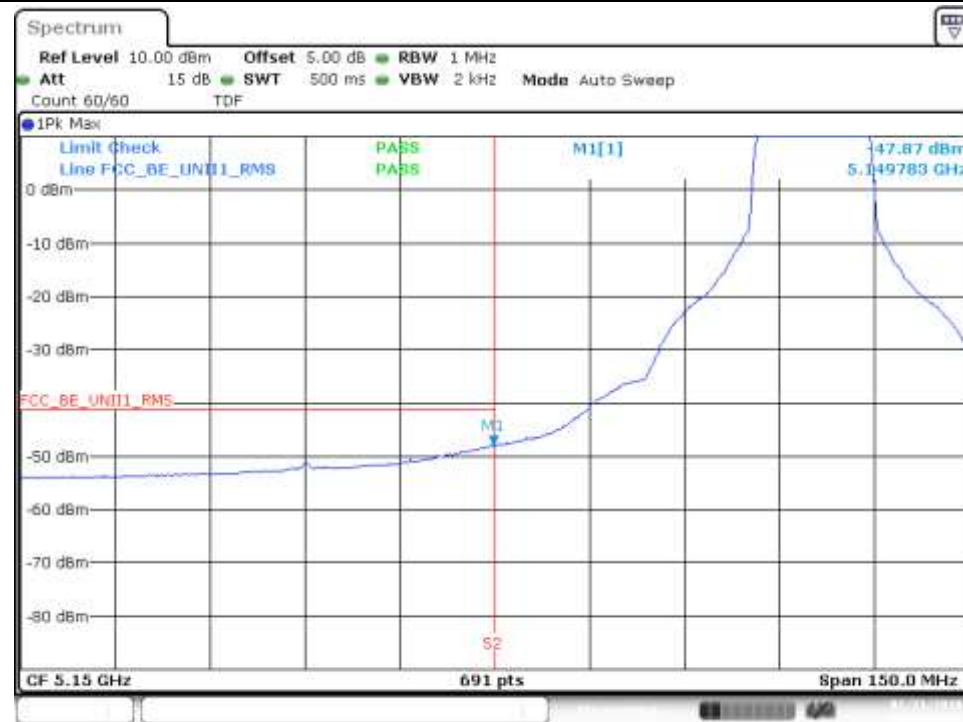

## 802.11n40, HT0 (SISO) – Chain A

### BE Low Freq Section, Peak – CH38F

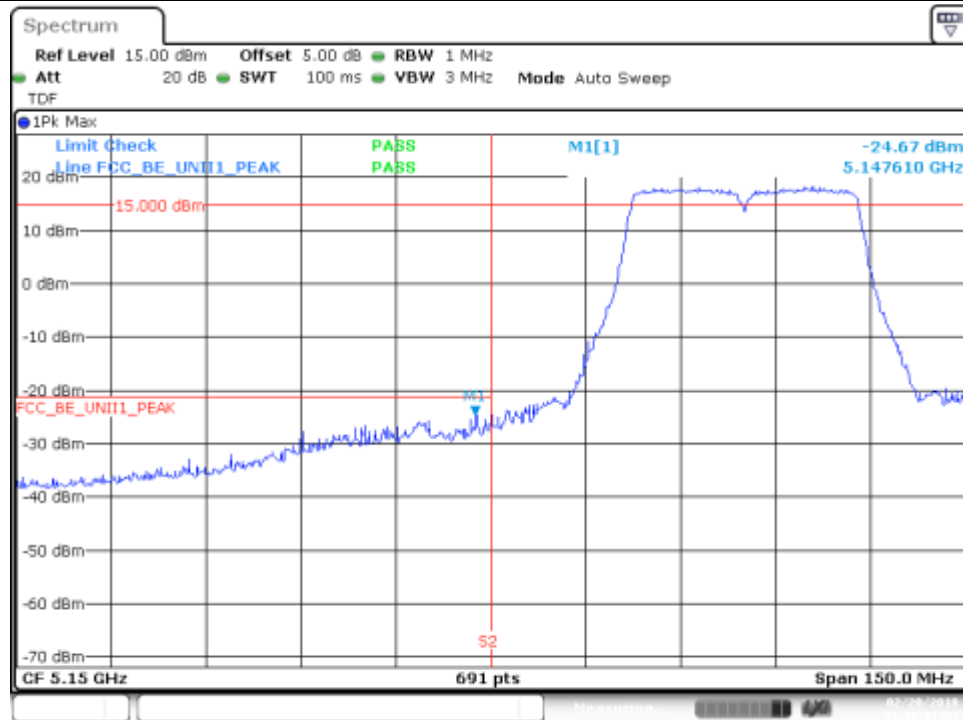

Date: 20 FEB 2018 15:49:45


### BE Low Freq Section, RMS – CH38F



Date: 20 FEB 2018 15:49:24



## BE Low Freq Section, Peak – CH46F

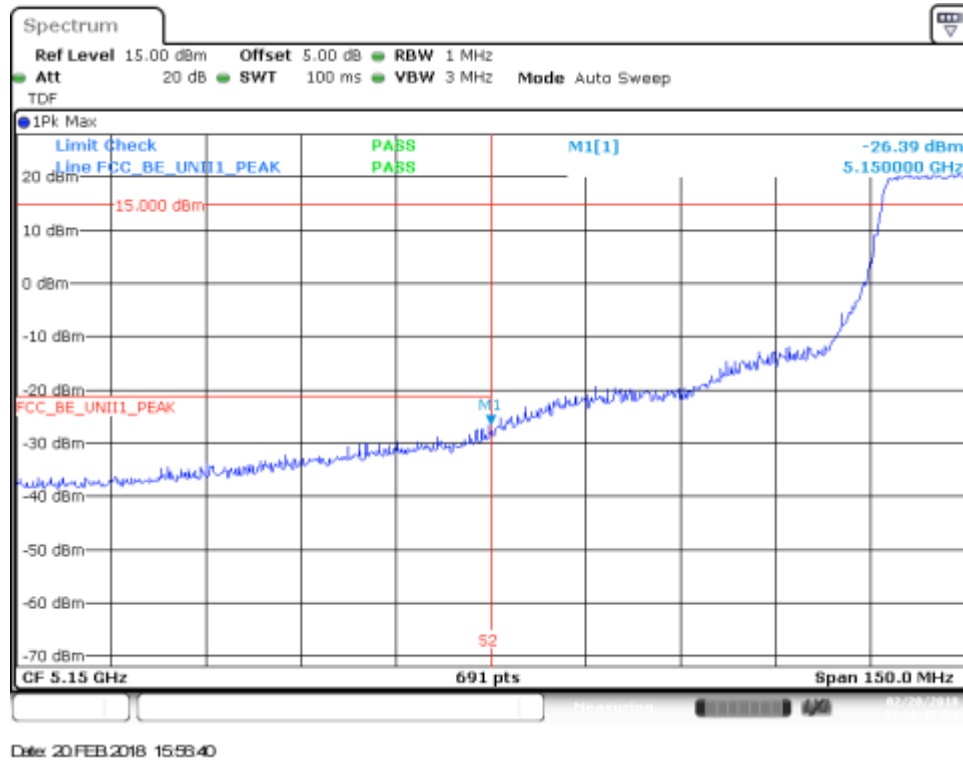


## BE Low Freq Section, RMS – CH46F




## 802.11n40, HT0 (SISO) – Chain B


### BE Low Freq Section, Peak – CH38F

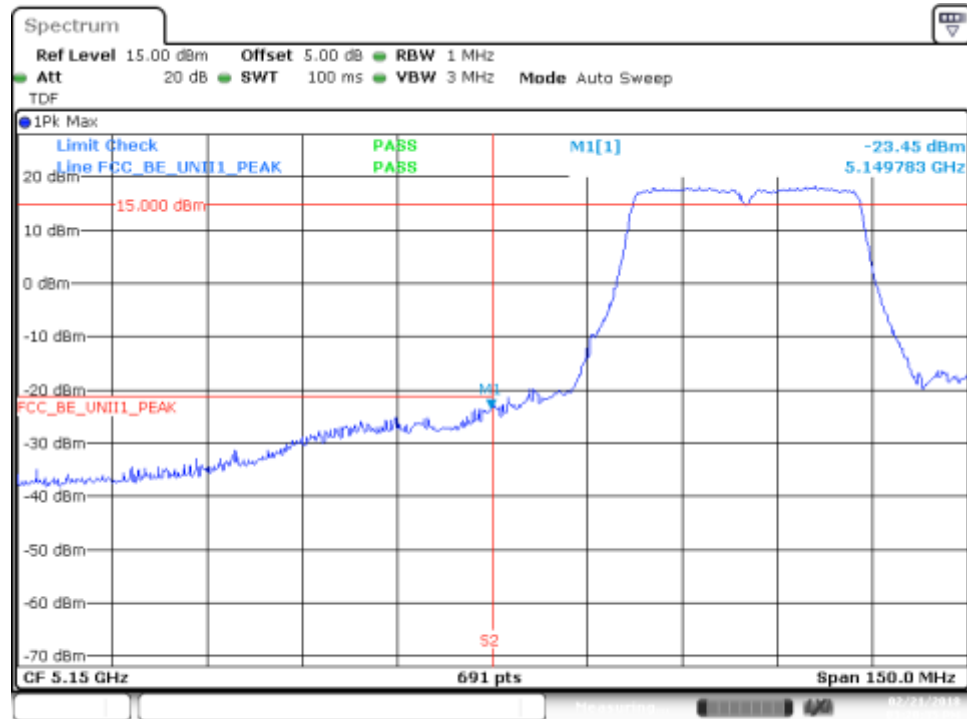


### BE Low Freq Section, RMS – CH38F

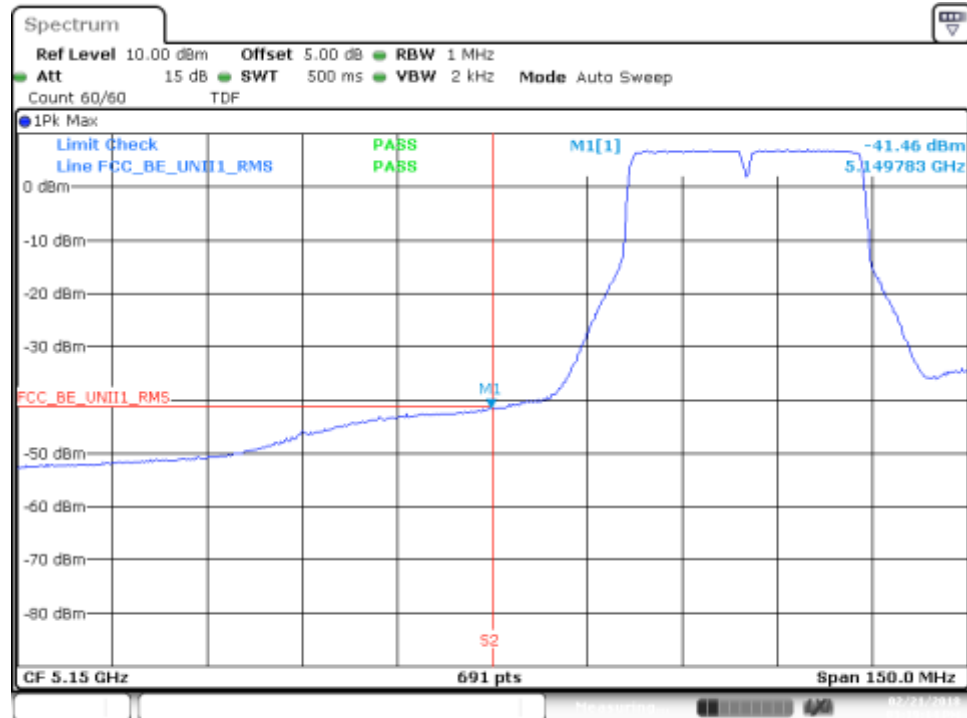

### BE Low Freq Section, Peak – CH46F

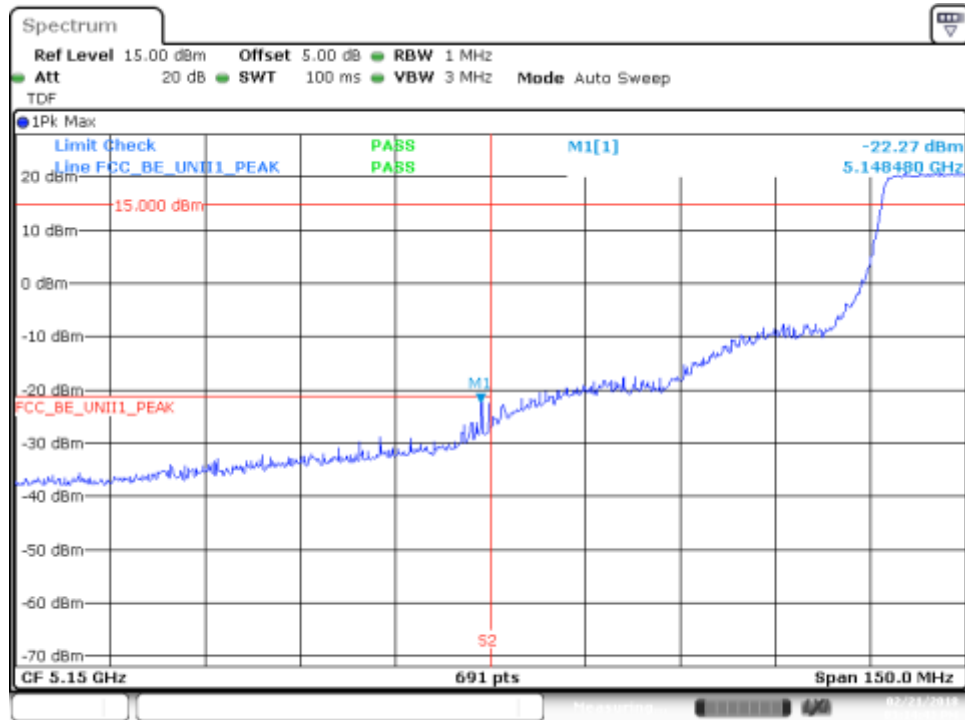


### BE Low Freq Section, RMS – CH46F

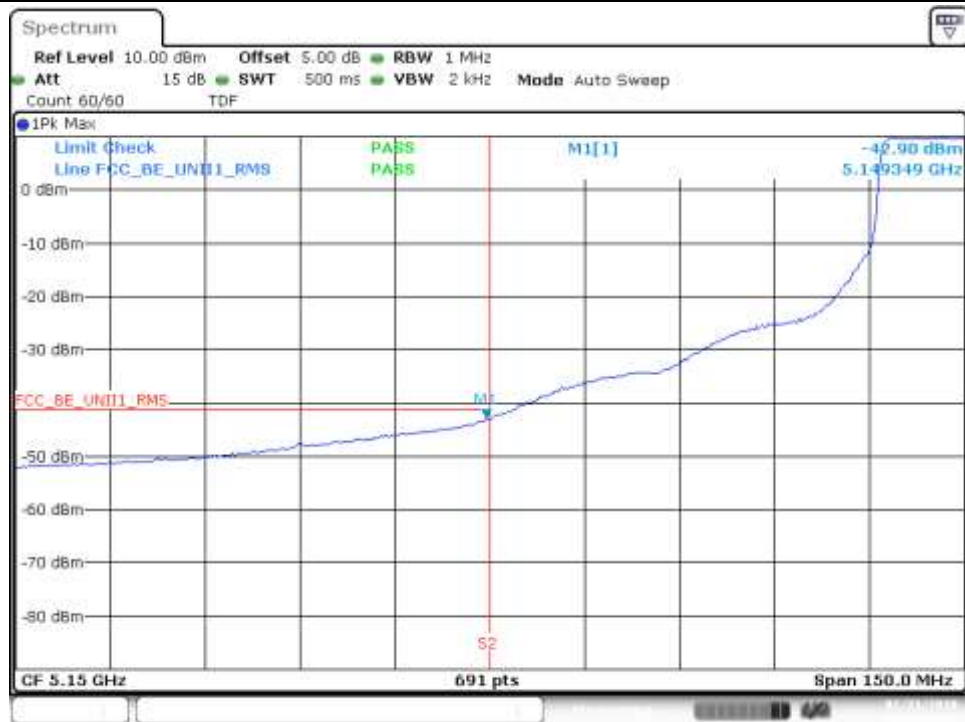


## 802.11n40, HT8 (MIMO) – Chain A


### BE Low Freq Section, Peak – CH38F

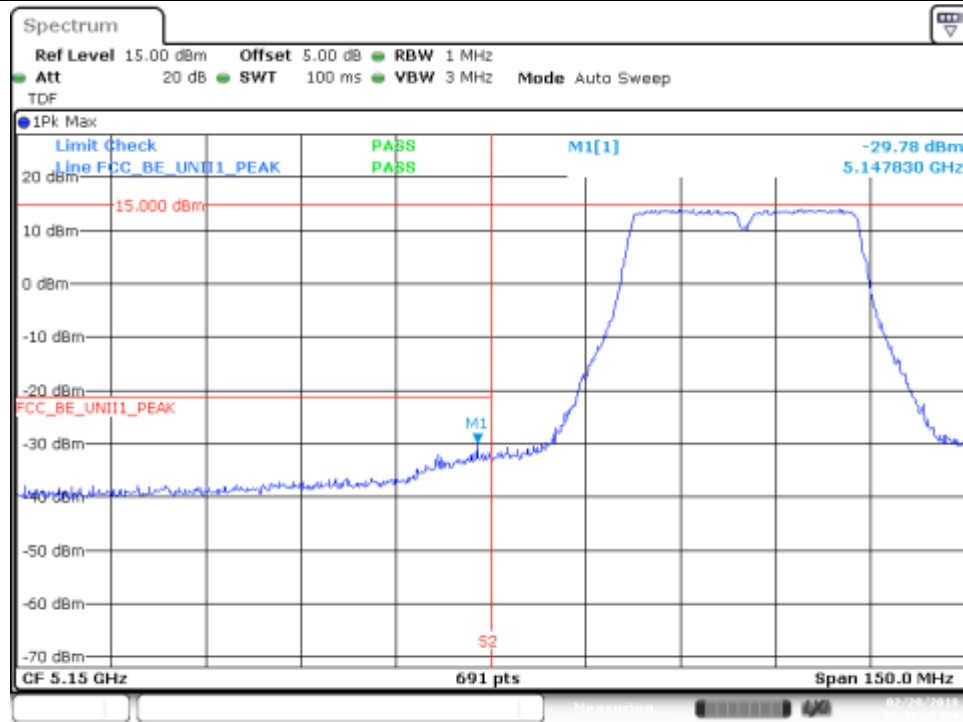

### BE Low Freq Section, RMS – CH38F

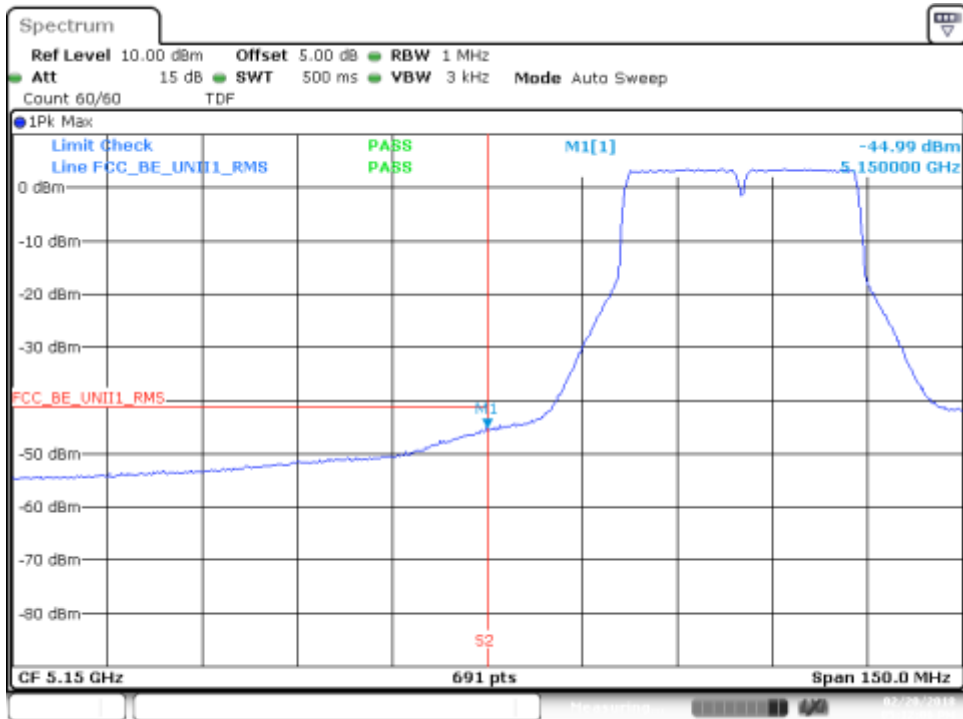

### BE Low Freq Section, Peak – CH46F

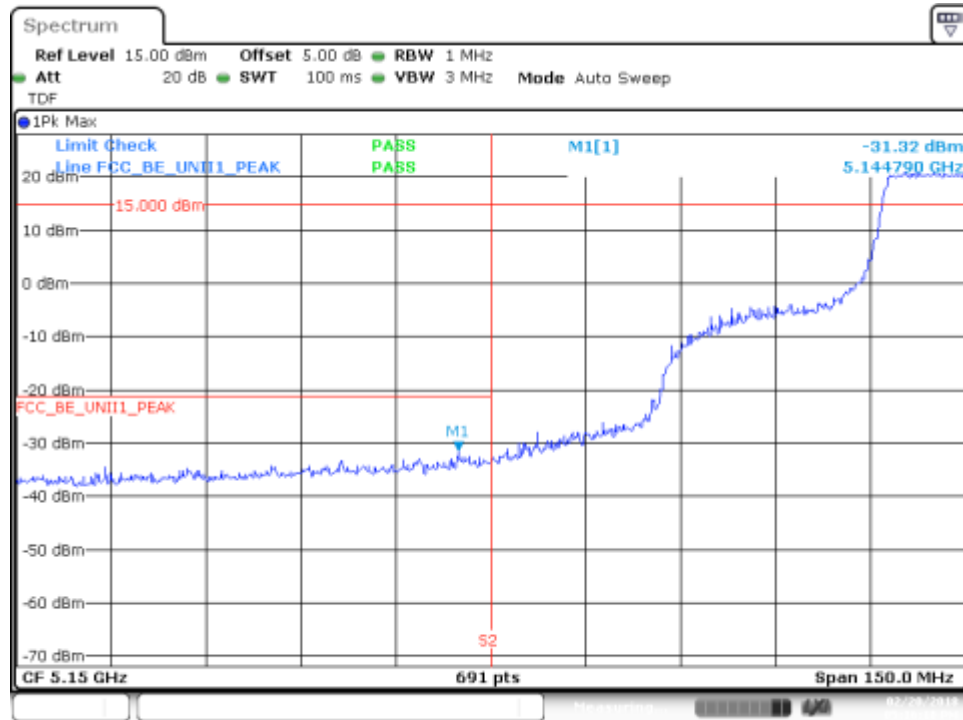

Date: 20 FEB 2018 17:16:18


### BE Low Freq Section, RMS – CH46F




Date: 20 FEB 2018 17:15:41

## 802.11n40, HT8 (MIMO) – Chain B


### BE Low Freq Section, Peak – CH38F

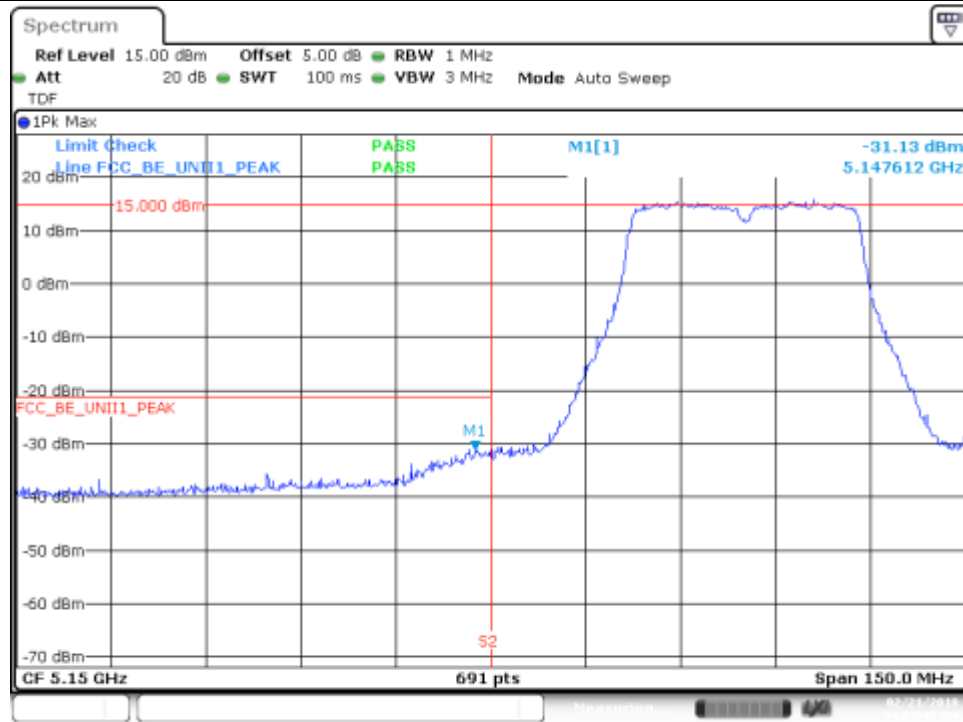

### BE Low Freq Section, RMS – CH38F

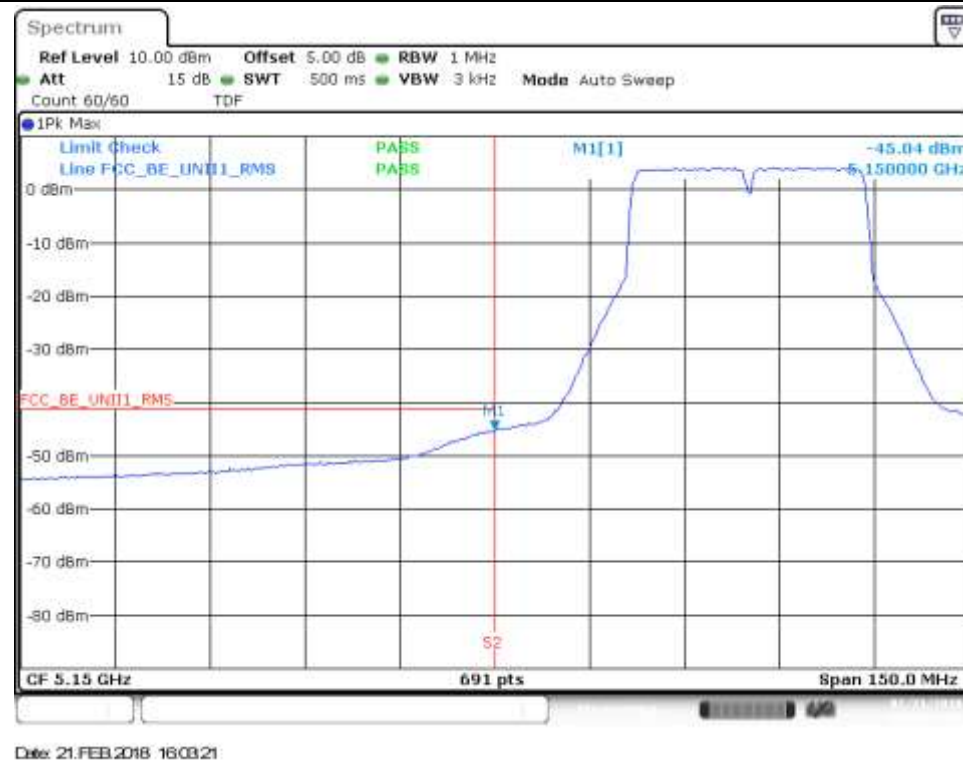

## BE Low Freq Section, Peak – CH46F

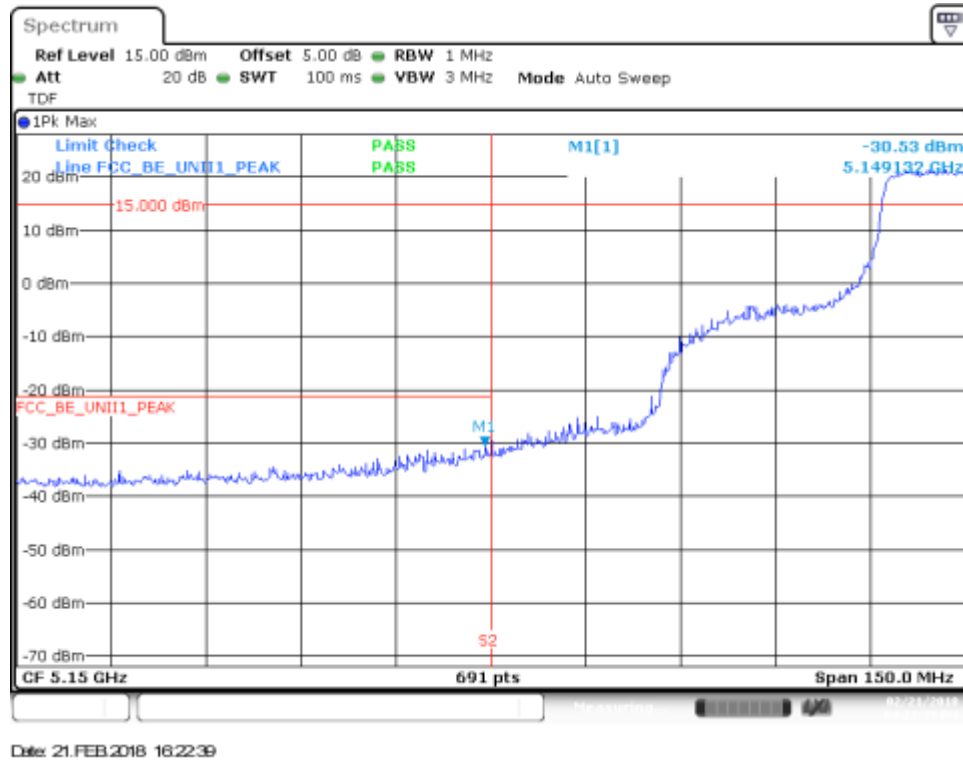


## BE Low Freq Section, RMS – CH46F



## 802.11ac80, VHT0 (SISO) – Chain A

### BE Low Freq Section, Peak – CH42ac80

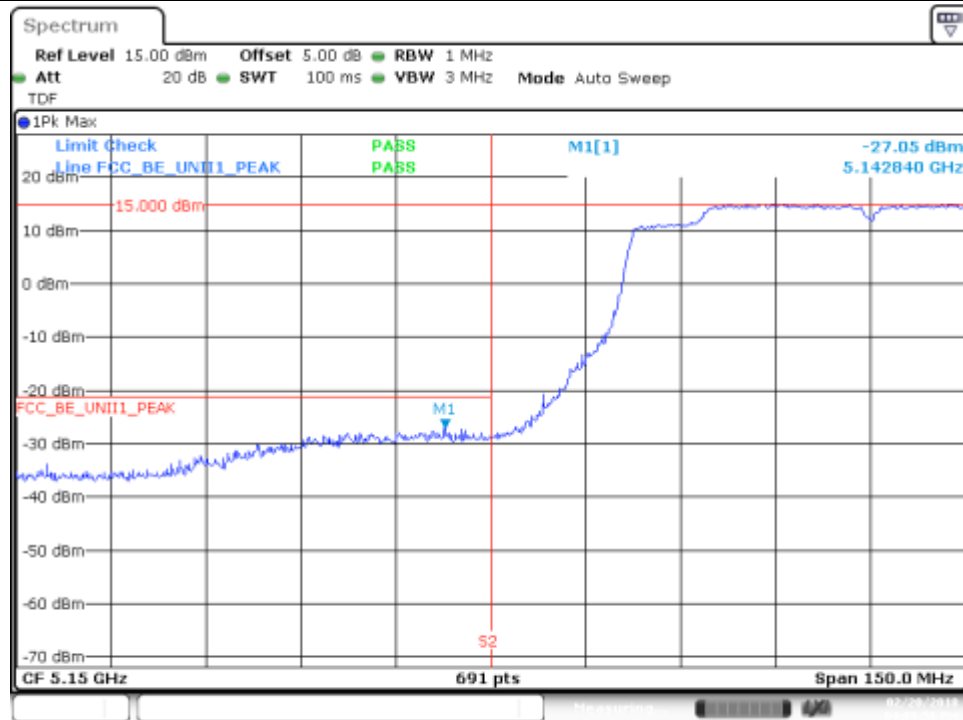

Date: 20 FEB 2018 16:09:57

### BE Low Freq Section, RMS – CH42ac80




Date: 20 FEB 2018 16:03:58



## 802.11ac80, VHT0 (SISO) – Chain B

### BE Low Freq Section, Peak – CH42ac80

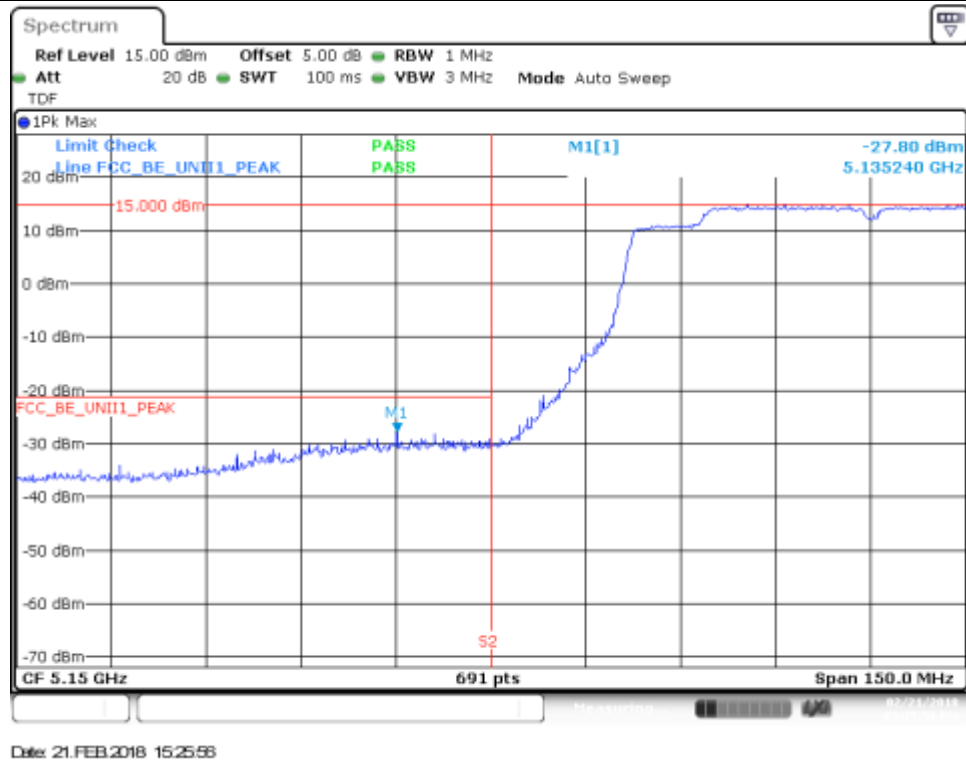


### BE Low Freq Section, RMS – CH42ac80




## 802.11ac80, VHT0 (MIMO) – Chain A

### BE Low Freq Section, Peak – CH42ac80

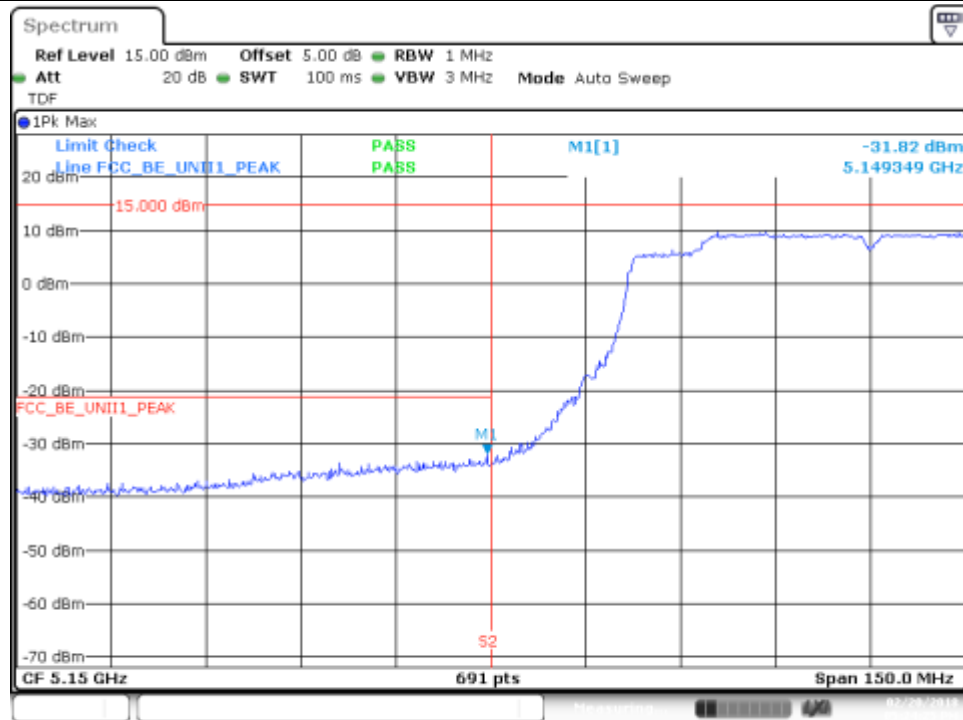


### BE Low Freq Section, RMS – CH42ac80

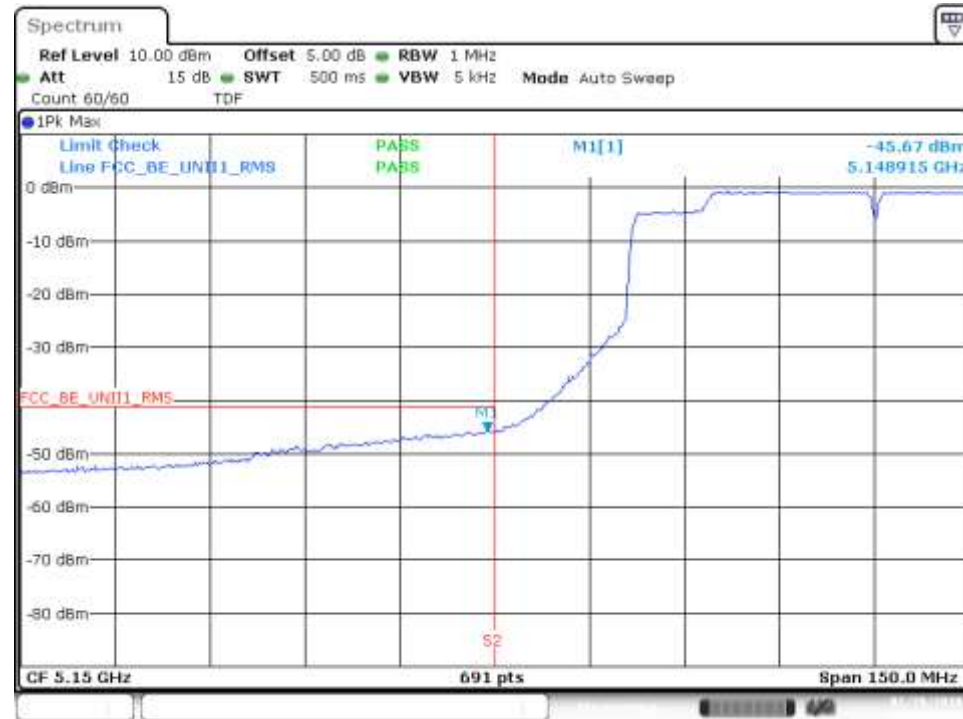



## 802.11ac160, VHT0 (SISO) – Chain A

### BE Low Freq Section, Peak – CH50ac160

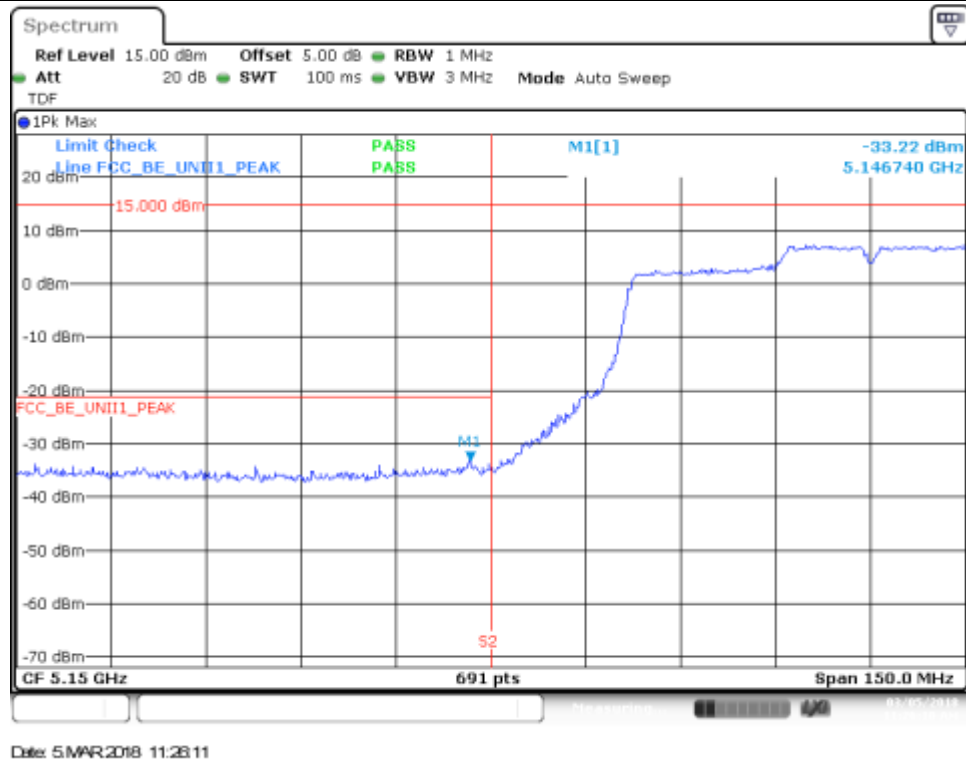


### BE Low Freq Section, RMS – CH50ac160




## 802.11ac160, VHT0 (SISO) – Chain B

### BE Low Freq Section, Peak – CH50ac160

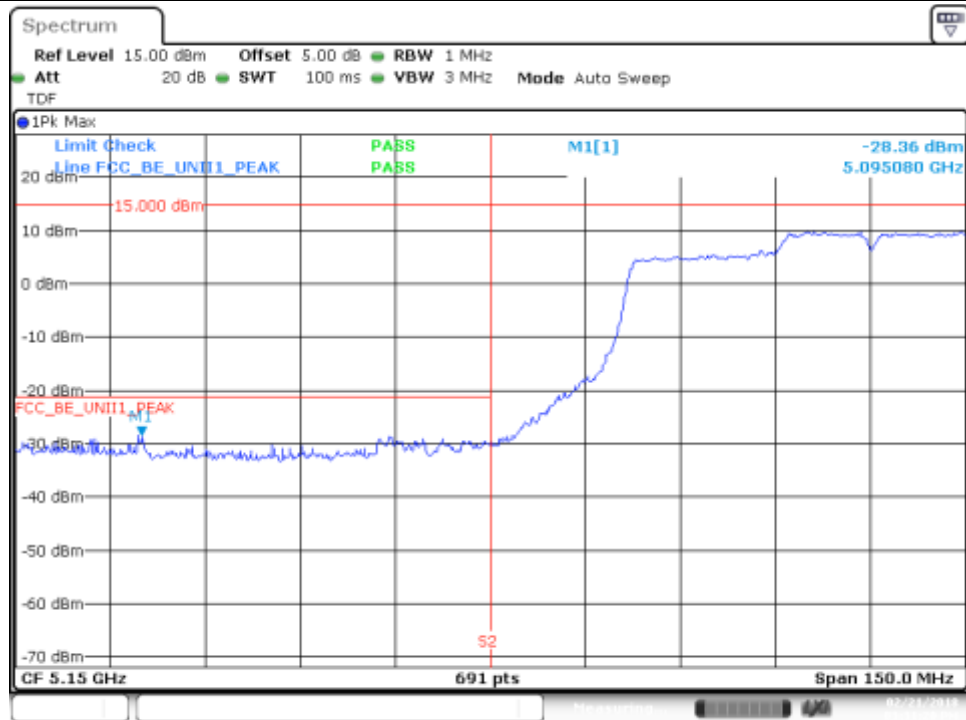

Date: 21.FEB.2018 15:31:21


### BE Low Freq Section, RMS – CH50ac160

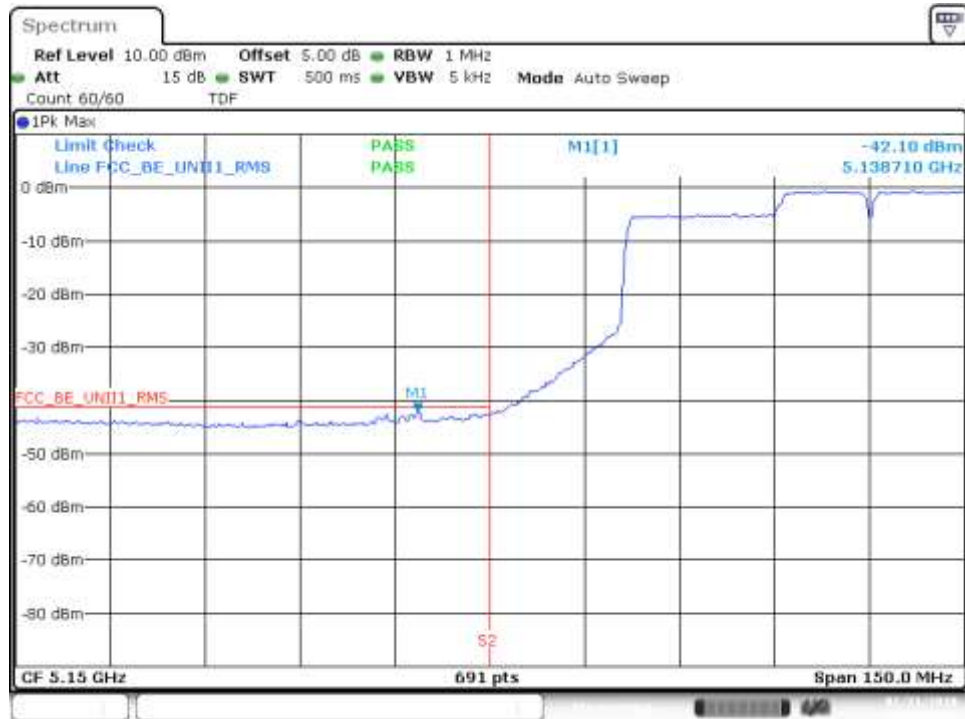

Date: 21.FEB.2018 15:30:25


## 802.11ac160, VHT0 (MIMO) – Chain A

### BE Low Freq Section, Peak – CH50ac160

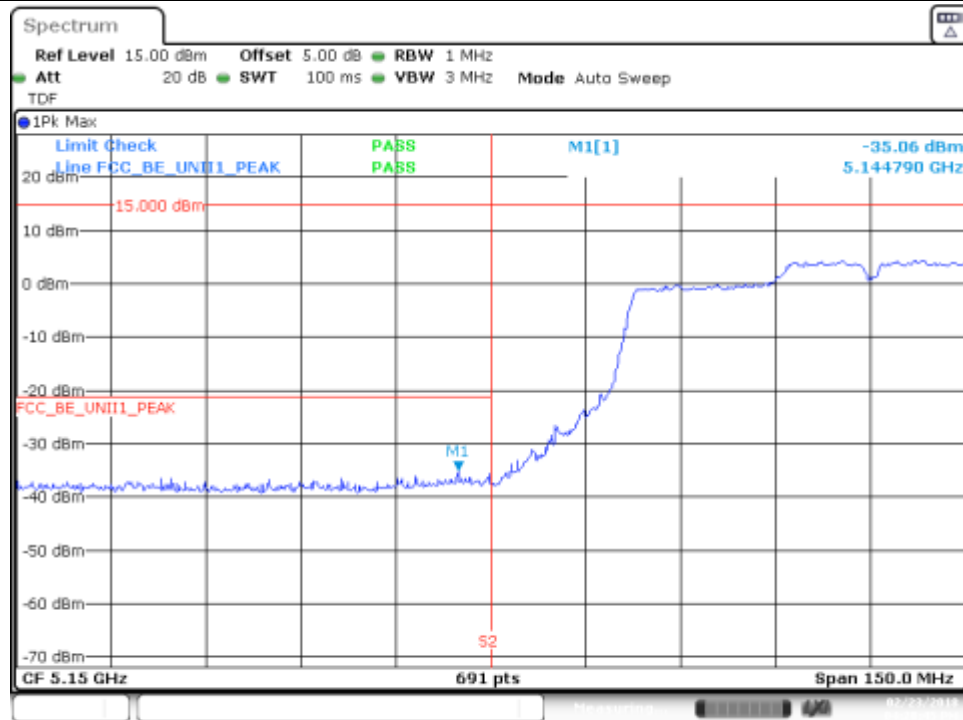

Date: 23.FEB.2018 16:28:45


### BE Low Freq Section, RMS – CH50ac160

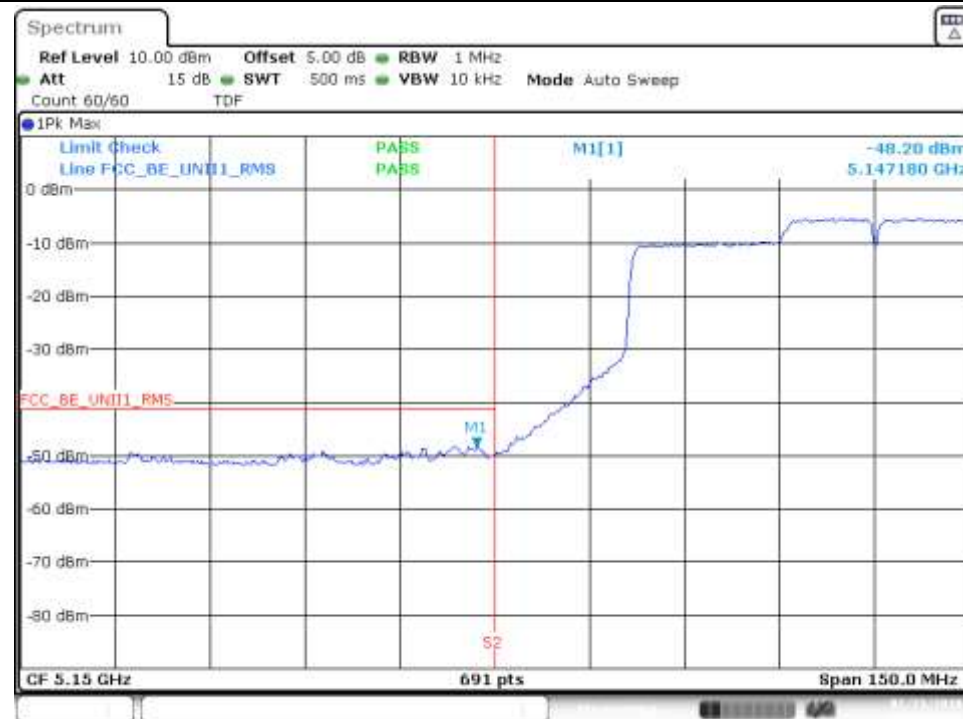

Date: 23.FEB.2018 16:25:34


## 802.11ac160, VHT0 (MIMO) – Chain B

### BE Low Freq Section, Peak – CH50ac160

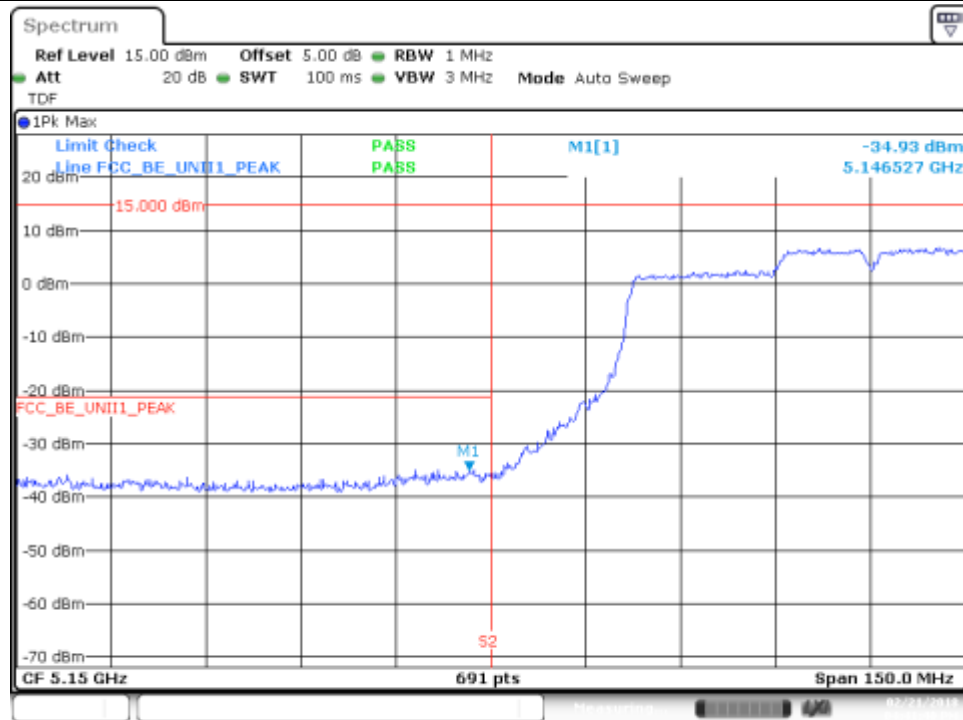

Date: 21.FEB.2018 16:41:41

### BE Low Freq Section, RMS – CH50ac160

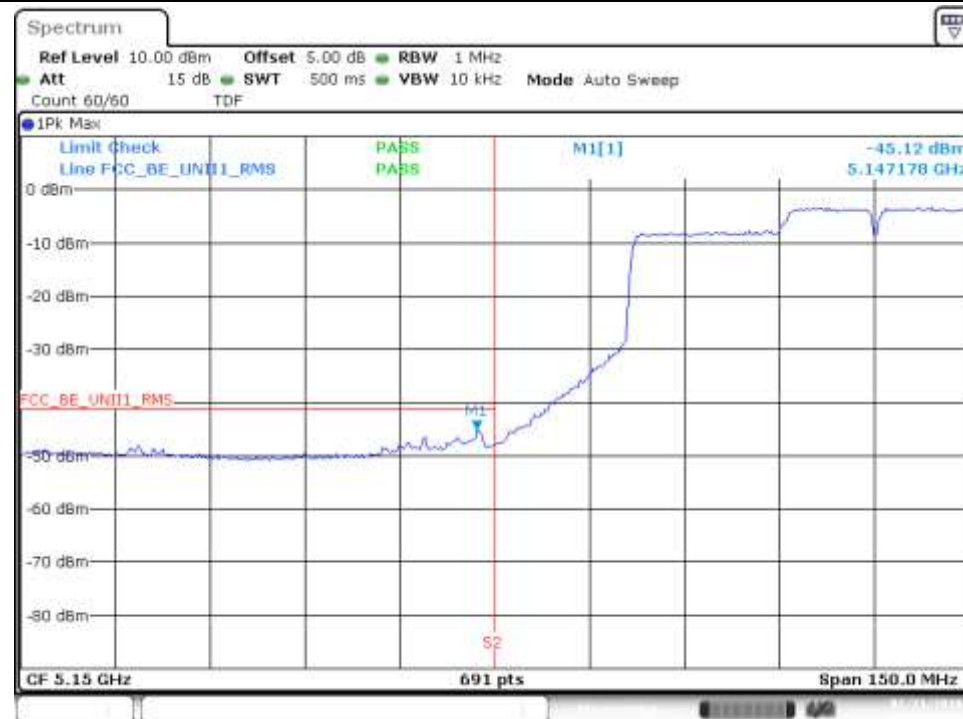


Date: 21.FEB.2018 16:41:27

## B.4 Test Results Tables U-NII-2A

### B.4.1 26dB & 99% Bandwidth

#### Test procedure

The setup below was used to measure the 26dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

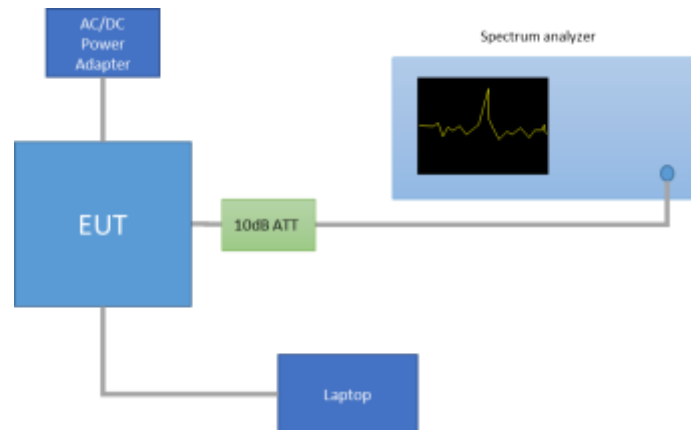



### Results tables

Mode	Rate	Antenna	Channel	Frequency [MHz]	26dB BW [MHz]	99% BW [MHz]
802.11a	6Mbps	SISO CHAIN A	52	5260	24.32	16.84
			56	5280	24.98	16.96
			64	5320	23.97	16.80
		SISO CHAIN B	52	5260	24.57	16.88
			56	5280	25.58	16.88
			64	5320	23.77	16.80
802.11n20	HT0	SISO CHAIN A	52	5260	25.37	17.92
			56	5280	25.33	17.96
			64	5320	24.57	17.92
		SISO CHAIN B	52	5260	26.03	18.00
			56	5280	25.73	18.00
			64	5320	24.77	17.92
	HT8	MIMO CHAIN A	52	5260	25.98	18.32
			56	5280	30.43	18.44
			64	5320	15.38	17.96
		MIMO CHAIN B	52	5260	25.48	17.92
			56	5280	25.43	17.96
			64	5320	24.32	17.96
802.11n40	HT0	SISO CHAIN A	54F	5270	45.59	36.72
			62F	5310	43.96	36.48
		SISO CHAIN B	54F	5270	46.67	36.72
			62F	5310	43.51	36.56
	HT8	MIMO CHAIN A	54F	5270	49.28	36.80
			62F	5310	44.68	36.56
		MIMO CHAIN B	54F	5270	44.86	36.48
			62F	5310	42.79	36.40
802.11ac80	VHT0	SISO CHAIN A	58ac80	5290	86.92	75.12
		SISO CHAIN B	58ac80	5290	86.35	75.12
		MIMO CHAIN A	58ac80	5290	89.20	75.36
		MIMO CHAIN B	58ac80	5290	86.73	75.12

Max Value

See Section B.5.1 and Section B.5.2 for the screenshot results.

## B.4.2 Power Limits. Maximum Output power & Peak power spectral density

### Test limits

FCC part	Limits
15.407 (a) (2)	For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band.

### Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to point E) 2) e) (Method SA-2 Alternative) of KDB 789033 D02.


The maximum power spectral density (PSD) was measured using the method according to point F) (Method SA-2 Alternative) of KDB 789033 D02.

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The setup below was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

The declared maximum antenna gain is 5dBi.

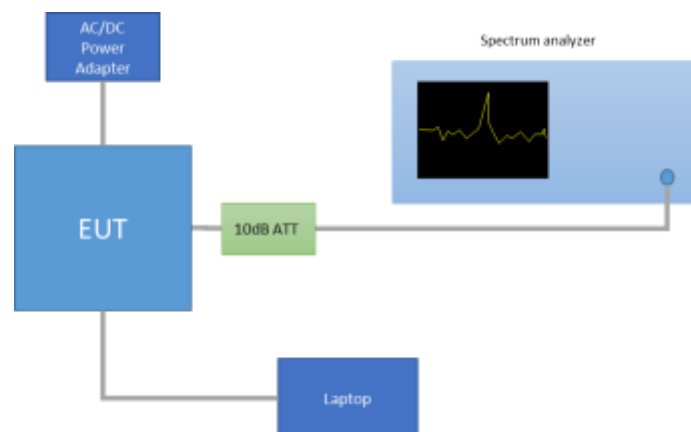

## Results tables

### Duty cycle

Mode	Rate	Antenna	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
802.11a	6Mbps	SISO-A	2.03	2.07	98.30%
		SISO-B	2.03	2.07	98.30%
802.11n20	HT0	SISO-A	1.89	1.93	98.12%
		SISO-B	1.89	1.93	98.12%
	HT8	MIMO-A	0.97	1.01	95.99%
		MIMO-B	0.97	1.01	95.99%
802.11n40	HT0	SISO-A	0.93	0.96	96.40%
		SISO-B	0.93	0.96	96.40%
	HT8	MIMO-A	0.49	0.53	92.32%
		MIMO-B	0.49	0.53	92.32%
802.11ac80	VHT0	SISO-A	0.46	0.49	93.22%
		SISO-B	0.46	0.49	93.22%
		MIMO-A	0.26	0.30	86.31%
		MIMO-B	0.26	0.30	86.31%
802.11ac160	VHT0	SISO-A	0.25	0.28	87.83%
		SISO-B	0.25	0.28	87.83%
		MIMO-A	0.15	0.19	78.50%
		MIMO-B	0.15	0.19	78.50%

### Maximum output power

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average Conducted Output Power [dBm]	Maximum* Conducted Output Power [dBm]	Maximum* Conducted Output Power [mW]	Maximum* EIRP [dBm]
802.11a	6Mbps	52	5260	SISO CHAIN A	21.14	21.14	130.02	26.14
				SISO CHAIN B	21.07	21.07	127.94	26.07
		56	5280	SISO CHAIN A	21.15	21.15	130.32	26.15
				SISO CHAIN B	21.20	21.20	131.83	26.20
		64	5320	SISO CHAIN A	18.15	18.15	65.31	23.15
				SISO CHAIN B	18.02	18.02	63.39	23.02
802.11n20	HT0	52	5260	SISO CHAIN A	21.16	21.16	130.62	26.16
				SISO CHAIN B	21.18	21.18	131.22	26.18
		56	5280	SISO CHAIN A	21.14	21.14	130.02	26.14
				SISO CHAIN B	21.14	21.14	130.02	26.14
		64	5320	SISO CHAIN A	17.93	17.93	62.09	22.93
				SISO CHAIN B	18.00	18.00	63.10	23.00
	HT8	52	5260	MIMO CHAIN A	19.55	19.73	93.92	24.73
				MIMO CHAIN B	19.48	19.66	92.42	24.66
				Combined A+B	22.53	22.70	186.34	27.70
		56	5280	MIMO CHAIN A	19.75	19.93	98.35	24.93
				MIMO CHAIN B	19.65	19.83	96.11	24.83
				Combined A+B	22.71	22.89	194.45	27.89
		64	5320	MIMO CHAIN A	16.45	16.63	46.00	21.63
				MIMO CHAIN B	16.62	16.80	47.84	21.80
				Combined A+B	19.55	19.72	93.84	24.72
802.11n40	HT0	54F	5270	SISO CHAIN A	21.22	21.38	137.39	26.38
				SISO CHAIN B	21.26	21.42	138.66	26.42
		62F	5310	SISO CHAIN A	16.02	16.18	41.49	21.18
				SISO CHAIN B	16.02	16.18	41.49	21.18
	HT8	54F	5270	MIMO CHAIN A	20.38	20.73	118.22	25.73
				MIMO CHAIN B	20.16	20.51	112.38	25.51
				Combined A+B	23.28	23.63	230.60	28.63
		62F	5310	MIMO CHAIN A	14.30	14.65	29.15	19.65
				MIMO CHAIN B	15.04	15.04	31.92	20.04
				Combined A+B	17.70	17.86	61.07	22.86
802.11ac80	VHT0	58ac80	5290	SISO CHAIN A	16.09	16.39	43.60	21.39
				SISO CHAIN B	17.38	17.68	58.68	22.68
				MIMO CHAIN A	12.61	13.25	21.13	18.25
				MIMO CHAIN B	12.54	13.18	20.80	18.18
				Combined A+B	15.59	16.23	41.93	21.23

\* Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

### Maximum Power Spectral Density (PSD)

Mode	Rate	Channel	Freq. [MHz]	Antenna	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]
802.11a	6Mbps	52	5260	SISO CHAIN A	9.50	9.50
				SISO CHAIN B	9.45	9.45
		56	5280	SISO CHAIN A	9.46	9.46
				SISO CHAIN B	9.56	9.56
		64	5320	SISO CHAIN A	6.54	6.54
				SISO CHAIN B	6.47	6.47
802.11n20	HT0	52	5260	SISO CHAIN A	9.23	9.23
				SISO CHAIN B	9.26	9.26
		56	5280	SISO CHAIN A	9.21	9.21
				SISO CHAIN B	9.21	9.21
		64	5320	SISO CHAIN A	6.02	6.02
				SISO CHAIN B	6.11	6.11
	HT8	52	5260	MIMO CHAIN A	7.58	7.76
				MIMO CHAIN B	7.56	7.74
				Combined A+B	10.58	10.76
		56	5280	MIMO CHAIN A	7.76	7.94
				MIMO CHAIN B	7.72	7.90
				Combined A+B	10.75	10.93
		64	5320	MIMO CHAIN A	4.53	4.71
				MIMO CHAIN B	4.74	4.92
				Combined A+B	7.65	7.82
802.11n40	HT0	54F	5270	SISO CHAIN A	6.18	6.34
				SISO CHAIN B	6.22	6.38
		62F	5310	SISO CHAIN A	1.04	1.20
				SISO CHAIN B	0.99	1.15
	HT8	54F	5270	MIMO CHAIN A	5.33	5.68
				MIMO CHAIN B	5.20	5.55
				Combined A+B	8.28	8.62
		62F	5310	MIMO CHAIN A	-0.66	-0.31
				MIMO CHAIN B	0.08	0.08
				Combined A+B	2.74	2.90
802.11ac80	VHT0	58ac80	5290	SISO CHAIN A	-1.29	-0.99
				SISO CHAIN B	-0.02	0.28
				MIMO CHAIN A	-4.73	-4.09
				MIMO CHAIN B	-4.81	-4.17
				Combined A+B	-1.76	-1.12

\* Maximum values are the duty cycle compensated values calculated from the measured average values

**See Section B.5.3 for the screenshot results.**


### B.4.3 Undesirable emissions limits : Band Edge (Conducted)

#### Test limits

FCC part	Limits																				
15.407 (b) (2)	For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.																				
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

#### Test procedure

The setup below was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared Antenna Gain.

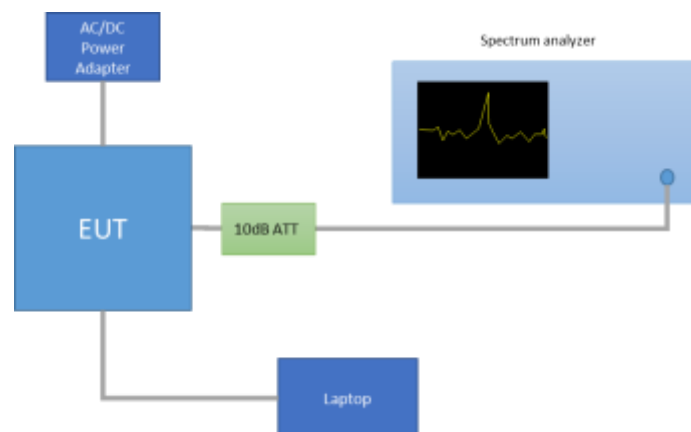

For Band Edge measurements in average mode on the low frequency section, one of the two methods is used according to section G) 6) (KDB 789033 D02):

- 1) Method AD (Average Detection) as per paragraph II.G.6.c.
- 2) Method VB (Averaging using reduced video bandwidth) as per paragraph II.G.6.d.

In case of Band Edge measurements falling in restricted bands, the declared Antenna Gain is also compensated in the graph. The declared maximum antenna gain is 5dBi.

The following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dBμV/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.

§15.209(a)			Converted values	
Freq Range (MHz)	Distance (m)	Field strength (microvolts/meter)	Field strength (dB microvolts/meter)	Power (dBm)
960-25000	3	500	53.98	-41.2

**See Section B.5.4 for the screenshot results.**

## B.4.4 Radiated spurious emission

### Standard references

FCC part	Limits																				
15.407 (a) (2)	For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band.																				
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

### Test procedure

The below setups were used to measure the radiated spurious emissions.

Depending of the frequency range and bands being tested, different antennas and filters were used.


The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emissions were measured on the worst case configuration selected from the chapter B.4.2 and using the lowest, middle and highest channels.


For technologies 802.11n20, 802.11n40 and 802.11ac80 the worst case in terms of spurious emissions found among the low, mid and high channels when tested on chain A and B separately is used to perform the test in MIMO mode (Chain A+B).




*Radiated Setup 30 MHz- 1GHz*

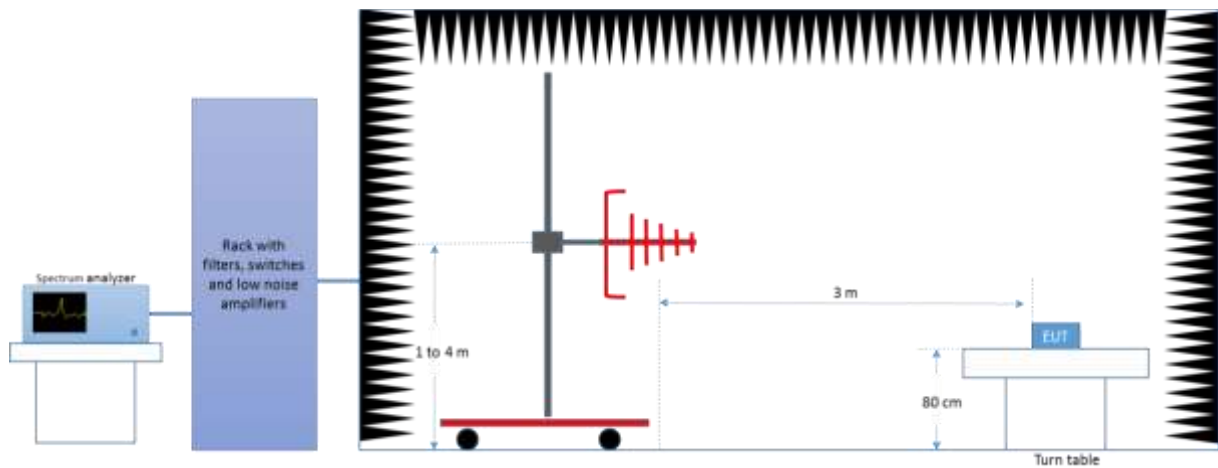

*Radiated Setup 1 GHz - 18 GHz*

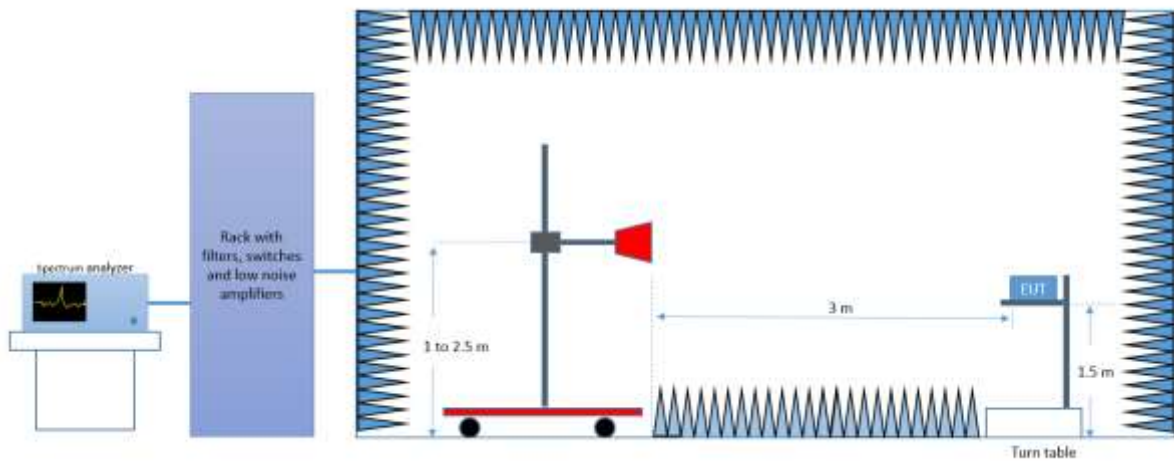

*Radiated Setup 18 GHz - 40 GHz*

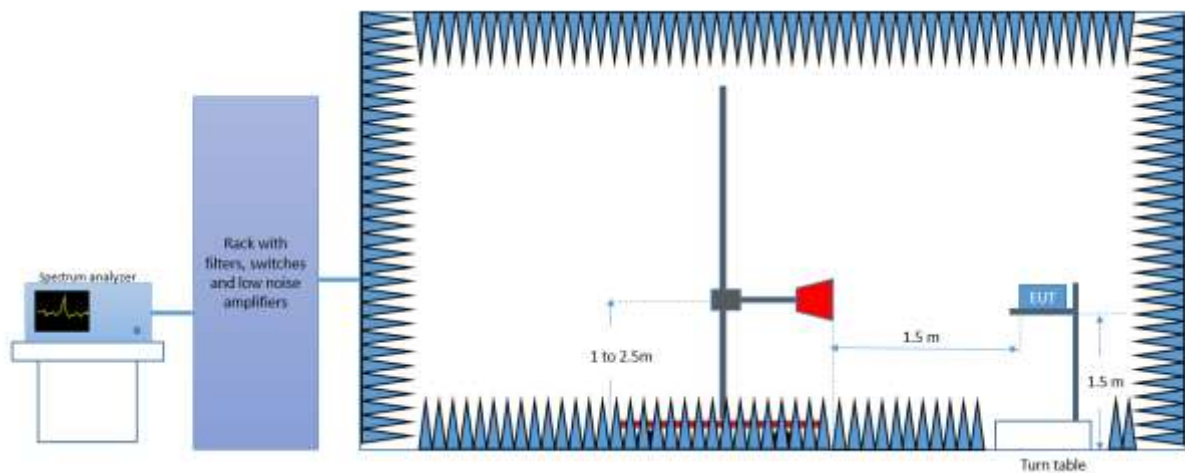

Sample Calculation

The field strength is deduced from the radiated measurement using the following equation:

$$E = 126.8 - 20\log(\lambda) + P - G$$

where

*E* is the field strength of the emission at the measurement distance, in dBμV/m

*P* is the power measured at the output of the test antenna, in dBm

*λ* is the wavelength of the emission under investigation  $[300/f_{MHz}]$ , in m

*G* is the gain of the test antenna, in dBi

NOTE – The measured power P includes all applicable instrument correction factors up to the connection to the test Antenna e.g. cable losses, amplifier gains.

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{SpecLimit} = E_{Meas} + 20\log(D_{Meas}/D_{SpecLimit})$$

where

*E<sub>SpecLimit</sub>* is the field strength of the emission at the distance specified by the limit, in dBμV/m

*E<sub>Meas</sub>* is the field strength of the emission at the measurement distance, in dBμV/m

*D<sub>Meas</sub>* is the measurement distance, in m

*D<sub>SpecLimit</sub>* is the distance specified by the limit, in m

# Test Results

## 30 MHz – 40 GHz, 802.11a, 6Mbps, Chain A

### Radiated Spurious – CH52

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	28.5	---	43.6	15.1
216.0	31.8	---	43.6	11.8
576.0	36.3	---	46.0	9.7
640.0	36.1	---	46.0	9.9
1113.4	43.9	---	74.0	30.1
1113.4	---	37.0	54.0	17.0
1190.2	---	39.2	54.0	14.8
1190.2	44.7	---	74.0	29.3
16598.2	---	44.5	54.0	9.5
16611.6	56.7	---	74.0	17.3
21039.8	51.4	---	74.0	22.6
21042.2	---	40.9	54.0	13.1

### Radiated Spurious – CH56

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	30.8	---	43.6	12.8
216.0	32.9	---	43.6	10.7
576.0	35.8	---	46.0	10.2
640.0	36.4	---	46.0	9.6
1113.2	43.2	---	74.0	30.8
1113.4	---	36.2	54.0	17.8
1190.2	---	39.3	54.0	14.7
1190.2	45.2	---	74.0	28.8
10567.1	50.2	---	74.0	23.8
10653.2	---	38.6	54.0	15.4
21107.0	51.0	---	74.0	23.0
21116.8	---	40.3	54.0	13.7

**Radiated Spurious – CH64**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	31.4	---	43.6	12.2
216.0	31.2	---	43.6	12.4
576.0	37.3	---	46.0	8.7
640.0	35.3	---	46.0	10.7
1113.4	---	36.5	54.0	17.5
1113.6	43.4	---	74.0	30.6
1190.0	44.7	---	74.0	29.3
1190.2	---	39.7	54.0	14.3
10638.5	---	39.6	54.0	14.4
10647.8	50.9	---	74.0	23.1
21278.9	---	38.2	54.0	15.8
21281.5	46.1	---	74.0	27.9

**30 MHz – 40 GHz, 802.11a, 6Mbps, Chain B**
**Radiated Spurious – CH52**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	28.1	---	43.6	15.5
144.0	26.8	---	43.6	16.8
215.9	32.8	---	43.6	10.8
576.0	35.1	---	46.0	10.9
1113.4	---	36.5	54.0	17.5
1113.6	43.3	---	74.0	30.7
1190.0	45.8	---	74.0	28.2
1190.2	---	39.1	54.0	14.9
10522.0	---	38.8	54.0	15.2
10645.6	50.8	---	74.0	23.2
39790.3	---	42.9	54.0	11.1
39793.7	52.8	---	74.0	21.2

### Radiated Spurious – CH56

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	30.8	---	43.6	12.8
216.0	32.6	---	43.6	11.0
576.0	36.7	---	46.0	9.3
640.0	37.6	---	46.0	<b>8.4</b>
1113.4	42.6	---	74.0	31.4
1113.6	---	36.8	54.0	17.2
1190.2	---	39.2	54.0	14.8
1190.5	44.2	---	74.0	29.8
16677.6	55.7	---	74.0	18.3
16690.1	---	44.5	54.0	9.5
39866.3	52.9	---	74.0	21.1
39867.1	---	42.4	54.0	11.6

### Radiated Spurious – CH64

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	30.9	---	43.6	12.7
185.2	35.0	---	43.6	8.6
200.6	34.9	---	43.6	8.7
576.0	36.4	---	46.0	9.6
1113.4	43.4	---	74.0	30.6
1113.6	---	36.2	54.0	17.8
1190.2	45.6	---	74.0	28.4
1190.2	---	39.5	54.0	14.5
3200.0	---	40.5	54.0	13.5
3189.2	51.6	---	74.0	22.4
10638.5	---	39.6	54.0	14.4
10647.8	50.9	---	74.0	23.1
39671.8	51.1	---	74.0	22.9
39789.9	---	42.1	54.0	11.9

# 30 MHz – 40 GHz, 802.11n20, HT0, Chain A

## Radiated Spurious – CH52

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	30.8	---	43.6	12.8
216.0	33.1	---	43.6	10.5
264.0	40.9	---	46.0	<b>5.1</b>
576.0	37.0	---	46.0	9.0
1113.2	43.2	---	74.0	30.8
1113.4	---	35.9	54.0	18.1
1190.2	---	39.7	54.0	14.3
1190.5	45.9	---	74.0	28.1
10639.8	50.4	---	74.0	23.6
10640.7	---	39.5	54.0	14.5
21038.2	52.5	---	74.0	21.5
21038.5	---	40.7	54.0	13.3

## Radiated Spurious – CH56

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	30.6	---	43.6	13.0
216.0	33.0	---	43.6	10.6
264.0	39.5	---	46.0	6.5
576.0	36.5	---	46.0	9.5
1113.4	---	36.2	54.0	17.8
1113.4	43.7	---	74.0	30.3
1190.5	---	38.8	54.0	15.2
1190.5	46.1	---	74.0	27.9
16639.2	56.7	---	74.0	17.3
16733.8	---	44.8	54.0	9.2
21121.6	---	41.1	54.0	12.9
21134.4	52.2	---	74.0	21.8

**Radiated Spurious – CH64**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	30.2	---	43.6	13.4
216.0	31.4	---	43.6	12.2
576.1	36.4	---	46.0	9.6
640.0	36.0	---	46.0	10.0
1113.4	---	36.1	54.0	17.9
1151.7	---	34.8	54.0	19.2
1190.5	---	39.1	54.0	14.9
1190.7	45.3	---	74.0	28.7
10642.5	---	39.5	54.0	14.5
10646.5	50.1	---	74.0	23.9
21263.2	48.3	---	74.0	25.7
21274.9	---	37.8	54.0	16.2

**30 MHz – 40 GHz, 802.11n20, HT0, Chain B**
**Radiated Spurious – CH52**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	30.7	---	43.6	12.9
216.0	29.7	---	43.6	13.9
576.0	36.9	---	46.0	9.1
640.0	35.4	---	46.0	10.6
1113.4	---	36.5	54.0	17.5
1151.7	---	34.8	54.0	19.2
1151.7	43.6	---	74.0	30.4
1190.2	---	39.1	54.0	14.9
1190.5	45.3	---	74.0	28.7
10502.4	---	39.0	54.0	15.0
10531.4	50.8	---	74.0	23.2
39803.8	53.9	---	74.0	20.1
39822.0	---	42.7	54.0	11.3

**Radiated Spurious – CH56**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	30.5	---	43.6	13.1
216.0	29.8	---	43.6	13.8
576.0	37.4	---	46.0	8.6
640.0	34.8	---	46.0	11.2
1190.5	---	39.1	54.0	14.9
1190.5	45.5	---	74.0	28.5
1266.6	43.7	---	74.0	30.3
1267.3	---	35.3	54.0	18.7
16653.5	56.1	---	74.0	17.9
16662.4	---	44.2	54.0	9.8
34554.9	51.3	---	74.0	22.7
34558.2	---	39.7	54.0	14.3

**Radiated Spurious – CH64**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	30.5	---	43.6	13.1
216.0	31.6	---	43.6	12.0
576.0	37.5	---	46.0	8.5
640.0	34.7	---	46.0	11.3
1190.2	---	38.8	54.0	15.2
1190.5	44.3	---	74.0	29.7
5959.2	58.9	---	74.0	15.1
5959.2	---	47.1	54.0	6.9
16693.2	55.8	---	74.0	18.2
16710.2	---	44.1	54.0	9.9
35782.5	51.4	---	74.0	22.6
35796.0	---	38.7	54.0	15.3



### 30 MHz – 40 GHz, 802.11n20, HT8, Chain A+B

#### Radiated Spurious – CH52

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
170.6	30.4	---	43.6	13.2
268.1	33.7	---	46.0	12.3
640.0	37.6	---	46.0	8.4
1113.6	42.1	---	74.0	31.9
1113.6	---	34.1	54.0	19.9
1190.2	---	38.3	54.0	15.7
1190.7	44.2	---	74.0	29.8
10522.5	---	39.3	54.0	14.7
10523.4	49.9	---	74.0	24.1
21034.2	52.2	---	74.0	21.8
21035.8	---	42.2	54.0	11.8

### 30 MHz – 40 GHz, 802.11n40, HT0, Chain A

#### Radiated Spurious – CH54F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	30.7	---	43.6	12.9
215.9	29.9	---	43.6	13.7
576.0	36.7	---	46.0	9.3
640.0	35.1	---	46.0	10.9
1113.4	---	35.9	54.0	18.1
1113.6	43.3	---	74.0	30.7
1187.5	45.2	---	74.0	28.8
1190.2	---	39.0	54.0	15.0
16616.5	---	44.5	54.0	9.5
16654.0	55.4	---	74.0	18.6
21063.7	48.9	---	74.0	25.1
21077.8	---	39.5	54.0	14.5

**Radiated Spurious – CH62F**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	30.3	---	43.6	13.3
216.0	29.7	---	43.6	13.9
576.0	36.6	---	46.0	9.4
640.0	34.9	---	46.0	11.1
1113.2	43.0	---	74.0	31.0
1113.4	---	36.3	54.0	17.7
1190.2	44.8	---	74.0	29.2
1190.5	---	39.2	54.0	14.8
16640.6	---	44.9	54.0	9.1
16700.8	54.4	---	74.0	19.6
34785.2	50.7	---	74.0	23.3
34788.2	---	39.3	54.0	14.7

**30 MHz – 40 GHz, 802.11n40, HT0, Chain B**
**Radiated Spurious – CH54F**

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	30.4	---	43.6	13.2
216.0	28.6	---	43.6	14.9
576.0	36.6	---	46.0	9.4
640.0	35.8	---	46.0	10.2
1113.2	43.5	---	74.0	30.5
1113.6	---	36.3	54.0	17.7
1187.5	45.3	---	74.0	28.7
1187.5	---	40.1	54.0	13.9
16654.8	54.8	---	74.0	19.2
16671.8	---	44.1	54.0	9.9
31813.5	50.3	---	74.0	23.7
31822.8	---	38.9	54.0	15.1

## Radiated Spurious – CH62F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.2	30.5	---	43.6	13.1
216.0	28.7	---	43.6	14.9
576.0	37.6	---	46.0	8.4
640.0	35.8	---	46.0	10.2
1111.9	42.1	---	74.0	31.9
1113.4	---	36.3	54.0	17.7
1187.5	45.8	---	74.0	28.2
1187.5	---	40.0	54.0	14.0
16663.8	---	45.2	54.0	8.8
16695.0	55.2	---	74.0	18.8
34883.1	50.5	---	74.0	23.5
34891.9	---	39.7	54.0	14.3

## 30 MHz – 40 GHz, 802.11n40, HT8, Chain A+B

## Radiated Spurious – CH62F

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBµV/m	dBµV/m	dBµV/m	dB
115.1	28.6	---	43.6	15.0
178.9	28.1	---	43.6	15.5
640.0	40.9	---	46.0	<b>5.1</b>
1113.6	---	32.7	54.0	21.3
1113.6	42.0	---	74.0	32.0
1190.5	---	37.7	54.0	16.3
1190.7	44.7	---	74.0	29.3
10614.4	50.8	---	74.0	23.2
10626.9	---	39.8	54.0	14.2
39691.2	---	42.9	54.0	11.1
39854.9	53.7	---	74.0	20.3

### 30 MHz – 40 GHz, 802.11ac80, HT0, Chain A

#### Radiated Spurious – CH58ac80

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	30.7	---	43.6	12.9
216.0	29.4	---	43.6	14.2
576.0	36.2	---	46.0	9.8
640.0	36.0	---	46.0	10.0
1113.4	43.4	---	74.0	30.6
1113.4	---	36.0	54.0	18.0
1151.9	---	34.8	54.0	19.2
1189.7	45.1	---	74.0	28.9
1190.2	---	39.3	54.0	14.7
16615.6	54.5	---	74.0	19.5
16665.1	---	44.5	54.0	9.5
22526.0	---	36.3	54.0	17.7
22528.1	47.9	---	74.0	26.1

### 30 MHz – 40 GHz, 802.11ac80, HT0, Chain B

#### Radiated Spurious – CH58ac80

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
115.2	30.3	---	43.6	13.3
216.0	29.1	---	43.6	14.5
576.0	37.3	---	46.0	8.7
640.0	35.1	---	46.0	10.9
1113.6	43.1	---	74.0	30.9
1113.6	---	36.6	54.0	17.4
1190.0	45.3	---	74.0	28.7
1190.2	---	38.9	54.0	15.1
16728.5	---	44.0	54.0	10.0
16749.9	55.5	---	74.0	18.5
26751.9	---	37.2	54.0	16.8
26752.7	49.3	---	74.0	24.7

# 30 MHz – 40 GHz, 802.11ac80, HT8, Chain A+B

## Radiated Spurious – CH58ac80

Frequency	MaxPeak	Avg	Limit	Margin
MHz	dBμV/m	dBμV/m	dBμV/m	dB
170.6	28.9	---	43.6	14.7
576.0	35.7	---	46.0	10.3
640.0	39.1	---	46.0	<b>6.9</b>
1190.5	---	37.5	54.0	16.5
1190.7	44.2	---	74.0	29.8
1279.6	43.8	---	74.0	30.2
1279.6	---	34.5	54.0	19.5
16732.0	---	44.8	54.0	9.2
16738.3	54.6	---	74.0	19.4
34855.7	50.8	---	74.0	23.2
34859.9	---	39.6	54.0	14.4

## B.4.5 AC power-line conducted emission

### Standard references:

FCC part	Limits														
15.407 (6) 15.207	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.														
	<table><tr><th rowspan="2">Frequency of emission (MHz)</th><th colspan="2">Conducted limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency of emission (MHz)	Conducted limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
	Frequency of emission (MHz)		Conducted limit (dBμV)												
		Quasi-peak	Average												
	0.15-0.5	66 to 56*	56 to 46*												
	0.5-5	56	46												
	5-30	60	50												
	*Decreases with the logarithm of the frequency.														

### Test procedure:


The EUT and peripherals are placed on a wooden table with a nominal size of 1.0 m by 1.5 m, raised 80 cm above the reference ground plane. The EUT is connected to AC-Power line through a Line Impedance Stabilization Network (LISN) to accommodate a 50  $\Omega$ /50  $\mu$ H coupling impedance for the measurement system. The EUT control PC is considered as a peripheric and therefore is connected to a second LISN which has the measurement port connected to a 50 ohms impedance.

Each measurement is done for each current-carrying conductor (Line and Neutral) at the end plug of the EUT power cord. The EUT is tested for several transmission modes (frequency channel, modulation, etc.) and the result providing the maximum measured emission is reported.

The exploratory measurement is done over the frequency range from 150 kHz to 30 MHz, while the measurement receiver is recording the Peak and Average signal at 10 kHz steps in Max Hold mode. The cables manipulation is performed within the range of likely configurations to determine the maximum emission. Once the EUT cable configuration, arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is found the six highest AC power-line conducted emissions relative to 20 dB of the limit are reported as the final measurement. If fewer than six emission frequencies are within 20 dB of the limit, the noise level is reported. For the final measurement, the measurement receiver records the Quasi Peak values with 9 kHz resolution bandwidth and the average values with 10 kHz resolution bandwidth.

The reported results correspond to the configuration of the worst case spurious level detected among all modes.

### EUT arrangement for AC power-line conducted emission tests

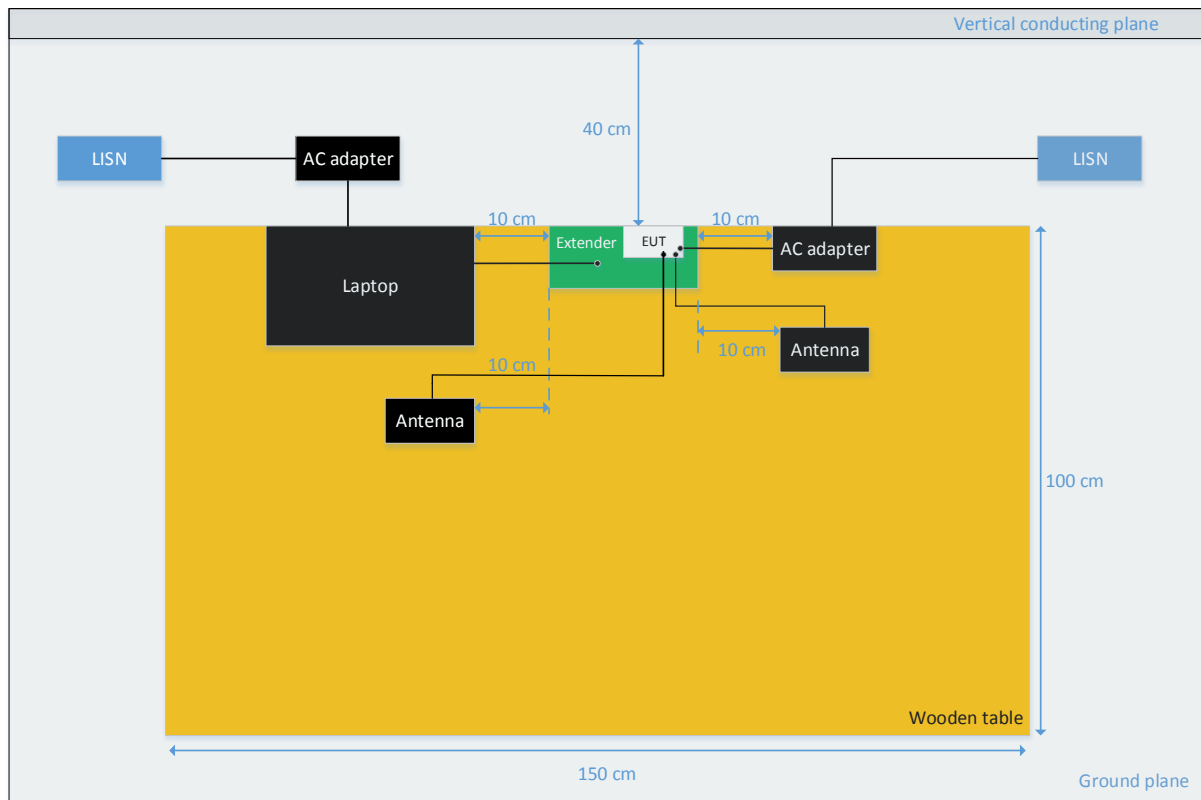

#### Sample Calculation:

The measured level at the spectrum analyzer in dBuV is corrected by a transducer factor taking into account the losses of the RF cable and the LISN as follows:

$$\text{Conducted Emission level (dBuV)} = \text{SA}_{\text{Level}} + \text{RFCable}_{\text{Losses}} + \text{LISN}_{\text{Losses}}$$

Where:

$\text{SA}_{\text{Level}}$  is the voltage level displayed on the measurement receiver, in dBuV.

$\text{RFCable}_{\text{Losses}}$  is the value of the cable losses between the LISN and the measurement receiver, in dB.

$\text{LISN}_{\text{Losses}}$  is the value of the insertion losses of the LISN, in dB.

**Test Results:**
**150kHz – 30MHz, all modes**
**AC power-line conducted – Phase L1**

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBµV	dBµV	dBµV	dB
0.16	53.1	---	65.7	12.6
0.16	---	29.5	55.8	26.3
0.37	44.9	---	59.6	14.7
0.37	---	29.0	49.6	20.6
3.95	39.3	---	56.0	16.7
3.96	---	26.8	46.0	19.2
7.47	42.9	---	60.0	17.1
7.35	---	29.4	50.0	20.6
13.56	54.0	---	60.0	6.0
13.56	---	40.1	50.0	9.9
18.62	37.8	---	60.0	22.2
18.55	---	26.2	50.0	23.8

Note: The emissions found do not change with the modulation and/or frequency.

**AC power-line conducted – Neutral N**

Frequency	Max Peak	Avg	Limit	Margin
MHz	dBµV	dBµV	dBµV	dB
0.16	54.1	---	65.7	11.6
0.16	---	27.8	55.7	27.9
0.38	41.7	---	59.4	17.7
0.37	---	27.6	49.7	22.1
3.76	40.3	---	56.0	15.7
3.86	---	30.5	46.0	15.5
8.24	43.0	---	60.0	17.0
8.16	---	28.7	50.0	21.3
13.58	42.7	---	60.0	17.3
13.55	---	34.1	50.0	15.9
23.58	32.5	---	60.0	27.5
23.73	---	18.5	50.0	31.5

Note: The emissions found do not change with the modulation and/or frequency.



**B.5 Test Results Screenshot U-NII-2A**

**B.5.1 26dB Bandwidth**


**SISO-B, 802.11a, 6Mbps**

Channel 52




**SISO-B, 802.11n20, HT0**

Channel 52

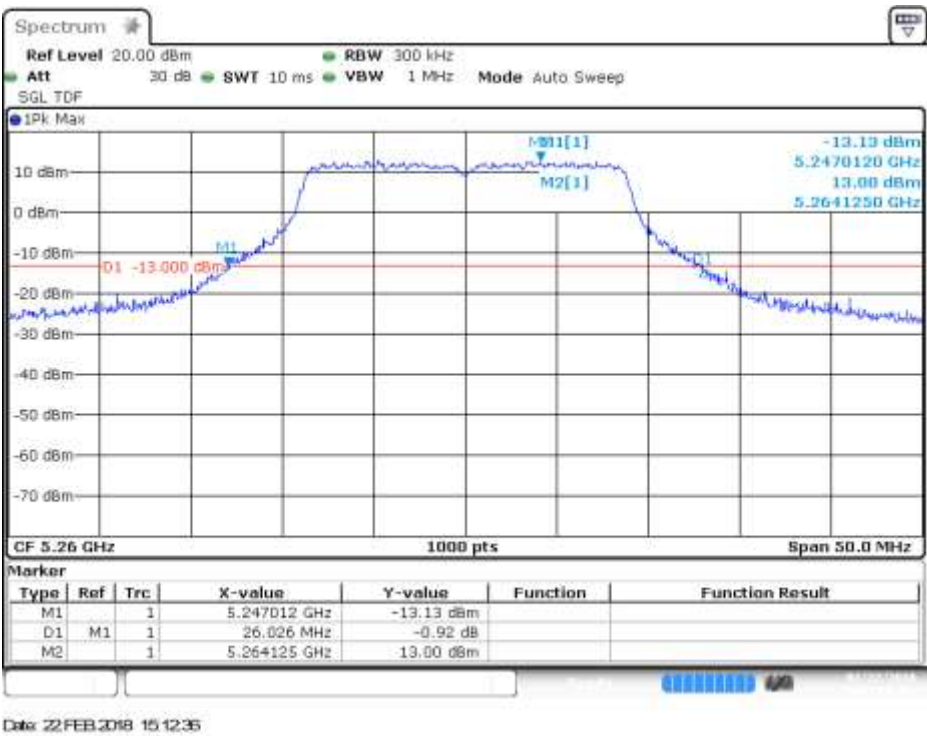


## SISO-B, 802.11n40, HT0

Channel 54F

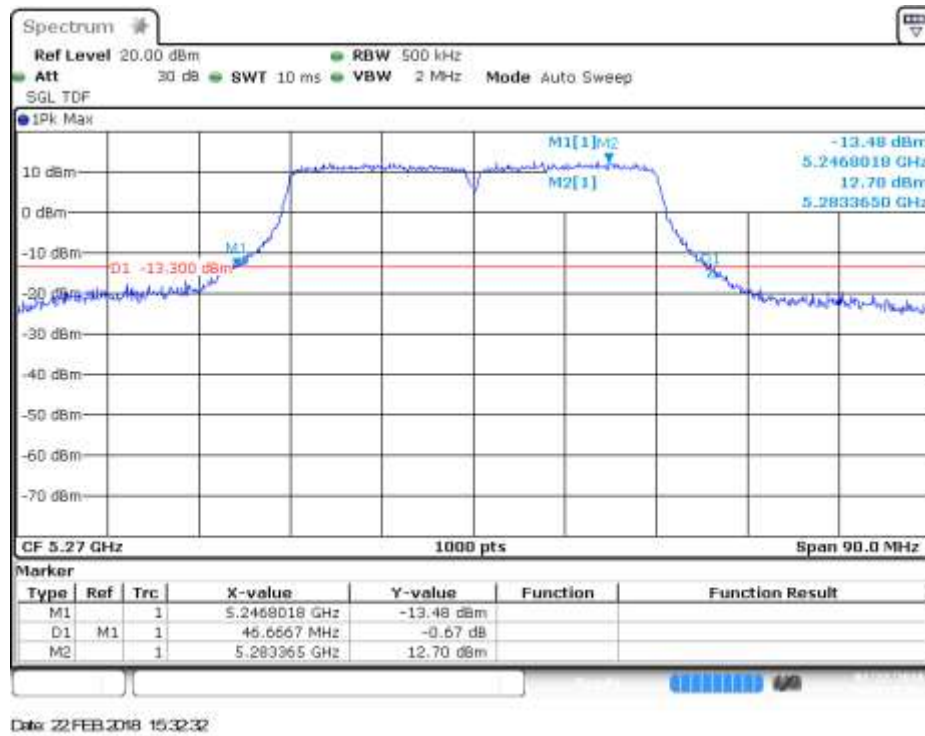


## MIMO-A, 802.11n20, HT8

Channel 56

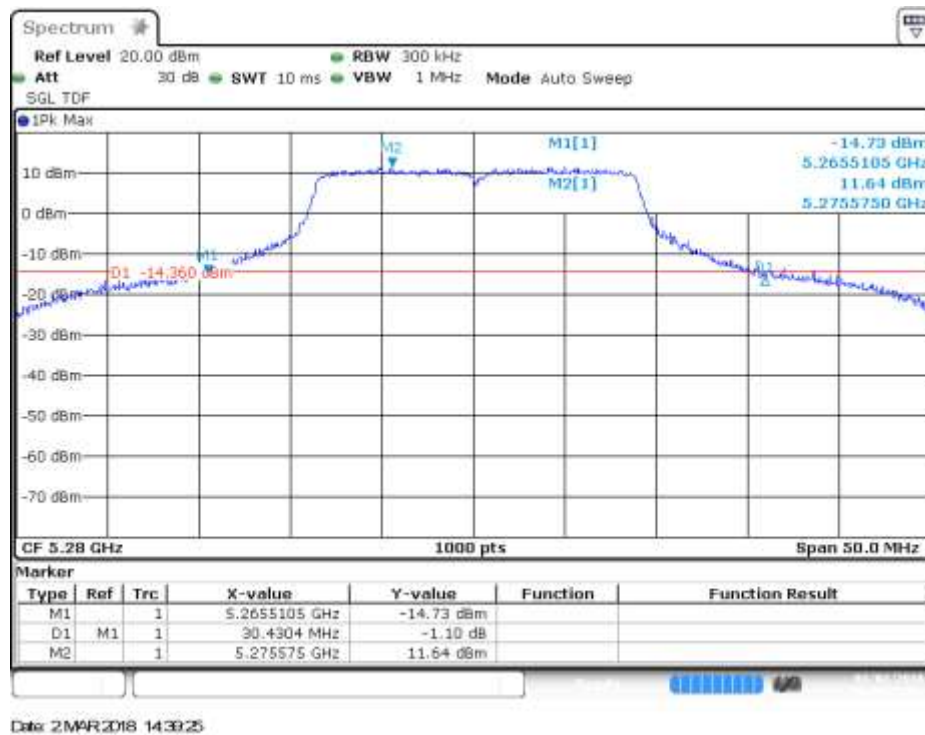


## MIMO-A, 802.11n40, HT8

Channel 54F

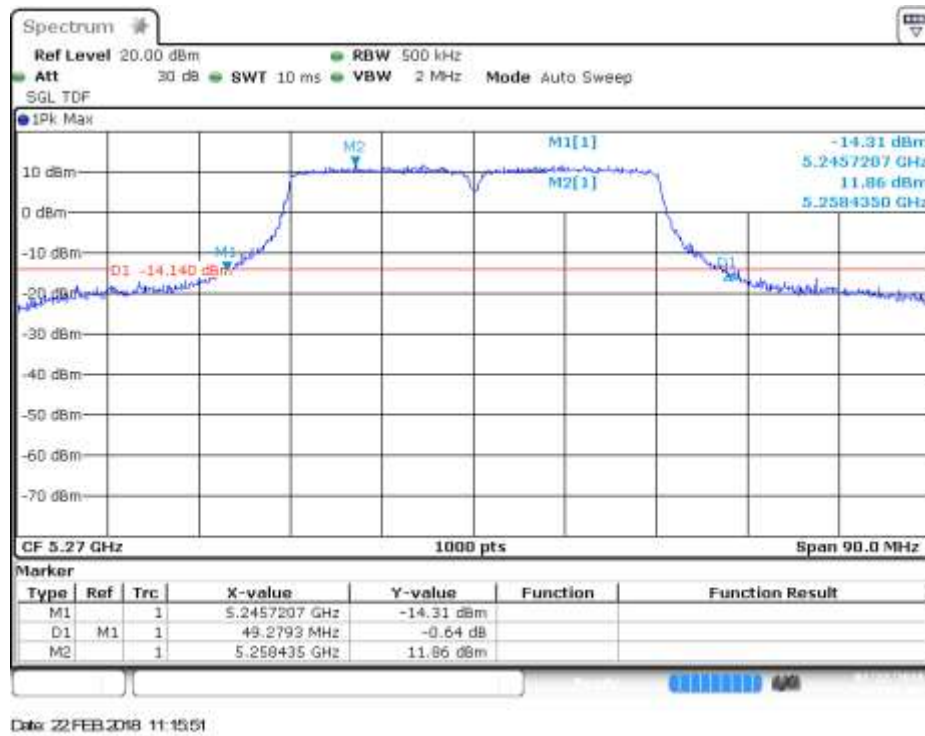


## SISO-A, 802.11ac80, VHT0

Channel 58ac80

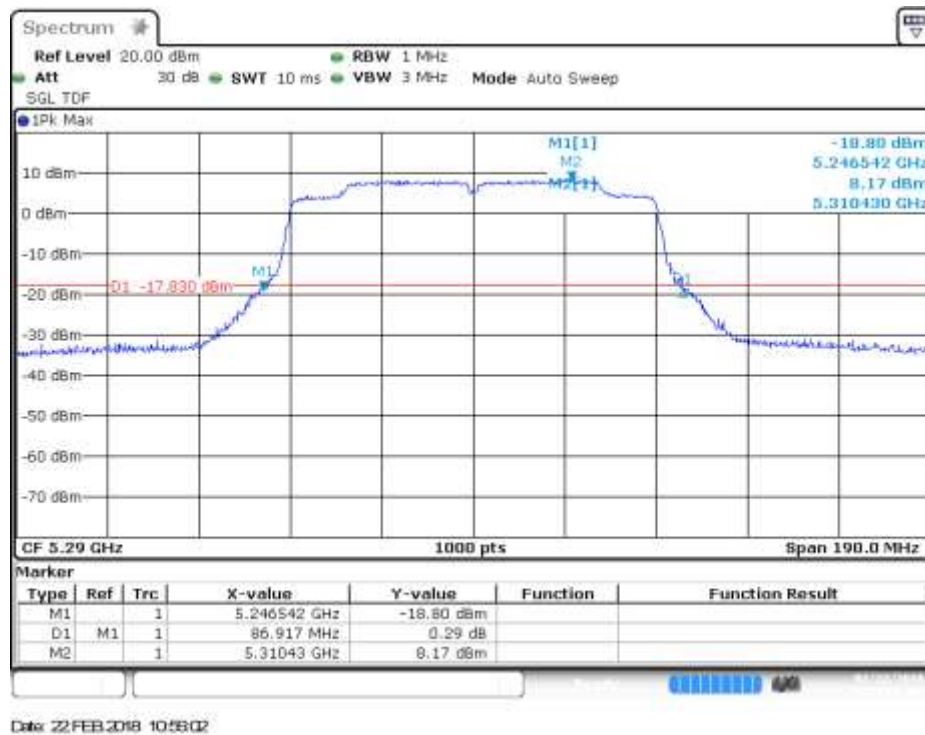

## MIMO-A, 802.11ac80, VHT0

Channel 58ac80

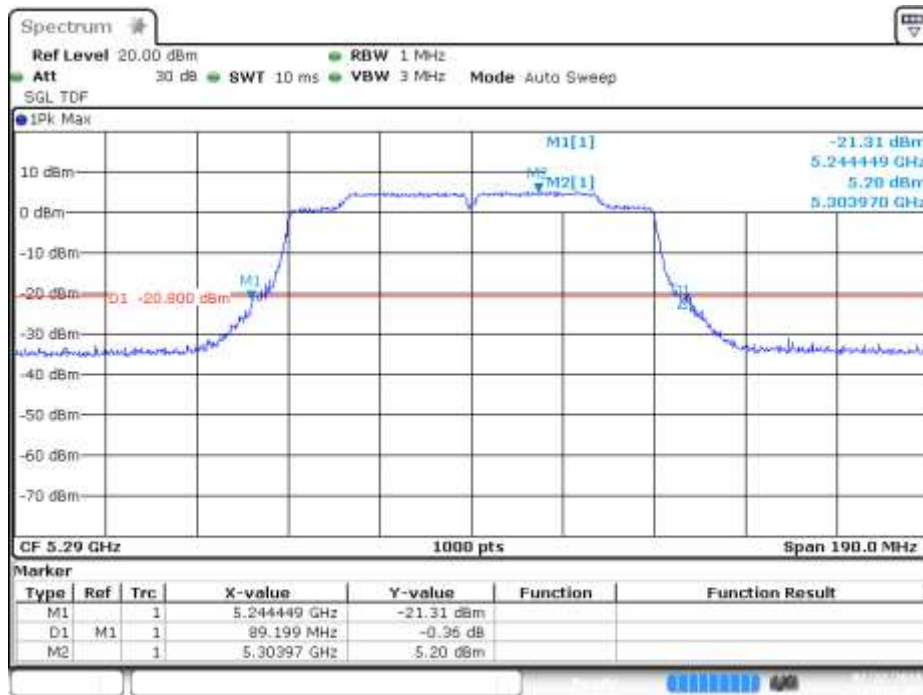


Date: 22 FEB 2018 11:38:18

## B.5.2 99% Bandwidth


### SISO-A, 802.11a, 6Mbps

Channel 56

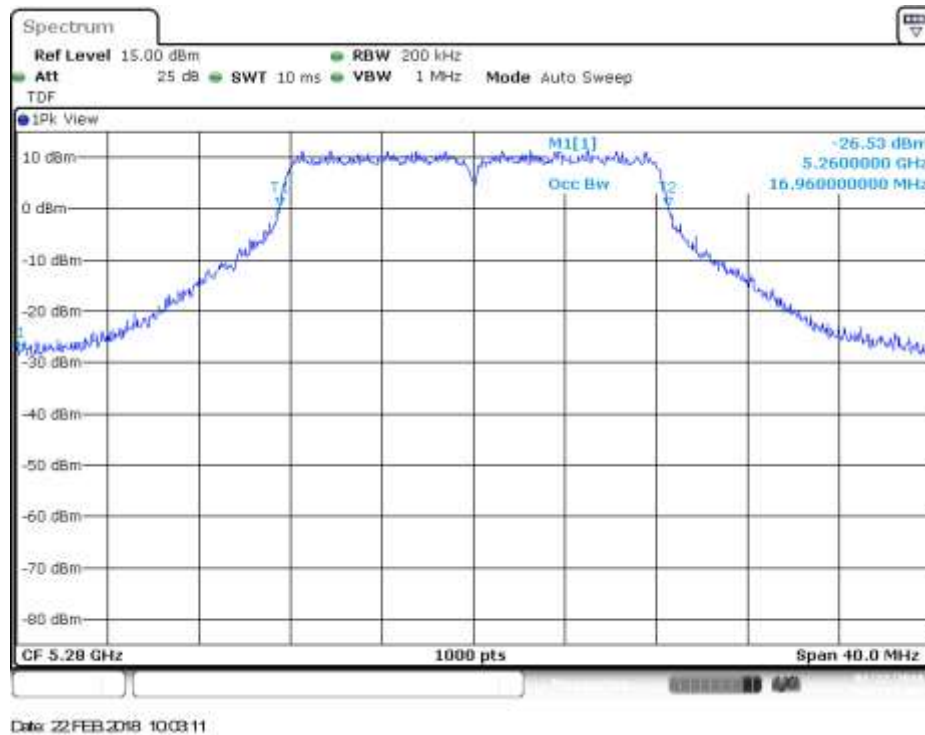


### SISO-B, 802.11n20, HT0

Channel 52

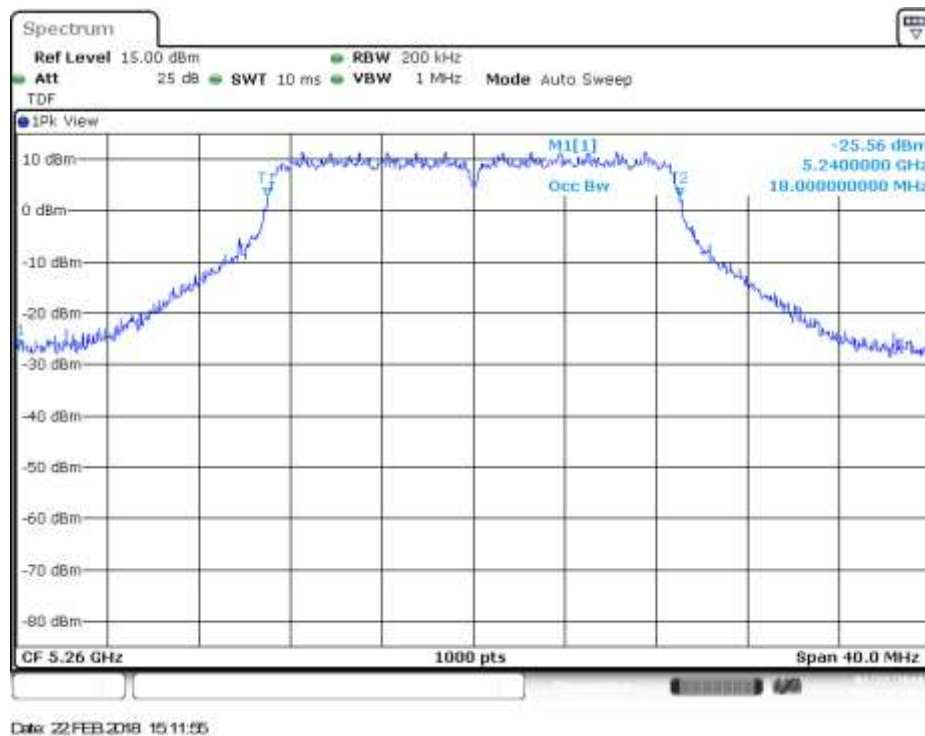


## SISO-A, 802.11n40, HT0

Channel 54F

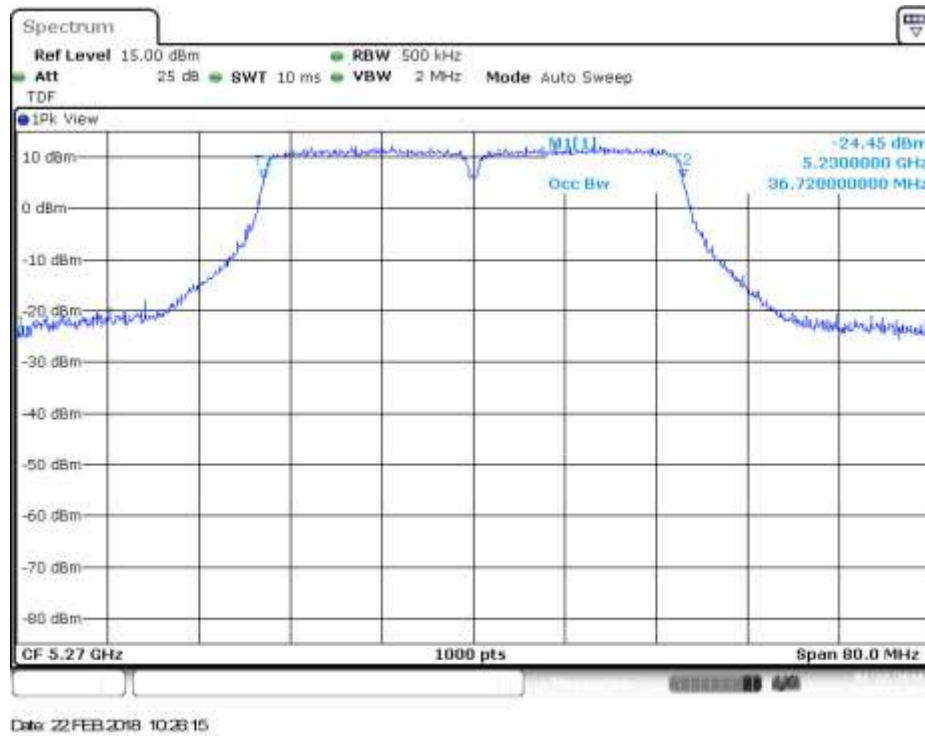

## MIMO-A, 802.11n20, HT8


Channel 56

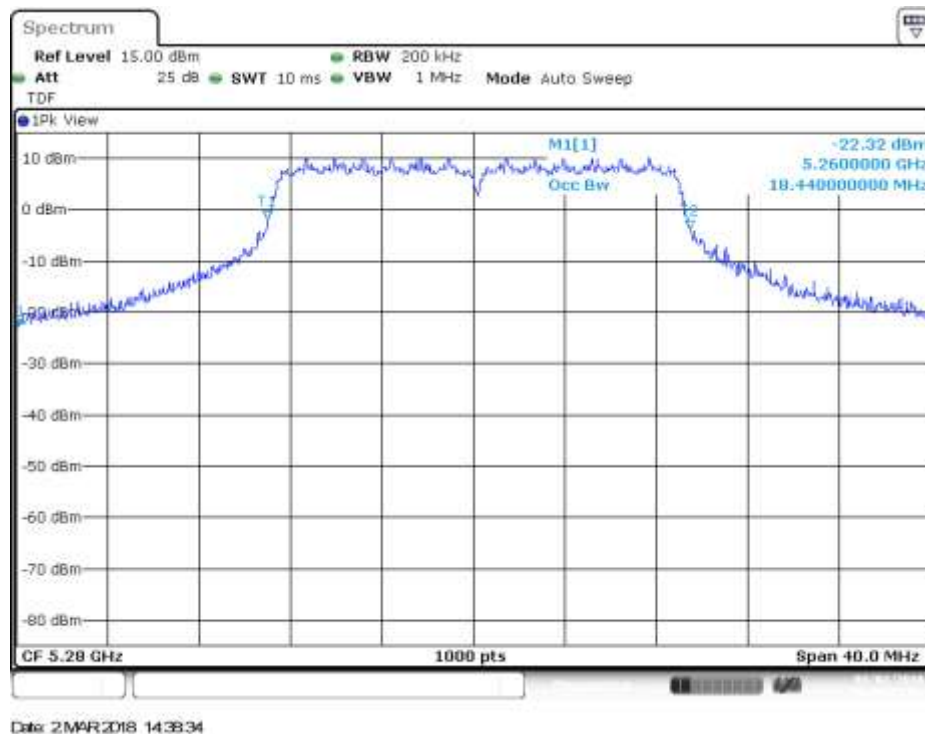




## MIMO-A, 802.11n40, HT8

Channel 54F

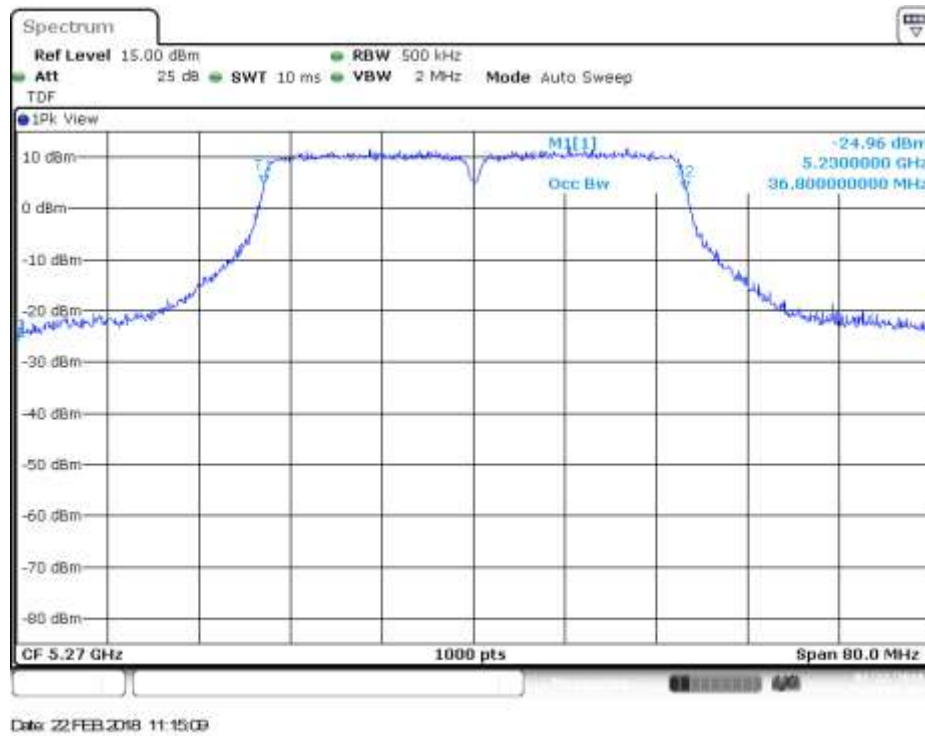


## SISO-A, 802.11ac80, VHT0

Channel 58ac80

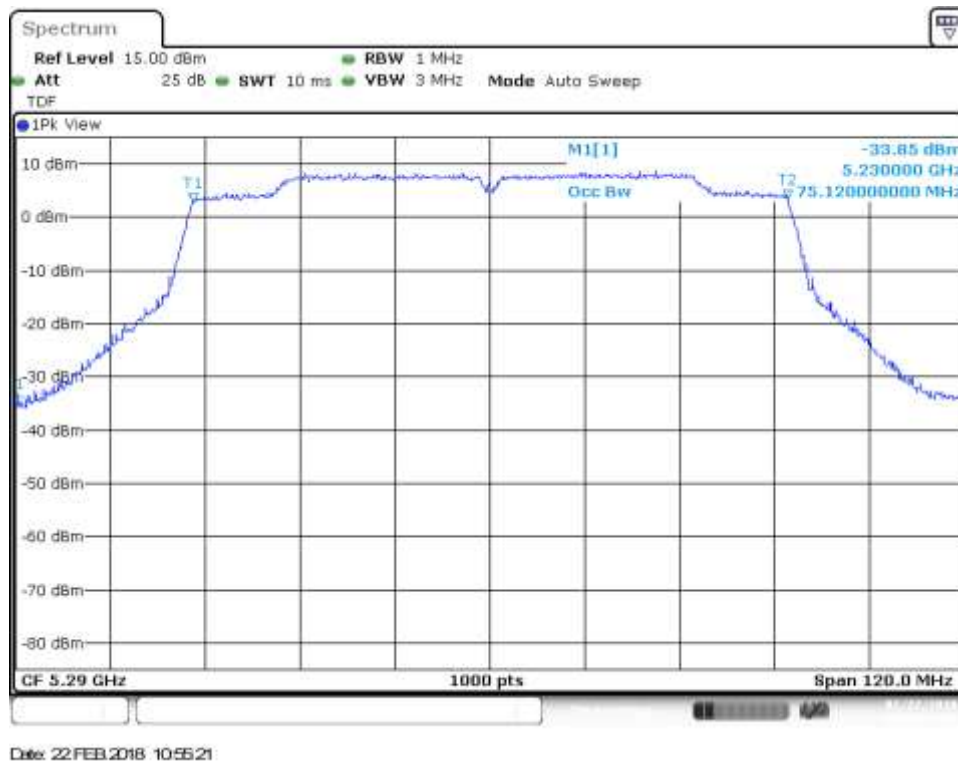

## MIMO-A, 802.11ac80, VHT0

Channel 58ac80

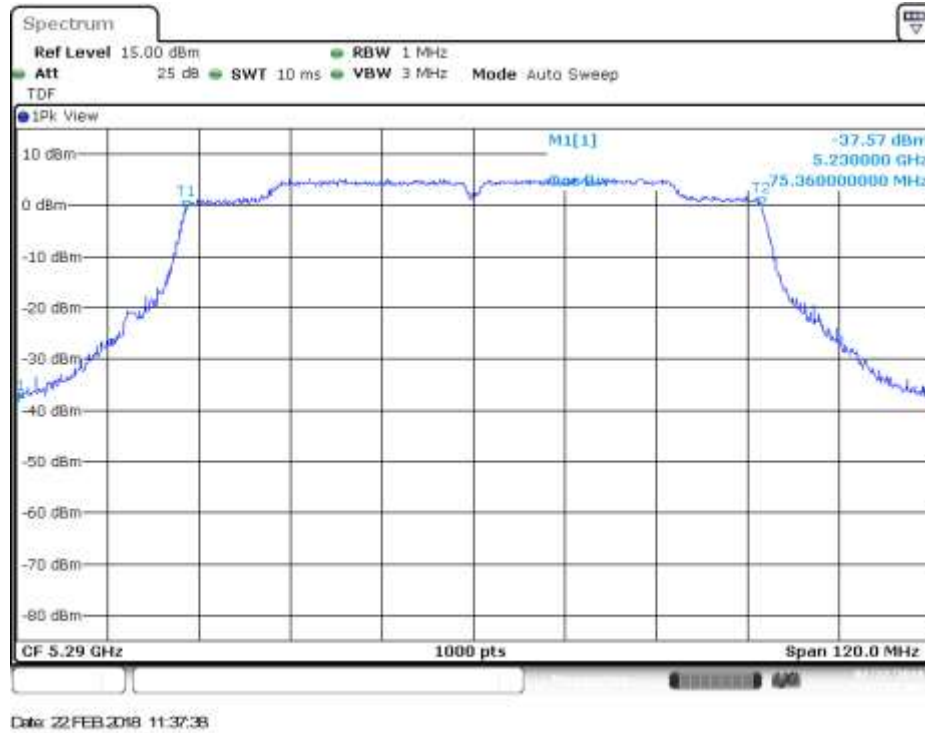





### B.5.3 Power Limits. Maximum Output power & Peak power spectral density

## SISO-B, 802.11a, 6Mbps

Channel 56

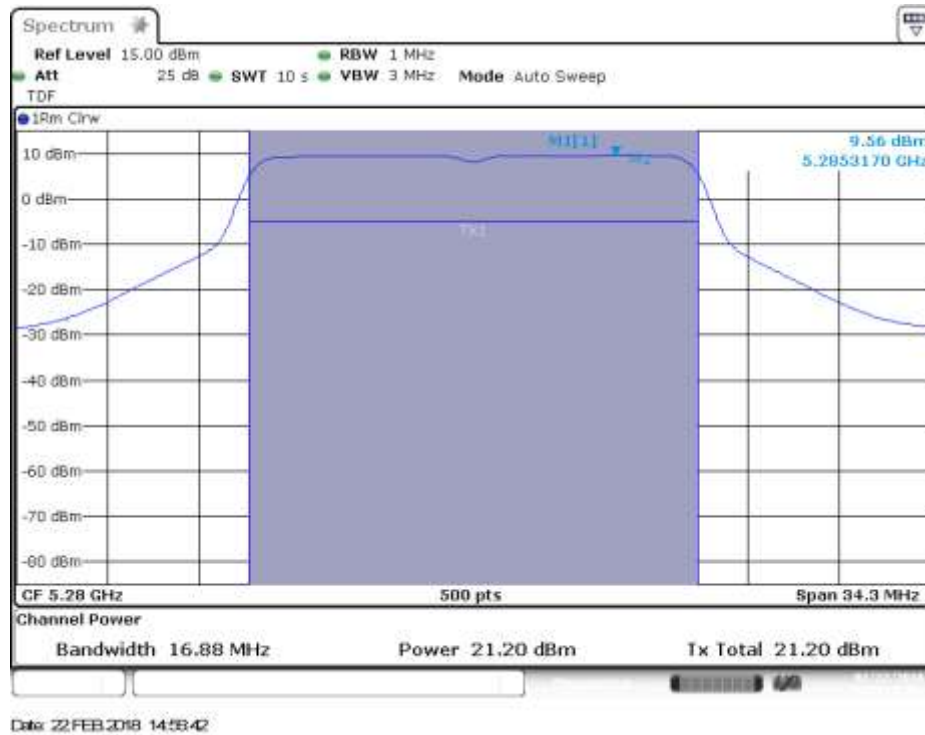


Channel 64

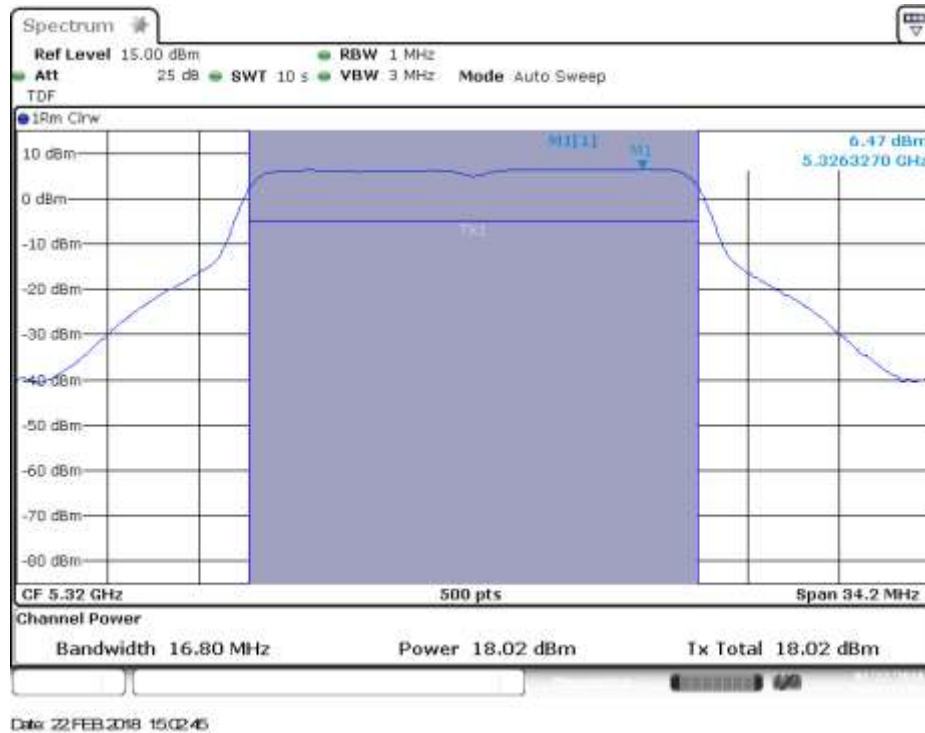


## SISO-B, 802.11n20, HT0

Channel 52

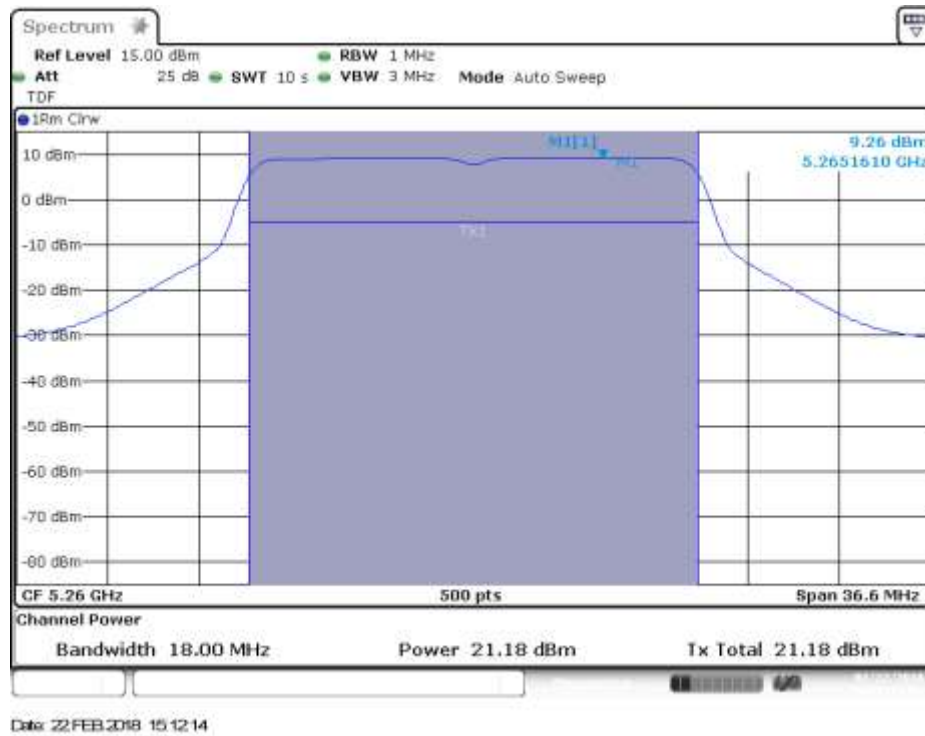


## SISO-A, 802.11n20, HT0

Channel 64

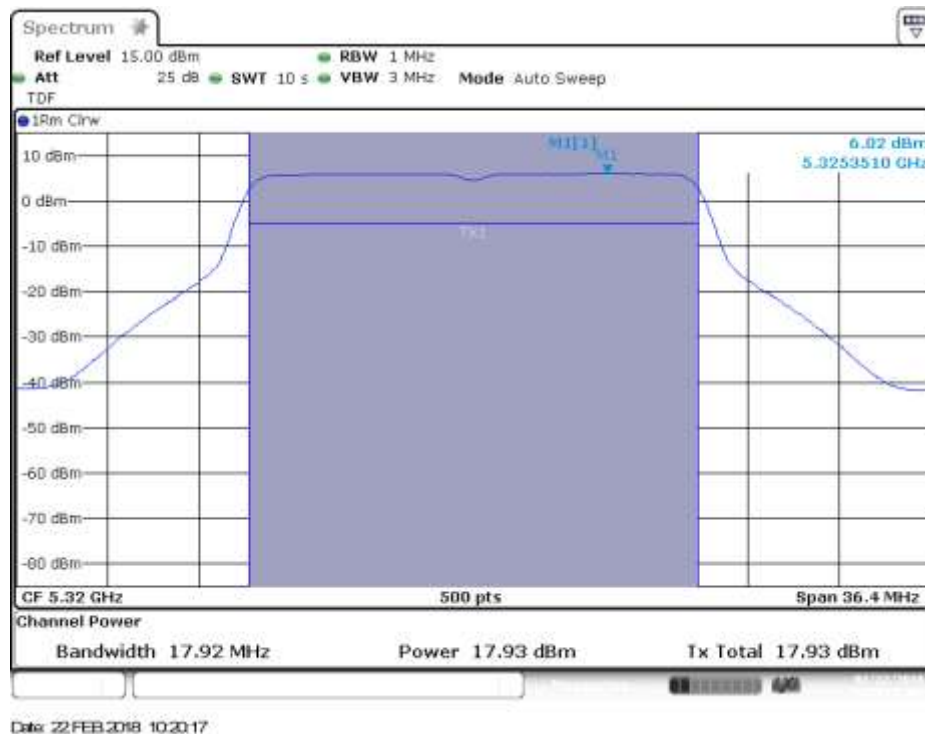


## SISO-B, 802.11n40, HT0

Channel 54F

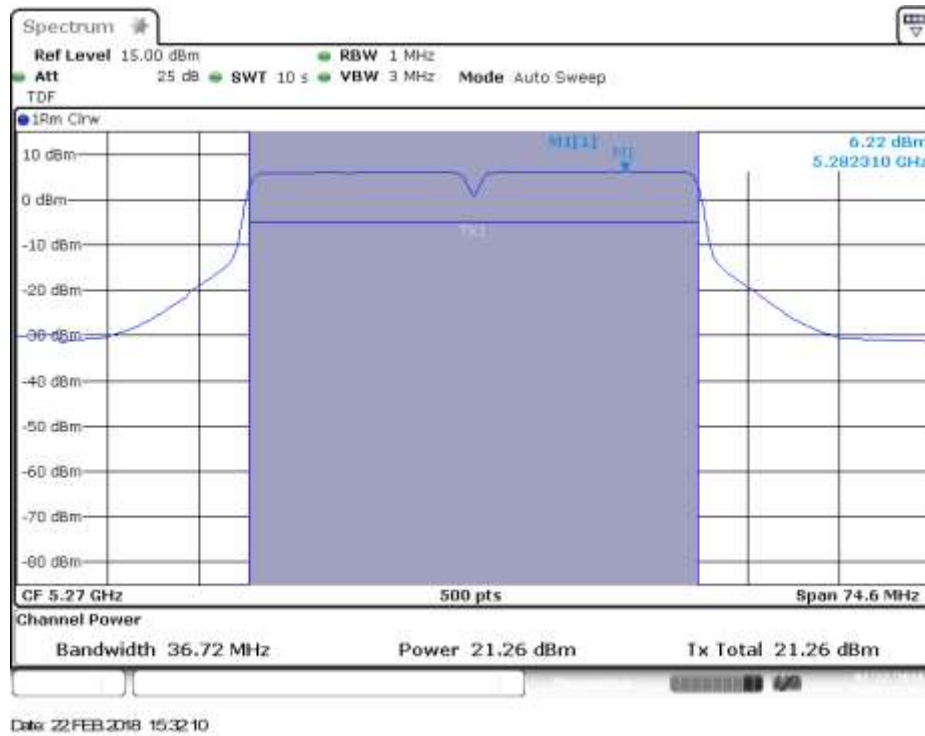


Channel 62F

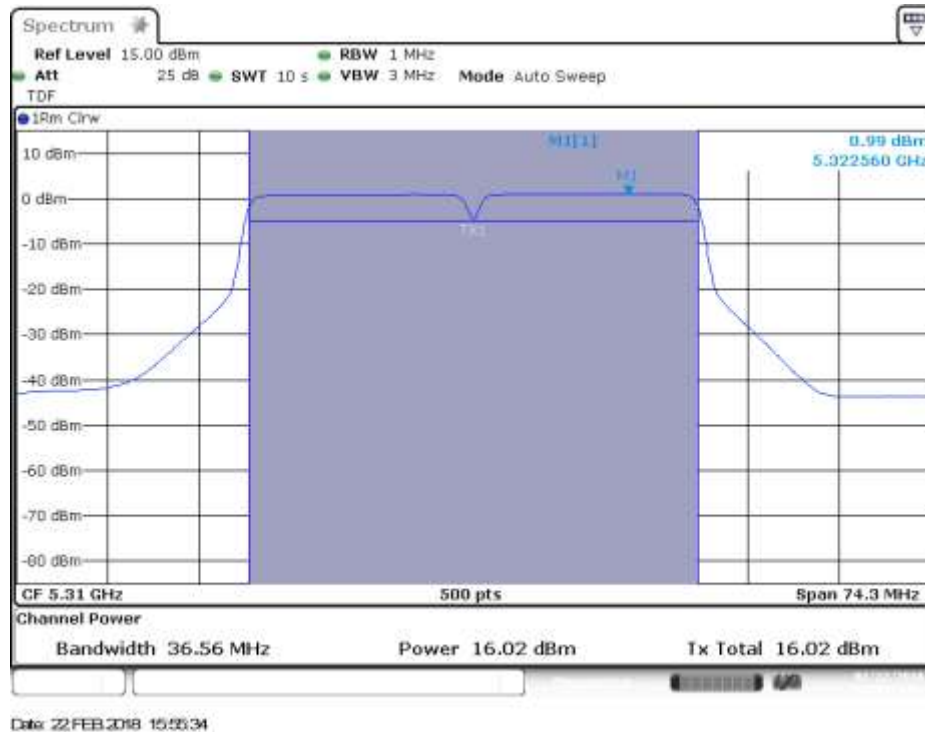


## MIMO-A, 802.11n20, HT8

Channel 56

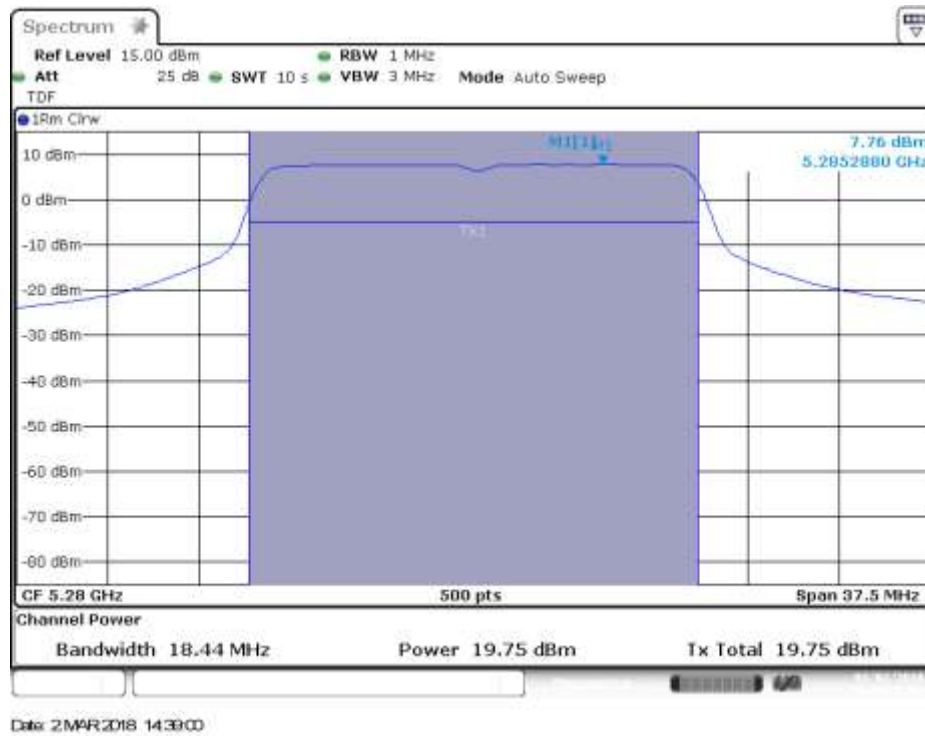


## MIMO-B, 802.11n20, HT8

Channel 56

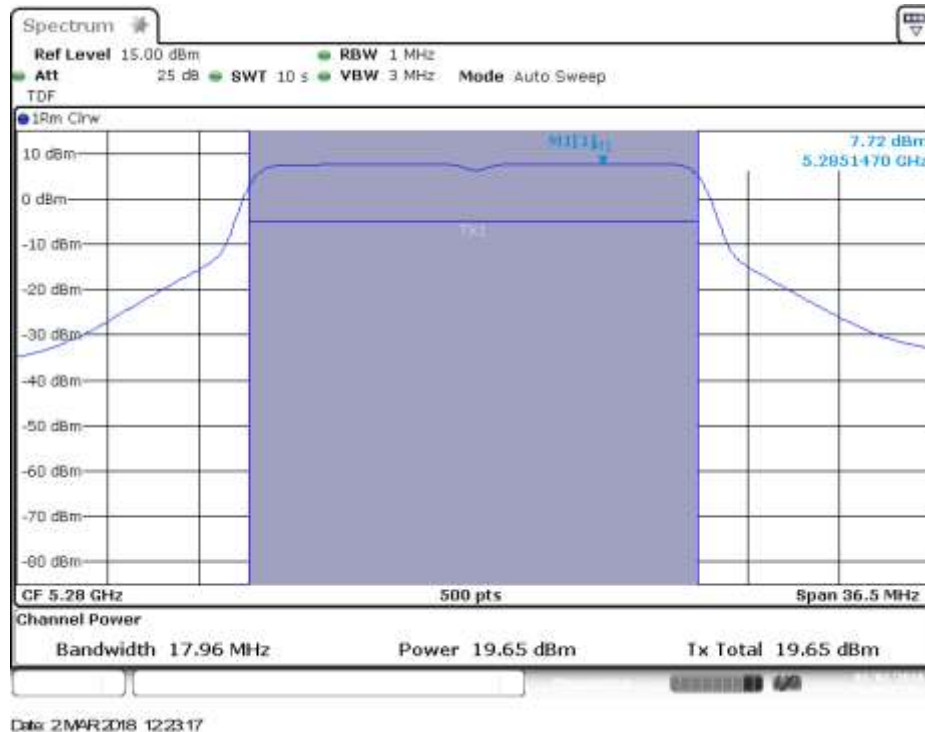


## MIMO-A, 802.11n20, HT8

Channel 64

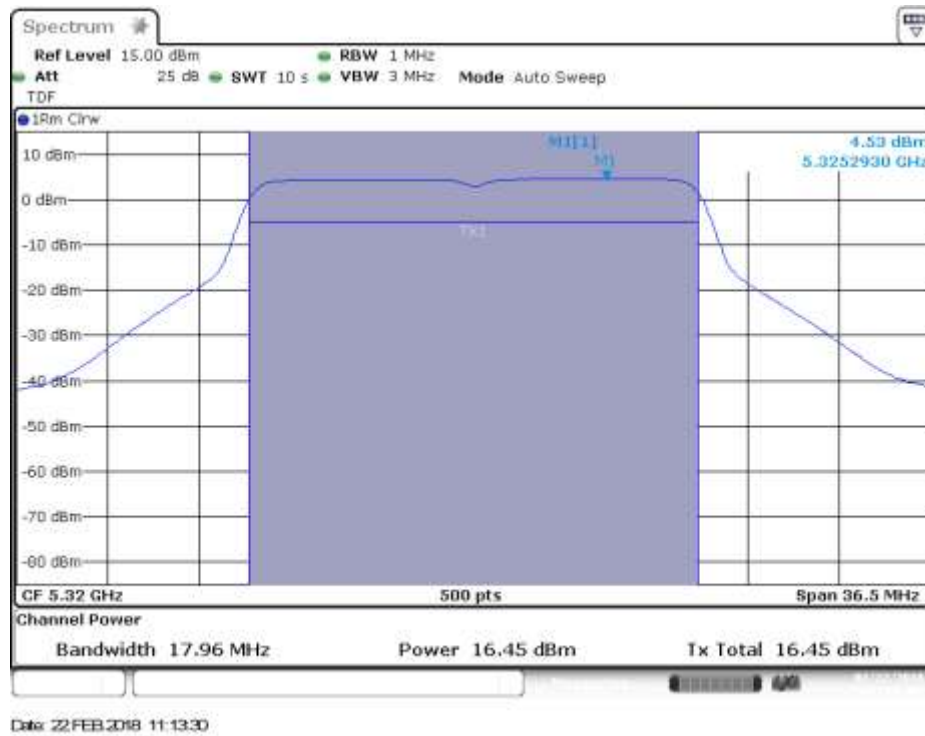


## MIMO-B, 802.11n20, HT8

Channel 64

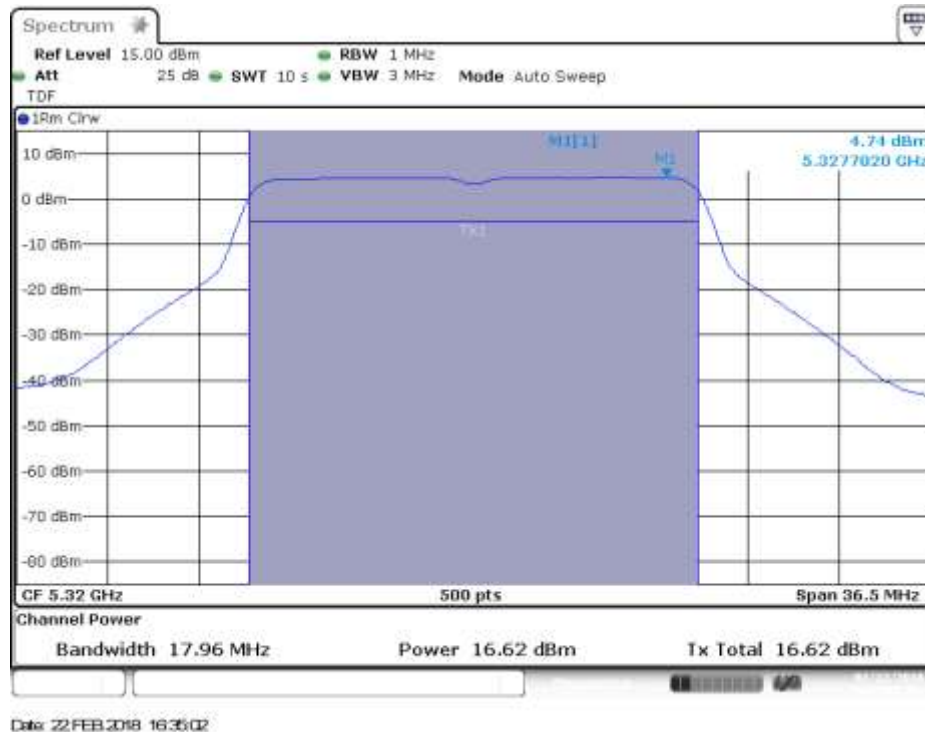


## MIMO-A, 802.11n40, HT8

Channel 54F

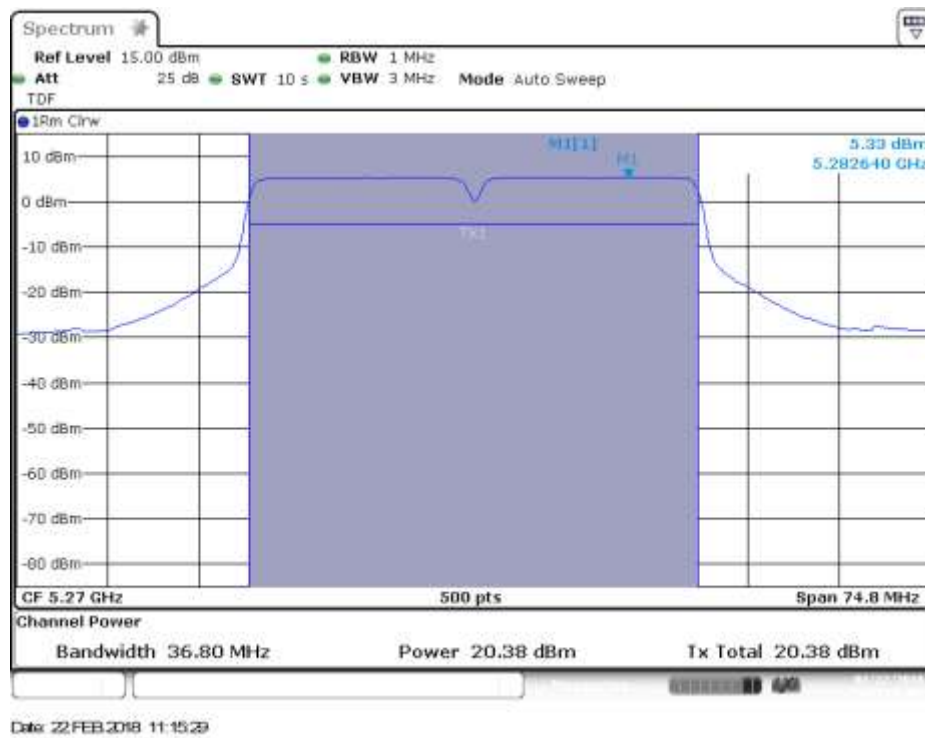


## MIMO-B, 802.11n40, HT8

Channel 54F

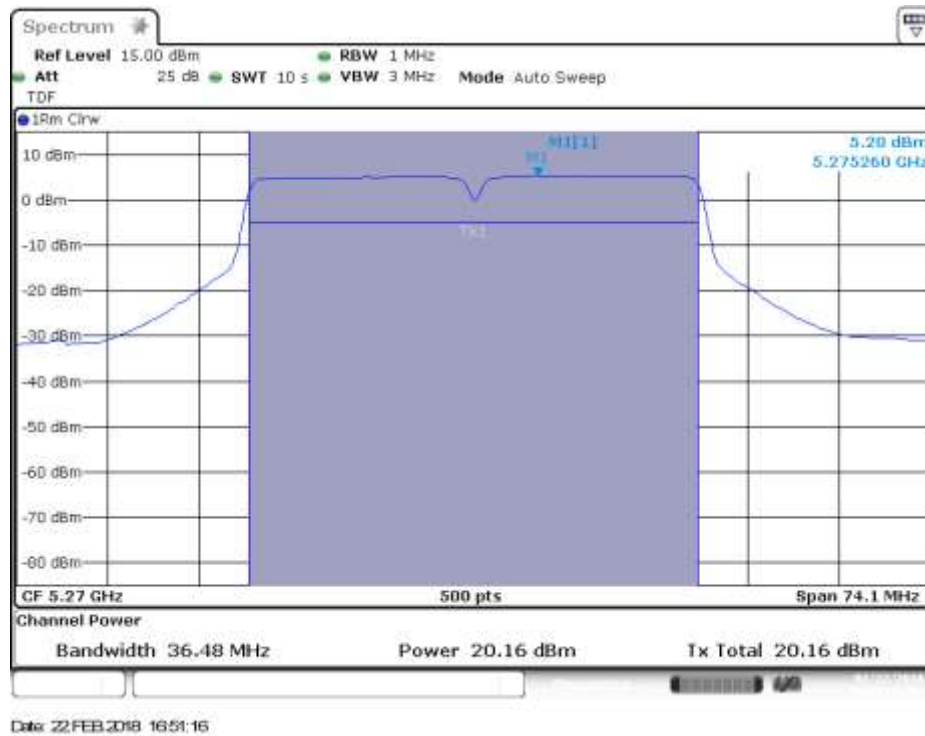


## MIMO-A, 802.11n40, HT8

Channel 62F

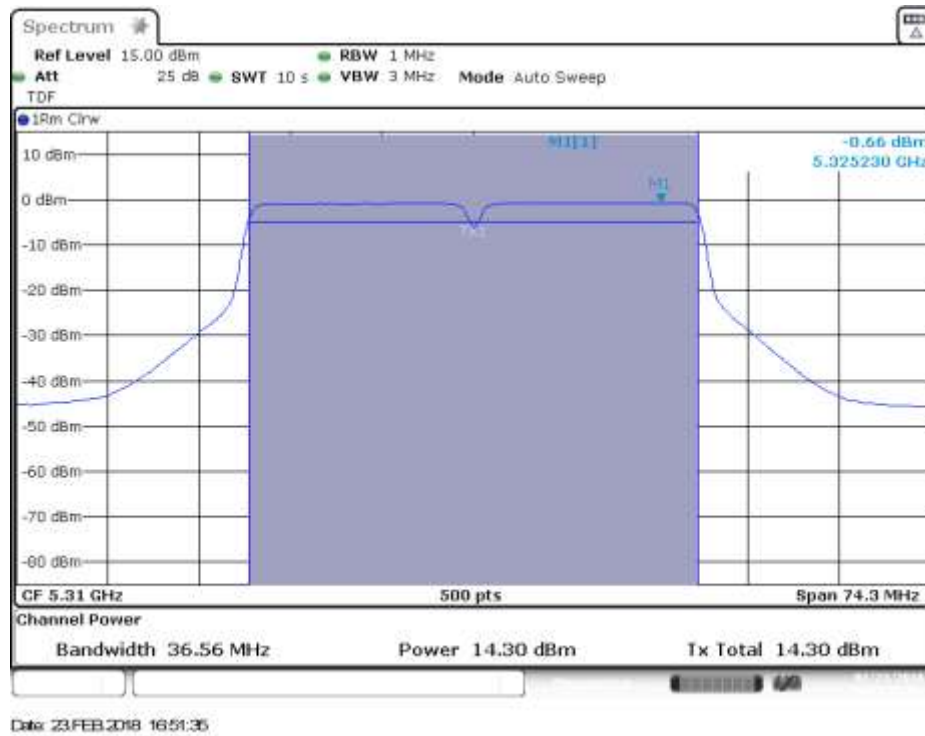

## MIMO-B, 802.11n40, HT8


Channel 62F

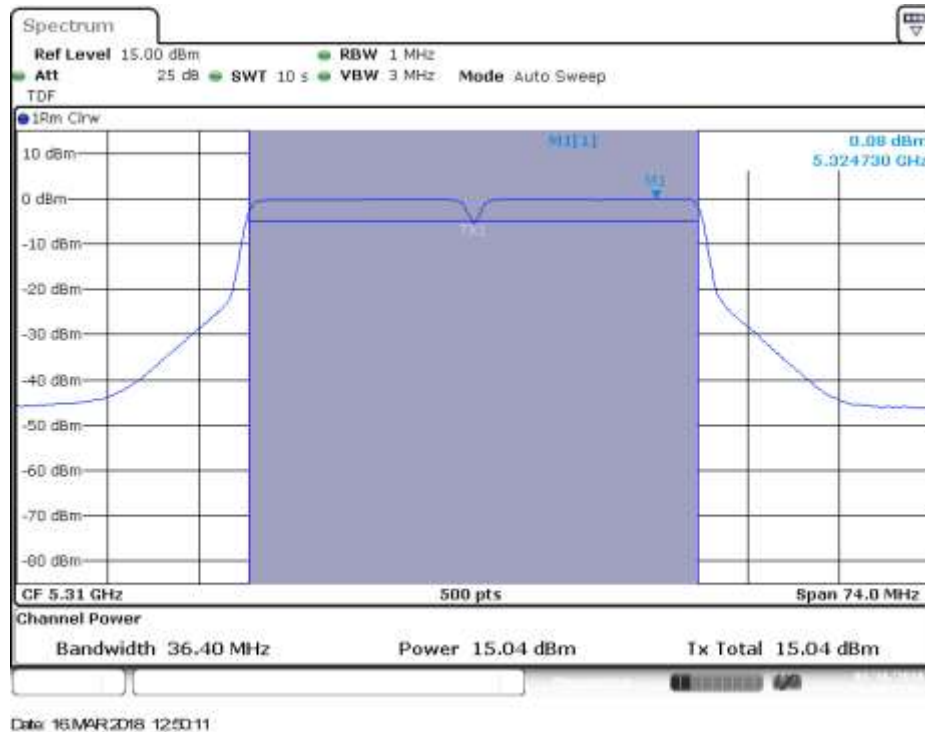




## SISO-A, 802.11ac80, VHT0

Channel 58ac80

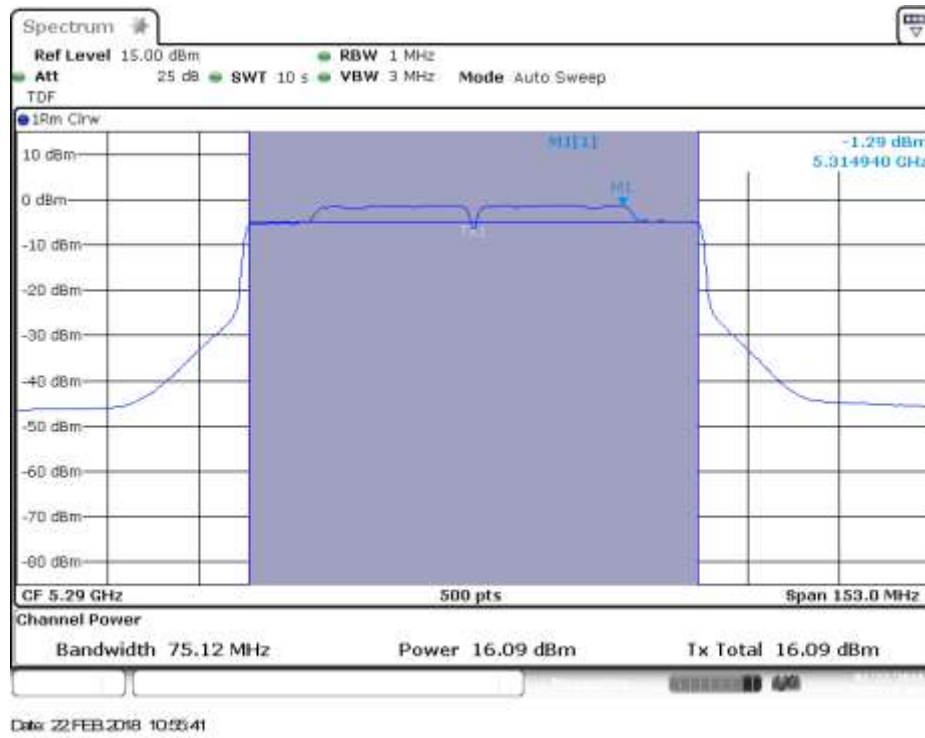

## SISO-B, 802.11ac80, VHT0


Channel 58ac80

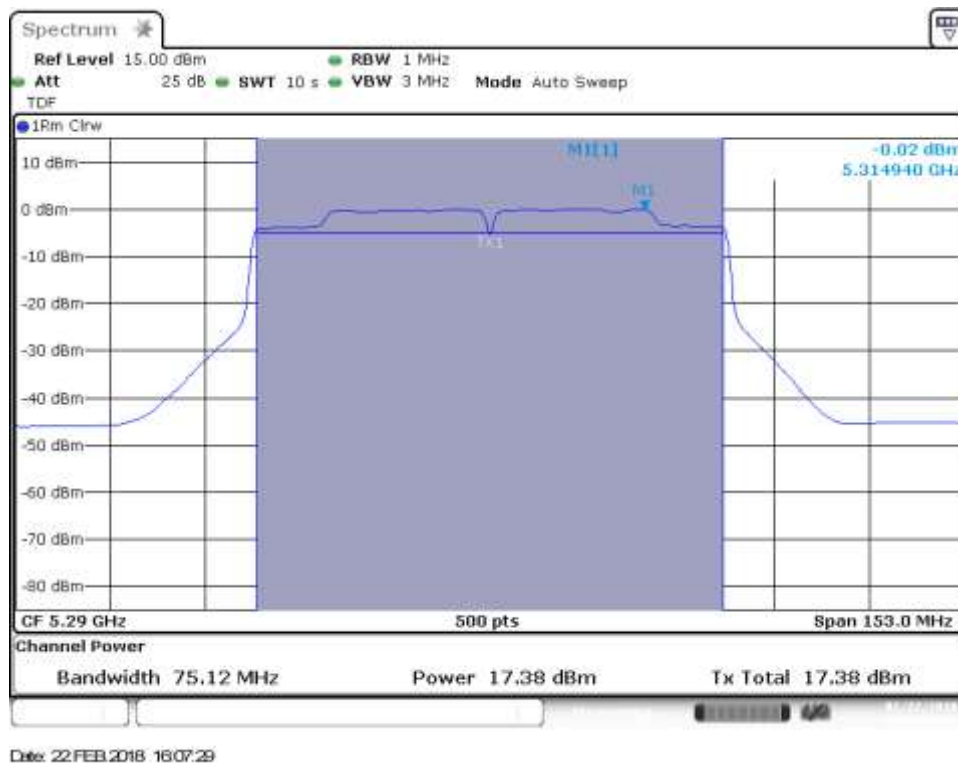




## MIMO-A, 802.11ac80, VHT0

Channel 58ac80

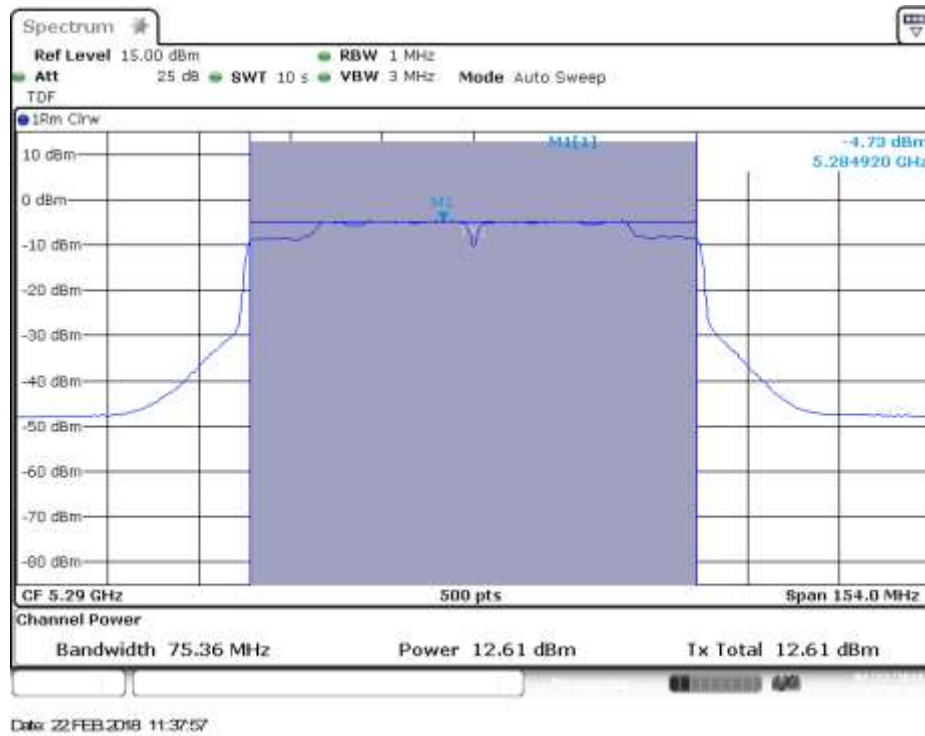

## MIMO-B, 802.11ac80, VHT0


Channel 58ac80

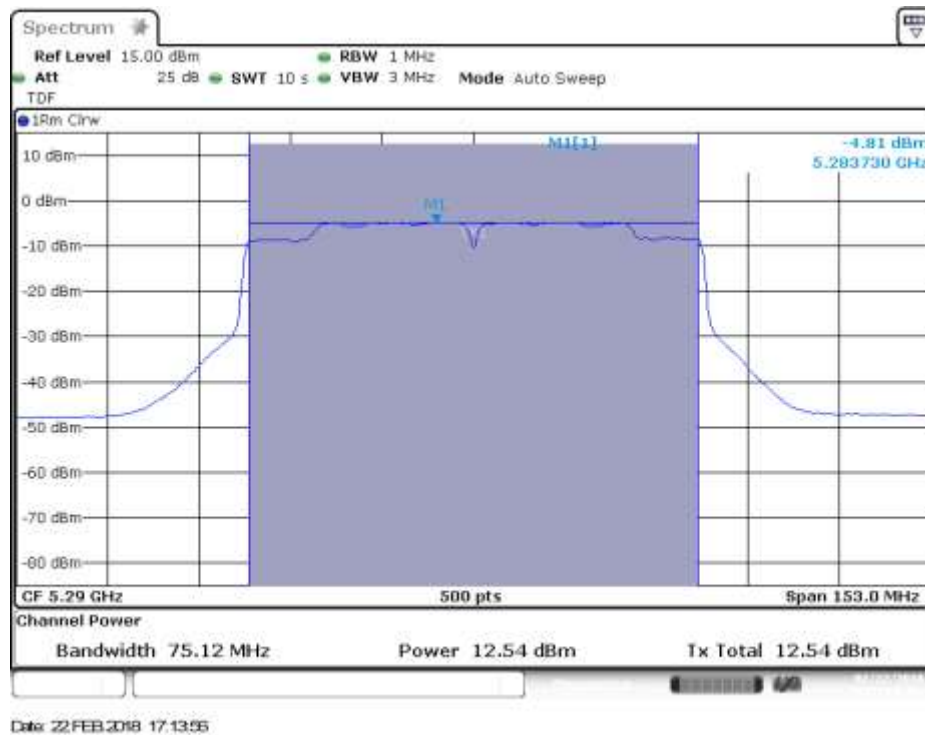

## B.5.4 Undesirable emissions limits : Band Edge (Conducted)

### 802.11a, 6Mbps – Chain A


#### BE High Freq Section, Peak, RMS – CH64

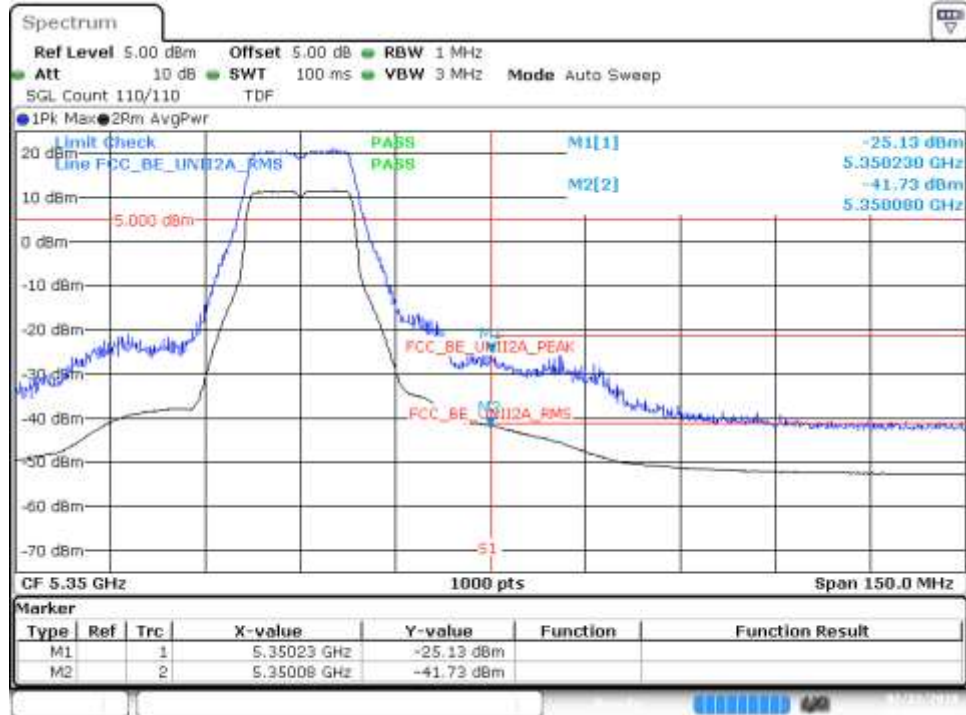

Date: 22 FEB 2018 10:03:04

### 802.11a, 6Mbps – Chain B


#### BE High Freq Section, Peak, RMS – CH64

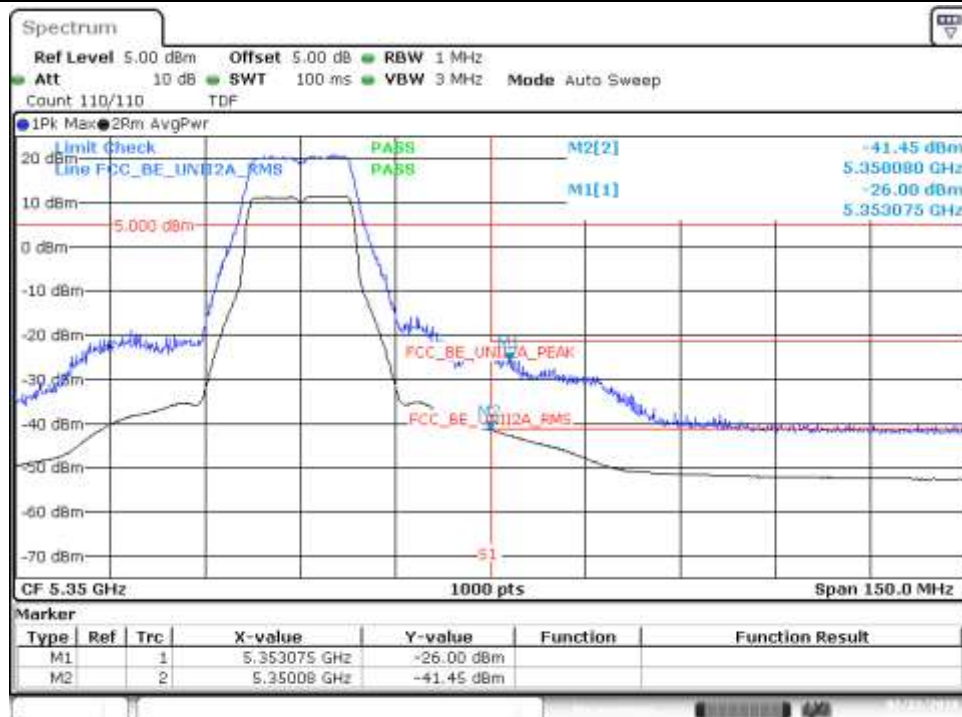

Date: 22 FEB 2018 15:02:01


## 802.11n20, HT0 (SISO) - Chain A

### BE High Freq Section, Peak, RMS – CH64

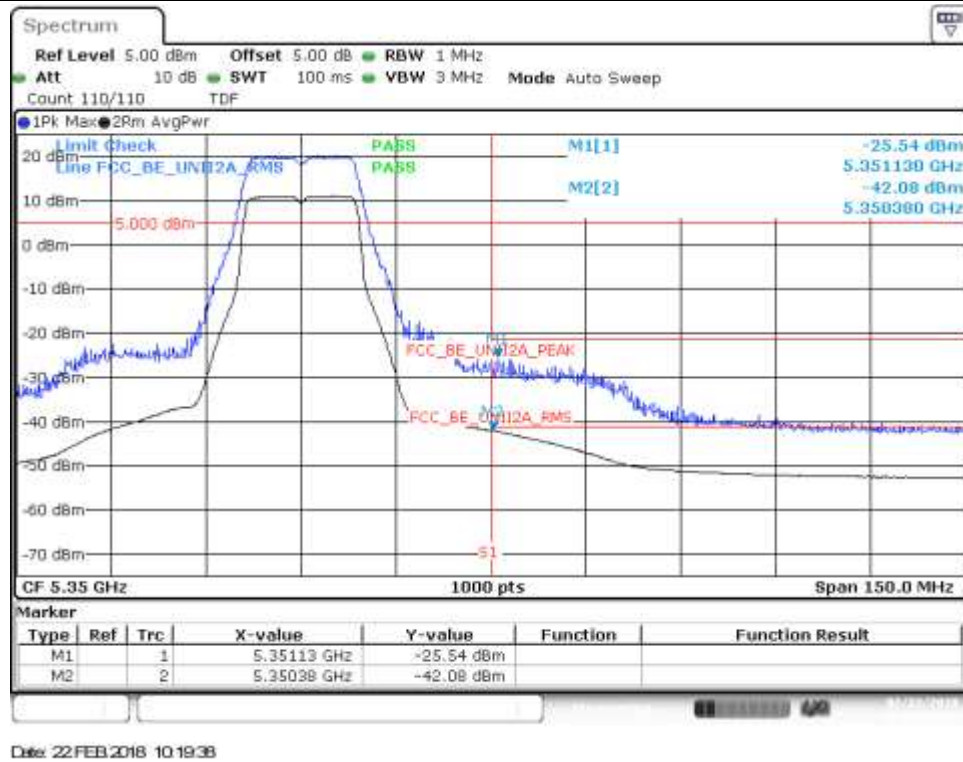


## 802.11n20, HT0 (SISO) - Chain B

### BE High Freq Section, Peak, RMS – CH64

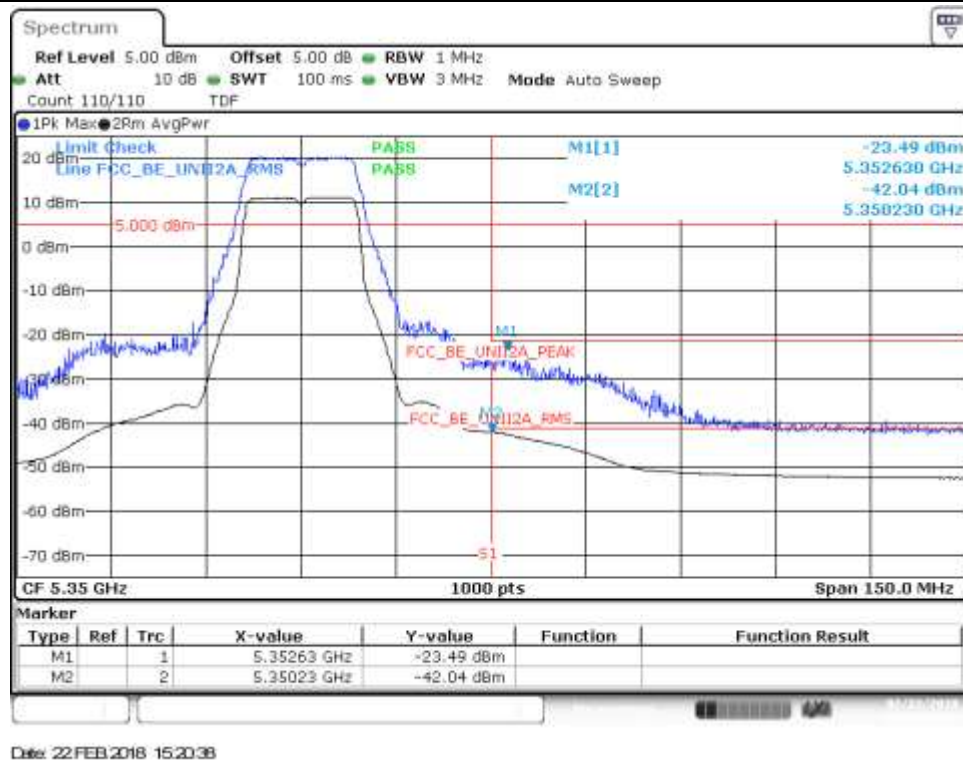


## 802.11n20, HT8 (MIMO) - Chain A

### BE High Freq Section, Peak, RMS – CH64

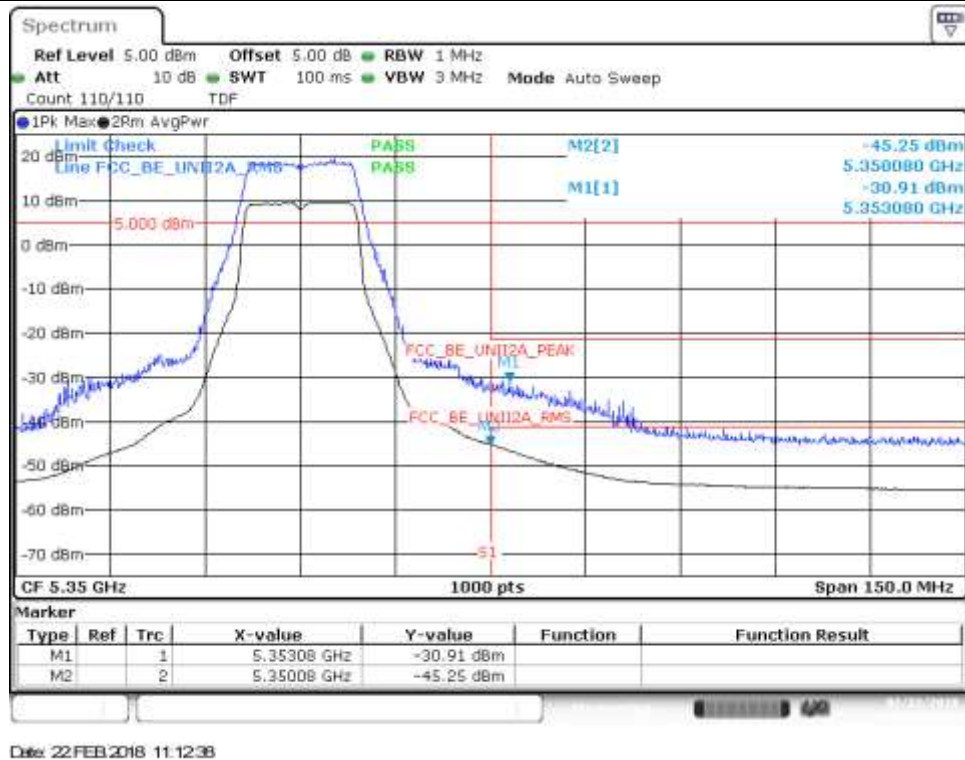


## 802.11n20, HT8 (MIMO) - Chain B

### BE High Freq Section, Peak, RMS – CH64

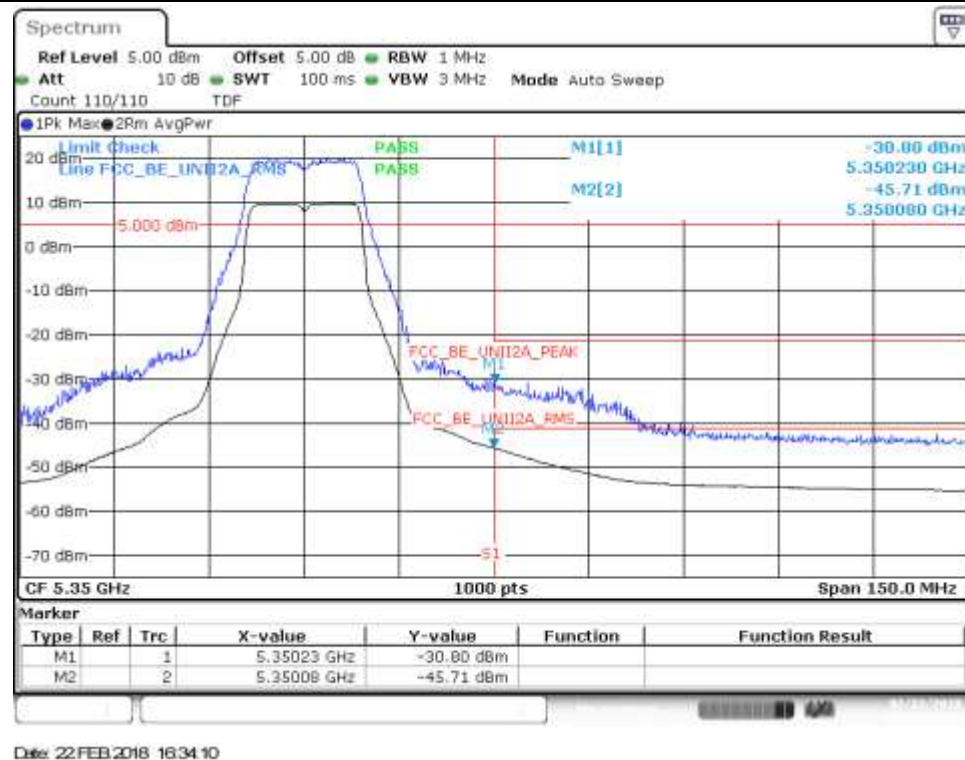

## 802.11n40, HT0 (SISO) - Chain A

### BE High Freq Section, Peak – CH62F

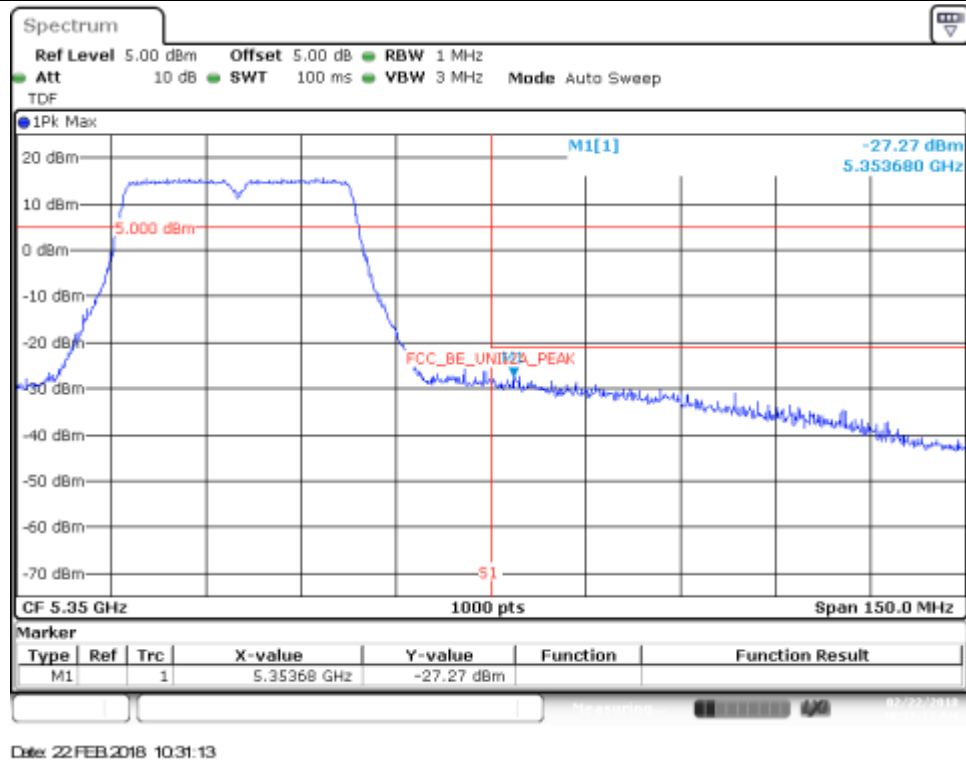


### BE High Freq Section, RMS – CH54F





## 802.11n40, HT0 (SISO) - Chain B

### BE High Freq Section, Peak – CH62F

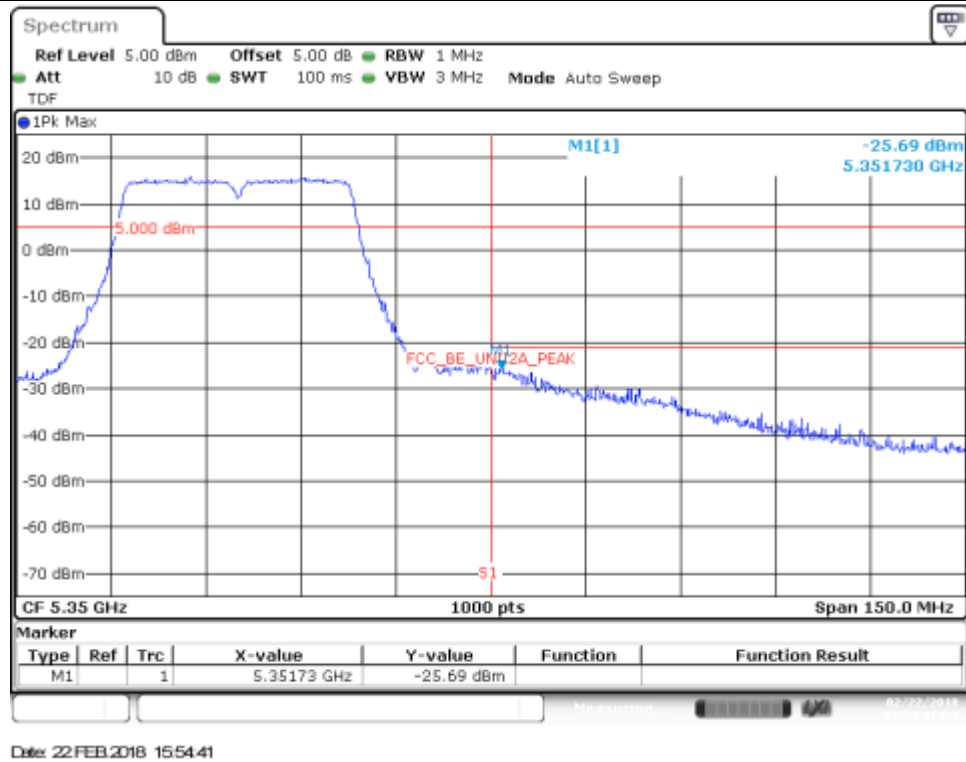


### BE High Freq Section, RMS – CH54F



## 802.11n40, HT8 (MIMO) - Chain A

### BE High Freq Section, Peak- CH62F

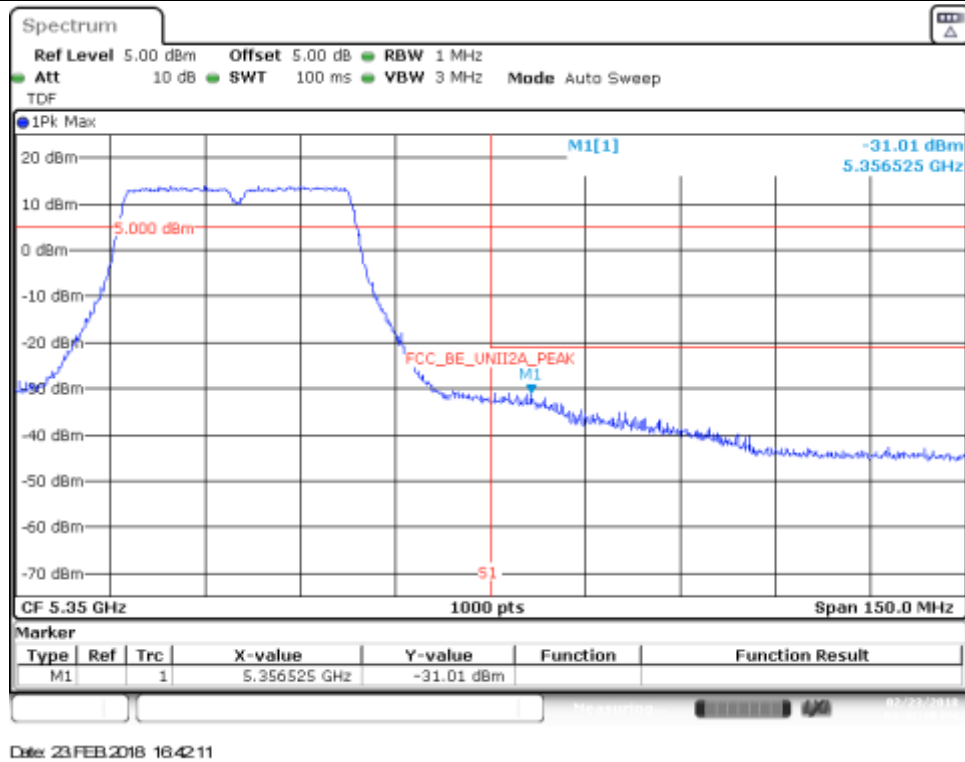


### BE High Freq Section, RMS - CH62F




## 802.11n40, HT8 (MIMO) - Chain B

### BE High Freq Section, Peak – CH62F

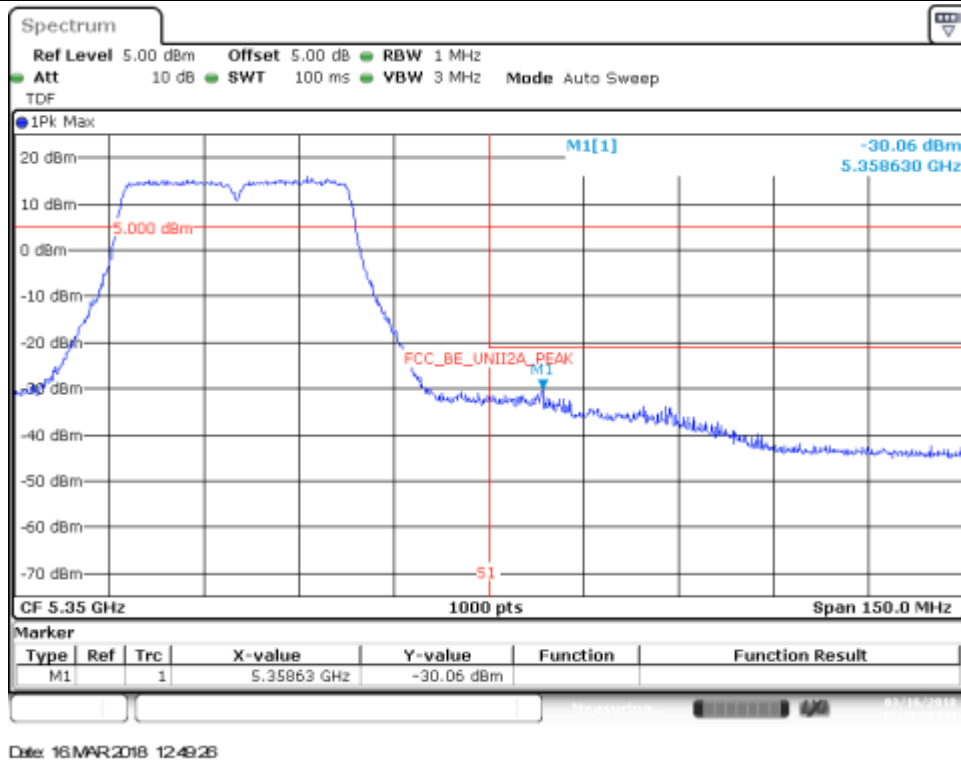


### BE High Freq Section, RMS – CH62F

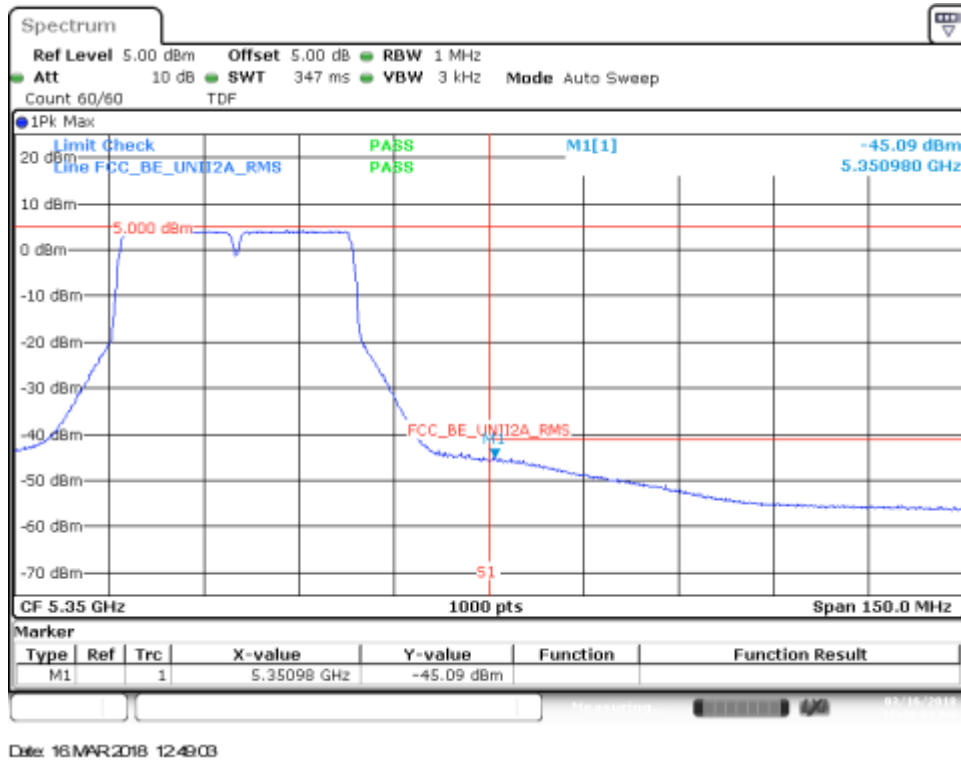



## 802.11ac80, VHT0 (SISO) - Chain A

### BE High Freq Section, Peak – CH58ac80

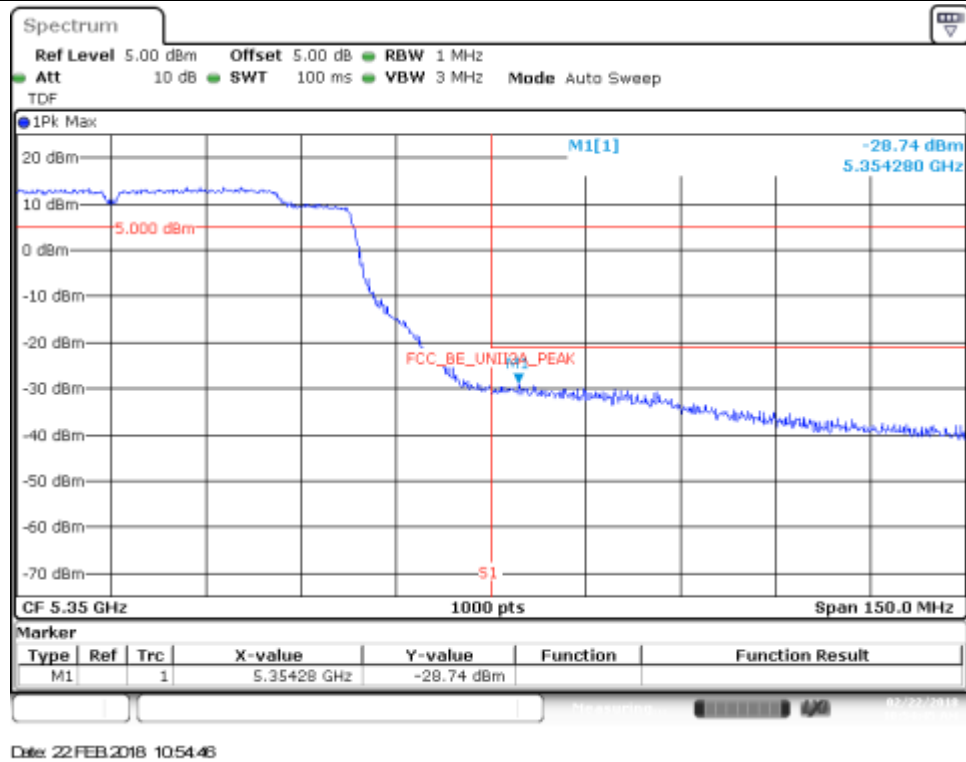

### BE High Freq Section, RMS – CH58ac80



## 802.11ac80, VHT0 (SISO) - Chain B

### BE High Freq Section, Peak – CH58ac80




### BE High Freq Section, RMS – CH58ac80




## 802.11ac80, VHT0 (MIMO) - Chain A

### BE High Freq Section, Peak – CH58ac80

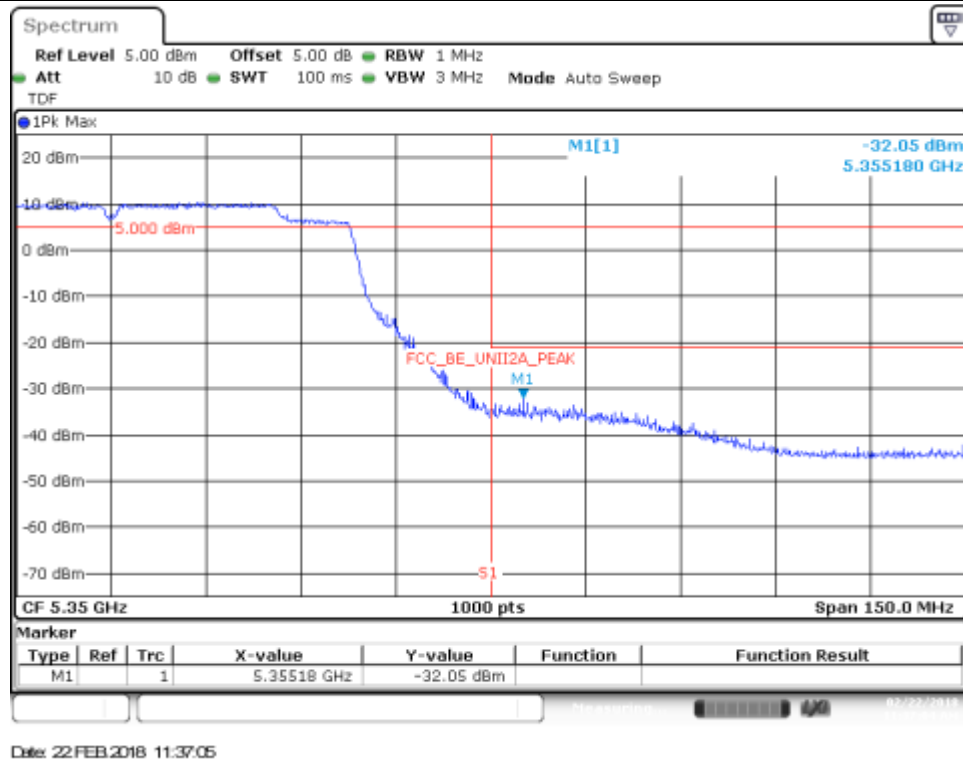


### BE High Freq Section, RMS – CH58ac80

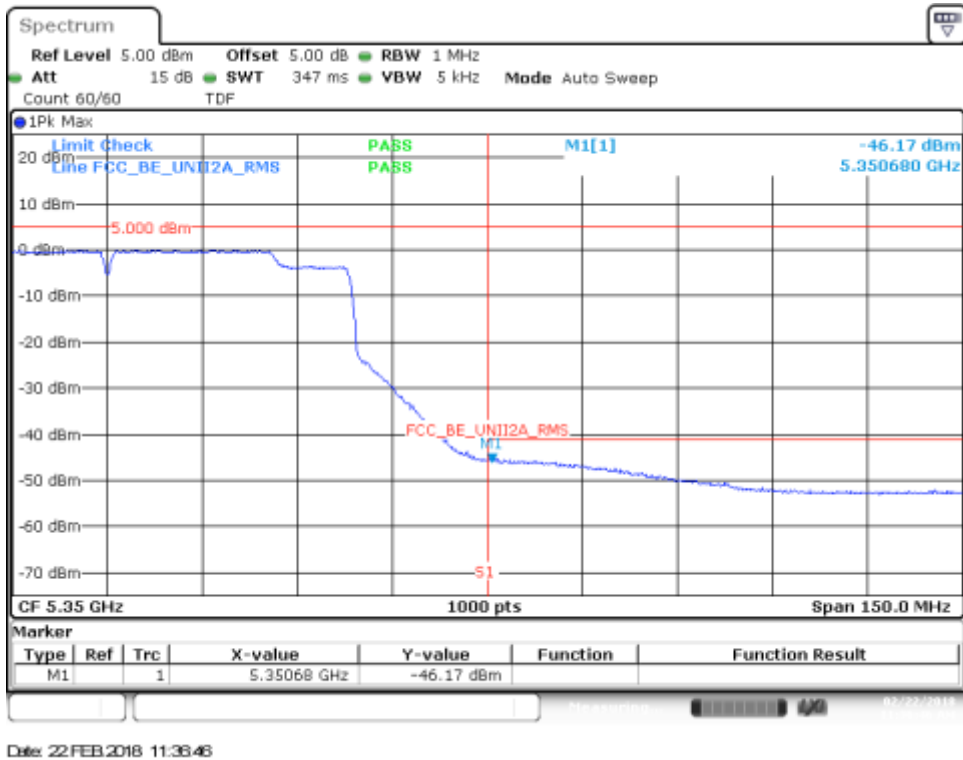

## 802.11ac80, VHT0 (MIMO) - Chain B

### BE High Freq Section, Peak – CH58ac80

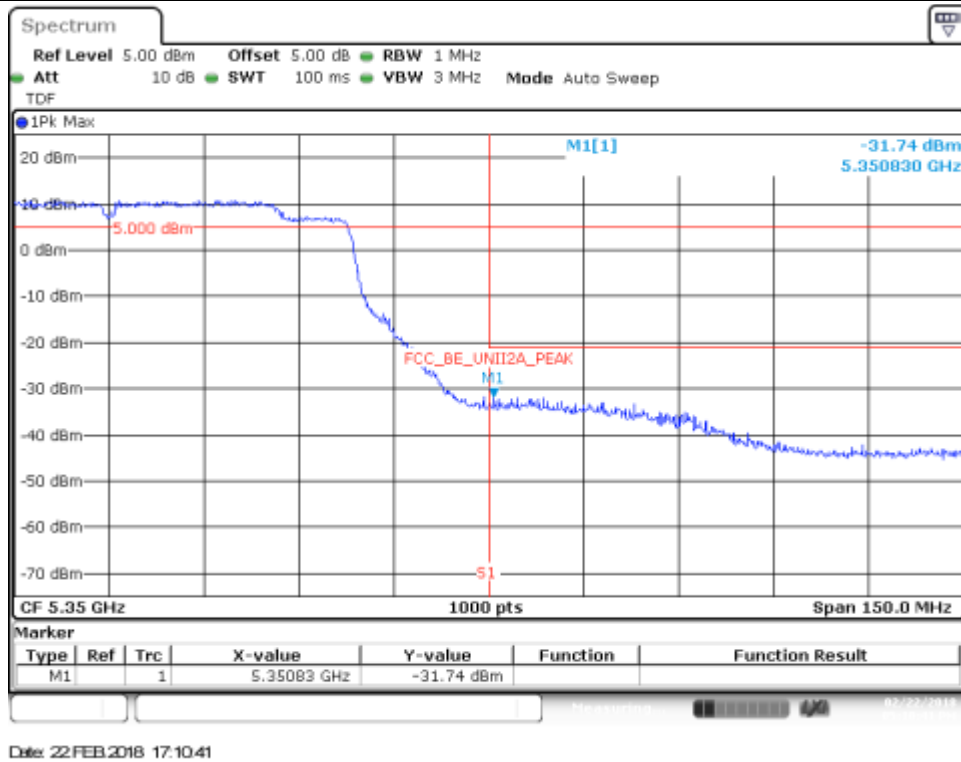

### BE High Freq Section, Peak – CH58ac80

