



TEST REPORT

| | |
|------------------------|--|
| EUT Description | WLAN and BT, 1x1 PCIe M.2 1216 adapter card |
| Brand Name | Intel® Wi-Fi AX101 |
| Model Name | AX101D2W |
| FCC ID | PD9AX101D2 |
| Date of Test Start/End | 2020-11-11 / 2020-11-24 |
| Features | 802.11ax, Dual Band, 1x1 Wi-Fi + Bluetooth® 5,1 Diversity Antenna (see section 5) |

| | |
|----------------------|---|
| Applicant | Intel Mobile Communications |
| Address | 100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA |
| Contact Person | Steven Hackett |
| Telephone/Fax/ Email | steven.c.hackett@intel.com |

| | |
|---------------------|---|
| Reference Standards | FCC CFR Title 47 Part 15 E (see section 1) |
|---------------------|---|

| | |
|----------------------------|--|
| Test Report identification | 200928-04.TR01 |
| Revision Control | Rev. 00 This test report revision replaces any previous test report revision (see section 8) |

The test results relate only to the samples tested.
 This report shall not be reproduced, except in full, without the written approval of the laboratory.
 Reference to accreditation shall be used only by full reproduction of test report.

_____ Issued by _____ Reviewed by _____

Khodor RIDA
(Test Engineer Lead)

Cheiel IN
(Technical Manager)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

| | |
|---|----------|
| 1. Standards, reference documents and applicable test methods | 3 |
| 2. General conditions, competences and guarantees | 3 |
| 3. Environmental Conditions | 3 |
| 4. Test samples | 4 |
| 5. EUT Features | 5 |
| 6. Remarks and comments | 5 |
| 7. Test Verdicts summary | 6 |
| 7.1. 802.11 a/n/ac/ax – U-NII-1 | 6 |
| 7.2. 802.11 a/n/ac/ax – U-NII-2A | 6 |
| 8. Document Revision History | 6 |
| A.1 MEASUREMENT SYSTEM | 7 |
| A.2 TEST EQUIPMENT LIST | 9 |
| A.3 MEASUREMENT UNCERTAINTY EVALUATION | 10 |
| B.1 TEST CONDITIONS | 11 |
| B.2 TEST RESULTS TABLES U-NII-1 | 12 |
| B.2.1 26dB & 99% BANDWIDTH | 12 |
| B.2.2 POWER LIMITS. MAXIMUM OUTPUT POWER & MAXIMUM POWER SPECTRAL DENSITY | 14 |
| B.2.3 UNDESIRABLE EMISSION LIMITS : OUT OF BAND (CONDUCTED) | 20 |
| B.2.4 RADIATED SPURIOUS EMISSION | 21 |
| B.3 TEST RESULTS TABLES U-NII-2A | 33 |
| B.3.1 26dB & 99% BANDWIDTH | 33 |
| B.3.2 POWER LIMITS. MAXIMUM OUTPUT POWER & MAXIMUM POWER SPECTRAL DENSITY | 35 |
| B.3.3 UNDESIRABLE EMISSIONS LIMITS : OUT OF BAND (CONDUCTED) | 39 |
| B.3.4 RADIATED SPURIOUS EMISSION | 40 |
| B.3.5 26dB AND 99% BANDWIDTH | 52 |
| B.3.6 MAXIMUM OUTPUT POWER | 58 |
| B.3.7 UNDESIRABLE EMISSION LIMITS: OUT OF BAND (CONDUCTED) | 64 |
| C.1 TEST SETUP | 70 |
| C.2 TEST SAMPLE | 72 |

1. Standards, reference documents and applicable test methods

1. FCC Title 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices. 2019-10-01 Edition
2. FCC Title 47 CFR part 15 - Subpart C – §15.209 Radiated emission limits; general requirements. 2019-10-01 Edition
3. FCC OET KDB 789033 D02 v02r01 General U-NII Test Procedures New Rules – Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E).
4. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
5. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

2. General conditions, competences and guarantees

- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab declines any responsibility with respect to the identified information provided by the customer and that may affect the validity of results.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

| | |
|-------------|----------------|
| Temperature | 20.2°C ± 3.4°C |
| Humidity | 44% ± 17.5% |

4. Test samples

| Sample | Control # | Description | Model | Serial # | Date of receipt | Note |
|--------|---------------|-----------------------|---------------------|-------------------|-----------------|--|
| #1 | 200928-04.S09 | RF Module | AX101D2W | WFM: D8F8834C5810 | 2020-11-03 | RF Conducted |
| | 180000-01.S06 | Adapter 1216SD to M.2 | HrP Adapter M2 | N/A | 2017-05-11 | |
| | 170000-01.S02 | Laptop | Latitude E5450 | 21HTPF2 | 2017-03-28 | |
| | 180717-03.S14 | Extender | PCB00651_01 | 6510818-132 | 2018-08-21 | |
| #2 | 200928-04.S06 | RF Module | AX101D2W | WFM:D8F8834C57E8 | 2020-11-03 | Used for 30MHz-18GHz Radiated Spurious Emissions tests except test cases in #4 |
| | 180717-03.S13 | Extender | PCB00651_01 | 6510818-131 | 2018-08-21 | |
| | 180000-01.S02 | Socket | JfP Adapter M2 | - | 2017-08-09 | |
| | 170000-01.S16 | Laptop | Latitude E5470 | C2HTPF2 | 2017-06-13 | |
| | 200611-03.S28 | Main Antenna | Skycross | - | 2020-07-01 | |
| | 200611-03.S29 | Aux Antenna | Skycross | - | 2020-07-01 | |
| #3 | 200928-04.S06 | RF Module | AX101D2W | WFM:D8F8834C57E8 | 2020-11-03 | Used for 18GHz-40GHz Radiated Spurious Emissions tests |
| | 200102-01.S03 | Extender | ADEXELEC | - | 2020-01-02 | |
| | 200928-02.S11 | Adaptor | HrP M2 Adaptor 1216 | 6961919-172 | 2020-10-27 | |
| | 200715-03.S06 | Absorber | MCS material | - | 2020-07-23 | |
| | 180000-01.S02 | Socket | JfP Adapter M2 | - | 2017-08-09 | |
| | 170801-01.S10 | Laptop | Latitude E7470 | 7KNOXF2 | 2017-09-08 | |
| | 200611-03.S28 | Main Antenna | Skycross | - | 2020-07-01 | |
| | 200611-03.S29 | Aux Antenna | Skycross | - | 2020-07-01 | |
| #4 | 200928-04.S11 | RF Module | AX101D2W | WFM18CC18F1C18D | 2020-11-03 | Used for 6.4-18 GHz Radiated Spurious Emissions tests for 802.11a-Ch56-Ant1 802.11n20-Ch52-Ant1 802.11n20-Ch56-Ant1 802.11ac80-Ch58ac80-Ant1 |
| | 180717-03.S13 | Extender | PCB00651_01 | 6510818-131 | 2018-08-21 | |
| | 180000-01.S02 | Socket | JfP Adapter M2 | - | 2017-08-09 | |
| | 170000-01.S16 | Laptop | Latitude E5470 | C2HTPF2 | 2017-06-13 | |
| | 200611-03.S28 | Main Antenna | Skycross | - | 2020-07-01 | |
| | 200611-03.S29 | Aux Antenna | Skycross | - | 2020-07-01 | |

5. EUT Features

The herein information is provided by the customer

| | | | |
|------------------------|--|------------------------------|---------------------|
| Brand Name | Intel® Wi-Fi AX101 | | |
| Model Name | AX101D2W | | |
| Software Version | DRTU 01594_99_3500_51W | | |
| Driver Version | 99.0.58.2 | | |
| Prototype / Production | Production | | |
| Supported Radios | 802.11b/g/n/ax | 2.4GHz (2400.0 – 2483.5 MHz) | |
| | 802.11a/n/ac/ax | 5.2GHz (5150.0 – 5350.0 MHz) | |
| | | 5.6GHz (5470.0 – 5725.0 MHz) | |
| | | 5.8GHz (5725.0 – 5850.0 MHz) | |
| | Bluetooth 5.1 | 2.4GHz (2400.0 – 2483.5 MHz) | |
| Antenna Information | Transmitter | Main (chain A DIV 1) | Aux (chain A Div 2) |
| | Manufacturer | SkyCross | Skycross |
| | Antenna type | PIFA antenna | PIFA antenna |
| | Part number | N/A | N/A |
| | Declared antenna gain (dBi) | +5 | +5 |
| Document | Filename | Date of receipt | |
| | Intel_Ref_Antenna data_HMC-M2 Ant_Spec_Universe_SkyCross Antenna | 2013-01-28 | |

6. Remarks and comments

1. No deviations were made from the test methods listed in section 1 of this report

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

7.1. 802.11 a/n/ac/ax – U-NII-1

| FCC part | Test name | Verdict |
|--------------------------|---|---------|
| 15.407 (a) (1) | Power Limits. Maximum output power | P |
| 15.407 (a) (1) | Power spectral density | P |
| 15.407 (b) (1) 15.209 | Undesirable emissions limits: Band Edge (conducted) | P |
| 15.407 (b) (1) 15.209 | Undesirable emissions limits: Spurious emissions (radiated) | P |

7.2. 802.11 a/n/ac/ax – U-NII-2A

| FCC part | Test name | Verdict |
|--------------------------|---|---------|
| 15.407 (a) (2) | Power Limits. Maximum output power | P |
| 15.407 (a) (2) | Power spectral density | P |
| 15.407 (b) (2) 15.209 | Undesirable emissions limits: Band Edge (conducted) | P |
| 15.407 (b) (2) 15.209 | Undesirable emissions limits: Spurious emissions (radiated) | P |

P: Pass
 F: Fail
 NM: Not Measured
 NA: Not Applicable

8. Document Revision History


| Revision # | Modified by | Revision Details |
|------------|-------------|------------------|
| Rev. 00 | C.Requin | First Issue |

Annex A. Test & System Description

A.1 Measurement System


Measurements were performed using the following setups, made in accordance to the general provisions of FCC OET KDB 789033 D02 General UNII Test Procedures.

The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.

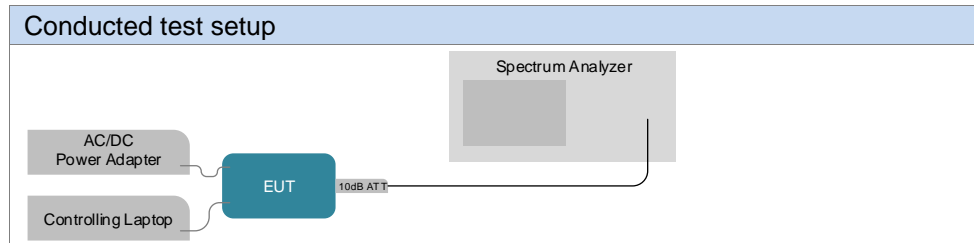


Radiated test setup


Radiated Setup 30 MHz - 1 GHz (Transmitter tests)

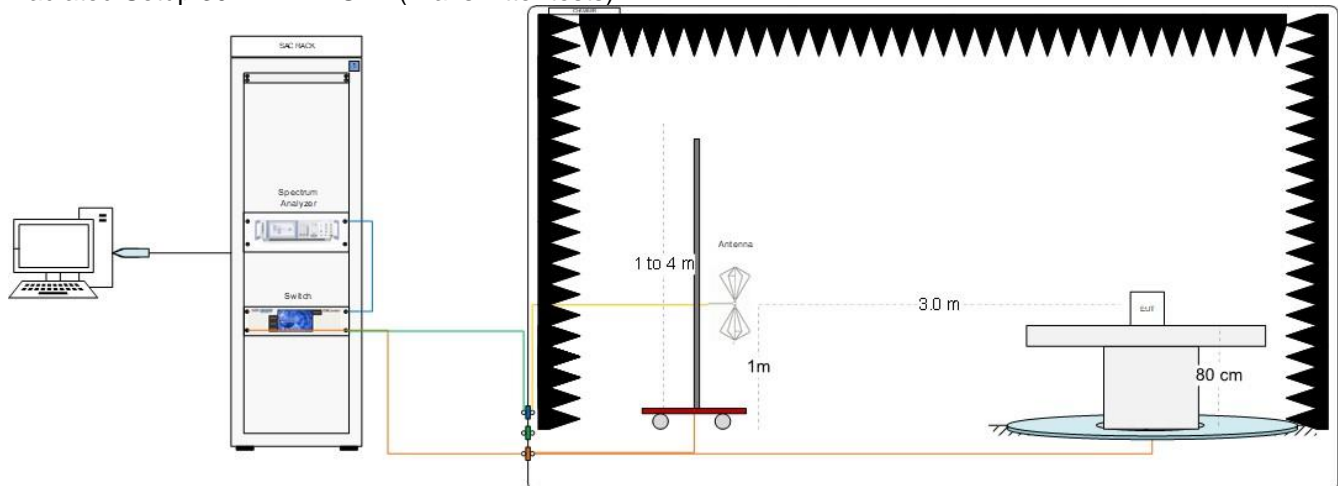


Radiated Setup 1 GHz – 6.4 GHz

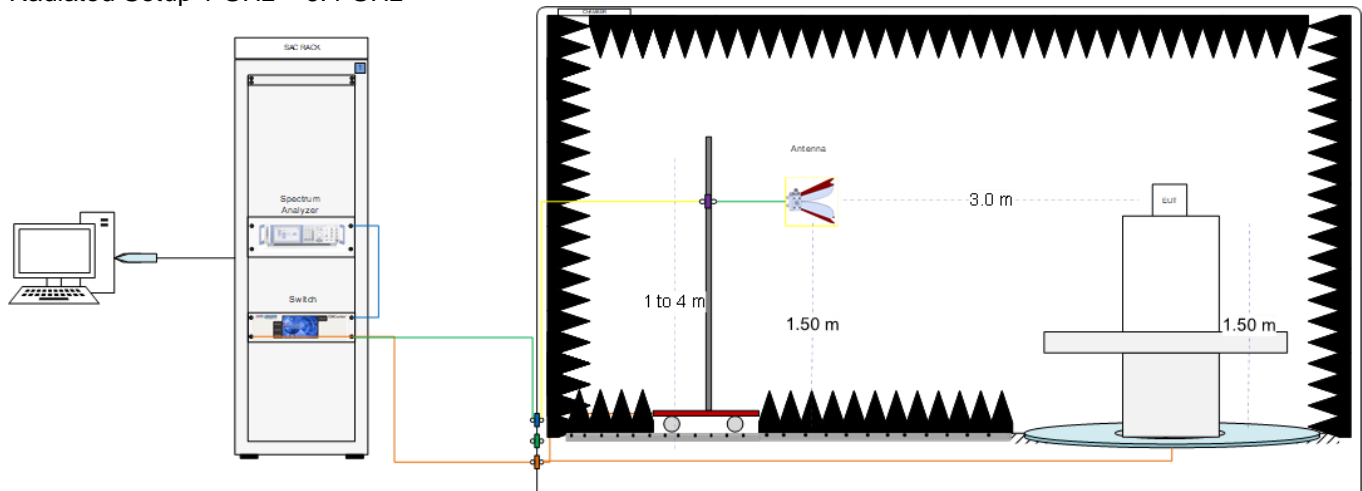

Radiated Setup 6.4 GHz - 18 GHz

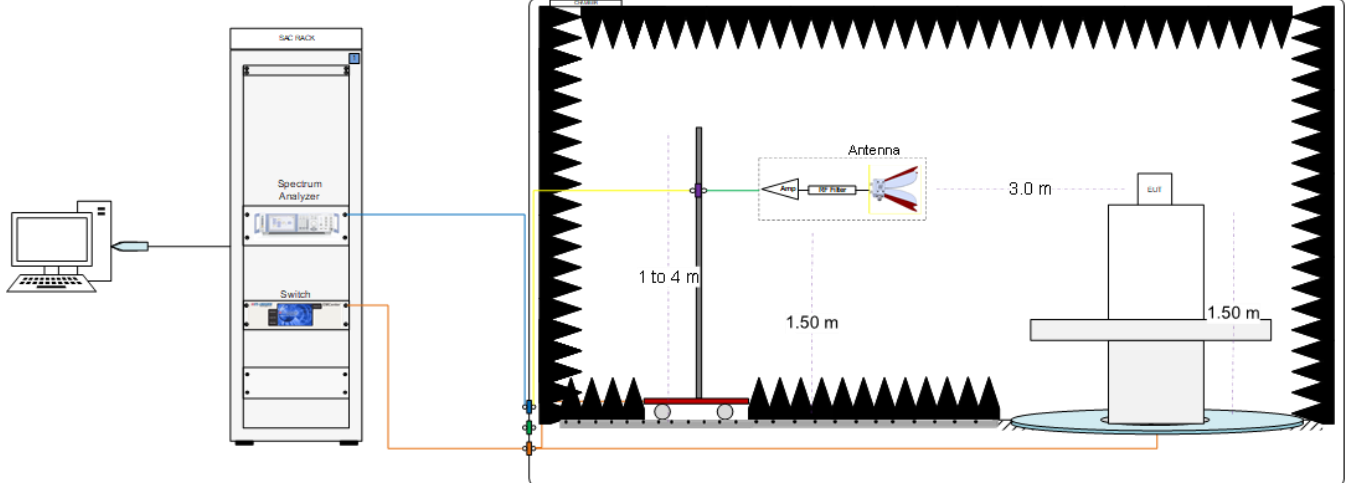

Radiated Setup 18 GHz – 40 GHz

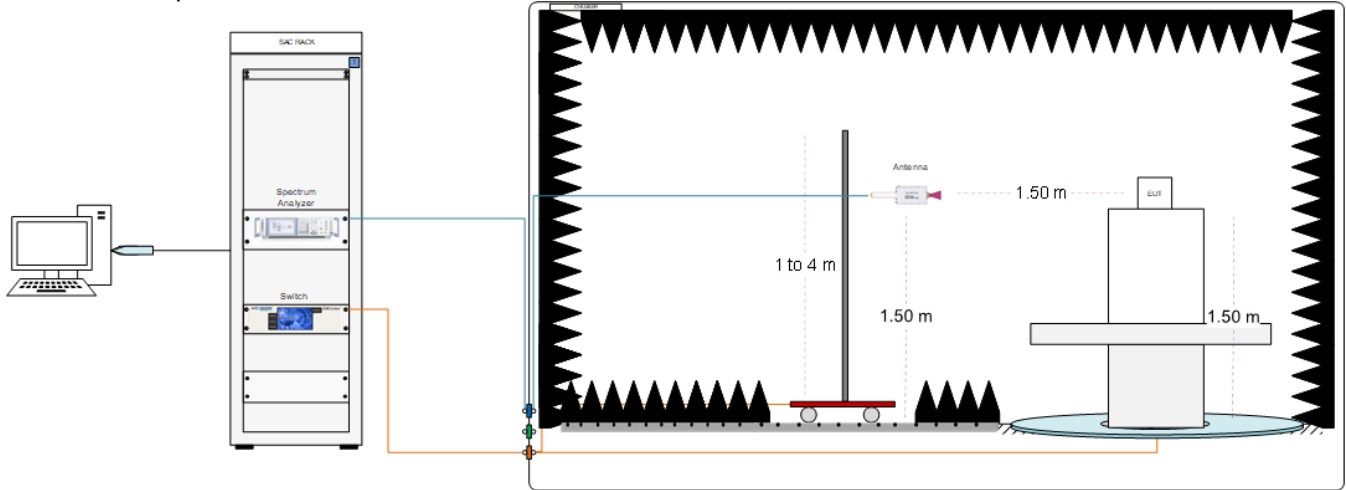

Sample Calculation

The spurious received voltage V (dB μ V) in the spectrum Analyzer is converted to Electric field strength using the transducer factor F corresponding to the Rx path Loss:

$$F \text{ (dB/m)} = \text{Rx Antenna Factor (dB/m)} + \text{Cable losses (dB)} - \text{Amplifiers Gain (dBi)}$$

$$E \text{ (dB}\mu\text{V/m)} = V \text{ (dB}\mu\text{V)} + F \text{ (dB/m)}$$

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \cdot \log(D_{\text{Meas}}/D_{\text{SpecLimit}})$$

where

$E_{\text{SpecLimit}}$ is the field strength of the emission at the distance specified by the limit, in dB μ V/m

E_{Meas} is the field strength of the emission at the measurement distance, in dB μ V/m

D_{Meas} is the measurement distance, in m

$D_{\text{SpecLimit}}$ is the distance specified by the limit, in m

A.2 Test Equipment List

Conducted setup

| ID# | Device | Type/Model | Serial # | Manufacturer | Cal. Date | Cal. Due Date |
|------|-------------------------|---------------------------------|------------|-----------------|------------|---------------|
| 0316 | Spectrum Analyzer | FSV30 | 103309 | Rohde & Schwarz | 2019-09-02 | 2021-09-02 |
| 0442 | RF cable 50cm | Coax 2.92mm Male To 2.92mm Male | N/A | PASTERNAK | 2020-08-26 | 2021-02-26 |
| 1044 | 10dB Attenuator + MH4 | N/A | N/A | N/A | N/A | N/A |
| 0583 | Temp & Humidity Logger | RA12E-TH1-RAS | RA12-B9D6E | AVITECH | 2019-09-06 | 2021-09-06 |
| 1002 | Measurement SW v1.5.4.2 | Octopi | N/A | Step AT | N/A | N/A |

Radiated Setup #1

| ID# | Device | Type/Model | Serial # | Manufacturer | Cal. Date | Cal. Due Date |
|------|--|--------------------------------------|---------------------------|-----------------|------------|---------------|
| 0135 | Anechoic Chamber | FACT3 | 5720 | ETS-Lindgren | 2020-07-06 | 2022-01-07 |
| 0136 | Turn Table | ETS | - | ETS-Lindgren | N/A | N/A |
| 0147 | Switch & Positioning systems | EMC Center | 00159757 | ETS-Lindgren | N/A | N/A |
| 0530 | Measurement SW | EMC32, v10.40.10 | 100623 | Rohde & Schwarz | N/A | N/A |
| 1033 | Boresight antenna mast | BAM 4.0-P | P/278/2890.01 | Maturo | N/A | N/A |
| 0420 | Spectrum Analyzer | FSV40 | 101556 | Rohde & Schwarz | 2020-05-25 | 2022-05-25 |
| 0993 | Biconical antenna 30 MHz – 1 GHz | UBAA9115 + BBVU9135 + DGA9552N | 0286 + CH 9044 | Schwarzbeck | 2019-11-22 | 2021-11-22 |
| 0325 | Horn antenna | 3117 | 00157734 | ETS-Lindgren | 2019-08-12 | 2021-08-12 |
| 0141 | Horn Antenna + Amplifier + HPF6.4 | 3117 | 00157736 | ETS-Lindgren | 2020-04-02 | 2022-04-02 |
| 0334 | Double-Ridged Waveguide Horn with Pre-Amplifier 18 GHz to 40 GHz | 3116C+PA | 00169308bis + 00196308 | ETS-Lindgren | 2019-07-24 | 2021-07-24 |
| 0202 | Cable 1m - 30MHz to 18 GHz | UFB311A-0-3360-50U300 | MFR 64639223229-001 | Micro-coax | 2020-08-25 | 2021-02-25 |
| 0206 | Cable 1.2m – 18 to 40 GHz | UFA147A-0-0480-200200 | MFR 64639223720-003 | Micro-coax | 2020-08-25 | 2021-02-25 |
| 0263 | Cable 1m - 1GHz to 18GHz | UFA147A | - | Utiliflex | 2020-08-25 | 2021-02-25 |
| 0369 | Cable 2m - 26.5GHz to 40GHz | 794-9191-2000A | E00327 | Atem | 2020-08-25 | 2021-02-25 |
| 0371 | Cable 1m – 30 MHz - 18GHz | UFB311A-0-0590-50U50U | MFR 64639 223230-001 | Micro-coax | 2020-08-25 | 2021-02-25 |
| 0758 | Cable 7.5m - 30MHz to 18GHz | 0501051057000GX | 18.23.181 | Radiall | 2020-08-25 | 2021-02-25 |
| 0809 | Cable 7m - 18GHz to 40GHz | R286304009 | - | Radiall | 2020-08-25 | 2021-02-25 |
| 0859 | Cable 2.5m - 30MHz to 18GHz | 0500990992500KE | 19.23.395 | Radiall | 2020-08-25 | 2021-02-25 |
| 0797 | Temp & Humidity Logger | RA12E-TH1-RAS | RA12-D0EB1A | Avtech | 2019-07-04 | 2021-07-04 |

N/A: Not Applicable

Radiated Setup #2

| ID# | Device | Type/Model | Serial # | Manufacturer | Cal. Date | Cal. Due Date |
|------|--|------------------|---------------------------|-----------------|------------|---------------|
| 0337 | Anechoic chamber | RFD-FA-100 | 5996 | ETS Lindgren | 2020-07-06 | 2022-07-06 |
| 0238 | Switch & Positioner | EMCenter | 00151232 | ETS Lindgren | N/A | N/A |
| 0382 | Antenna Tower | 2171B-3.0M | 00150123 | ETS Lindgren | N/A | N/A |
| 0383 | Turntable | - | - | ETS Lindgren | N/A | N/A |
| 0329 | Measurement SW | EMC32, v10.50.10 | 100401 | Rohde & Schwarz | N/A | N/A |
| 0133 | Spectrum Analyzer | FSV40 | 101358 | Rohde & Schwarz | 2020-02-25 | 2022-02-25 |
| 0138 | Double Ridge Horn (1- 18GHz) | 3117 | 00152266 | ETS Lindgren | 2020-03-08 | 2022-03-08 |
| 0141 | Horn Antenna 3117 + Amplifier + HPF6.4 | 3117 | 00157736 | ETS-Lindgren | 2020-04-02 | 2022-04-02 |
| 0334 | Double Horn Ridged antenna | 3116C-PA | 00169308bis + 00196308 | ETS-Lindgren | 2019-07-24 | 2021-07-24 |
| 0871 | RF Cable 1-18GHz, 1.5 m | 0501050991200GX | 19.21.710 | Radiall | 2020-08-20 | 2021-02-20 |
| 0860 | RF Cable 1-18GHz, 1.2 m | 2301761761200PJ | 12.22.1104 | Radiall | 2020-08-20 | 2021-02-20 |
| 0275 | RF Cable 1-18GHz - 6.5m | 140-8500-11-51 | 001 | Spectrum | 2020-08-20 | 2021-02-20 |
| 0684 | RF Cable 1GHz-18GHz 1.5m | - | - | Spirent | 2020-08-20 | 2021-02-20 |
| 0679 | RF Cable 18-40 GHz 6m | R286304009 | 1747364 | Radiall | 2020-08-20 | 2021-02-20 |
| 0028 | RF Cable 1.2m 40MHz-40GHz | 794-9191-1200A | DA585 | Atem | 2020-08-20 | 2021-02-20 |
| 0725 | RF Cable 1-9.5GHz 1.2m | 0500990991200KE | - | Radiall | 2020-08-20 | 2021-02-20 |
| 0796 | Temp & Humidity Logger | RA12E-TH1-RAS | RA12-D4F316 | Avtech | 2019-07-05 | 2021-07-05 |

N/A: Not Applicable

Radiated Setup - shared equipments

Shared Radiated Equipment

| ID# | Device | Type/Model | Serial # | Manufacturer | Cal. Date | Cal. Due Date |
|------|--------------|------------|----------|-----------------|------------|---------------|
| 0616 | Power Sensor | NRP-Z81 | 104385 | Rohde & Schwarz | 2020-04-08 | 2022-04-08 |
| 0617 | Power Sensor | NRP-Z81 | 104386 | Rohde & Schwarz | 2020-04-08 | 2022-04-08 |
| 0618 | Power Sensor | NRP-Z81 | 104382 | Rohde & Schwarz | 2020-04-08 | 2022-04-08 |

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of k = 2 to indicate a 95% level of confidence:

| Measurement type | Uncertainty | Unit |
|-------------------------------------|-------------|------|
| Timing | ±0.12 | % |
| Power Spectral density | ±1.47 | dB |
| Occupied bandwidth | ±2.07 | % |
| Conducted Power | ±1.03 | dB |
| Conducted Spurious Emission <40 GHz | ±3.45 | dB |
| Radiated tests <1GHz | ±5.26 | dB |
| Radiated tests 1GHz – 40 GHz | ±4.85 | dB |

Annex B. Test Results U-NII-1 & U-NII-2A

The herein test results were performed by:

| Test case measurement | Test Engineer |
|---|-----------------|
| 26dB & 99% bandwidth | C.Requin |
| Power Limits. Maximum output power | C.Requin |
| Power spectral density | C.Requin |
| Undesirable emissions limits: Band Edge (conducted) | C.Requin |
| Undesirable emissions limits (radiated) | A.Lounes, N.Bui |

B.1 Test Conditions

For all modes, the EUT can transmit at both CHAIN A DIV1 and CHAIN A DIV2 RF outputs individually, but not simultaneously.

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

| Transmission | Mode | Bandwidth (MHz) | Worst Case Data Rate |
|------------------------|----------|-----------------|----------------------|
| CHAIN A – DIV 1/ DIV 2 | 802.11a | 20 | 6Mbps |
| | 802.11n | 20 | HT0 |
| | | 40 | HT0 |
| | 802.11ac | 80 | VHT0 |
| | 802.11ax | 20 | HE0 |
| | | 40 | HE0 |
| | | 80 | HE0 |

B.2 Test Results Tables U-NII-1

B.2.1 26dB & 99% Bandwidth

Test procedure

The conducted setup shown in section was used to measure the 26dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

| Mode | Rate | Antenna | Channel | Freq [MHz] | 26dB BW [MHz] | 99% BW [MHz] |
|-----------|-------|--------------|--------------|------------|---------------|--------------|
| 802.11a | 6Mbps | CHAIN A DIV1 | 36 | 5180 | 23.65 | 16.48 |
| | | | 40 | 5200 | 23.90 | 16.64 |
| | | | 48 | 5240 | 34.20 | 19.92 |
| | | CHAIN A DIV2 | 36 | 5180 | 24.35 | 16.64 |
| | | | 40 | 5200 | 23.45 | 16.56 |
| | | | 48 | 5240 | 34.80 | 20.36 |
| 802.11n20 | HT0 | CHAIN A DIV1 | 36 | 5180 | 23.95 | 17.68 |
| | | | 40 | 5200 | 24.15 | 17.68 |
| | | | 48 | 5240 | 33.80 | 19.52 |
| | | CHAIN A DIV2 | 36 | 5180 | 24.35 | 17.84 |
| | | | 40 | 5200 | 24.20 | 17.72 |
| | | | 48 | 5240 | 35.70 | 20.48 |
| 802.11n40 | HT0 | CHAIN A DIV1 | 38 | 5190 | 42.75 | 36.08 |
| | | | 46 | 5230 | 43.47 | 36.08 |
| | | CHAIN A DIV2 | 38 | 5190 | 43.56 | 36.00 |
| | | | 46 | 5230 | 43.56 | 36.08 |
| | | CHAIN A DIV1 | 42 | 5210 | 88.54 | 75.00 |
| | | | CHAIN A DIV2 | 42 | 5210 | 89.11 |

Max Value

| Mode | Rate | Antenna | Channel | Freq [MHz] | RU config. | 26dB BW [MHz] | 99% BW [MHz] |
|------------|------|--------------|---------|--------------|------------|---------------|--------------|
| 802.11ax20 | HE0 | CHAIN A DIV1 | 36 | 5180 | Full | 23.35 | 18.92 |
| | | | | | 26/0 | 20.55 | 18.36 |
| | | | | | 52/37 | 22.05 | 18.36 |
| | | | | | 106/53 | 23.05 | 18.28 |
| | | 40 | 5200 | Full | 23.10 | 18.92 | |
| | | | | 48 | 5240 | Full | 31.80 |
| | | CHAIN A DIV2 | 36 | 5180 | Full | 23.95 | 18.88 |
| | | | | | 26/0 | 20.65 | 18.44 |
| | | | | | 52/37 | 21.40 | 18.44 |
| | | | | | 106/53 | 23.00 | 18.24 |
| 40 | 5200 | Full | 23.35 | 18.88 | | | |
| | | 48 | 5240 | Full | 35.15 | 19.80 | |
| 802.11ax40 | HE0 | CHAIN A DIV1 | 38 | 5190 | Full | 42.48 | 37.60 |
| | | | | | 242/61 | 24.21 | 18.88 |
| | | 46 | 5230 | Full | 42.84 | 37.60 | |
| | | | | CHAIN A DIV2 | 38 | 5190 | Full |
| | | 46 | 5230 | 242/61 | | | 23.58 |
| | | | | Full | 42.30 | 37.52 | |
| 802.11ax80 | HE0 | CHAIN A DIV1 | 42 | 5210 | Full | 84.55 | 76.80 |
| | | | | | 484/65 | 43.32 | 37.44 |
| | | CHAIN A DIV2 | 42 | 5210 | Full | 85.69 | 76.80 |
| | | | | | 484/65 | 42.94 | 37.44 |

Max Value

See Section B.3.5 for the screenshot results

B.2.2 Power Limits. Maximum Output power & Maximum power spectral density

Test limits

| FCC part | Limits |
|------------------------|---|
| 15.407 (a) (1) (iv) | For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. |

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to section E) 2) e) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

The maximum power spectral density (PSD) was measured using the method according to section F) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The conducted setup shown in section was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

Duty cycle

| Mode | Rate | Antenna | Duty Cycle [%] |
|------------|-------|--------------|----------------|
| 802.11a | 6Mbps | CHAIN A DIV1 | 94.90% |
| | | CHAIN A DIV2 | 94.90% |
| 802.11n20 | HT0 | CHAIN A DIV1 | 98.68% |
| | | CHAIN A DIV2 | 98.68% |
| 802.11ax20 | HE0 | CHAIN A DIV1 | 98.68% |
| | | CHAIN A DIV2 | 98.68% |
| 802.11n40 | HT0 | CHAIN A DIV1 | 98.68% |
| | | CHAIN A DIV2 | 98.68% |
| 802.11ax40 | HE0 | CHAIN A DIV1 | 98.68% |
| | | CHAIN A DIV2 | 98.68% |
| 802.11ac80 | VHT0 | CHAIN A DIV1 | 98.60% |
| | | CHAIN A DIV2 | 98.60% |
| 802.11ax80 | HE0 | CHAIN A DIV1 | 98.60% |
| | | CHAIN A DIV2 | 98.60% |

Maximum output power

| Mode | Rate | Channel | Freq [MHz] | Antenna | Average Conducted Output Power [dBm] | Avg Max* Conducted Output Power [dBm] | Avg Max* EIRP [dBm] | Avg Max* Conducted Power [mW] |
|------------|-------|---------|------------|--------------|--------------------------------------|---------------------------------------|---------------------|-------------------------------|
| 802.11a | 6Mbps | 36 | 5180 | CHAIN A DIV1 | 15.61 | 15.84 | 20.84 | 38.35 |
| | | | | CHAIN A DIV2 | 15.45 | 15.68 | 20.68 | 36.96 |
| | | 40 | 5200 | CHAIN A DIV1 | 17.63 | 17.86 | 22.86 | 61.06 |
| | | | | CHAIN A DIV2 | 17.37 | 17.60 | 22.60 | 57.51 |
| | | 48 | 5240 | CHAIN A DIV1 | 21.18 | 21.41 | 26.41 | 138.27 |
| | | | | CHAIN A DIV2 | 21.32 | 21.55 | 26.55 | 142.80 |
| 802.11n20 | HT0 | 36 | 5180 | CHAIN A DIV1 | 15.57 | 15.57 | 20.57 | 36.06 |
| | | | | CHAIN A DIV2 | 15.35 | 15.35 | 20.35 | 34.28 |
| | | 40 | 5200 | CHAIN A DIV1 | 17.56 | 17.56 | 22.56 | 57.02 |
| | | | | CHAIN A DIV2 | 17.49 | 17.49 | 22.49 | 56.10 |
| | | 48 | 5240 | CHAIN A DIV1 | 21.14 | 21.14 | 26.14 | 130.02 |
| | | | | CHAIN A DIV2 | 21.19 | 21.19 | 26.19 | 131.52 |
| 802.11n40 | HT0 | 38 | 5190 | CHAIN A DIV1 | 14.96 | 14.96 | 19.96 | 31.33 |
| | | | | CHAIN A DIV2 | 14.77 | 14.77 | 19.77 | 29.99 |
| | | 46 | 5230 | CHAIN A DIV1 | 16.63 | 16.63 | 21.63 | 46.03 |
| | | | | CHAIN A DIV2 | 16.40 | 16.40 | 21.40 | 43.65 |
| 802.11ac80 | VHT0 | 42 | 5210 | CHAIN A DIV1 | 14.22 | 14.22 | 19.22 | 26.42 |
| | | | | CHAIN A DIV2 | 14.52 | 14.52 | 19.52 | 28.31 |

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

| Mode | Rate | Channel | Freq [MHz] | Antenna | RU config. | Average Conducted Output Power [dBm] | Avg Max* Conducted Output Power [dBm] | Avg Max* EIRP [dBm] | Avg Max* Conducted Power [mW] |
|------------|------|--------------|--------------|--------------|--------------|--------------------------------------|---------------------------------------|---------------------|-------------------------------|
| 802.11ax20 | HE0 | 36 | 5180 | CHAIN A DIV1 | Full | 15.35 | 15.35 | 20.35 | 34.28 |
| | | | | | 26/0 | 13.66 | 13.66 | 18.66 | 23.23 |
| | | | | | 52/37 | 16.33 | 16.33 | 21.33 | 42.95 |
| | | | | CHAIN A DIV2 | 106/53 | 16.11 | 16.11 | 21.11 | 40.83 |
| | | | | | Full | 15.18 | 15.18 | 20.18 | 32.96 |
| | | | | | 26/0 | 13.83 | 13.83 | 18.83 | 24.15 |
| | | 40 | 5200 | CHAIN A DIV2 | 52/37 | 15.83 | 15.83 | 20.83 | 38.28 |
| | | | | | 106/53 | 15.98 | 15.98 | 20.98 | 39.63 |
| | | 48 | 5240 | CHAIN A DIV1 | Full | 17.57 | 17.57 | 22.57 | 57.15 |
| | | | | | CHAIN A DIV2 | Full | 17.64 | 17.64 | 22.64 |
| 48 | 5240 | CHAIN A DIV1 | Full | 21.09 | 21.09 | 26.09 | 128.53 | | |
| | | | CHAIN A DIV2 | Full | 21.18 | 21.18 | 26.18 | 131.22 | |
| 802.11ax40 | HE0 | 38 | 5190 | CHAIN A DIV1 | Full | 14.70 | 14.70 | 19.70 | 29.51 |
| | | | | | 242/61 | 15.57 | 15.57 | 20.57 | 36.06 |
| | | | | CHAIN A DIV2 | Full | 14.56 | 14.56 | 19.56 | 28.58 |
| | | | | | 242/61 | 15.06 | 15.06 | 20.06 | 32.06 |
| | | 46 | 5230 | CHAIN A DIV1 | Full | 16.49 | 16.49 | 21.49 | 44.57 |
| | | | | | CHAIN A DIV2 | Full | 16.48 | 16.48 | 21.48 |
| 802.11ax80 | HE0 | 42 | 5210 | CHAIN A DIV1 | Full | 14.51 | 14.51 | 19.51 | 28.25 |
| | | | | | 484/65 | 14.16 | 14.16 | 19.16 | 26.06 |
| | | | | CHAIN A DIV2 | Full | 14.48 | 14.48 | 19.48 | 28.05 |
| | | | | | 484/65 | 14.14 | 14.14 | 19.14 | 25.94 |

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

Maximum power spectral Density (PSD)

| Mode | Rate | Channel | Freq [MHz] | Antenna | Average conducted PSD [dBm/MHz] | Maximum* conducted PSD [dBm/MHz] |
|------------|-------|---------|------------|--------------|---------------------------------|----------------------------------|
| 802.11a | 6Mbps | 36 | 5180 | CHAIN A DIV1 | 4.88 | 5.11 |
| | | | | CHAIN A DIV2 | 4.64 | 4.87 |
| | | 40 | 5200 | CHAIN A DIV1 | 6.84 | 7.07 |
| | | | | CHAIN A DIV2 | 6.57 | 6.80 |
| | | 48 | 5240 | CHAIN A DIV1 | 10.34 | 10.57 |
| | | | | CHAIN A DIV2 | 10.47 | 10.70 |
| 802.11n20 | HT0 | 36 | 5180 | CHAIN A DIV1 | 4.55 | 4.55 |
| | | | | CHAIN A DIV2 | 4.32 | 4.32 |
| | | 40 | 5200 | CHAIN A DIV1 | 6.56 | 6.56 |
| | | | | CHAIN A DIV2 | 6.48 | 6.48 |
| | | 48 | 5240 | CHAIN A DIV1 | 10.10 | 10.10 |
| | | | | CHAIN A DIV2 | 10.14 | 10.14 |
| 802.11n40 | HT0 | 38 | 5190 | CHAIN A DIV1 | 0.57 | 0.57 |
| | | | | CHAIN A DIV2 | 0.37 | 0.37 |
| | | 46 | 5230 | CHAIN A DIV1 | 2.18 | 2.18 |
| | | | | CHAIN A DIV2 | 1.93 | 1.93 |
| 802.11ac80 | VHT0 | 42 | 5210 | CHAIN A DIV1 | -3.25 | -3.25 |
| | | | | CHAIN A DIV2 | -2.99 | -2.99 |

* Maximum values are the duty cycle compensated values calculated from the measured average values

| Mode | Rate | #Ch | Freq [MHz] | Antenna | RU config. | Average cond.PSD [dBm/MHz] | Max*cond.PSD [dBm/MHz] |
|------------|------|-----|------------|--------------|------------|----------------------------|------------------------|
| 802.11ax20 | HE0 | 36 | 5180 | CHAIN A DIV1 | Full | 4.16 | 4.16 |
| | | | | | 26/0 | 10.82 | 10.82 |
| | | | | | 52/37 | 10.56 | 10.56 |
| | | | | | 106/53 | 7.26 | 7.26 |
| | | | | CHAIN A DIV2 | Full | 4.00 | 4.00 |
| | | | | | 26/0 | 10.99 | 10.99 |
| | | | | | 52/37 | 10.07 | 10.07 |
| | | | | | 106/53 | 7.14 | 7.14 |
| | | 40 | 5200 | CHAIN A DIV1 | Full | 6.38 | 6.38 |
| | | | | CHAIN A DIV2 | Full | 6.44 | 6.44 |
| | | 48 | 5240 | CHAIN A DIV1 | Full | 9.88 | 9.88 |
| | | | | CHAIN A DIV2 | Full | 9.96 | 9.96 |
| 802.11ax40 | HE0 | 38 | 5190 | CHAIN A DIV1 | Full | 0.07 | 0.07 |
| | | | | | 242/61 | 4.29 | 4.29 |
| | | | | CHAIN A DIV2 | Full | -0.06 | -0.06 |
| | | | | | 242/61 | 3.78 | 3.78 |
| | | 46 | 5230 | CHAIN A DIV1 | Full | 1.86 | 1.86 |
| | | | | CHAIN A DIV2 | Full | 1.84 | 1.84 |
| 802.11ax80 | HE0 | 42 | 5210 | CHAIN A DIV1 | Full | -3.05 | -3.05 |
| | | | | | 484/65 | -0.41 | -0.41 |
| | | | | | Full | -3.11 | -3.11 |
| | | | | CHAIN A DIV2 | Full | -3.11 | -3.11 |
| | | | | | 484/65 | -0.41 | -0.41 |
| | | | | | Full | -3.11 | -3.11 |

* Maximum values are the duty cycle compensated values calculated from the measured average values

See Section B.3.6 for the screenshot results

B.2.3 Undesirable emission limits : out of band (Conducted)

Test limits

| FCC part | Limits | | | | | | | | | | | | | | | | | | | | |
|------------------|--|-------------------------|-----------------------|-------------------------|--------------------|-------|-----|----|---|--------|-----|------|---|---------|-----|----|---|-----------|-----|----|---|
| 15.407 (b) (1) | For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. | | | | | | | | | | | | | | | | | | | | |
| 15.209 | <p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th style="background-color: #d9e1f2;">Freq Range (MHz)</th> <th style="background-color: #d9e1f2;">Field Strength (µV/m)</th> <th style="background-color: #d9e1f2;">Field Strength (dBµV/m)</th> <th style="background-color: #d9e1f2;">Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td>30-88</td> <td>100</td> <td>40</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>43.5</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>46</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>54</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p> | Freq Range (MHz) | Field Strength (µV/m) | Field Strength (dBµV/m) | Meas. Distance (m) | 30-88 | 100 | 40 | 3 | 88-216 | 150 | 43.5 | 3 | 216-960 | 200 | 46 | 3 | Above 960 | 500 | 54 | 3 |
| Freq Range (MHz) | Field Strength (µV/m) | Field Strength (dBµV/m) | Meas. Distance (m) | | | | | | | | | | | | | | | | | | |
| 30-88 | 100 | 40 | 3 | | | | | | | | | | | | | | | | | | |
| 88-216 | 150 | 43.5 | 3 | | | | | | | | | | | | | | | | | | |
| 216-960 | 200 | 46 | 3 | | | | | | | | | | | | | | | | | | |
| Above 960 | 500 | 54 | 3 | | | | | | | | | | | | | | | | | | |

Test procedure

The conducted setup shown in section was used to measure undesirable emissions on the out of band domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

Both lower and upper side of the out of band were performed using the integration method as defined in the out of band measurements section (paragraph II.G.3.d) of 789033 D02 v02r01

In case of out of band measurements falling in restricted bands, the declared antenna gain is also compensated in the graph.

For out of band measurements falling in restricted bands, the following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dBµV/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.

| §15.209(a) | | | Converted values | |
|------------------|--------------|-----------------------------------|--------------------------------------|-------------|
| Freq Range (MHz) | Distance (m) | Field strength (microvolts/meter) | Field strength (dB microvolts/meter) | Power (dBm) |
| Above 960 | 3 | 500 | 54.0 | -41.2 |

See Section B.3.7 for the screenshot results.

B.2.4 Radiated spurious emission

Standard references

| FCC part | Limits | | | | | | | | | | | | | | | | | | | | |
|------------------|---|-------------------------|-----------------------|-------------------------|--------------------|-------|-----|----|---|--------|-----|------|---|---------|-----|----|---|-----------|-----|----|---|
| 15.407 (b) (1) | For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. | | | | | | | | | | | | | | | | | | | | |
| 15.209 | <p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1" data-bbox="541 562 1331 792"> <thead> <tr> <th data-bbox="545 568 740 631">Freq Range (MHz)</th> <th data-bbox="740 568 935 631">Field Strength (μV/m)</th> <th data-bbox="935 568 1129 631">Field Strength (dBμV/m)</th> <th data-bbox="1129 568 1326 631">Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td data-bbox="545 631 740 674">30-88</td> <td data-bbox="740 631 935 674">100</td> <td data-bbox="935 631 1129 674">40</td> <td data-bbox="1129 631 1326 674">3</td> </tr> <tr> <td data-bbox="545 674 740 716">88-216</td> <td data-bbox="740 674 935 716">150</td> <td data-bbox="935 674 1129 716">43.5</td> <td data-bbox="1129 674 1326 716">3</td> </tr> <tr> <td data-bbox="545 716 740 759">216-960</td> <td data-bbox="740 716 935 759">200</td> <td data-bbox="935 716 1129 759">46</td> <td data-bbox="1129 716 1326 759">3</td> </tr> <tr> <td data-bbox="545 759 740 792">Above 960</td> <td data-bbox="740 759 935 792">500</td> <td data-bbox="935 759 1129 792">54</td> <td data-bbox="1129 759 1326 792">3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p> | Freq Range (MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Meas. Distance (m) | 30-88 | 100 | 40 | 3 | 88-216 | 150 | 43.5 | 3 | 216-960 | 200 | 46 | 3 | Above 960 | 500 | 54 | 3 |
| Freq Range (MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Meas. Distance (m) | | | | | | | | | | | | | | | | | | |
| 30-88 | 100 | 40 | 3 | | | | | | | | | | | | | | | | | | |
| 88-216 | 150 | 43.5 | 3 | | | | | | | | | | | | | | | | | | |
| 216-960 | 200 | 46 | 3 | | | | | | | | | | | | | | | | | | |
| Above 960 | 500 | 54 | 3 | | | | | | | | | | | | | | | | | | |

Test procedure

The radiated setup shown in section was used to measure the radiated spurious emissions.

Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration selected from the section B.1 and using the low, middle and high channels.

Test Results

Radiated spurious - 30 MHz – 1 GHz
Radiated Spurious – All modes

| Frequency | Quasi-Peak | Limit | Margin | Polar |
|-----------|------------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dB | --- |
| 37.8 | 30.0 | 40.0 | 10.0 | V |
| 74.9 | 31.4 | 40.0 | 8.6 | V |
| 136.9 | 38.1 | 43.5 | 5.4 | H |
| 261.5 | 40.5 | 46.0 | 5.5 | H |

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

802.11a
1 GHz – 40 GHz, 802.11a, 6Mbps, Chain A DIV1
Radiated Spurious – CH36

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3379.5 | 59.3 | --- | 68.2 | 8.9 | V |
| 10360.4 | 51.4 | --- | 68.2 | 16.8 | V |
| 15544.2 | 52.0 | --- | 74.0 | 22.0 | V |
| 15544.2 | --- | 43.4 | 54.0 | 10.6 | V |
| 39756.5 | 56.9 | --- | 74.0 | 17.1 | V |
| 39756.5 | --- | 45.6 | 54.0 | 8.4 | H |

Radiated Spurious – CH40

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3369.5 | 58.5 | --- | 68.2 | 9.7 | H |
| 10403.5 | 54.0 | --- | 68.2 | 14.2 | V |
| 15597.4 | 53.7 | --- | 74.0 | 20.3 | H |
| 15597.4 | --- | 44.5 | 54.0 | 9.5 | V |
| 39595.5 | --- | 46.5 | 54.0 | 7.5 | V |
| 39596.9 | 57.6 | --- | 74.0 | 16.4 | V |

Radiated Spurious – CH48

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|------------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3377.5 | 58.9 | --- | 68.2 | 9.3 | V |
| 10476.9 | 50.9 | --- | 68.2 | 17.3 | V |
| 15722.0 | 55.3 | --- | 74.0 | 18.7 | V |
| 15722.0 | --- | 47.3 | 54.0 | 6.7 | V |
| 20956.6 | --- | 38.2 | 54.0 | 15.8 | V |
| 20960.8 | 51.6 | --- | 74.0 | 22.4 | V |

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain A DIV2
Radiated Spurious – CH36

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3392.0 | 59.0 | --- | 68.2 | 9.2 | H |
| 10361.4 | 54.6 | --- | 68.2 | 13.6 | H |
| 15544.2 | 53.9 | --- | 74.0 | 20.1 | V |
| 15544.2 | --- | 44.4 | 54.0 | 9.6 | V |
| 39676.5 | 58.1 | --- | 74.0 | 15.9 | H |
| 39676.5 | --- | 45.9 | 54.0 | 8.1 | V |

Radiated Spurious – CH40

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3368.5 | 59.0 | --- | 68.2 | 9.2 | H |
| 10397.6 | 53.3 | --- | 68.2 | 14.9 | H |
| 15599.3 | 53.5 | --- | 74.0 | 20.5 | V |
| 15599.3 | --- | 46.8 | 54.0 | 7.2 | V |
| 20799.8 | --- | 38.1 | 54.0 | 15.9 | V |
| 20800.3 | 48.0 | --- | 74.0 | 26.0 | V |

Radiated Spurious – CH48

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3375.5 | 58.8 | --- | 68.2 | 9.4 | H |
| 10479.3 | 52.3 | --- | 68.2 | 15.9 | H |
| 15722.0 | 56.1 | --- | 74.0 | 17.9 | V |
| 15722.0 | --- | 47.3 | 54.0 | 6.7 | V |
| 20960.8 | --- | 40.9 | 54.0 | 13.2 | V |
| 20963.2 | 52.0 | --- | 74.0 | 22.0 | V |
| 31442.0 | 53.2 | --- | 74.0 | 20.8 | H |
| 31442.0 | --- | 43.4 | 54.0 | 10.6 | H |

802.11n
1 GHz – 40 GHz, 802.11n20, HT0, Chain A DIV1
Radiated Spurious – CH36

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3298.0 | 58.9 | --- | 68.2 | 9.3 | V |
| 10361.4 | 52.2 | --- | 68.2 | 16.0 | H |
| 15541.8 | 53.3 | --- | 74.0 | 20.7 | V |
| 15541.8 | --- | 43.1 | 54.0 | 10.9 | V |
| 20720.0 | --- | 37.4 | 54.0 | 16.6 | V |
| 20724.7 | 47.0 | --- | 74.0 | 27.0 | H |

Radiated Spurious – CH40

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3378.0 | 58.9 | --- | 68.2 | 9.3 | H |
| 10401.5 | 55.2 | --- | 68.2 | 13.0 | V |
| 15603.6 | 53.3 | --- | 74.0 | 20.7 | V |
| 15603.6 | --- | 44.6 | 54.0 | 9.4 | V |
| 39678.4 | 57.9 | --- | 74.0 | 16.1 | H |
| 39679.4 | --- | 46.2 | 54.0 | 7.8 | V |

Radiated Spurious – CH48

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3137.5 | 59.5 | --- | 68.2 | 8.8 | V |
| 10480.3 | 51.6 | --- | 68.2 | 16.6 | V |
| 15722.0 | 55.8 | --- | 74.0 | 18.2 | V |
| 15722.0 | --- | 47.0 | 54.0 | 7.0 | V |
| 20965.1 | --- | 38.4 | 54.0 | 15.6 | V |
| 20968.9 | 50.4 | --- | 74.0 | 23.6 | V |

1 GHz – 40 GHz, 802.11n20, HT0, Chain A DIV2
Radiated Spurious – CH36

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3390.0 | 58.8 | --- | 68.2 | 9.4 | V |
| 10363.3 | 56.6 | --- | 68.2 | 11.6 | H |
| 15545.1 | 53.6 | --- | 74.0 | 20.4 | V |
| 15545.1 | --- | 44.2 | 54.0 | 9.8 | V |
| 39670.2 | 57.6 | --- | 74.0 | 16.4 | V |
| 39670.7 | --- | 46.5 | 54.0 | 7.5 | H |

Radiated Spurious – CH40

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3377.0 | 59.0 | --- | 68.2 | 9.2 | V |
| 10405.9 | 53.9 | --- | 68.2 | 14.3 | H |
| 15599.3 | 55.8 | --- | 74.0 | 18.2 | V |
| 15599.3 | --- | 47.0 | 54.0 | 7.0 | V |
| 20796.0 | --- | 36.7 | 54.0 | 17.3 | V |
| 20803.1 | 48.4 | --- | 74.0 | 25.6 | V |

Radiated Spurious – CH48

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|------------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 3309.5 | 59.3 | --- | 68.2 | 8.9 | V |
| 10478.4 | 51.1 | --- | 68.2 | 17.1 | H |
| 15725.0 | 58.2 | --- | 74.0 | 15.8 | V |
| 15725.0 | --- | 47.7 | 54.0 | 6.3 | V |
| 20962.7 | --- | 41.1 | 54.0 | 12.9 | V |
| 20967.4 | 52.2 | --- | 74.0 | 21.8 | V |
| 31435.7 | 54.0 | --- | 74.0 | 20.0 | H |
| 31436.7 | --- | 43.4 | 54.0 | 10.6 | H |

1 GHz– 40 GHz, 802.11n40, HT0, Chain A DIV1
Radiated Spurious – CH38

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 3296.0 | 58.9 | --- | 68.2 | 9.3 | H |
| 10379.8 | 49.7 | --- | 68.2 | 18.5 | V |
| 15593.5 | 50.5 | --- | 74.0 | 23.5 | H |
| 15593.5 | --- | 41.8 | 54.0 | 12.2 | V |
| 39443.6 | 57.6 | --- | 74.0 | 16.4 | V |
| 39451.8 | --- | 45.5 | 54.0 | 8.5 | H |

Radiated Spurious – CH46

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 3316.0 | 58.9 | --- | 68.2 | 9.3 | H |
| 10455.6 | 50.6 | --- | 68.2 | 17.6 | V |
| 15692.6 | 51.3 | --- | 74.0 | 22.7 | V |
| 15692.6 | --- | 43.5 | 54.0 | 10.5 | V |
| 39616.7 | 57.0 | --- | 74.0 | 16.9 | H |
| 39616.7 | --- | 45.6 | 54.0 | 8.4 | H |

1 GHz – 40 GHz, 802.11n40, HT0, Chain A DIV2

Radiated Spurious – CH38

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3377.0 | 59.6 | --- | 68.2 | 8.6 | H |
| 10373.5 | 51.6 | --- | 68.2 | 16.6 | H |
| 15575.1 | --- | 42.5 | 54.0 | 11.6 | V |
| 15575.1 | 55.6 | --- | 74.0 | 18.4 | V |
| 39597.9 | 57.4 | --- | 74.0 | 16.6 | H |
| 39598.9 | --- | 45.8 | 54.0 | 8.2 | H |

Radiated Spurious – CH46

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3250.0 | 59.1 | --- | 68.2 | 9.1 | H |
| 10463.9 | 48.5 | --- | 68.2 | 19.7 | H |
| 15703.2 | 52.8 | --- | 74.0 | 21.2 | V |
| 15703.2 | --- | 44.8 | 54.0 | 9.2 | V |
| 39701.1 | 57.3 | --- | 74.0 | 16.7 | H |
| 39701.6 | --- | 45.8 | 54.0 | 8.2 | V |

802.11ac

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A DIV1

Radiated Spurious – CH42

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3375.5 | 59.8 | --- | 68.2 | 8.4 | H |
| 10403.9 | 49.0 | --- | 68.2 | 19.2 | V |
| 15639.9 | 57.7 | --- | 74.0 | 16.3 | V |
| 15639.9 | --- | 49.5 | 54.0 | 4.5 | V |
| 20839.9 | --- | 38.4 | 54.0 | 15.7 | V |
| 20843.2 | 47.7 | --- | 74.0 | 26.3 | V |

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A DIV2

Radiated Spurious – CH42

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 3295.0 | 59.2 | --- | 68.2 | 9.0 | H |
| 10412.1 | 48.8 | --- | 68.2 | 19.4 | H |
| 15638.4 | 51.6 | --- | 74.0 | 22.4 | V |
| 15638.4 | --- | 42.8 | 54.0 | 11.2 | V |
| 20870.6 | --- | 37.5 | 54.0 | 16.5 | V |
| 20871.6 | 49.1 | --- | 74.0 | 24.9 | V |

802.11ax

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A DIV1

Radiated Spurious – CH36

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 3311.5 | 59.1 | --- | 68.2 | 9.1 | V |
| 10344.0 | 60.0 | --- | 68.2 | 8.2 | H |
| 15514.7 | 56.7 | --- | 74.0 | 17.3 | V |
| 15514.7 | --- | 49.4 | 54.0 | 4.6 | V |
| 39485.6 | 57.1 | --- | 74.0 | 16.9 | H |
| 39486.0 | --- | 45.1 | 54.0 | 8.9 | V |

Radiated Spurious – CH40

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 3287.0 | 60.1 | --- | 68.2 | 8.1 | V |
| 12508.4 | --- | 36.6 | 54.0 | 17.4 | H |
| 12508.4 | 51.2 | --- | 74.0 | 22.8 | H |
| 15574.6 | 55.8 | --- | 74.0 | 18.2 | H |
| 15574.6 | --- | 48.8 | 54.0 | 5.2 | H |
| 39702.5 | 57.1 | --- | 74.0 | 16.9 | V |
| 39702.5 | --- | 45.7 | 54.0 | 8.3 | H |

Radiated Spurious – CH48

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3387.5 | 59.1 | --- | 68.2 | 9.1 | V |
| 10463.9 | 47.6 | --- | 68.2 | 20.6 | H |
| 15695.0 | 56.0 | --- | 74.0 | 18.0 | V |
| 15695.0 | --- | 49.8 | 54.0 | 4.2 | H |
| 39528.9 | 57.4 | --- | 74.0 | 16.6 | H |
| 39528.9 | --- | 45.0 | 54.0 | 9.0 | H |

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A DIV2

Radiated Spurious – CH36

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|------------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3153.5 | 59.6 | --- | 68.2 | 8.6 | H |
| 10344.0 | 62.7 | --- | 68.2 | 5.5 | H |
| 15514.7 | 57.6 | --- | 74.0 | 16.4 | V |
| 15514.7 | --- | 50.5 | 54.0 | 3.5 | V |
| 39621.5 | 57.8 | --- | 74.0 | 16.2 | V |
| 39621.5 | --- | 45.6 | 54.0 | 8.4 | V |

Radiated Spurious – CH40

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3398.5 | 60.0 | --- | 68.2 | 8.2 | H |
| 10383.6 | 51.0 | --- | 68.2 | 17.2 | H |
| 15574.1 | 54.6 | --- | 74.0 | 19.4 | V |
| 15574.1 | --- | 47.7 | 54.0 | 6.3 | H |
| 39706.9 | 57.7 | --- | 74.0 | 16.3 | V |
| 39710.7 | --- | 45.8 | 54.0 | 8.2 | V |

Radiated Spurious – CH48

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 5471.0 | 54.0 | --- | 68.2 | 14.2 | H |
| 10463.9 | 47.5 | --- | 68.2 | 20.7 | V |
| 15694.5 | 58.5 | --- | 74.0 | 15.5 | V |
| 15694.5 | --- | 50.2 | 54.0 | 3.8 | H |
| 39714.6 | 57.7 | --- | 74.0 | 16.3 | H |
| 39714.6 | --- | 45.7 | 54.0 | 8.3 | V |

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A DIV1
Radiated Spurious – CH38F

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 3368.0 | 59.5 | --- | 68.2 | 8.7 | V |
| 10344.0 | 57.5 | --- | 68.2 | 10.7 | H |
| 15516.1 | 56.1 | --- | 74.0 | 17.9 | V |
| 15516.1 | --- | 49.2 | 54.0 | 4.8 | V |
| 39683.2 | --- | 46.0 | 54.0 | 8.0 | H |
| 39683.7 | 57.4 | --- | 74.0 | 16.6 | H |

Radiated Spurious – CH46

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 5452.2 | 53.0 | --- | 74.0 | 21.0 | H |
| 5452.2 | --- | 42.7 | 54.0 | 11.3 | H |
| 15636.5 | 56.5 | --- | 74.0 | 17.5 | V |
| 15636.5 | --- | 47.2 | 54.0 | 6.8 | V |
| 39618.6 | 57.2 | --- | 74.0 | 16.8 | H |
| 39619.1 | --- | 46.2 | 54.0 | 7.8 | H |

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A DIV2

Radiated Spurious – CH38

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 3236.0 | 59.0 | --- | 68.2 | 9.2 | H |
| 10344.0 | 61.6 | --- | 68.2 | 6.6 | H |
| 15516.1 | --- | 51.3 | 54.0 | 2.7 | V |
| 15516.6 | 58.3 | --- | 74.0 | 15.7 | V |
| 39609.9 | 57.8 | --- | 74.0 | 16.2 | H |
| 39609.9 | --- | 46.2 | 54.0 | 7.8 | H |

Radiated Spurious – CH46

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 5452.2 | 54.0 | --- | 74.0 | 20.0 | V |
| 5452.2 | --- | 43.3 | 54.0 | 10.7 | V |
| 10423.3 | 48.7 | --- | 68.2 | 19.5 | V |
| 15636.5 | 58.2 | --- | 74.0 | 15.8 | H |
| 15636.5 | --- | 48.7 | 54.0 | 5.3 | H |
| 39930.6 | 57.9 | --- | 74.0 | 16.1 | V |
| 39930.6 | --- | 45.8 | 54.0 | 8.2 | V |

1 GHz – 40 GHz, 802.11ax80, HE0, Chain A DIV1

Radiated Spurious – CH42

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 3388.0 | 59.0 | --- | 68.2 | 9.2 | H |
| 15515.7 | 53.7 | --- | 74.0 | 20.3 | H |
| 15515.7 | --- | 47.0 | 54.0 | 7.0 | H |
| 39519.8 | 57.0 | --- | 74.0 | 17.0 | H |
| 39519.8 | --- | 45.3 | 54.0 | 8.7 | V |

1 GHz – 40 GHz, 802.11ax80, HE0, Chain A DIV2

Radiated Spurious – CH42

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 3874.5 | 50.5 | --- | 74.0 | 23.6 | V |
| 3874.5 | --- | 41.2 | 54.0 | 12.8 | V |
| 6487.0 | 47.2 | --- | 68.2 | 21.0 | H |
| 10344.0 | 48.6 | --- | 68.2 | 19.6 | H |
| 15515.7 | --- | 42.6 | 54.0 | 11.3 | H |
| 15515.7 | 52.2 | --- | 74.0 | 21.8 | H |
| 39579.6 | 57.1 | --- | 74.0 | 16.9 | H |
| 39592.6 | --- | 46.0 | 54.0 | 8.1 | H |

B.3 Test Results Tables U-NII-2A

B.3.1 26dB & 99% Bandwidth

Test procedure

The conducted setup shown in section was used to measure the 26dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

| Mode | Rate | Antenna | Channel | Freq [MHz] | 26dB BW [MHz] | 99% BW [MHz] |
|------------|-------|--------------|---------|------------|---------------|--------------|
| 802.11a | 6Mbps | CHAIN A DIV1 | 52 | 5260 | 34.80 | 19.48 |
| | | | 56 | 5280 | 29.40 | 18.80 |
| | | | 64 | 5320 | 23.60 | 16.56 |
| | | CHAIN A DIV2 | 52 | 5260 | 32.60 | 19.40 |
| | | | 56 | 5280 | 29.80 | 18.72 |
| | | | 64 | 5320 | 23.75 | 16.64 |
| 802.11n20 | HT0 | CHAIN A DIV1 | 52 | 5260 | 34.55 | 19.52 |
| | | | 56 | 5280 | 32.80 | 18.48 |
| | | | 64 | 5320 | 23.80 | 17.64 |
| | | CHAIN A DIV2 | 52 | 5260 | 35.75 | 20.96 |
| | | | 56 | 5280 | 29.90 | 18.44 |
| | | | 64 | 5320 | 23.85 | 17.76 |
| 802.11n40 | HT0 | CHAIN A DIV1 | 54 | 5270 | 43.29 | 36.16 |
| | | | 62 | 5310 | 43.29 | 36.08 |
| | | CHAIN A DIV2 | 54 | 5270 | 43.02 | 36.16 |
| | | | 62 | 5310 | 43.47 | 36.08 |
| 802.11ac80 | VHT0 | CHAIN A DIV1 | 58 | 5290 | 88.35 | 75.00 |
| | | CHAIN A DIV2 | | | 87.21 | 75.00 |

Max Value

| Mode | Rate | Antenna | Channel | Freq [MHz] | RU config. | 26dB BW [MHz] | 99% BW [MHz] |
|------------|------|--------------|---------|------------|------------|---------------|--------------|
| 802.11ax20 | HE0 | CHAIN A DIV1 | 52 | 5260 | Full | 32.15 | 19.44 |
| | | | 56 | 5280 | Full | 27.70 | 19.04 |
| | | | 64 | 5320 | Full | 23.15 | 19.00 |
| | | | | | 26/8 | 21.00 | 18.32 |
| | | | | | 52/40 | 21.80 | 18.28 |
| | | | | | 106/54 | 23.05 | 17.52 |
| | | CHAIN A DIV2 | 52 | 5260 | Full | 32.20 | 19.60 |
| | | | 56 | 5280 | Full | 28.80 | 19.08 |
| | | | 64 | 5320 | Full | 23.55 | 18.92 |
| | | | | | 26/8 | 20.90 | 18.12 |
| | | | | | 52/40 | 22.40 | 18.40 |
| | | | | | 106/54 | 23.20 | 18.28 |
| 802.11ax40 | HE0 | CHAIN A DIV1 | 54 | 5270 | Full | 42.93 | 37.52 |
| | | | 62 | 5310 | Full | 42.66 | 37.60 |
| | | | | | 242/62 | 23.58 | 18.80 |
| | | CHAIN A DIV2 | 54 | 5270 | Full | 42.12 | 37.52 |
| | | | 62 | 5310 | Full | 42.93 | 37.44 |
| | | | | | 242/62 | 23.40 | 18.80 |
| 802.11ax80 | HE0 | CHAIN A DIV1 | 58 | 5290 | Full | 83.79 | 76.80 |
| | | CHAIN A DIV2 | | | 484/66 | 43.13 | 37.44 |
| | | | | | Full | 83.03 | 76.68 |
| | | | | | 484/66 | 42.94 | 37.44 |

Max Value

See Section B.3.5 for the screenshot results

B.3.2 Power Limits. Maximum Output power & Maximum power spectral density

Test limits

| FCC part | Limits |
|-------------------|--|
| 15.407 (a) (2) | For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. |

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to section E) 2) e) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

The maximum power spectral density (PSD) was measured using the method according to section F) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The conducted setup shown in section was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

Duty cycle

| Mode | Rate | Antenna | Duty Cycle [%] |
|------------|-------|--------------|----------------|
| 802.11a | 6Mbps | CHAIN A DIV1 | 94.90% |
| | | CHAIN A DIV2 | 94.90% |
| 802.11n20 | HT0 | CHAIN A DIV1 | 98.68% |
| | | CHAIN A DIV2 | 98.68% |
| 802.11ax20 | HE0 | CHAIN A DIV1 | 98.68% |
| | | CHAIN A DIV2 | 98.68% |
| 802.11n40 | HT0 | CHAIN A DIV1 | 98.68% |
| | | CHAIN A DIV2 | 98.68% |
| 802.11ax40 | HE0 | CHAIN A DIV1 | 98.68% |
| | | CHAIN A DIV2 | 98.68% |
| 802.11ac80 | VHT0 | CHAIN A DIV1 | 98.60% |
| | | CHAIN A DIV2 | 98.60% |
| 802.11ax80 | HE0 | CHAIN A DIV1 | 98.60% |
| | | CHAIN A DIV2 | 98.60% |

Maximum output power

| Mode | Rate | Channel | Freq [MHz] | Antenna | Average Conducted Ouput Power [dBm] | Avg Max* Conducted Ouput Power [dBm] | Avg Max*. EIRP [dBm] | Avg Max* Conducted Power [mW] |
|------------|-------|---------|------------|--------------|-------------------------------------|--------------------------------------|----------------------|-------------------------------|
| 802.11a | 6Mbps | 52 | 5260 | CHAIN A DIV1 | 21.22 | 21.45 | 26.45 | 139.55 |
| | | | | CHAIN A DIV2 | 20.99 | 21.22 | 26.22 | 132.35 |
| | | 56 | 5280 | CHAIN A DIV1 | 20.97 | 21.20 | 26.20 | 131.74 |
| | | | | CHAIN A DIV2 | 20.76 | 20.99 | 25.99 | 125.53 |
| | | 64 | 5320 | CHAIN A DIV1 | 16.73 | 16.96 | 21.96 | 49.63 |
| | | | | CHAIN A DIV2 | 16.50 | 16.73 | 21.73 | 47.07 |
| 802.11n20 | HT0 | 52 | 5260 | CHAIN A DIV1 | 21.17 | 21.17 | 26.17 | 130.92 |
| | | | | CHAIN A DIV2 | 21.27 | 21.27 | 26.27 | 133.97 |
| | | 56 | 5280 | CHAIN A DIV1 | 20.91 | 20.91 | 25.91 | 123.31 |
| | | | | CHAIN A DIV2 | 20.67 | 20.67 | 25.67 | 116.68 |
| | | 64 | 5320 | CHAIN A DIV1 | 16.64 | 16.64 | 21.64 | 46.13 |
| | | | | CHAIN A DIV2 | 16.46 | 16.46 | 21.46 | 44.26 |
| 802.11n40 | HT0 | 54 | 5270 | CHAIN A DIV1 | 17.62 | 17.62 | 22.62 | 57.81 |
| | | | | CHAIN A DIV2 | 17.54 | 17.54 | 22.54 | 56.75 |
| | | 62 | 5310 | CHAIN A DIV1 | 15.00 | 15.00 | 20.00 | 31.62 |
| | | | | CHAIN A DIV2 | 15.07 | 15.07 | 20.07 | 32.14 |
| 802.11ac80 | VHT0 | 58 | 5290 | CHAIN A DIV1 | 15.67 | 15.67 | 20.67 | 36.90 |
| | | | | CHAIN A DIV2 | 15.56 | 15.56 | 20.56 | 35.97 |

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

| Mode | Rate | Channel | Freq [MHz] | Antenna | RU config. | Average Conducted Output Power [dBm] | Avg Max* Conducted Output Power [dBm] | Avg Max* EIRP [dBm] | Avg Max* Conducted Power [mW] |
|------------|--------------|--------------|--------------|--------------|------------|--------------------------------------|---------------------------------------|---------------------|-------------------------------|
| 802.11ax20 | HE0 | 52 | 5260 | CHAIN A DIV1 | Full | 21.08 | 21.08 | 26.08 | 128.23 |
| | | | | CHAIN A DIV2 | Full | 21.26 | 21.26 | 26.26 | 133.66 |
| | | 56 | 5280 | CHAIN A DIV1 | Full | 20.61 | 20.61 | 25.61 | 115.08 |
| | | | | CHAIN A DIV2 | Full | 20.47 | 20.47 | 25.47 | 111.43 |
| | | 64 | 5320 | CHAIN A DIV1 | Full | 16.37 | 16.37 | 21.37 | 43.35 |
| | | | | | 26/8 | 13.81 | 13.81 | 18.81 | 24.04 |
| | 52/40 | | | | 16.44 | 16.44 | 21.44 | 44.06 | |
| | CHAIN A DIV2 | | | 106/54 | 16.41 | 16.41 | 21.41 | 43.75 | |
| | | | | Full | 15.65 | 15.65 | 20.65 | 36.73 | |
| | | | | 26/8 | 13.75 | 13.75 | 18.75 | 23.71 | |
| | 54 | 5270 | CHAIN A DIV1 | Full | 17.51 | 17.51 | 22.51 | 56.36 | |
| | | | CHAIN A DIV2 | Full | 17.59 | 17.59 | 22.59 | 57.41 | |
| 802.11ax40 | HE0 | 62 | 5310 | CHAIN A DIV1 | Full | 15.01 | 15.01 | 20.01 | 31.70 |
| | | | | 242/62 | 16.60 | 16.60 | 21.60 | 45.71 | |
| | | CHAIN A DIV2 | Full | 15.17 | 15.17 | 20.17 | 32.89 | | |
| | | | 242/62 | 16.52 | 16.52 | 21.52 | 44.87 | | |
| 802.11ax80 | HE0 | 58 | 5290 | CHAIN A DIV1 | Full | 15.52 | 15.52 | 20.52 | 35.65 |
| | | | | | 484/66 | 15.10 | 15.10 | 20.10 | 32.36 |
| | | | | CHAIN A DIV2 | Full | 15.24 | 15.24 | 20.24 | 33.42 |
| | | | | | 484/66 | 15.07 | 15.07 | 20.07 | 32.14 |

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

Maximum Power Spectral Density (PSD)

| Mode | Rate | Channel | Freq [MHz] | Antenna | Average conducted PSD [dBm/MHz] | Maximum* conducted PSD [dBm/MHz] |
|------------|-------|---------|------------|--------------|---------------------------------|----------------------------------|
| 802.11a | 6Mbps | 52 | 5260 | CHAIN A DIV1 | 10.38 | 10.61 |
| | | | | CHAIN A DIV2 | 10.15 | 10.38 |
| | | 56 | 5280 | CHAIN A DIV1 | 10.13 | 10.36 |
| | | | | CHAIN A DIV2 | 9.93 | 10.16 |
| | | 64 | 5320 | CHAIN A DIV1 | 5.92 | 6.15 |
| | | | | CHAIN A DIV2 | 5.71 | 5.94 |
| 802.11n20 | HT0 | 52 | 5260 | CHAIN A DIV1 | 10.13 | 10.13 |
| | | | | CHAIN A DIV2 | 10.20 | 10.20 |
| | | 56 | 5280 | CHAIN A DIV1 | 9.88 | 9.88 |
| | | | | CHAIN A DIV2 | 9.65 | 9.65 |
| | | 64 | 5320 | CHAIN A DIV1 | 5.64 | 5.64 |
| | | | | CHAIN A DIV2 | 5.44 | 5.44 |
| 802.11n40 | HT0 | 54 | 5270 | CHAIN A DIV1 | 3.16 | 3.16 |
| | | | | CHAIN A DIV2 | 3.06 | 3.06 |
| | | 62 | 5310 | CHAIN A DIV1 | 0.60 | 0.60 |
| | | | | CHAIN A DIV2 | 0.62 | 0.62 |
| 802.11ac80 | VHT0 | 58 | 5290 | CHAIN A DIV1 | -1.85 | -1.85 |
| | | | | CHAIN A DIV2 | -1.97 | -1.97 |

* Maximum values are the duty cycle compensated values calculated from the measured average values

| Mode | Rate | #Ch | Freq [MHz] | Antenna | RU config. | Average conducted PSD [dBm/MHz] | Maximum* conducted PSD [dBm/MHz] | |
|------------|------------|------|--------------|--------------|--------------|---------------------------------|----------------------------------|------|
| 802.11ax20 | HE0 | 52 | 5260 | CHAIN A DIV1 | Full | 9.87 | 9.87 | |
| | | | | CHAIN A DIV2 | Full | 10.03 | 10.03 | |
| | | 56 | 5280 | CHAIN A DIV1 | Full | 9.42 | 9.42 | |
| | | | | CHAIN A DIV2 | Full | 9.28 | 9.28 | |
| | 64 | 5320 | CHAIN A DIV1 | Full | 5.16 | 5.16 | | |
| | | | | 26/8 | 10.98 | 10.98 | | |
| | | | | 52/40 | 10.68 | 10.68 | | |
| | | | CHAIN A DIV2 | 106/54 | 7.58 | 7.58 | | |
| | | | | Full | 4.44 | 4.44 | | |
| | | | | 26/8 | 10.92 | 10.92 | | |
| | 802.11ax40 | HE0 | 54 | 5270 | CHAIN A DIV1 | Full | 2.88 | 2.88 |
| | | | | | CHAIN A DIV2 | Full | 2.97 | 2.97 |
| 62 | | 5310 | CHAIN A DIV1 | Full | 0.44 | 0.44 | | |
| | | | | 242/62 | 5.28 | 5.28 | | |
| | | | CHAIN A DIV2 | Full | 0.55 | 0.55 | | |
| | | | | 242/62 | 5.19 | 5.19 | | |
| 802.11ax80 | HE0 | 58 | 5290 | CHAIN A DIV1 | Full | -2.07 | -2.07 | |
| | | | | | 484/66 | 0.45 | 0.45 | |
| | | | | CHAIN A DIV2 | Full | -2.39 | -2.39 | |
| | | | | | 484/66 | 0.52 | 0.52 | |

* Maximum values are the duty cycle compensated values calculated from the measured average values

See Section B.3.6 for the screenshot results

B.3.3 Undesirable emissions limits : out of band (Conducted)

Test limits

| FCC part | Limits | | | | | | | | | | | | | | | | | | | | |
|------------------|--|-------------------------|-----------------------|-------------------------|--------------------|-------|-----|----|---|--------|-----|------|---|---------|-----|----|---|-----------|-----|----|---|
| 15.407 (b) (2) | For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz. | | | | | | | | | | | | | | | | | | | | |
| 15.209 | <p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th style="background-color: #d9e1f2;">Freq Range (MHz)</th> <th style="background-color: #d9e1f2;">Field Strength (μV/m)</th> <th style="background-color: #d9e1f2;">Field Strength (dBμV/m)</th> <th style="background-color: #d9e1f2;">Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td>30-88</td> <td>100</td> <td>40</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150</td> <td>43.5</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200</td> <td>46</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>54</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p> | Freq Range (MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Meas. Distance (m) | 30-88 | 100 | 40 | 3 | 88-216 | 150 | 43.5 | 3 | 216-960 | 200 | 46 | 3 | Above 960 | 500 | 54 | 3 |
| Freq Range (MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Meas. Distance (m) | | | | | | | | | | | | | | | | | | |
| 30-88 | 100 | 40 | 3 | | | | | | | | | | | | | | | | | | |
| 88-216 | 150 | 43.5 | 3 | | | | | | | | | | | | | | | | | | |
| 216-960 | 200 | 46 | 3 | | | | | | | | | | | | | | | | | | |
| Above 960 | 500 | 54 | 3 | | | | | | | | | | | | | | | | | | |

Test procedure

The conducted setup shown in section was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

Both lower and upper side of the out of band were performed using the integration method as defined in the out of band measurements section (paragraph II.G.3.d) of 789033 D02 v02r01.

In case of out of band measurements falling in restricted bands, the declared antenna gain is also compensated in the graph.

For out of band measurements falling in restricted bands, the following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dBμV/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.

| §15.209(a) | | | Converted values | |
|------------------|--------------|-----------------------------------|--------------------------------------|-------------|
| Freq Range (MHz) | Distance (m) | Field strength (microvolts/meter) | Field strength (dB microvolts/meter) | Power (dBm) |
| 960-25000 | 3 | 500 | 53.98 | -41.2 |

See Section B.3.7 for the screenshot results.

B.3.4 Radiated spurious emission

Standard references

| FCC part | Limits | | | | | | | | | | | | | | | | | | | | |
|------------------|---|-------------------------|-----------------------|-------------------------|--------------------|-------|-----|----|---|--------|-----|------|---|---------|-----|----|---|-----------|-----|----|---|
| 15.407 (a) (2) | For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. | | | | | | | | | | | | | | | | | | | | |
| 15.209 | <p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1" data-bbox="541 629 1331 840"> <thead> <tr> <th data-bbox="547 638 740 698">Freq Range (MHz)</th> <th data-bbox="740 638 933 698">Field Strength (µV/m)</th> <th data-bbox="933 638 1126 698">Field Strength (dBµV/m)</th> <th data-bbox="1126 638 1324 698">Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td data-bbox="547 698 740 730">30-88</td> <td data-bbox="740 698 933 730">100</td> <td data-bbox="933 698 1126 730">40</td> <td data-bbox="1126 698 1324 730">3</td> </tr> <tr> <td data-bbox="547 730 740 761">88-216</td> <td data-bbox="740 730 933 761">150</td> <td data-bbox="933 730 1126 761">43.5</td> <td data-bbox="1126 730 1324 761">3</td> </tr> <tr> <td data-bbox="547 761 740 792">216-960</td> <td data-bbox="740 761 933 792">200</td> <td data-bbox="933 761 1126 792">46</td> <td data-bbox="1126 761 1324 792">3</td> </tr> <tr> <td data-bbox="547 792 740 840">Above 960</td> <td data-bbox="740 792 933 840">500</td> <td data-bbox="933 792 1126 840">54</td> <td data-bbox="1126 792 1324 840">3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p> | Freq Range (MHz) | Field Strength (µV/m) | Field Strength (dBµV/m) | Meas. Distance (m) | 30-88 | 100 | 40 | 3 | 88-216 | 150 | 43.5 | 3 | 216-960 | 200 | 46 | 3 | Above 960 | 500 | 54 | 3 |
| Freq Range (MHz) | Field Strength (µV/m) | Field Strength (dBµV/m) | Meas. Distance (m) | | | | | | | | | | | | | | | | | | |
| 30-88 | 100 | 40 | 3 | | | | | | | | | | | | | | | | | | |
| 88-216 | 150 | 43.5 | 3 | | | | | | | | | | | | | | | | | | |
| 216-960 | 200 | 46 | 3 | | | | | | | | | | | | | | | | | | |
| Above 960 | 500 | 54 | 3 | | | | | | | | | | | | | | | | | | |

Test procedure

The radiated setups shown in section were used to measure the radiated spurious emissions. Depending of the frequency range and bands being tested, different antennas and filters were used. The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration selected from the section B.2.2 and using the low, middle and high channels.

Test Results

Radiated spurious - 30 MHz to 1 GHz

Radiated Spurious – All modes

| Frequency | Quasi-Peak | Limit | Margin | Polar |
|-----------|------------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dB | --- |
| 37.5 | 30.5 | 40.0 | 9.5 | V |
| 74.9 | 31.3 | 40.0 | 8.7 | V |
| 136.9 | 37.9 | 43.5 | 5.7 | H |
| 261.5 | 40.6 | 46.0 | 5.4 | H |

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain A DIV1

Radiated Spurious – CH52

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|------------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3387.0 | 59.2 | --- | 68.2 | 8.9 | H |
| 10520.4 | 49.4 | --- | 68.2 | 18.8 | V |
| 15777.1 | 59.5 | --- | 74.0 | 14.5 | H |
| 15777.1 | --- | 50.7 | 54.0 | 3.3 | H |
| 21039.7 | --- | 38.1 | 54.0 | 15.9 | V |
| 21041.6 | 49.5 | --- | 74.0 | 24.5 | V |

Radiated Spurious – CH56

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3384.5 | 58.4 | --- | 68.2 | 9.8 | V |
| 10560.0 | 50.4 | --- | 68.2 | 17.8 | H |
| 15841.4 | 55.5 | --- | 74.0 | 18.5 | V |
| 15841.4 | --- | 47.9 | 54.0 | 6.1 | V |
| 21120.0 | 48.5 | --- | 74.0 | 25.5 | V |
| 21122.8 | --- | 38.8 | 54.0 | 15.2 | V |

Radiated Spurious – CH64

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3358.5 | 59.8 | --- | 68.2 | 8.4 | V |
| 15960.8 | 53.3 | --- | 74.0 | 20.7 | V |
| 15960.8 | --- | 43.8 | 54.0 | 10.2 | V |
| 39636.5 | --- | 46.3 | 54.0 | 7.7 | H |
| 39636.5 | 57.4 | --- | 74.0 | 16.6 | V |

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain A DIV2
Radiated Spurious – CH52

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3374.0 | 59.4 | --- | 68.2 | 8.8 | V |
| 10519.9 | 48.1 | --- | 68.2 | 20.1 | H |
| 15780.5 | 55.3 | --- | 74.0 | 18.7 | V |
| 15780.5 | --- | 46.6 | 54.0 | 7.4 | V |
| 21043.9 | --- | 41.3 | 54.0 | 12.7 | V |
| 21051.0 | 52.2 | --- | 74.0 | 21.8 | V |
| 31562.5 | --- | 42.8 | 54.0 | 11.2 | H |
| 31562.5 | 52.5 | --- | 74.0 | 21.5 | H |

Radiated Spurious – CH56

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3364.5 | 58.9 | --- | 68.2 | 9.3 | H |
| 10564.4 | 49.6 | --- | 68.2 | 18.6 | H |
| 15844.3 | 53.6 | --- | 74.0 | 20.4 | V |
| 15844.3 | --- | 45.5 | 54.0 | 8.5 | V |
| 21124.2 | --- | 38.3 | 54.0 | 15.7 | V |
| 21124.2 | 49.3 | --- | 74.0 | 24.7 | V |
| 31675.8 | 51.3 | --- | 74.0 | 22.7 | H |
| 31690.3 | --- | 41.6 | 54.0 | 12.4 | H |

Radiated Spurious – CH64

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3343.5 | 58.9 | --- | 68.2 | 9.3 | V |
| 10641.2 | 48.7 | --- | 74.0 | 25.3 | V |
| 10641.2 | --- | 40.5 | 54.0 | 13.6 | V |
| 15960.3 | 52.6 | --- | 74.0 | 21.4 | H |
| 15960.3 | --- | 43.9 | 54.0 | 10.1 | H |
| 39854.4 | 58.1 | --- | 74.0 | 15.9 | H |
| 39854.9 | --- | 45.7 | 54.0 | 8.3 | H |

1 GHz – 40 GHz, 802.11n20, HT0, Chain A DIV1
Radiated Spurious – CH52

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|------------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3393.0 | 58.7 | --- | 68.2 | 9.5 | H |
| 10520.4 | 50.4 | --- | 68.2 | 17.8 | V |
| 15781.0 | --- | 47.2 | 54.0 | 6.8 | V |
| 15781.0 | 53.8 | --- | 74.0 | 20.2 | V |
| 21037.3 | 48.8 | --- | 74.0 | 25.2 | V |
| 21039.7 | --- | 38.7 | 54.0 | 15.3 | V |

Radiated Spurious – CH56

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3294.5 | 59.2 | --- | 68.2 | 9.0 | V |
| 10563.4 | 50.9 | --- | 68.2 | 17.3 | H |
| 15844.8 | 56.7 | --- | 74.0 | 17.3 | V |
| 15844.8 | --- | 46.4 | 54.0 | 7.6 | V |
| 21120.0 | --- | 39.1 | 54.0 | 14.9 | V |
| 21123.8 | 49.6 | --- | 74.0 | 24.4 | V |

Radiated Spurious – CH64

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3290.0 | 58.9 | --- | 68.2 | 9.3 | H |
| 15962.3 | --- | 46.0 | 54.0 | 8.0 | V |
| 15964.7 | 57.1 | --- | 74.0 | 16.9 | V |
| 39631.2 | --- | 46.0 | 54.0 | 8.0 | H |
| 39636.0 | 56.3 | --- | 74.0 | 17.7 | H |

1 GHz – 40 GHz, 802.11n20, HT0, Chain A DIV2
Radiated Spurious – CH52

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3293.0 | 59.1 | --- | 68.2 | 9.1 | V |
| 10519.5 | 48.5 | --- | 68.2 | 19.7 | H |
| 15780.0 | --- | 44.9 | 54.0 | 9.1 | V |
| 15780.5 | 54.1 | --- | 74.0 | 19.9 | H |
| 21035.4 | --- | 40.5 | 54.0 | 13.5 | V |
| 21035.9 | 50.1 | --- | 74.0 | 23.9 | V |
| 31563.0 | --- | 43.0 | 54.0 | 11.0 | H |
| 31566.8 | 53.6 | --- | 74.0 | 20.4 | H |

Radiated Spurious – CH56

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3286.0 | 59.1 | --- | 68.2 | 9.1 | V |
| 10560.0 | 48.6 | --- | 68.2 | 19.6 | H |
| 15841.0 | --- | 45.1 | 54.0 | 8.9 | V |
| 15841.4 | 53.1 | --- | 74.0 | 20.9 | V |
| 21120.4 | 50.1 | --- | 74.0 | 23.9 | V |
| 21120.4 | --- | 40.0 | 54.0 | 14.0 | V |
| 31682.6 | --- | 42.0 | 54.0 | 12.0 | H |
| 31687.4 | 51.6 | --- | 74.0 | 22.4 | H |

Radiated Spurious – CH64

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3178.0 | 59.5 | --- | 68.2 | 8.7 | V |
| 10641.7 | --- | 40.4 | 54.0 | 13.6 | V |
| 10641.7 | 50.4 | --- | 74.0 | 23.6 | V |
| 15962.8 | 53.5 | --- | 74.0 | 20.4 | V |
| 15962.8 | --- | 44.8 | 54.0 | 9.2 | V |
| 39528.9 | 57.2 | --- | 74.0 | 16.8 | H |
| 39529.4 | --- | 44.7 | 54.0 | 9.3 | V |

1 GHz – 40 GHz, 802.11n40, HT0, Chain A DIV1
Radiated Spurious – CH54

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3371.5 | 59.1 | --- | 68.2 | 9.1 | H |
| 10549.4 | 48.1 | --- | 68.2 | 20.1 | V |
| 15814.4 | --- | 43.9 | 54.0 | 10.1 | V |
| 15820.2 | 53.9 | --- | 74.0 | 20.1 | V |
| 21079.8 | 45.6 | --- | 74.0 | 28.4 | H |
| 21079.8 | --- | 37.3 | 54.0 | 16.7 | V |

Radiated Spurious – CH62

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|------------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3296.0 | 59.5 | --- | 68.2 | 8.7 | H |
| 15938.1 | --- | 42.8 | 54.0 | 11.2 | V |
| 15938.1 | 53.6 | --- | 74.0 | 20.4 | H |
| 39630.2 | --- | 46.1 | 54.0 | 7.9 | H |
| 39647.6 | 56.6 | --- | 74.0 | 17.4 | H |

1 GHz – 40 GHz, 802.11n40, HT0, Chain A DIV2
Radiated Spurious – CH54

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 2983.0 | 59.8 | --- | 68.2 | 8.4 | V |
| 10545.5 | 47.7 | --- | 68.2 | 20.5 | H |
| 15798.4 | 52.3 | --- | 74.0 | 21.7 | V |
| 15799.4 | --- | 42.0 | 54.0 | 12.0 | V |
| 39672.6 | --- | 45.1 | 54.0 | 8.9 | V |
| 39672.6 | 56.9 | --- | 74.0 | 17.1 | H |

Radiated Spurious – CH62

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3394.0 | 59.4 | --- | 68.2 | 8.8 | H |
| 10621.0 | 47.9 | --- | 74.0 | 26.1 | V |
| 10623.9 | --- | 38.5 | 54.0 | 15.5 | V |
| 15917.8 | 52.5 | --- | 74.0 | 21.5 | V |
| 15940.0 | --- | 41.9 | 54.0 | 12.2 | V |
| 39648.5 | --- | 46.1 | 54.0 | 7.9 | H |
| 39650.9 | 56.1 | --- | 74.0 | 17.9 | V |

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A DIV1
Radiated Spurious – CH58

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3043.5 | 59.7 | --- | 68.2 | 8.5 | H |
| 10563.4 | 50.6 | --- | 68.2 | 17.6 | V |
| 15863.2 | 51.3 | --- | 74.0 | 22.8 | V |
| 15863.2 | --- | 42.5 | 54.0 | 11.5 | V |
| 39639.8 | --- | 46.0 | 54.0 | 8.1 | H |
| 39644.7 | 57.1 | --- | 74.0 | 16.9 | H |

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A DIV2

Radiated Spurious – CH58

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 3300.5 | 59.4 | --- | 68.2 | 8.8 | V |
| 15870.9 | 49.7 | --- | 74.0 | 24.3 | V |
| 15870.9 | --- | 41.3 | 54.0 | 12.7 | V |
| 39719.4 | --- | 46.1 | 54.0 | 7.9 | H |
| 39721.8 | 55.6 | --- | 74.0 | 18.4 | H |

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A DIV1

Radiated Spurious – CH52

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 5003.0 | 53.3 | --- | 74.0 | 20.7 | H |
| 5012.1 | --- | 42.8 | 54.0 | 11.2 | H |
| 5493.2 | 53.8 | --- | 68.2 | 14.4 | V |
| 15754.4 | 55.1 | --- | 74.0 | 18.9 | V |
| 15754.4 | --- | 47.9 | 54.0 | 6.1 | V |
| 39658.6 | --- | 46.5 | 54.0 | 7.5 | H |
| 39660.6 | 56.4 | --- | 74.0 | 17.6 | V |

Radiated Spurious – CH56

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 5030.0 | 52.6 | --- | 74.0 | 21.4 | V |
| 5031.3 | --- | 42.5 | 54.0 | 11.5 | H |
| 5512.3 | 53.0 | --- | 68.2 | 15.2 | V |
| 15814.9 | 51.9 | --- | 74.0 | 22.1 | H |
| 15814.9 | --- | 43.6 | 54.0 | 10.4 | H |
| 39637.9 | 56.3 | --- | 74.0 | 17.7 | H |
| 39637.9 | --- | 46.4 | 54.0 | 7.6 | H |

Radiated Spurious – CH64

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 5552.4 | 53.6 | --- | 68.2 | 14.6 | V |
| 15934.7 | 54.5 | --- | 74.0 | 19.5 | H |
| 15934.7 | --- | 48.7 | 54.0 | 5.3 | V |
| 39895.4 | --- | 44.2 | 54.0 | 9.8 | H |
| 39895.4 | 56.8 | --- | 74.0 | 17.2 | H |

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A DIV2
Radiated Spurious – CH52

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|------------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 5491.4 | 54.4 | --- | 68.2 | 13.8 | V |
| 15754.9 | 58.6 | --- | 74.0 | 15.4 | H |
| 15754.9 | --- | 50.1 | 54.0 | 3.9 | H |
| 39652.4 | --- | 46.3 | 54.0 | 7.7 | V |
| 39661.5 | 57.4 | --- | 74.0 | 16.6 | H |

Radiated Spurious – CH56

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 5511.0 | 53.1 | --- | 68.2 | 15.1 | H |
| 15814.9 | 56.3 | --- | 74.0 | 17.7 | H |
| 15814.9 | --- | 48.5 | 54.0 | 5.5 | V |
| 39984.6 | --- | 46.3 | 54.0 | 7.7 | V |
| 39986.0 | 55.8 | --- | 74.0 | 18.2 | H |

Radiated Spurious – CH64

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 5551.6 | 54.7 | --- | 68.2 | 13.5 | V |
| 15934.7 | 52.6 | --- | 74.0 | 21.4 | V |
| 15934.7 | --- | 45.4 | 54.0 | 8.6 | V |
| 39640.8 | --- | 45.5 | 54.0 | 8.5 | V |
| 39640.8 | 57.3 | --- | 74.0 | 16.7 | V |

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A DIV1
Radiated Spurious – CH54

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 5006.9 | 53.2 | --- | 74.0 | 20.8 | V |
| 5011.3 | --- | 43.0 | 54.0 | 11.0 | H |
| 5497.1 | 54.5 | --- | 68.2 | 13.7 | H |
| 15755.9 | 55.8 | --- | 74.0 | 18.2 | H |
| 15755.9 | --- | 48.4 | 54.0 | 5.6 | V |
| 39646.1 | --- | 46.1 | 54.0 | 7.9 | H |
| 39691.4 | 56.8 | --- | 74.0 | 17.2 | V |

Radiated Spurious – CH62

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|--------------|--------------|--------------|--------|-------|
| MHz | dB μ V/m | dB μ V/m | dB μ V/m | dB | --- |
| 4716.7 | --- | 42.3 | 54.0 | 11.7 | H |
| 4717.6 | 52.3 | --- | 74.0 | 21.7 | V |
| 5552.0 | 54.6 | --- | 68.2 | 13.6 | V |
| 15876.2 | 54.9 | --- | 74.0 | 19.1 | V |
| 15876.2 | --- | 45.4 | 54.0 | 8.7 | V |
| 39534.7 | 56.6 | --- | 74.0 | 17.4 | H |
| 39647.6 | --- | 46.0 | 54.0 | 8.0 | H |

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A DIV2

Radiated Spurious – CH54

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 5491.4 | 54.4 | --- | 68.2 | 13.8 | V |
| 15755.4 | 57.3 | --- | 74.0 | 16.7 | V |
| 15755.4 | --- | 50.7 | 54.0 | 3.3 | H |
| 39653.3 | --- | 45.9 | 54.0 | 8.1 | H |
| 39654.8 | 55.8 | --- | 74.0 | 18.2 | V |

Radiated Spurious – CH62

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 5538.5 | 54.0 | --- | 68.2 | 14.2 | H |
| 15876.2 | 54.9 | --- | 74.0 | 19.1 | H |
| 15876.2 | --- | 45.9 | 54.0 | 8.1 | V |
| 39660.6 | --- | 46.1 | 54.0 | 7.9 | H |
| 39663.9 | 56.6 | --- | 74.0 | 17.4 | V |

1 GHz – 40 GHz, 802.11ax80, HE0, Chain A DIV1

Radiated Spurious – CH58

| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|--------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 5492.3 | 53.5 | --- | 68.2 | 14.7 | H |
| 10563.4 | 50.6 | --- | 68.2 | 17.6 | V |
| 15863.2 | 51.3 | --- | 74.0 | 22.8 | V |
| 15863.2 | --- | 42.5 | 54.0 | 11.5 | V |
| 39541.0 | 57.9 | --- | 74.0 | 16.1 | H |
| 39542.0 | --- | 44.9 | 54.0 | 9.1 | V |


1 GHz – 40 GHz, 802.11ax80, HE0, Chain A DIV2**Radiated Spurious – CH58**


| Frequency | MaxPeak | Average | Limit | Margin | Polar |
|-----------|---------|---------|--------|------------|-------|
| MHz | dBµV/m | dBµV/m | dBµV/m | dB | --- |
| 5492.3 | 54.4 | --- | 68.2 | 13.8 | V |
| 15755.9 | 55.3 | --- | 74.0 | 18.7 | H |
| 15755.9 | --- | 50.3 | 54.0 | 3.7 | H |
| 39598.9 | 57.1 | --- | 74.0 | 16.9 | V |
| 39599.3 | --- | 45.0 | 54.0 | 8.9 | V |

System Plots


B.3.5 26dB and 99% bandwidth

U-NII-1

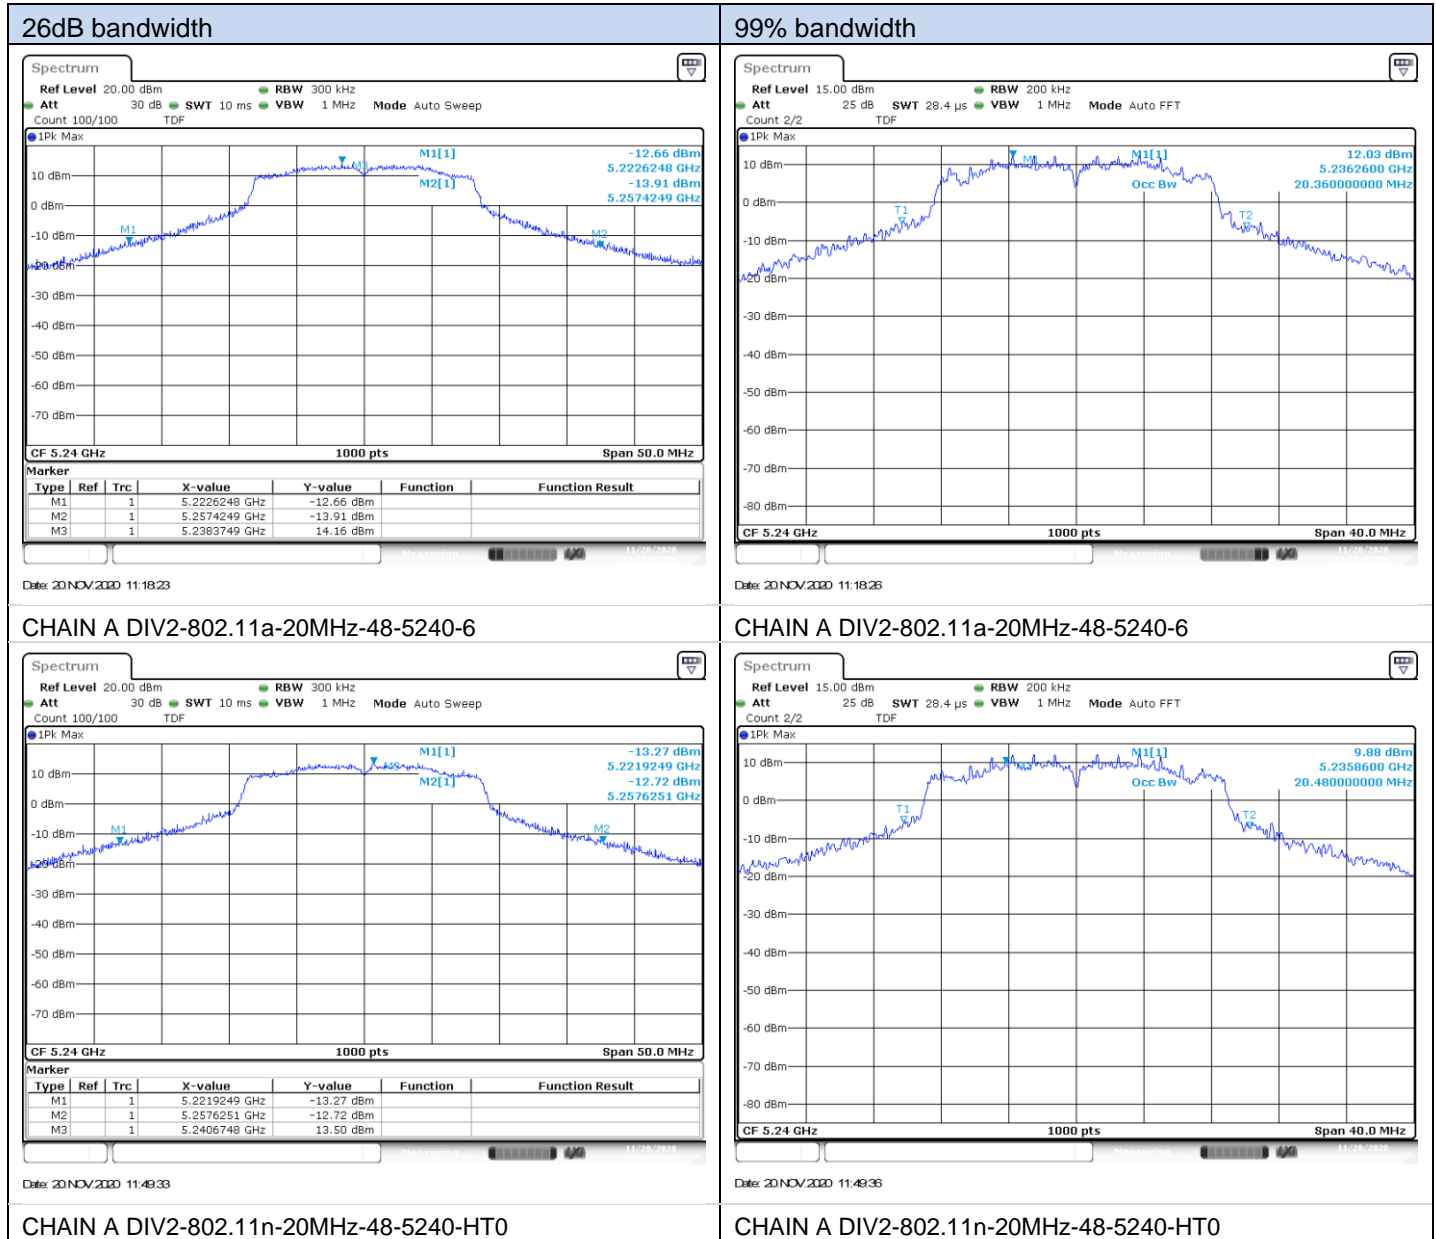

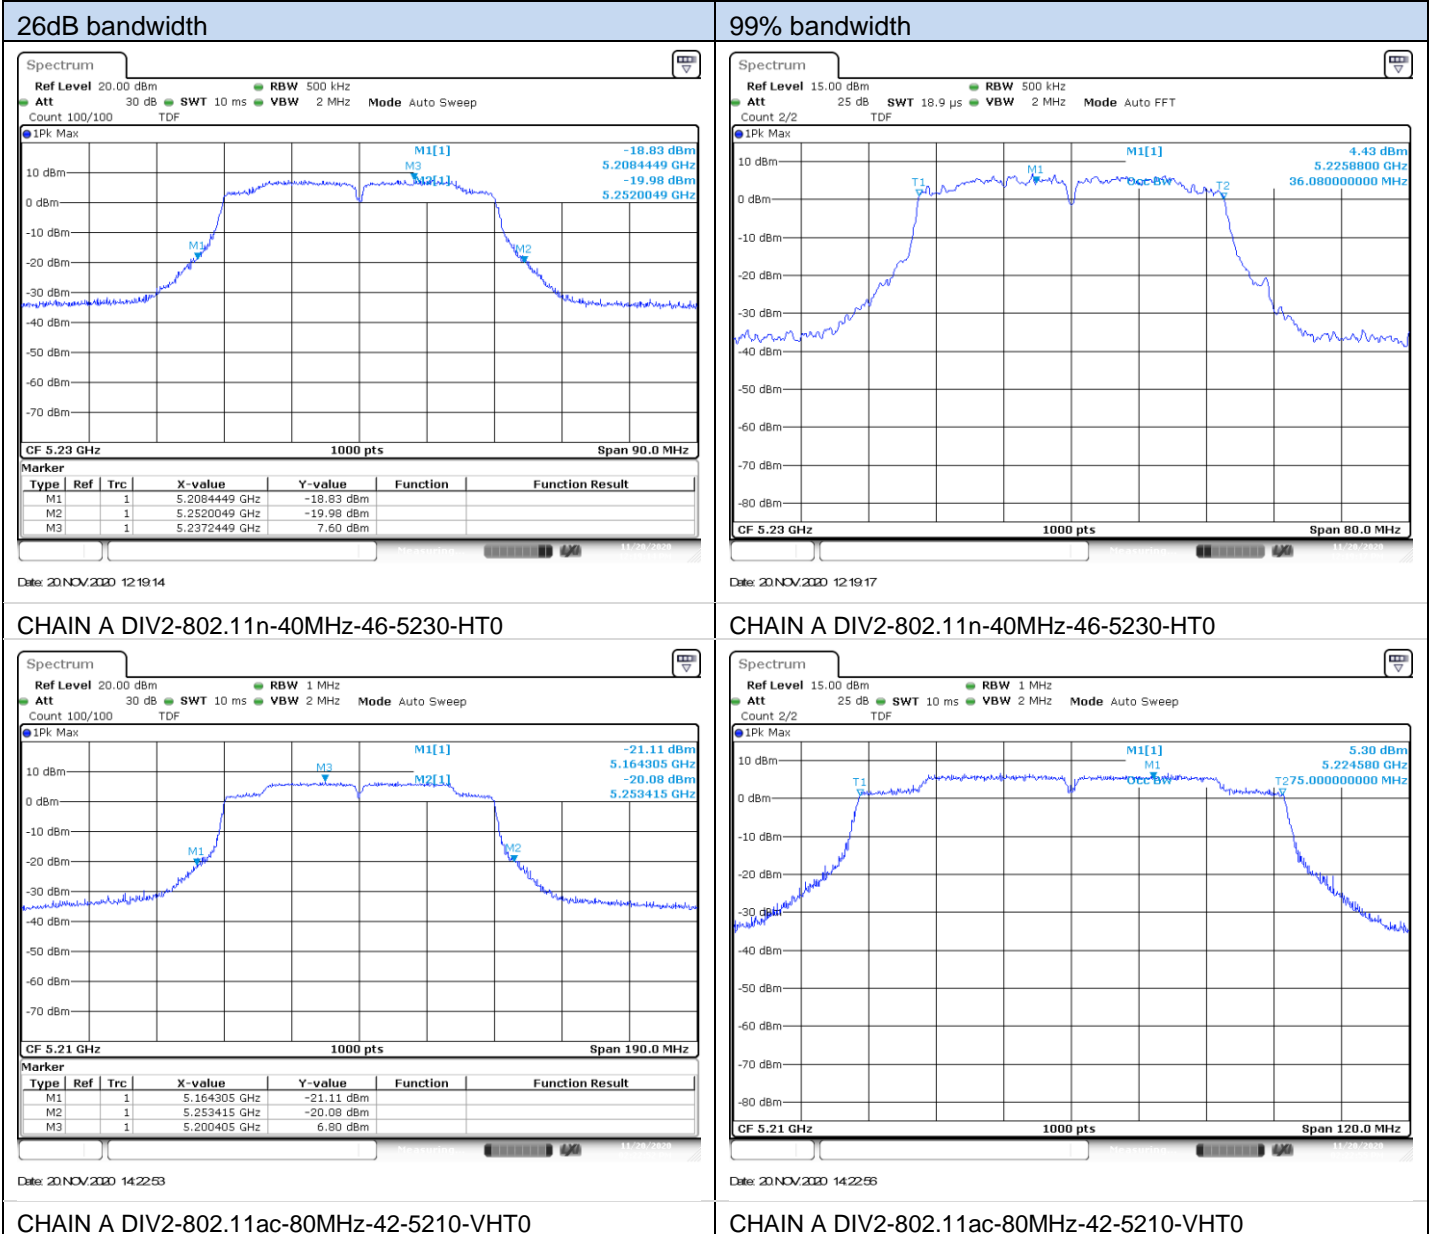


26dB bandwidth

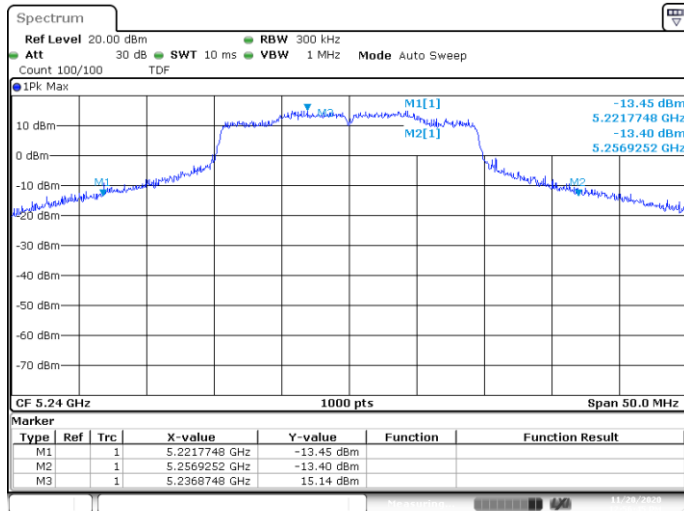


Date: 20 NOV 2020 12:58:45

99% bandwidth

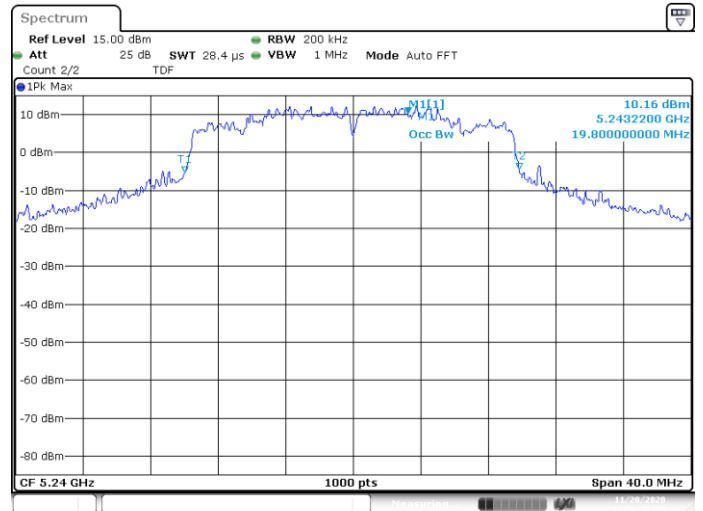


Date: 20 NOV 2020 12:58:48

CHAIN A DIV2-802.11ax-20MHz-48-5240-HE0

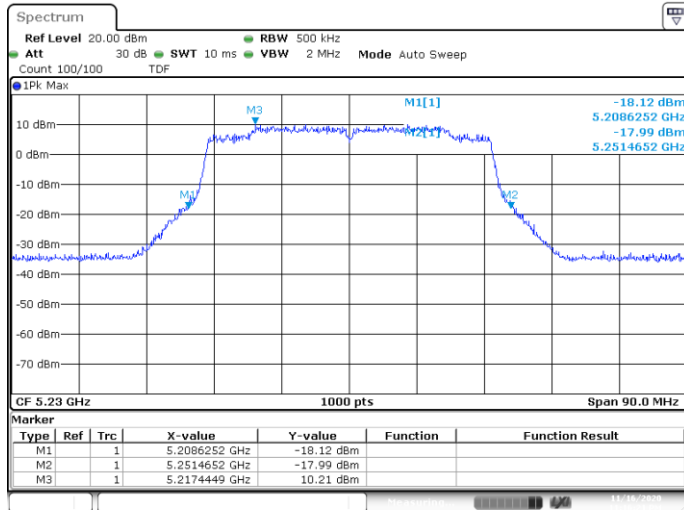


Date: 20 NOV 2020 11:52:23

CHAIN A DIV2-802.11ax-20MHz-48-5240-HE0

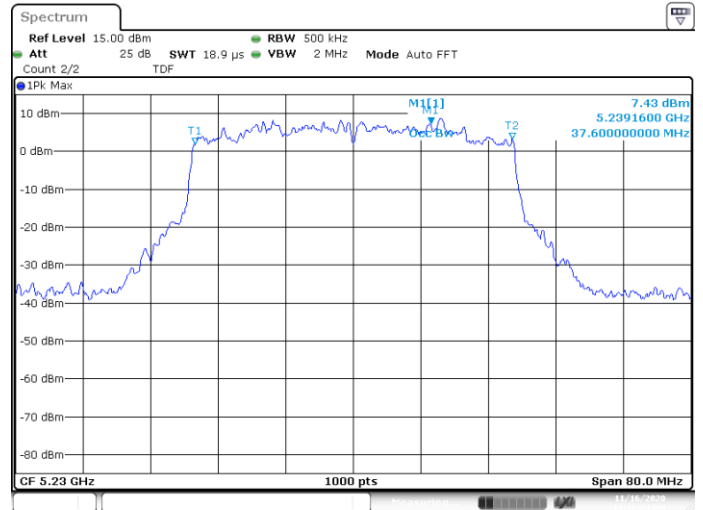


Date: 20 NOV 2020 11:52:23

CHAIN A DIV1-802.11ax-40MHz-46-5230-HE0

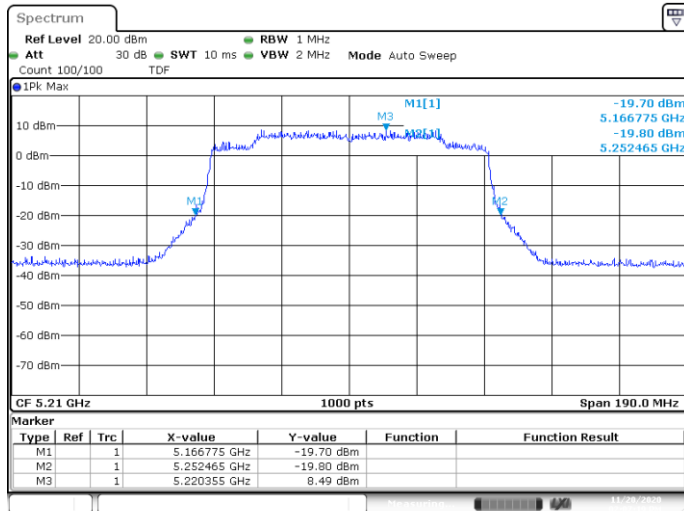

Date: 20 NOV 2020 14:07:20

CHAIN A DIV1-802.11ax-40MHz-46-5230-HE0

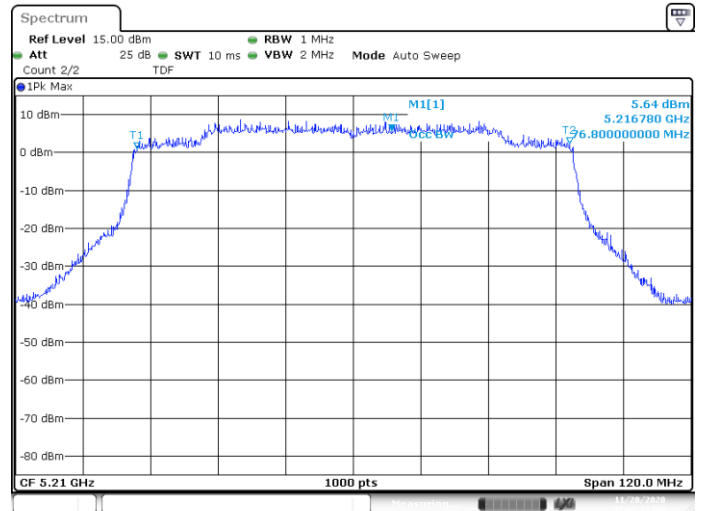

Date: 20 NOV 2020 14:07:23


CHAIN A DIV2-802.11ax-80MHz-42-5210-HE0









Date: 20 NOV 2020 14:07:20


CHAIN A DIV2-802.11ax-80MHz-42-5210-HE0

Date: 20 NOV 2020 14:07:23

U-NII-2A

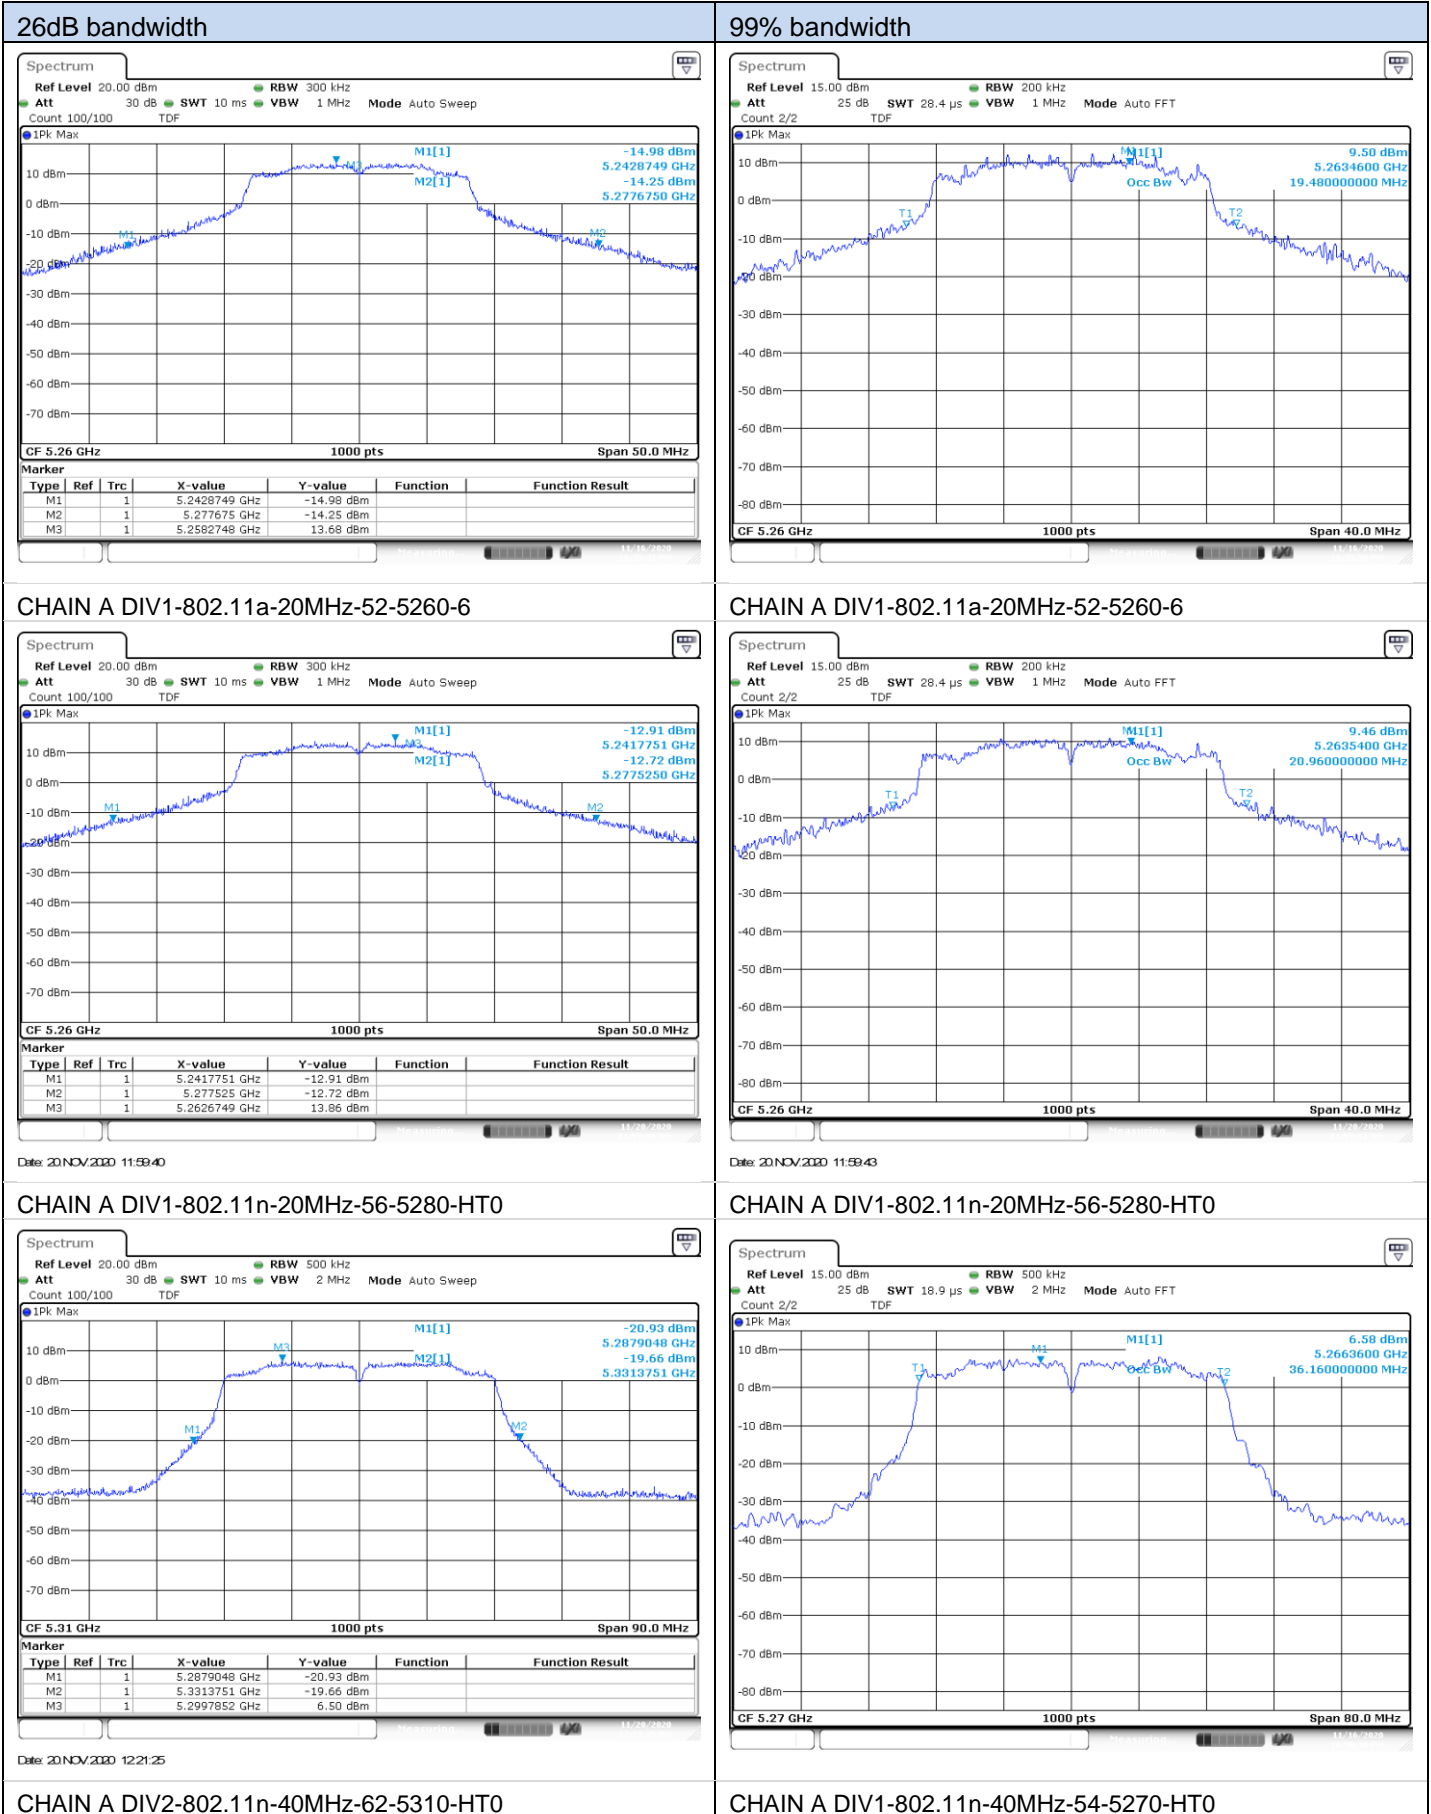


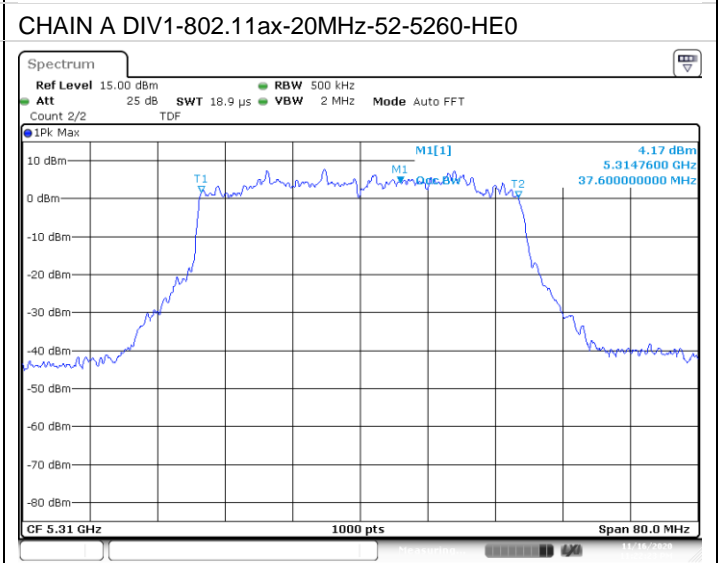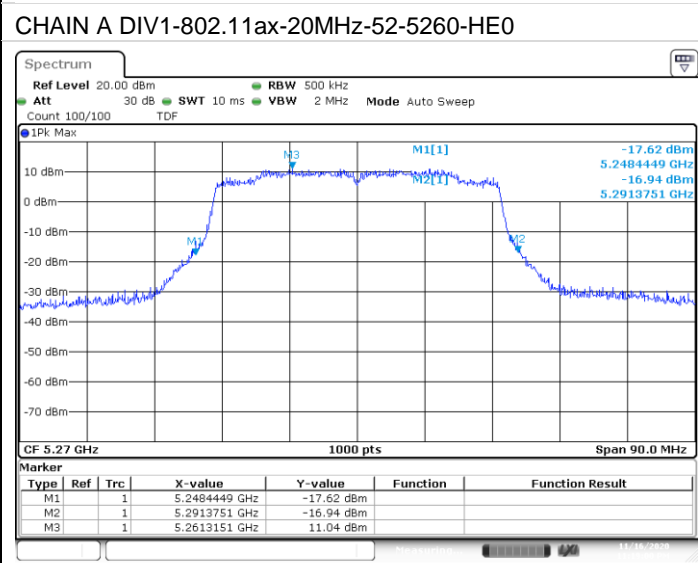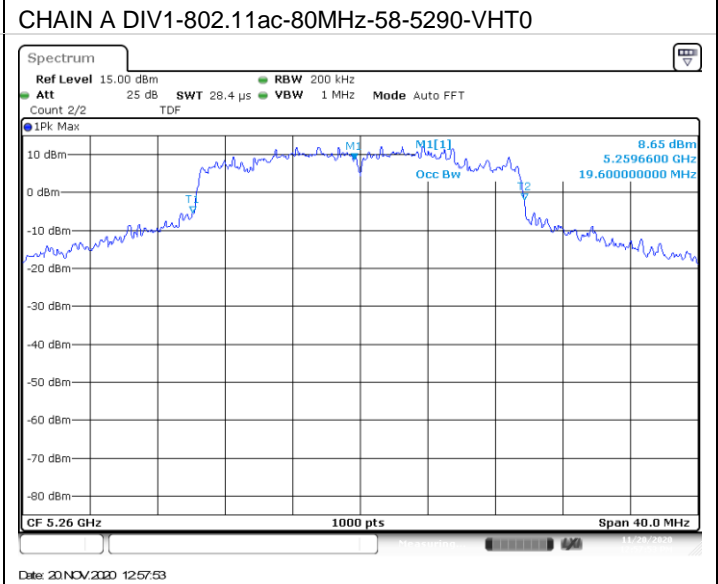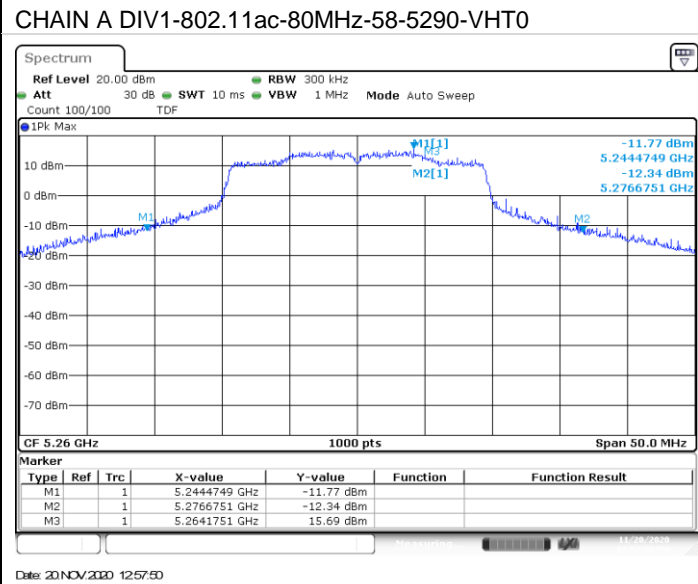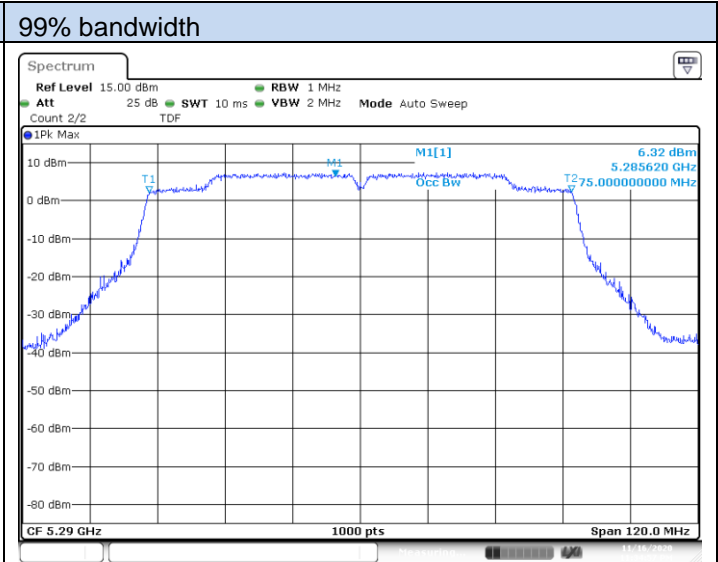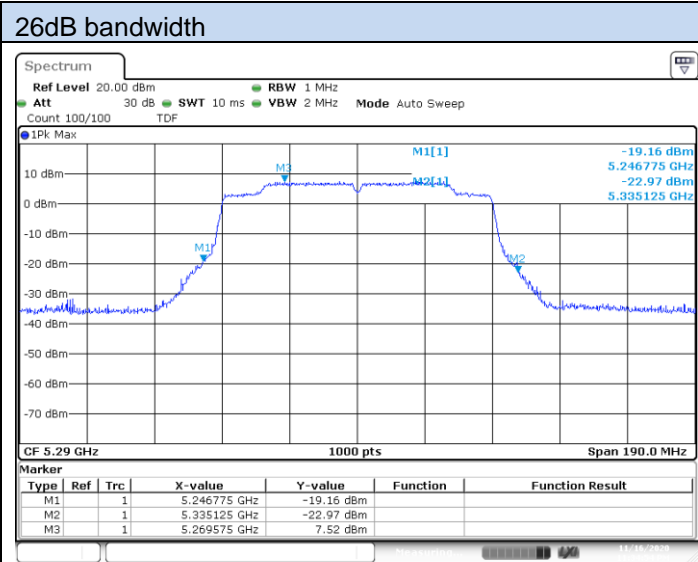

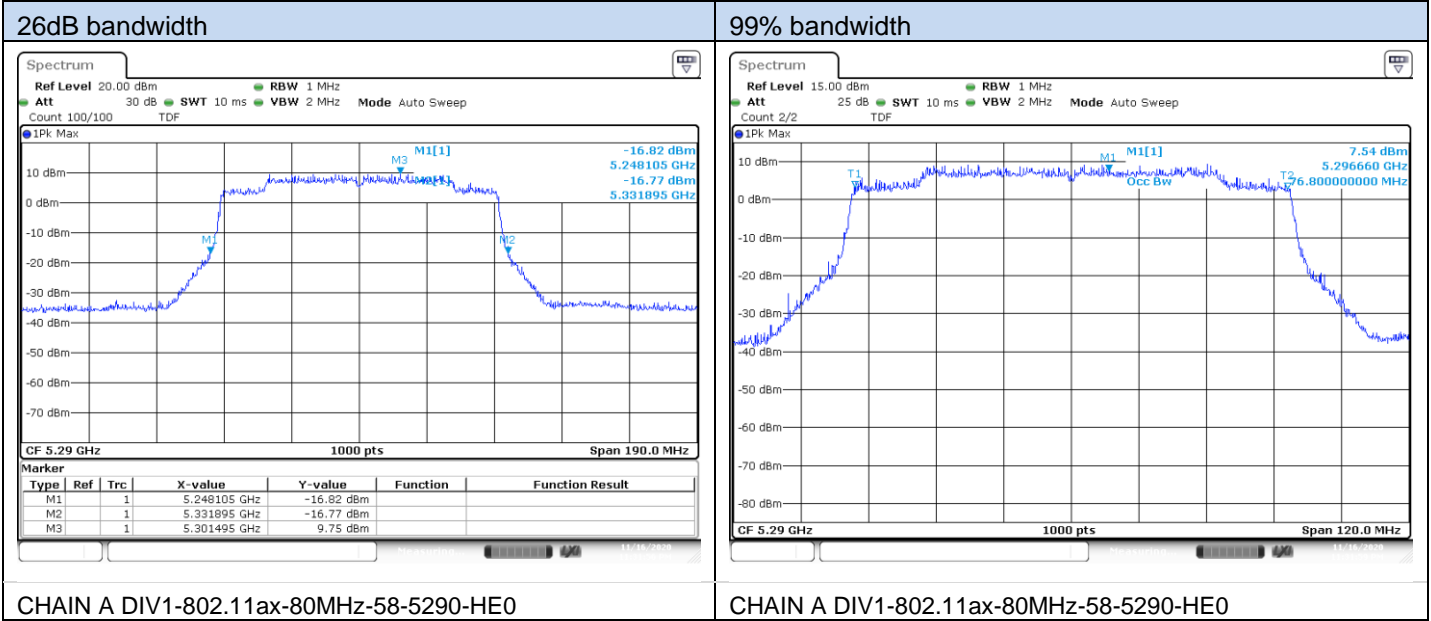


B.3.6 Maximum output power

U-NII-1

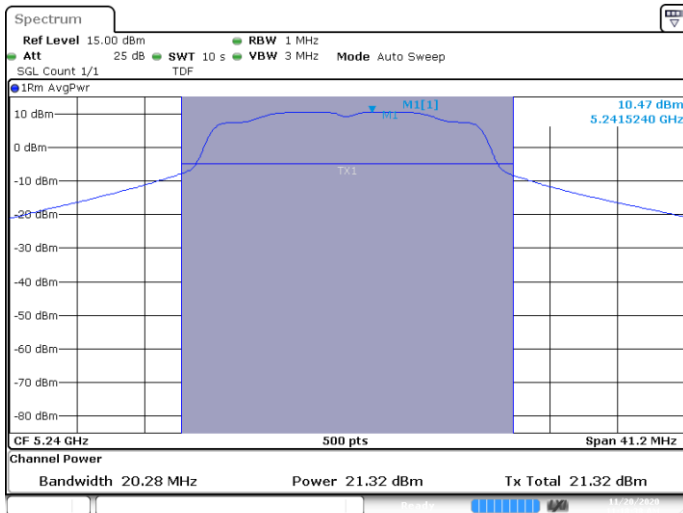


Date: 20 NOV 2020 11:18:39

CHAIN A DIV2-802.11a-20MHz-Ch48-5240MHz-6

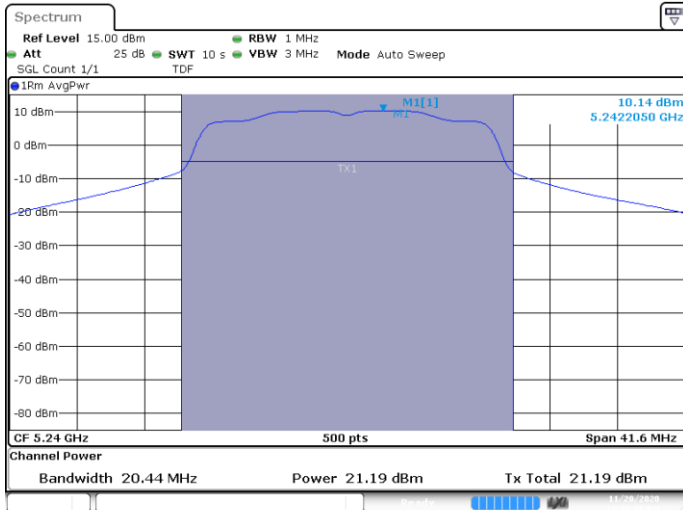


Date: 20 NOV 2020 11:49:49

CHAIN A DIV2-802.11n-20MHz-Ch48-5240MHz-HT0

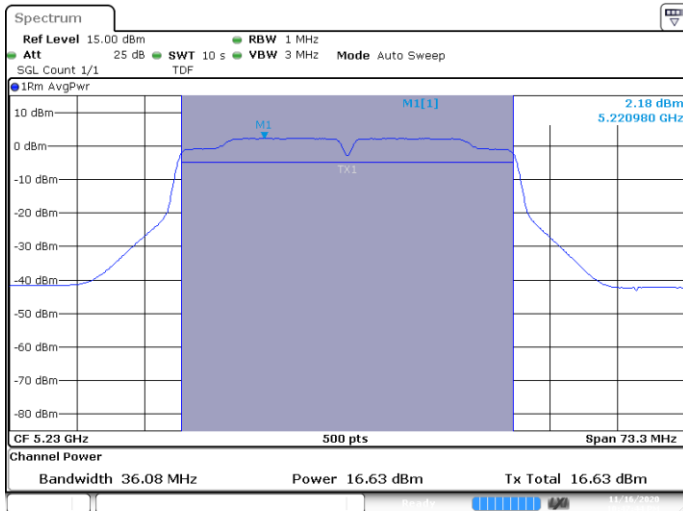


CHAIN A DIV1-802.11n-40MHz-Ch46-5230MHz-HT0

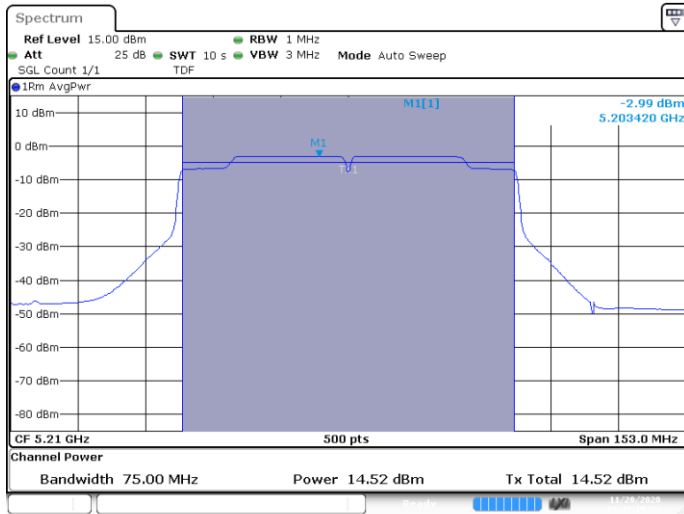


Date: 20 NOV 2020 14:41:18

CHAIN A DIV2-802.11ac-80MHz-Ch42-5210MHz-VHT0

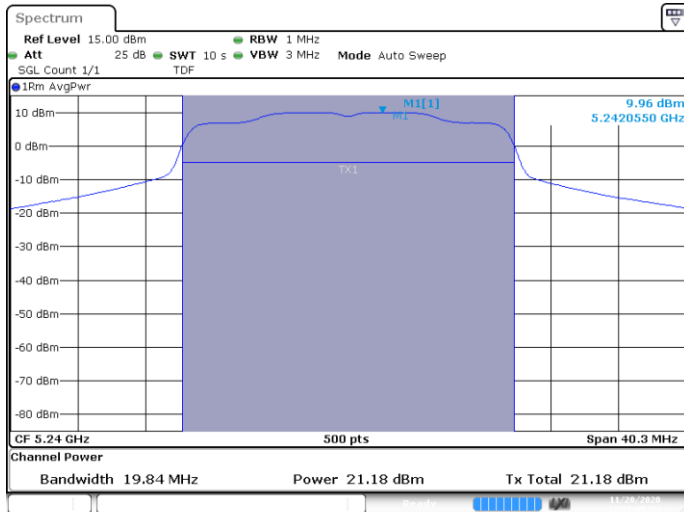


Date: 20 NOV 2020 12:57:01

CHAIN A DIV2-802.11ax-20MHz-Ch48-5240MHz-HE0

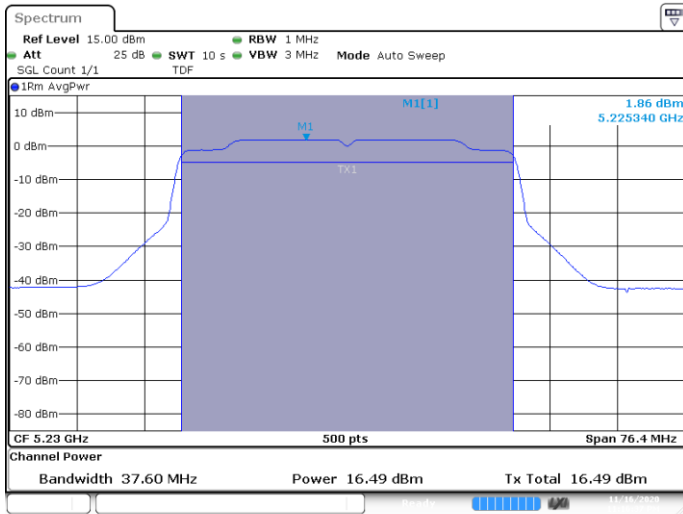


CHAIN A DIV1-802.11ax-40MHz-Ch46-5230MHz-HE0

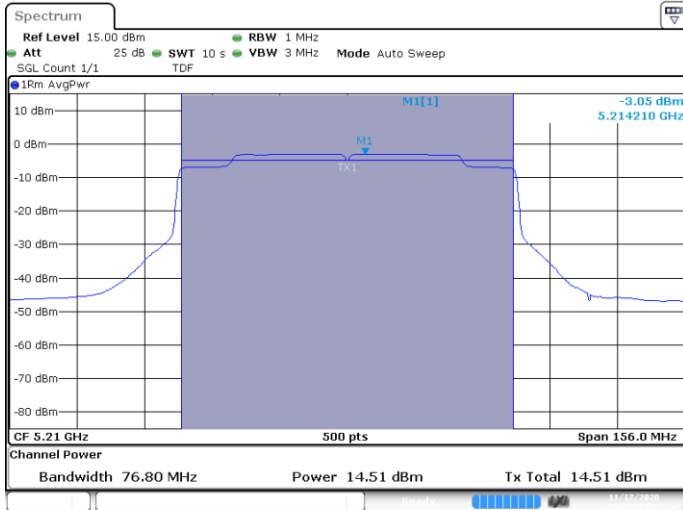


CHAIN A DIV1-802.11ax-80MHz-Ch42-5210MHz-HE0

U-NII-2A

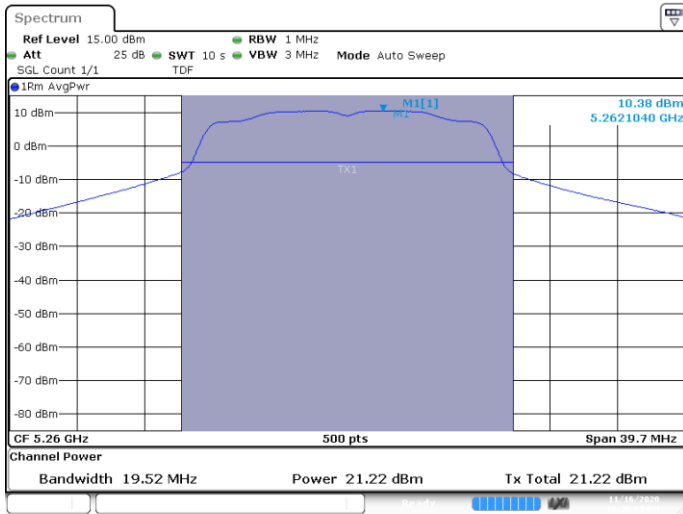


CHAIN A DIV1-802.11a-20MHz-Ch52-5260MHz-6

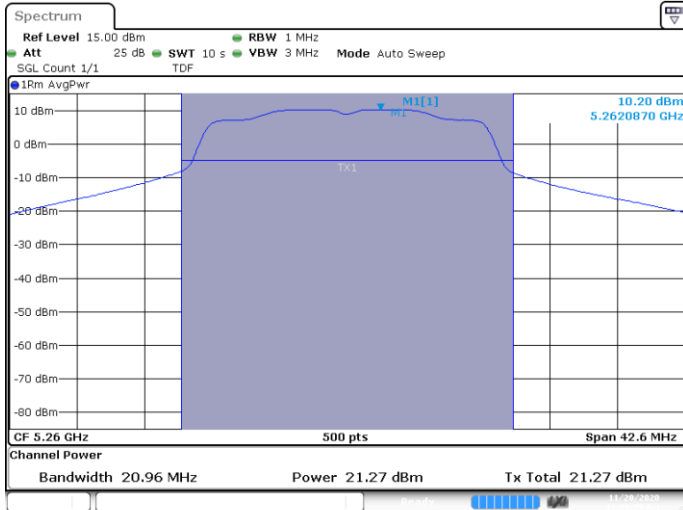


Date: 20 NOV 2020 11:59:56


CHAIN A DIV2-802.11n-20MHz-Ch52-5260MHz-HTO

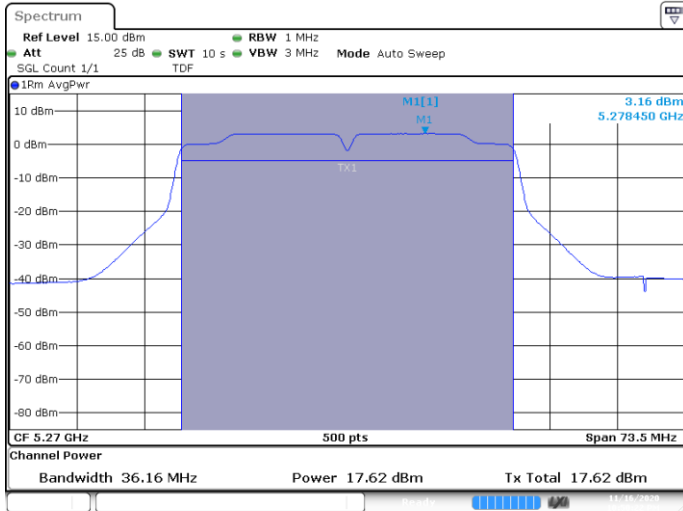

CHAIN A DIV1-802.11n-40MHz-Ch54-5270MHz-HTO

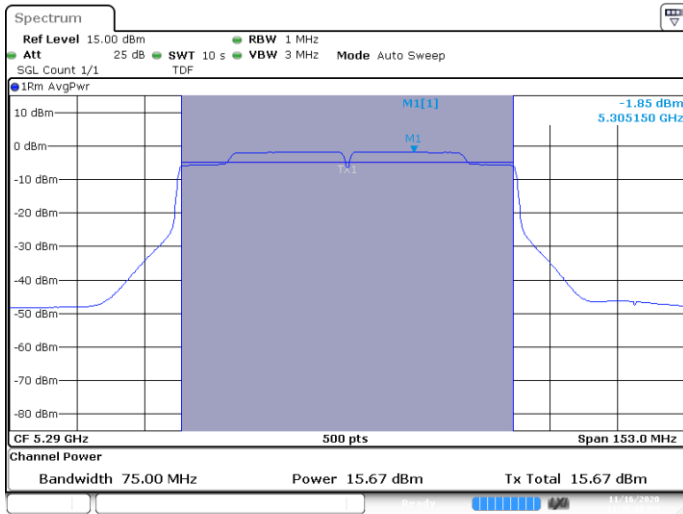


CHAIN A DIV1-802.11ac-80MHz-Ch58-5290MHz-VHT0

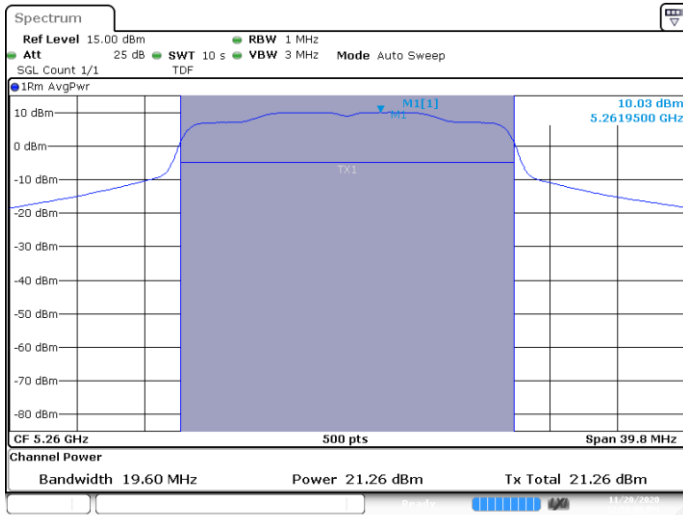

Date: 20 NOV 2020 12:58:05


CHAIN A DIV2-802.11ax-20MHz-Ch52-5260MHz-HE0

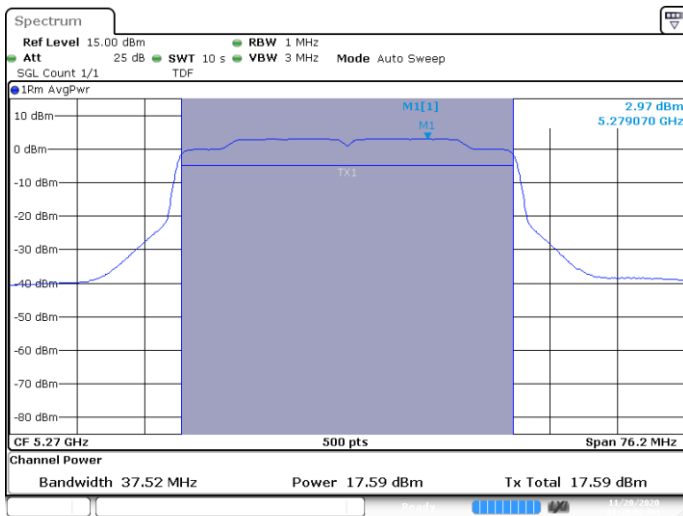

Date: 20 NOV 2020 13:49:02

CHAIN A DIV2-802.11ax-40MHz-Ch54-5270MHz-HE0

Test Report N° 200928-04.TR01

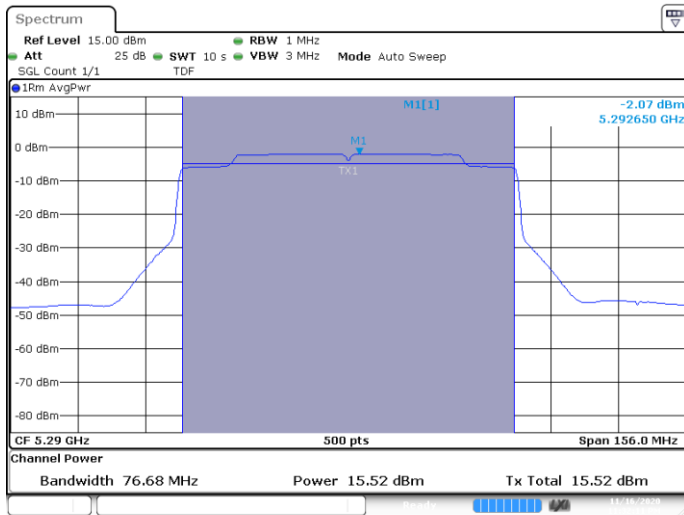


CHAIN A DIV1-802.11ax-80MHz-Ch58-5290MHz-HE0


B.3.7 Undesirable emission limits: out of band (Conducted)

U-NII-1


CHAIN A DIV1

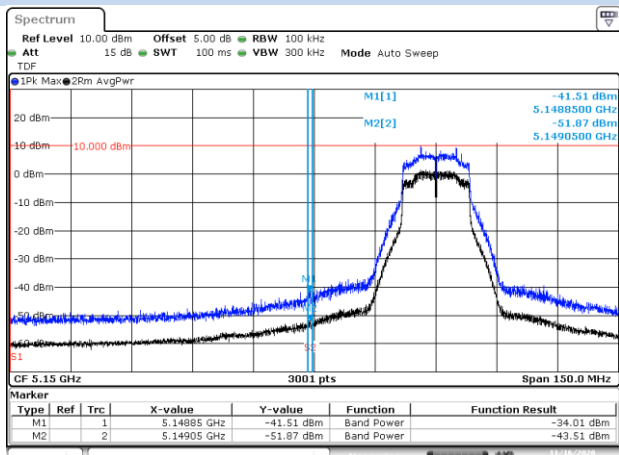


BE-R-LOW, DIV-1, 802.11a20-6Mbps, Ch36

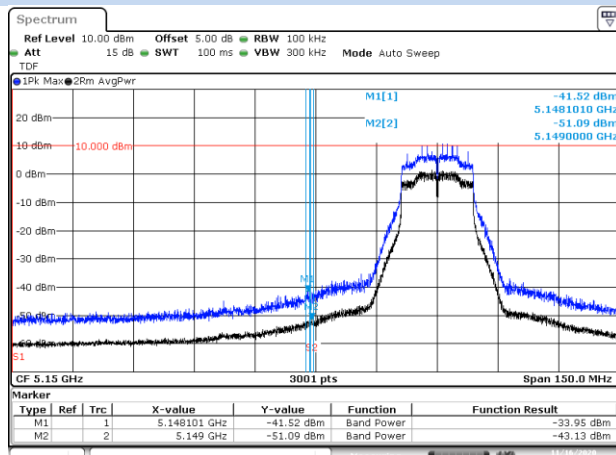


BE-R-LOW, DIV-1, 802.11n20-HT0, Ch36

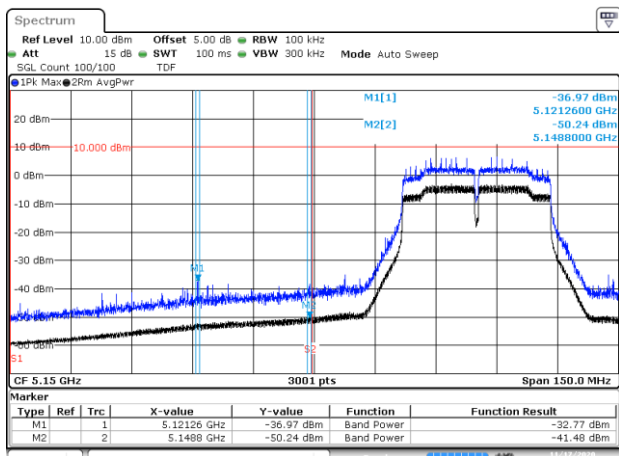


BE-R-LOW, DIV-1, 802.11n40-HT0, Ch38

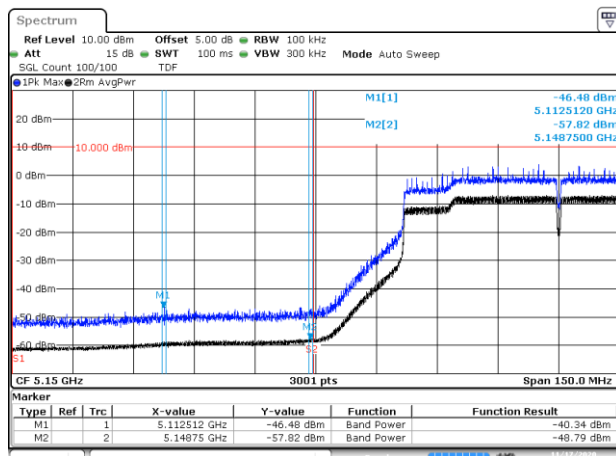


BE-R-LOW, DIV-1, 802.11ac80-VHT0, Ch42

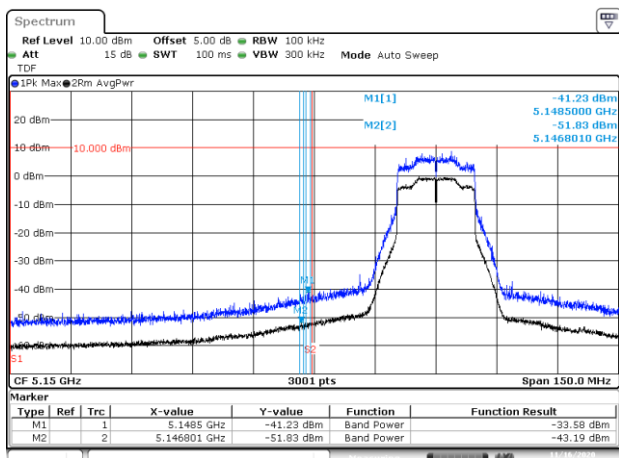

BE-R-LOW, DIV-1, 802.11ax20-HE0, Ch36

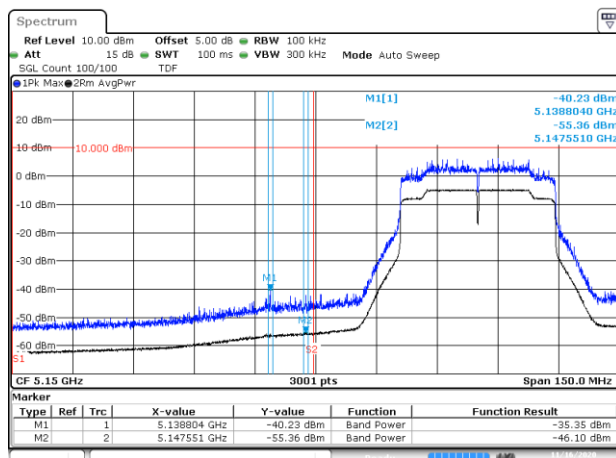


BE-R-LOW, DIV-1, 802.11ax40-HE0, Ch38

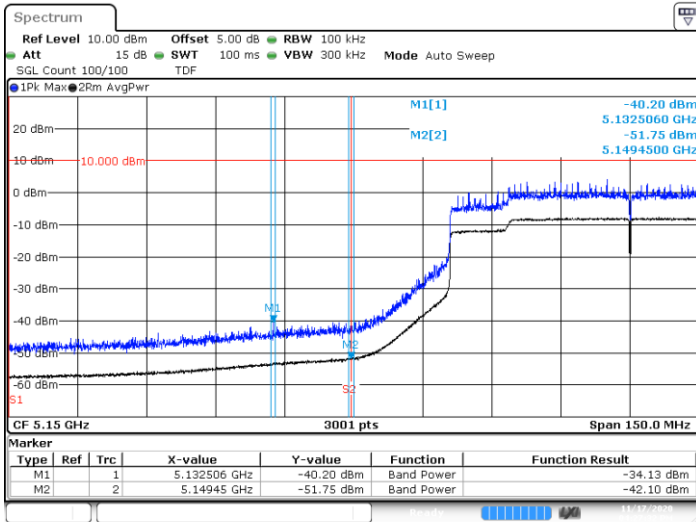


BE-R-LOW, DIV-1, 802.11ac80-HE0, Ch42

CHAIN A DIV2

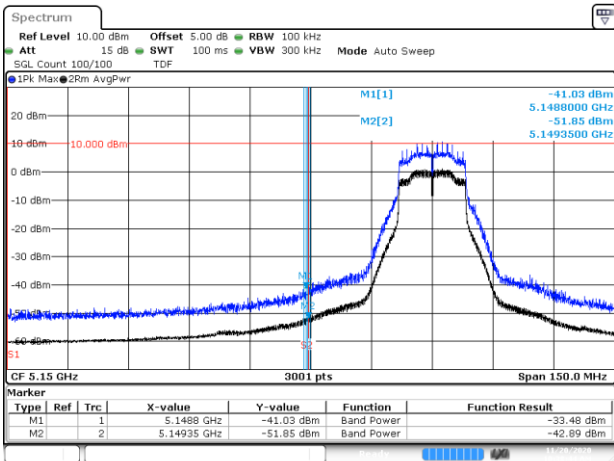


Date: 20 NOV 2020 10:39:45

BE-R-LOW, DIV-2, 802.11a20-6Mbps, Ch36

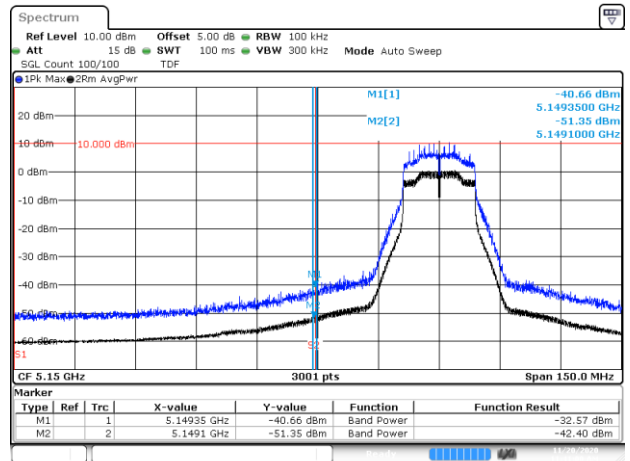


Date: 20 NOV 2020 11:41:01

BE-R-LOW, DIV-2, 802.11n20-HT0, Ch36

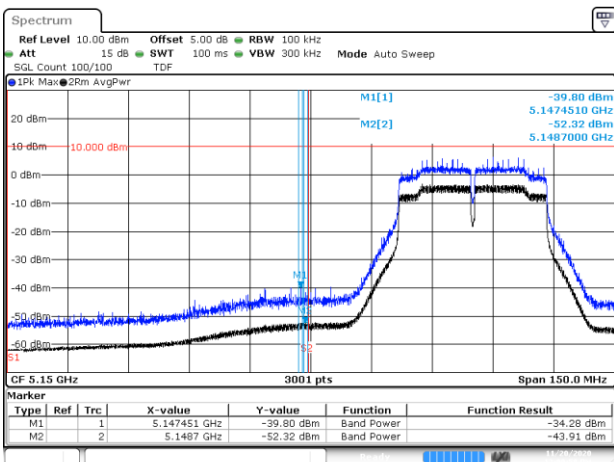

Date: 20 NOV 2020 12:09:53


BE-R-LOW, DIV-2, 802.11n40-HT0, Ch38

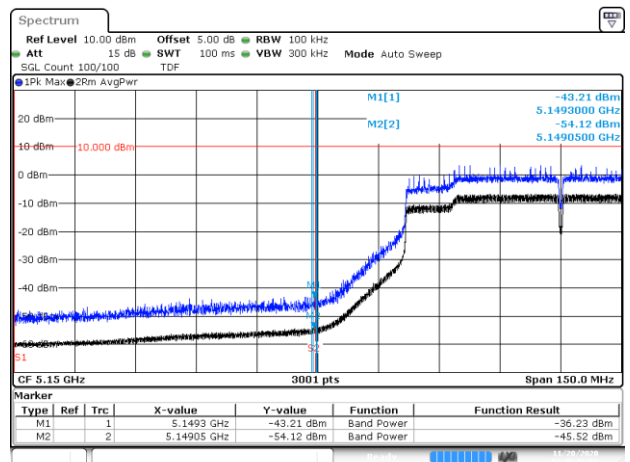

Date: 20 NOV 2020 14:40:43


BE-R-LOW, DIV-2, 802.11ac80-VHT0, Ch42

Test Report N° 200928-04.TR01

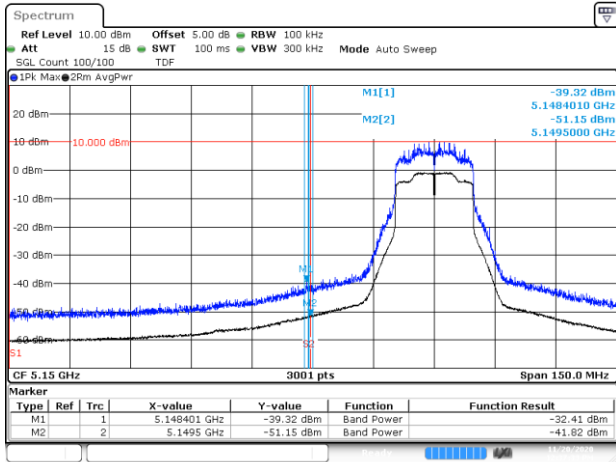


Date: 20 NOV 2020 12:37:33

BE-R-LOW, DIV-2, 802.11ax20-HE0, Ch36

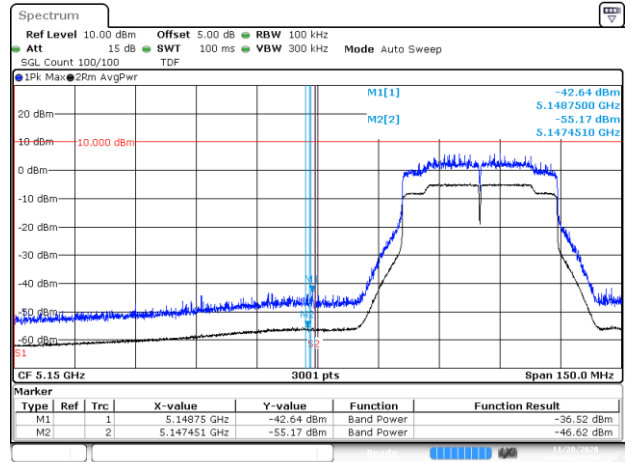

Date: 20 NOV 2020 13:48:11

BE-R-LOW, DIV-2, 802.11ax40-HE0, Ch38

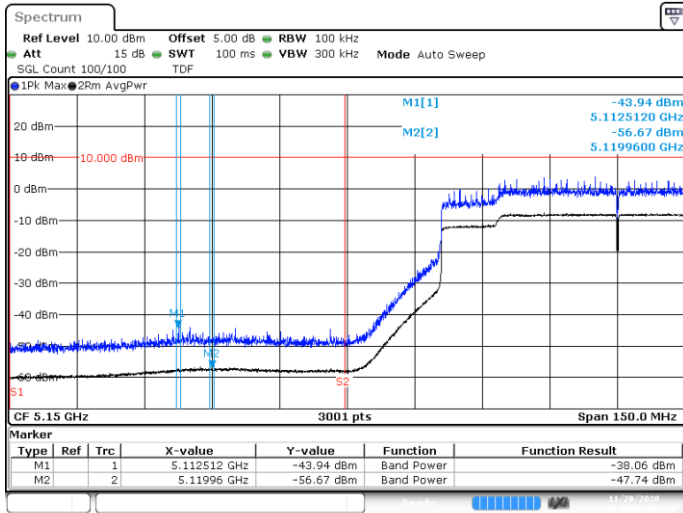


Date: 20 NOV 2020 14:08:00


BE-R-LOW, DIV-2, 802.11ac80-HE0, Ch42

U-NII-2a


CHAIN A DIV1

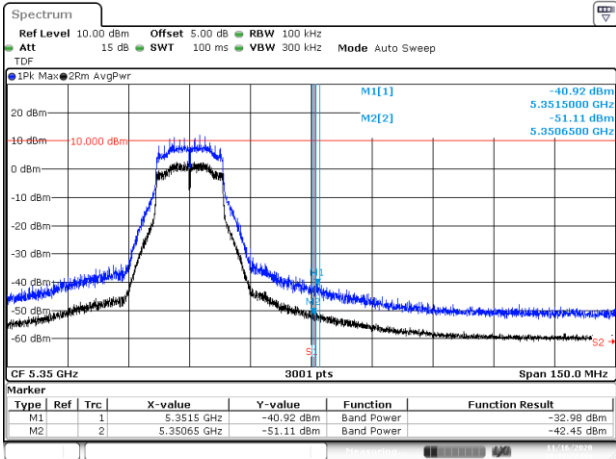


BE-R-HIGH, DIV-1, 802.11a20-6Mbps, Ch64

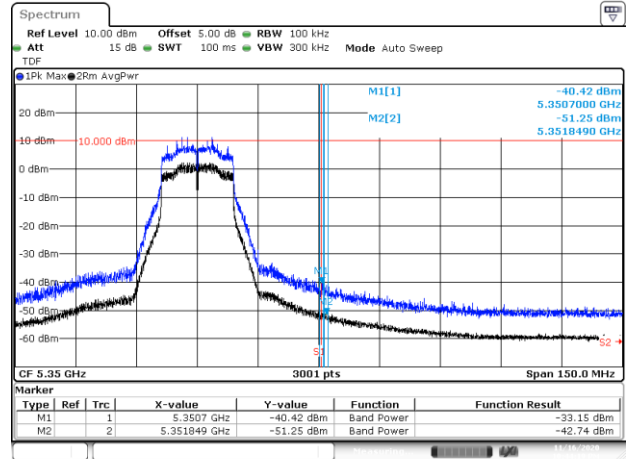


BE-R-HIGH, DIV-1, 802.11n20-HT0, Ch64

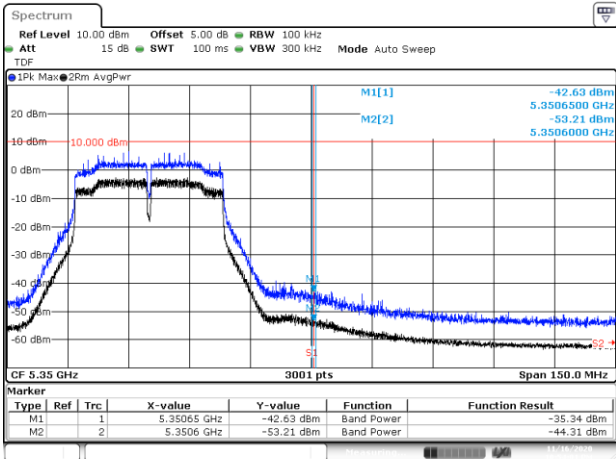


BE-R-HIGH, DIV-1, 802.11n40-HT0, Ch62

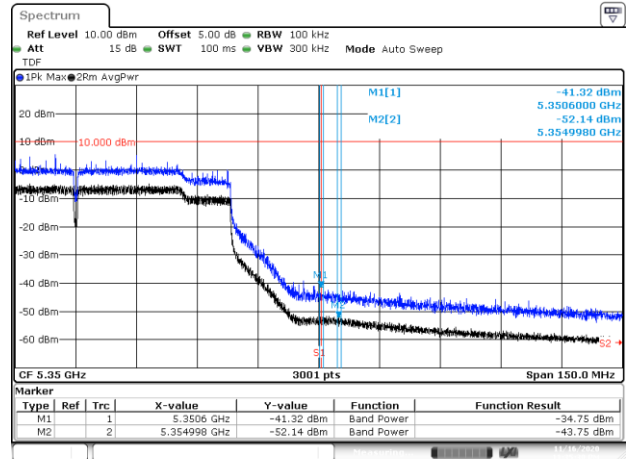


BE-R-HIGH, DIV-1, 802.11ac80-VHT0, Ch58

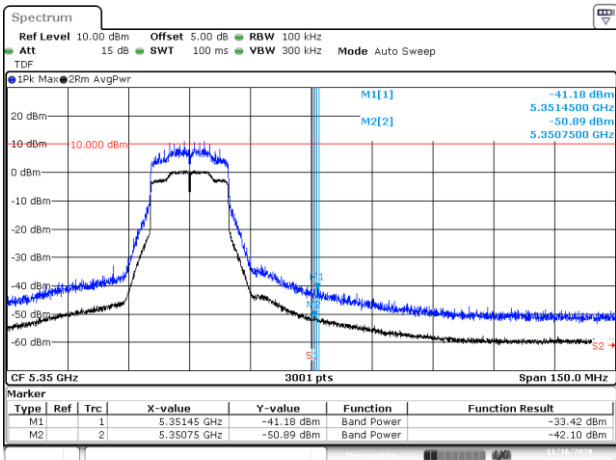

BE-R-HIGH, DIV-1, 802.11ax20-HE0, Ch64

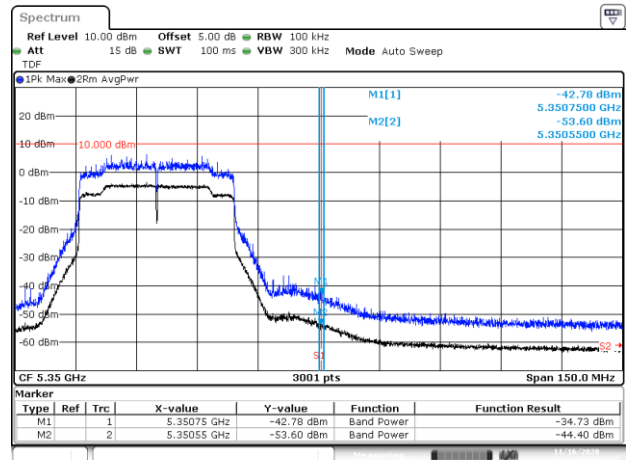


BE-R-HIGH, DIV-1, 802.11ax40-HE0, Ch62

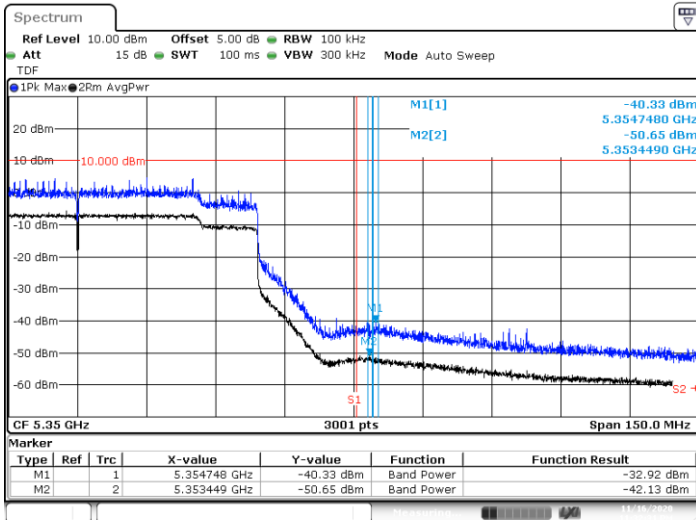


BE-R-HIGH, DIV-1, 802.11ac80-HE0, Ch58

CHAIN A DIV2

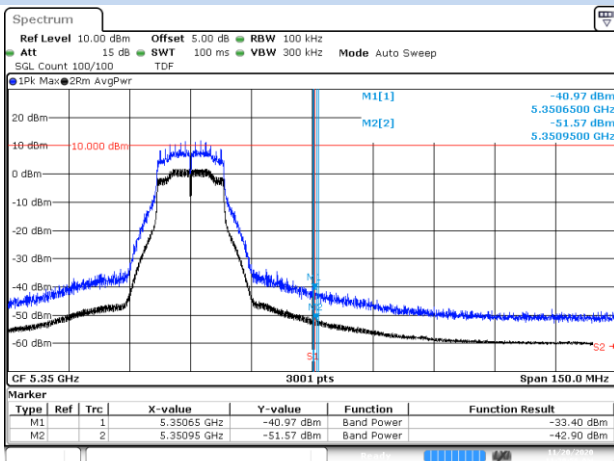


Date: 20/NOV/2020 11:39:55

BE-R-HIGH, DIV-2, 802.11a20-6Mbps, Ch64

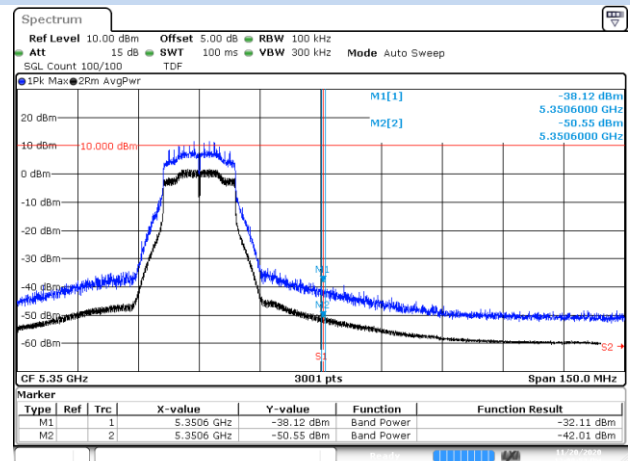


Date: 20/NOV/2020 12:08:53

BE-R-HIGH, DIV-2, 802.11n20-HT0, Ch64

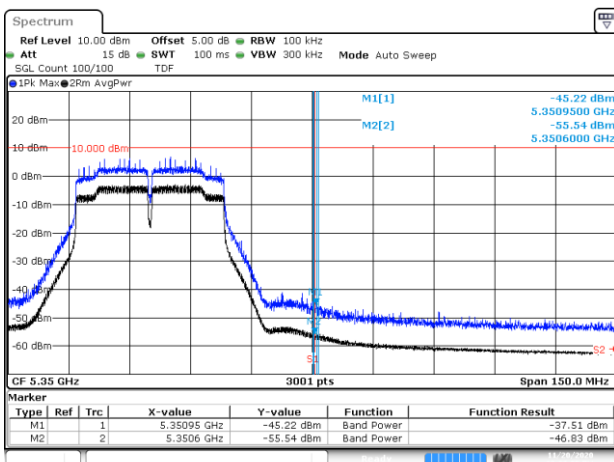


Date: 20/NOV/2020 12:22:05

BE-R-HIGH, DIV-2, 802.11n40-HT0, Ch62

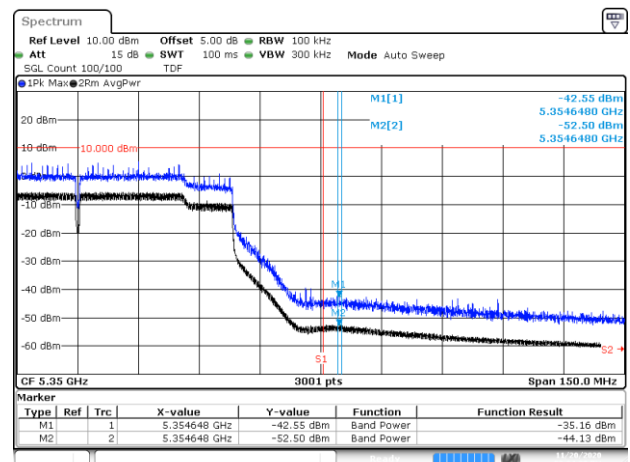


Date: 20/NOV/2020 14:24:39

BE-R-HIGH, DIV-2, 802.11ac80-VHT0, Ch58

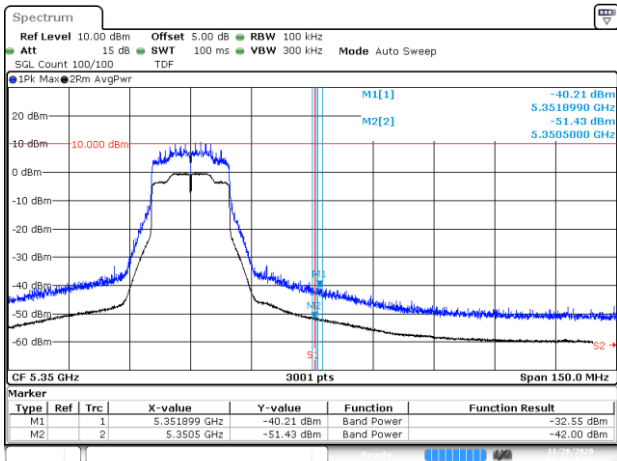


Date: 20 NOV 2020 13:20:21

BE-R-HIGH, DIV-2, 802.11ax20-HE0, Ch64

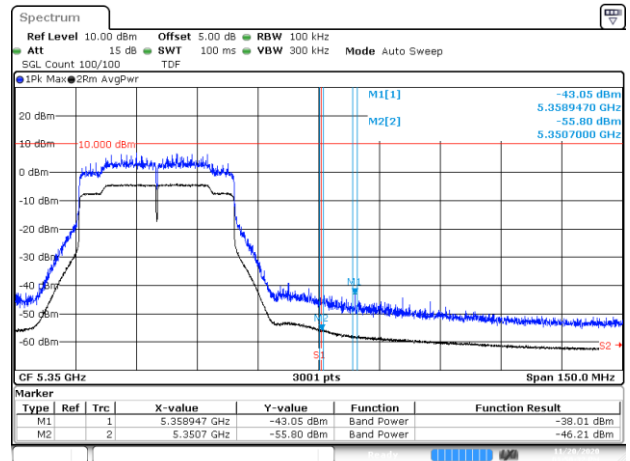

Date: 20 NOV 2020 13:50:33

BE-R-HIGH, DIV-2, 802.11ax40-HE0, Ch62

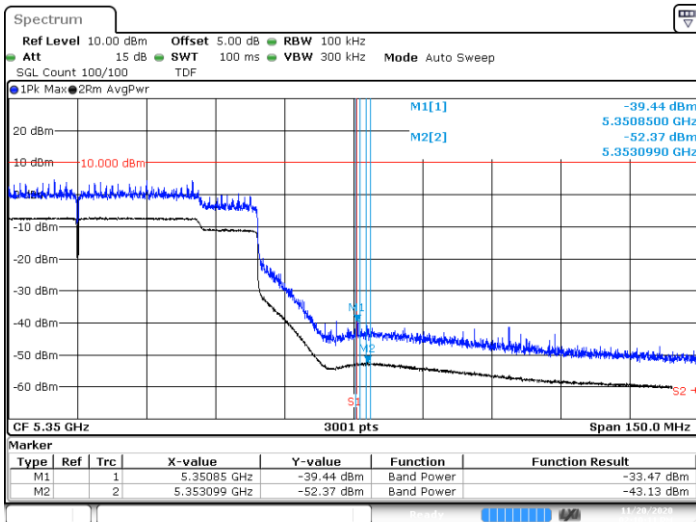

Date: 20 NOV 2020 14:10:11

BE-R-HIGH, DIV-2, 802.11ac80-HE0, Ch58