


Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5230MHz)

Horizontal

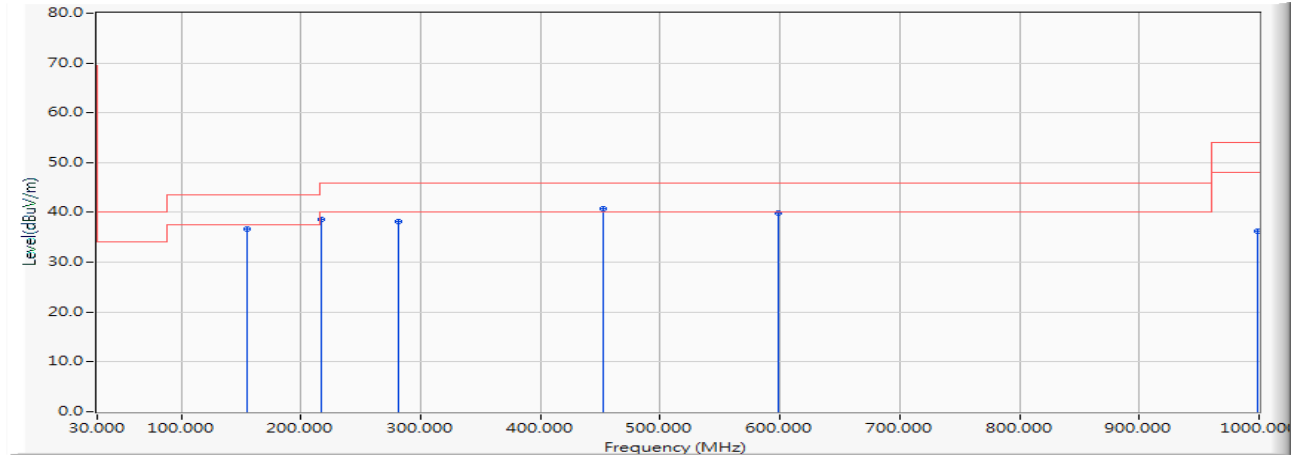


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		155.130	-10.950	47.621	36.671	-6.829	43.500	QUASIPEAK
2		217.210	-13.335	51.867	38.533	-7.467	46.000	QUASIPEAK
3		281.230	-10.862	48.973	38.111	-7.889	46.000	QUASIPEAK
4	*	452.920	-6.746	47.583	40.838	-5.162	46.000	QUASIPEAK
5		598.420	-4.042	43.976	39.934	-6.066	46.000	QUASIPEAK
6		999.030	0.994	35.180	36.174	-17.826	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5230MHz)

Vertical

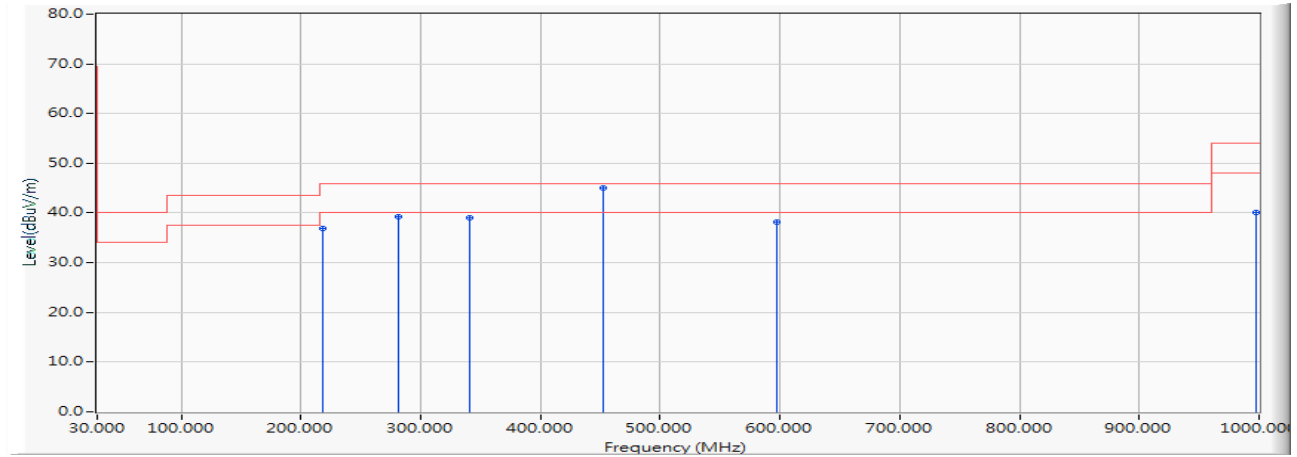


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		218.180	-13.311	50.240	36.929	-9.071	46.000	QUASIPEAK
2		281.230	-10.862	50.133	39.271	-6.729	46.000	QUASIPEAK
3		341.370	-9.380	48.517	39.137	-6.863	46.000	QUASIPEAK
4	*	452.920	-6.746	51.791	45.046	-0.954	46.000	QUASIPEAK
5		597.450	-4.065	42.166	38.101	-7.899	46.000	QUASIPEAK
6		997.090	0.969	39.213	40.182	-13.818	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5310MHz)

Horizontal

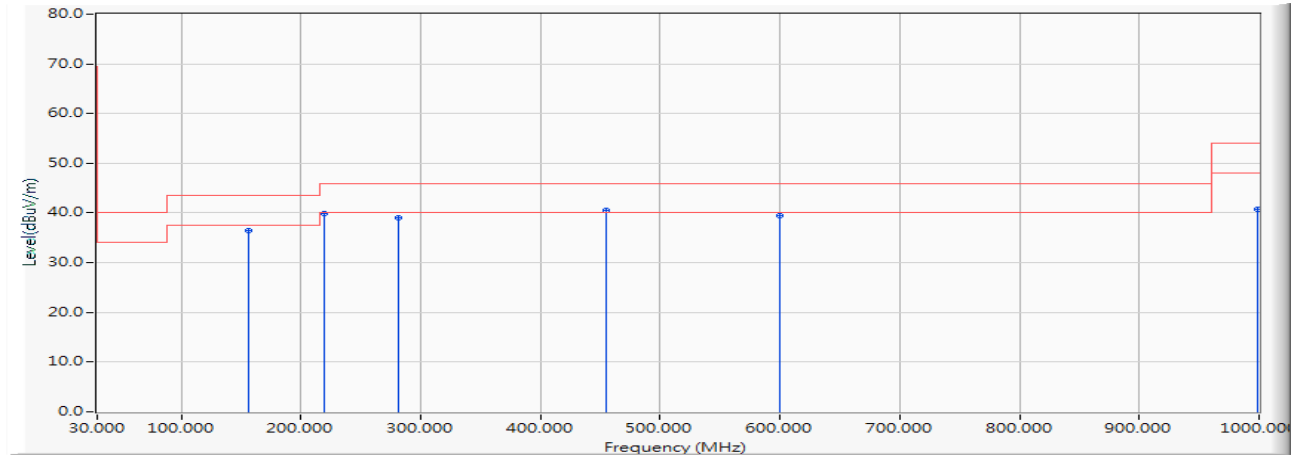


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		156.100	-10.926	47.362	36.436	-7.064	43.500	QUASIPeAK
2		219.150	-13.289	53.235	39.946	-6.054	46.000	QUASIPeAK
3		281.230	-10.862	49.790	38.928	-7.072	46.000	QUASIPeAK
4	*	454.860	-6.713	47.269	40.557	-5.443	46.000	QUASIPeAK
5		600.360	-4.003	43.398	39.395	-6.605	46.000	QUASIPeAK
6		999.030	0.994	39.737	40.731	-13.269	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5310MHz)

Vertical

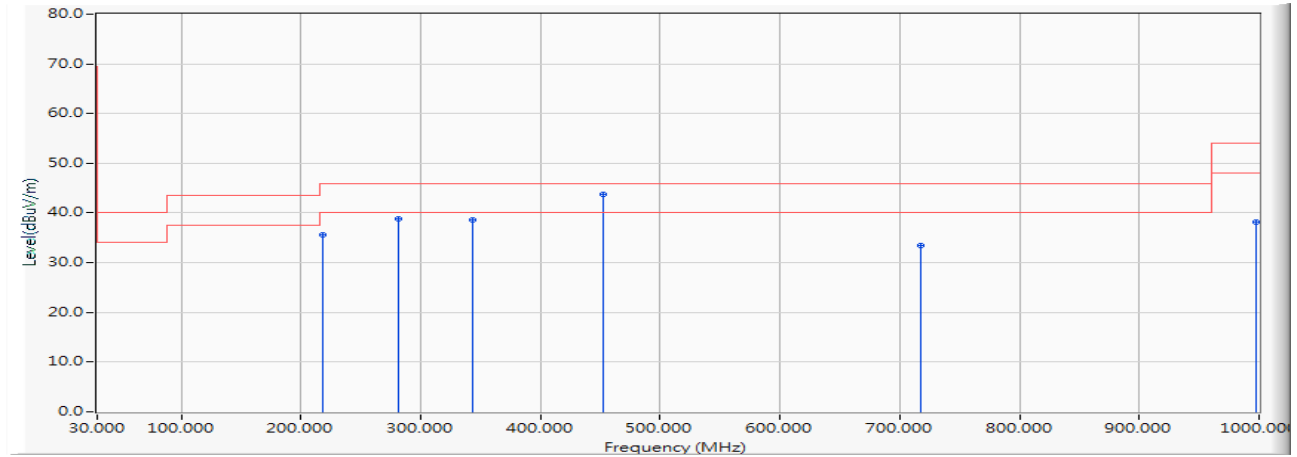


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		218.180	-13.311	48.882	35.571	-10.429	46.000	QUASIPeAK
2		281.230	-10.862	49.645	38.783	-7.217	46.000	QUASIPeAK
3		343.310	-9.335	47.851	38.516	-7.484	46.000	QUASIPeAK
4	*	452.920	-6.746	50.428	43.683	-2.317	46.000	QUASIPeAK
5		717.730	-2.649	36.078	33.429	-12.571	46.000	QUASIPeAK
6		997.090	0.969	37.113	38.082	-15.918	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5550MHz)

Horizontal

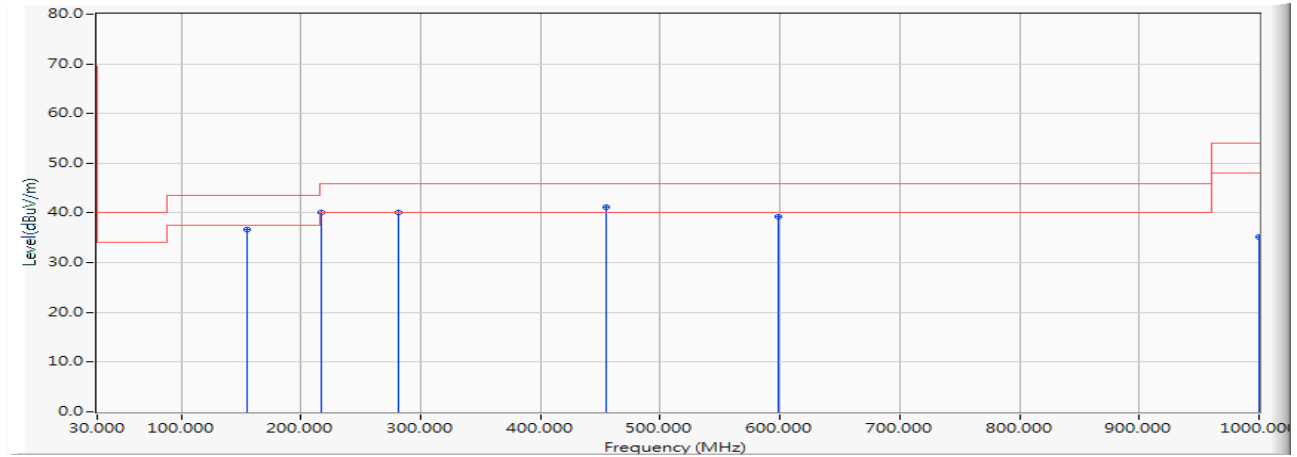


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		155.130	-10.950	47.591	36.641	-6.859	43.500	QUASIPeAK
2		217.210	-13.335	53.433	40.099	-5.901	46.000	QUASIPeAK
3		281.230	-10.862	51.075	40.213	-5.787	46.000	QUASIPeAK
4	*	454.860	-6.713	47.800	41.088	-4.912	46.000	QUASIPeAK
5		598.420	-4.042	43.360	39.318	-6.682	46.000	QUASIPeAK
6		1000.000	1.007	34.066	35.073	-18.927	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5550MHz)

Vertical

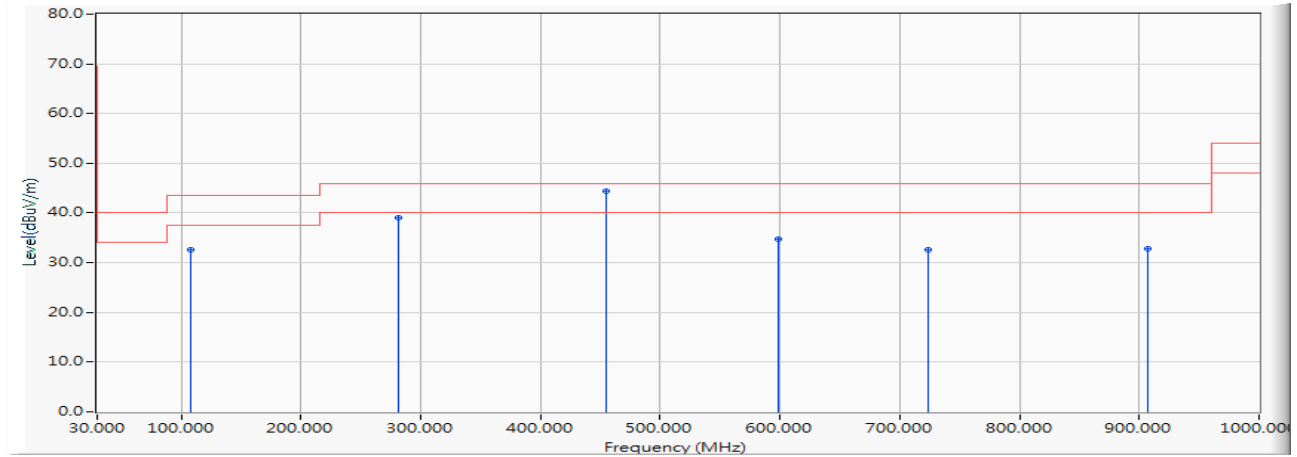


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	108.570	-14.642	47.219	32.577	-10.923	43.500	QUASIPEAK
2	281.230	-10.862	49.985	39.123	-6.877	46.000	QUASIPEAK
3	* 454.860	-6.713	51.146	44.434	-1.566	46.000	QUASIPEAK
4	598.420	-4.042	38.743	34.701	-11.299	46.000	QUASIPEAK
5	723.550	-2.535	35.035	32.500	-13.500	46.000	QUASIPEAK
6	906.880	-0.125	32.959	32.834	-13.166	46.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5710MHz)

Horizontal

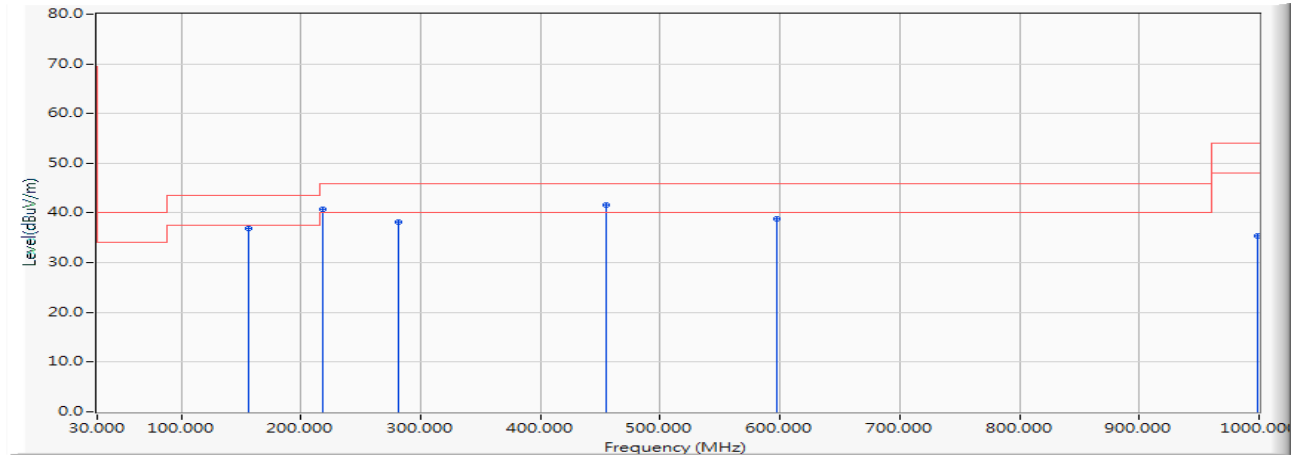


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		156.100	-10.926	47.862	36.936	-6.564	43.500	QUASIPEAK
2		218.180	-13.311	53.986	40.675	-5.325	46.000	QUASIPEAK
3		281.230	-10.862	49.019	38.157	-7.843	46.000	QUASIPEAK
4	*	454.860	-6.713	48.288	41.576	-4.424	46.000	QUASIPEAK
5		597.450	-4.065	42.861	38.796	-7.204	46.000	QUASIPEAK
6		999.030	0.994	34.315	35.309	-18.691	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5710MHz)

Vertical

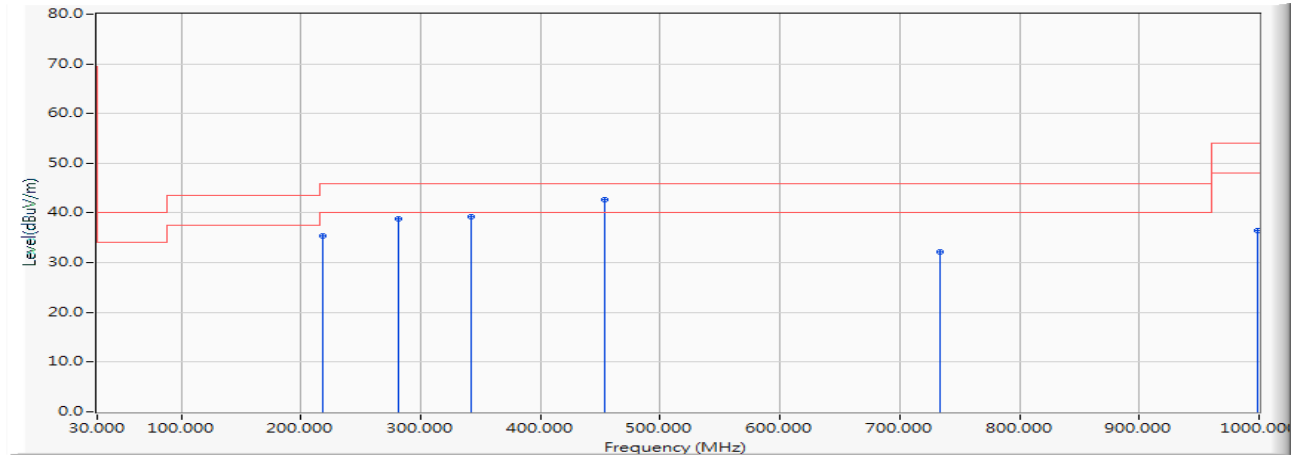


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		218.180	-13.311	48.674	35.363	-10.637	46.000	QUASIPeAK
2		281.230	-10.862	49.737	38.875	-7.125	46.000	QUASIPeAK
3		342.340	-9.358	48.633	39.275	-6.725	46.000	QUASIPeAK
4	*	453.890	-6.729	49.313	42.583	-3.417	46.000	QUASIPeAK
5		734.220	-2.329	34.566	32.237	-13.763	46.000	QUASIPeAK
6		999.030	0.994	35.397	36.391	-17.609	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5795MHz)

Horizontal

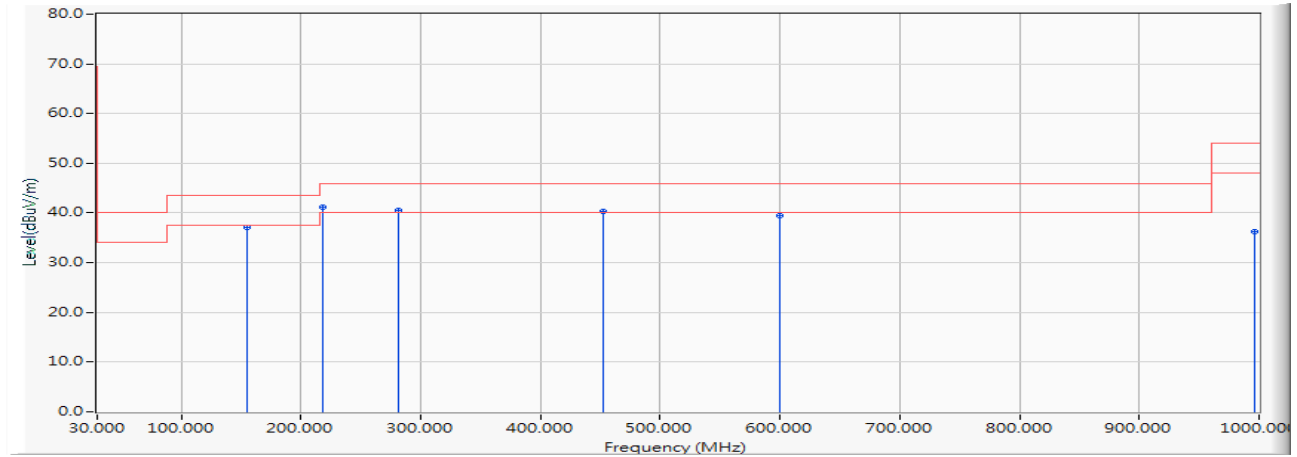


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		155.130	-10.950	47.956	37.006	-6.494	43.500	QUASIPEAK
2	*	218.180	-13.311	54.459	41.148	-4.852	46.000	QUASIPEAK
3		281.230	-10.862	51.339	40.477	-5.523	46.000	QUASIPEAK
4		452.920	-6.746	47.141	40.396	-5.604	46.000	QUASIPEAK
5		599.390	-4.020	43.553	39.533	-6.467	46.000	QUASIPEAK
6		996.120	0.956	35.366	36.322	-17.678	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps) (5795MHz)

Vertical

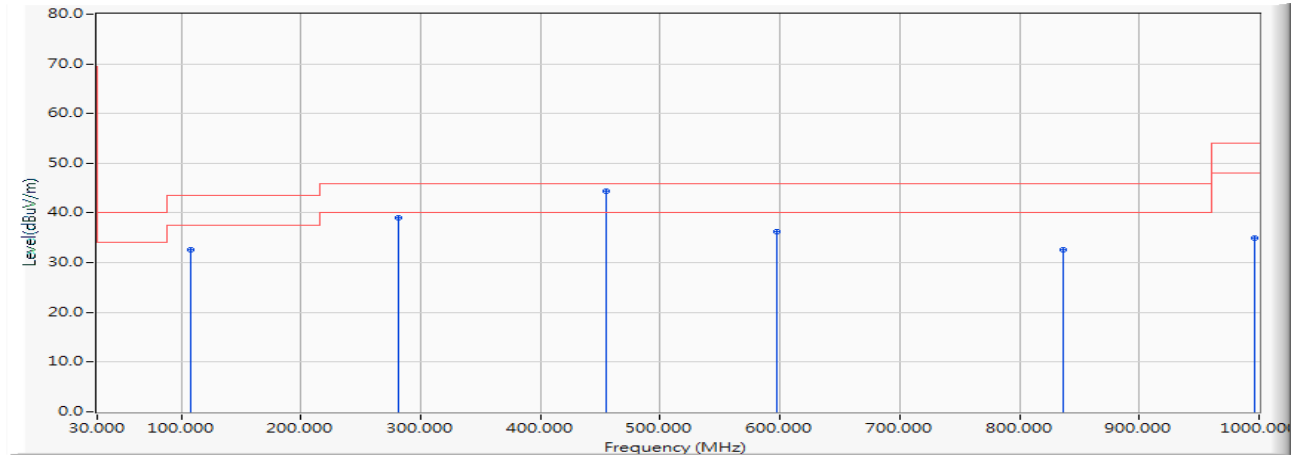


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	108.570	-14.642	47.325	32.683	-10.817	43.500	QUASIPEAK
2	281.230	-10.862	49.896	39.034	-6.966	46.000	QUASIPEAK
3	* 454.860	-6.713	51.039	44.327	-1.673	46.000	QUASIPEAK
4	597.450	-4.065	40.213	36.148	-9.852	46.000	QUASIPEAK
5	837.040	-1.079	33.710	32.631	-13.369	46.000	QUASIPEAK
6	996.120	0.956	34.010	34.966	-19.034	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps) (5210MHz)

Horizontal

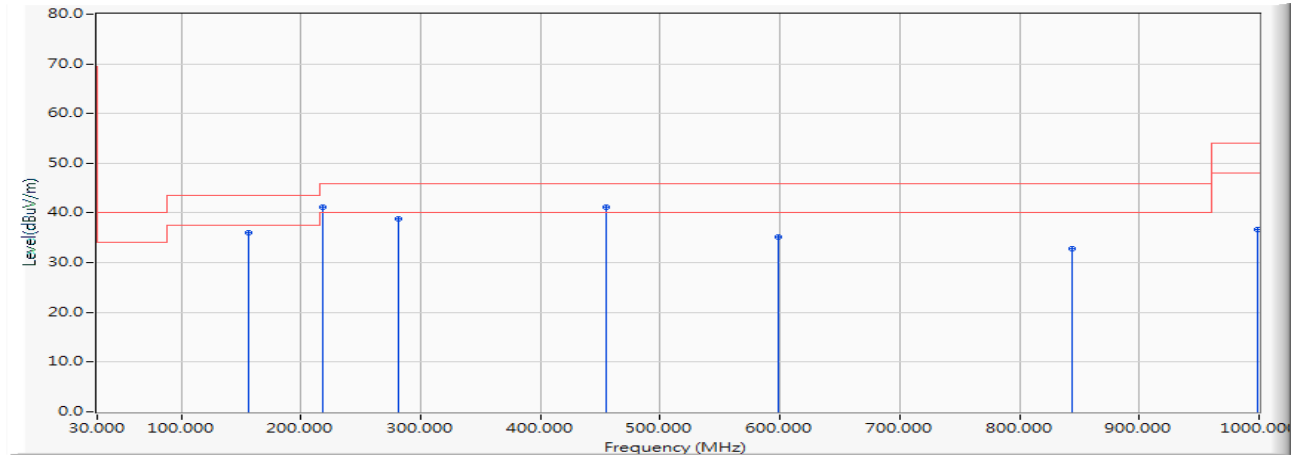


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		156.100	-10.926	47.028	36.102	-7.398	43.500	QUASIPeAK
2	*	218.180	-13.311	54.577	41.266	-4.734	46.000	QUASIPeAK
3		281.230	-10.862	49.745	38.883	-7.117	46.000	QUASIPeAK
4		454.860	-6.713	47.812	41.100	-4.900	46.000	QUASIPeAK
5		598.420	-4.042	39.273	35.231	-10.769	46.000	QUASIPeAK
6		843.830	-0.973	33.713	32.740	-13.260	46.000	QUASIPeAK
7		999.030	0.994	35.647	36.641	-17.359	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps) (5210MHz)

Vertical

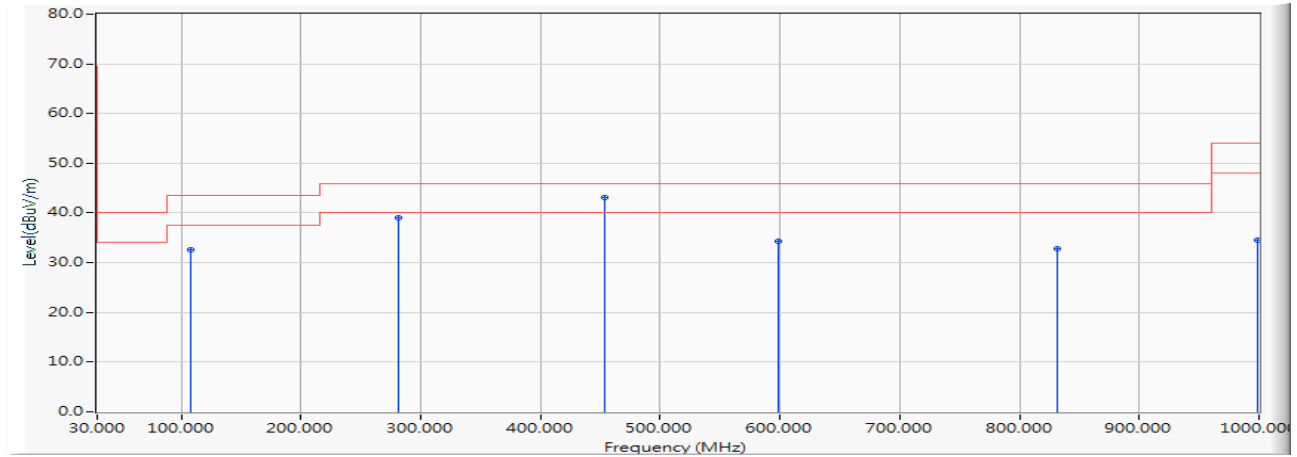


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	108.570	-14.642	47.153	32.511	-10.989	43.500	QUASIPeAK
2	281.230	-10.862	49.977	39.115	-6.885	46.000	QUASIPeAK
3	* 453.890	-6.729	49.868	43.138	-2.862	46.000	QUASIPeAK
4	598.420	-4.042	38.324	34.282	-11.718	46.000	QUASIPeAK
5	831.220	-1.170	34.031	32.861	-13.139	46.000	QUASIPeAK
6	999.030	0.994	33.613	34.607	-19.393	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps) (5290MHz)

Horizontal

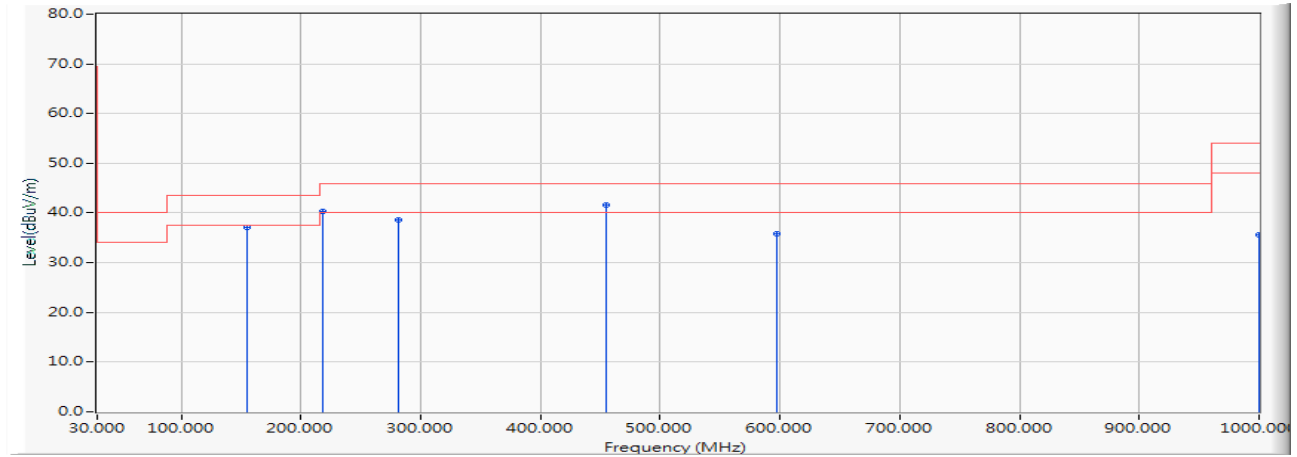


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		155.130	-10.950	47.962	37.012	-6.488	43.500	QUASIPEAK
2		218.180	-13.311	53.528	40.217	-5.783	46.000	QUASIPEAK
3		281.230	-10.862	49.422	38.560	-7.440	46.000	QUASIPEAK
4	*	454.860	-6.713	48.287	41.575	-4.425	46.000	QUASIPEAK
5		597.450	-4.065	39.914	35.849	-10.151	46.000	QUASIPEAK
6		1000.000	1.007	34.653	35.660	-18.340	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps) (5290MHz)

Vertical

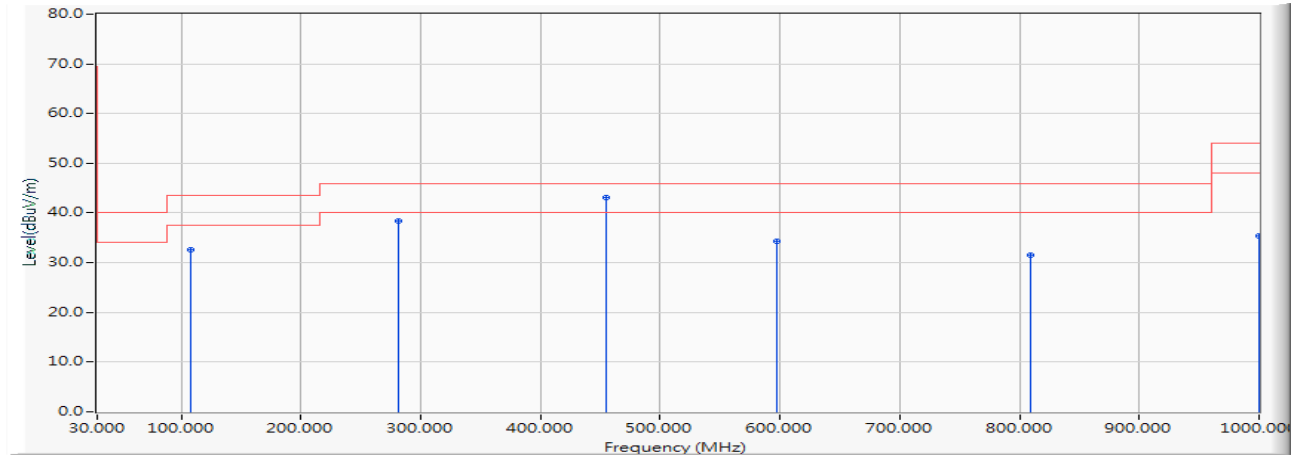


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	108.570	-14.642	47.170	32.528	-10.972	43.500	QUASIPeAK
2	281.230	-10.862	49.226	38.364	-7.636	46.000	QUASIPeAK
3	* 454.860	-6.713	49.803	43.091	-2.909	46.000	QUASIPeAK
4	597.450	-4.065	38.298	34.233	-11.767	46.000	QUASIPeAK
5	808.910	-1.517	33.135	31.618	-14.382	46.000	QUASIPeAK
6	1000.000	1.007	34.422	35.429	-18.571	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps) (5530MHz)

Horizontal

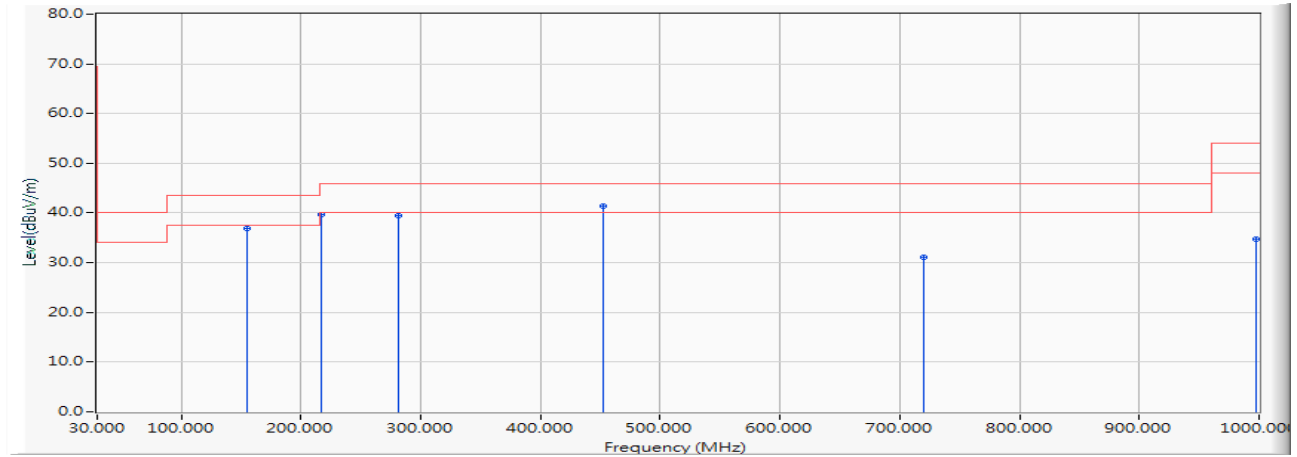


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	155.130	-10.950	47.745	36.795	-6.705	43.500	QUASIPEAK
2	217.210	-13.335	53.064	39.730	-6.270	46.000	QUASIPEAK
3	281.230	-10.862	50.393	39.531	-6.469	46.000	QUASIPEAK
4	* 452.920	-6.746	48.221	41.476	-4.524	46.000	QUASIPEAK
5	719.670	-2.611	33.659	31.048	-14.952	46.000	QUASIPEAK
6	997.090	0.969	33.674	34.643	-19.357	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps) (5530MHz)

Vertical

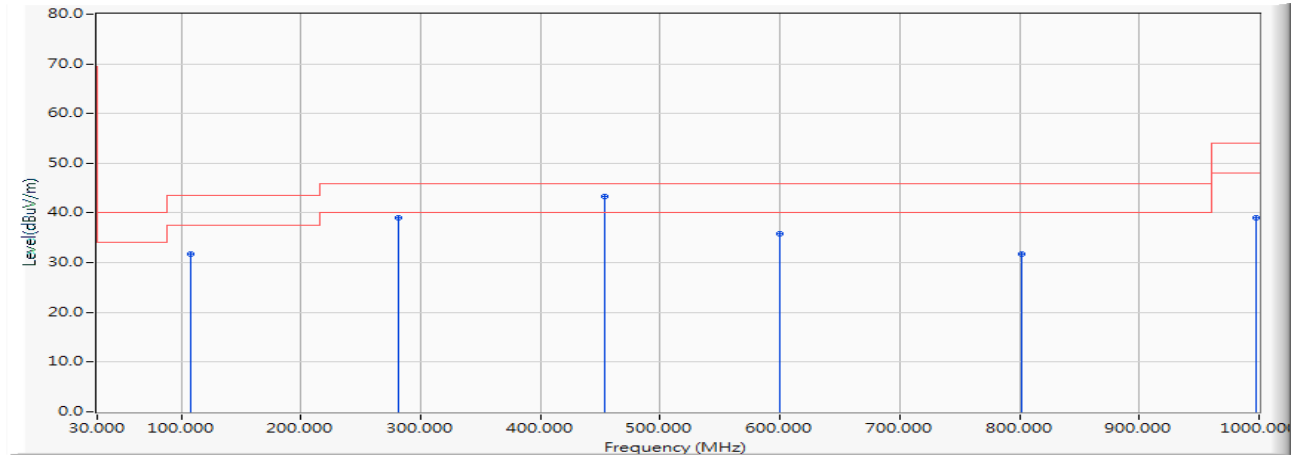


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	107.600	-14.814	46.602	31.789	-11.711	43.500	QUASIPeAK
2	281.230	-10.862	49.792	38.930	-7.070	46.000	QUASIPeAK
3	* 453.890	-6.729	50.074	43.344	-2.656	46.000	QUASIPeAK
4	599.390	-4.020	39.901	35.881	-10.119	46.000	QUASIPeAK
5	802.120	-1.624	33.408	31.784	-14.216	46.000	QUASIPeAK
6	997.090	0.969	38.024	38.993	-15.007	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Horizontal

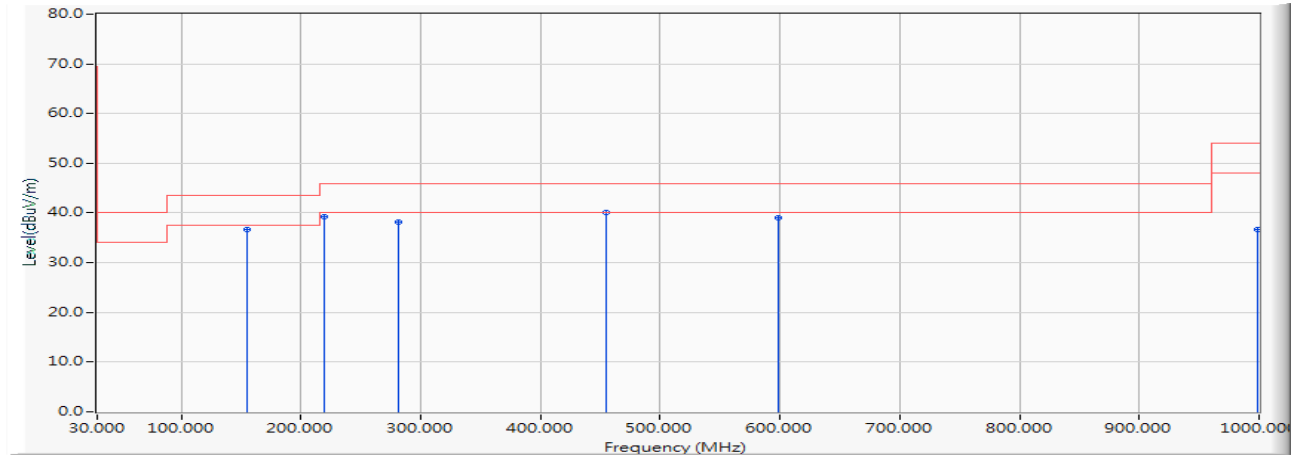


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		155.130	-10.950	47.670	36.720	-6.780	43.500	QUASIPeAK
2		219.150	-13.289	52.643	39.354	-6.646	46.000	QUASIPeAK
3		281.230	-10.862	49.114	38.252	-7.748	46.000	QUASIPeAK
4	*	454.860	-6.713	46.758	40.046	-5.954	46.000	QUASIPeAK
5		598.420	-4.042	43.073	39.031	-6.969	46.000	QUASIPeAK
6		999.030	0.994	35.692	36.686	-17.314	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Vertical

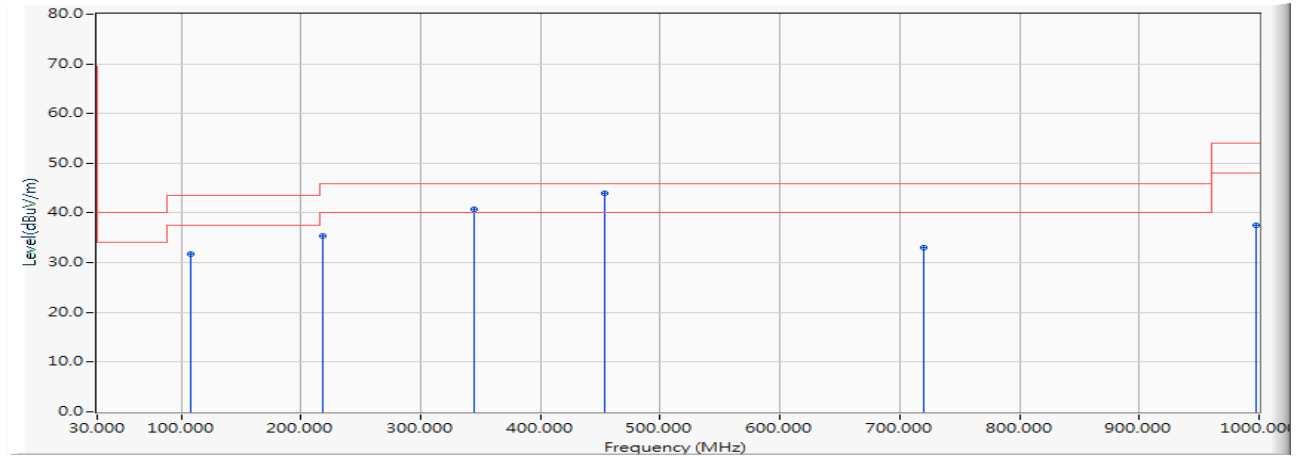


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		108.570	-14.642	46.413	31.771	-11.729	43.500	QUASIPeAK
2		218.180	-13.311	48.686	35.375	-10.625	46.000	QUASIPeAK
3		344.280	-9.312	49.987	40.675	-5.325	46.000	QUASIPeAK
4	*	453.890	-6.729	50.593	43.863	-2.137	46.000	QUASIPeAK
5		719.670	-2.611	35.543	32.932	-13.068	46.000	QUASIPeAK
6		998.060	0.982	36.519	37.501	-16.499	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Horizontal

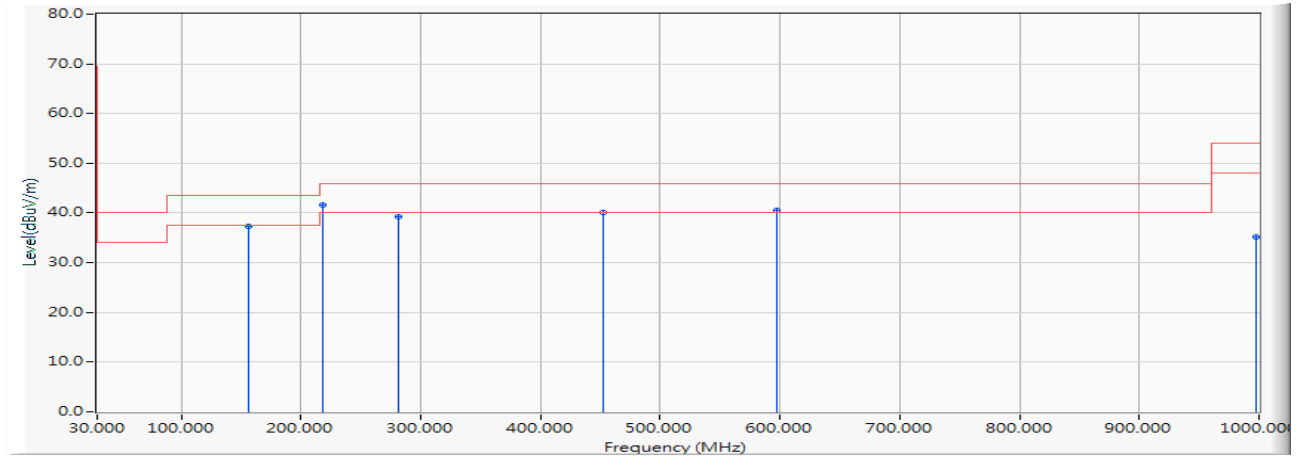


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		156.100	-10.926	48.291	37.365	-6.135	43.500	QUASIPeAK
2	*	218.180	-13.311	54.971	41.660	-4.340	46.000	QUASIPeAK
3		281.230	-10.862	50.122	39.260	-6.740	46.000	QUASIPeAK
4		452.920	-6.746	46.907	40.162	-5.838	46.000	QUASIPeAK
5		597.450	-4.065	44.687	40.622	-5.378	46.000	QUASIPeAK
6		998.060	0.982	34.133	35.115	-18.885	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Vertical

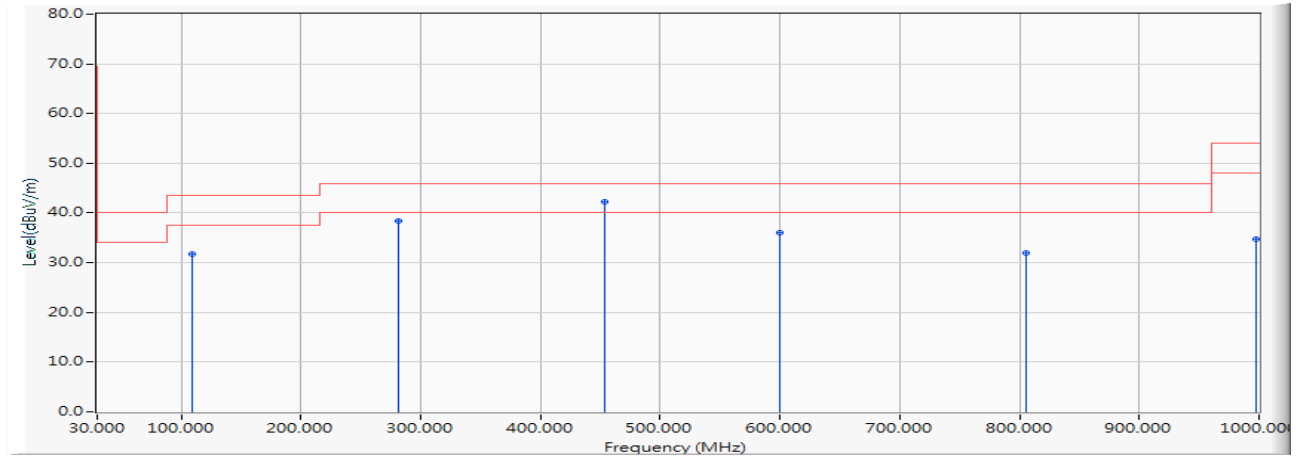


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	109.540	-14.471	46.136	31.664	-11.836	43.500	QUASIPeAK
2	281.230	-10.862	49.276	38.414	-7.586	46.000	QUASIPeAK
3	* 453.890	-6.729	49.025	42.295	-3.705	46.000	QUASIPeAK
4	599.390	-4.020	40.095	36.075	-9.925	46.000	QUASIPeAK
5	806.000	-1.563	33.559	31.996	-14.004	46.000	QUASIPeAK
6	997.090	0.969	33.881	34.850	-19.150	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Horizontal

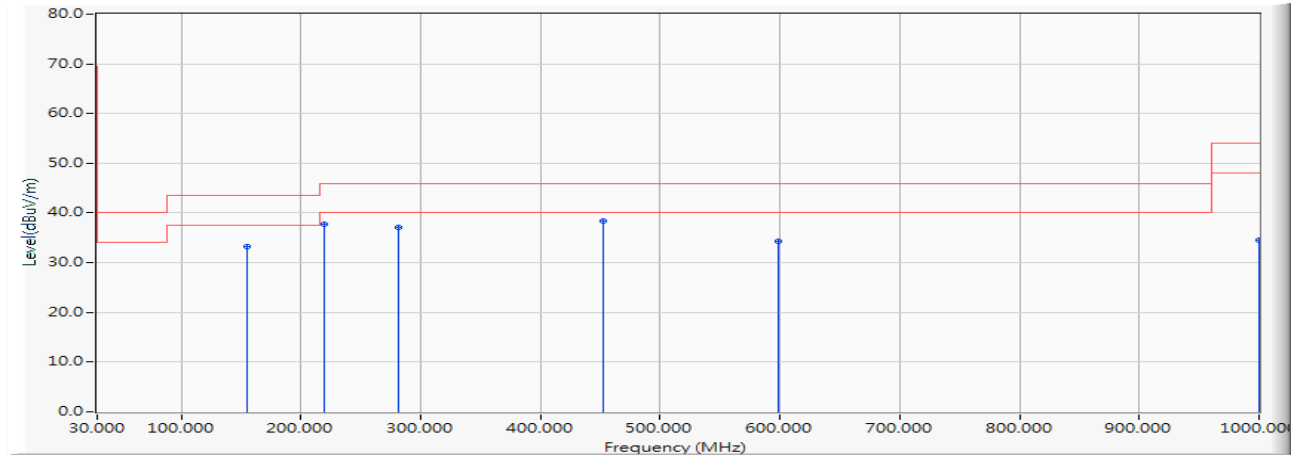


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	155.130	-10.950	44.221	33.271	-10.229	43.500	QUASIPeAK
2	219.150	-13.289	50.944	37.655	-8.345	46.000	QUASIPeAK
3	281.230	-10.862	48.036	37.174	-8.826	46.000	QUASIPeAK
4	* 452.920	-6.746	45.132	38.387	-7.613	46.000	QUASIPeAK
5	598.420	-4.042	38.446	34.404	-11.596	46.000	QUASIPeAK
6	1000.000	1.007	33.629	34.636	-19.364	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Vertical

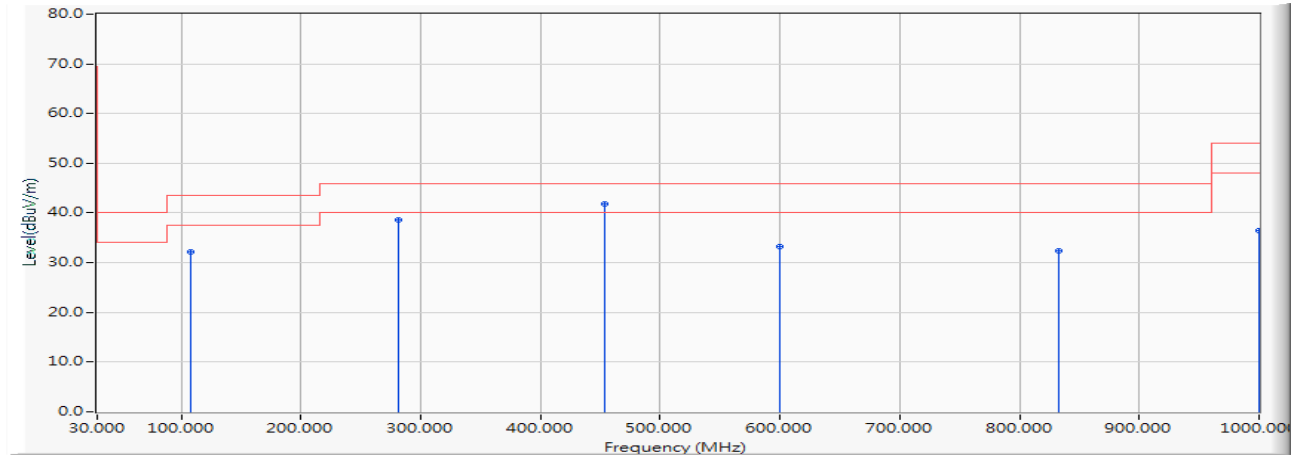


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	107.600	-14.814	46.907	32.094	-11.406	43.500	QUASIPeAK
2	281.230	-10.862	49.502	38.640	-7.360	46.000	QUASIPeAK
3	* 453.890	-6.729	48.604	41.874	-4.126	46.000	QUASIPeAK
4	599.390	-4.020	37.330	33.310	-12.690	46.000	QUASIPeAK
5	832.190	-1.155	33.547	32.392	-13.608	46.000	QUASIPeAK
6	1000.000	1.007	35.552	36.559	-17.441	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps) (5220MHz)

Horizontal

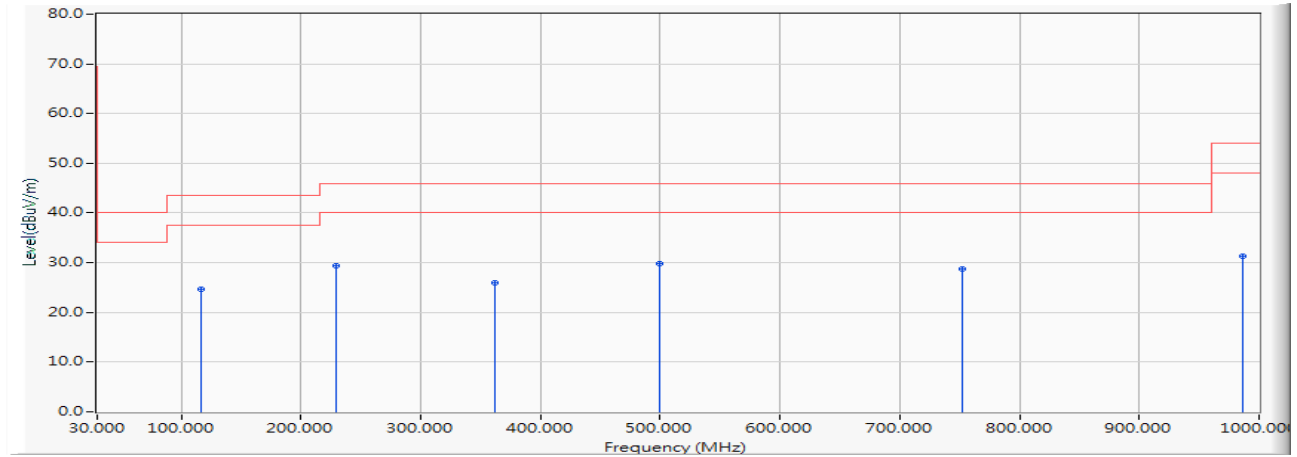


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	116.330	-13.783	38.345	24.562	-18.938	43.500	QUASIPeAK
2	228.850	-12.978	42.371	29.393	-16.607	46.000	QUASIPeAK
3	361.740	-8.912	34.869	25.957	-20.043	46.000	QUASIPeAK
4	* 499.480	-5.961	35.699	29.738	-16.262	46.000	QUASIPeAK
5	752.650	-2.004	30.847	28.843	-17.157	46.000	QUASIPeAK
6	986.420	0.831	30.394	31.225	-22.775	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps) (5220MHz)

Vertical

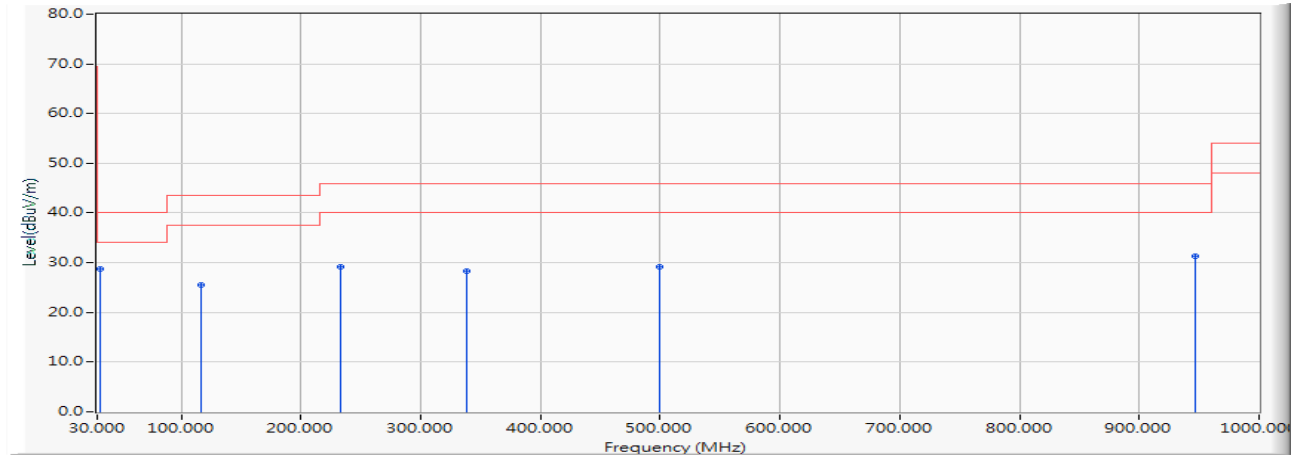


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.707	28.704	-11.296	40.000	QUASIPeAK
2		116.330	-13.783	39.366	25.583	-17.917	43.500	QUASIPeAK
3		232.730	-12.742	41.984	29.242	-16.758	46.000	QUASIPeAK
4		338.460	-9.447	37.689	28.242	-17.758	46.000	QUASIPeAK
5		499.480	-5.961	35.172	29.211	-16.789	46.000	QUASIPeAK
6		946.650	0.311	31.066	31.377	-14.623	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps) (5300MHz)

Horizontal

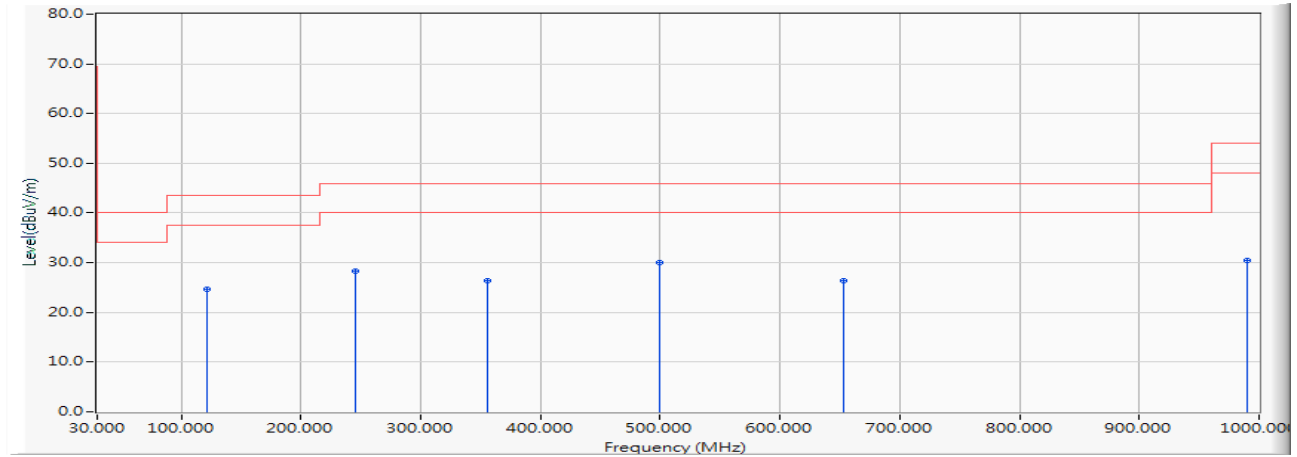


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	122.150	-13.206	37.870	24.664	-18.836	43.500	QUASIPeAK
2	245.340	-12.143	40.408	28.265	-17.735	46.000	QUASIPeAK
3	355.920	-9.044	35.363	26.319	-19.681	46.000	QUASIPeAK
4	* 499.480	-5.961	36.029	30.068	-15.932	46.000	QUASIPeAK
5	652.740	-3.659	30.024	26.365	-19.635	46.000	QUASIPeAK
6	990.300	0.881	29.573	30.454	-23.546	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps) (5300MHz)

Vertical

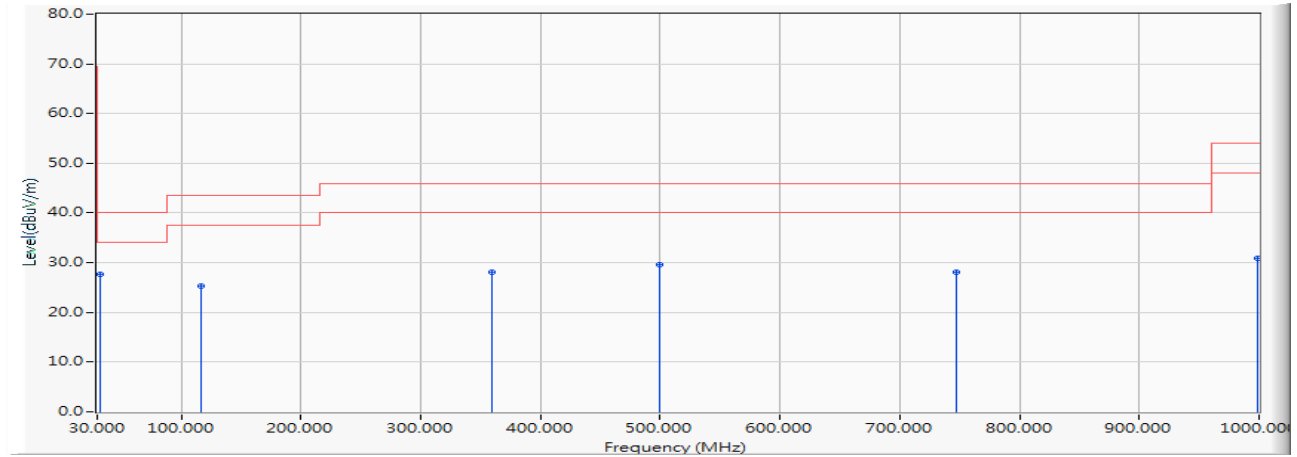


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	39.580	27.577	-12.423	40.000	QUASIPEAK
2		116.330	-13.783	39.086	25.303	-18.197	43.500	QUASIPEAK
3		359.800	-8.955	37.130	28.175	-17.825	46.000	QUASIPEAK
4		499.480	-5.961	35.542	29.581	-16.419	46.000	QUASIPEAK
5		746.830	-2.084	30.074	27.990	-18.010	46.000	QUASIPEAK
6		999.030	0.994	29.969	30.963	-23.037	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps) (5580MHz)

Horizontal

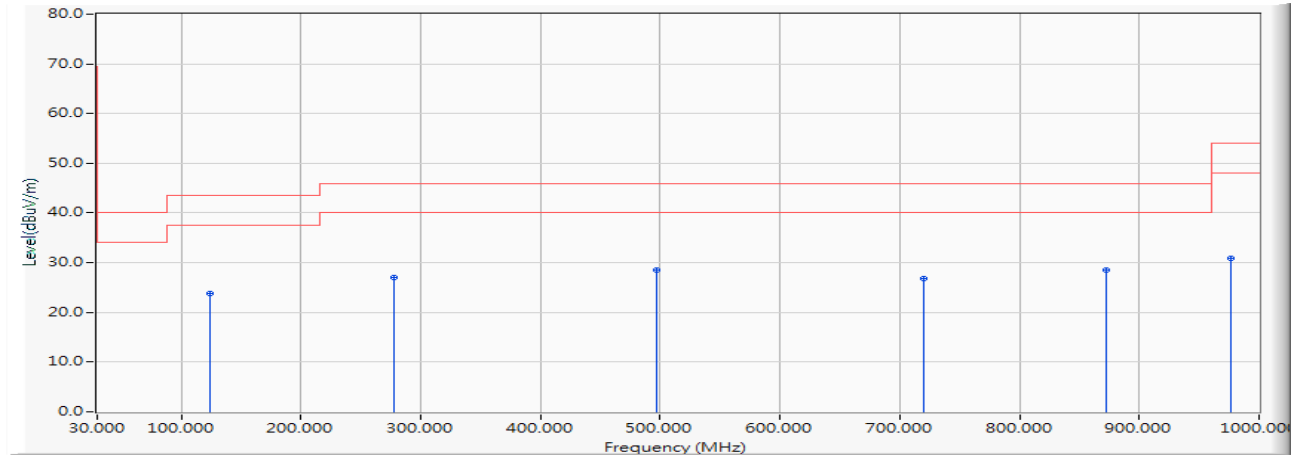


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	124.090	-13.001	36.899	23.897	-19.603	43.500	QUASIPeAK
2	278.320	-10.963	37.984	27.021	-18.979	46.000	QUASIPeAK
3	497.540	-5.993	34.496	28.503	-17.497	46.000	QUASIPeAK
4	720.640	-2.592	29.501	26.909	-19.091	46.000	QUASIPeAK
5	* 872.930	-0.567	29.187	28.620	-17.380	46.000	QUASIPeAK
6	976.720	0.704	30.212	30.916	-23.084	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps) (5580MHz)

Vertical

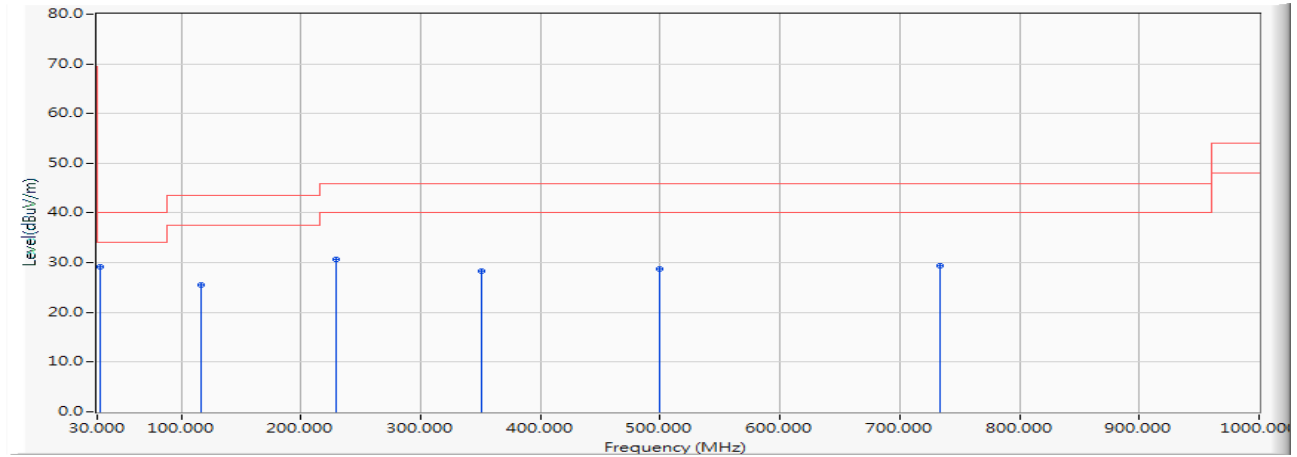


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	41.220	29.217	-10.783	40.000	QUASIPEAK
2		116.330	-13.783	39.386	25.603	-17.897	43.500	QUASIPEAK
3		228.850	-12.978	43.554	30.576	-15.424	46.000	QUASIPEAK
4		351.070	-9.154	37.482	28.328	-17.672	46.000	QUASIPEAK
5		499.480	-5.961	34.787	28.826	-17.174	46.000	QUASIPEAK
6		734.220	-2.329	31.749	29.420	-16.580	46.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps) (5720MHz)

Horizontal

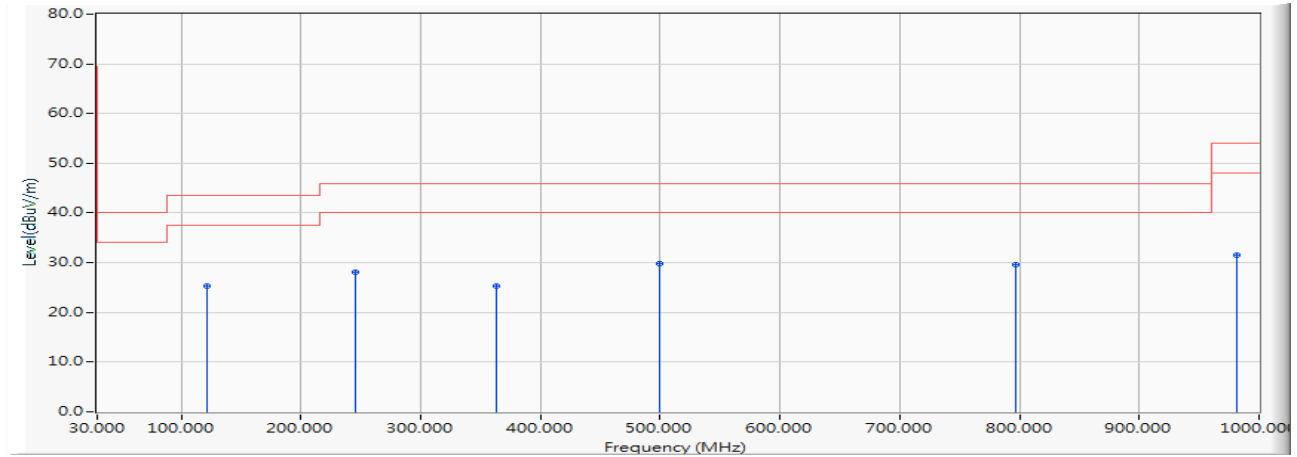


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		122.150	-13.206	38.567	25.361	-18.139	43.500	QUASIPeAK
2		245.340	-12.143	40.224	28.081	-17.919	46.000	QUASIPeAK
3		362.710	-8.889	34.189	25.300	-20.700	46.000	QUASIPeAK
4	*	499.480	-5.961	35.755	29.794	-16.206	46.000	QUASIPeAK
5		796.300	-1.686	31.211	29.525	-16.475	46.000	QUASIPeAK
6		981.570	0.767	30.718	31.485	-22.515	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps) (5720MHz)

Vertical

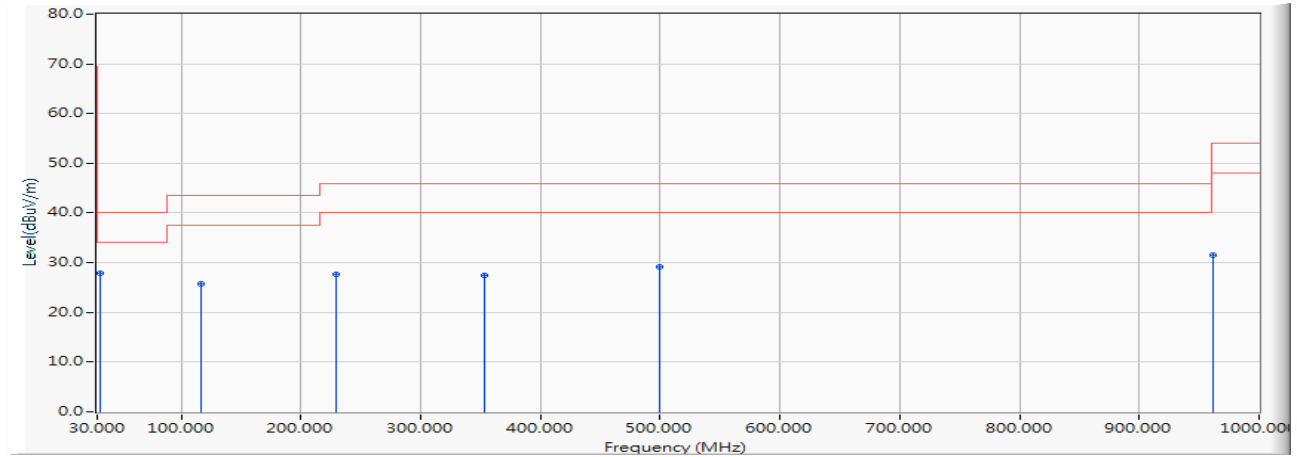


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	39.817	27.814	-12.186	40.000	QUASIPeAK
2		116.330	-13.783	39.510	25.727	-17.773	43.500	QUASIPeAK
3		228.850	-12.978	40.731	27.753	-18.247	46.000	QUASIPeAK
4		353.010	-9.110	36.620	27.510	-18.490	46.000	QUASIPeAK
5		499.480	-5.961	35.092	29.131	-16.869	46.000	QUASIPeAK
6		961.200	0.498	30.970	31.468	-22.532	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps) (5785MHz)

Horizontal

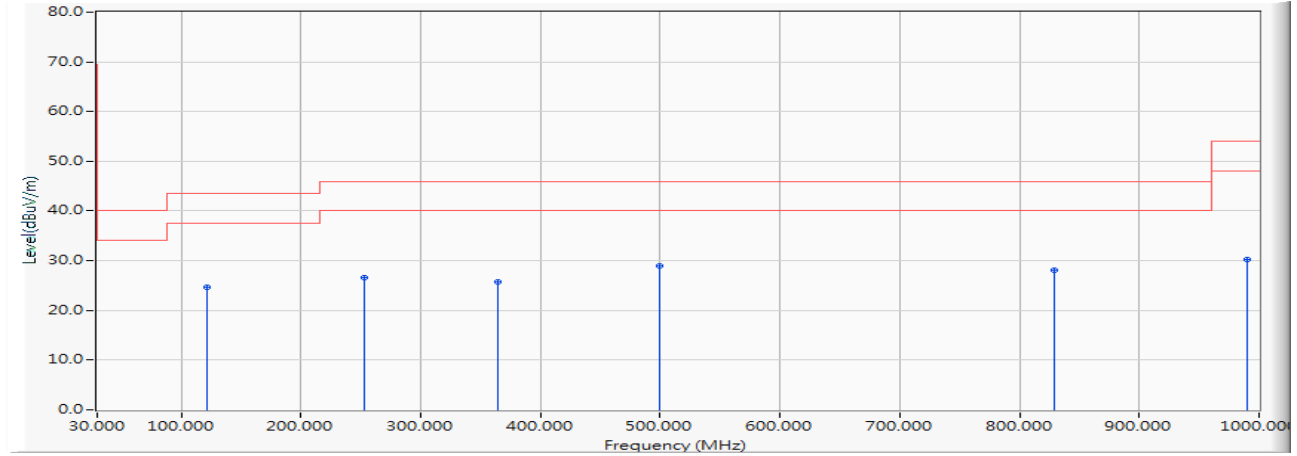


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		122.150	-13.206	37.919	24.713	-18.787	43.500	QUASIPeAK
2		253.100	-12.042	38.701	26.660	-19.340	46.000	QUASIPeAK
3		364.650	-8.846	34.679	25.833	-20.167	46.000	QUASIPeAK
4	*	499.480	-5.961	34.912	28.951	-17.049	46.000	QUASIPeAK
5		829.280	-1.200	29.386	28.186	-17.814	46.000	QUASIPeAK
6		990.300	0.881	29.444	30.325	-23.675	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps) (5785MHz)

Vertical

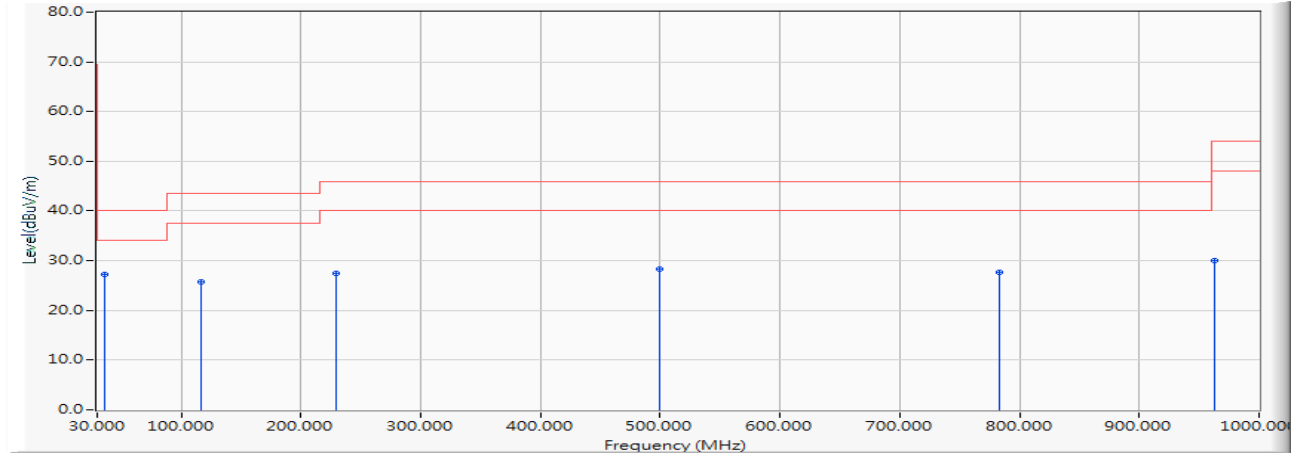


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	35.820	-11.717	38.885	27.169	-12.831	40.000	QUASIPeAK
2		116.330	-13.783	39.555	25.772	-17.728	43.500	QUASIPeAK
3		228.850	-12.978	40.475	27.497	-18.503	46.000	QUASIPeAK
4		499.480	-5.961	34.319	28.358	-17.642	46.000	QUASIPeAK
5		783.690	-1.782	29.495	27.713	-18.287	46.000	QUASIPeAK
6		963.140	0.525	29.470	29.995	-24.005	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5230MHz)

Horizontal

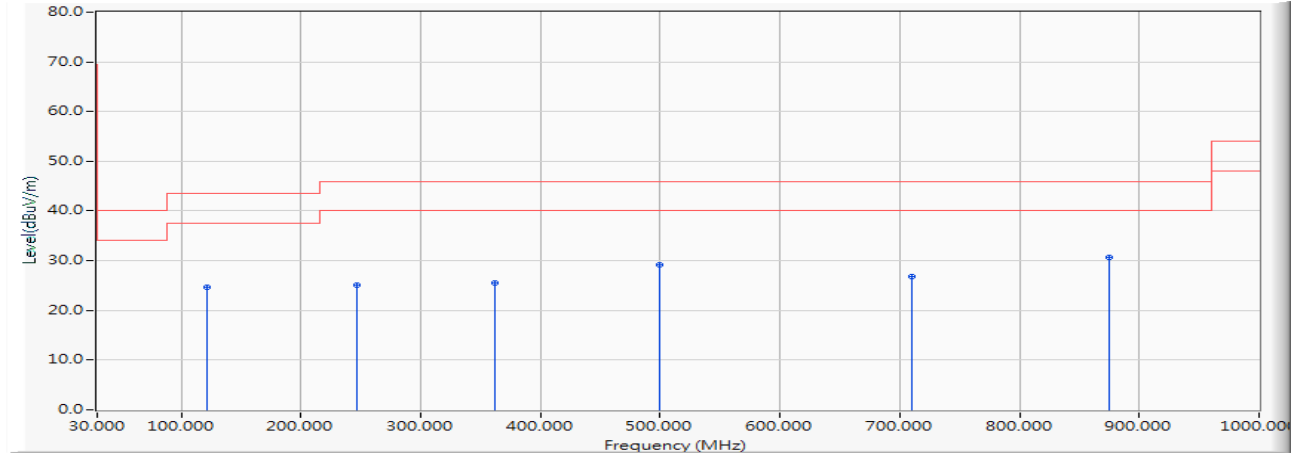


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		122.150	-13.206	37.765	24.559	-18.941	43.500	QUASIPeAK
2		246.310	-12.130	37.300	25.170	-20.830	46.000	QUASIPeAK
3		361.740	-8.912	34.536	25.624	-20.376	46.000	QUASIPeAK
4		499.480	-5.961	35.133	29.172	-16.828	46.000	QUASIPeAK
5		709.970	-2.799	29.665	26.866	-19.134	46.000	QUASIPeAK
6	*	874.870	-0.541	31.155	30.614	-15.386	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5230MHz)

Vertical

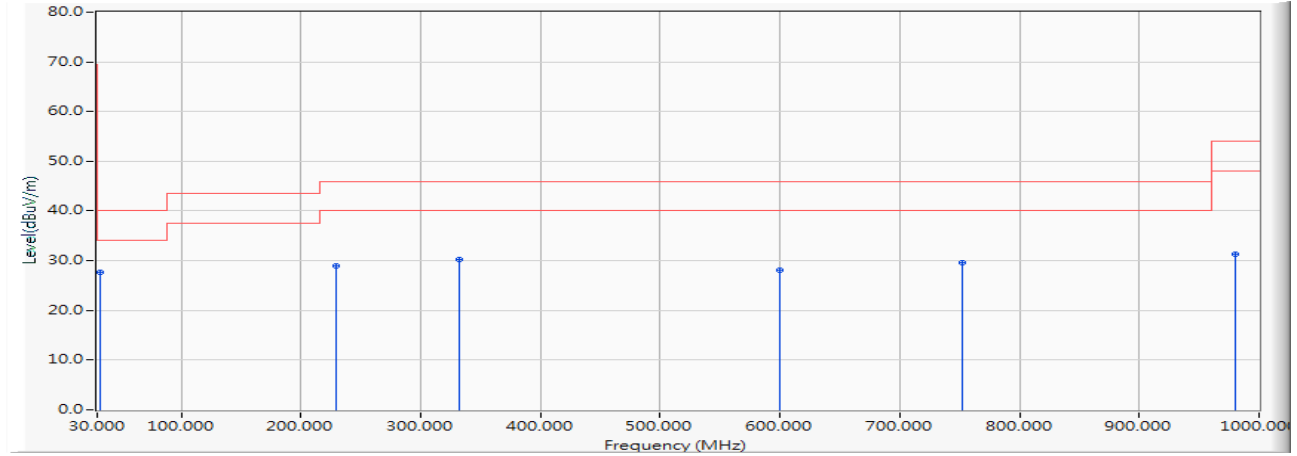


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	39.700	27.697	-12.303	40.000	QUASIPeAK
2		228.850	-12.978	41.992	29.014	-16.986	46.000	QUASIPeAK
3		332.640	-9.581	39.765	30.184	-15.816	46.000	QUASIPeAK
4		599.390	-4.020	32.089	28.069	-17.931	46.000	QUASIPeAK
5		752.650	-2.004	31.585	29.581	-16.419	46.000	QUASIPeAK
6		980.600	0.754	30.455	31.209	-22.791	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5310MHz)

Horizontal

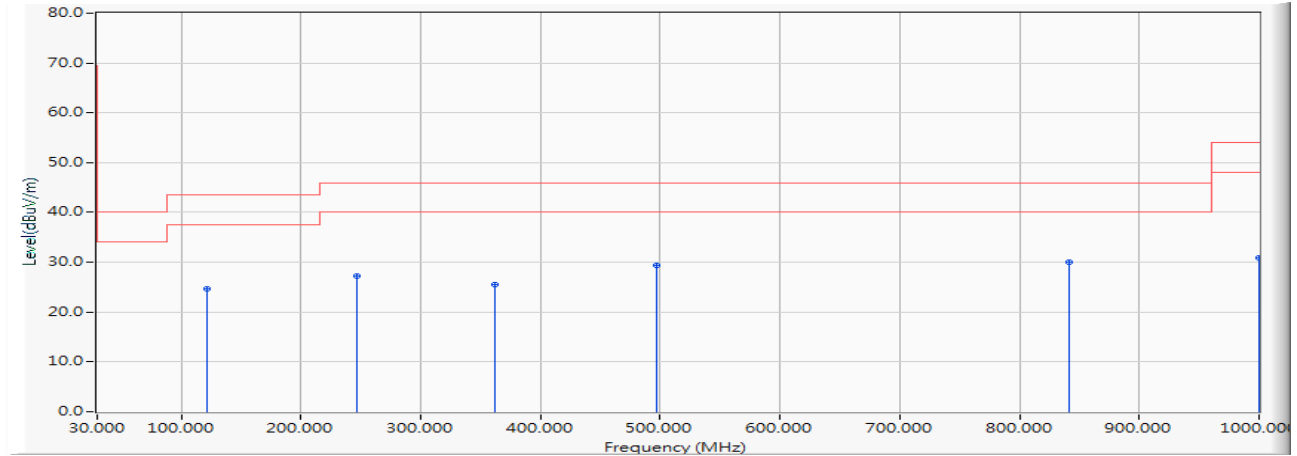


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		122.150	-13.206	37.765	24.559	-18.941	43.500	QUASIPeAK
2		246.310	-12.130	39.349	27.219	-18.781	46.000	QUASIPeAK
3		361.740	-8.912	34.536	25.624	-20.376	46.000	QUASIPeAK
4		497.540	-5.993	35.433	29.440	-16.560	46.000	QUASIPeAK
5	*	841.890	-1.004	30.967	29.963	-16.037	46.000	QUASIPeAK
6		1000.000	1.007	29.953	30.960	-23.040	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5310MHz)

Vertical

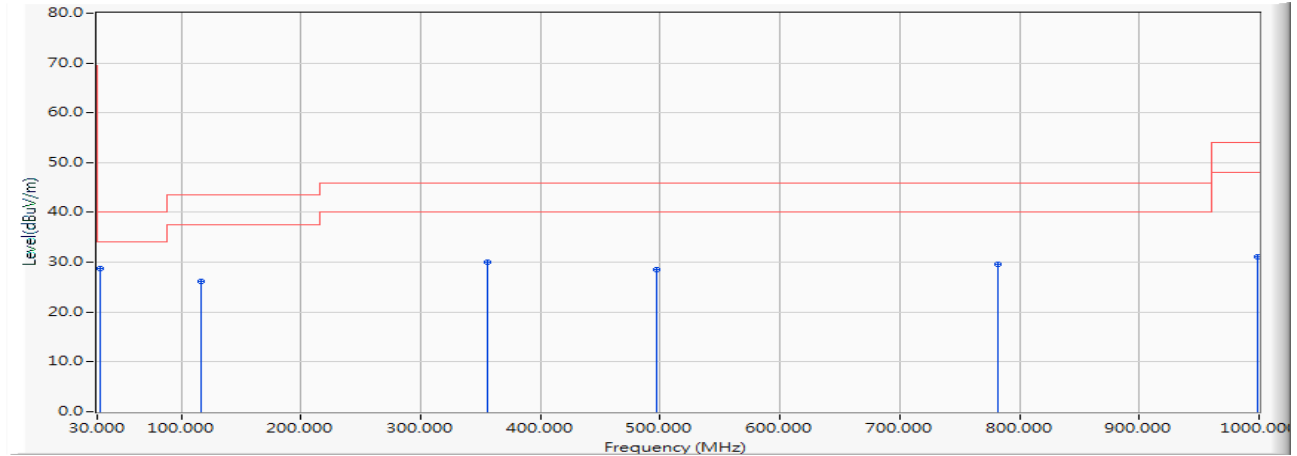


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.729	28.726	-11.274	40.000	QUASIPeAK
2		116.330	-13.783	40.012	26.229	-17.271	43.500	QUASIPeAK
3		355.920	-9.044	39.039	29.995	-16.005	46.000	QUASIPeAK
4		497.540	-5.993	34.538	28.545	-17.455	46.000	QUASIPeAK
5		781.750	-1.795	31.296	29.501	-16.499	46.000	QUASIPeAK
6		999.030	0.994	30.034	31.028	-22.972	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5550MHz)

Horizontal

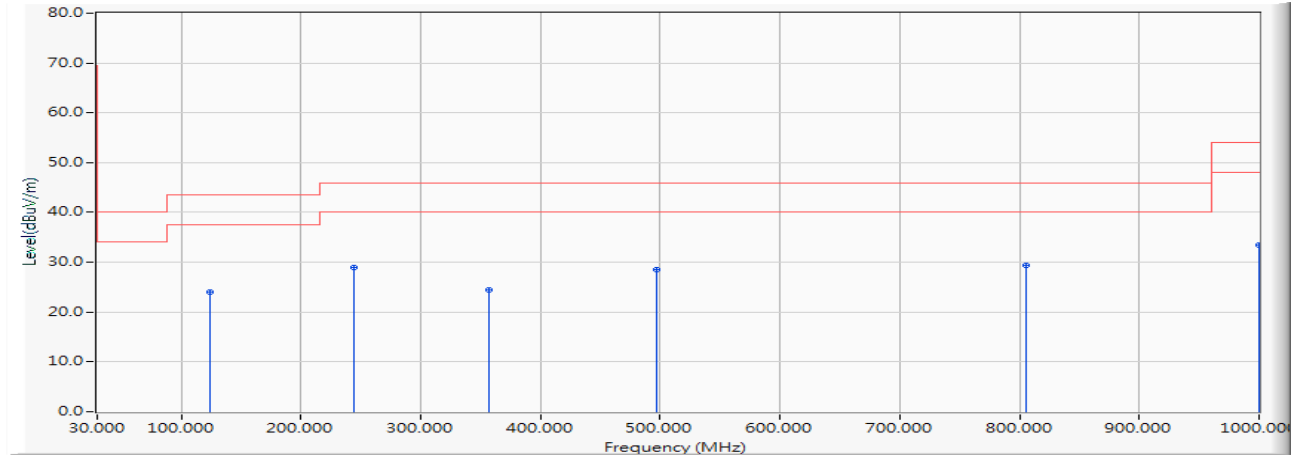


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		124.090	-13.001	36.964	23.962	-19.538	43.500	QUASIPEAK
2		244.370	-12.154	41.184	29.029	-16.971	46.000	QUASIPEAK
3		356.890	-9.021	33.419	24.398	-21.602	46.000	QUASIPEAK
4		497.540	-5.993	34.623	28.630	-17.370	46.000	QUASIPEAK
5	*	805.030	-1.579	30.971	29.392	-16.608	46.000	QUASIPEAK
6		1000.000	1.007	32.406	33.413	-20.587	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5550MHz)

Vertical

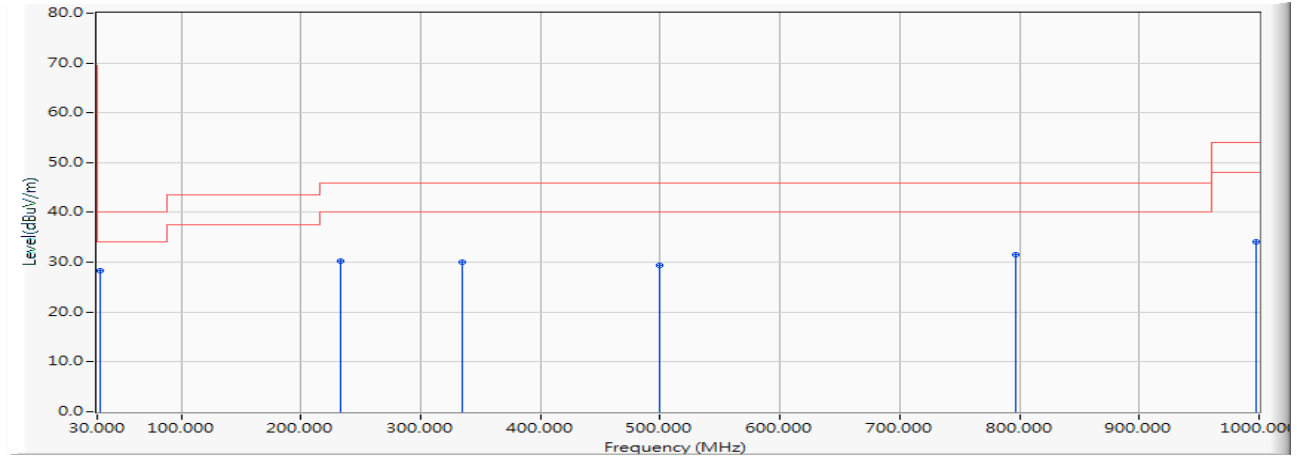


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.410	28.407	-11.593	40.000	QUASIPEAK
2		232.730	-12.742	42.978	30.236	-15.764	46.000	QUASIPEAK
3		334.580	-9.537	39.585	30.048	-15.952	46.000	QUASIPEAK
4		499.480	-5.961	35.337	29.376	-16.624	46.000	QUASIPEAK
5		796.300	-1.686	33.263	31.577	-14.423	46.000	QUASIPEAK
6		997.090	0.969	33.087	34.056	-19.944	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5710MHz)

Horizontal

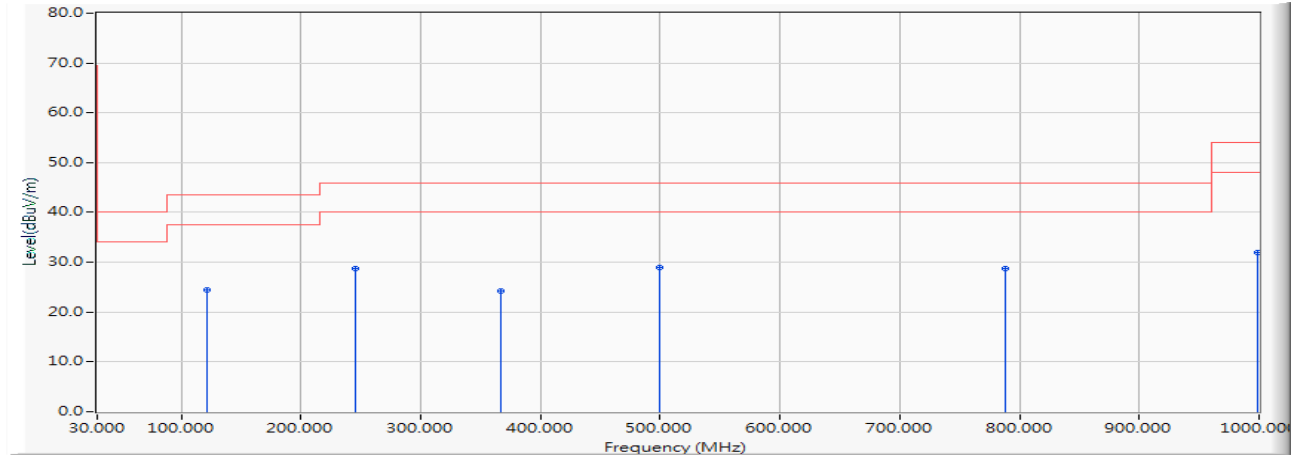


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	122.150	-13.206	37.630	24.424	-19.076	43.500	QUASIPEAK
2	245.340	-12.143	40.831	28.688	-17.312	46.000	QUASIPEAK
3	367.560	-8.780	33.087	24.307	-21.693	46.000	QUASIPEAK
4	* 499.480	-5.961	34.883	28.922	-17.078	46.000	QUASIPEAK
5	787.570	-1.753	30.565	28.812	-17.188	46.000	QUASIPEAK
6	999.030	0.994	30.862	31.856	-22.144	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5710MHz)

Vertical

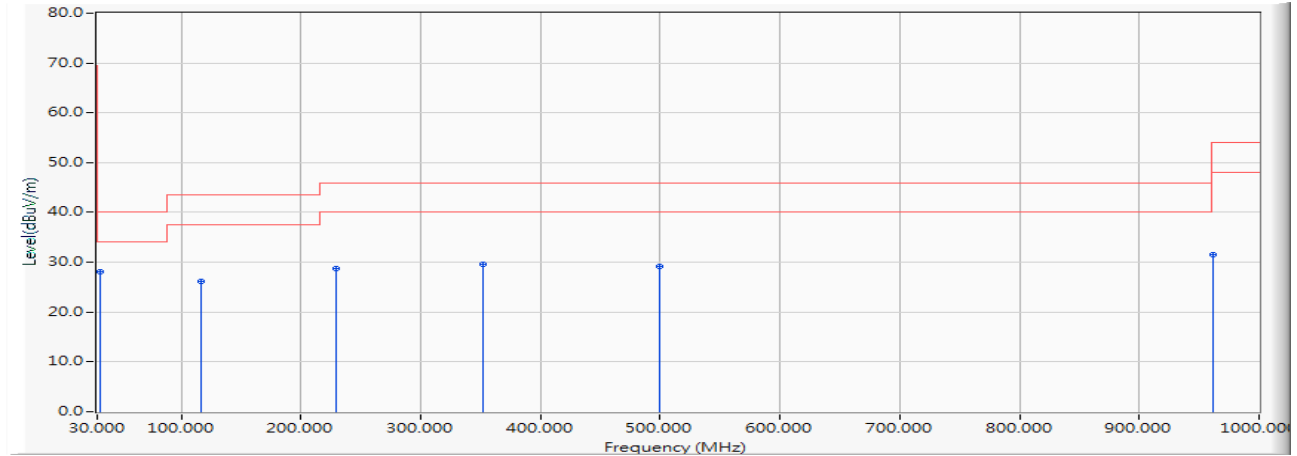


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.006	28.003	-11.997	40.000	QUASIPeAK
2		116.330	-13.783	39.993	26.210	-17.290	43.500	QUASIPeAK
3		228.850	-12.978	41.692	28.714	-17.286	46.000	QUASIPeAK
4		352.040	-9.132	38.638	29.506	-16.494	46.000	QUASIPeAK
5		499.480	-5.961	35.092	29.131	-16.869	46.000	QUASIPeAK
6		961.200	0.498	30.970	31.468	-22.532	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5795MHz)

Horizontal

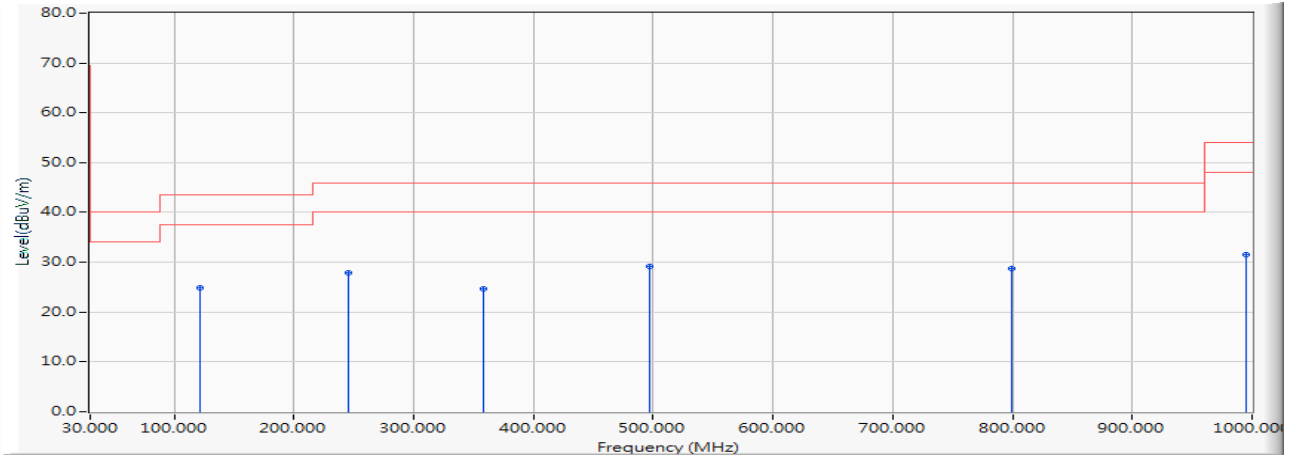


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	122.150	-13.206	38.119	24.913	-18.587	43.500	QUASIPEAK
2	245.340	-12.143	40.066	27.923	-18.077	46.000	QUASIPEAK
3	357.860	-9.000	33.723	24.723	-21.277	46.000	QUASIPEAK
4	* 497.540	-5.993	35.254	29.261	-16.739	46.000	QUASIPEAK
5	799.210	-1.664	30.446	28.782	-17.218	46.000	QUASIPEAK
6	995.150	0.944	30.583	31.527	-22.473	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps) (5795MHz)

Vertical

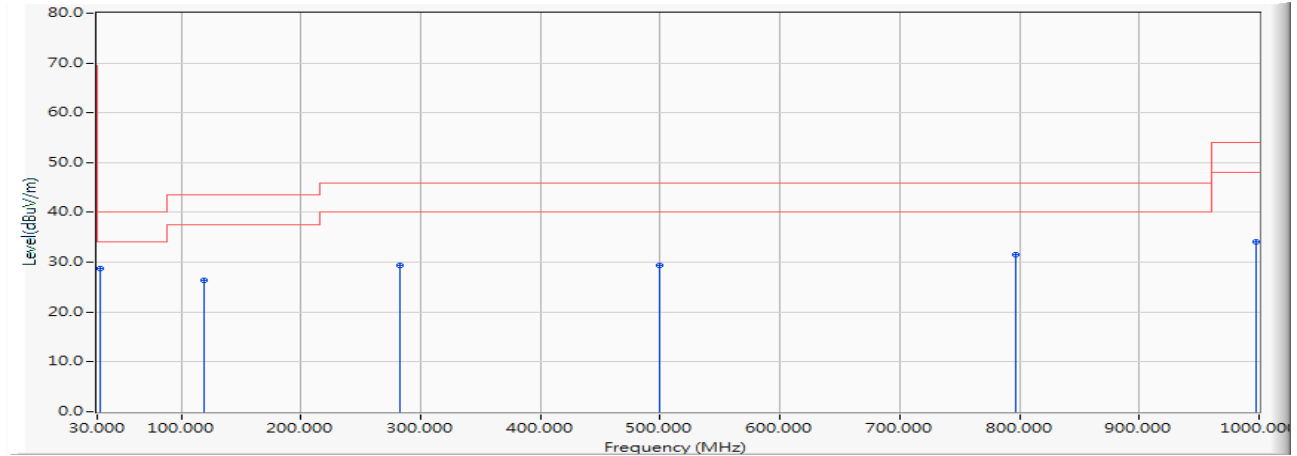


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.665	28.662	-11.338	40.000	QUASIPEAK
2		119.240	-13.503	39.874	26.371	-17.129	43.500	QUASIPEAK
3		282.200	-10.842	40.135	29.294	-16.706	46.000	QUASIPEAK
4		499.480	-5.961	35.337	29.376	-16.624	46.000	QUASIPEAK
5		796.300	-1.686	33.263	31.577	-14.423	46.000	QUASIPEAK
6		997.090	0.969	33.087	34.056	-19.944	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps) (5210MHz)

Horizontal

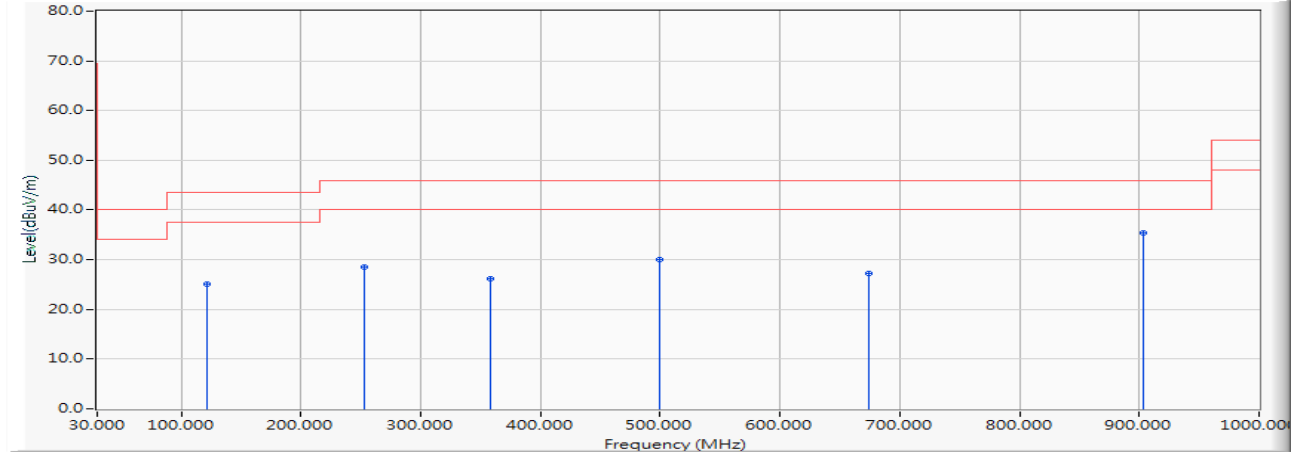


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		122.150	-13.206	38.258	25.052	-18.448	43.500	QUASIPeAK
2		253.100	-12.042	40.502	28.461	-17.539	46.000	QUASIPeAK
3		357.860	-9.000	35.105	26.105	-19.895	46.000	QUASIPeAK
4		499.480	-5.961	35.934	29.973	-16.027	46.000	QUASIPeAK
5		674.080	-3.357	30.640	27.283	-18.717	46.000	QUASIPeAK
6	*	903.970	-0.157	35.621	35.464	-10.536	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps) (5210MHz)

Vertical

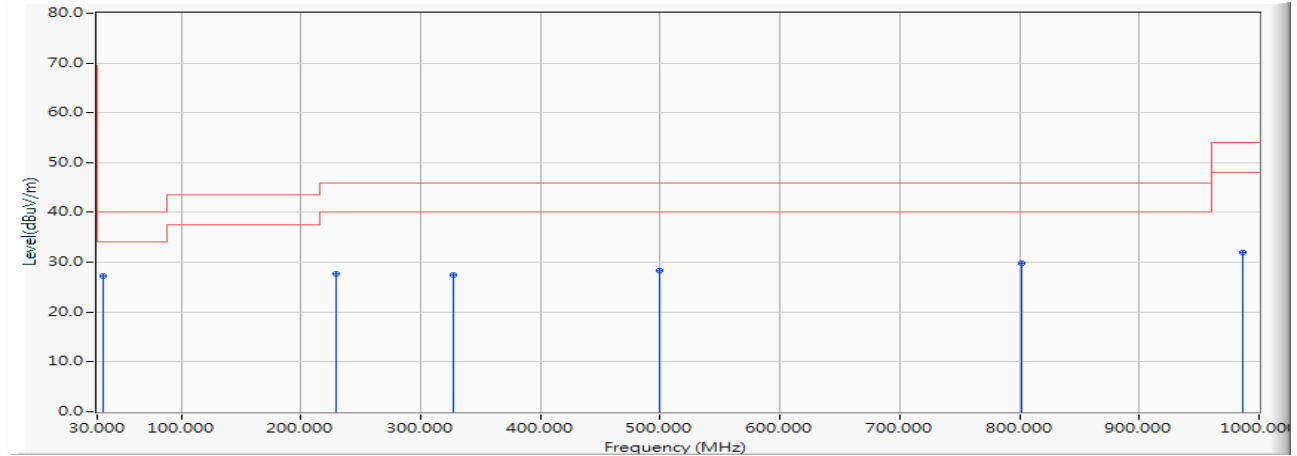


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	34.850	-11.845	39.177	27.332	-12.668	40.000	QUASIPEAK
2		228.850	-12.978	40.553	27.575	-18.425	46.000	QUASIPEAK
3		327.790	-9.693	37.150	27.457	-18.543	46.000	QUASIPEAK
4		499.480	-5.961	34.272	28.311	-17.689	46.000	QUASIPEAK
5		802.120	-1.624	31.341	29.717	-16.283	46.000	QUASIPEAK
6		986.420	0.831	31.059	31.890	-22.110	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps) (5290MHz)

Horizontal

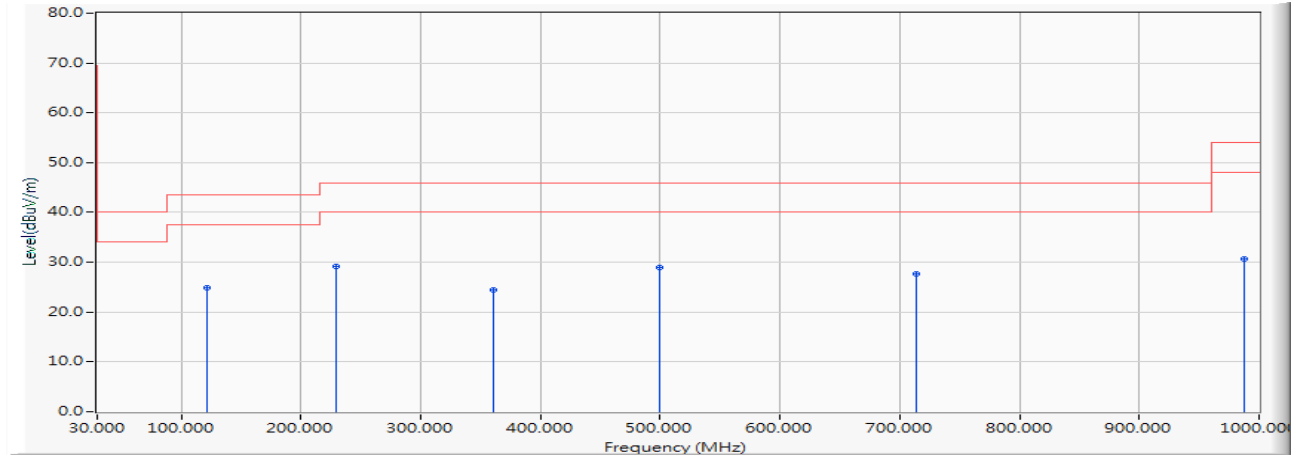


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	122.150	-13.206	38.102	24.896	-18.604	43.500	QUASIPeAK
2	* 228.850	-12.978	42.071	29.093	-16.907	46.000	QUASIPeAK
3	360.770	-8.933	33.476	24.543	-21.457	46.000	QUASIPeAK
4	499.480	-5.961	34.892	28.931	-17.069	46.000	QUASIPeAK
5	713.850	-2.724	30.378	27.654	-18.346	46.000	QUASIPeAK
6	987.390	0.843	29.922	30.765	-23.235	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps) (5290MHz)

Vertical

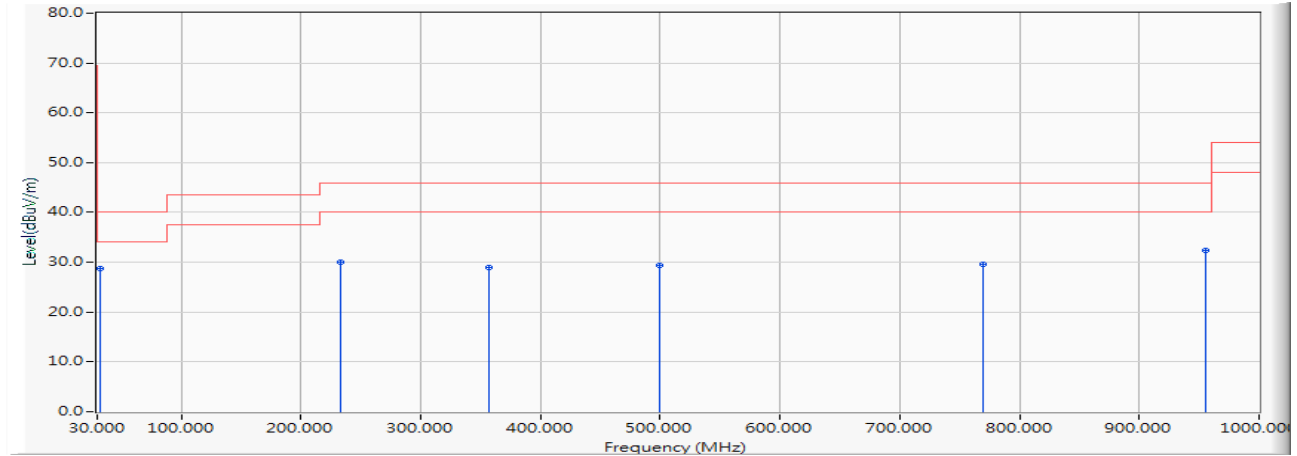


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.684	28.681	-11.319	40.000	QUASIPeAK
2		232.730	-12.742	42.853	30.111	-15.889	46.000	QUASIPeAK
3		356.890	-9.021	38.029	29.008	-16.992	46.000	QUASIPeAK
4		499.480	-5.961	35.281	29.320	-16.680	46.000	QUASIPeAK
5		769.140	-1.888	31.447	29.559	-16.441	46.000	QUASIPeAK
6		955.380	0.422	31.872	32.294	-13.706	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps) (5530MHz)

Horizontal

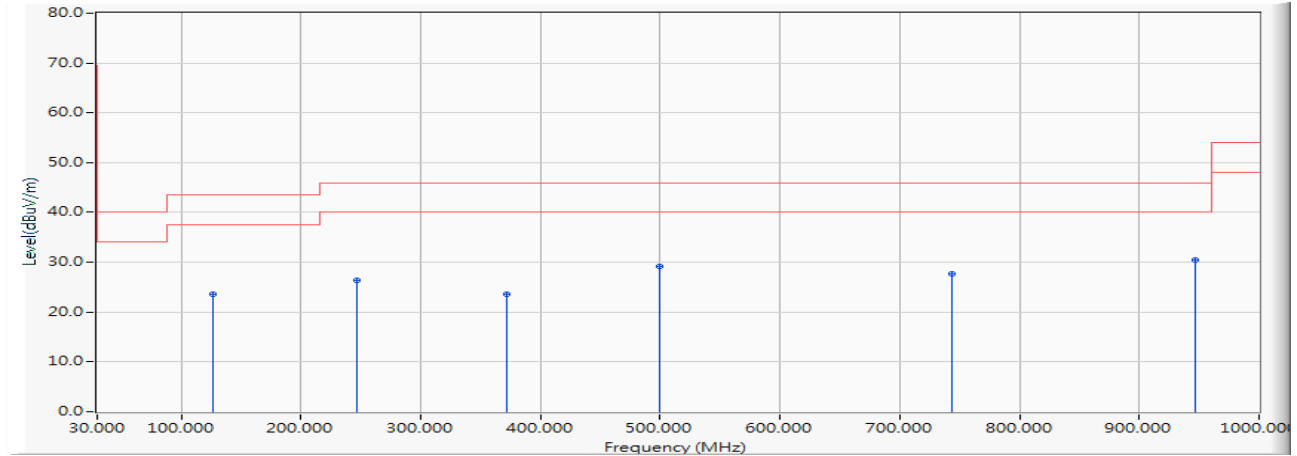


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		127.000	-12.696	36.213	23.517	-19.983	43.500	QUASIPeAK
2		247.280	-12.117	38.503	26.385	-19.615	46.000	QUASIPeAK
3		371.440	-8.692	32.273	23.582	-22.418	46.000	QUASIPeAK
4		499.480	-5.961	35.088	29.127	-16.873	46.000	QUASIPeAK
5		742.950	-2.159	29.797	27.638	-18.362	46.000	QUASIPeAK
6	*	946.650	0.311	30.151	30.462	-15.538	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps) (5530MHz)

Vertical

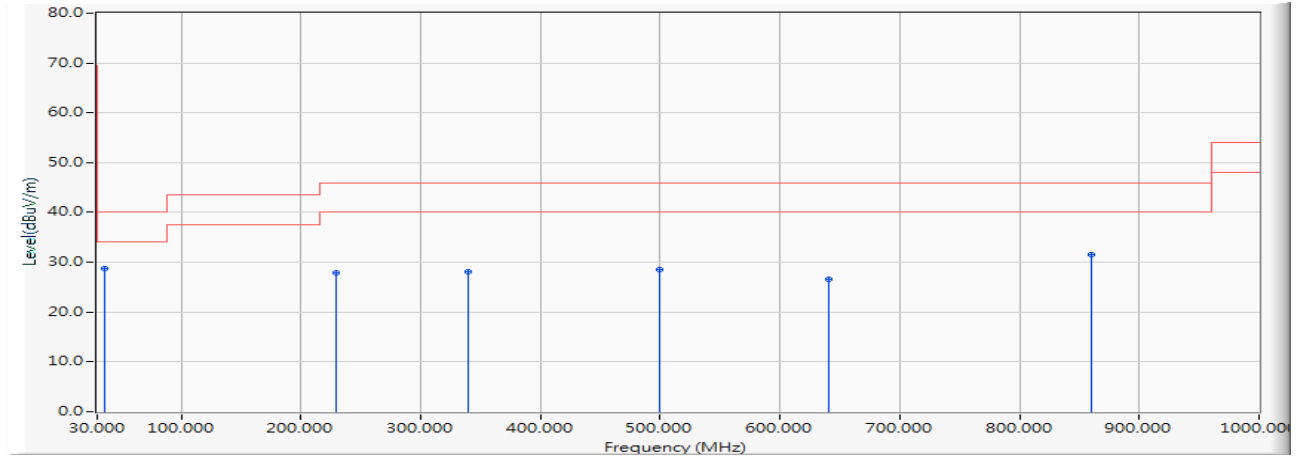


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	36.790	-11.579	40.405	28.826	-11.174	40.000	QUASIPEAK
2		228.850	-12.978	40.943	27.965	-18.035	46.000	QUASIPEAK
3		339.430	-9.426	37.604	28.179	-17.821	46.000	QUASIPEAK
4		499.480	-5.961	34.538	28.577	-17.423	46.000	QUASIPEAK
5		641.100	-3.750	30.409	26.659	-19.341	46.000	QUASIPEAK
6		860.320	-0.736	32.211	31.475	-14.525	46.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Horizontal

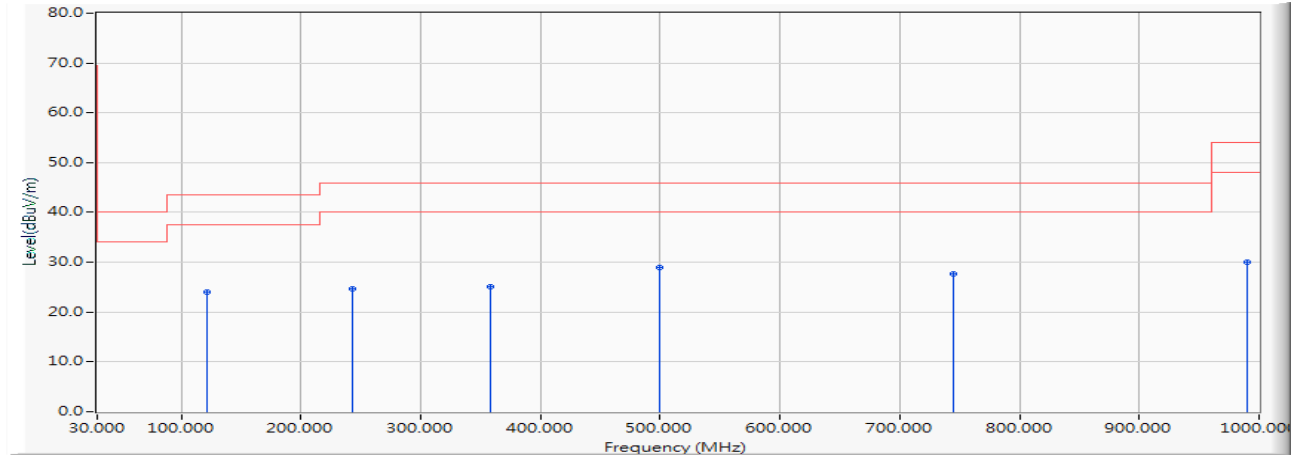


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	122.150	-13.206	37.310	24.104	-19.396	43.500	QUASIPEAK
2	243.400	-12.168	36.837	24.669	-21.331	46.000	QUASIPEAK
3	358.830	-8.977	34.144	25.166	-20.834	46.000	QUASIPEAK
4	* 499.480	-5.961	34.981	29.020	-16.980	46.000	QUASIPEAK
5	744.890	-2.121	29.701	27.579	-18.421	46.000	QUASIPEAK
6	990.300	0.881	29.087	29.968	-24.032	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Vertical

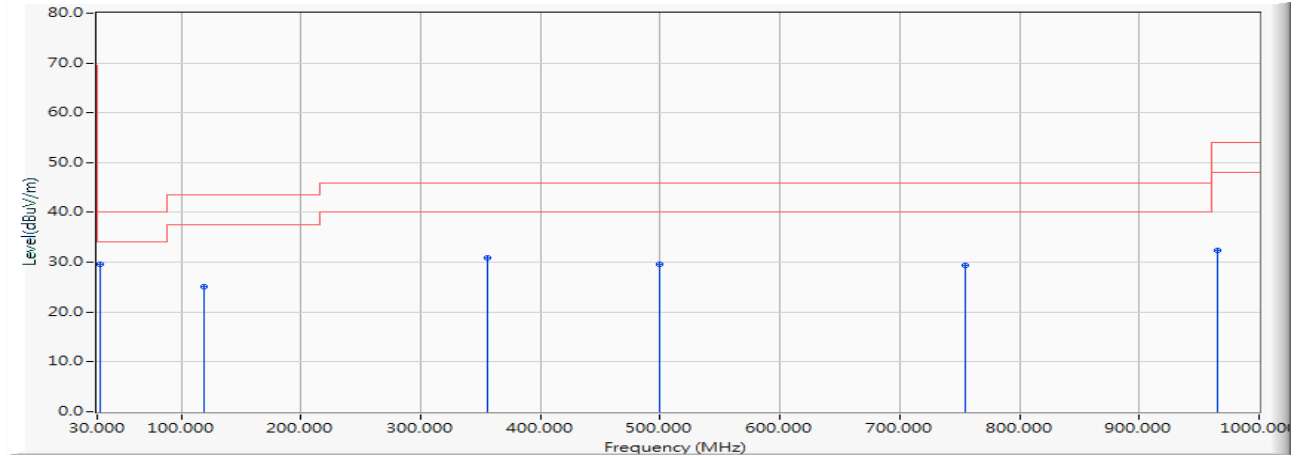


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	41.668	29.665	-10.335	40.000	QUASIPEAK
2		119.240	-13.503	38.694	25.191	-18.309	43.500	QUASIPEAK
3		355.920	-9.044	40.022	30.978	-15.022	46.000	QUASIPEAK
4		499.480	-5.961	35.543	29.582	-16.418	46.000	QUASIPEAK
5		754.590	-1.991	31.398	29.408	-16.592	46.000	QUASIPEAK
6		965.080	0.551	31.838	32.389	-21.611	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Horizontal

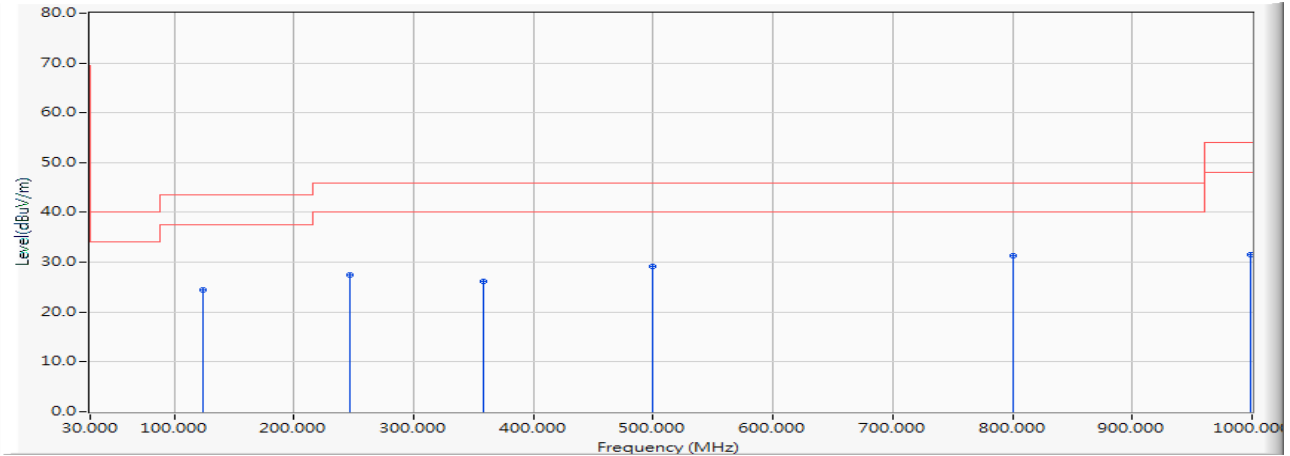


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	124.090	-13.001	37.528	24.526	-18.974	43.500	QUASIPeAK
2	247.280	-12.117	39.671	27.553	-18.447	46.000	QUASIPeAK
3	357.860	-9.000	35.204	26.204	-19.796	46.000	QUASIPeAK
4	499.480	-5.961	35.034	29.073	-16.927	46.000	QUASIPeAK
5	* 800.180	-1.654	32.970	31.316	-14.684	46.000	QUASIPeAK
6	999.030	0.994	30.602	31.596	-22.404	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Vertical

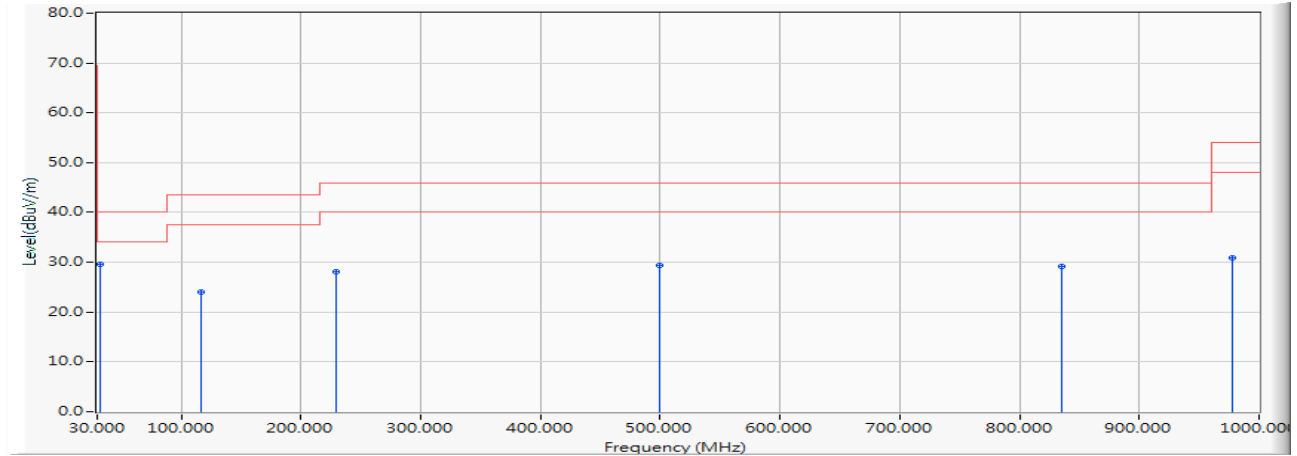


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	41.682	29.679	-10.321	40.000	QUASIPeAK
2		116.330	-13.783	37.822	24.039	-19.461	43.500	QUASIPeAK
3		228.850	-12.978	41.030	28.052	-17.948	46.000	QUASIPeAK
4		499.480	-5.961	35.439	29.478	-16.522	46.000	QUASIPeAK
5		835.100	-1.110	30.327	29.217	-16.783	46.000	QUASIPeAK
6		977.690	0.716	30.233	30.949	-23.051	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Horizontal

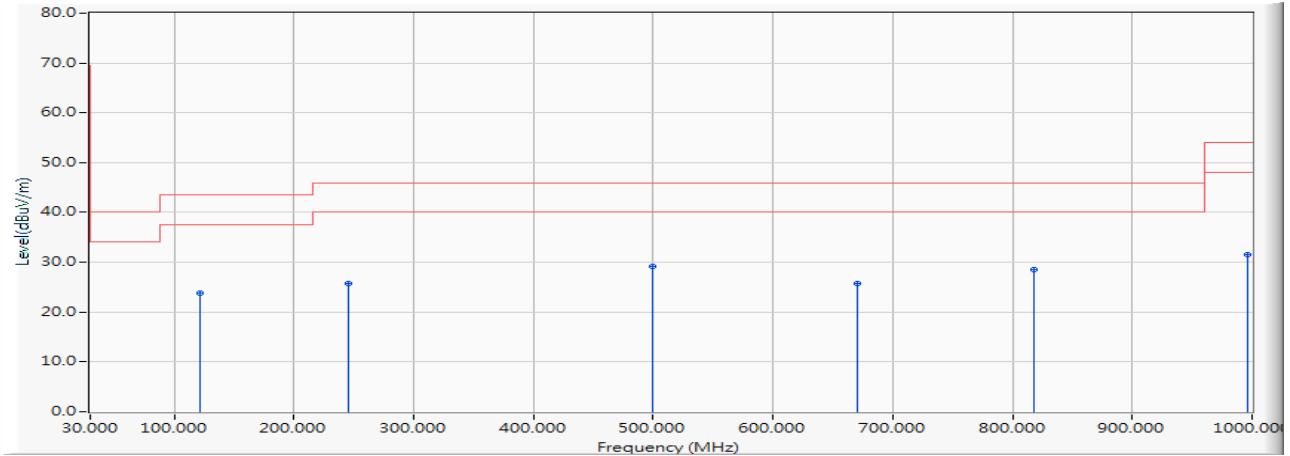


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	122.150	-13.206	37.027	23.821	-19.679	43.500	QUASIPeAK
2	245.340	-12.143	37.796	25.653	-20.347	46.000	QUASIPeAK
3	* 499.480	-5.961	35.073	29.112	-16.888	46.000	QUASIPeAK
4	670.200	-3.412	29.116	25.704	-20.296	46.000	QUASIPeAK
5	817.640	-1.382	29.835	28.453	-17.547	46.000	QUASIPeAK
6	996.120	0.956	30.526	31.482	-22.518	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Vertical

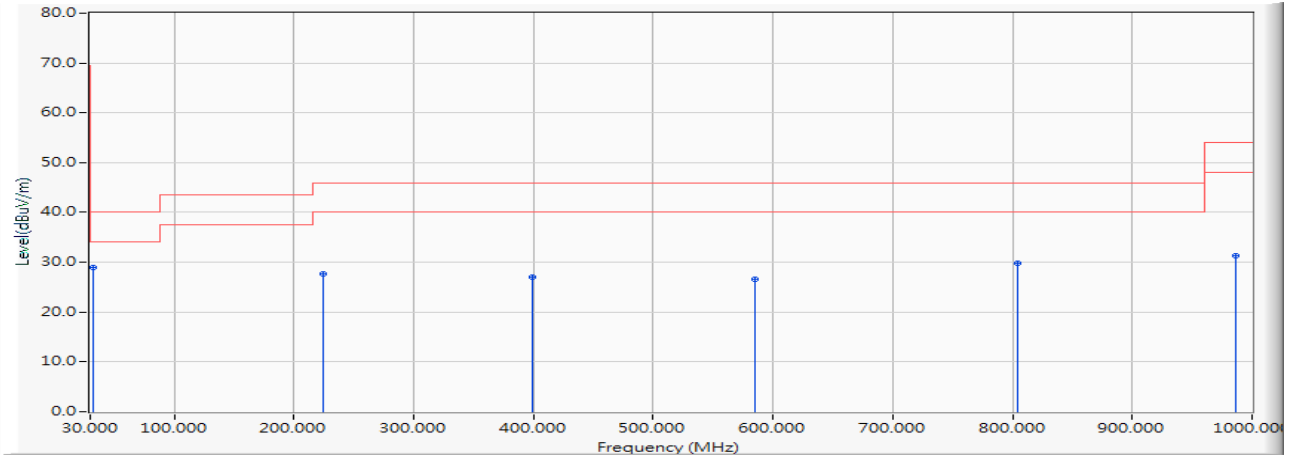


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.992	28.989	-11.011	40.000	QUASIPEAK
2		224.000	-13.137	40.850	27.713	-18.287	46.000	QUASIPEAK
3		398.600	-8.068	35.003	26.935	-19.065	46.000	QUASIPEAK
4		584.840	-4.361	30.962	26.601	-19.399	46.000	QUASIPEAK
5		804.060	-1.593	31.395	29.802	-16.198	46.000	QUASIPEAK
6		986.420	0.831	30.530	31.361	-22.639	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5220MHz)

Horizontal

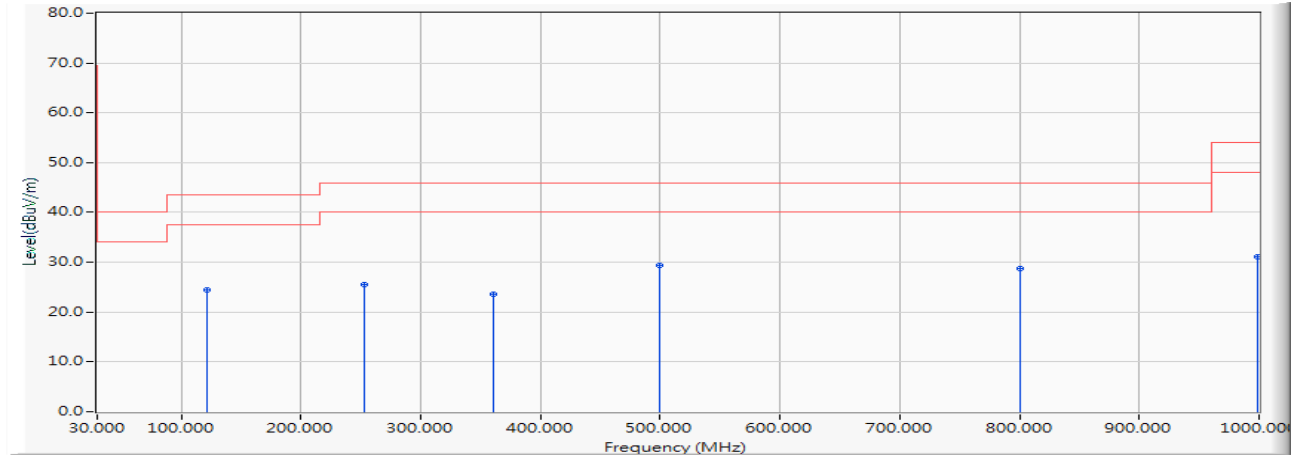


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	122.150	-13.206	37.638	24.432	-19.068	43.500	QUASIPeAK
2	253.100	-12.042	37.606	25.565	-20.435	46.000	QUASIPeAK
3	360.770	-8.933	32.552	23.619	-22.381	46.000	QUASIPeAK
4	* 499.480	-5.961	35.329	29.368	-16.632	46.000	QUASIPeAK
5	801.150	-1.639	30.397	28.758	-17.242	46.000	QUASIPeAK
6	999.030	0.994	30.036	31.030	-22.970	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5220MHz)

Vertical

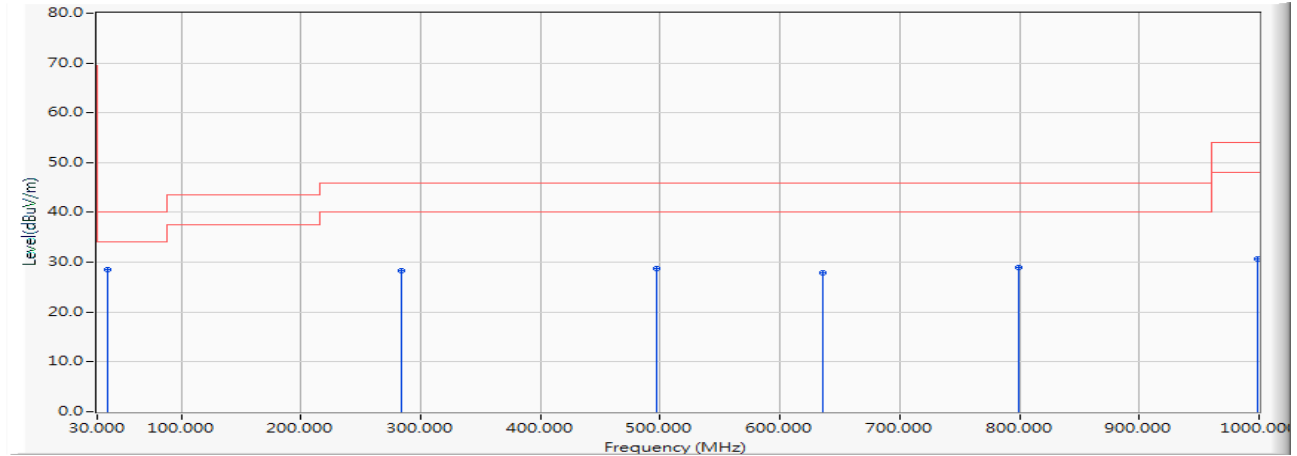


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	38.730	-11.305	39.756	28.451	-11.549	40.000	QUASIPeAK
2		284.140	-10.797	39.050	28.253	-17.747	46.000	QUASIPeAK
3		497.540	-5.993	34.804	28.811	-17.189	46.000	QUASIPeAK
4		636.250	-3.781	31.682	27.901	-18.099	46.000	QUASIPeAK
5		799.210	-1.664	30.541	28.877	-17.123	46.000	QUASIPeAK
6		999.030	0.994	29.717	30.711	-23.289	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5300MHz)

Horizontal

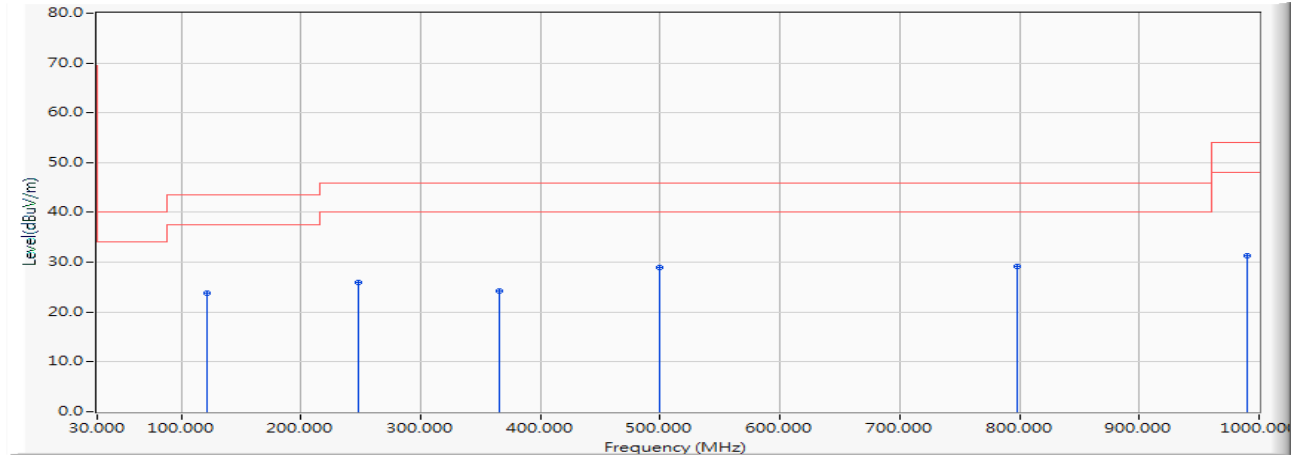


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		122.150	-13.206	37.111	23.905	-19.595	43.500	QUASIPeAK
2		248.250	-12.104	38.126	26.022	-19.978	46.000	QUASIPeAK
3		365.620	-8.823	33.089	24.266	-21.734	46.000	QUASIPeAK
4		499.480	-5.961	34.981	29.020	-16.980	46.000	QUASIPeAK
5	*	798.240	-1.672	30.947	29.275	-16.725	46.000	QUASIPeAK
6		990.300	0.881	30.401	31.282	-22.718	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5300MHz)

Vertical

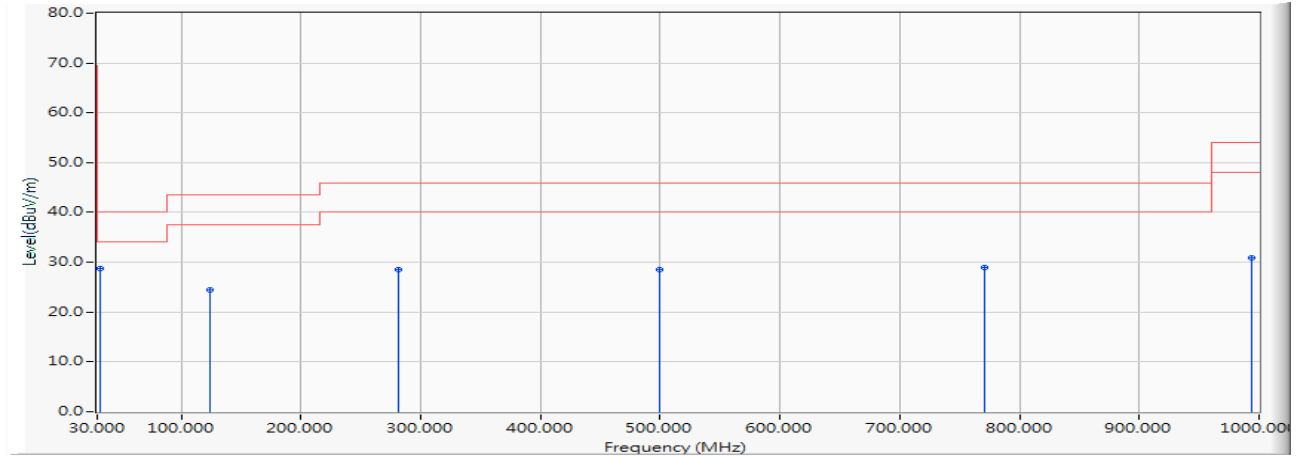


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.774	28.771	-11.229	40.000	QUASIPeAK
2		124.090	-13.001	37.484	24.482	-19.018	43.500	QUASIPeAK
3		281.230	-10.862	39.413	28.551	-17.449	46.000	QUASIPeAK
4		499.480	-5.961	34.486	28.525	-17.475	46.000	QUASIPeAK
5		771.080	-1.875	30.854	28.979	-17.021	46.000	QUASIPeAK
6		993.210	0.919	30.003	30.922	-23.078	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5580MHz)

Horizontal

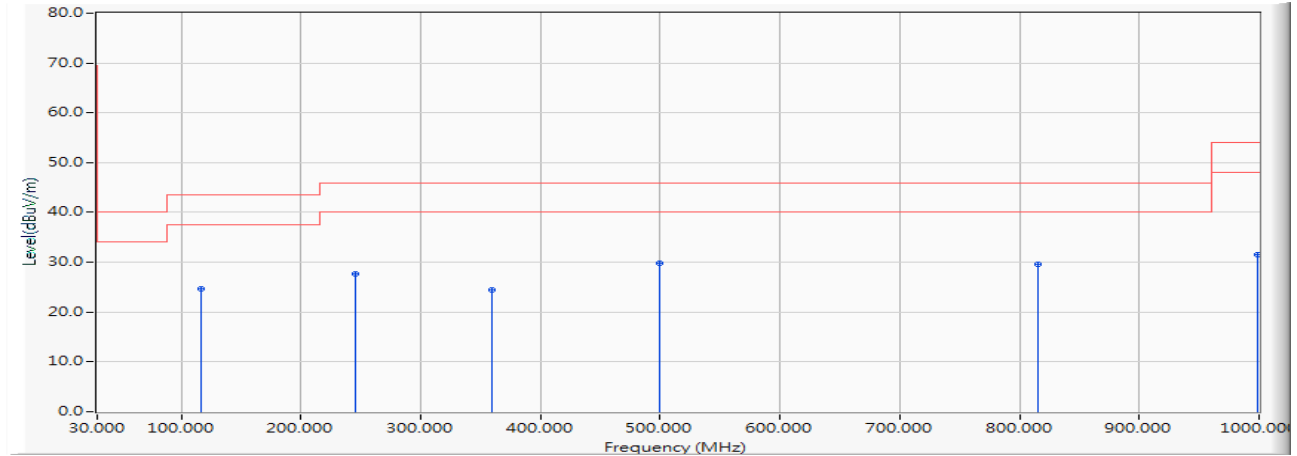


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	116.330	-13.783	38.433	24.650	-18.850	43.500	QUASIPEAK
2	245.340	-12.143	39.783	27.640	-18.360	46.000	QUASIPEAK
3	359.800	-8.955	33.440	24.485	-21.515	46.000	QUASIPEAK
4	* 499.480	-5.961	35.816	29.855	-16.145	46.000	QUASIPEAK
5	815.700	-1.411	30.969	29.557	-16.443	46.000	QUASIPEAK
6	999.030	0.994	30.497	31.491	-22.509	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5580MHz)

Vertical

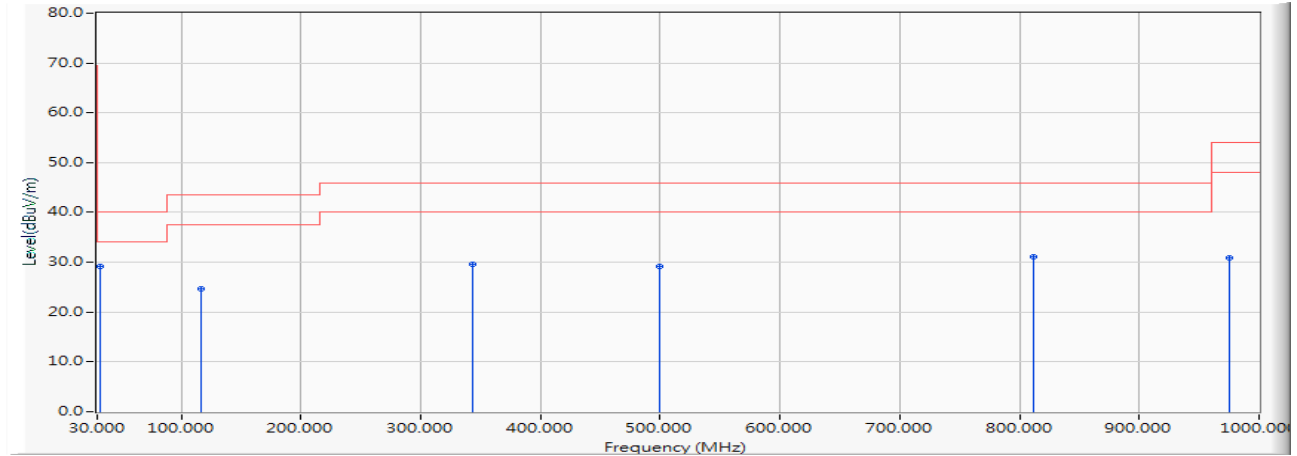


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	41.076	29.073	-10.927	40.000	QUASIPEAK
2		116.330	-13.783	38.407	24.624	-18.876	43.500	QUASIPEAK
3		343.310	-9.335	38.980	29.645	-16.355	46.000	QUASIPEAK
4		499.480	-5.961	35.113	29.152	-16.848	46.000	QUASIPEAK
5		811.820	-1.473	32.561	31.088	-14.912	46.000	QUASIPEAK
6		974.780	0.678	30.128	30.806	-23.194	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5720MHz)

Horizontal

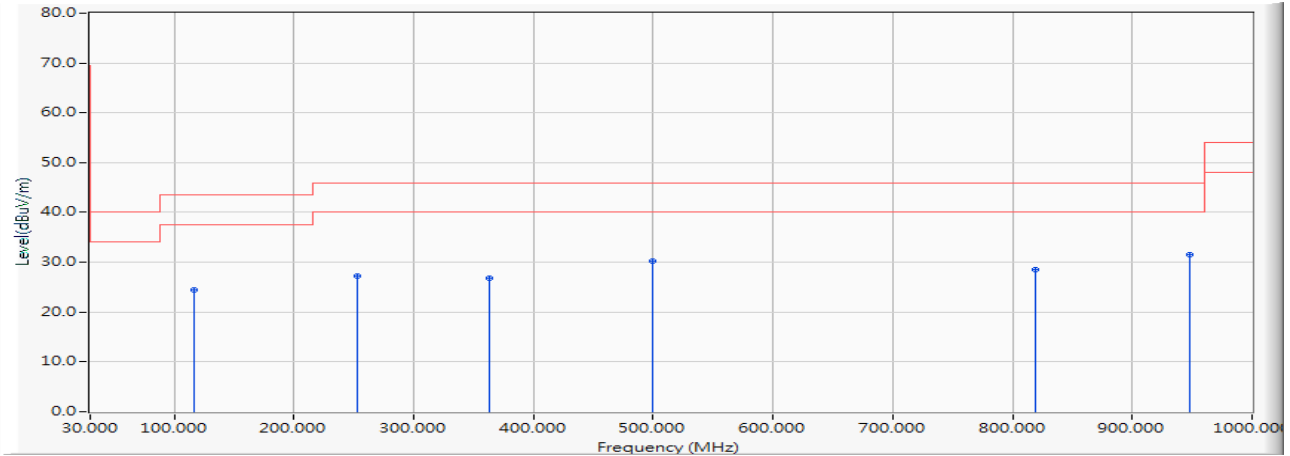


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	116.330	-13.783	38.134	24.351	-19.149	43.500	QUASIPeAK
2	253.100	-12.042	39.194	27.153	-18.847	46.000	QUASIPeAK
3	363.680	-8.868	35.689	26.821	-19.179	46.000	QUASIPeAK
4	499.480	-5.961	36.165	30.204	-15.796	46.000	QUASIPeAK
5	818.610	-1.366	29.901	28.535	-17.465	46.000	QUASIPeAK
6	* 947.620	0.322	31.199	31.521	-14.479	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5720MHz)

Vertical

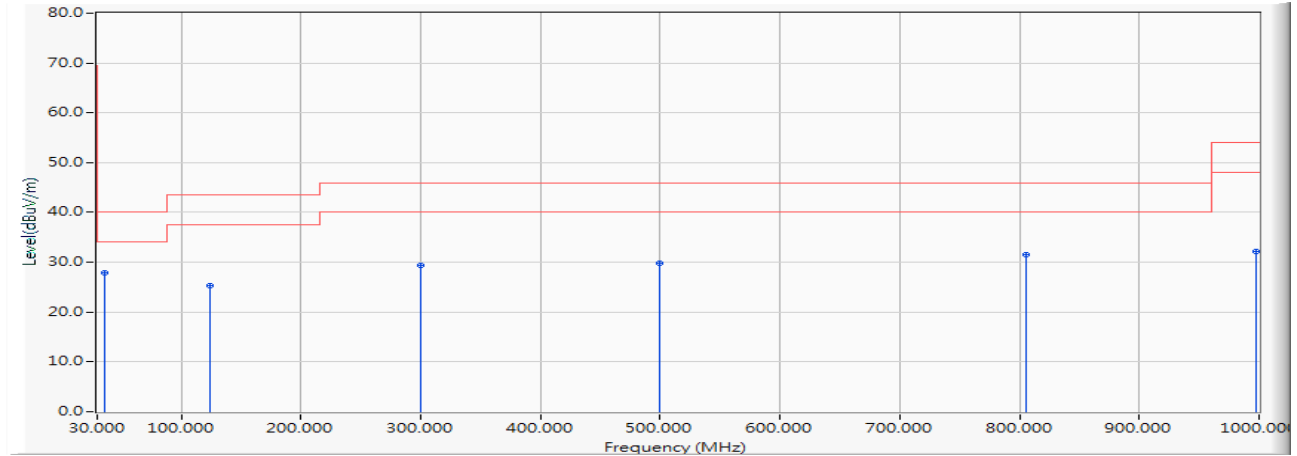


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	35.820	-11.717	39.561	27.845	-12.155	40.000	QUASIPEAK
2		124.090	-13.001	38.300	25.298	-18.202	43.500	QUASIPEAK
3		299.660	-10.351	39.747	29.396	-16.604	46.000	QUASIPEAK
4		499.480	-5.961	35.817	29.856	-16.144	46.000	QUASIPEAK
5		806.000	-1.563	33.021	31.458	-14.542	46.000	QUASIPEAK
6		998.060	0.982	31.229	32.211	-21.789	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5785MHz)

Horizontal

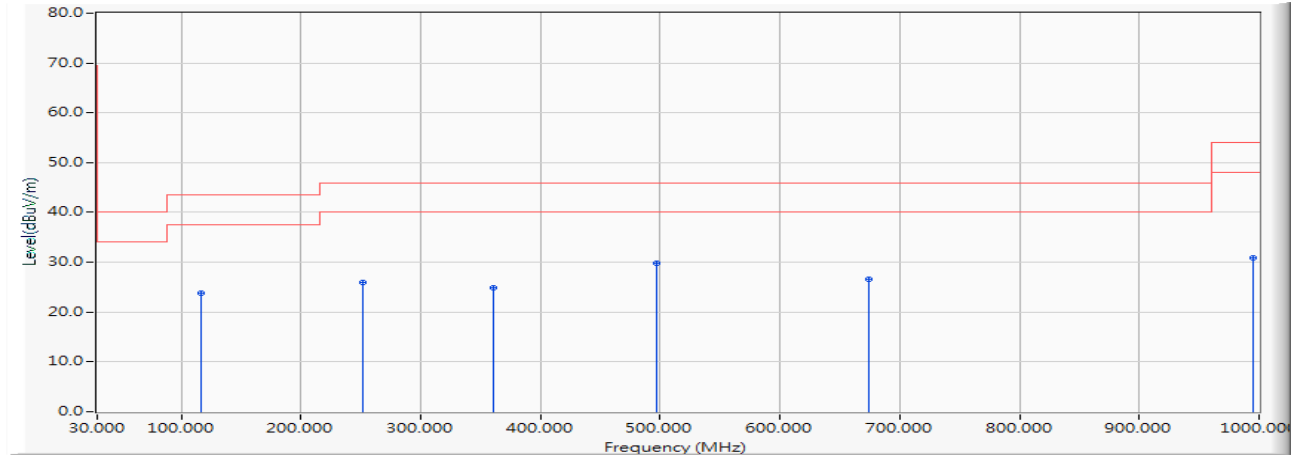


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	116.330	-13.783	37.659	23.876	-19.624	43.500	QUASIPeAK
2	252.130	-12.055	38.018	25.964	-20.036	46.000	QUASIPeAK
3	360.770	-8.933	33.899	24.966	-21.034	46.000	QUASIPeAK
4	* 497.540	-5.993	35.769	29.776	-16.224	46.000	QUASIPeAK
5	674.080	-3.357	29.992	26.635	-19.365	46.000	QUASIPeAK
6	995.150	0.944	29.927	30.871	-23.129	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5785MHz)

Vertical

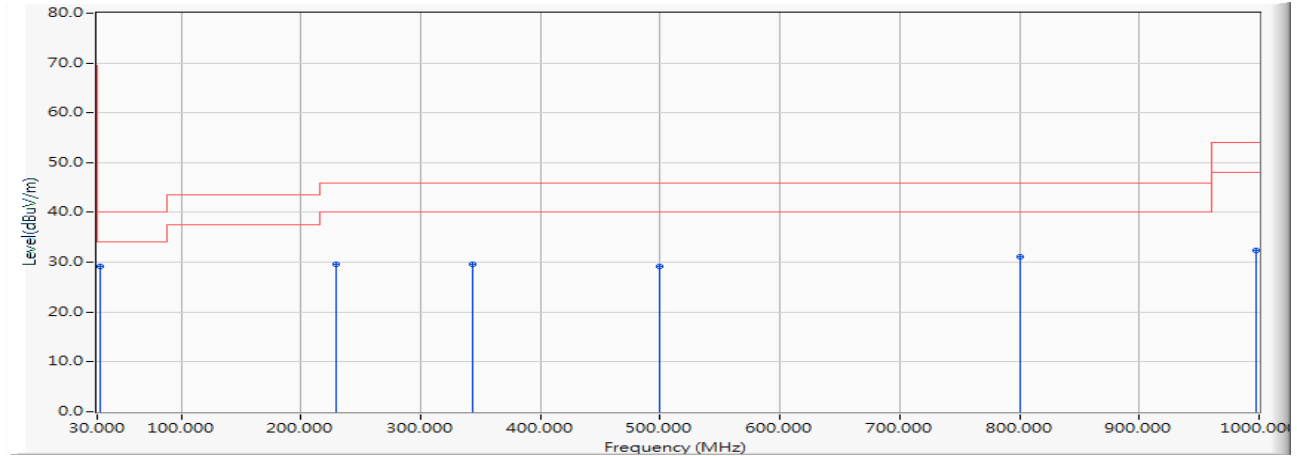


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	41.076	29.073	-10.927	40.000	QUASIPEAK
2		228.850	-12.978	42.497	29.519	-16.481	46.000	QUASIPEAK
3		343.310	-9.335	38.980	29.645	-16.355	46.000	QUASIPEAK
4		499.480	-5.961	35.113	29.152	-16.848	46.000	QUASIPEAK
5		800.180	-1.654	32.731	31.077	-14.923	46.000	QUASIPEAK
6		998.060	0.982	31.359	32.341	-21.659	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5230MHz)

Horizontal

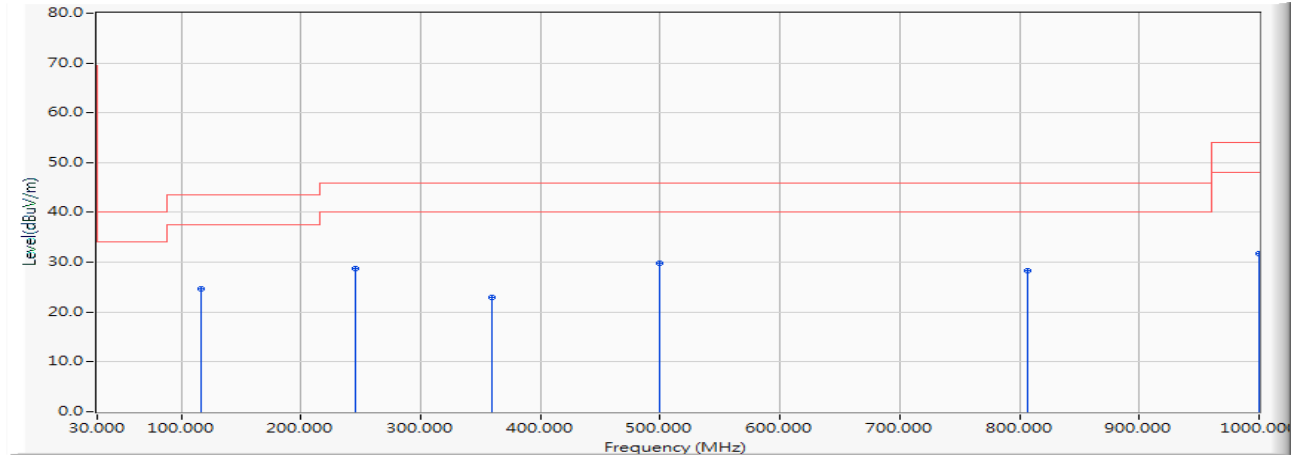


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	116.330	-13.783	38.351	24.568	-18.932	43.500	QUASIPEAK
2	245.340	-12.143	40.862	28.719	-17.281	46.000	QUASIPEAK
3	359.800	-8.955	31.820	22.865	-23.135	46.000	QUASIPEAK
4	* 499.480	-5.961	35.846	29.885	-16.115	46.000	QUASIPEAK
5	806.970	-1.548	29.923	28.375	-17.625	46.000	QUASIPEAK
6	1000.000	1.007	30.766	31.773	-22.227	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5230MHz)

Vertical

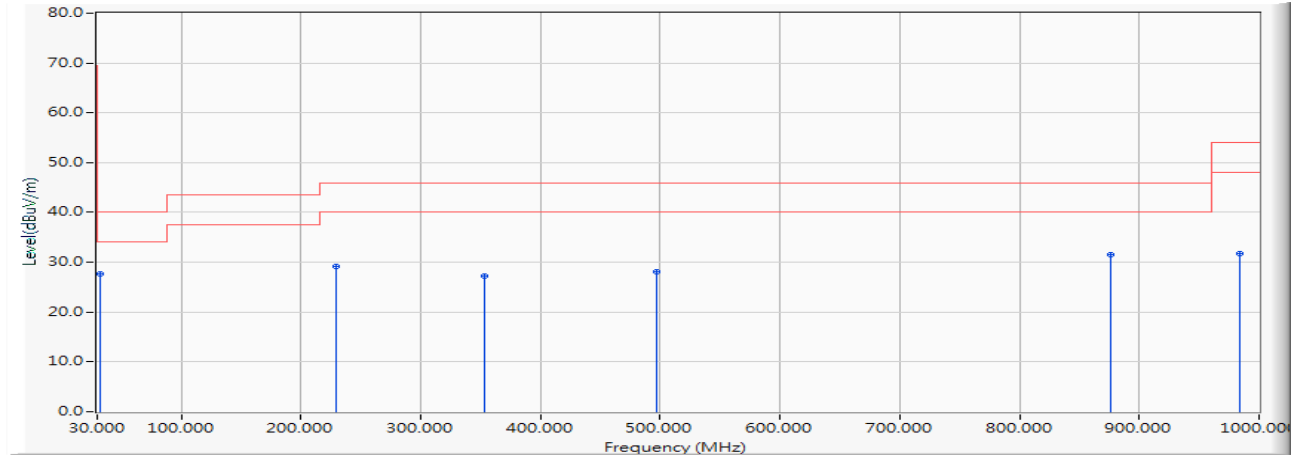


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	39.618	27.615	-12.385	40.000	QUASIPeAK
2		228.850	-12.978	42.072	29.094	-16.906	46.000	QUASIPeAK
3		353.010	-9.110	36.380	27.270	-18.730	46.000	QUASIPeAK
4		497.540	-5.993	34.026	28.033	-17.967	46.000	QUASIPeAK
5		875.840	-0.527	32.037	31.510	-14.490	46.000	QUASIPeAK
6		984.480	0.805	31.034	31.839	-22.161	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5310MHz)

Horizontal

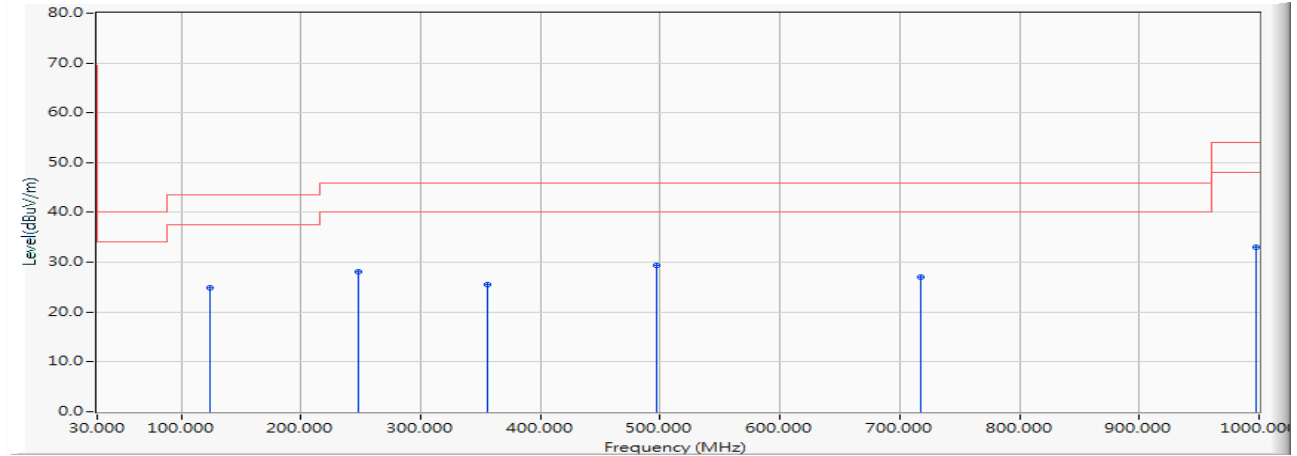


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	124.090	-13.001	37.782	24.780	-18.720	43.500	QUASIPeAK
2	248.250	-12.104	40.151	28.047	-17.953	46.000	QUASIPeAK
3	355.920	-9.044	34.563	25.519	-20.481	46.000	QUASIPeAK
4	* 497.540	-5.993	35.358	29.365	-16.635	46.000	QUASIPeAK
5	717.730	-2.649	29.670	27.021	-18.979	46.000	QUASIPeAK
6	998.060	0.982	32.106	33.088	-20.912	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5310MHz)

Vertical

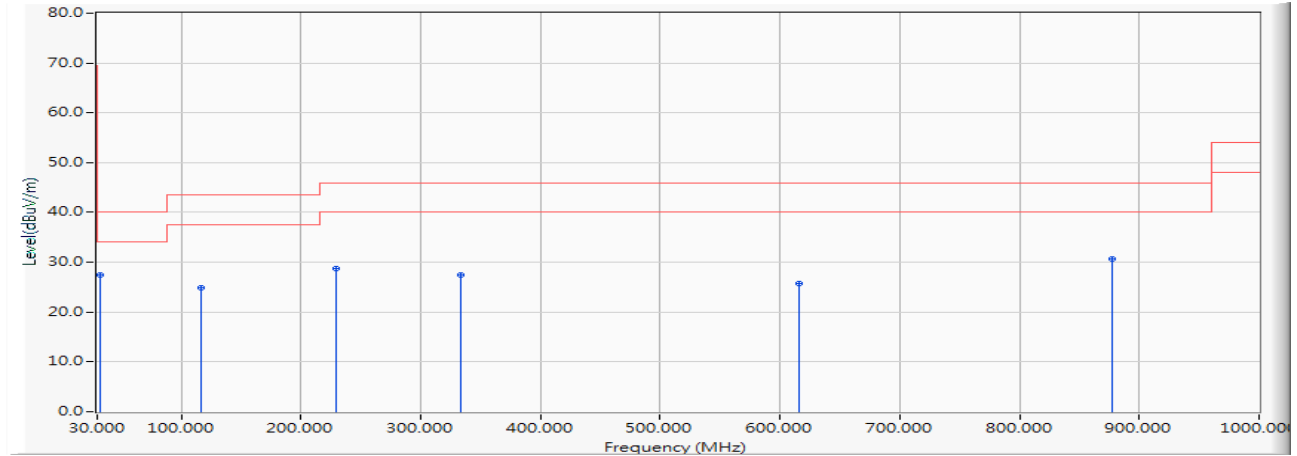


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	39.409	27.406	-12.594	40.000	QUASIPeAK
2		116.330	-13.783	38.713	24.930	-18.570	43.500	QUASIPeAK
3		228.850	-12.978	41.805	28.827	-17.173	46.000	QUASIPeAK
4		333.610	-9.560	37.120	27.560	-18.440	46.000	QUASIPeAK
5		615.880	-3.907	29.549	25.641	-20.359	46.000	QUASIPeAK
6		877.780	-0.501	31.121	30.620	-15.380	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5550MHz)

Horizontal

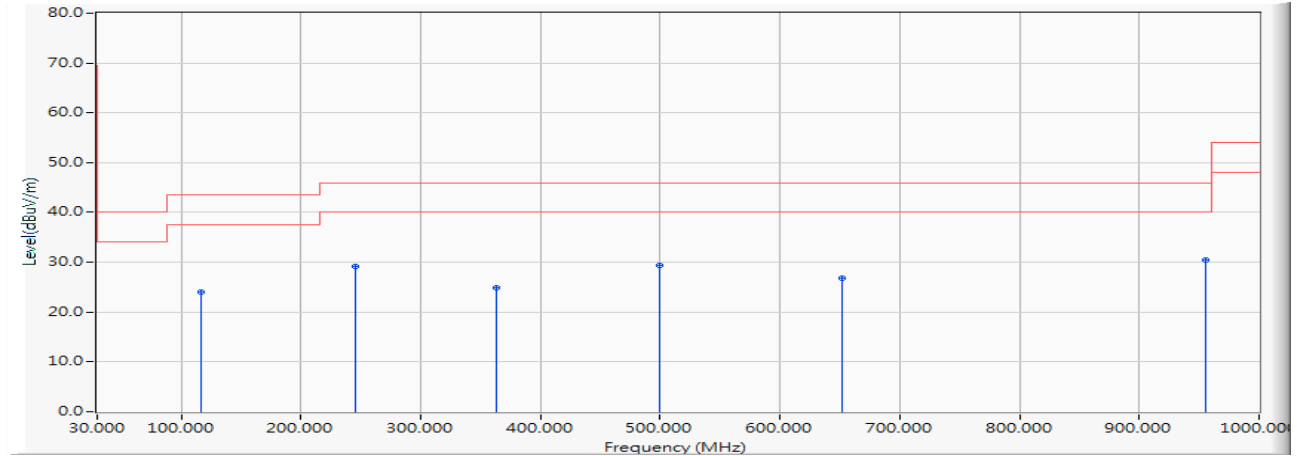


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		116.330	-13.783	37.779	23.996	-19.504	43.500	QUASIPeAK
2		245.340	-12.143	41.355	29.212	-16.788	46.000	QUASIPeAK
3		362.710	-8.889	33.751	24.862	-21.138	46.000	QUASIPeAK
4		499.480	-5.961	35.318	29.357	-16.643	46.000	QUASIPeAK
5		651.770	-3.672	30.535	26.863	-19.137	46.000	QUASIPeAK
6	*	955.380	0.422	30.082	30.504	-15.496	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5550MHz)

Vertical

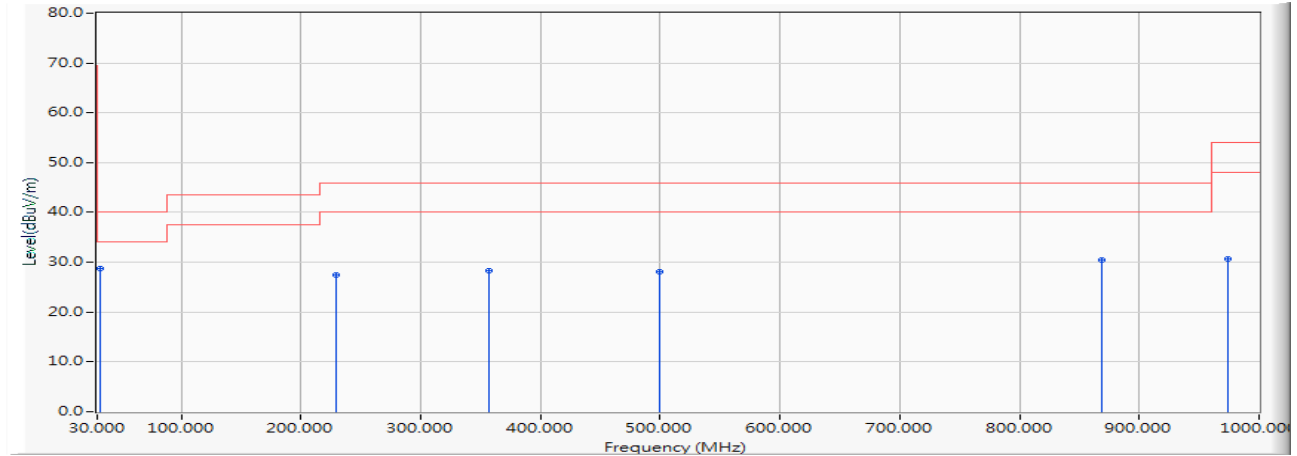


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.714	28.711	-11.289	40.000	QUASIPeAK
2		228.850	-12.978	40.502	27.524	-18.476	46.000	QUASIPeAK
3		356.890	-9.021	37.370	28.349	-17.651	46.000	QUASIPeAK
4		499.480	-5.961	34.120	28.159	-17.841	46.000	QUASIPeAK
5		868.080	-0.632	31.023	30.391	-15.609	46.000	QUASIPeAK
6		973.810	0.665	30.036	30.701	-23.299	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5710MHz)

Horizontal

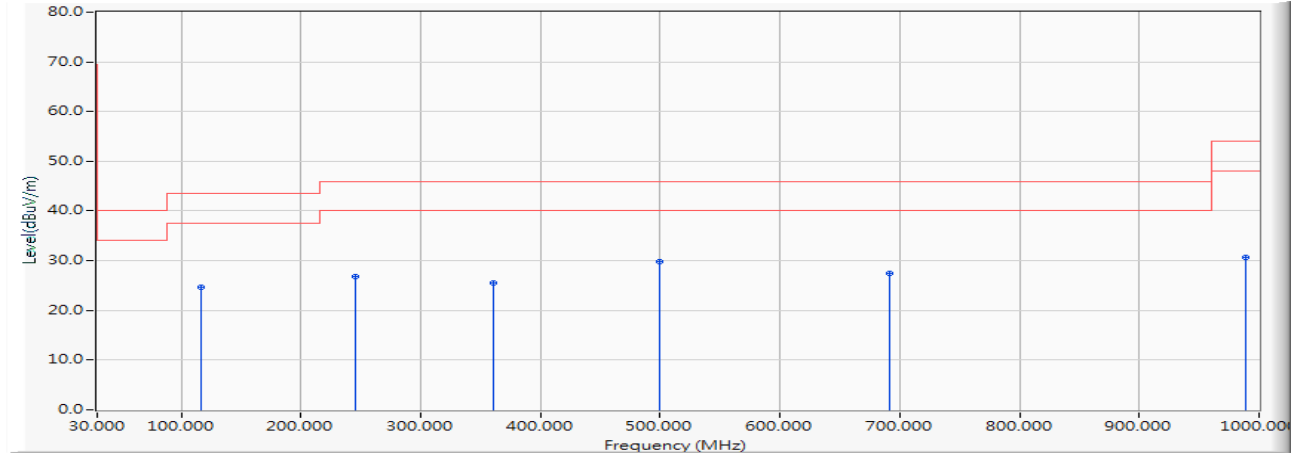


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		116.330	-13.783	38.467	24.684	-18.816	43.500	QUASIPeAK
2		245.340	-12.143	38.956	26.813	-19.187	46.000	QUASIPeAK
3		360.770	-8.933	34.490	25.557	-20.443	46.000	QUASIPeAK
4	*	499.480	-5.961	35.781	29.820	-16.180	46.000	QUASIPeAK
5		691.540	-3.110	30.640	27.530	-18.470	46.000	QUASIPeAK
6		989.330	0.868	29.748	30.616	-23.384	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5710MHz)

Vertical

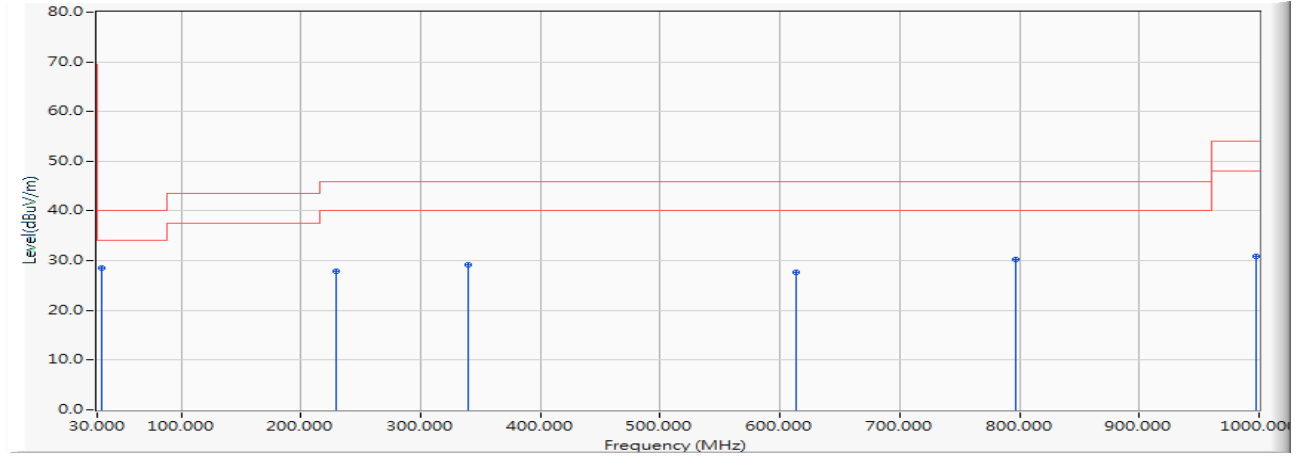


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	33.880	-11.925	40.453	28.528	-11.472	40.000	QUASIPeAK
2		228.850	-12.978	40.761	27.783	-18.217	46.000	QUASIPeAK
3		339.430	-9.426	38.603	29.178	-16.822	46.000	QUASIPeAK
4		613.940	-3.919	31.538	27.619	-18.381	46.000	QUASIPeAK
5		796.300	-1.686	31.965	30.279	-15.721	46.000	QUASIPeAK
6		998.060	0.982	29.887	30.869	-23.131	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5795MHz)

Horizontal

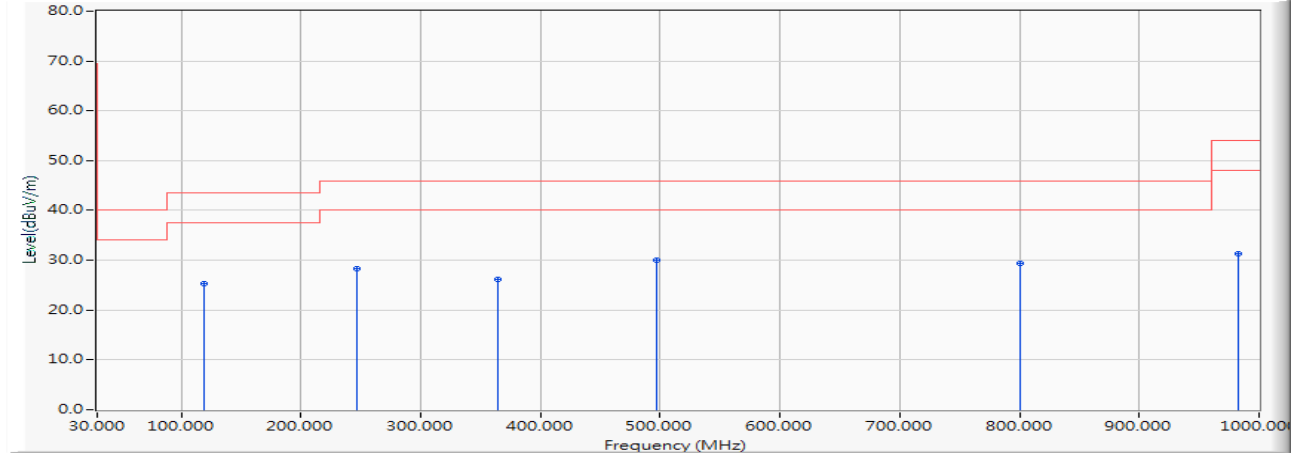


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		119.240	-13.503	38.823	25.320	-18.180	43.500	QUASIPeAK
2		246.310	-12.130	40.548	28.418	-17.582	46.000	QUASIPeAK
3		364.650	-8.846	35.099	26.253	-19.747	46.000	QUASIPeAK
4	*	497.540	-5.993	35.986	29.993	-16.007	46.000	QUASIPeAK
5		800.180	-1.654	31.000	29.346	-16.654	46.000	QUASIPeAK
6		982.540	0.779	30.631	31.410	-22.590	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5795MHz)

Vertical

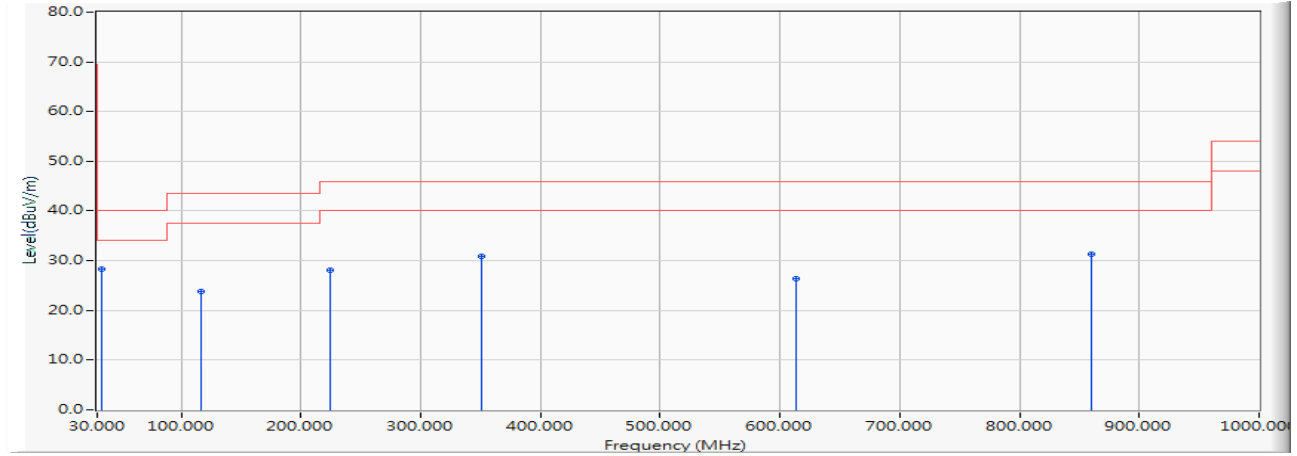


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	33.880	-11.925	40.178	28.253	-11.747	40.000	QUASIPeAK
2		116.330	-13.783	37.638	23.855	-19.645	43.500	QUASIPeAK
3		224.000	-13.137	41.265	28.128	-17.872	46.000	QUASIPeAK
4		351.070	-9.154	39.935	30.781	-15.219	46.000	QUASIPeAK
5		613.940	-3.919	30.394	26.475	-19.525	46.000	QUASIPeAK
6		860.320	-0.736	32.127	31.391	-14.609	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5210MHz)

Horizontal

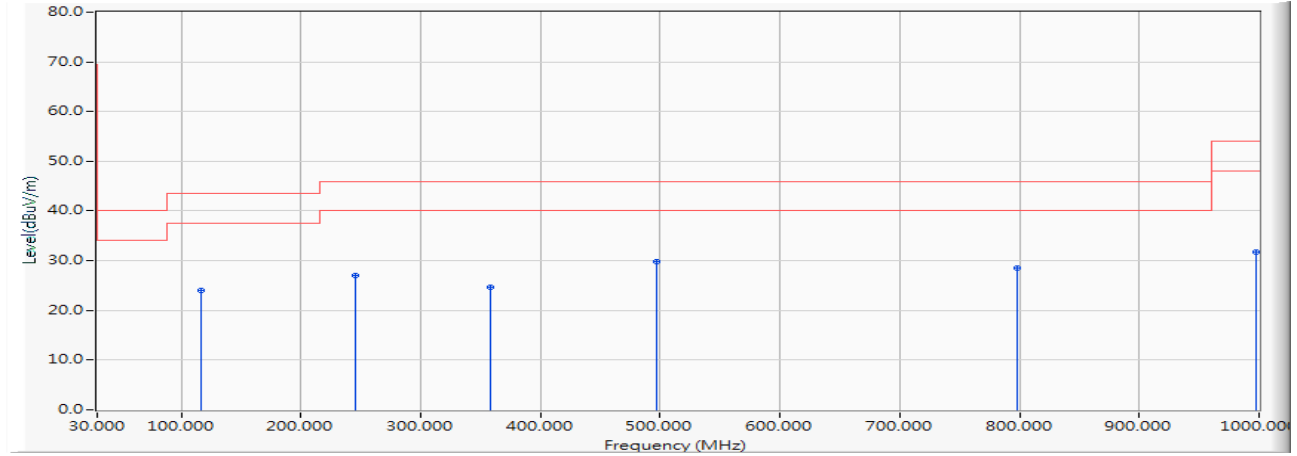


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		116.330	-13.783	37.766	23.983	-19.517	43.500	QUASIPeAK
2		245.340	-12.143	39.119	26.976	-19.024	46.000	QUASIPeAK
3		358.830	-8.977	33.581	24.603	-21.397	46.000	QUASIPeAK
4	*	497.540	-5.993	35.732	29.739	-16.261	46.000	QUASIPeAK
5		798.240	-1.672	30.262	28.590	-17.410	46.000	QUASIPeAK
6		997.090	0.969	30.846	31.815	-22.185	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5210MHz)

Vertical

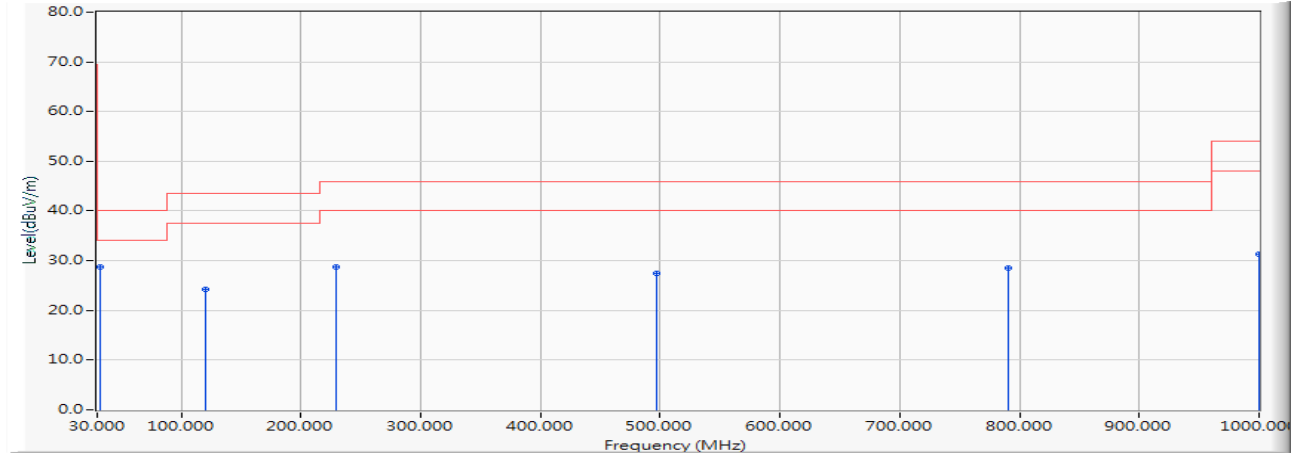


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.692	28.689	-11.311	40.000	QUASIPeAK
2		120.210	-13.409	37.606	24.197	-19.303	43.500	QUASIPeAK
3		228.850	-12.978	41.694	28.716	-17.284	46.000	QUASIPeAK
4		497.540	-5.993	33.501	27.508	-18.492	46.000	QUASIPeAK
5		790.480	-1.730	30.336	28.606	-17.394	46.000	QUASIPeAK
6		1000.000	1.007	30.251	31.258	-22.742	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5290MHz)

Horizontal

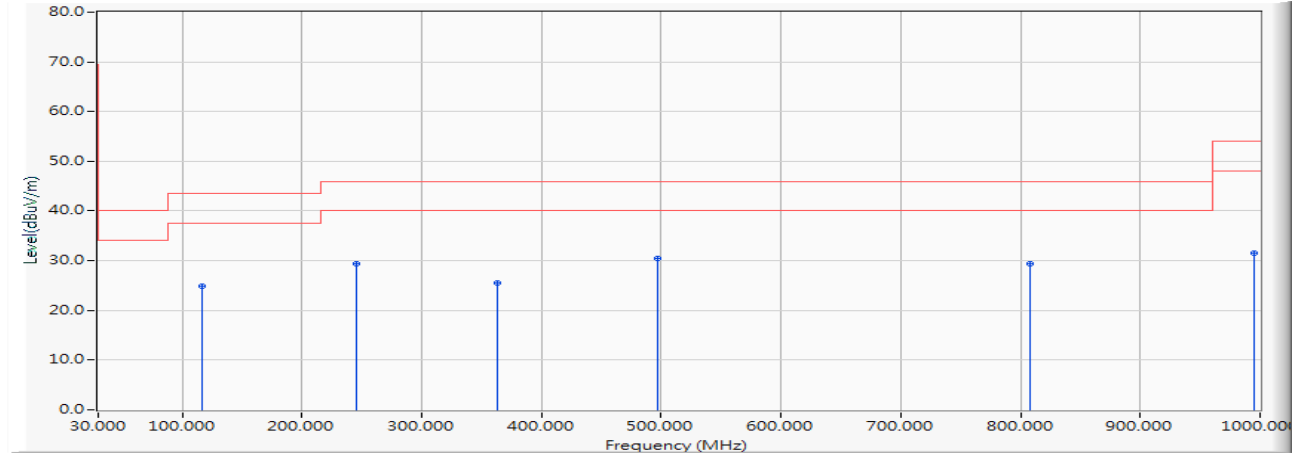


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	116.330	-13.783	38.708	24.925	-18.575	43.500	QUASIPeAK
2	245.340	-12.143	41.586	29.443	-16.557	46.000	QUASIPeAK
3	362.710	-8.889	34.469	25.580	-20.420	46.000	QUASIPeAK
4	* 497.540	-5.993	36.393	30.400	-15.600	46.000	QUASIPeAK
5	807.940	-1.533	30.857	29.324	-16.676	46.000	QUASIPeAK
6	995.150	0.944	30.582	31.526	-22.474	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5290MHz)

Vertical

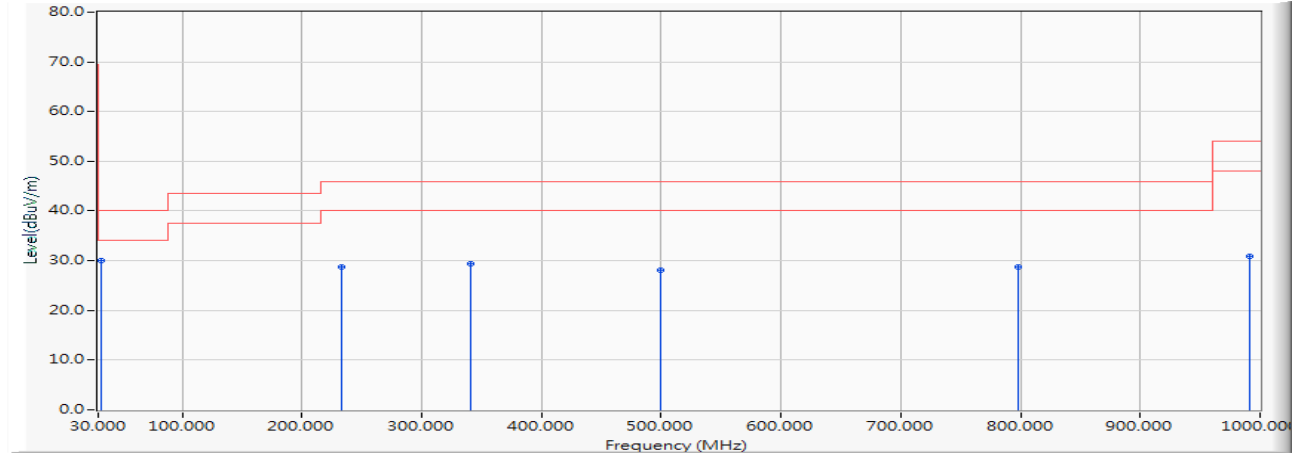


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	42.087	30.084	-9.916	40.000	QUASIPeAK
2		232.730	-12.742	41.450	28.708	-17.292	46.000	QUASIPeAK
3		340.400	-9.402	38.861	29.459	-16.541	46.000	QUASIPeAK
4		499.480	-5.961	34.158	28.197	-17.803	46.000	QUASIPeAK
5		798.240	-1.672	30.503	28.831	-17.169	46.000	QUASIPeAK
6		991.270	0.893	30.061	30.954	-23.046	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5530MHz)

Horizontal

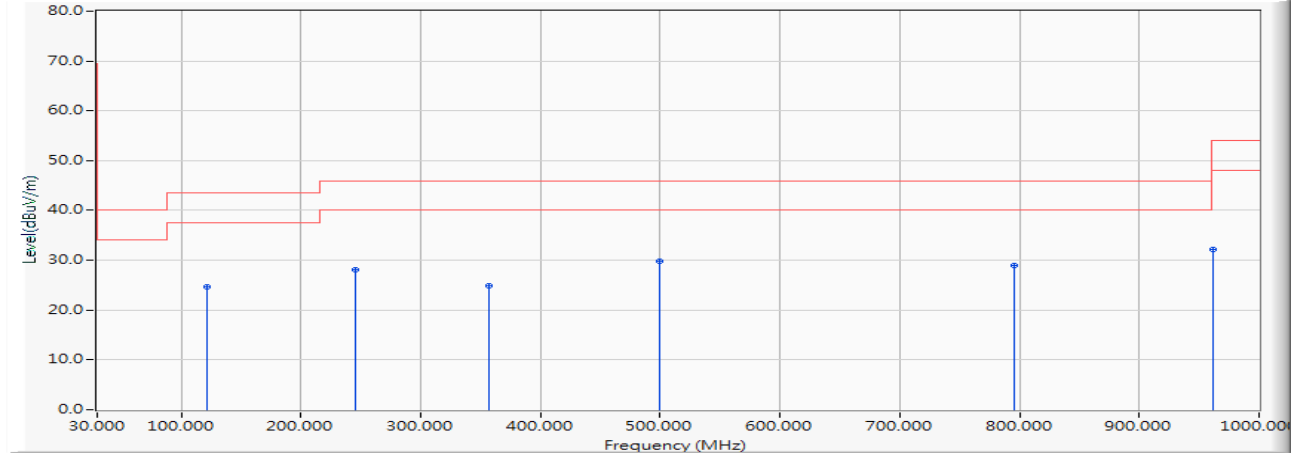


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	122.150	-13.206	37.845	24.639	-18.861	43.500	QUASIPeAK
2	245.340	-12.143	40.262	28.119	-17.881	46.000	QUASIPeAK
3	356.890	-9.021	33.895	24.874	-21.126	46.000	QUASIPeAK
4	* 499.480	-5.961	35.822	29.861	-16.139	46.000	QUASIPeAK
5	795.330	-1.693	30.698	29.005	-16.995	46.000	QUASIPeAK
6	961.200	0.498	31.687	32.185	-21.815	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5530MHz)

Vertical

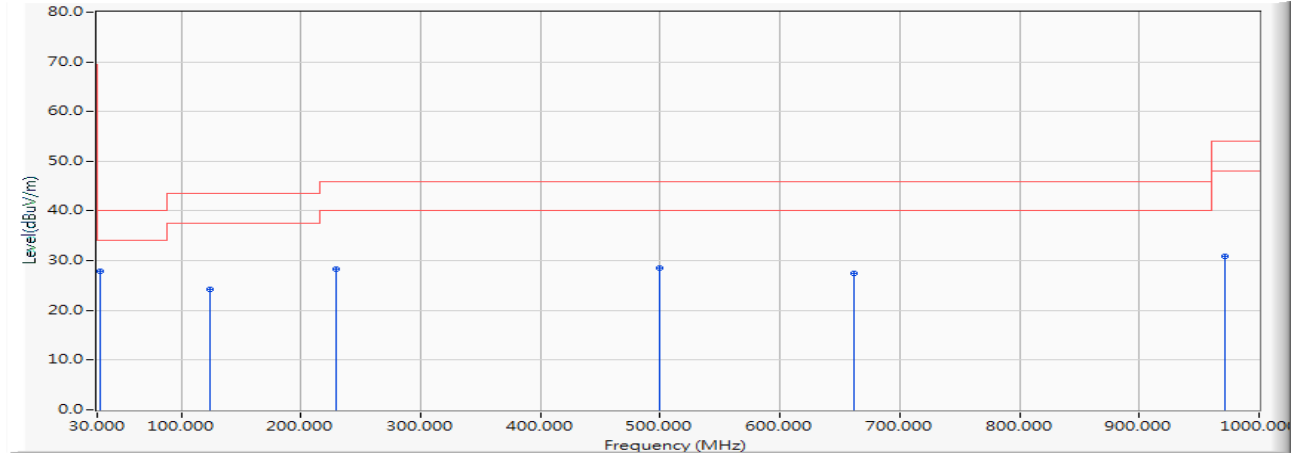


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	39.925	27.922	-12.078	40.000	QUASIPeAK
2		124.090	-13.001	37.315	24.313	-19.187	43.500	QUASIPeAK
3		228.850	-12.978	41.357	28.379	-17.621	46.000	QUASIPeAK
4		499.480	-5.961	34.515	28.554	-17.446	46.000	QUASIPeAK
5		661.470	-3.535	31.041	27.505	-18.495	46.000	QUASIPeAK
6		970.900	0.627	30.273	30.900	-23.100	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5775MHz)

Horizontal

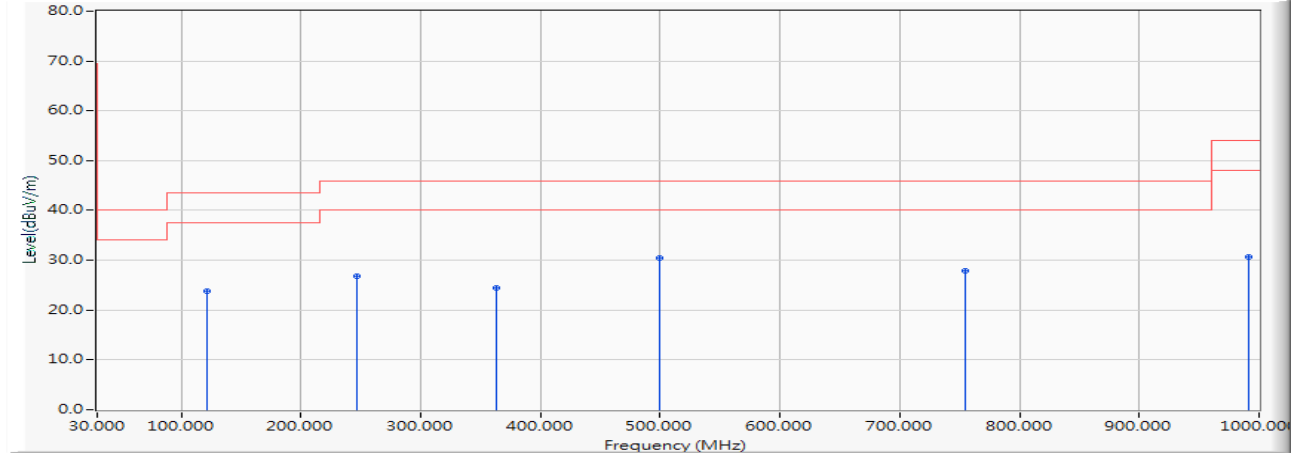


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	122.150	-13.206	36.945	23.739	-19.761	43.500	QUASIPEAK
2	247.280	-12.117	38.909	26.791	-19.209	46.000	QUASIPEAK
3	362.710	-8.889	33.356	24.467	-21.533	46.000	QUASIPEAK
4	* 499.480	-5.961	36.346	30.385	-15.615	46.000	QUASIPEAK
5	754.590	-1.991	29.975	27.985	-18.015	46.000	QUASIPEAK
6	991.270	0.893	29.752	30.645	-23.355	54.000	QUASIPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5775MHz)

Vertical

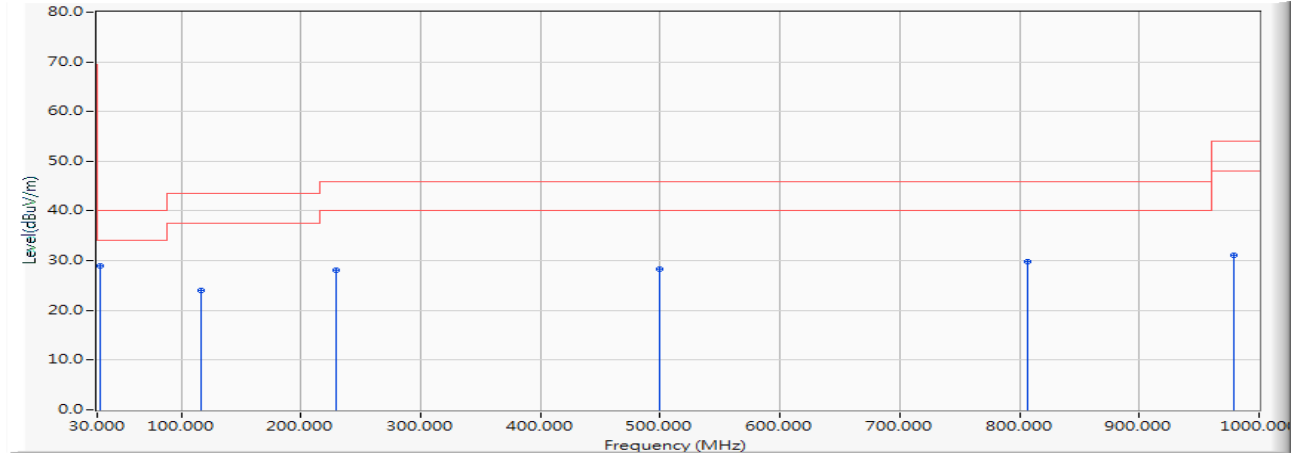


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	41.020	29.017	-10.983	40.000	QUASIPeAK
2		116.330	-13.783	37.743	23.960	-19.540	43.500	QUASIPeAK
3		228.850	-12.978	40.988	28.010	-17.990	46.000	QUASIPeAK
4		499.480	-5.961	34.319	28.358	-17.642	46.000	QUASIPeAK
5		806.970	-1.548	31.359	29.811	-16.189	46.000	QUASIPeAK
6		978.660	0.729	30.411	31.140	-22.860	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps) (5250MHz)

Horizontal

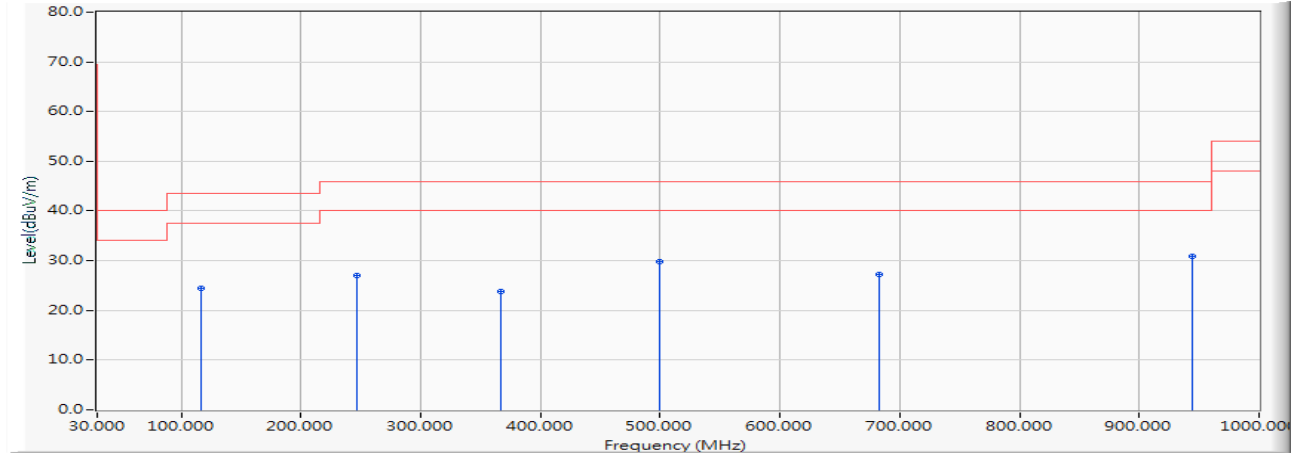


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		116.330	-13.783	38.250	24.467	-19.033	43.500	QUASIPeAK
2		247.280	-12.117	39.193	27.075	-18.925	46.000	QUASIPeAK
3		366.590	-8.801	32.670	23.869	-22.131	46.000	QUASIPeAK
4		499.480	-5.961	35.813	29.852	-16.148	46.000	QUASIPeAK
5		682.810	-3.233	30.451	27.217	-18.783	46.000	QUASIPeAK
6	*	944.710	0.291	30.671	30.961	-15.039	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps) (5250MHz)

Vertical

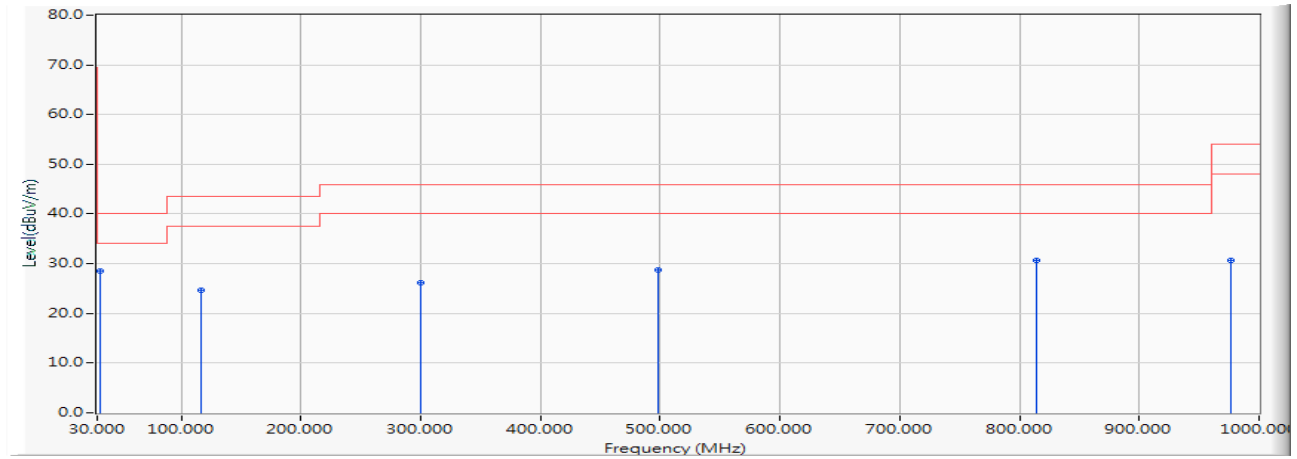


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.584	28.581	-11.419	40.000	QUASIPeAK
2		116.330	-13.783	38.446	24.663	-18.837	43.500	QUASIPeAK
3		299.660	-10.351	36.574	26.223	-19.777	46.000	QUASIPeAK
4		498.510	-5.977	34.788	28.811	-17.189	46.000	QUASIPeAK
5		813.760	-1.441	32.121	30.679	-15.321	46.000	QUASIPeAK
6		976.720	0.704	29.982	30.686	-23.314	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps) (5570MHz)

Horizontal

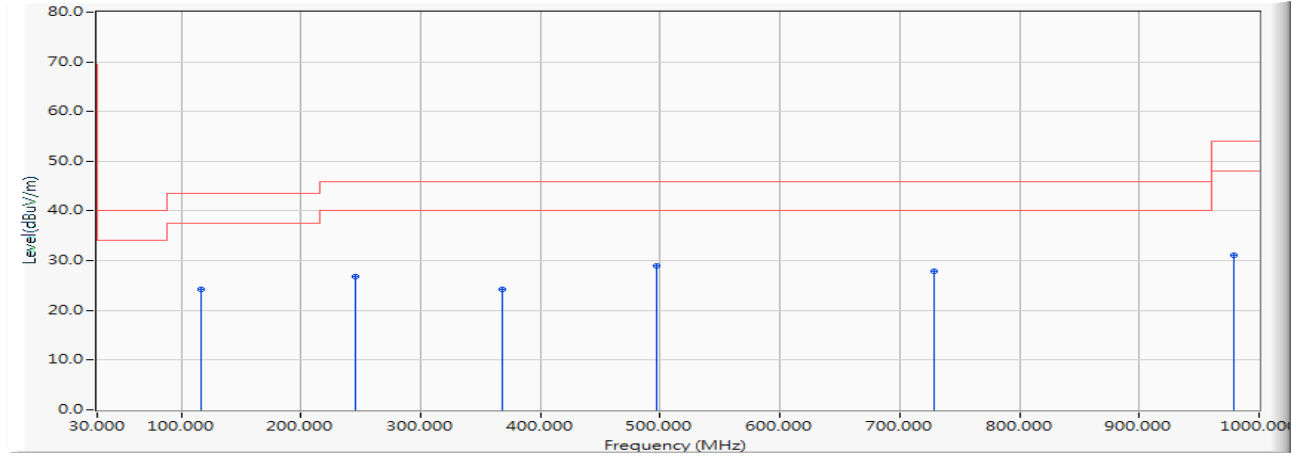


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	116.330	-13.783	37.981	24.198	-19.302	43.500	QUASIPeAK
2	245.340	-12.143	39.000	26.857	-19.143	46.000	QUASIPeAK
3	368.530	-8.757	32.950	24.193	-21.807	46.000	QUASIPeAK
4	* 497.540	-5.993	35.001	29.008	-16.992	46.000	QUASIPeAK
5	728.400	-2.442	30.296	27.854	-18.146	46.000	QUASIPeAK
6	978.660	0.729	30.447	31.176	-22.824	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/06/04
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps) (5570MHz)

Vertical

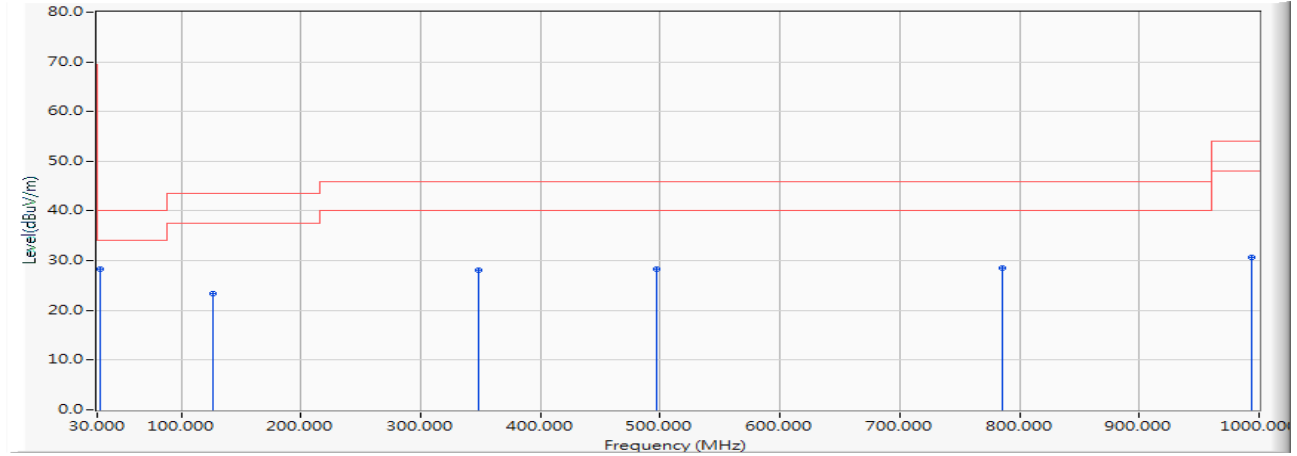


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	32.910	-12.004	40.413	28.410	-11.590	40.000	QUASIPeAK
2		126.030	-12.798	36.076	23.278	-20.222	43.500	QUASIPeAK
3		348.160	-9.222	37.358	28.136	-17.864	46.000	QUASIPeAK
4		497.540	-5.993	34.202	28.209	-17.791	46.000	QUASIPeAK
5		785.630	-1.767	30.212	28.445	-17.555	46.000	QUASIPeAK
6		993.210	0.919	29.848	30.767	-23.233	54.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge

4.1. Test Setup

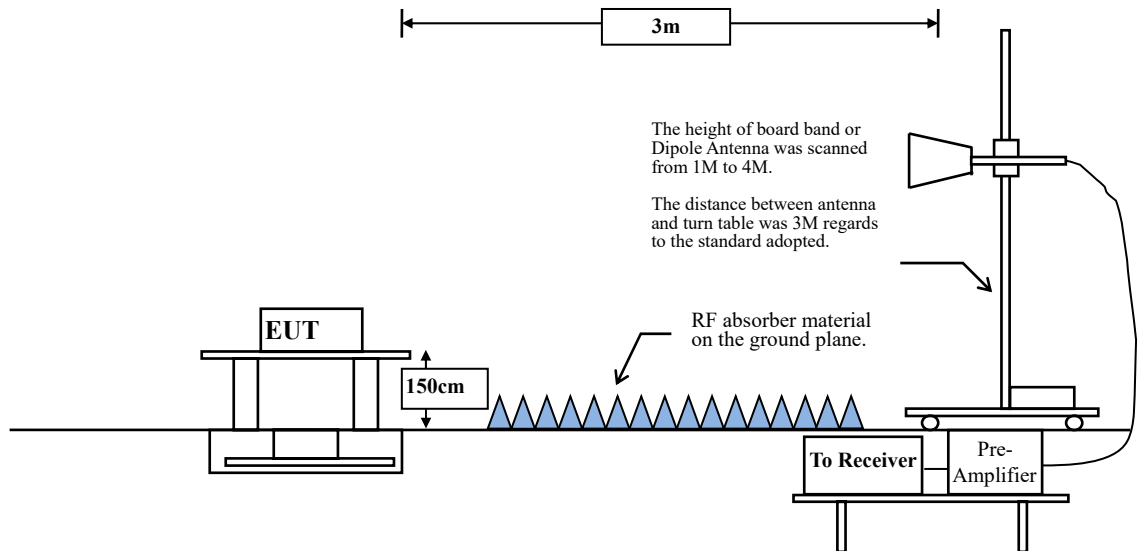

4.2. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dB μ V/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dB μ V) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW \geq 3MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW = 10Hz, when duty cycle \geq 98 %

VBW \geq 1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

SISO A

5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	88.27	2.0725	483	500
802.11n20	98.61	--	--	10
802.11n40	98.09	--	--	10
802.11ac80	97.44	11.0145	91	100
802.11ac160	95.00	5.5072	182	200
802.11ax20	99.13	--	--	10
802.11ax40	98.47	--	--	10
802.11ax80	96.86	8.9420	112	200
802.11ax160	94.82	4.5072	222	300

Note: Duty Cycle Refer to Section 5

SISO B

5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	88.89	2.0870	479	500
802.11n20	98.67	--	--	10
802.11n40	97.77	17.8116	56	100
802.11ac80	97.04	10.9275	92	100
802.11ac160	95.00	5.5072	182	200
802.11ax20	98.84	--	--	10
802.11ax40	98.47	--	--	10
802.11ax80	96.85	8.9130	112	200
802.11ax160	93.37	4.4928	223	300

Note: Duty Cycle Refer to Section 5

MIMO

5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11n20	98.69	--	--	10
802.11n40	97.31	8.9130	112	200
802.11ac80	94.02	5.4638	183	200
802.11ac160	91.47	2.7971	358	500
802.11ax20	98.63	--	--	10
802.11ax40	97.30	9.3913	106	200
802.11ax80	93.35	4.4783	223	300
802.11ax160	88.64	2.2609	442	500

Note: Duty Cycle Refer to Section 5

4.4. Uncertainty


Horizontal polarization : 1-18GHz: ± 3.77 dB

Vertical polarization : 1-18GHz : ± 3.83 dB

4.5. Test Result of Band Edge

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

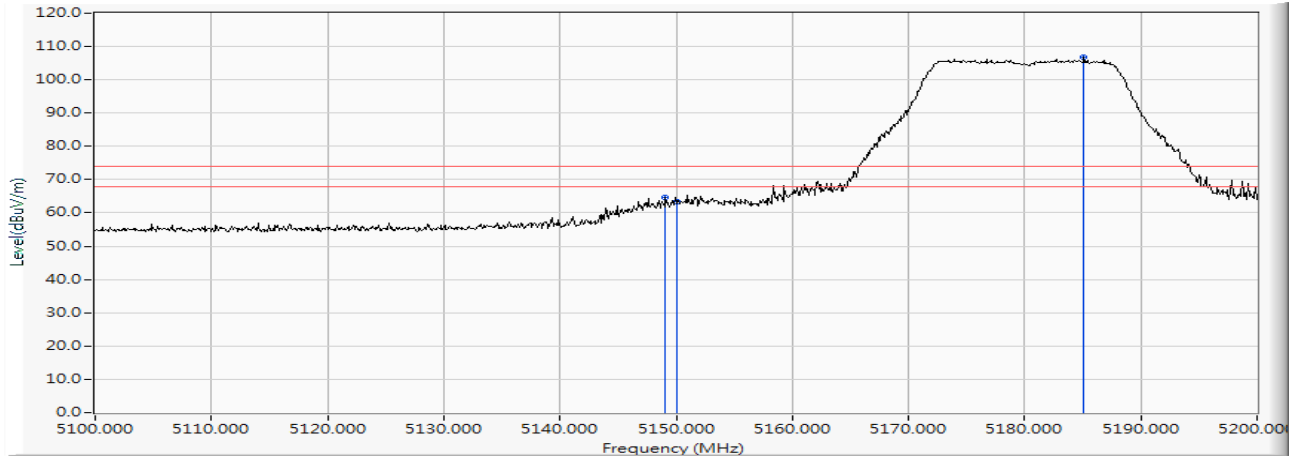


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.100	15.302	49.368	64.670	-9.330	74.000	PEAK
2		5150.000	15.307	47.917	63.224	-10.776	74.000	PEAK
3	*	5185.100	15.415	91.312	106.727	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

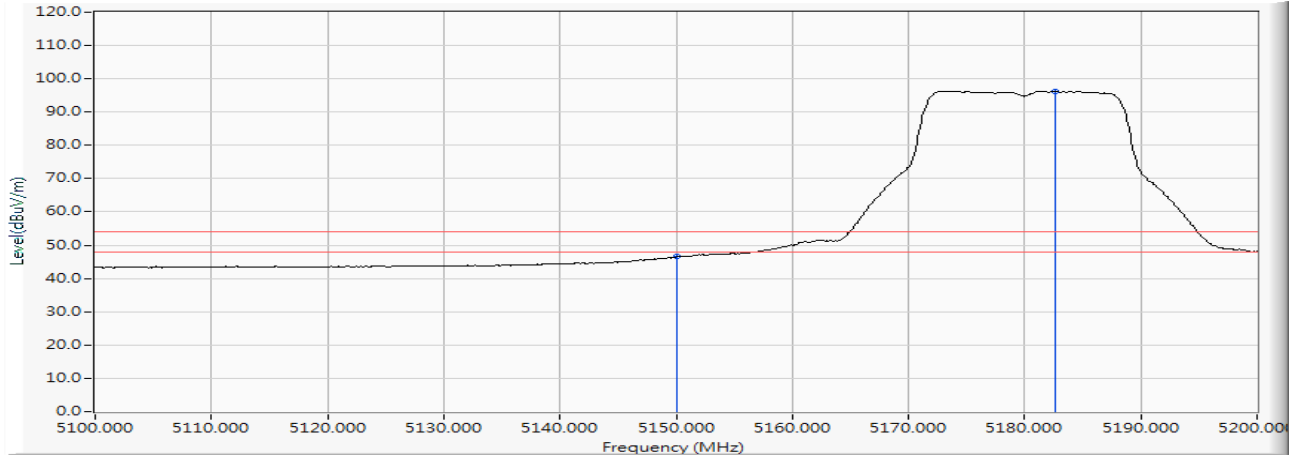


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	31.195	46.502	-7.498	54.000	AVERAGE
2	*	5182.600	15.403	80.896	96.300	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

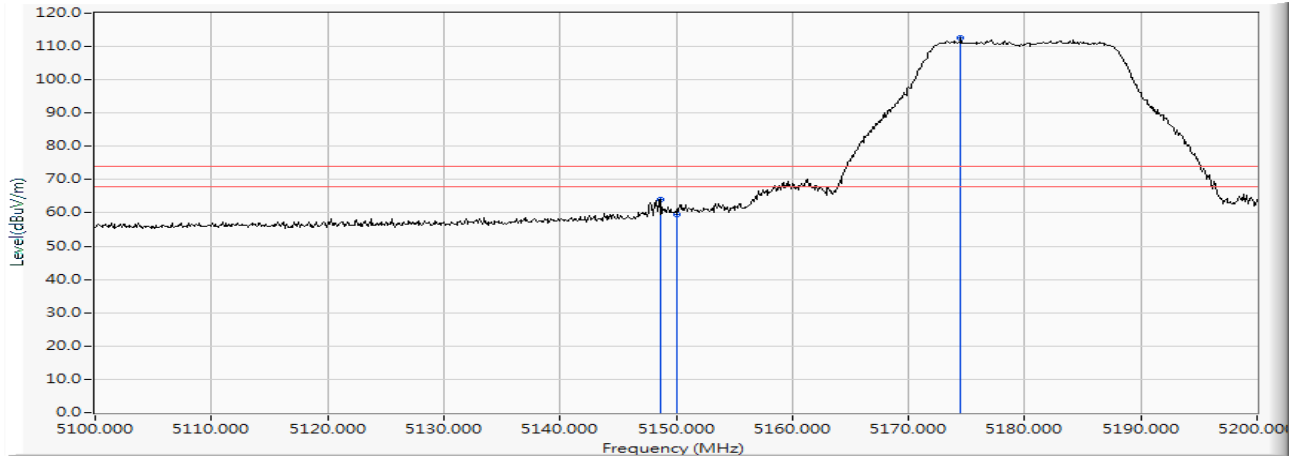


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.700	15.299	48.827	64.127	-9.873	74.000	PEAK
2		5150.000	15.307	44.102	59.409	-14.591	74.000	PEAK
3	*	5174.500	15.368	97.237	112.605	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

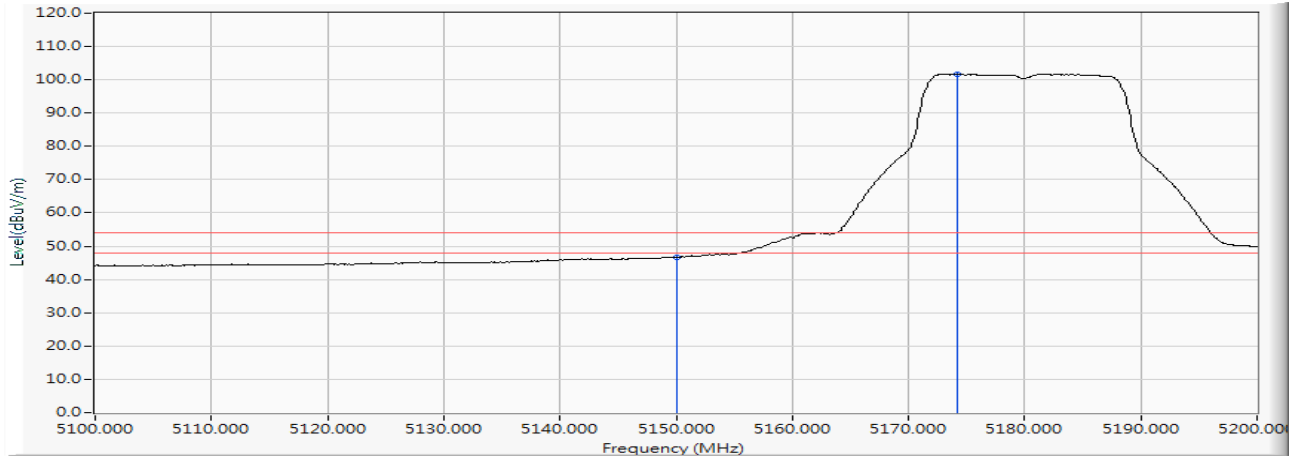


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	31.326	46.633	-7.367	54.000	AVERAGE
2	*	5174.200	15.367	86.377	101.743	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

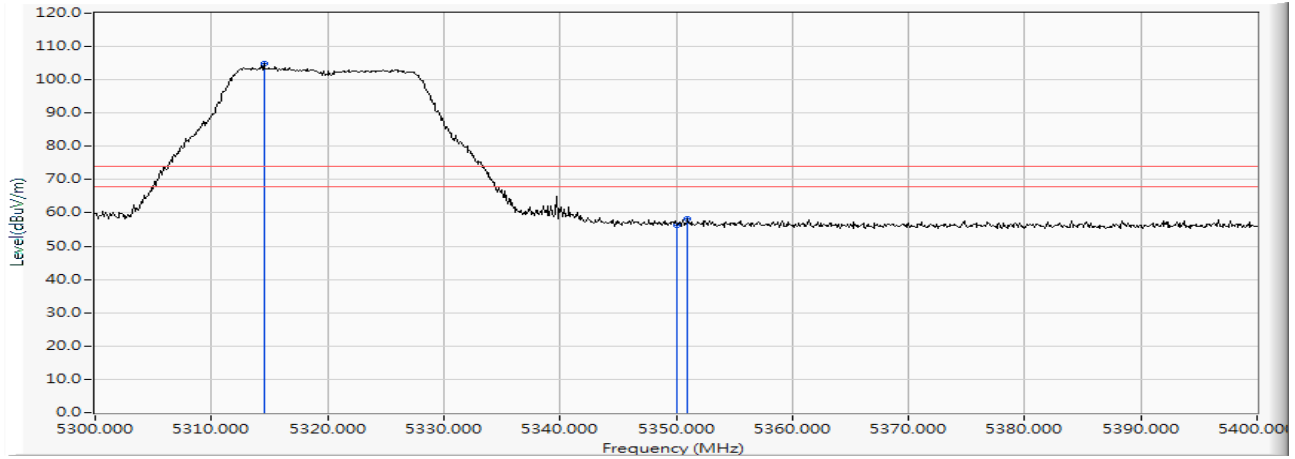


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.500	15.832	89.095	104.927	--	--	PEAK
2		5350.000	15.912	40.285	56.197	-17.803	74.000	PEAK
3		5351.000	15.915	42.446	58.361	-15.639	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

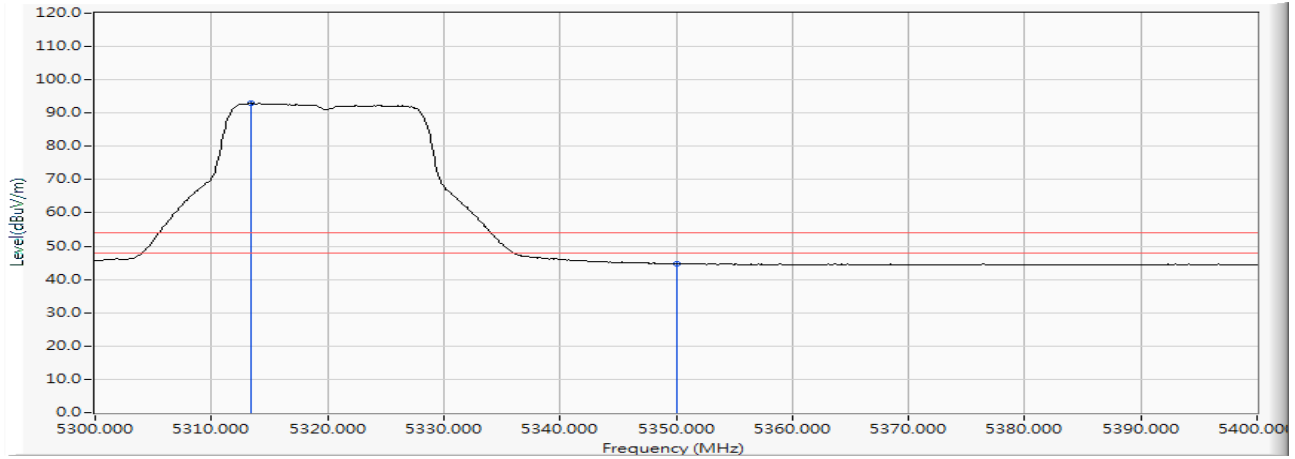


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.400	15.829	77.057	92.886	--	--	AVERAGE
2		5350.000	15.912	28.795	44.707	-9.293	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Vertical

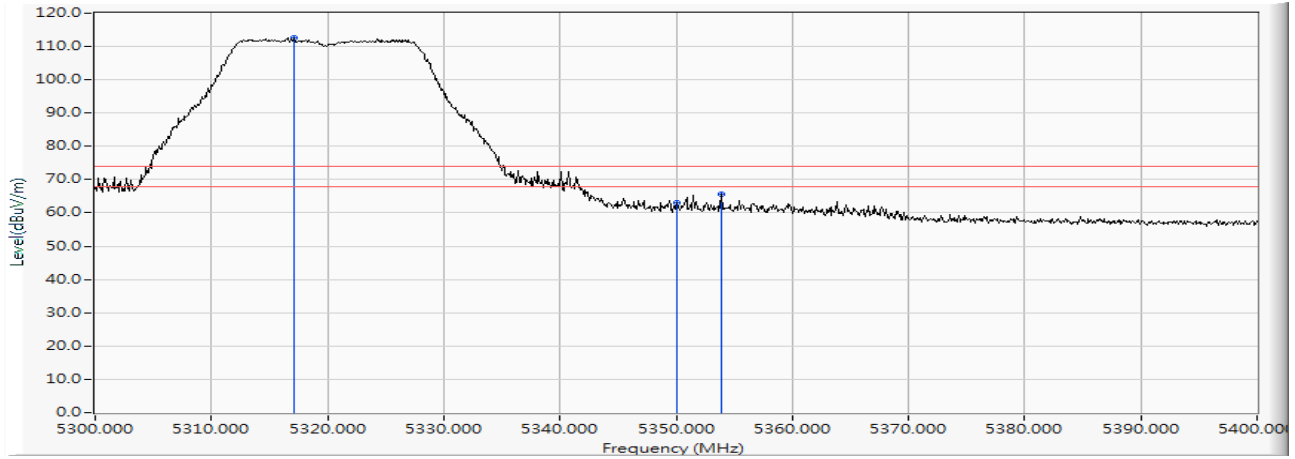


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5317.100	15.840	96.778	112.618	--	--	PEAK
2		5350.000	15.912	47.207	63.119	-10.881	74.000	PEAK
3		5353.900	15.925	49.743	65.667	-8.333	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Vertical

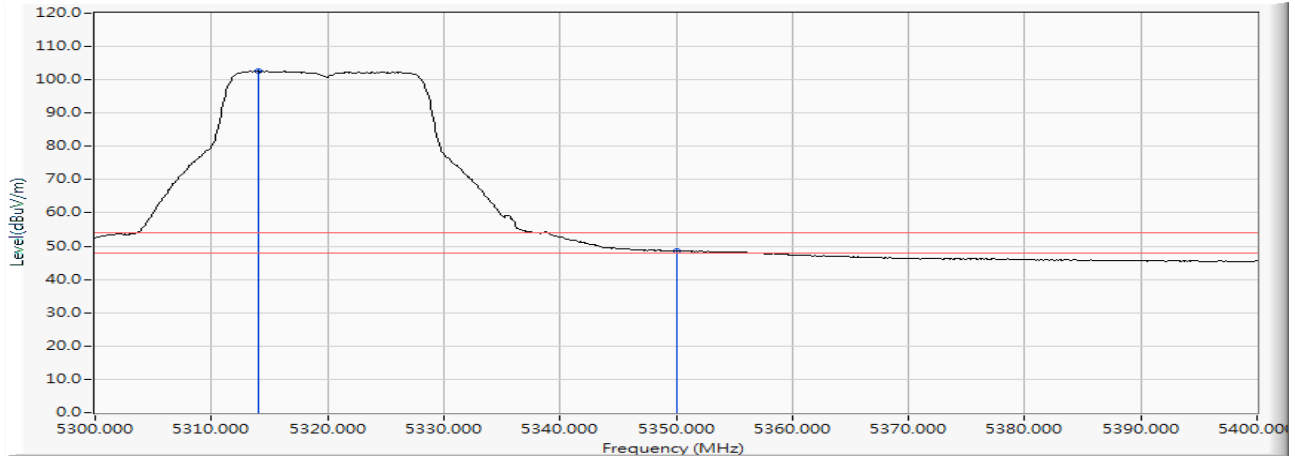


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.100	15.831	86.723	102.554	--	--	AVERAGE
2		5350.000	15.912	32.583	48.495	-5.505	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

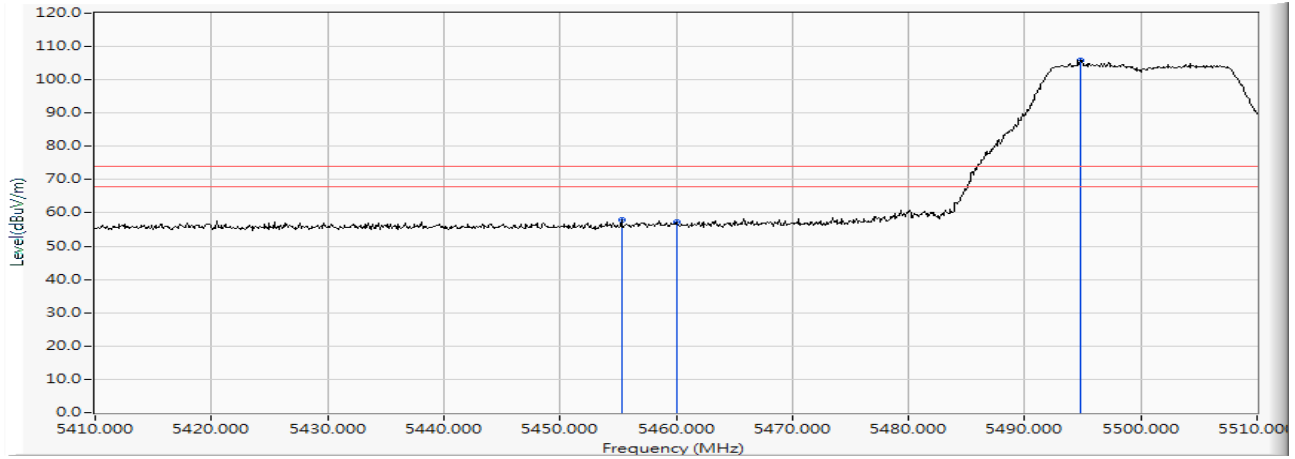


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5455.300	16.175	41.660	57.835	-16.165	74.000	PEAK
2	5460.000	16.185	41.232	57.417	-16.583	74.000	PEAK
3	* 5494.800	16.263	89.703	105.966	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

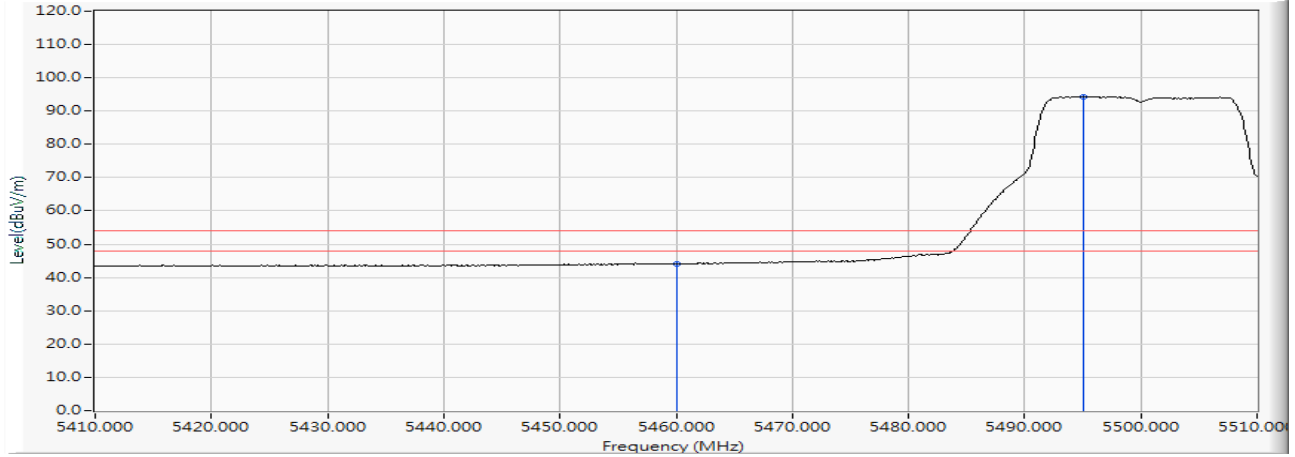


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	27.882	44.067	-9.933	54.000	AVERAGE
2	*	5495.100	16.264	78.089	94.353	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Vertical

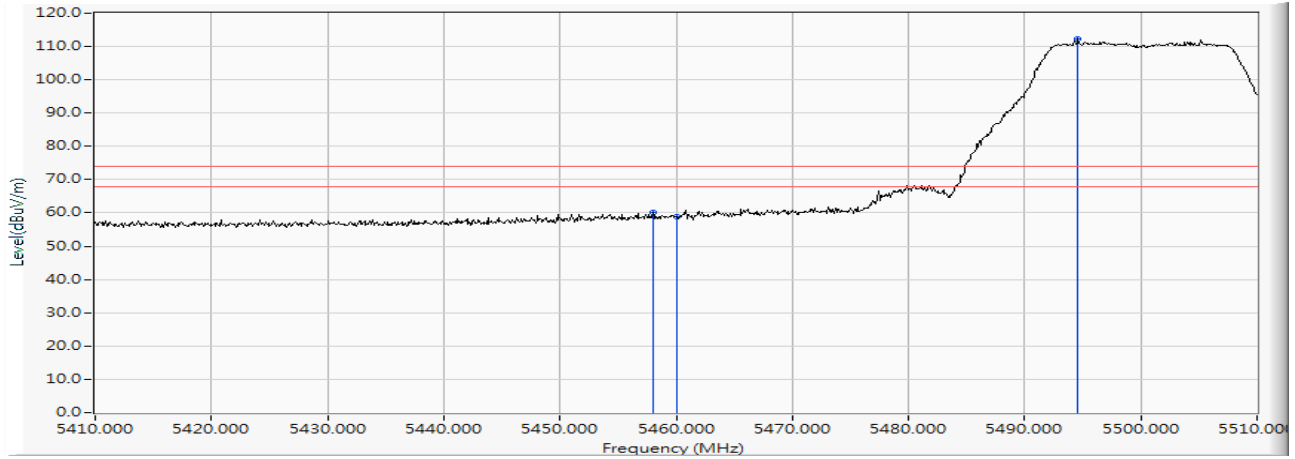


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.000	16.182	43.923	60.105	-13.895	74.000	PEAK
2		5460.000	16.185	42.758	58.943	-15.057	74.000	PEAK
3	*	5494.600	16.262	95.994	112.257	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Vertical

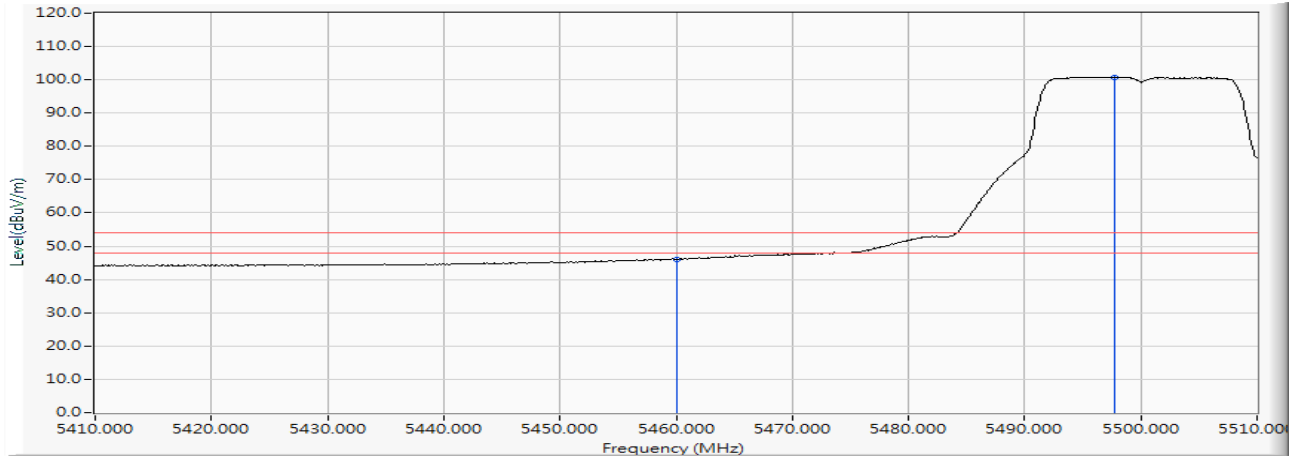


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	29.954	46.139	-7.861	54.000	AVERAGE
2	*	5497.800	16.266	84.564	100.831	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)


Horizontal

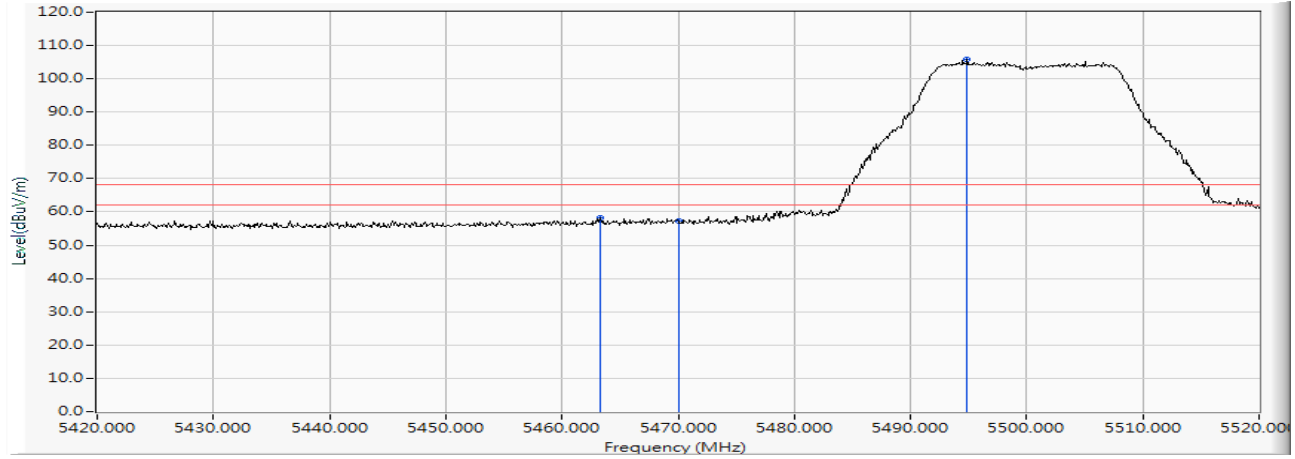

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5463.300	16.189	42.076	58.265	-9.955	68.220	PEAK
2		5470.000	16.200	41.181	57.381	-10.839	68.220	PEAK
3	*	5494.900	16.263	89.483	105.747	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)


Vertical

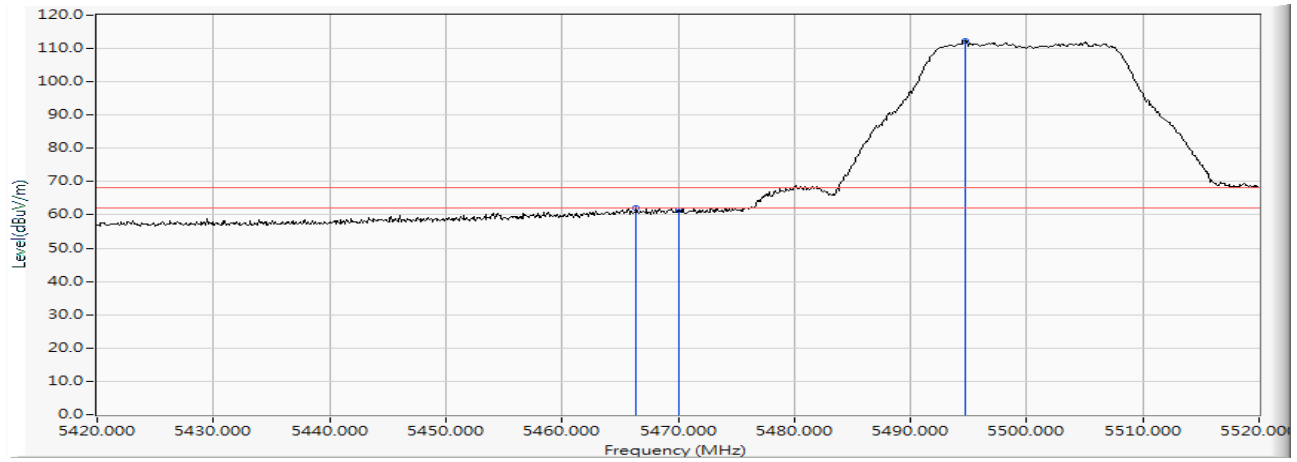

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5466.400	16.194	45.916	62.110	-6.110	68.220	PEAK
2		5470.000	16.200	45.174	61.374	-6.846	68.220	PEAK
3	*	5494.700	16.262	96.069	112.332	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)


Horizontal

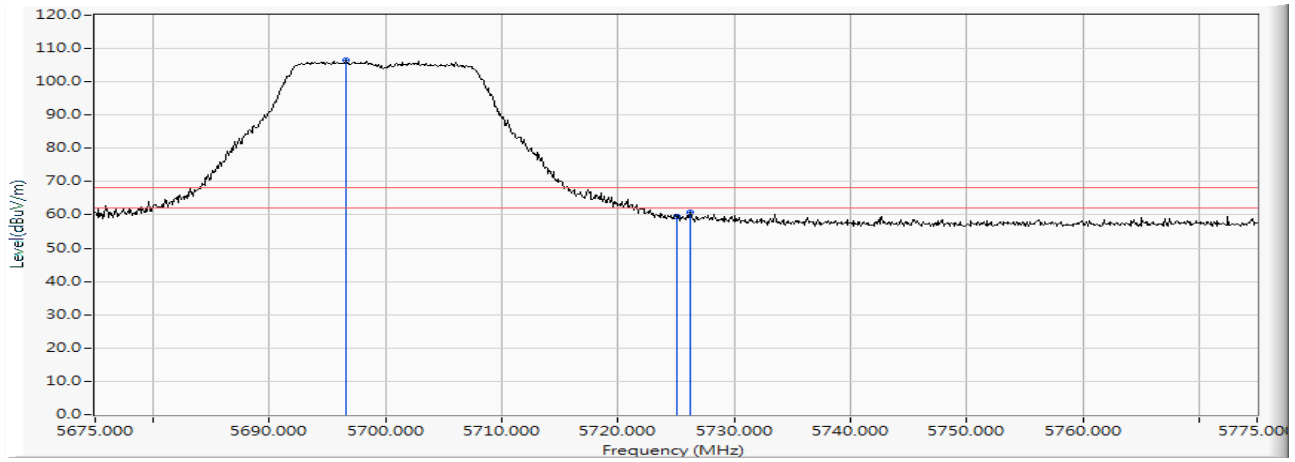

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5696.600	16.497	89.853	106.350	--	--	PEAK
2		5725.000	16.544	42.891	59.435	-8.785	68.220	PEAK
3		5726.200	16.546	44.188	60.734	-7.486	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)


Vertical

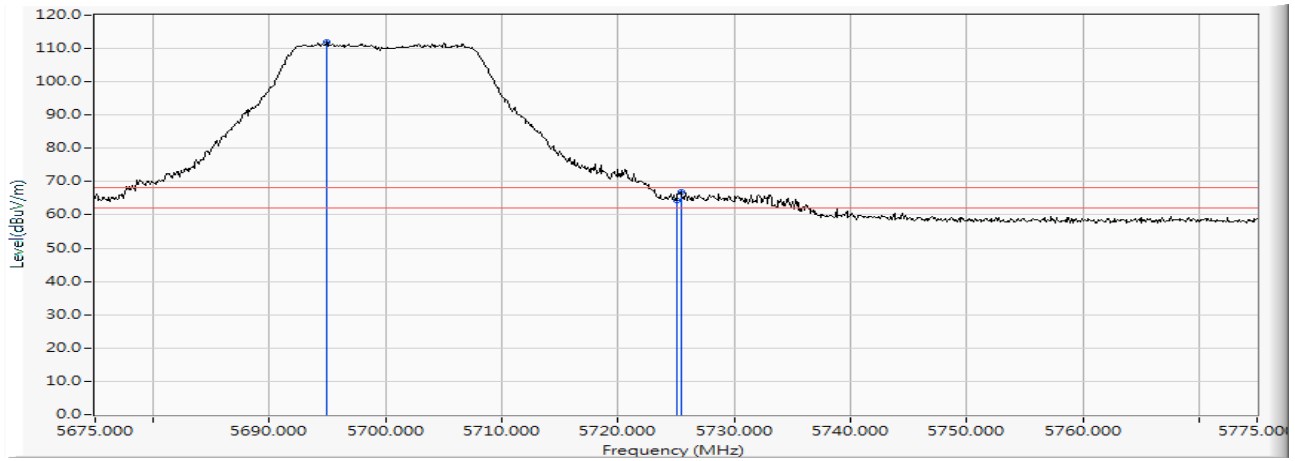

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5694.900	16.496	95.578	112.073	--	--	PEAK
2		5725.000	16.544	47.804	64.348	-3.872	68.220	PEAK
3		5725.400	16.545	50.406	66.951	-1.269	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Horizontal

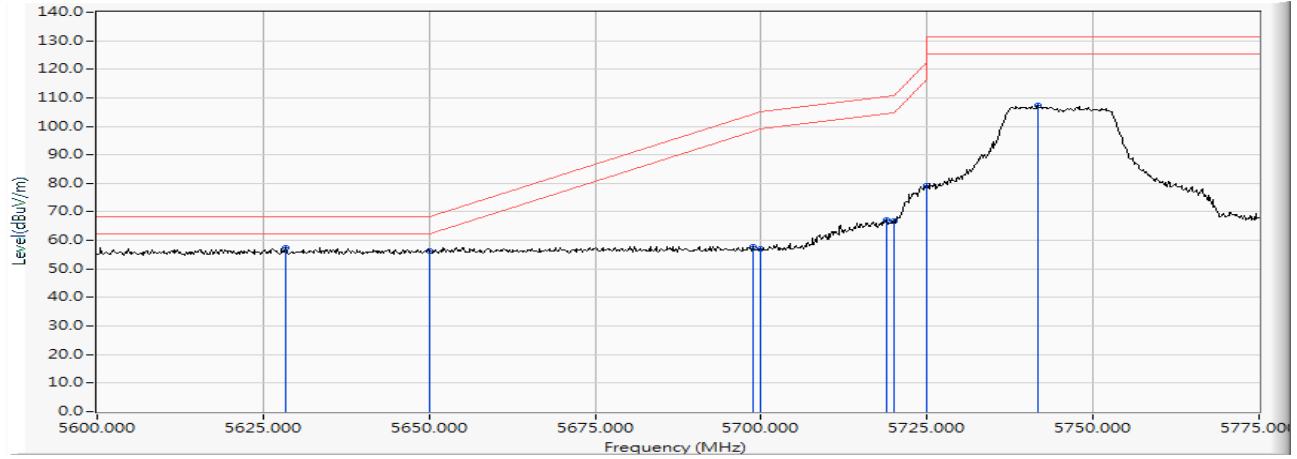

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5628.350	16.408	41.151	57.559	-10.661	68.220	PEAK
2		5650.000	16.447	39.886	56.333	-11.887	68.220	PEAK
3		5698.700	16.500	41.314	57.814	-46.425	104.239	PEAK
4		5700.000	16.502	40.382	56.884	-48.316	105.200	PEAK
5		5719.000	16.533	50.472	67.005	-43.515	110.520	PEAK
6		5720.000	16.535	50.106	66.641	-44.159	110.800	PEAK
7		5725.000	16.544	62.577	79.121	-43.079	122.200	PEAK
8		5741.750	16.556	90.802	107.359	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Vertical

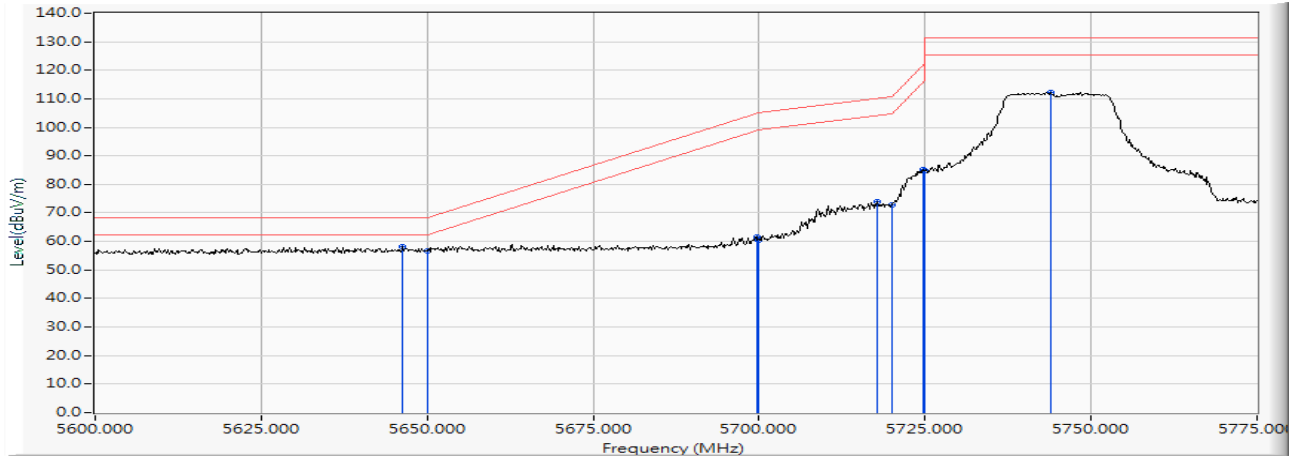

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5646.375	16.437	41.616	58.053	-10.167	68.220	PEAK
2		5650.000	16.447	40.385	56.832	-11.388	68.220	PEAK
3		5699.575	16.501	45.167	61.668	-43.218	104.886	PEAK
4		5700.000	16.502	44.110	60.612	-44.588	105.200	PEAK
5		5717.775	16.531	57.241	73.772	-36.405	110.177	PEAK
6		5720.000	16.535	56.419	72.954	-37.846	110.800	PEAK
7		5724.775	16.544	68.772	85.316	-36.371	121.687	PEAK
8		5725.000	16.544	68.357	84.901	-37.299	122.200	PEAK
9		5743.850	16.558	95.661	112.220	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)


Horizontal

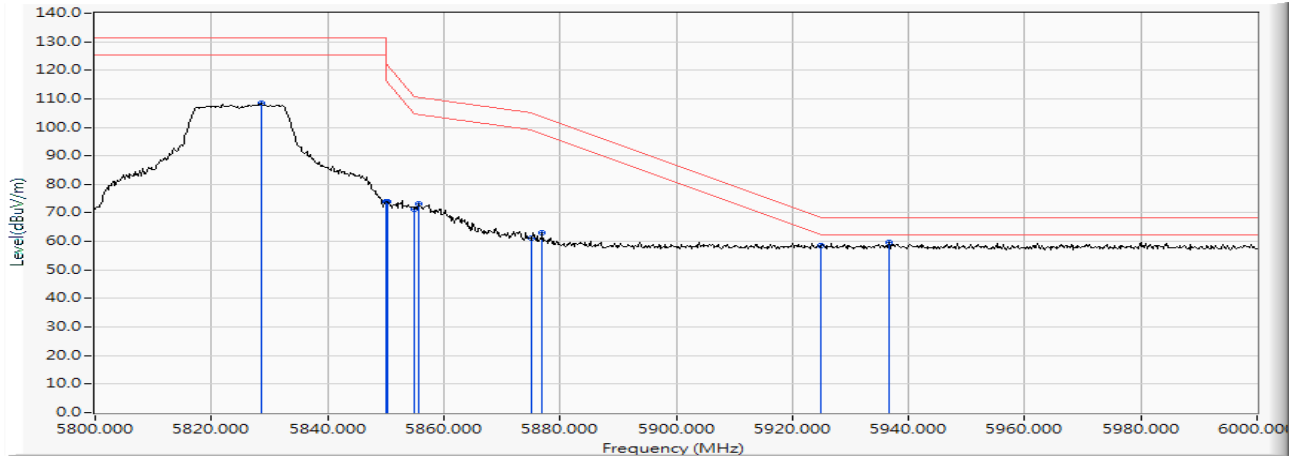

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5828.600	16.717	91.589	108.306	--	--	PEAK
2		5850.000	16.748	57.195	73.943	-48.257	122.200	PEAK
3		5850.400	16.749	57.275	74.024	-47.264	121.288	PEAK
4		5855.000	16.758	54.592	71.350	-39.450	110.800	PEAK
5		5855.600	16.760	56.594	73.354	-37.278	110.632	PEAK
6		5875.000	16.807	44.376	61.184	-44.016	105.200	PEAK
7		5877.000	16.813	46.092	62.905	-40.815	103.720	PEAK
8		5925.000	16.920	41.560	58.480	-9.720	68.200	PEAK
9	*	5936.600	16.932	42.866	59.798	-8.402	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)


Vertical

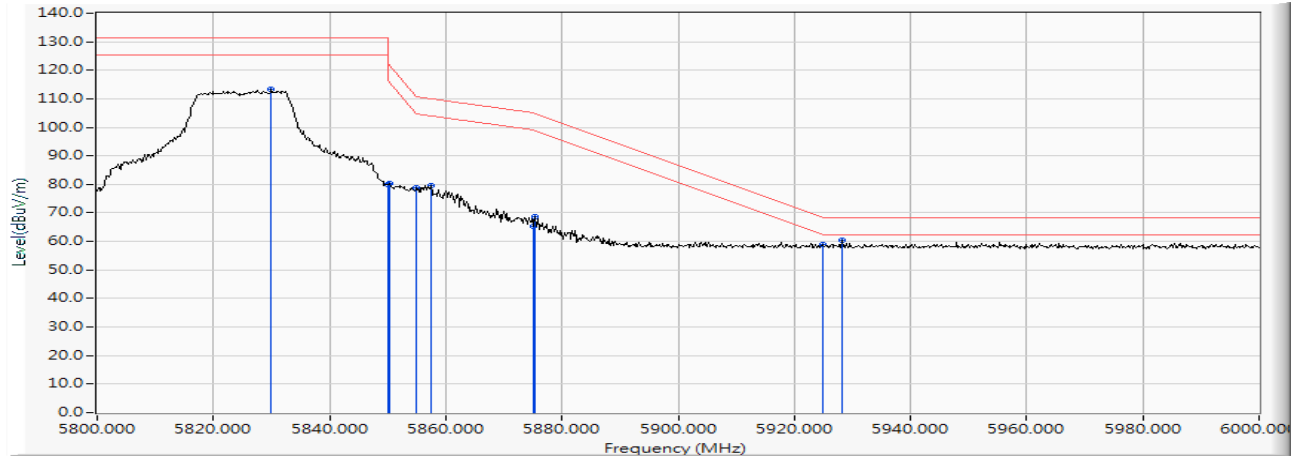

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5830.000	16.719	96.529	113.248	--	--	PEAK
2		5850.000	16.748	63.182	79.930	-42.270	122.200	PEAK
3		5850.400	16.749	63.493	80.242	-41.046	121.288	PEAK
4		5855.000	16.758	62.142	78.900	-31.900	110.800	PEAK
5		5857.400	16.764	62.822	79.586	-30.542	110.128	PEAK
6		5875.000	16.807	48.613	65.421	-39.779	105.200	PEAK
7		5875.400	16.809	51.955	68.764	-36.140	104.904	PEAK
8		5925.000	16.920	41.835	58.755	-9.445	68.200	PEAK
9	*	5928.200	16.923	43.662	60.585	-7.615	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Horizontal

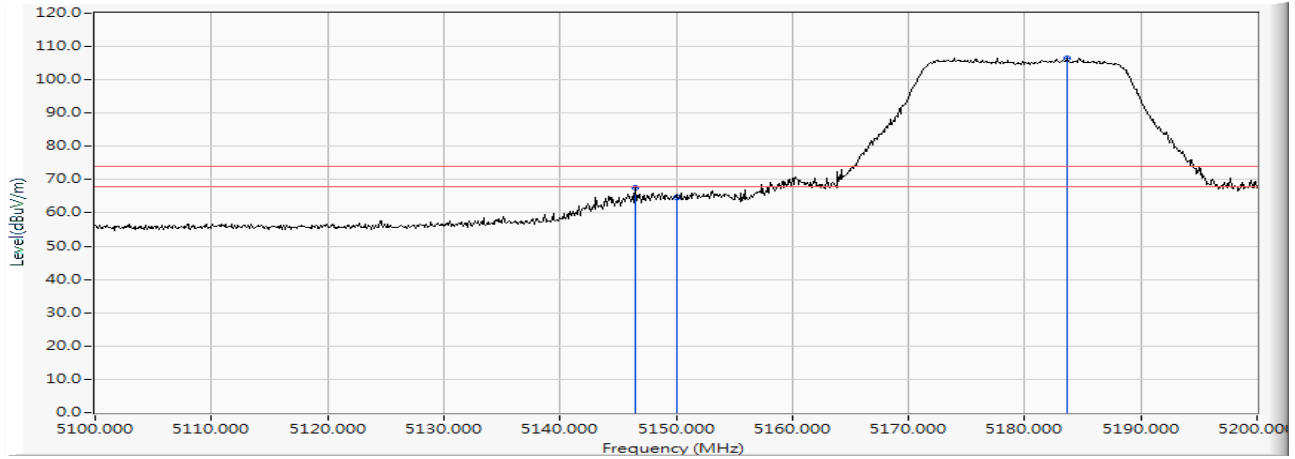


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5146.500	15.287	52.296	67.583	-6.417	74.000	PEAK
2		5150.000	15.307	49.385	64.692	-9.308	74.000	PEAK
3	*	5183.600	15.408	91.135	106.543	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Horizontal

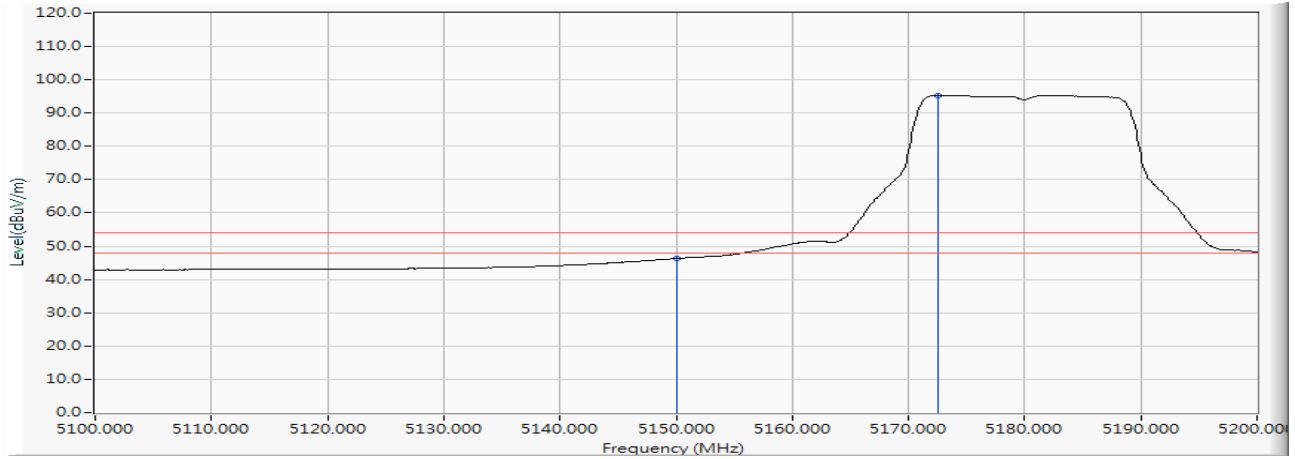


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	30.953	46.260	-7.740	54.000	AVERAGE
2	*	5172.600	15.359	79.995	95.354	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Vertical

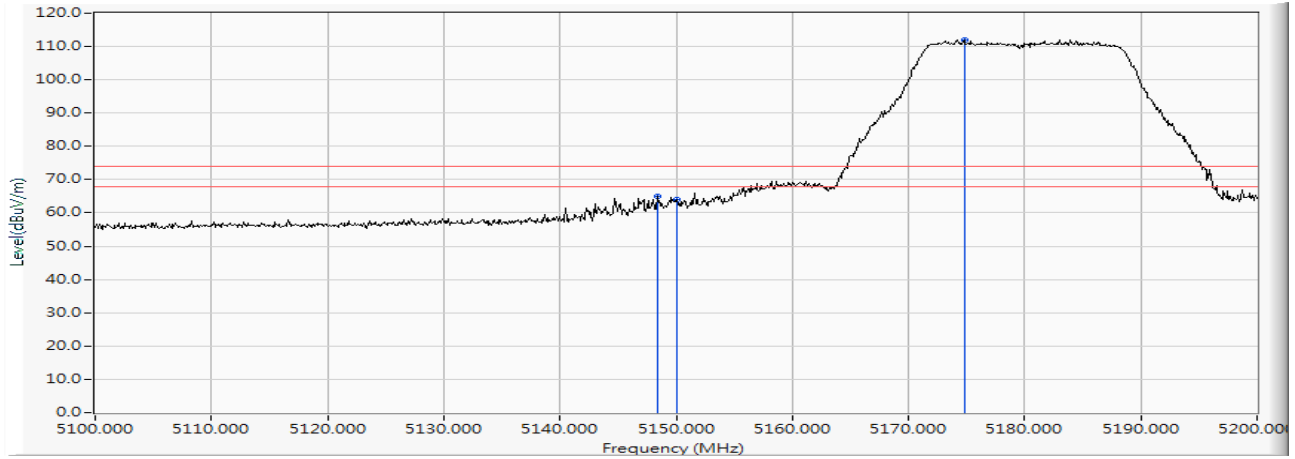


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.400	15.298	49.830	65.128	-8.872	74.000	PEAK
2		5150.000	15.307	48.785	64.092	-9.908	74.000	PEAK
3	*	5174.800	15.369	96.612	111.981	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Vertical

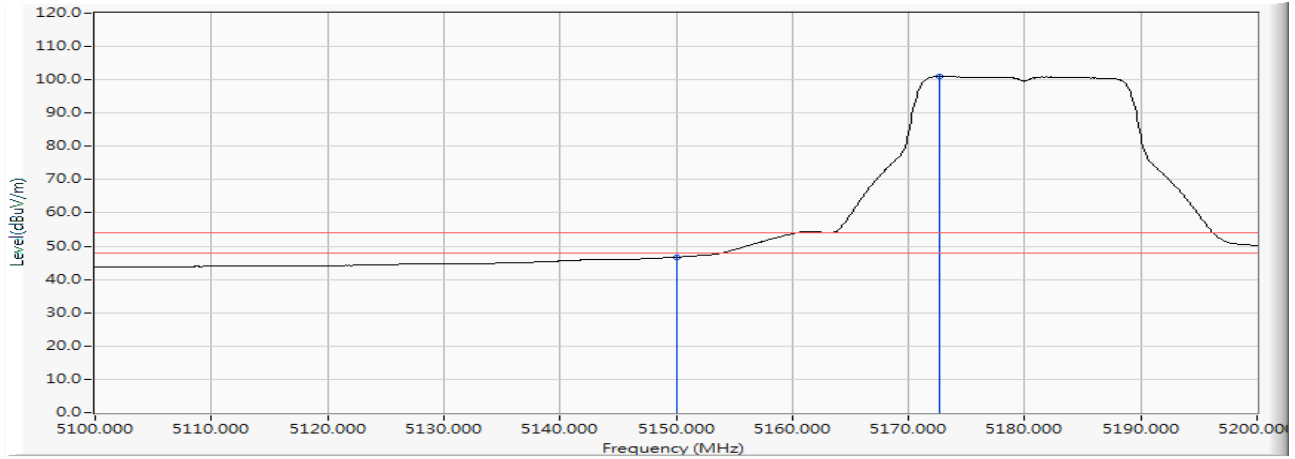


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	31.374	46.681	-7.319	54.000	AVERAGE
2	*	5172.700	15.359	85.626	100.986	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Horizontal

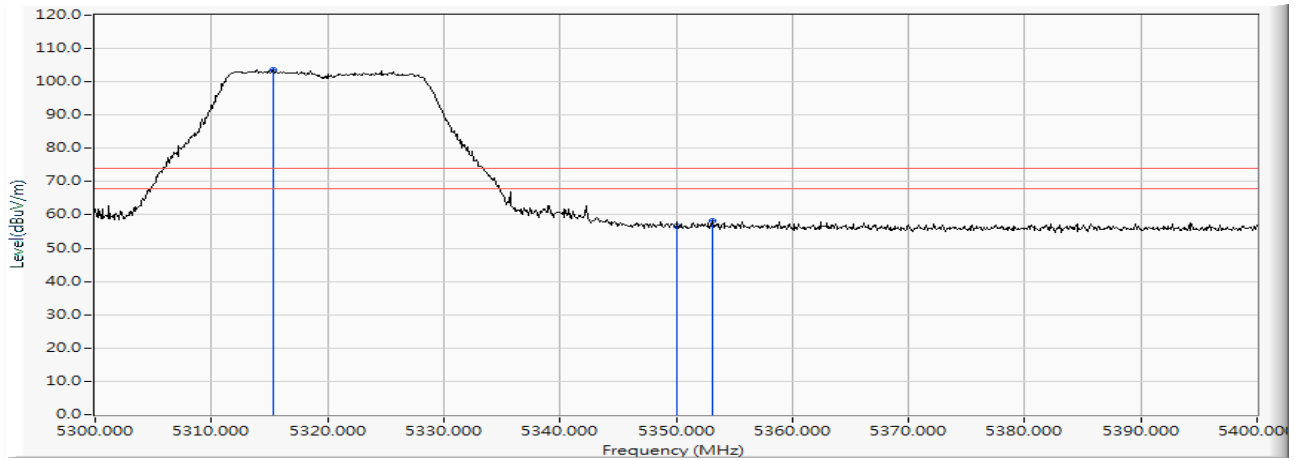


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5315.300	15.835	87.688	103.523	--	--	PEAK
2		5350.000	15.912	40.691	56.603	-17.397	74.000	PEAK
3		5353.100	15.922	42.281	58.203	-15.797	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Horizontal

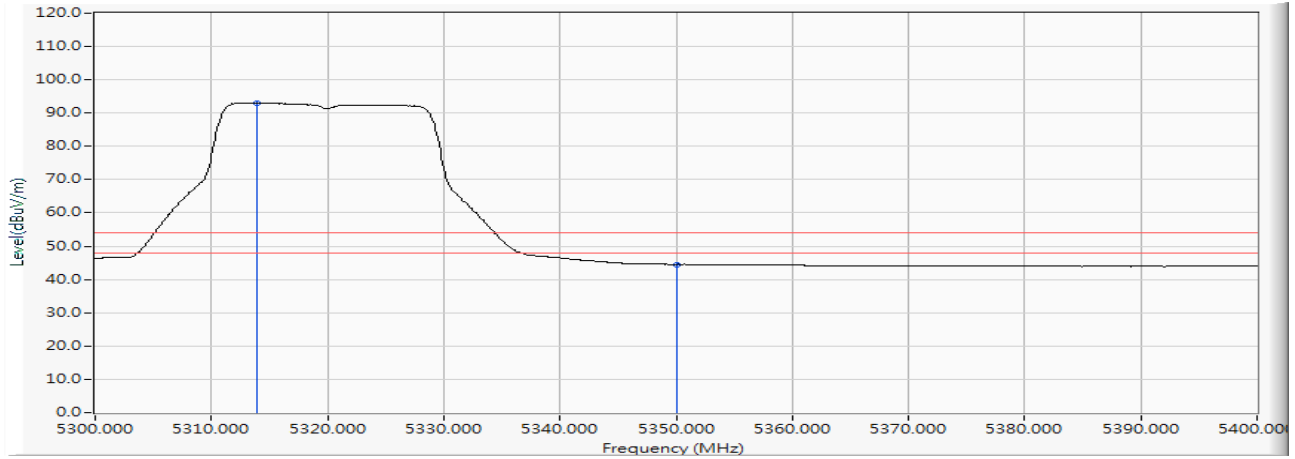


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.900	15.830	77.286	93.116	--	--	AVERAGE
2		5350.000	15.912	28.634	44.546	-9.454	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Vertical

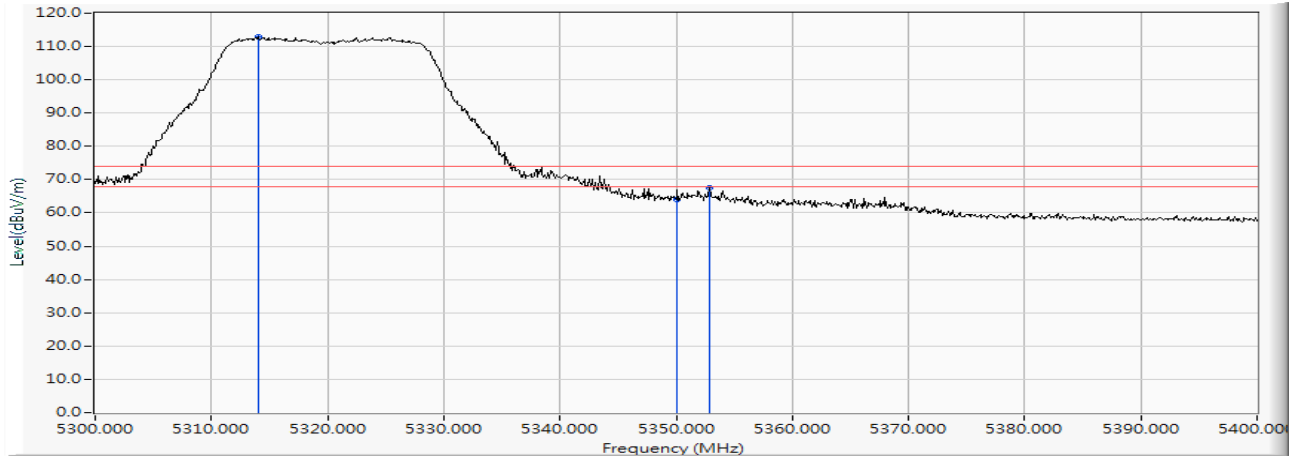


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.000	15.830	96.935	112.766	--	--	PEAK
2		5350.000	15.912	48.157	64.069	-9.931	74.000	PEAK
3		5352.900	15.922	51.630	67.551	-6.449	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Vertical

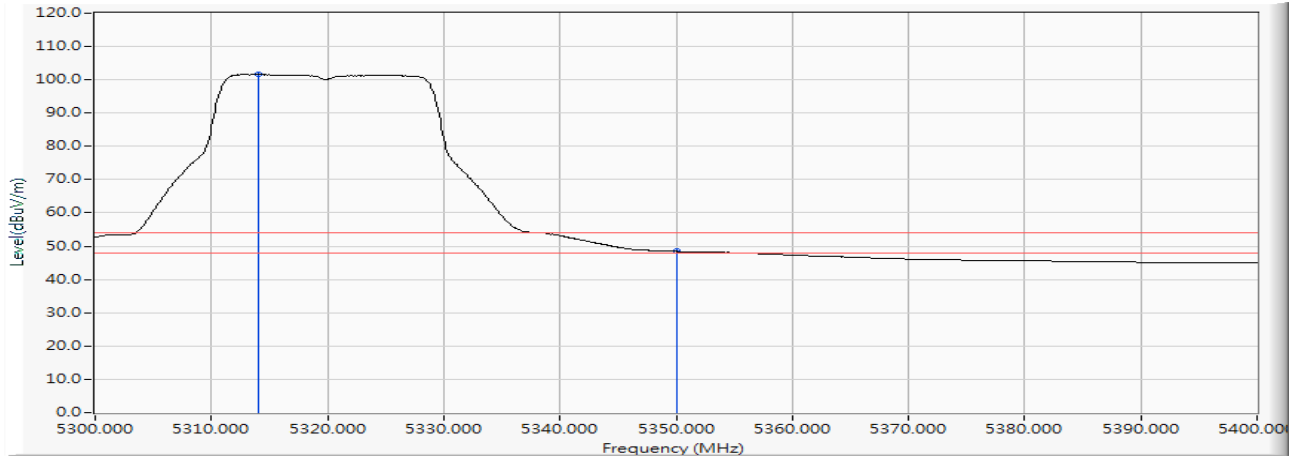


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.100	15.831	85.783	101.614	--	--	AVERAGE
2		5350.000	15.912	32.545	48.457	-5.543	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

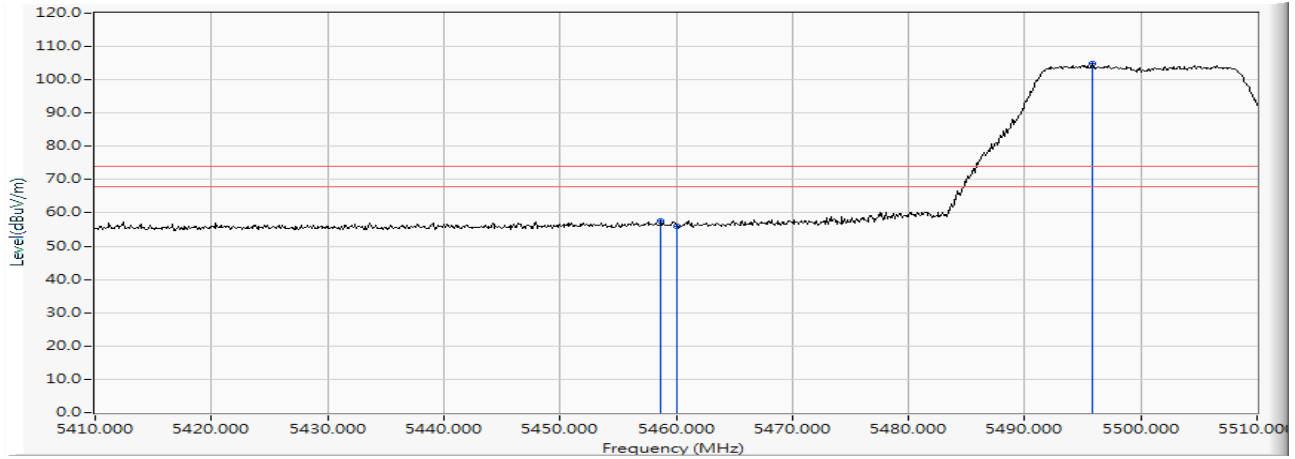


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5458.700	16.182	41.331	57.514	-16.486	74.000	PEAK
2	5460.000	16.185	39.766	55.951	-18.049	74.000	PEAK
3	* 5495.800	16.265	88.491	104.756	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

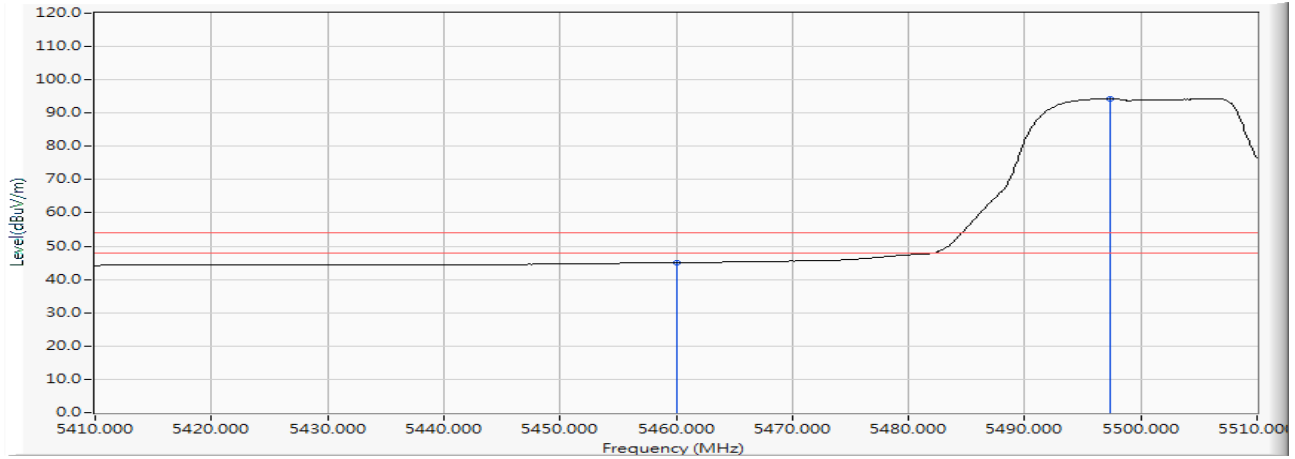


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	28.840	45.025	-8.975	54.000	AVERAGE
2	*	5497.400	16.267	77.989	94.256	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Vertical

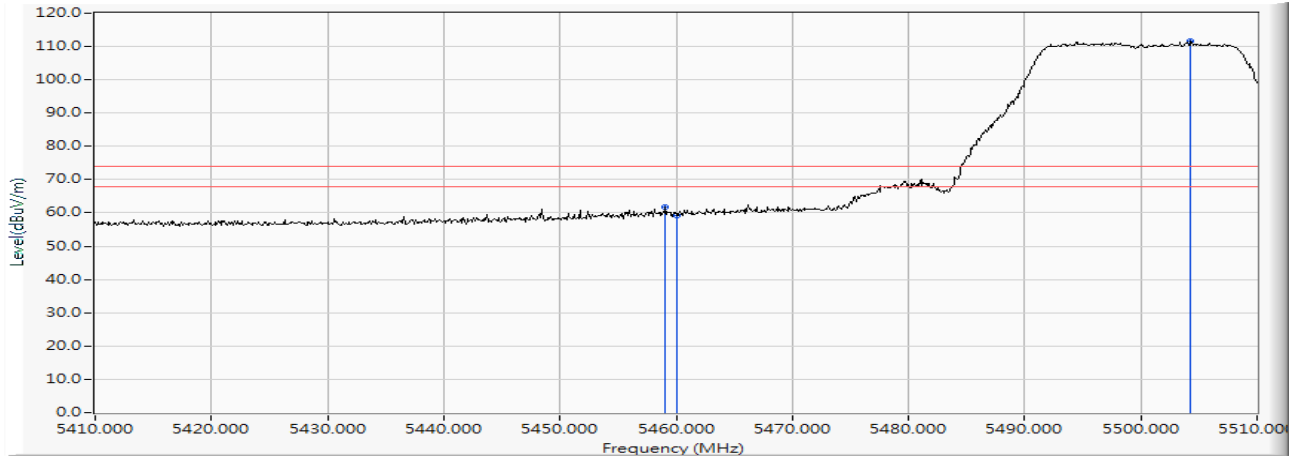


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5459.100	16.183	45.514	61.697	-12.303	74.000	PEAK
2		5460.000	16.185	42.965	59.150	-14.850	74.000	PEAK
3	*	5504.300	16.273	95.246	111.519	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Vertical

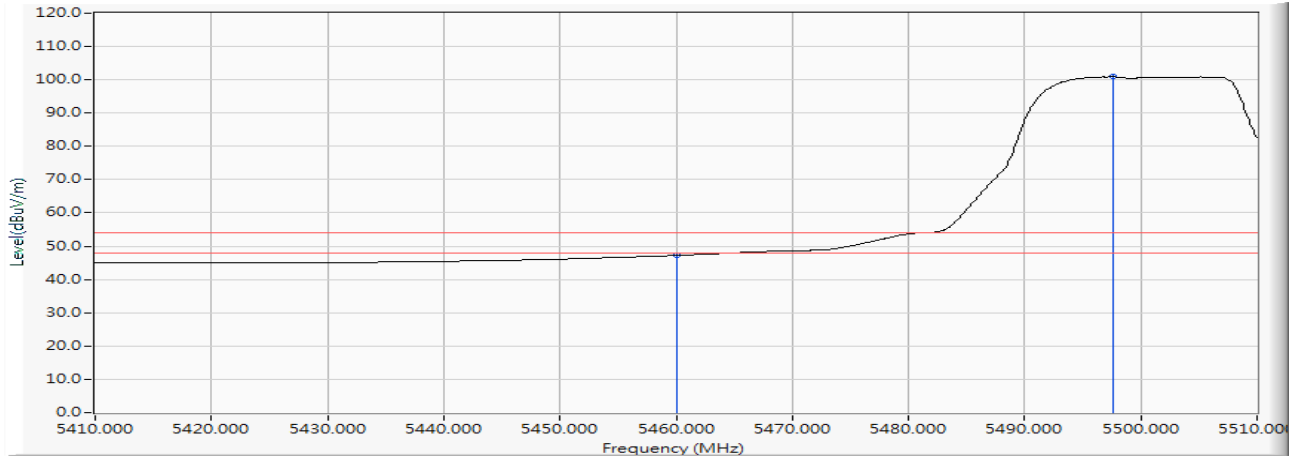


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	31.027	47.212	-6.788	54.000	AVERAGE
2	*	5497.600	16.267	84.651	100.918	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)


Horizontal

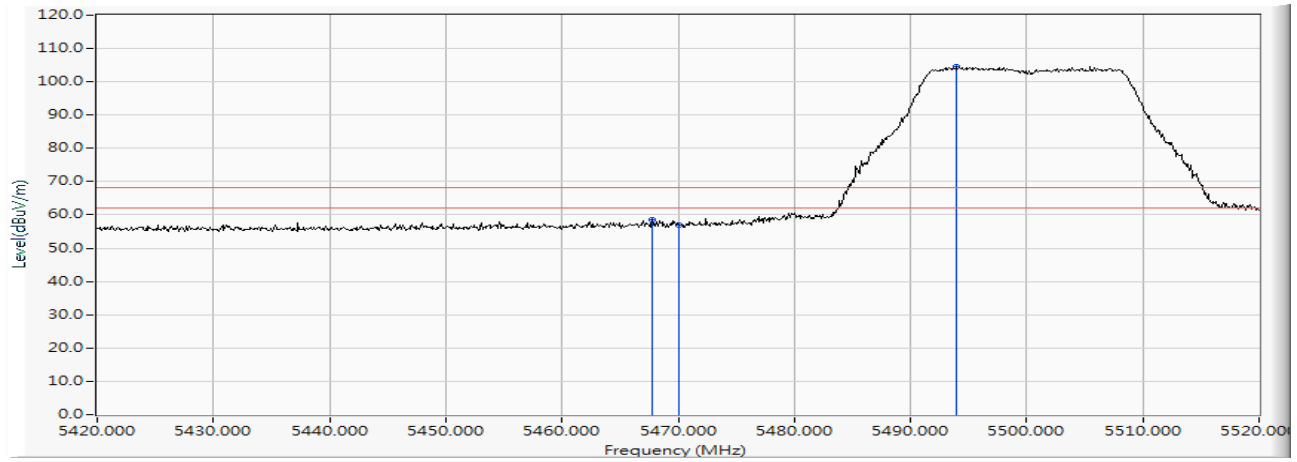

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5467.800	16.197	42.388	58.584	-9.636	68.220	PEAK
2		5470.000	16.200	40.584	56.784	-11.436	68.220	PEAK
3	*	5494.000	16.262	88.425	104.687	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)


Vertical

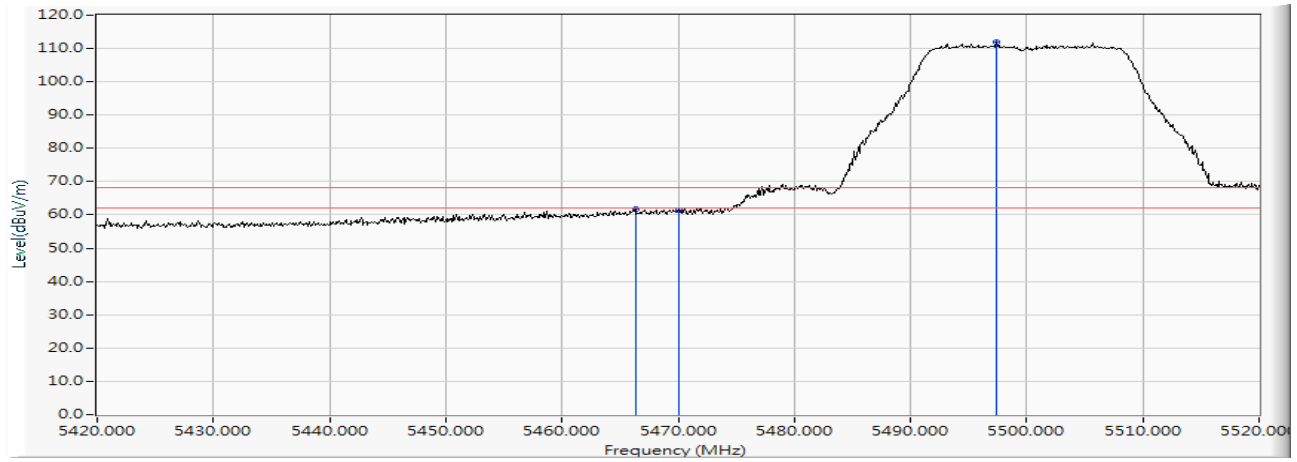

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5466.300	16.194	45.513	61.707	-6.513	68.220	PEAK
2		5470.000	16.200	45.359	61.559	-6.661	68.220	PEAK
3	*	5497.400	16.267	95.678	111.945	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 140 (5700MHz)


Horizontal

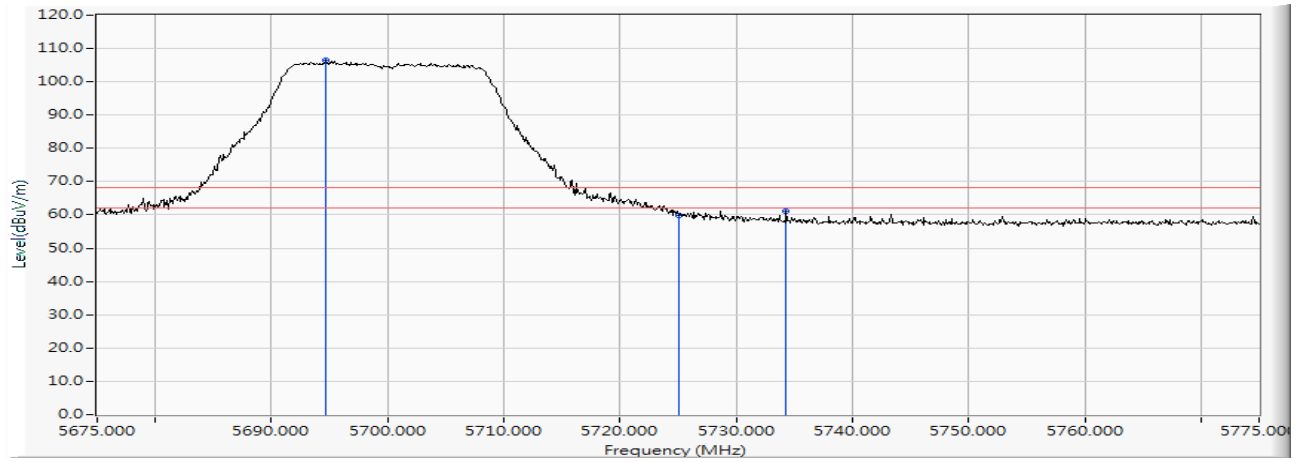

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5694.700	16.494	90.054	106.549	--	--	PEAK
2		5725.000	16.544	43.259	59.803	-8.417	68.220	PEAK
3		5734.300	16.551	44.715	61.267	-6.953	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 140 (5700MHz)


Vertical

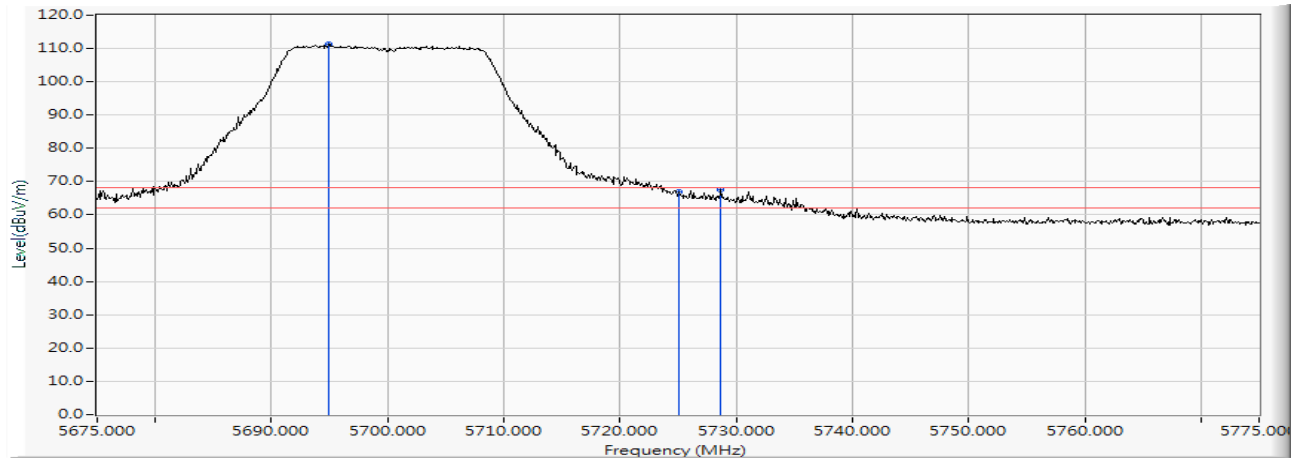

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5694.900	16.496	94.800	111.295	--	--	PEAK
2		5725.000	16.544	50.286	66.830	-1.390	68.220	PEAK
3		5728.700	16.548	50.980	67.528	-0.692	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 149 (5745MHz)


Horizontal

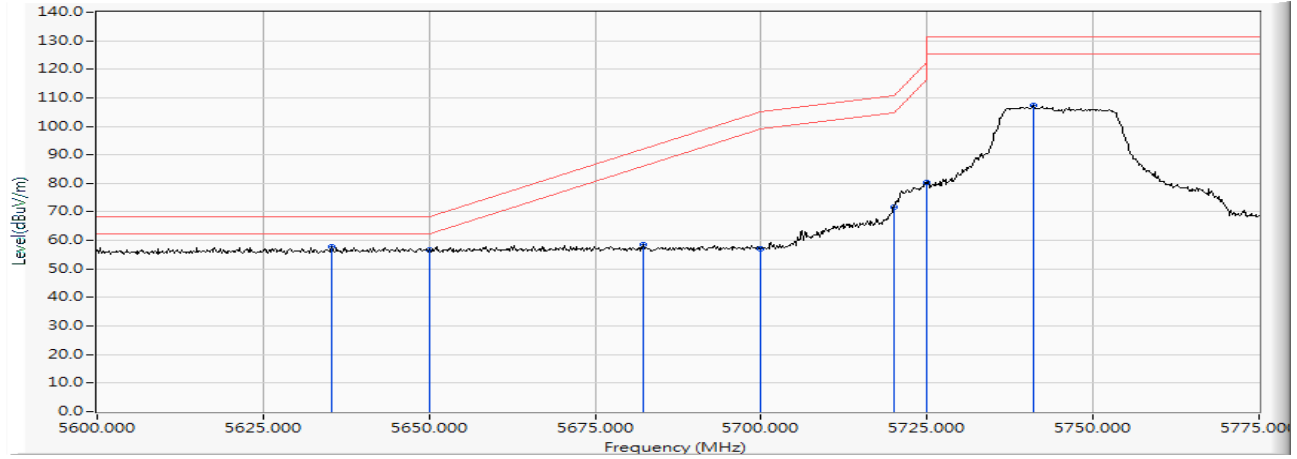

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5635.350	16.410	41.219	57.629	-10.591	68.220	PEAK
2		5650.000	16.447	40.169	56.616	-11.604	68.220	PEAK
3		5682.250	16.481	42.179	58.659	-33.413	92.072	PEAK
4		5700.000	16.502	40.665	57.167	-48.033	105.200	PEAK
5		5720.000	16.535	55.243	71.778	-39.022	110.800	PEAK
6		5725.000	16.544	63.683	80.227	-41.973	122.200	PEAK
7		5741.050	16.557	90.827	107.383	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 149 (5745MHz)


Vertical

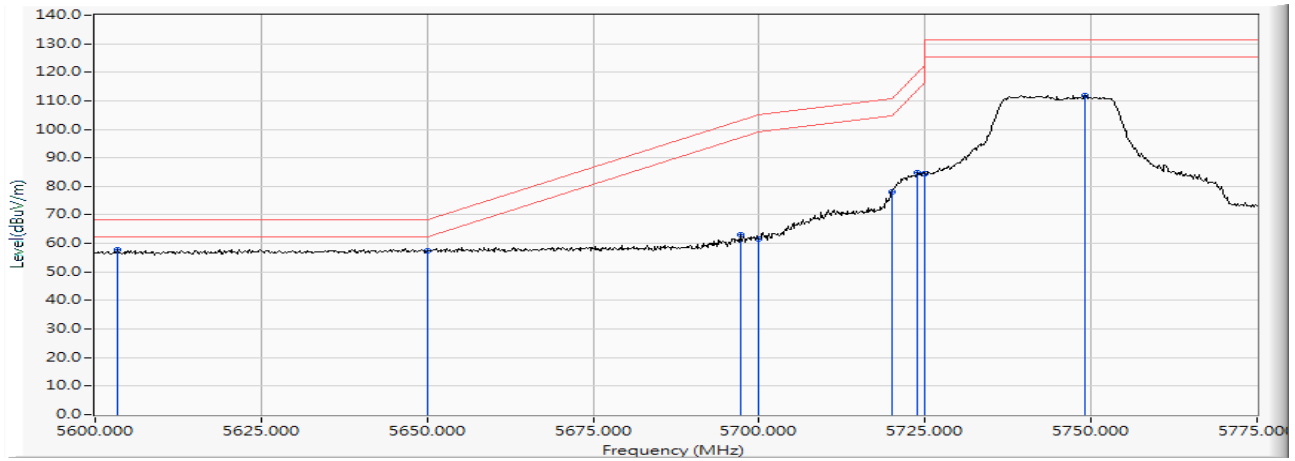

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5603.325	16.388	41.259	57.646	-10.574	68.220	PEAK
2		5650.000	16.447	40.966	57.413	-10.807	68.220	PEAK
3		5697.125	16.498	46.696	63.194	-39.880	103.074	PEAK
4		5700.000	16.502	45.168	61.670	-43.530	105.200	PEAK
5		5720.000	16.535	61.671	78.206	-32.594	110.800	PEAK
6		5723.900	16.543	68.147	84.689	-35.003	119.692	PEAK
7		5725.000	16.544	68.028	84.572	-37.628	122.200	PEAK
8		5749.100	16.566	95.298	111.865	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 165 (5825MHz)


Horizontal

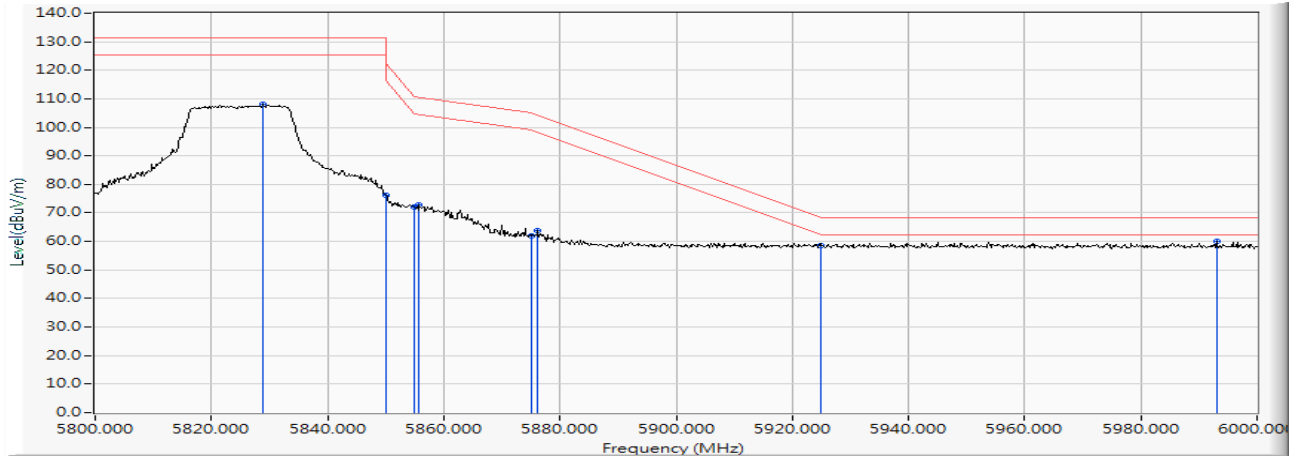

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5828.800	16.717	91.304	108.021	--	--	PEAK
2		5850.000	16.748	59.565	76.313	-45.887	122.200	PEAK
3		5855.000	16.758	55.311	72.069	-38.731	110.800	PEAK
4		5855.800	16.761	56.066	72.826	-37.750	110.576	PEAK
5		5875.000	16.807	45.205	62.013	-43.187	105.200	PEAK
6		5876.200	16.811	46.841	63.652	-40.660	104.312	PEAK
7		5925.000	16.920	41.489	58.409	-9.791	68.200	PEAK
8	*	5993.000	17.041	42.991	60.032	-8.168	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 165 (5825MHz)


Vertical

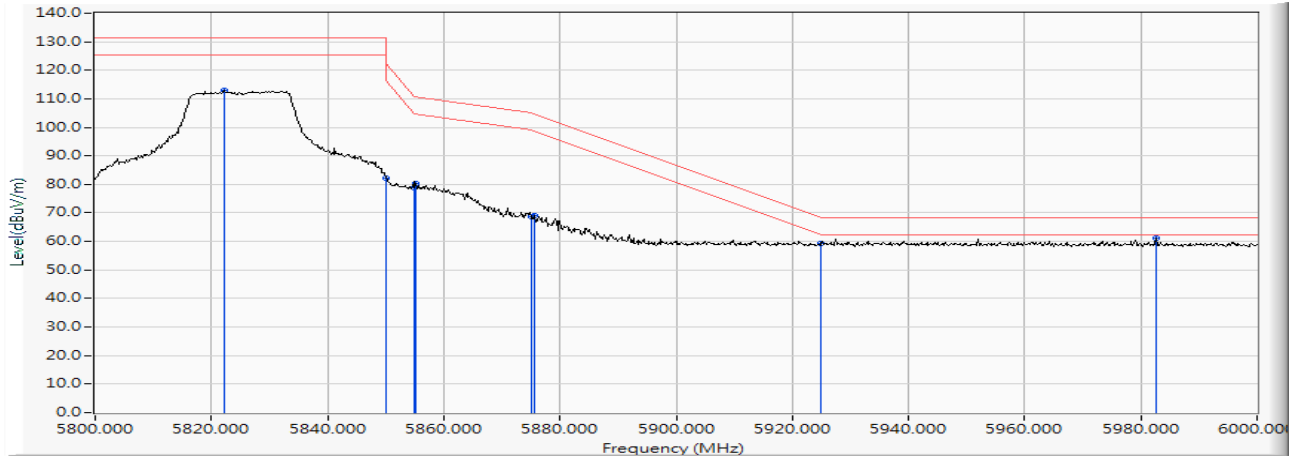

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5822.200	16.707	96.233	112.941	--	--	PEAK
2		5850.000	16.748	65.488	82.236	-39.964	122.200	PEAK
3		5855.000	16.758	62.183	78.941	-31.859	110.800	PEAK
4		5855.200	16.758	63.461	80.220	-30.524	110.744	PEAK
5		5875.000	16.807	51.841	68.649	-36.551	105.200	PEAK
6		5875.600	16.809	52.204	69.013	-35.743	104.756	PEAK
7		5925.000	16.920	42.202	59.122	-9.078	68.200	PEAK
8	*	5982.600	17.024	44.093	61.117	-7.083	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

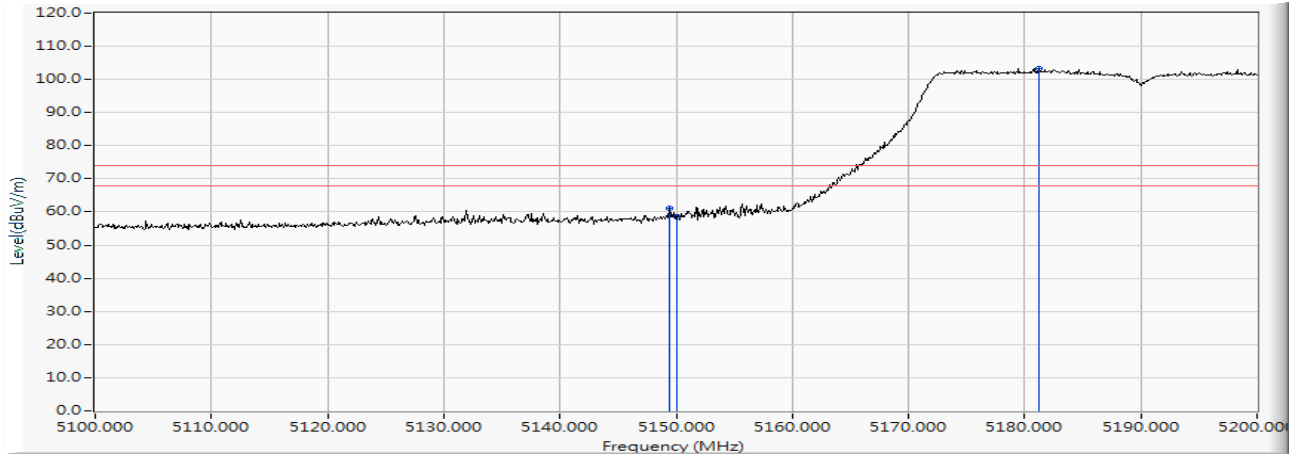


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.400	15.304	45.896	61.200	-12.800	74.000	PEAK
2		5150.000	15.307	43.284	58.591	-15.409	74.000	PEAK
3	*	5181.200	15.397	87.865	103.262	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

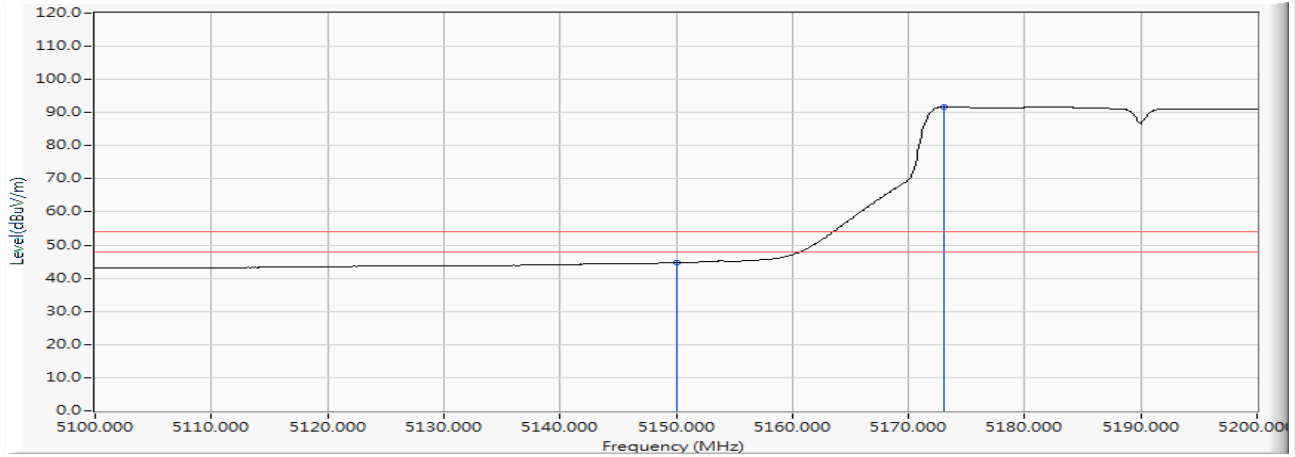


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	29.389	44.696	-9.304	54.000	AVERAGE
2	*	5173.100	15.362	76.359	91.721	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

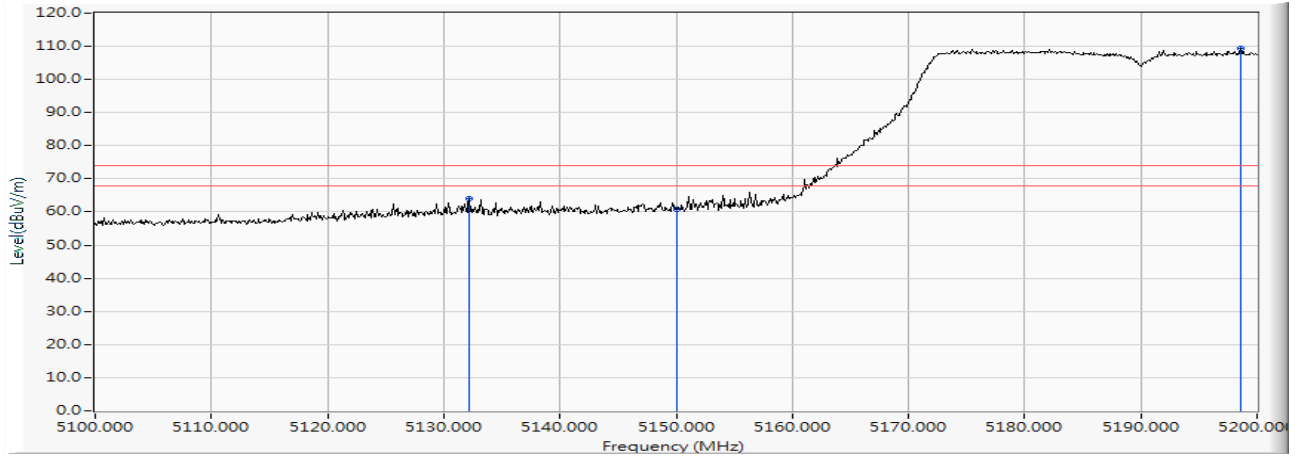


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5132.200	15.209	48.756	63.965	-10.035	74.000	PEAK
2		5150.000	15.307	45.622	60.929	-13.071	74.000	PEAK
3	*	5198.600	15.467	93.812	109.280	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

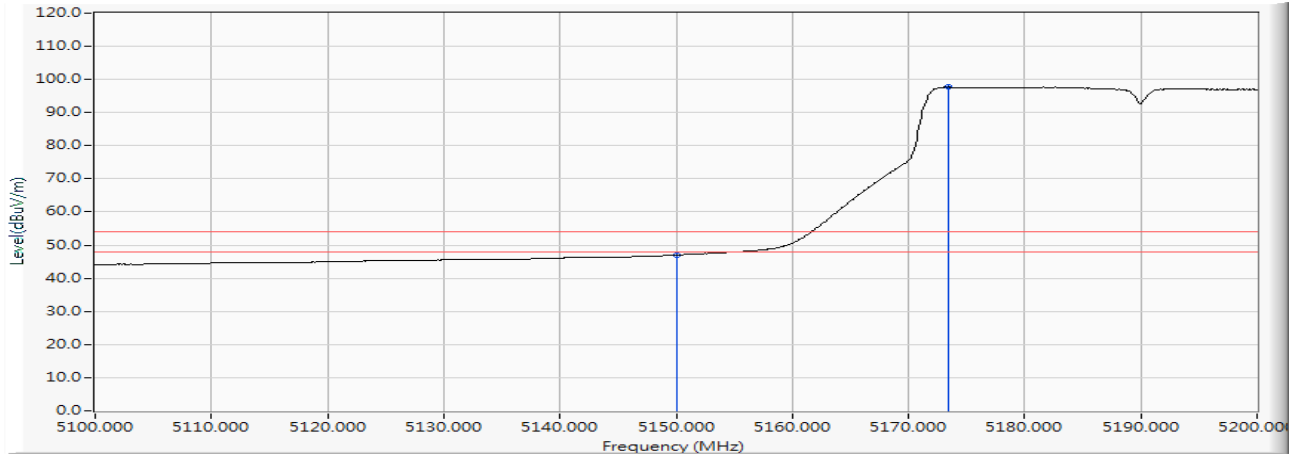


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	31.697	47.004	-6.996	54.000	AVERAGE
2	*	5173.400	15.363	82.324	97.687	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

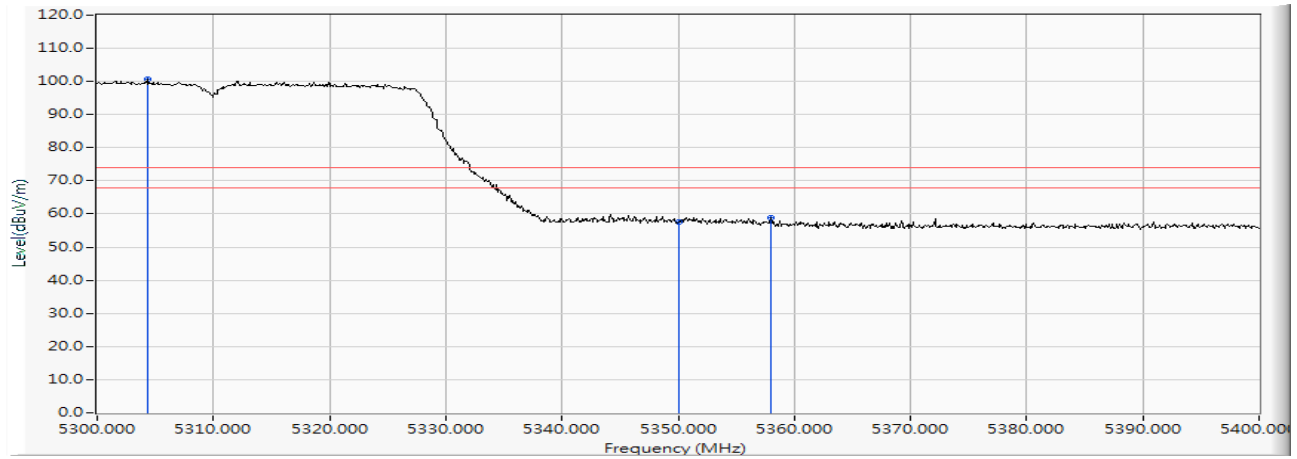


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5304.400	15.807	84.734	100.541	--	--	PEAK
2		5350.000	15.912	41.753	57.665	-16.335	74.000	PEAK
3		5358.000	15.937	42.917	58.854	-15.146	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

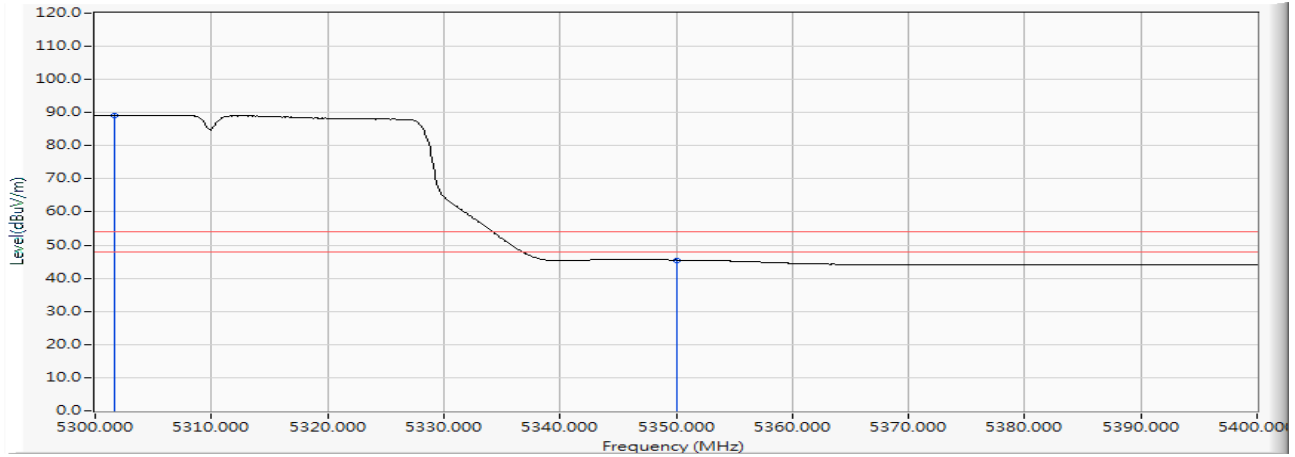


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5301.700	15.800	73.458	89.258	--	--	AVERAGE
2		5350.000	15.912	29.575	45.487	-8.513	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Vertical

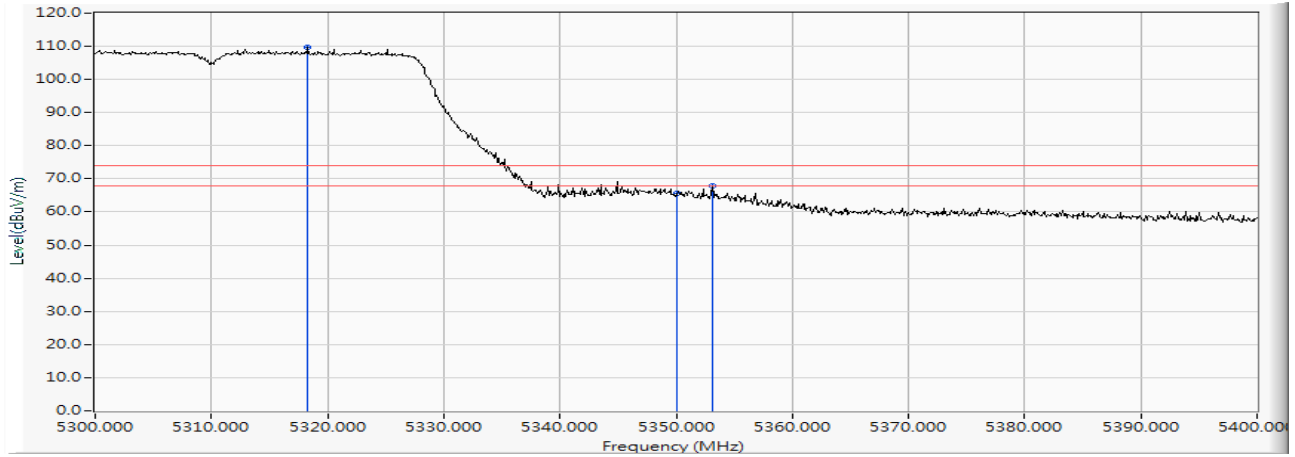


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5318.300	15.845	93.792	109.636	--	--	PEAK
2		5350.000	15.912	49.732	65.644	-8.356	74.000	PEAK
3		5353.100	15.922	52.000	67.922	-6.078	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Vertical

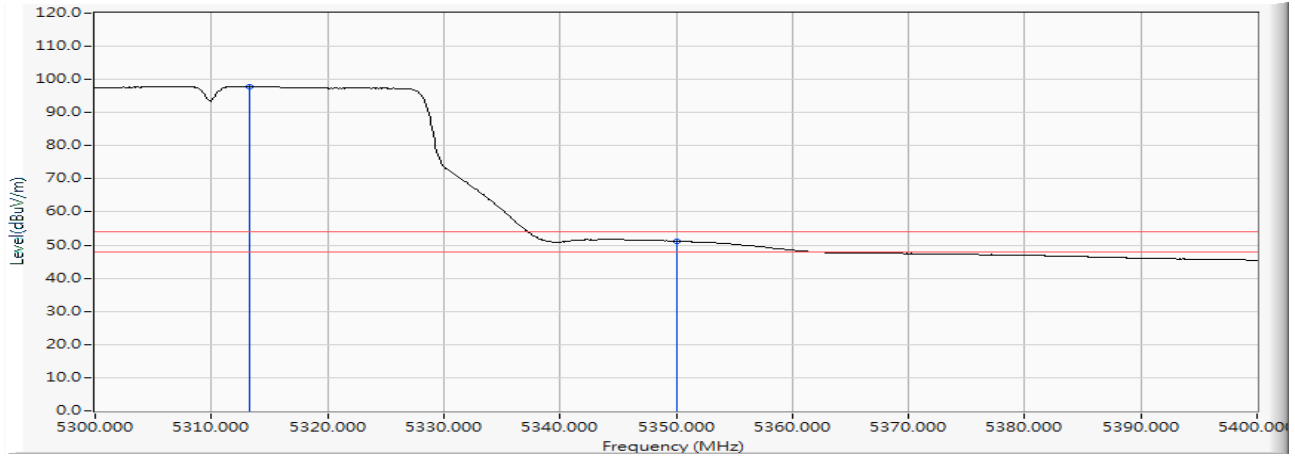


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.300	15.829	82.030	97.858	--	--	AVERAGE
2		5350.000	15.912	35.251	51.163	-2.837	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

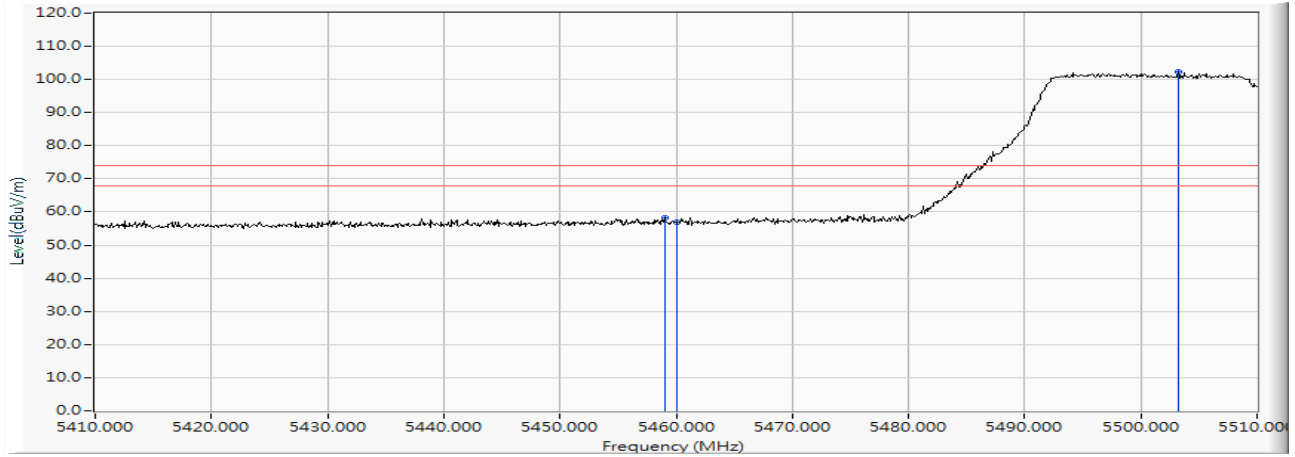


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5459.000	16.183	42.106	58.289	-15.711	74.000	PEAK
2		5460.000	16.185	40.720	56.905	-17.095	74.000	PEAK
3	*	5503.200	16.273	85.881	102.154	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

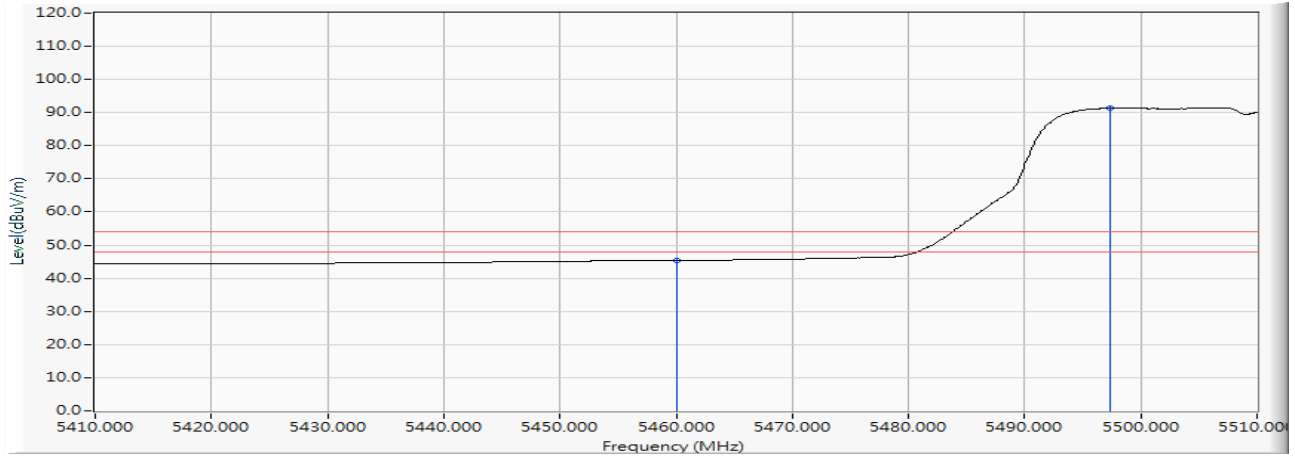


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	29.168	45.353	-8.647	54.000	AVERAGE
2	*	5497.400	16.267	75.081	91.348	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Vertical

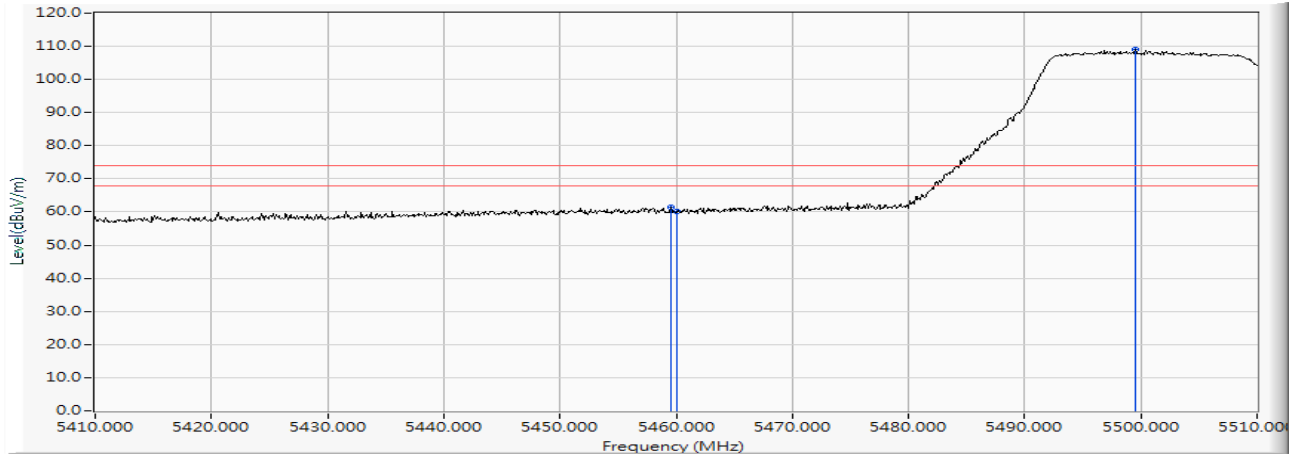


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5459.600	16.184	45.133	61.317	-12.683	74.000	PEAK
2		5460.000	16.185	43.856	60.041	-13.959	74.000	PEAK
3	*	5499.500	16.269	92.933	109.202	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Vertical

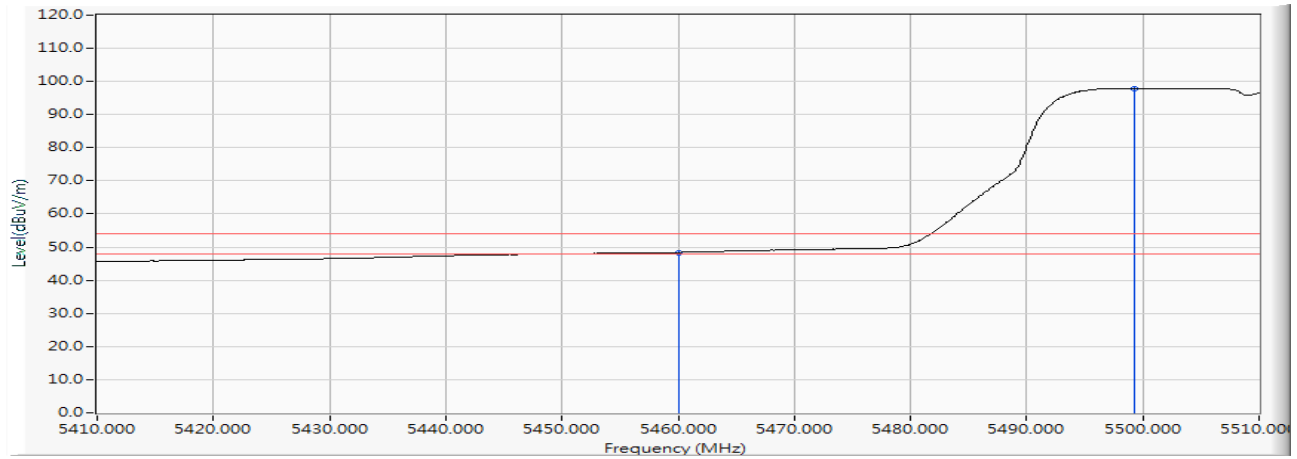


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	32.215	48.400	-5.600	54.000	AVERAGE
2	*	5499.300	16.269	81.687	97.956	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)


Horizontal

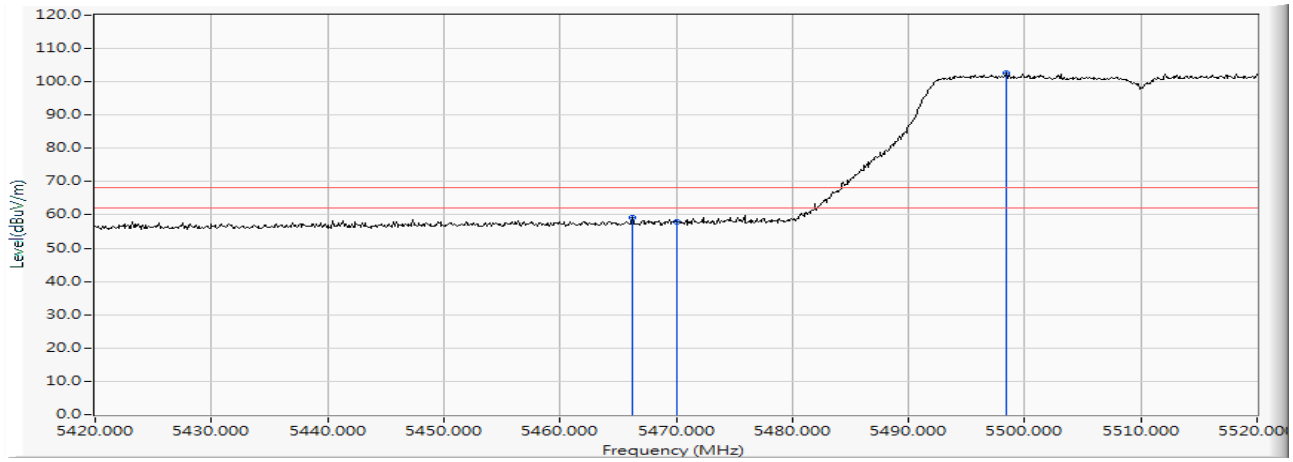

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5466.200	16.193	43.030	59.224	-8.996	68.220	PEAK
2		5470.000	16.200	41.583	57.783	-10.437	68.220	PEAK
3	*	5498.400	16.268	86.233	102.501	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)


Vertical

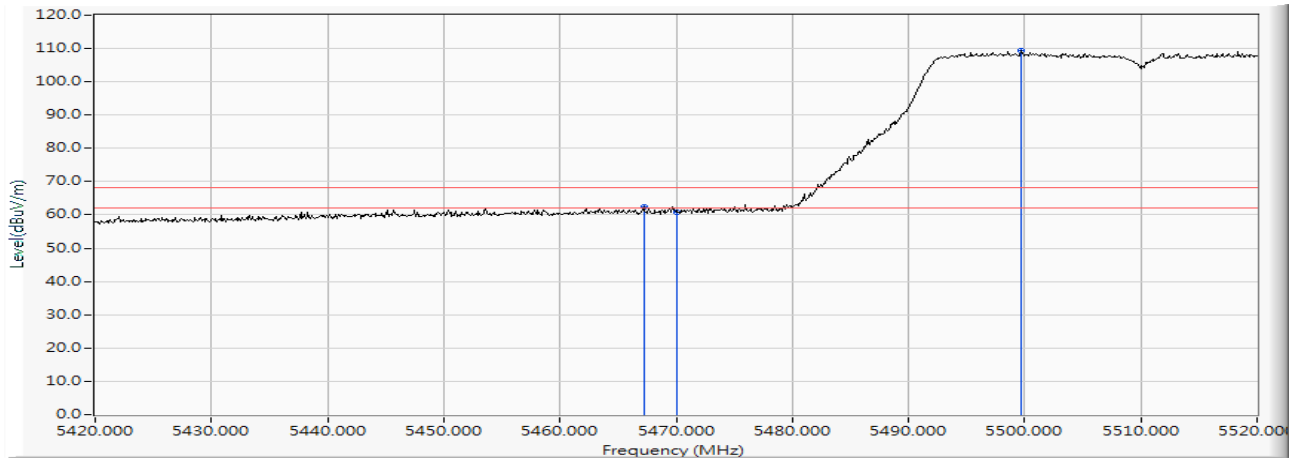

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5467.200	16.195	46.372	62.567	-5.653	68.220	PEAK
2		5470.000	16.200	44.666	60.866	-7.354	68.220	PEAK
3	*	5499.700	16.270	92.977	109.247	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)


Horizontal

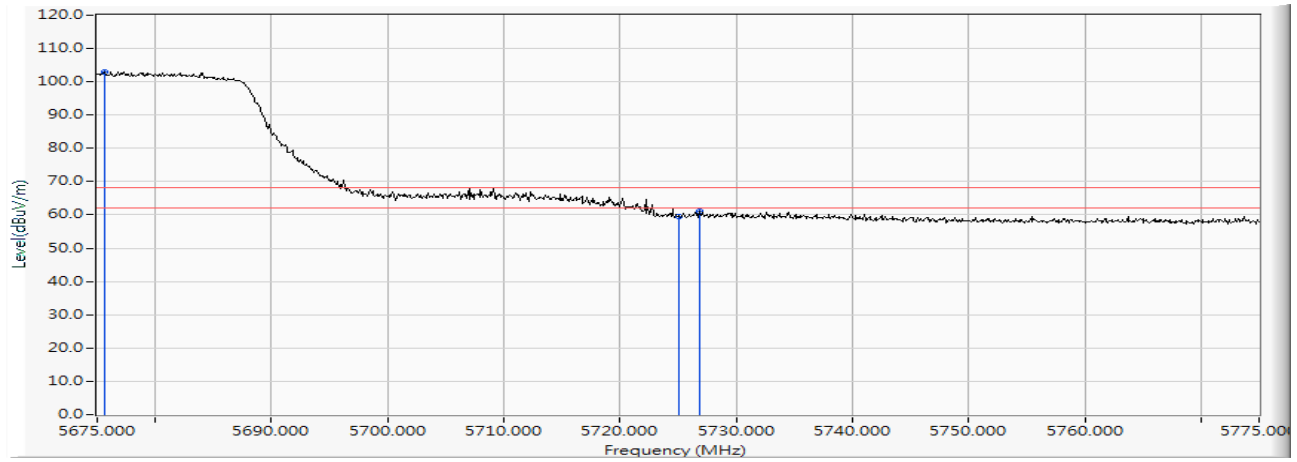

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5675.700	16.473	86.459	102.932	--	--	PEAK
2		5725.000	16.544	42.910	59.454	-8.766	68.220	PEAK
3		5726.800	16.547	44.597	61.144	-7.076	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)


Vertical

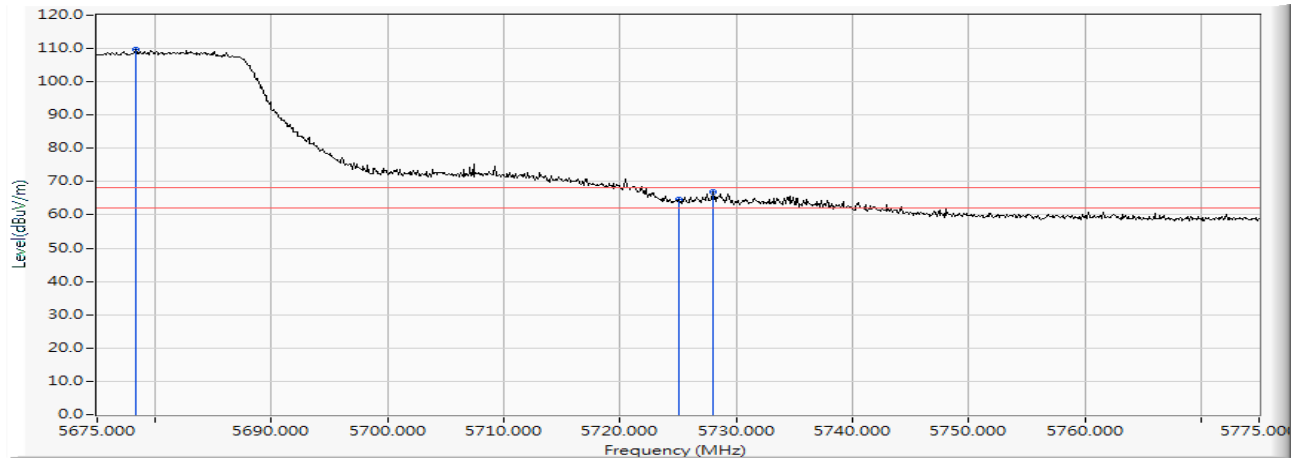

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5678.300	16.476	93.388	109.864	--	--	PEAK
2		5725.000	16.544	48.134	64.678	-3.542	68.220	PEAK
3		5728.000	16.548	50.218	66.766	-1.454	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)


Horizontal

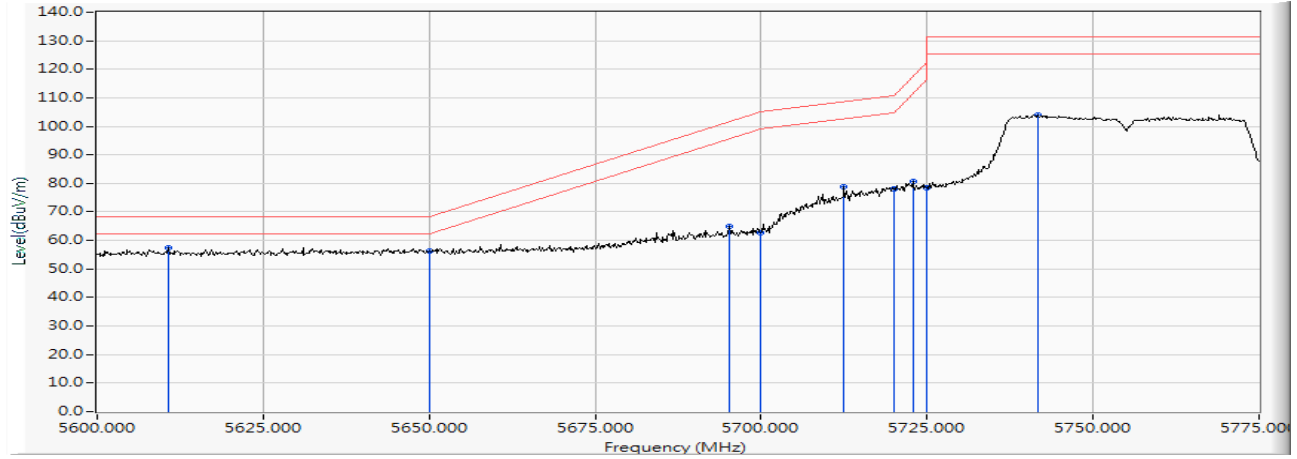

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5610.675	16.396	40.934	57.330	-10.890	68.220	PEAK
2		5650.000	16.447	39.734	56.181	-12.039	68.220	PEAK
3		5695.200	16.496	48.534	65.030	-36.620	101.650	PEAK
4		5700.000	16.502	46.220	62.722	-42.478	105.200	PEAK
5		5712.525	16.520	62.391	78.911	-29.796	108.707	PEAK
6		5720.000	16.535	61.586	78.121	-32.679	110.800	PEAK
7		5722.850	16.540	64.055	80.595	-36.703	117.298	PEAK
8		5725.000	16.544	61.819	78.363	-43.837	122.200	PEAK
9		5741.750	16.556	87.569	104.126	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)


Vertical

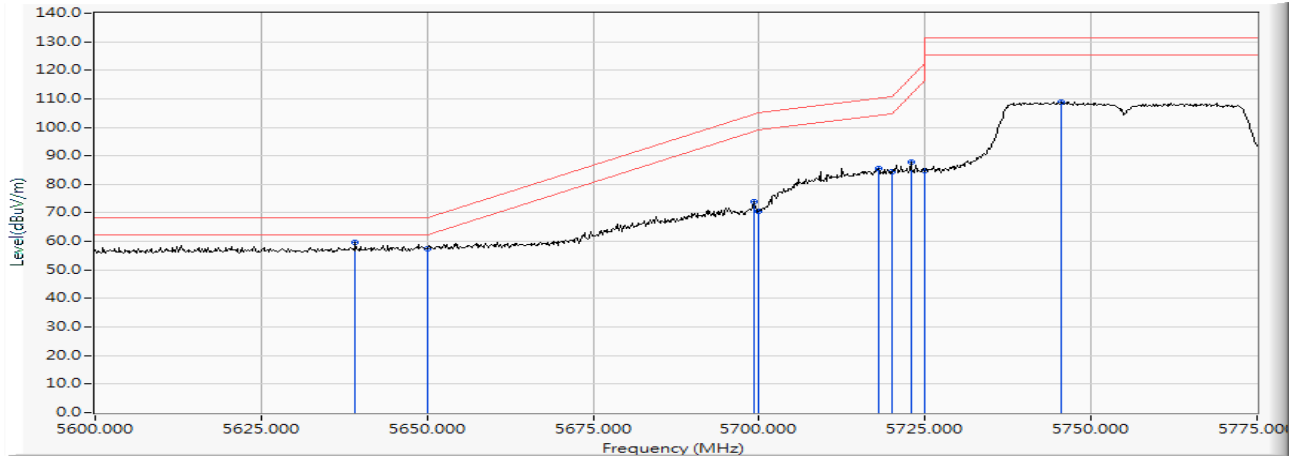

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5639.200	16.417	43.102	59.519	-8.701	68.220	PEAK
2		5650.000	16.447	41.142	57.589	-10.631	68.220	PEAK
3		5699.225	16.500	57.594	74.095	-30.532	104.627	PEAK
4		5700.000	16.502	54.204	70.706	-34.494	105.200	PEAK
5		5717.950	16.532	69.001	85.532	-24.694	110.226	PEAK
6		5720.000	16.535	67.773	84.308	-26.492	110.800	PEAK
7		5722.850	16.540	71.324	87.864	-29.434	117.298	PEAK
8		5725.000	16.544	68.290	84.834	-37.366	122.200	PEAK
9		5745.600	16.561	92.369	108.930	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)


Horizontal

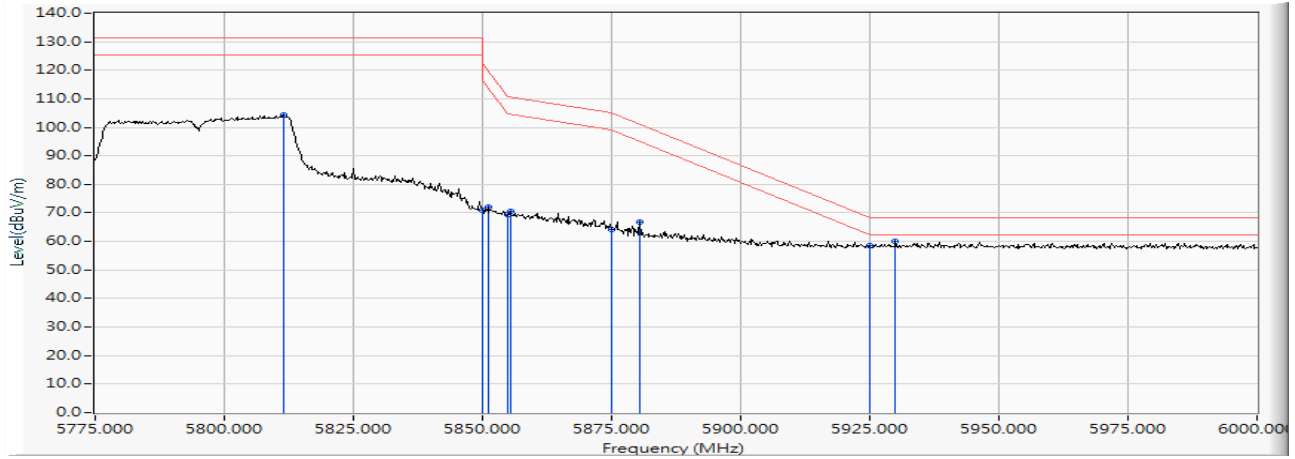

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5811.450	16.687	87.474	104.162	--	--	PEAK
2		5850.000	16.748	54.363	71.111	-51.089	122.200	PEAK
3		5851.275	16.750	55.128	71.878	-47.415	119.293	PEAK
4		5855.000	16.758	52.614	69.372	-41.428	110.800	PEAK
5		5855.325	16.759	53.635	70.394	-40.315	110.709	PEAK
6		5875.000	16.807	47.517	64.325	-40.875	105.200	PEAK
7		5880.525	16.823	50.053	66.876	-34.236	101.112	PEAK
8		5925.000	16.920	41.530	58.450	-9.750	68.200	PEAK
9	*	5930.025	16.925	42.955	59.880	-8.320	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)


Vertical

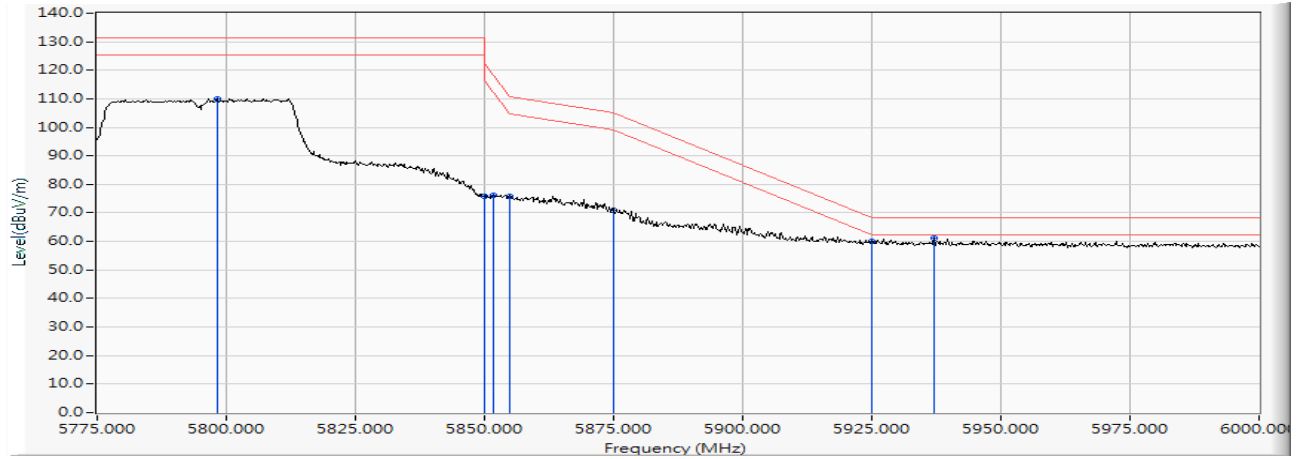

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5798.175	16.655	93.429	110.084	--	--	PEAK
2		5850.000	16.748	58.997	75.745	-46.455	122.200	PEAK
3		5851.725	16.750	59.476	76.227	-42.040	118.267	PEAK
4		5855.000	16.758	59.101	75.859	-34.941	110.800	PEAK
5		5875.000	16.807	54.289	71.097	-34.103	105.200	PEAK
6		5925.000	16.920	43.086	60.006	-8.194	68.200	PEAK
7	*	5937.000	16.933	44.199	61.132	-7.068	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

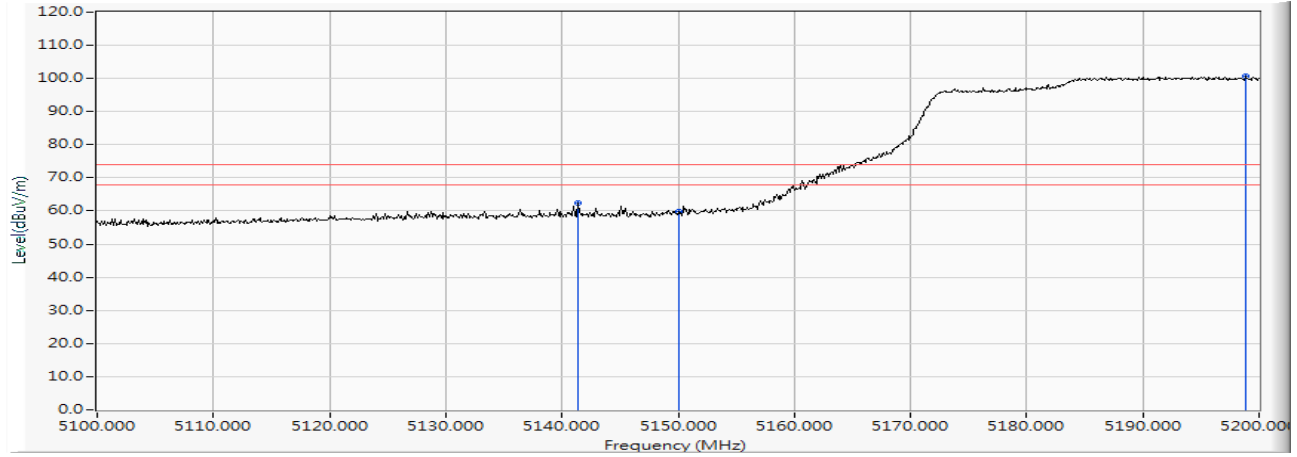


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5141.400	15.259	47.019	62.277	-11.723	74.000	PEAK
2		5150.000	15.307	44.614	59.921	-14.079	74.000	PEAK
3	*	5198.900	15.469	85.144	100.613	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

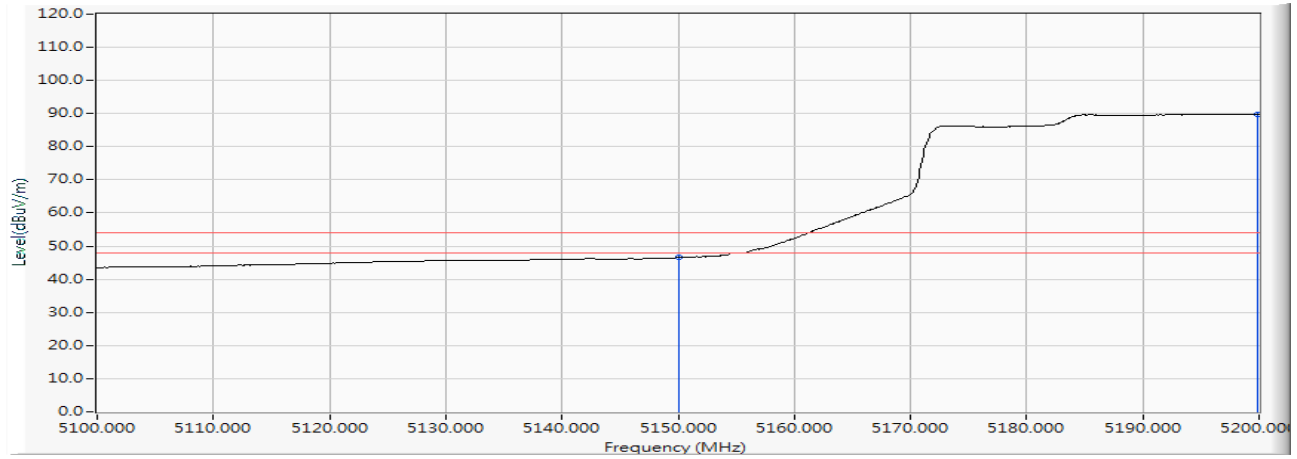


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	31.350	46.657	-7.343	54.000	AVERAGE
2	*	5199.900	15.472	74.393	89.866	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Vertical

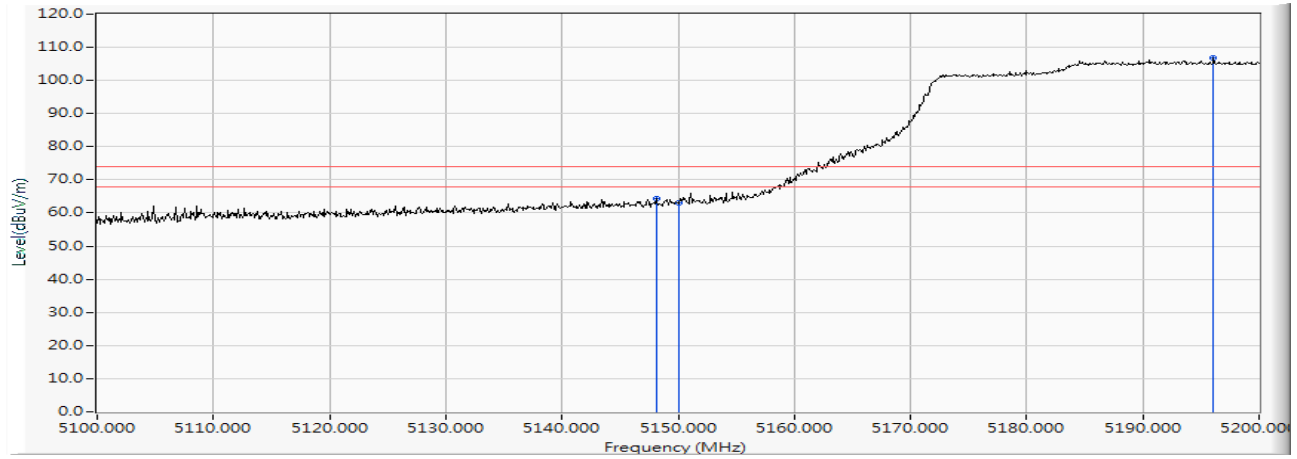


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.100	15.296	49.140	64.436	-9.564	74.000	PEAK
2		5150.000	15.307	47.712	63.019	-10.981	74.000	PEAK
3	*	5196.100	15.457	91.323	106.781	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Vertical

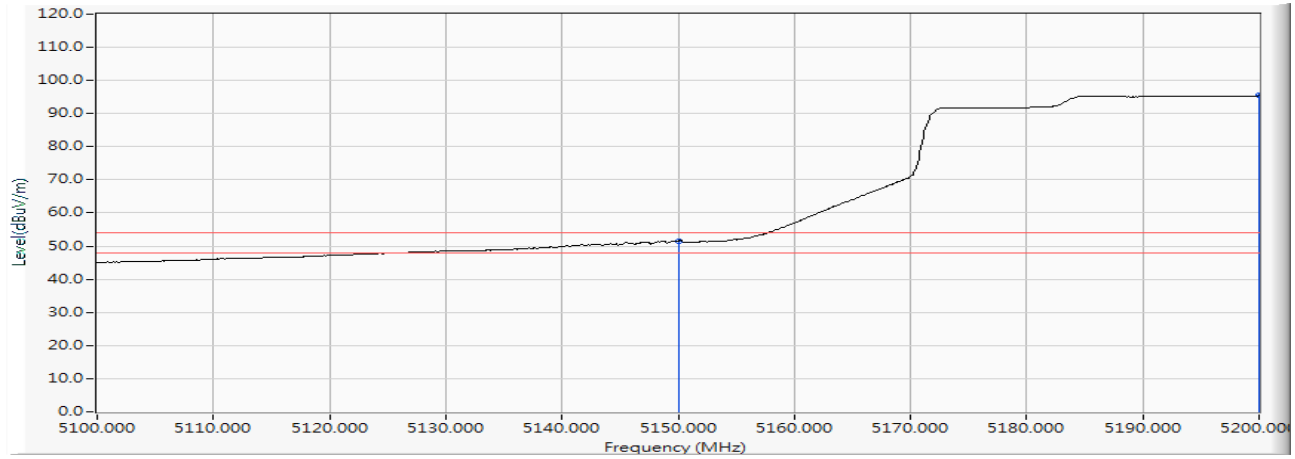


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	36.293	51.600	-2.400	54.000	AVERAGE
2	*	5200.000	15.473	79.935	95.408	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

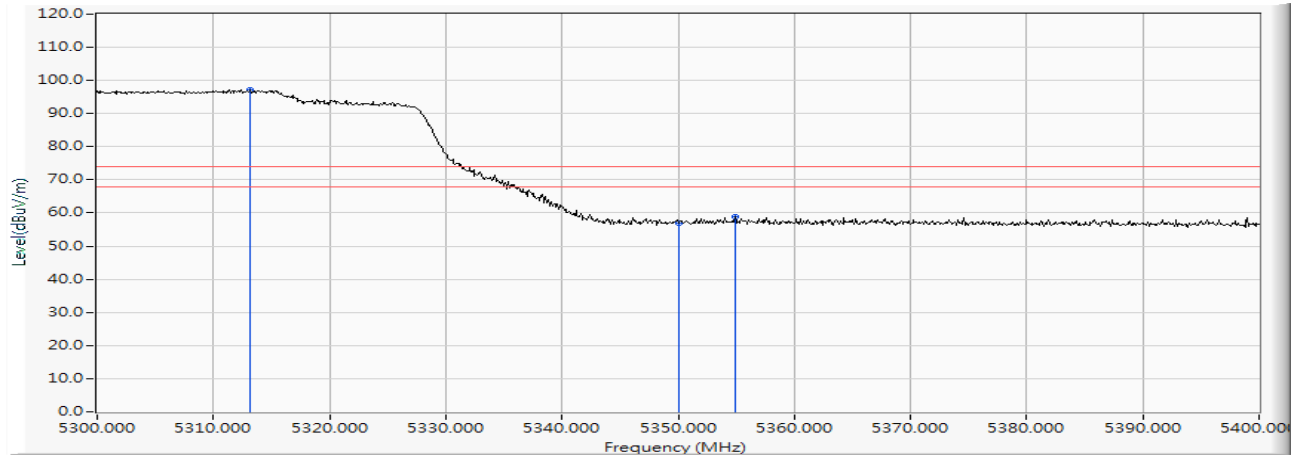


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.200	15.828	81.424	97.252	--	--	PEAK
2		5350.000	15.912	41.003	56.915	-17.085	74.000	PEAK
3		5354.900	15.927	42.919	58.846	-15.154	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

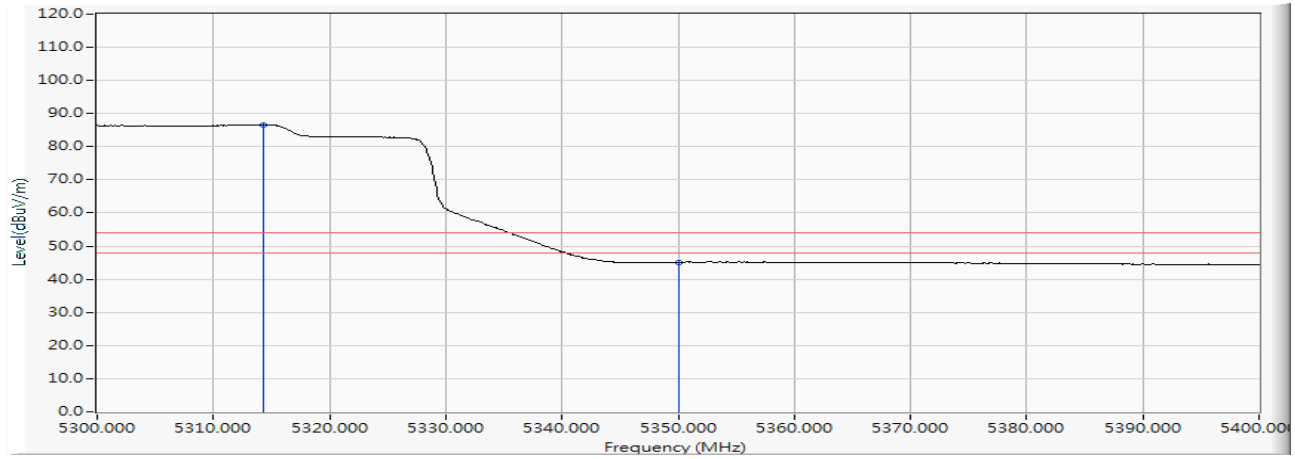


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.300	15.832	70.757	86.588	--	--	AVERAGE
2		5350.000	15.912	29.202	45.114	-8.886	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Vertical

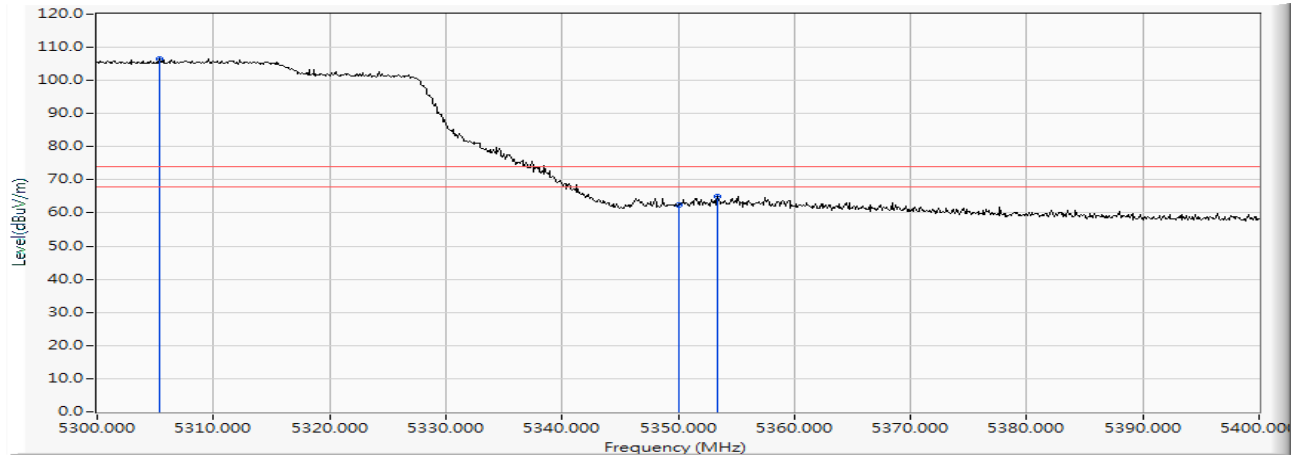


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5305.400	15.810	90.587	106.396	--	--	PEAK
2		5350.000	15.912	46.614	62.526	-11.474	74.000	PEAK
3		5353.400	15.923	49.127	65.050	-8.950	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Vertical

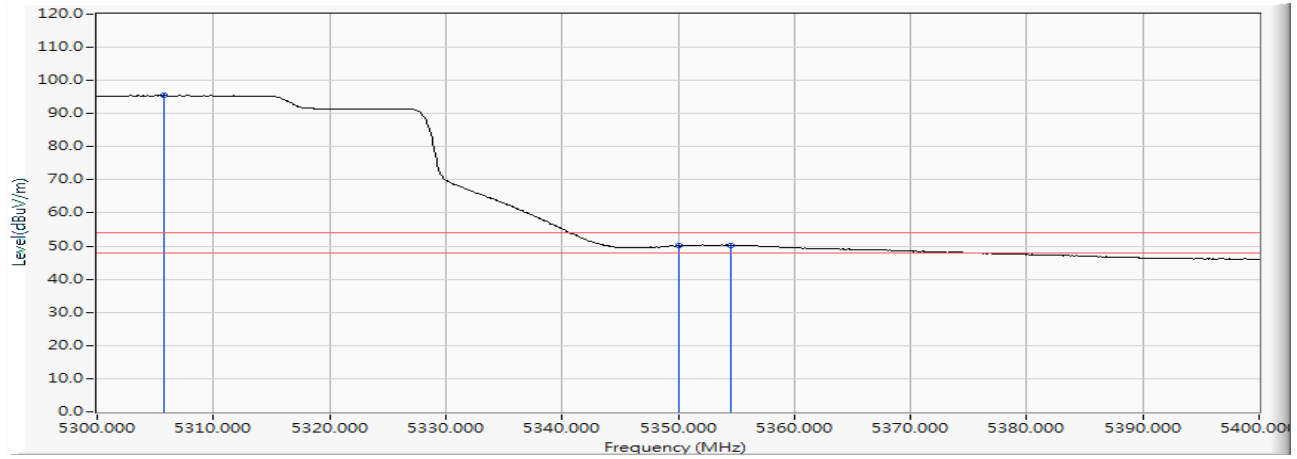


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5305.800	15.811	79.648	95.458	--	--	AVERAGE
2		5350.000	15.912	34.149	50.061	-3.939	54.000	AVERAGE
3		5354.500	15.927	34.410	50.336	-3.664	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

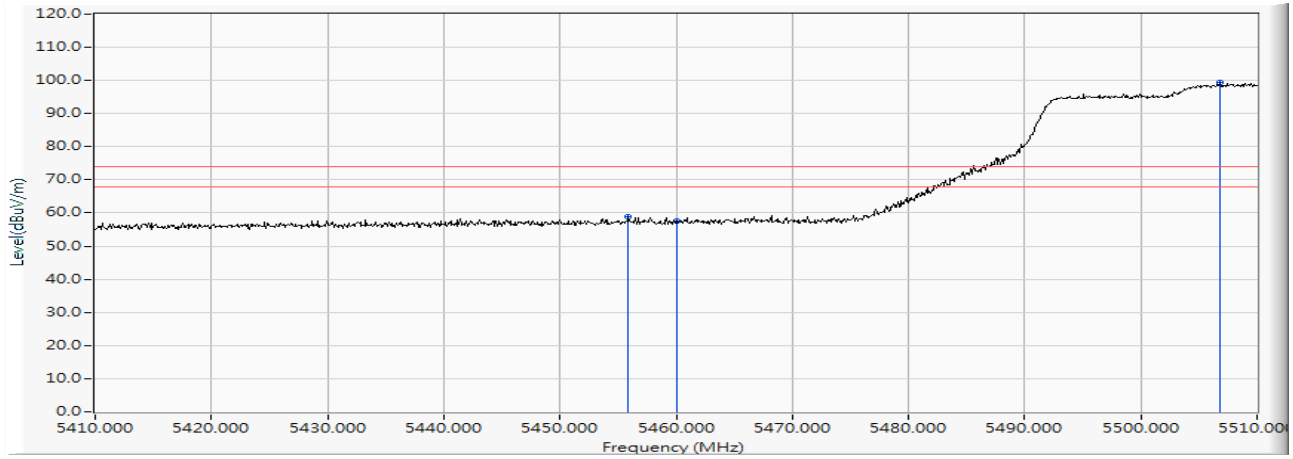


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5455.900	16.177	42.749	58.926	-15.074	74.000	PEAK
2		5460.000	16.185	41.391	57.576	-16.424	74.000	PEAK
3	*	5506.800	16.273	83.226	99.499	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

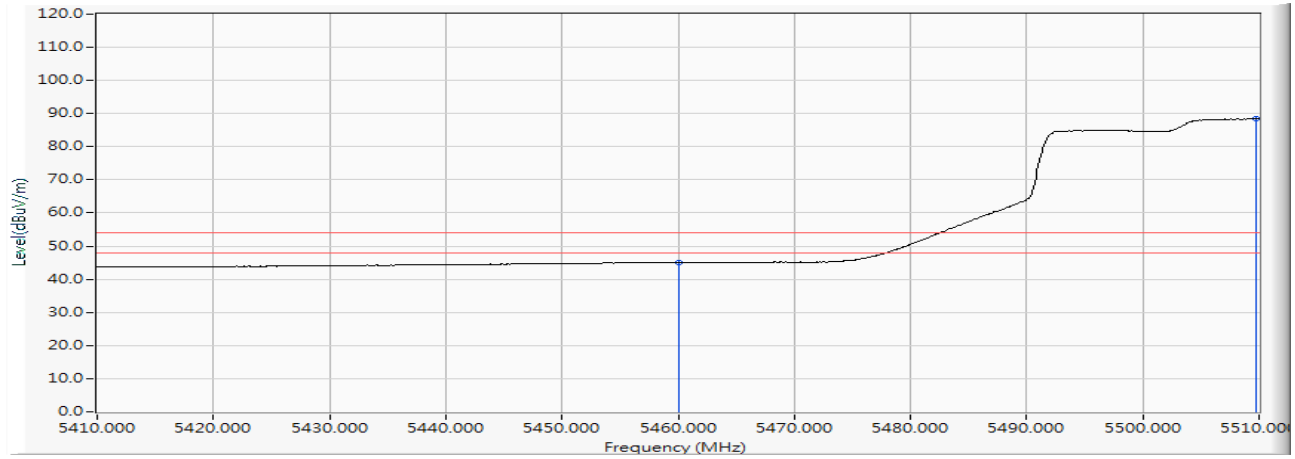


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	28.708	44.893	-9.107	54.000	AVERAGE
2	*	5509.800	16.275	72.133	88.408	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Vertical

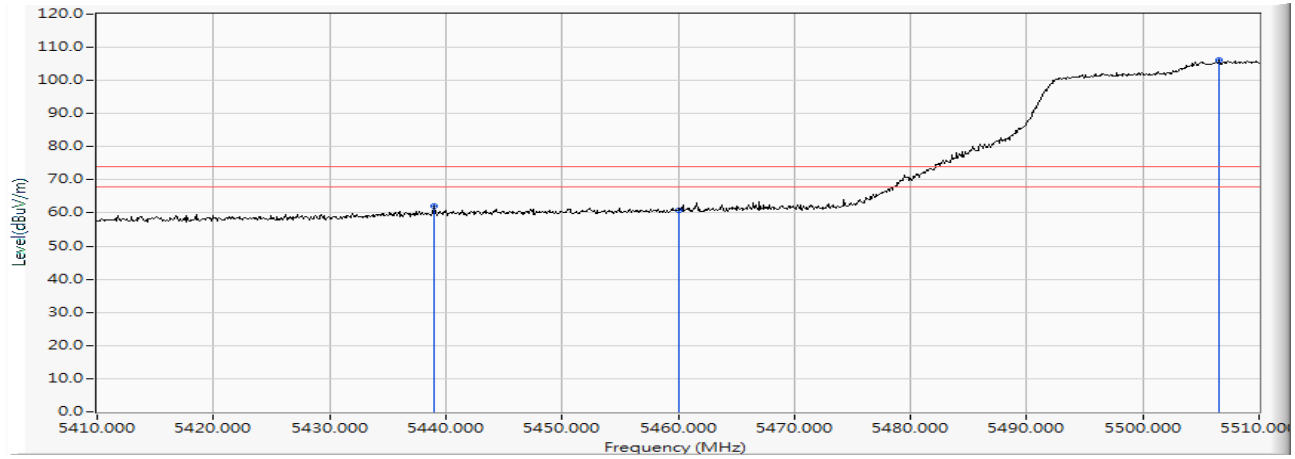


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5439.000	16.121	45.991	62.113	-11.887	74.000	PEAK
2		5460.000	16.185	44.645	60.830	-13.170	74.000	PEAK
3	*	5506.600	16.273	89.954	106.227	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Vertical

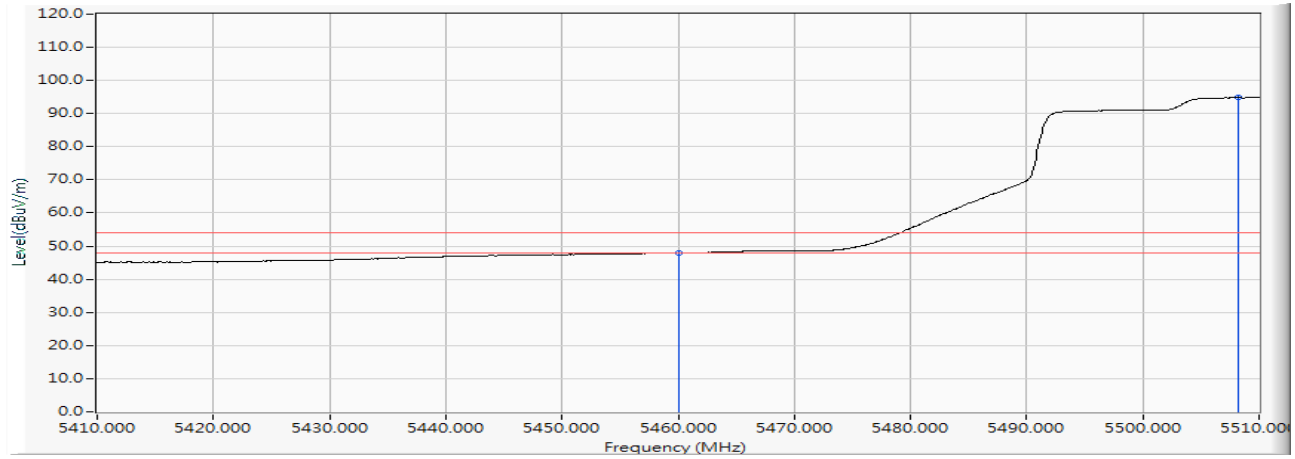


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	31.701	47.886	-6.114	54.000	AVERAGE
2	*	5508.200	16.275	78.578	94.852	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)


Horizontal

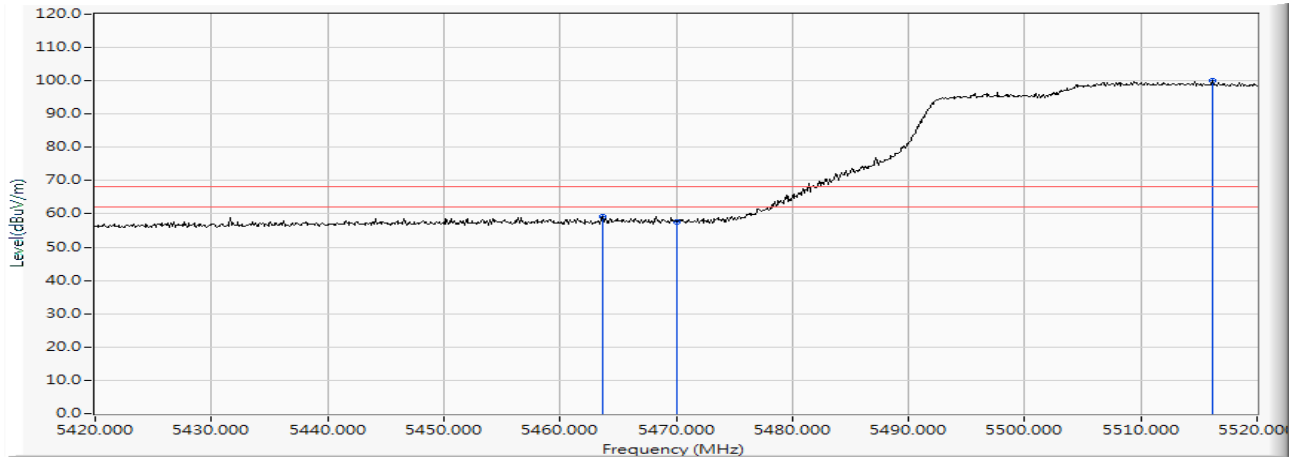

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5463.700	16.190	43.166	59.356	-8.864	68.220	PEAK
2		5470.000	16.200	41.434	57.634	-10.586	68.220	PEAK
3	*	5516.200	16.286	83.756	100.041	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)


Vertical

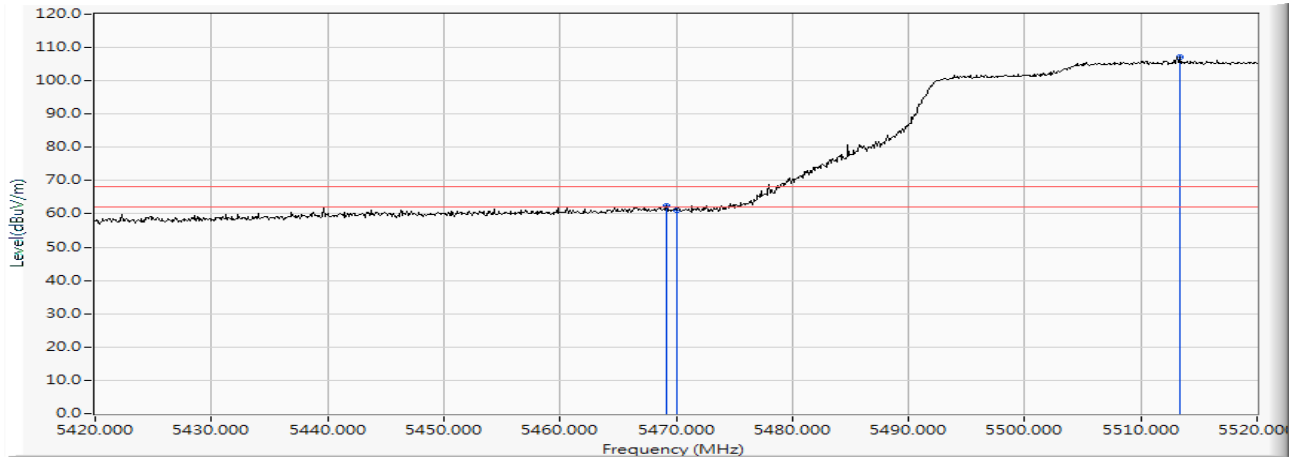

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5469.200	16.198	46.331	62.529	-5.691	68.220	PEAK
2		5470.000	16.200	45.008	61.208	-7.012	68.220	PEAK
3	*	5513.400	16.281	90.798	107.078	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)


Horizontal

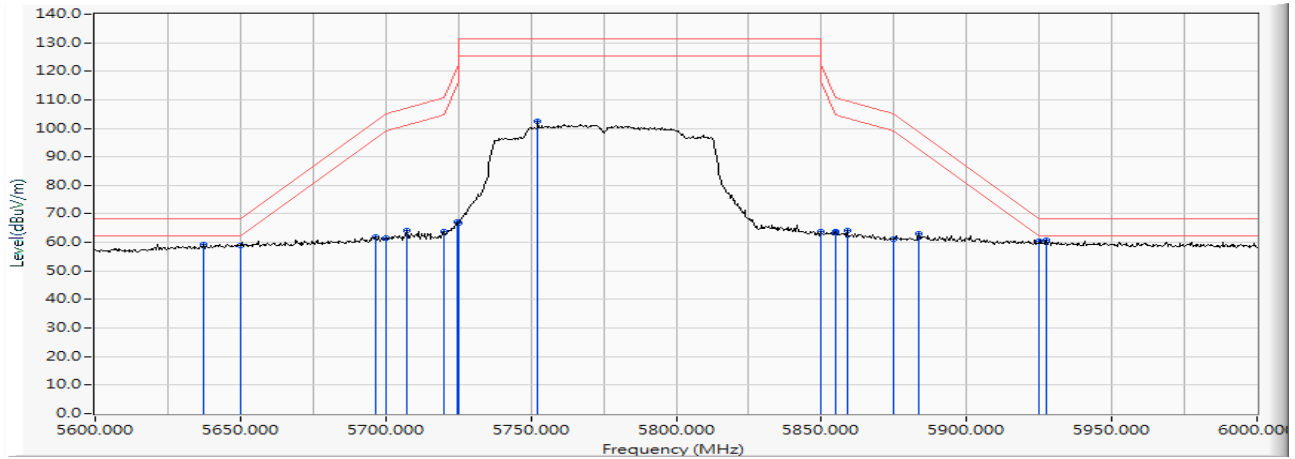

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5637.200	16.412	43.073	59.485	-8.735	68.220	PEAK
2		5650.000	16.447	42.431	58.878	-9.342	68.220	PEAK
3		5696.400	16.496	45.526	62.023	-40.514	102.537	PEAK
4		5700.000	16.502	44.970	61.472	-43.728	105.200	PEAK
5		5707.200	16.511	47.607	64.118	-43.098	107.216	PEAK
6		5720.000	16.535	47.362	63.897	-46.903	110.800	PEAK
7		5724.800	16.544	50.632	67.176	-54.568	121.744	PEAK
8		5725.000	16.544	50.451	66.995	-55.205	122.200	PEAK
9		5752.400	16.571	85.839	102.411	--	--	PEAK
10		5850.000	16.748	47.025	63.773	-58.427	122.200	PEAK
11		5854.800	16.758	47.146	63.904	-47.352	111.256	PEAK
12		5855.000	16.758	46.534	63.292	-47.508	110.800	PEAK
13		5858.800	16.767	47.523	64.290	-45.446	109.736	PEAK
14		5875.000	16.807	44.240	61.048	-44.152	105.200	PEAK
15		5883.600	16.832	46.235	63.067	-35.769	98.836	PEAK
16		5925.000	16.920	43.424	60.344	-7.856	68.200	PEAK
17	*	5927.600	16.922	43.723	60.646	-7.554	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)


Vertical

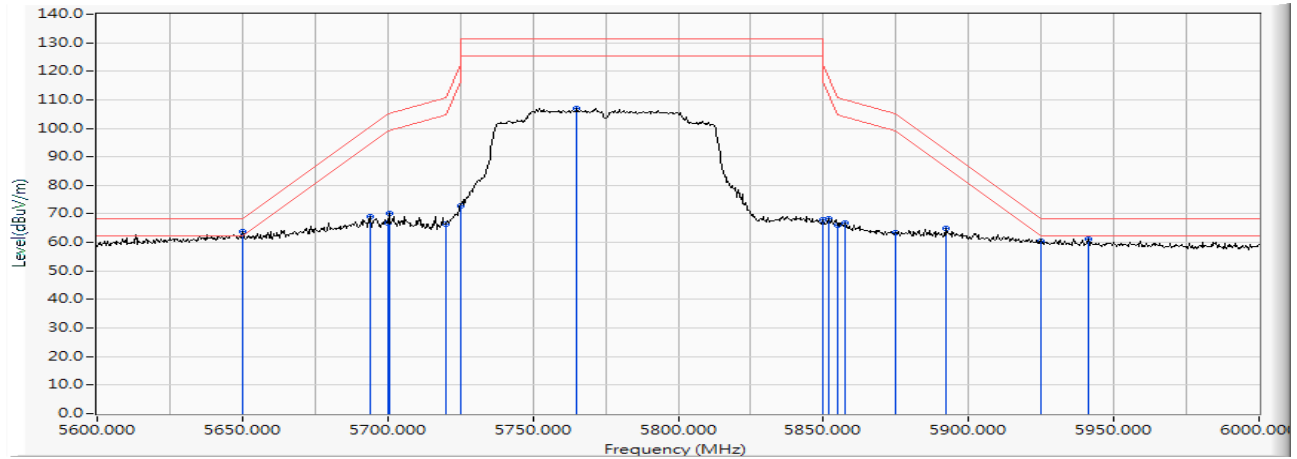

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5650.000	16.447	47.289	63.736	-4.484	68.220	PEAK
2		5694.000	16.493	52.461	68.955	-31.807	100.762	PEAK
3		5700.000	16.502	50.357	66.859	-38.341	105.200	PEAK
4		5700.400	16.502	53.675	70.177	-35.135	105.312	PEAK
5		5720.000	16.535	49.943	66.478	-44.322	110.800	PEAK
6		5725.000	16.544	56.268	72.812	-49.388	122.200	PEAK
7		5765.200	16.591	90.443	107.034	--	--	PEAK
8		5850.000	16.748	51.086	67.834	-54.366	122.200	PEAK
9		5851.600	16.750	51.420	68.171	-50.381	118.552	PEAK
10		5855.000	16.758	49.450	66.208	-44.592	110.800	PEAK
11		5857.600	16.764	50.150	66.914	-43.158	110.072	PEAK
12		5875.000	16.807	46.590	63.398	-41.802	105.200	PEAK
13		5892.000	16.850	47.998	64.848	-27.772	92.620	PEAK
14		5925.000	16.920	43.581	60.501	-7.699	68.200	PEAK
15		5941.200	16.938	44.363	61.301	-6.899	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

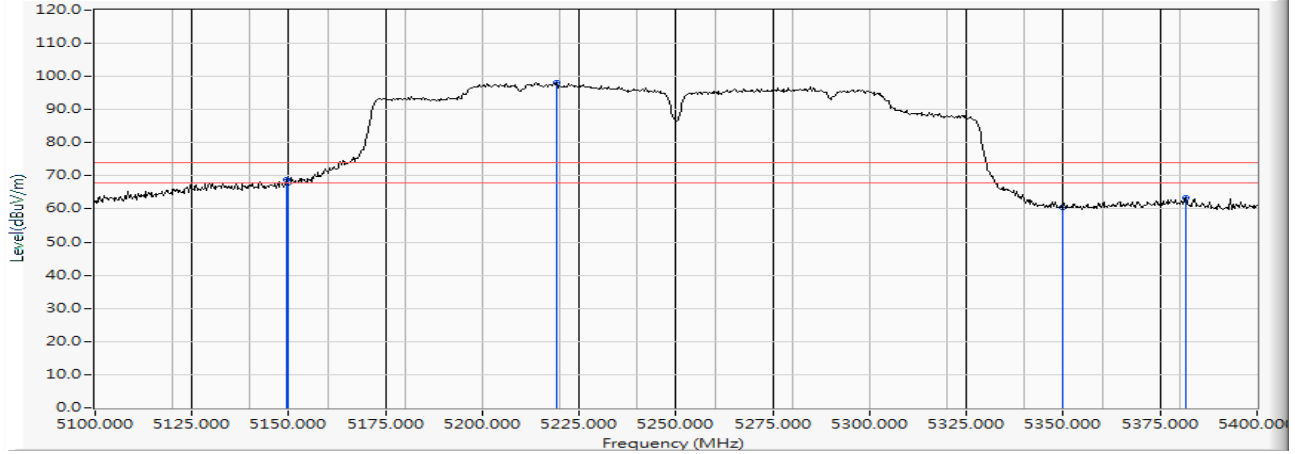


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.500	15.304	53.647	68.951	-5.049	74.000	PEAK
2		5150.000	15.307	52.415	67.722	-6.278	74.000	PEAK
3	*	5219.100	15.565	82.509	98.074	--	--	PEAK
4		5350.000	15.912	44.685	60.597	-13.403	74.000	PEAK
5		5381.700	16.004	47.320	63.324	-10.676	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

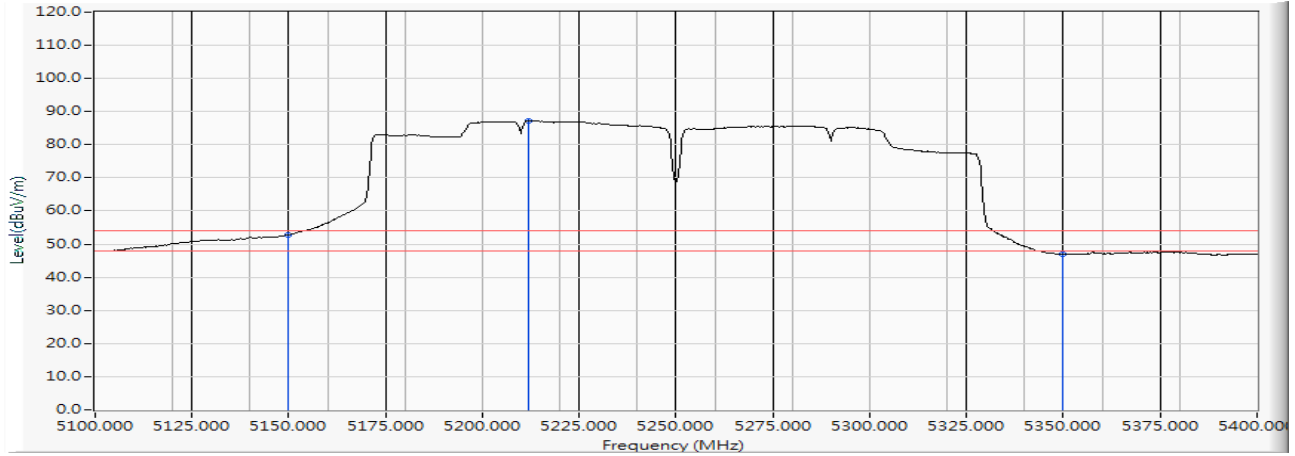


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	37.535	52.842	-1.158	54.000	AVERAGE
2	*	5211.900	15.527	71.754	87.281	--	--	AVERAGE
3		5350.000	15.912	31.046	46.958	-7.042	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Vertical

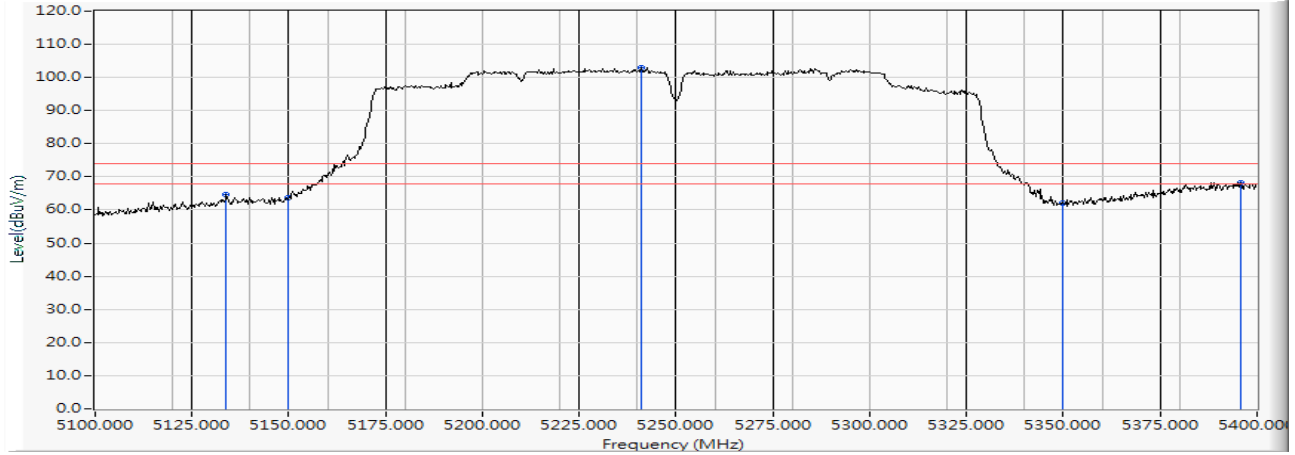


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5133.900	15.217	49.328	64.544	-9.456	74.000	PEAK
2		5150.000	15.307	48.342	63.649	-10.351	74.000	PEAK
3	*	5241.000	15.635	87.397	103.032	--	--	PEAK
4		5350.000	15.912	46.194	62.106	-11.894	74.000	PEAK
5		5395.800	16.024	52.117	68.141	-5.859	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/22
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Vertical

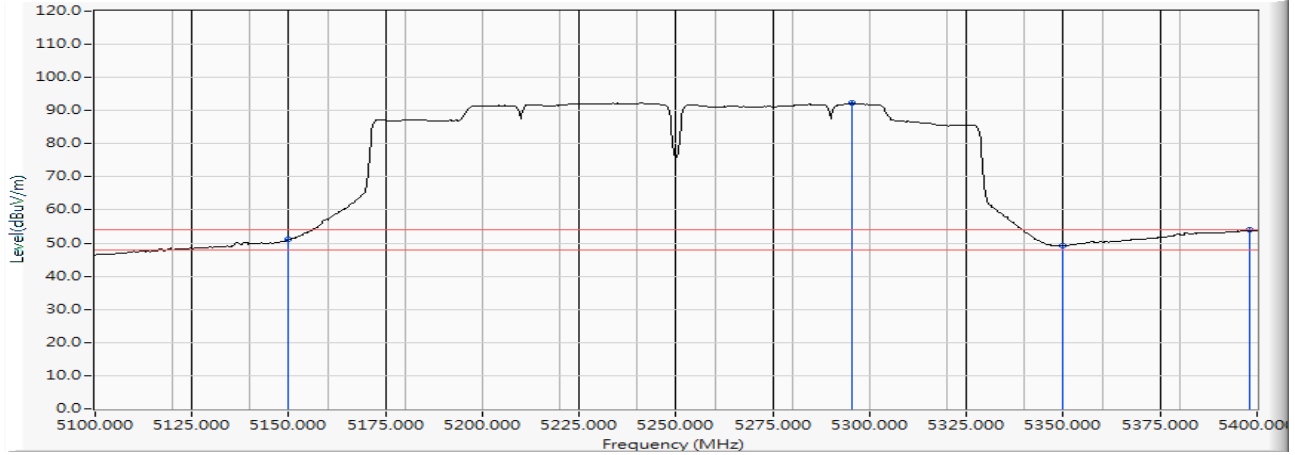


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	35.726	51.033	-2.967	54.000	AVERAGE
2	*	5295.300	15.785	76.438	92.222	--	--	AVERAGE
3		5350.000	15.912	33.222	49.134	-4.866	54.000	AVERAGE
4		5398.200	16.026	37.945	53.971	-0.029	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

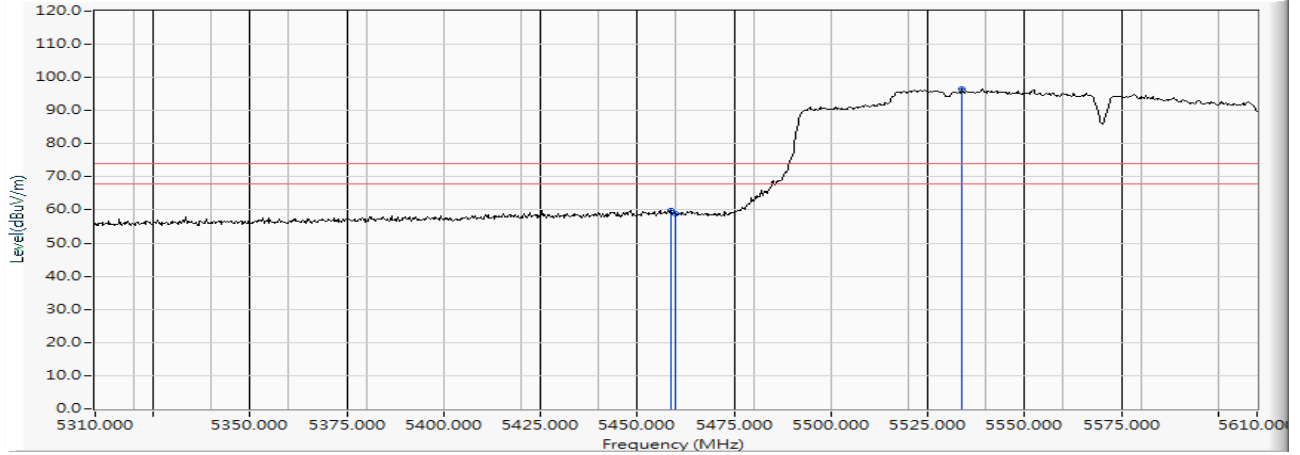


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.500	16.183	43.728	59.910	-14.090	74.000	PEAK
2		5460.000	16.185	42.589	58.774	-15.226	74.000	PEAK
3	*	5533.800	16.313	80.277	96.590	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

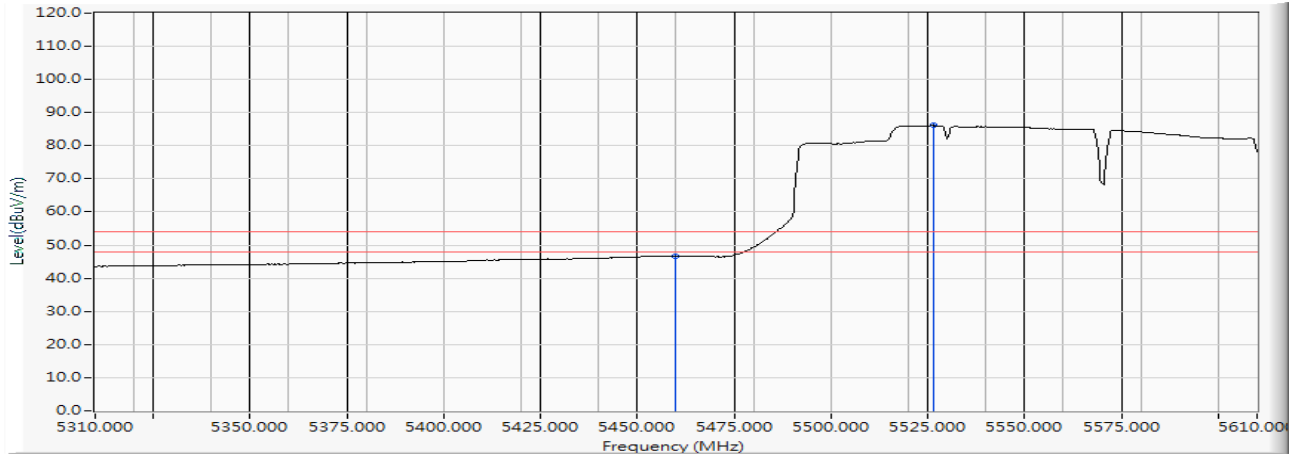


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	30.464	46.649	-7.351	54.000	AVERAGE
2	*	5526.300	16.303	69.880	86.183	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Vertical

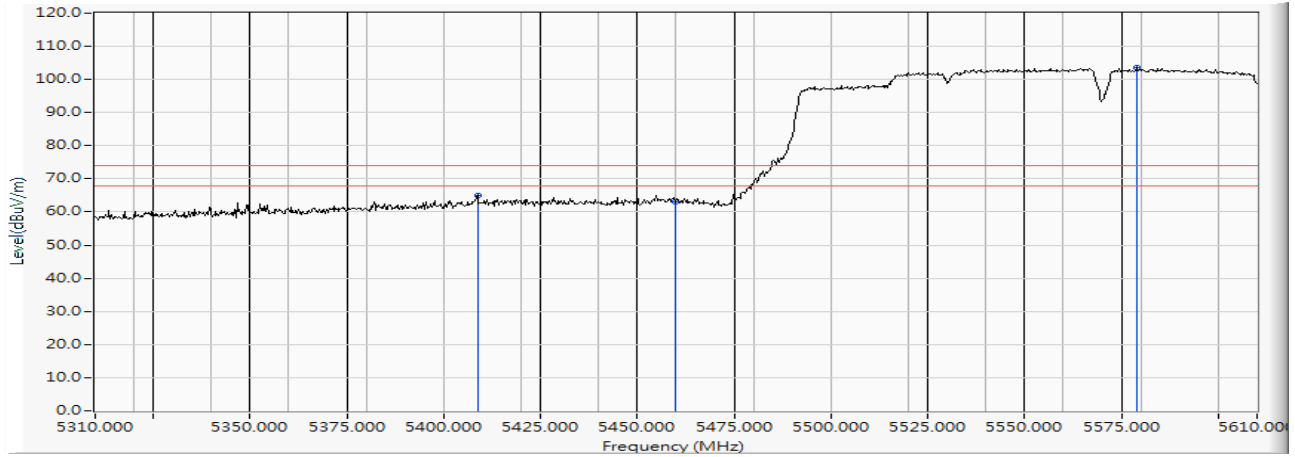


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5408.700	16.049	48.987	65.035	-8.965	74.000	PEAK
2		5460.000	16.185	46.936	63.121	-10.879	74.000	PEAK
3	*	5578.800	16.360	87.175	103.535	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Vertical

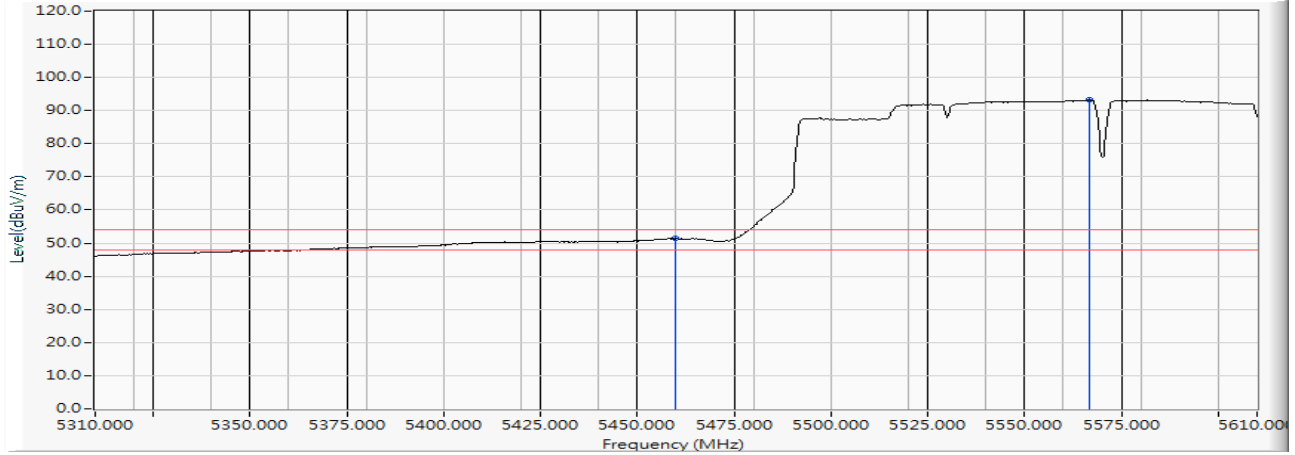


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	35.179	51.364	-2.636	54.000	AVERAGE
2	*	5566.800	16.330	76.954	93.285	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)


Horizontal

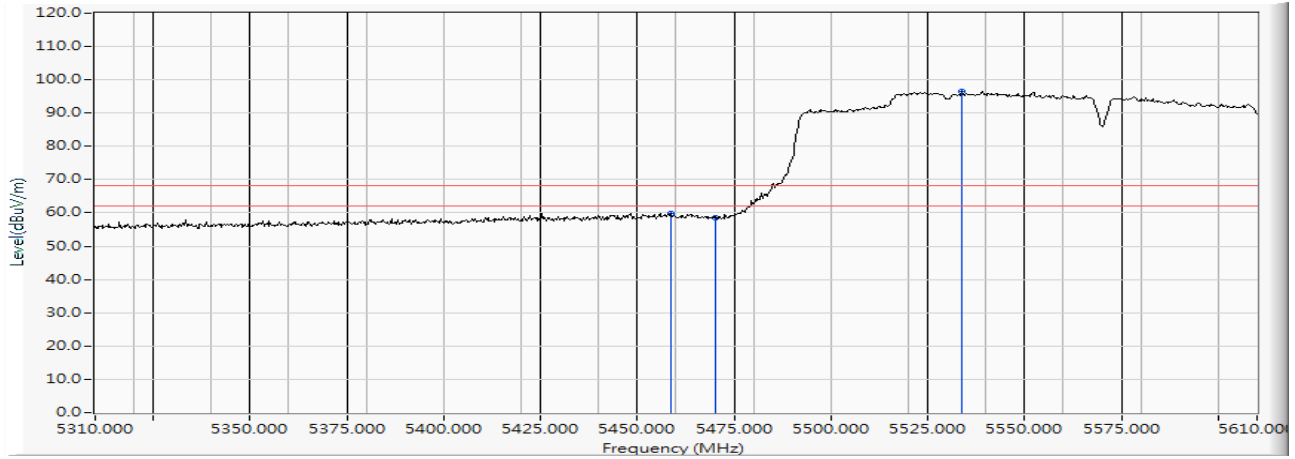

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.500	16.183	43.728	59.910	-8.310	68.220	PEAK
2		5470.000	16.200	42.340	58.540	-9.680	68.220	PEAK
3	*	5533.800	16.313	80.277	96.590	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/23
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)


Vertical

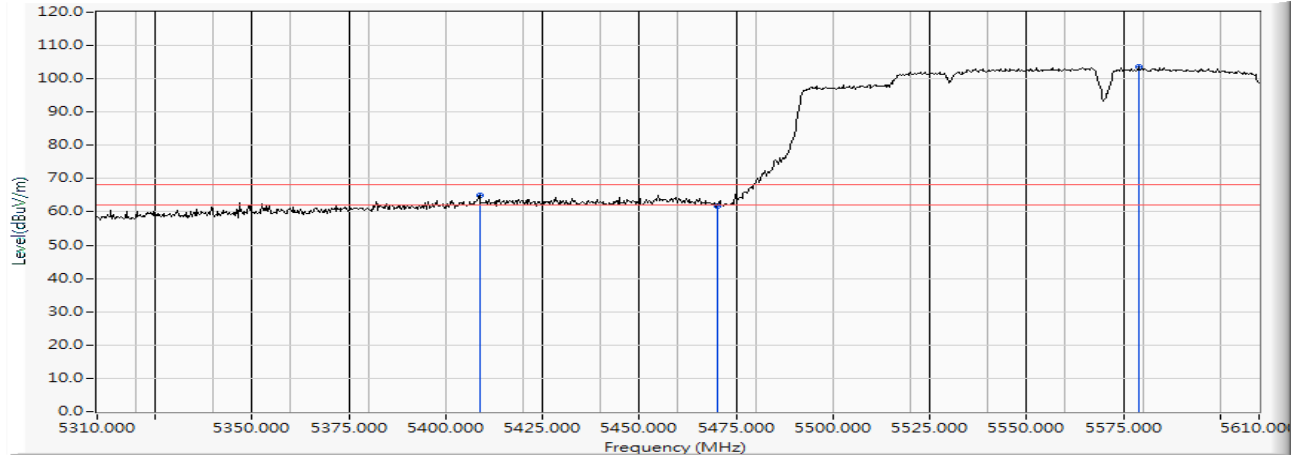

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5408.700	16.049	48.987	65.035	-3.185	68.220	PEAK
2		5470.000	16.200	45.557	61.757	-6.463	68.220	PEAK
3	*	5578.800	16.360	87.175	103.535	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

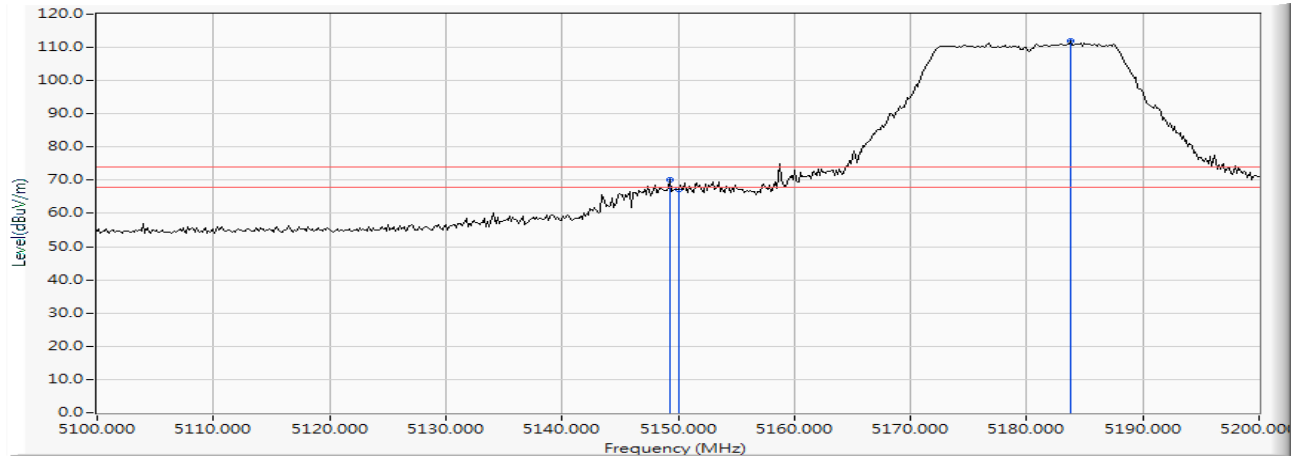


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.275	15.303	54.746	70.049	-3.951	74.000	PEAK
2		5150.000	15.307	51.840	67.147	-6.853	74.000	PEAK
3	*	5183.768	15.409	96.633	112.042	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

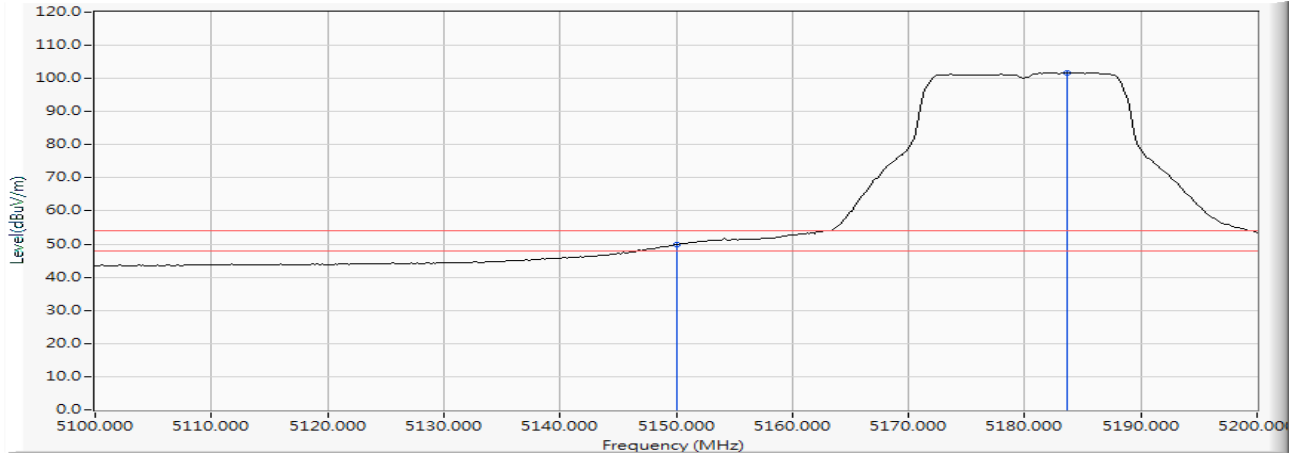


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	34.442	49.749	-4.251	54.000	AVERAGE
2	*	5183.623	15.408	86.311	101.719	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

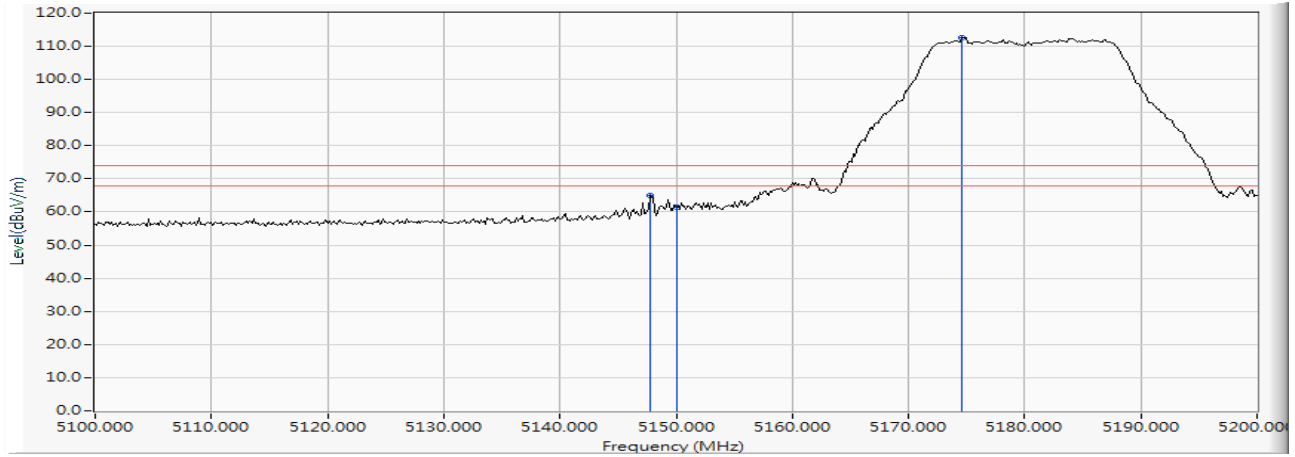


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5147.826	15.295	49.572	64.867	-9.133	74.000	PEAK
2		5150.000	15.307	46.206	61.513	-12.487	74.000	PEAK
3	*	5174.638	15.368	97.354	112.722	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

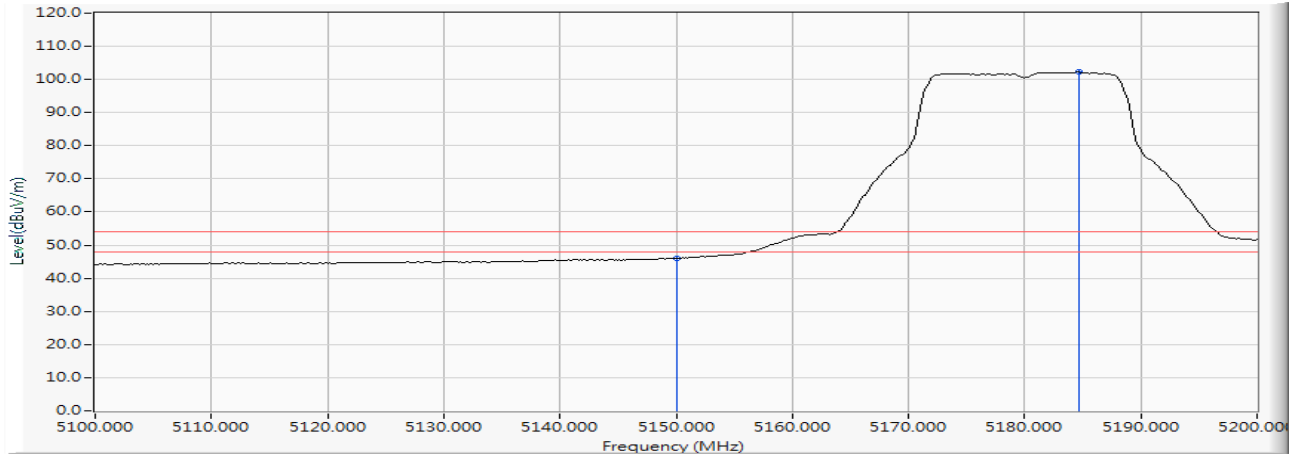


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	30.697	46.004	-7.996	54.000	AVERAGE
2	*	5184.638	15.412	86.776	102.189	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

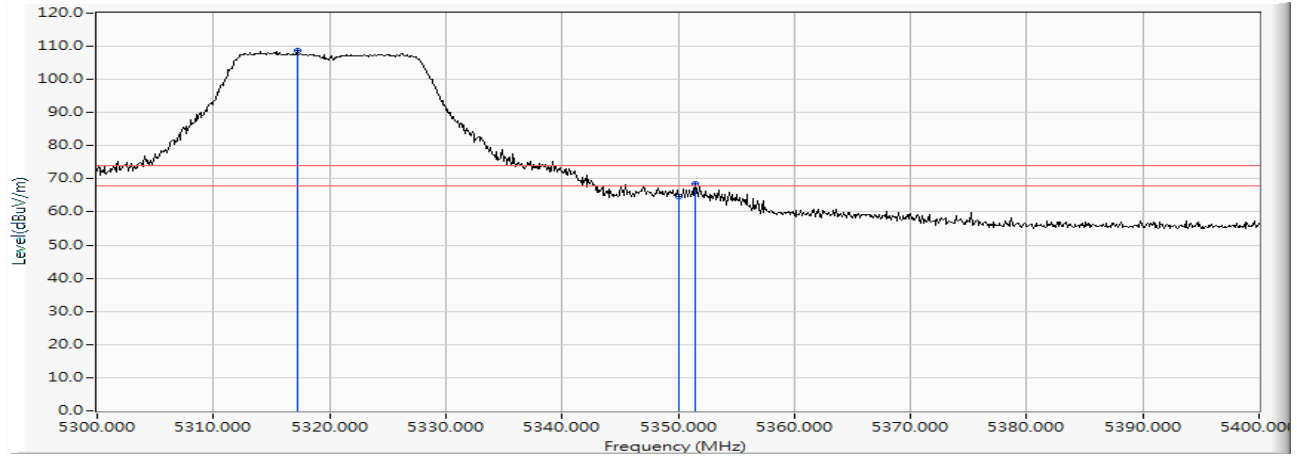


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5317.200	15.840	92.780	108.621	--	--	PEAK
2		5350.000	15.912	48.737	64.649	-9.351	74.000	PEAK
3		5351.500	15.917	52.521	68.438	-5.562	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

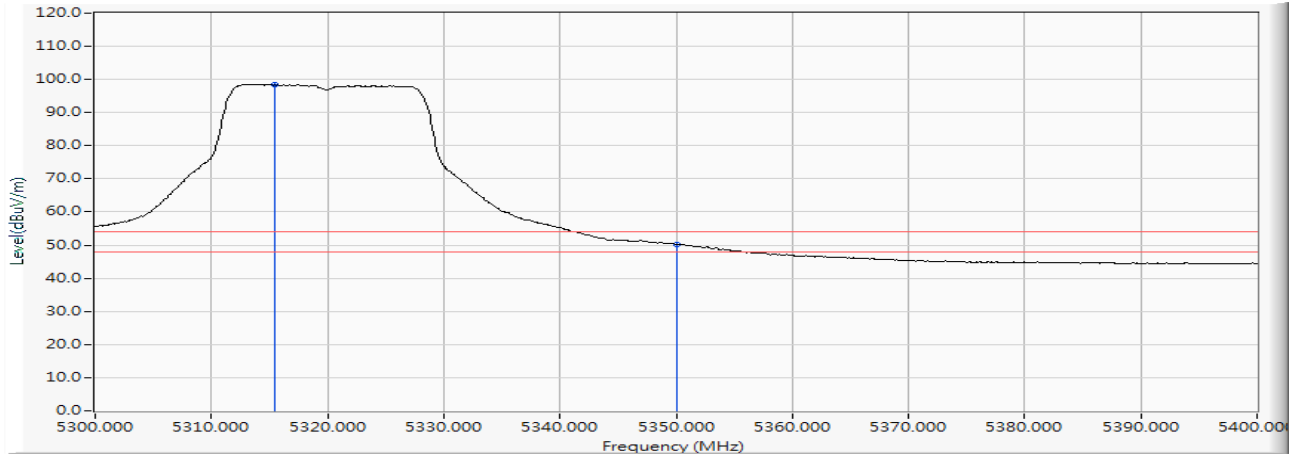


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5315.500	15.835	82.743	98.578	--	--	AVERAGE
2		5350.000	15.912	34.221	50.133	-3.867	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Vertical

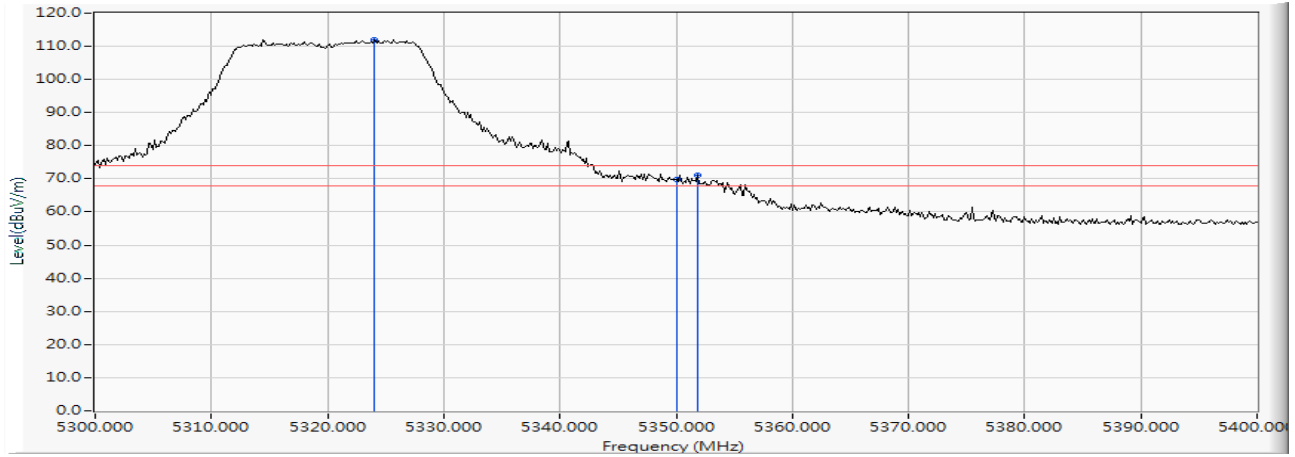


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5324.058	15.863	96.137	112.000	--	--	PEAK
2		5350.000	15.912	53.996	69.908	-4.092	74.000	PEAK
3		5351.884	15.918	55.341	71.259	-2.741	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Vertical

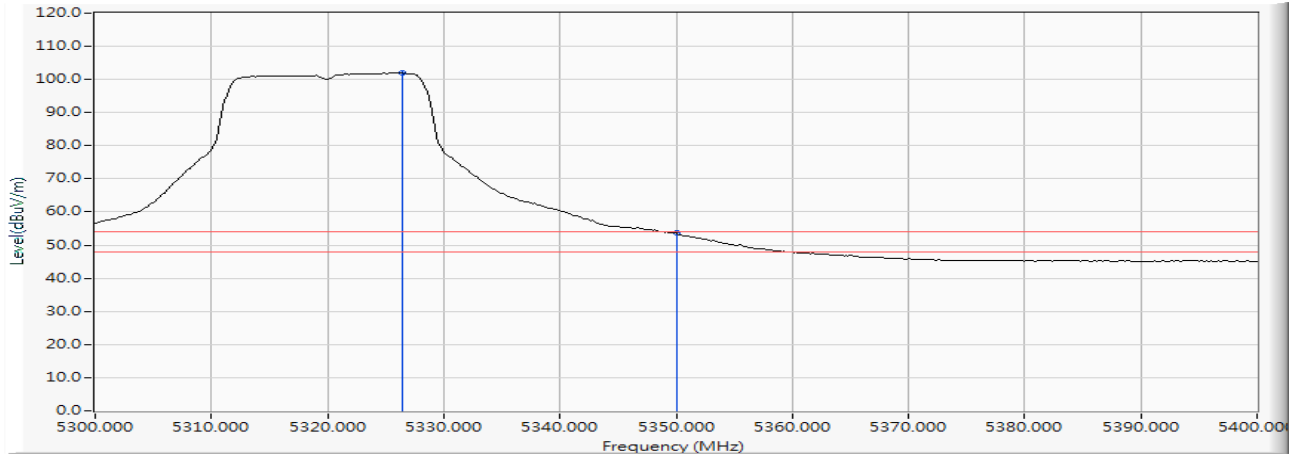


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5326.377	15.870	86.166	102.036	--	--	AVERAGE
2		5350.000	15.912	37.688	53.600	-0.400	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

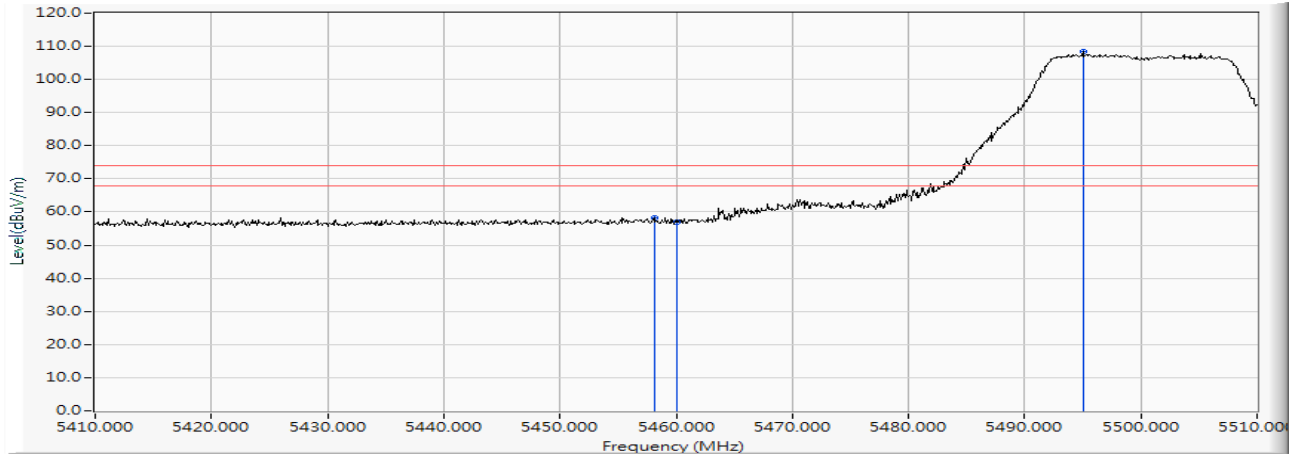


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.100	16.182	42.204	58.386	-15.614	74.000	PEAK
2		5460.000	16.185	40.808	56.993	-17.007	74.000	PEAK
3	*	5495.000	16.263	92.256	108.520	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

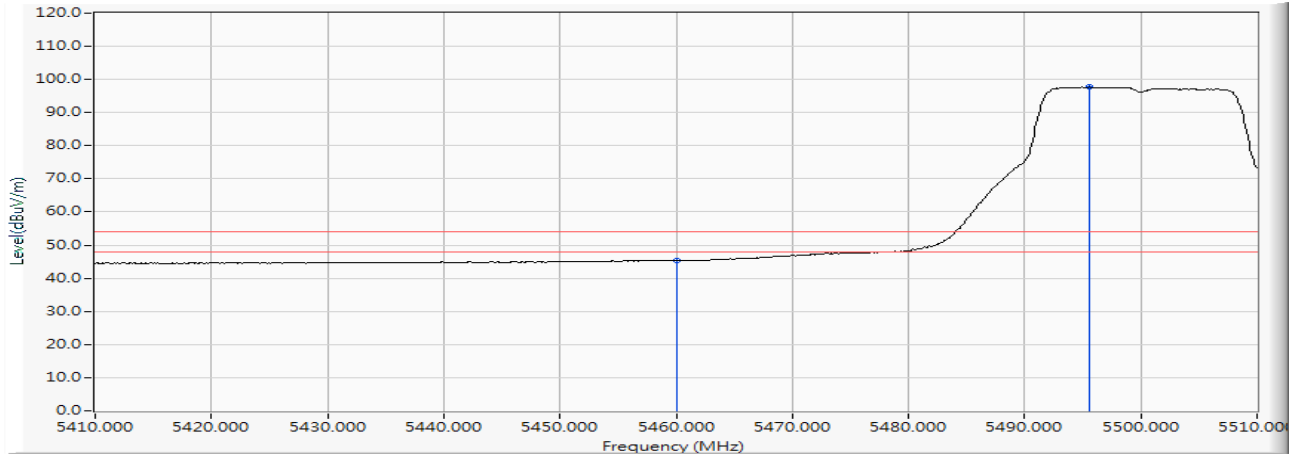


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	29.133	45.318	-8.682	54.000	AVERAGE
2	*	5495.600	16.265	81.403	97.668	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Vertical

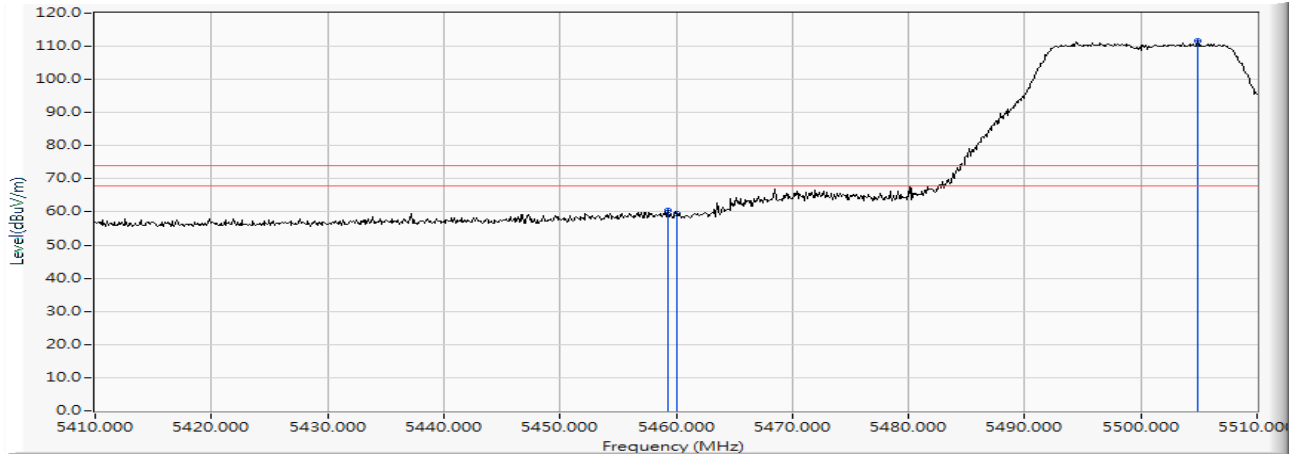


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5459.300	16.183	44.233	60.417	-13.583	74.000	PEAK
2		5460.000	16.185	43.317	59.502	-14.498	74.000	PEAK
3	*	5504.900	16.273	95.329	111.602	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Vertical

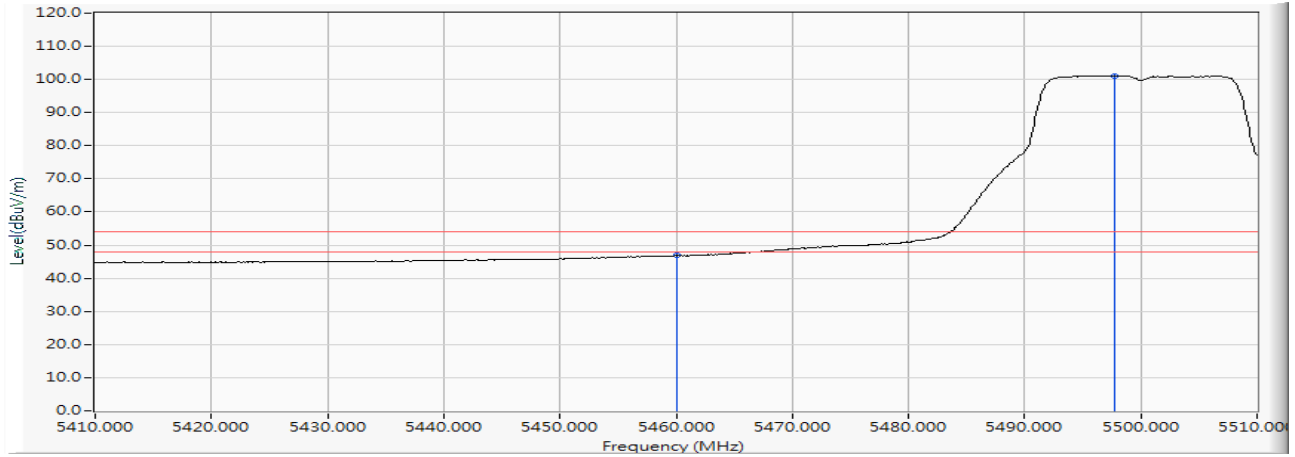


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	30.697	46.882	-7.118	54.000	AVERAGE
2	*	5497.800	16.266	84.870	101.137	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)


Horizontal

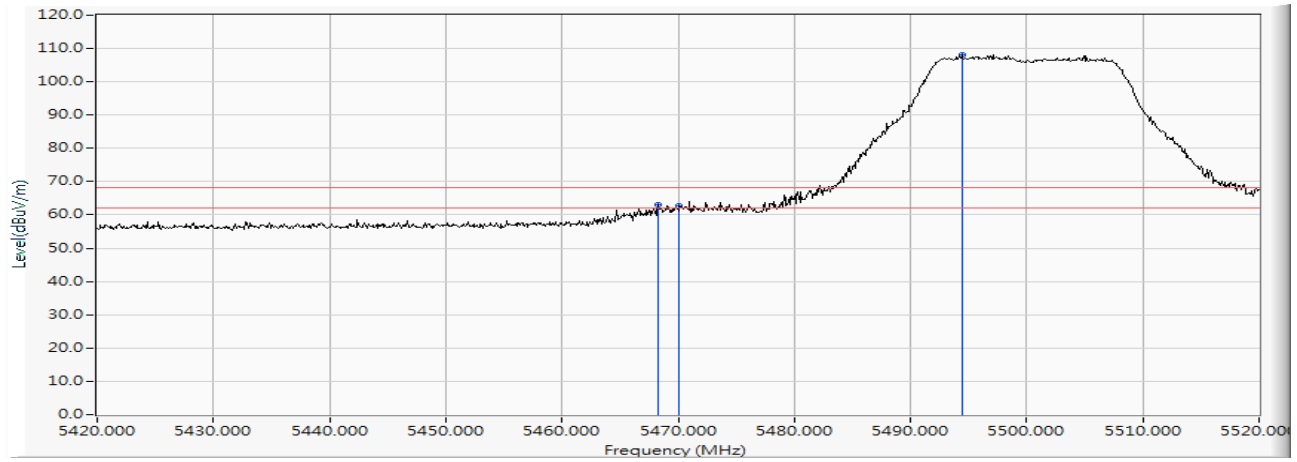

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.300	16.197	46.746	62.943	-5.277	68.220	PEAK
2		5470.000	16.200	46.535	62.735	-5.485	68.220	PEAK
3	*	5494.400	16.262	91.982	108.245	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)


Vertical

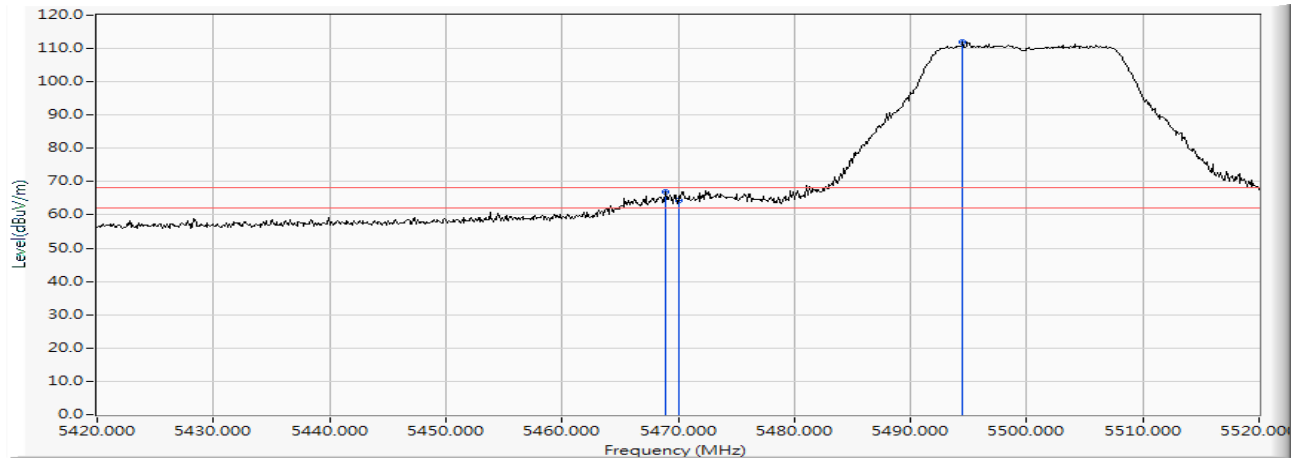

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.900	16.198	50.650	66.848	-1.372	68.220	PEAK
2		5470.000	16.200	48.283	64.483	-3.737	68.220	PEAK
3	*	5494.500	16.262	95.637	111.900	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)


Horizontal

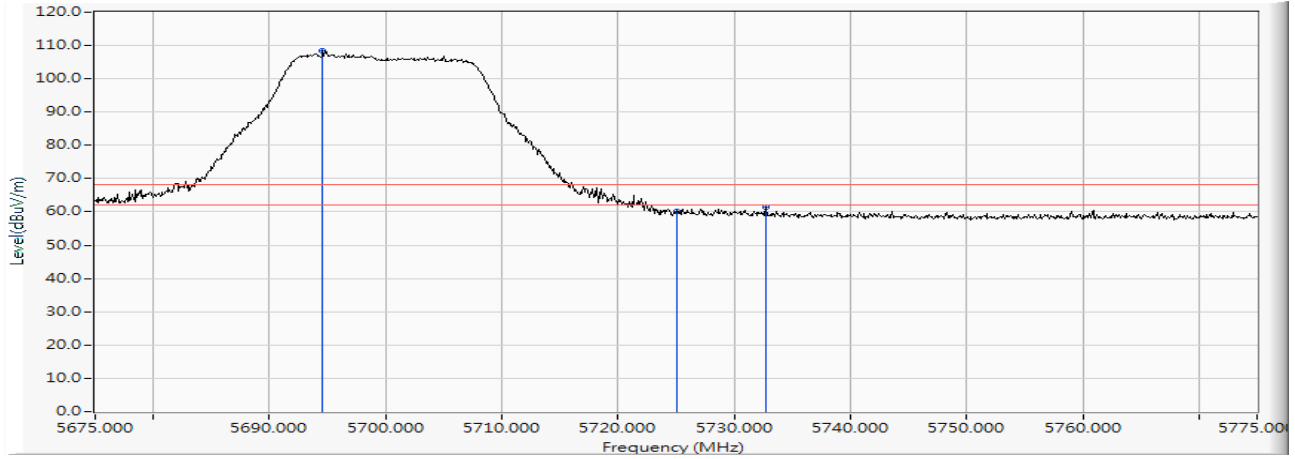

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5694.600	16.494	91.893	108.388	--	--	PEAK
2		5725.000	16.544	43.752	60.296	-7.924	68.220	PEAK
3		5732.700	16.551	44.952	61.503	-6.717	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)


Vertical

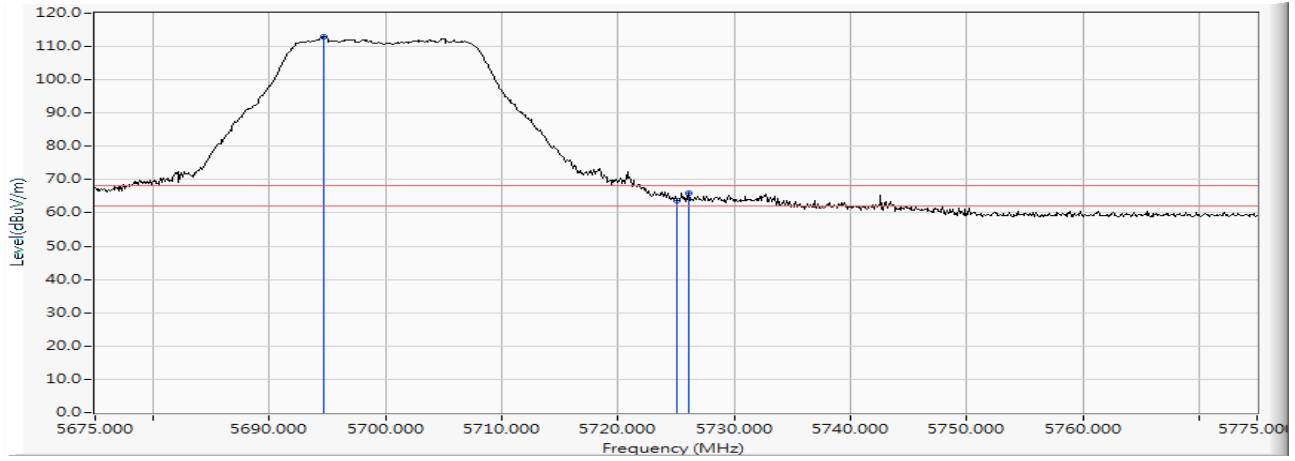

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5694.700	16.494	96.497	112.992	--	--	PEAK
2		5725.000	16.544	47.276	63.820	-4.400	68.220	PEAK
3		5726.100	16.546	49.566	66.112	-2.108	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Horizontal

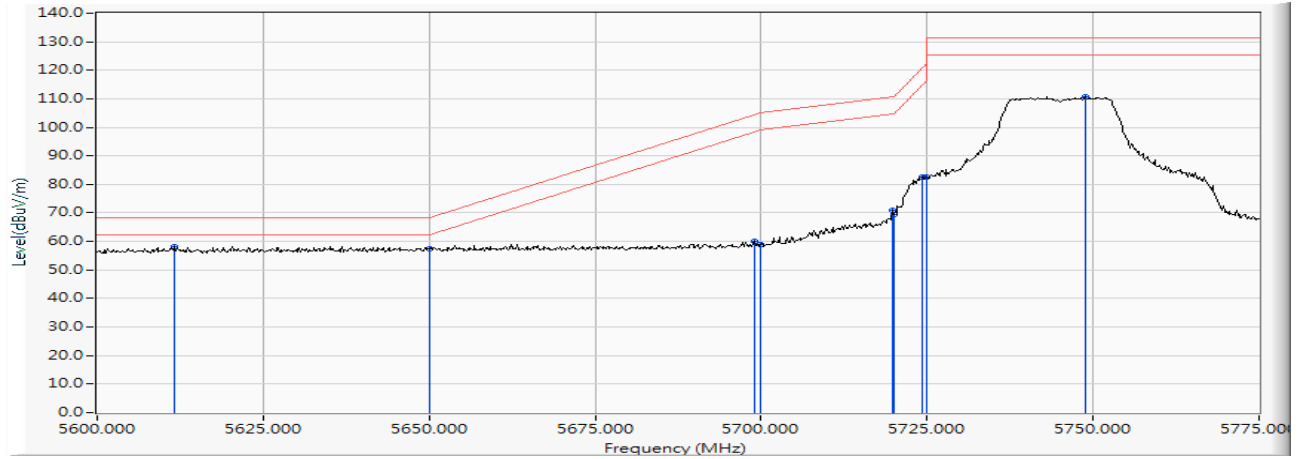

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5611.550	16.397	41.881	58.278	-9.942	68.220	PEAK
2		5650.000	16.447	40.965	57.412	-10.808	68.220	PEAK
3		5699.050	16.500	43.672	60.172	-44.325	104.497	PEAK
4		5700.000	16.502	42.550	59.052	-46.148	105.200	PEAK
5		5719.700	16.535	54.286	70.821	-39.895	110.716	PEAK
6		5720.000	16.535	52.784	69.319	-41.481	110.800	PEAK
7		5724.250	16.543	65.999	82.542	-37.948	120.490	PEAK
8		5725.000	16.544	65.996	82.540	-39.660	122.200	PEAK
9		5748.750	16.565	94.201	110.767	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Vertical

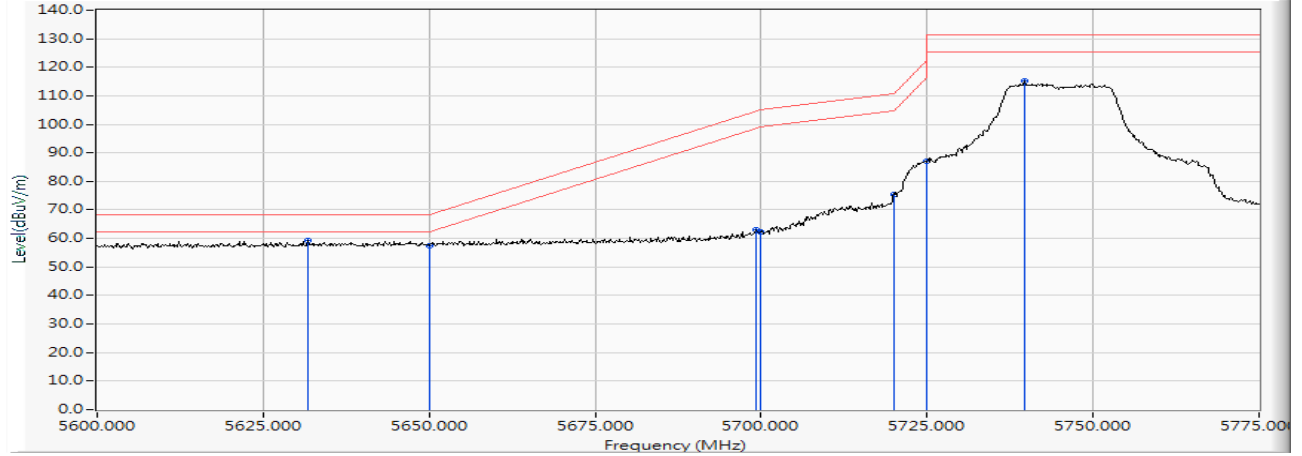

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5631.675	16.409	42.952	59.361	-8.859	68.220	PEAK
2		5650.000	16.447	41.134	57.581	-10.639	68.220	PEAK
3		5699.225	16.500	46.403	62.904	-41.723	104.627	PEAK
4		5700.000	16.502	45.976	62.478	-42.722	105.200	PEAK
5		5720.000	16.535	58.928	75.463	-35.337	110.800	PEAK
6		5725.000	16.544	70.393	86.937	-35.263	122.200	PEAK
7		5739.650	16.556	98.583	115.139	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)


Horizontal

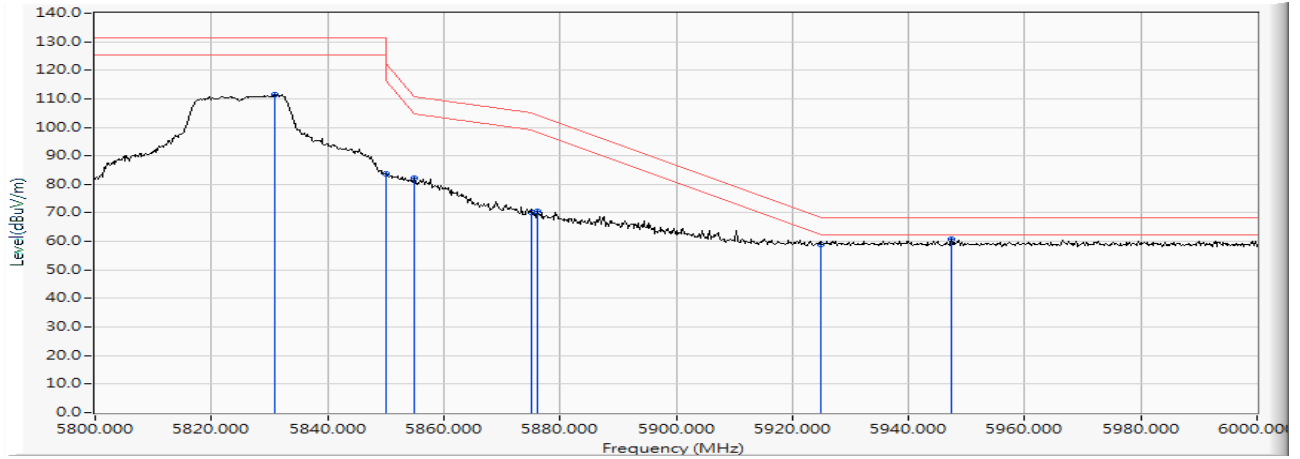

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5830.800	16.720	94.725	111.445	--	--	PEAK
2		5850.000	16.748	66.780	83.528	-38.672	122.200	PEAK
3		5855.000	16.758	65.404	82.162	-28.638	110.800	PEAK
4		5875.000	16.807	53.279	70.087	-35.113	105.200	PEAK
5		5876.000	16.811	53.767	70.577	-33.883	104.460	PEAK
6		5925.000	16.920	41.919	58.839	-9.361	68.200	PEAK
7	*	5947.400	16.949	43.952	60.901	-7.299	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)


Vertical

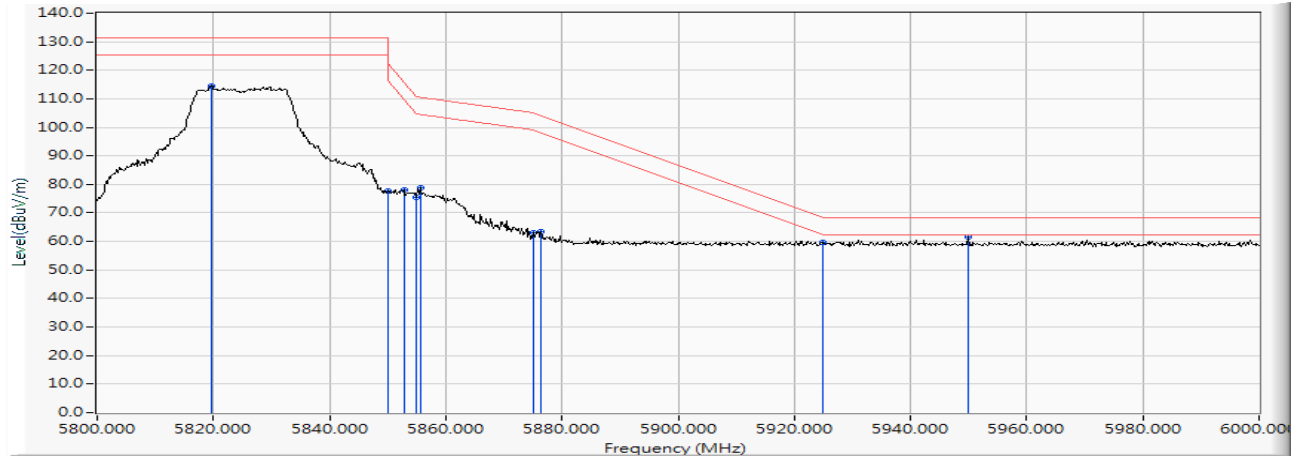

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5819.600	16.704	97.911	114.615	--	--	PEAK
2		5850.000	16.748	60.908	77.656	-44.544	122.200	PEAK
3		5852.800	16.753	61.475	78.228	-37.588	115.816	PEAK
4		5855.000	16.758	58.847	75.605	-35.195	110.800	PEAK
5		5855.600	16.760	61.968	78.728	-31.904	110.632	PEAK
6		5875.000	16.807	46.145	62.953	-42.247	105.200	PEAK
7		5876.400	16.812	46.780	63.591	-40.573	104.164	PEAK
8		5925.000	16.920	42.810	59.730	-8.470	68.200	PEAK
9	*	5950.000	16.954	44.734	61.688	-6.512	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Horizontal

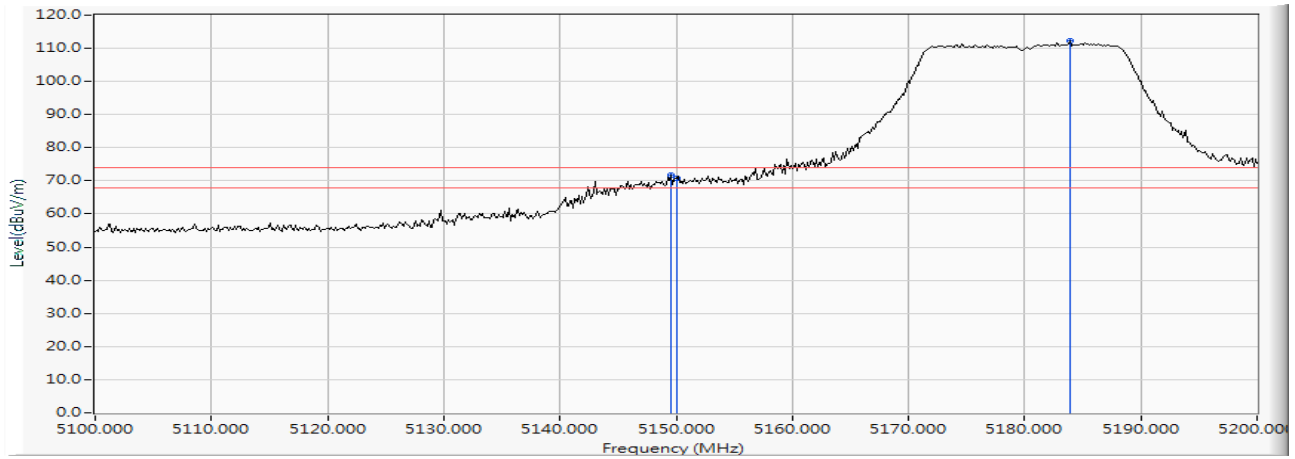


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.565	15.304	56.412	71.717	-2.283	74.000	PEAK
2		5150.000	15.307	55.523	70.830	-3.170	74.000	PEAK
3	*	5183.913	15.410	96.926	112.335	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Horizontal

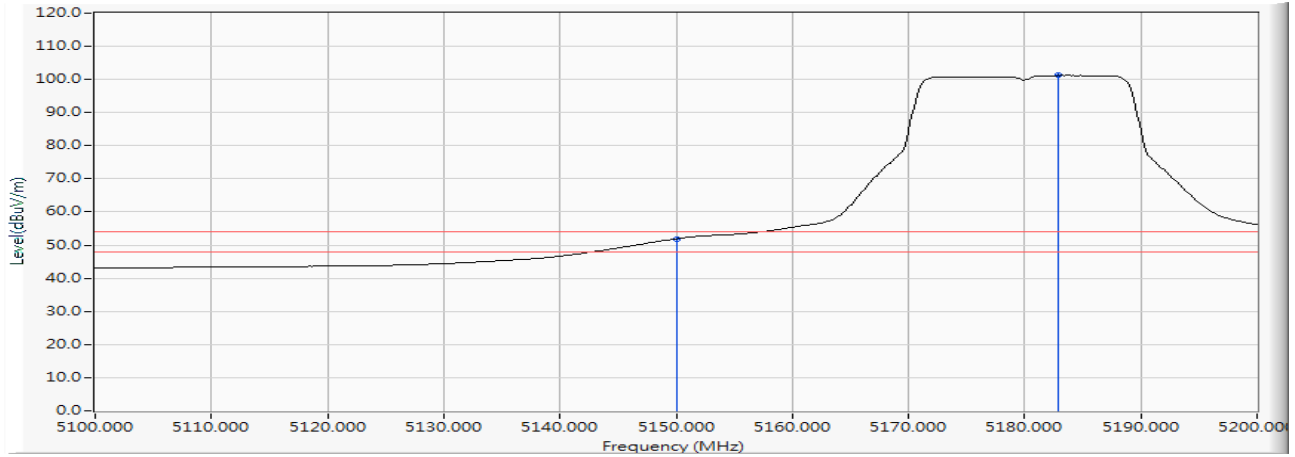


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	36.627	51.934	-2.066	54.000	AVERAGE
2	*	5182.899	15.405	85.801	101.206	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Vertical

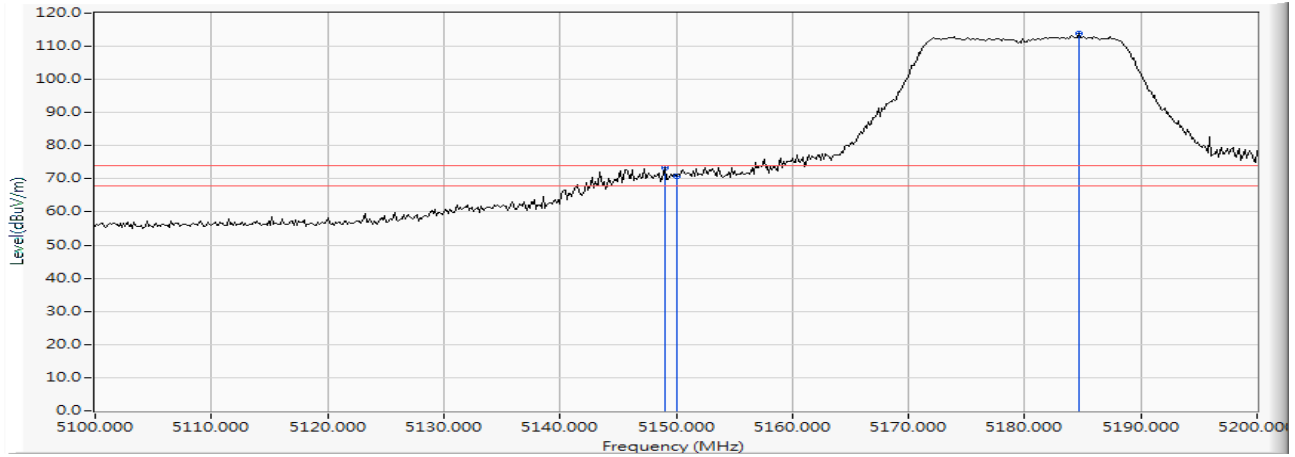


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.986	15.302	57.892	73.193	-0.807	74.000	PEAK
2		5150.000	15.307	55.584	70.891	-3.109	74.000	PEAK
3	*	5184.638	15.412	98.365	113.778	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Vertical

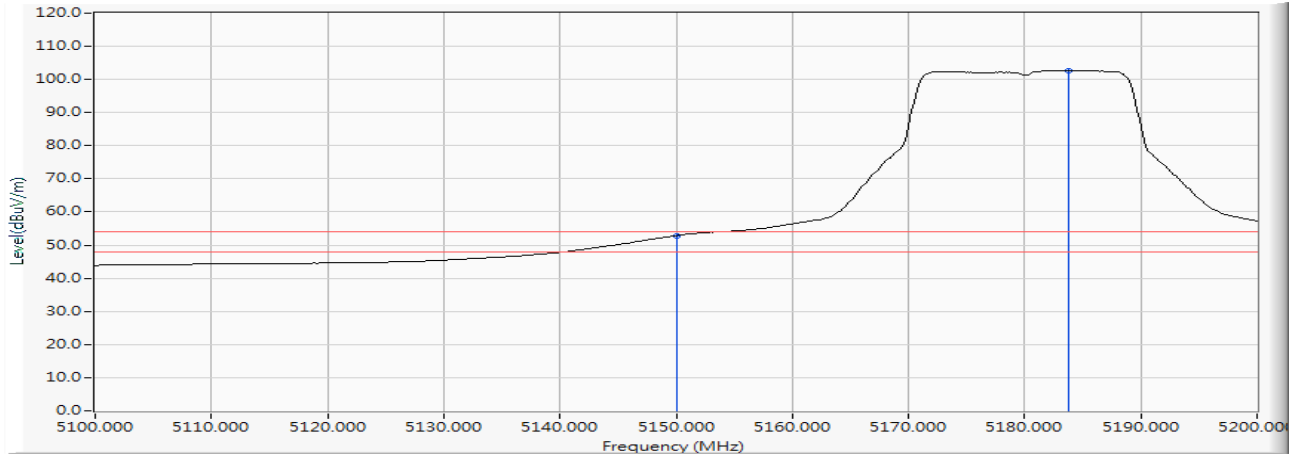


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	37.552	52.859	-1.141	54.000	AVERAGE
2	*	5183.768	15.409	87.193	102.602	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Horizontal

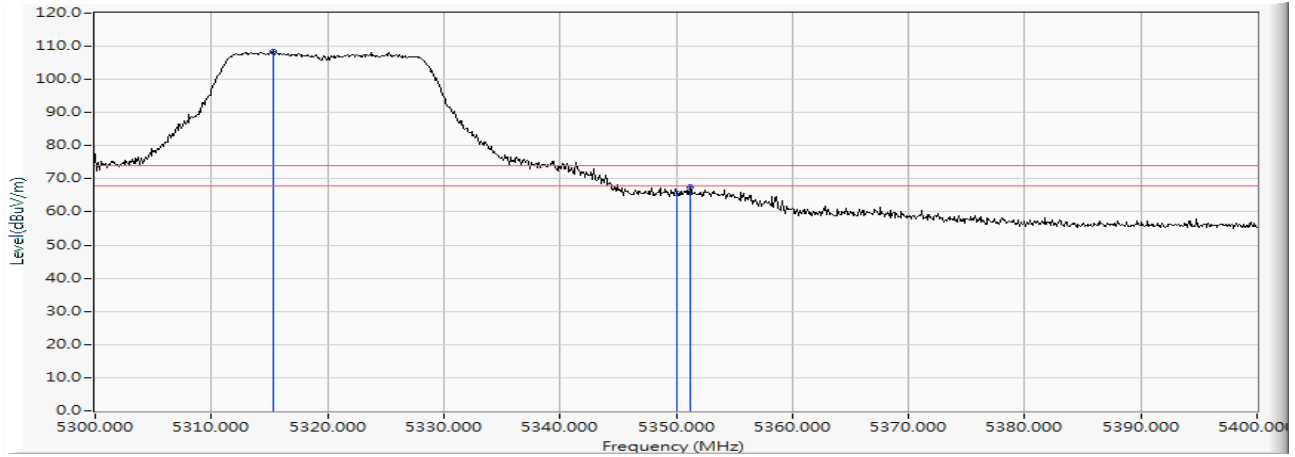


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5315.300	15.835	92.601	108.436	--	--	PEAK
2		5350.000	15.912	49.594	65.506	-8.494	74.000	PEAK
3		5351.200	15.916	51.599	67.515	-6.485	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Horizontal

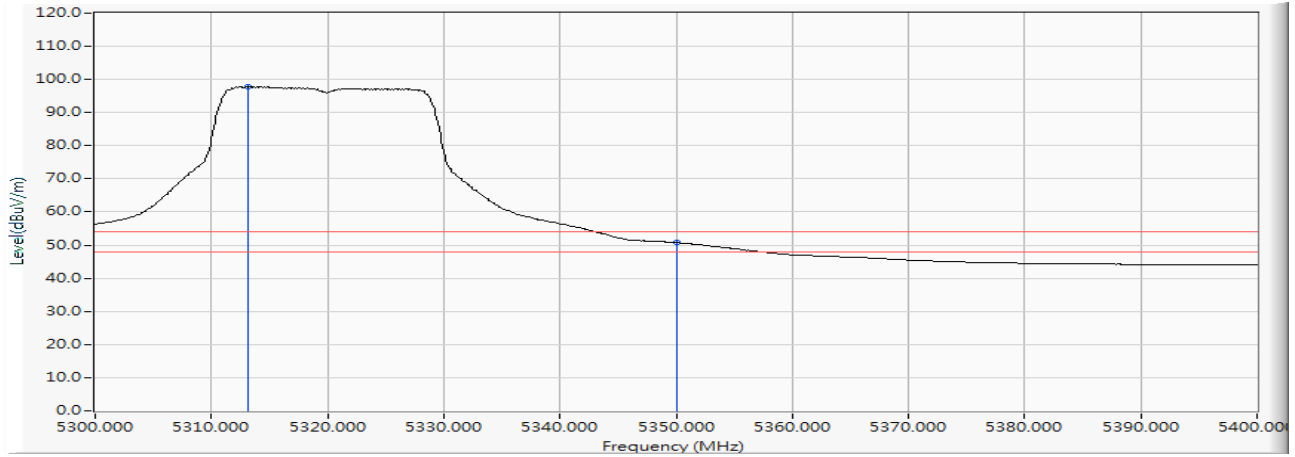


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.100	15.827	81.924	97.752	--	--	AVERAGE
2		5350.000	15.912	34.811	50.723	-3.277	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Vertical

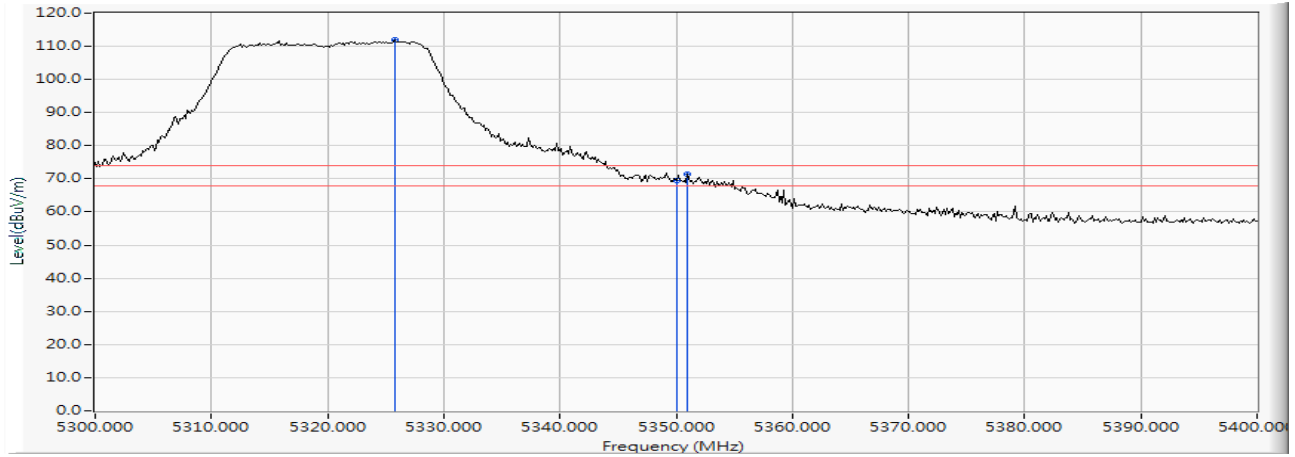


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5325.797	15.868	96.077	111.945	--	--	PEAK
2		5350.000	15.912	53.472	69.384	-4.616	74.000	PEAK
3		5351.014	15.915	55.477	71.392	-2.608	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Vertical

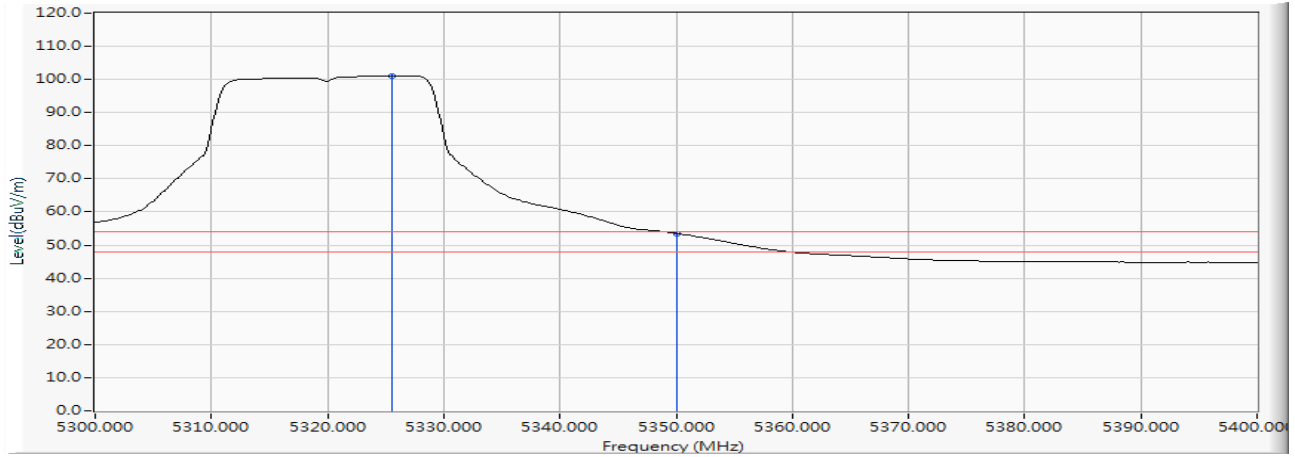


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5325.507	15.868	85.266	101.133	--	--	AVERAGE
2		5350.000	15.912	37.610	53.522	-0.478	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

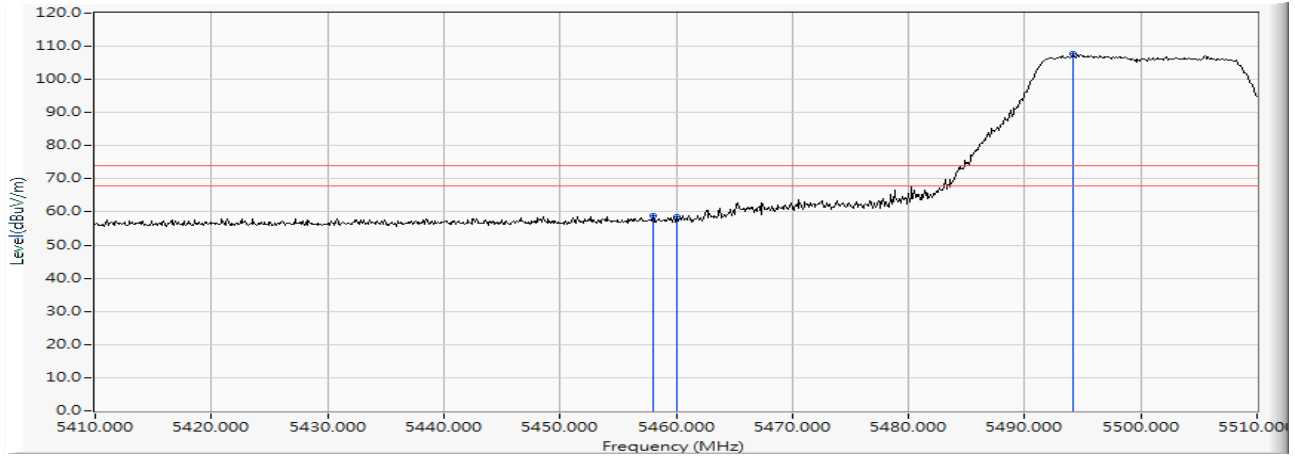


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.000	16.182	42.699	58.881	-15.119	74.000	PEAK
2		5460.000	16.185	42.299	58.484	-15.516	74.000	PEAK
3	*	5494.100	16.262	91.409	107.671	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

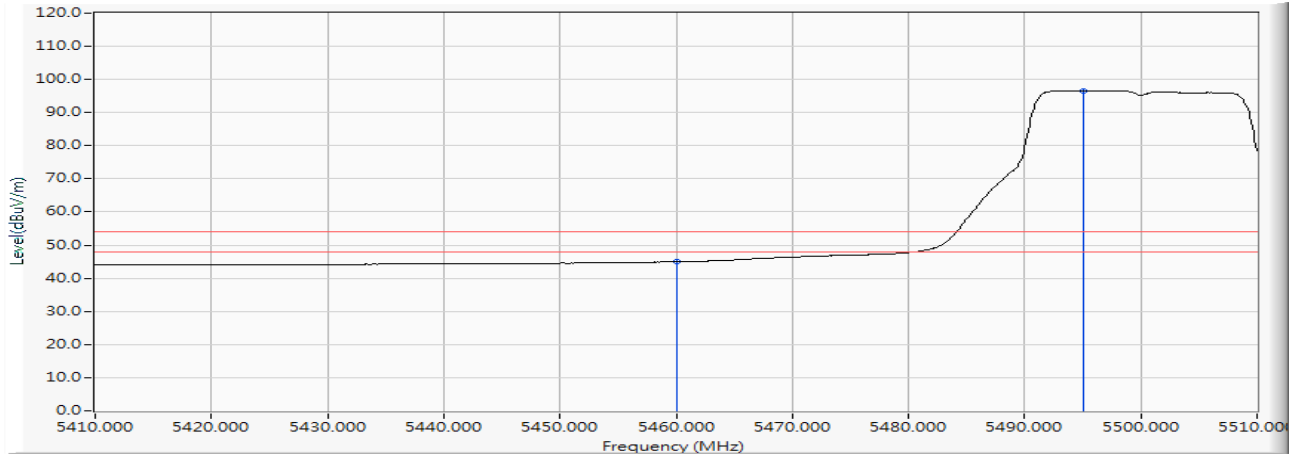


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	28.756	44.941	-9.059	54.000	AVERAGE
2	*	5495.100	16.264	80.366	96.630	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Vertical

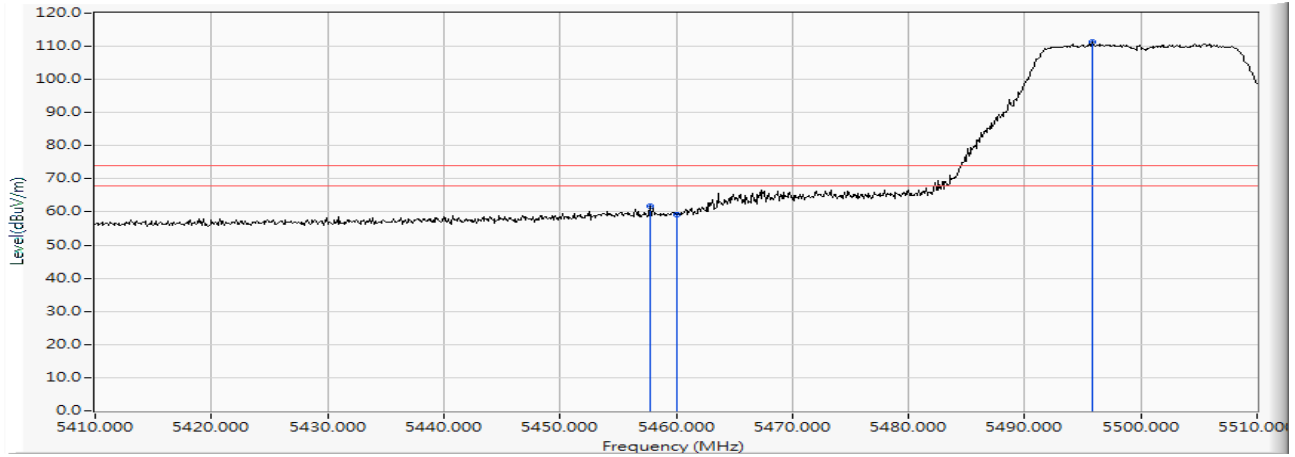


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5457.800	16.182	45.435	61.616	-12.384	74.000	PEAK
2		5460.000	16.185	43.124	59.309	-14.691	74.000	PEAK
3	*	5495.800	16.265	94.991	111.256	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Vertical

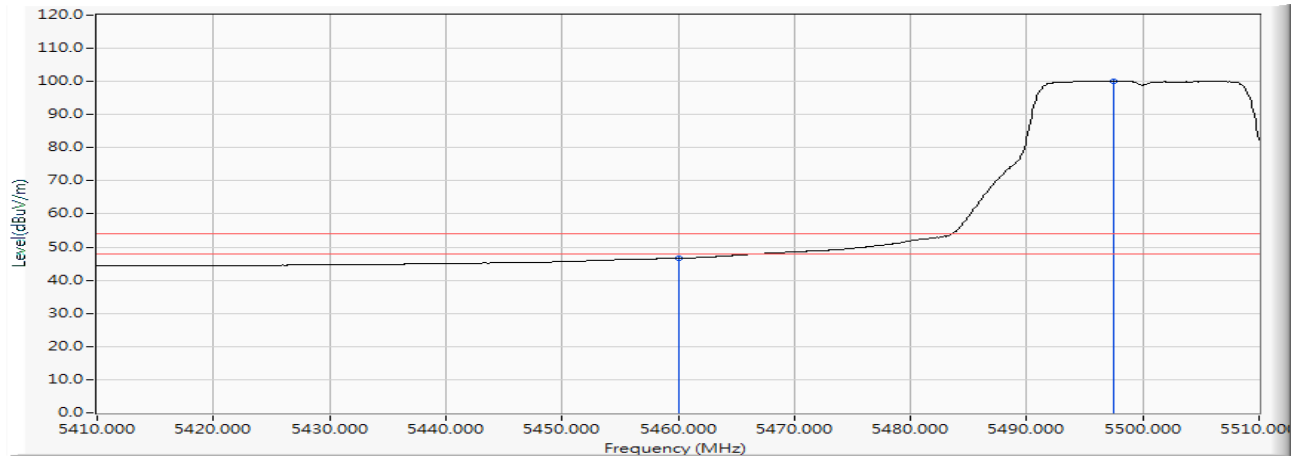


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	30.432	46.617	-7.383	54.000	AVERAGE
2	*	5497.500	16.267	83.858	100.125	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)


Horizontal

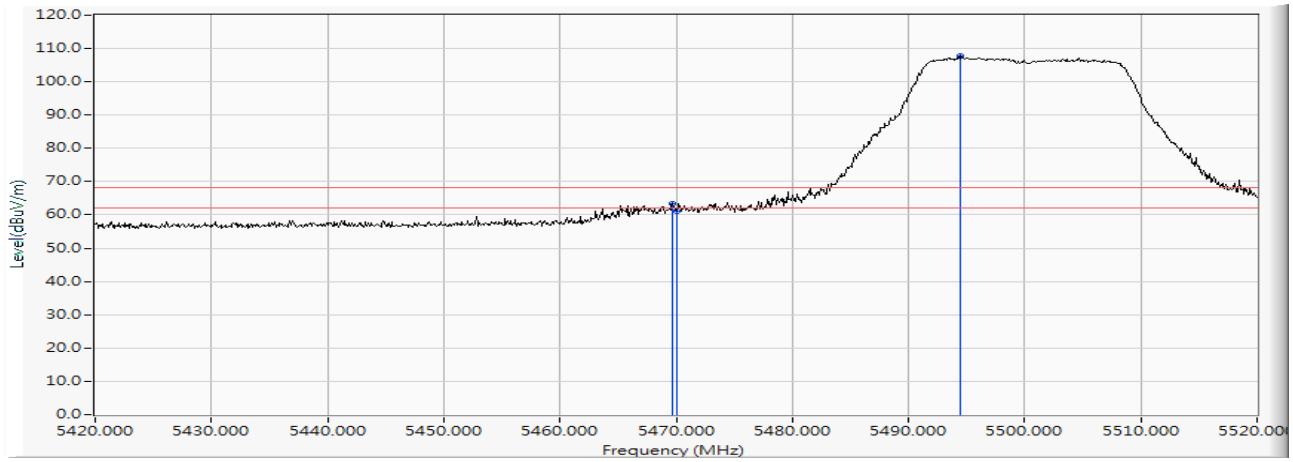

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5469.700	16.199	47.134	63.333	-4.887	68.220	PEAK
2		5470.000	16.200	45.019	61.219	-7.001	68.220	PEAK
3	*	5494.500	16.262	91.435	107.698	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)


Vertical

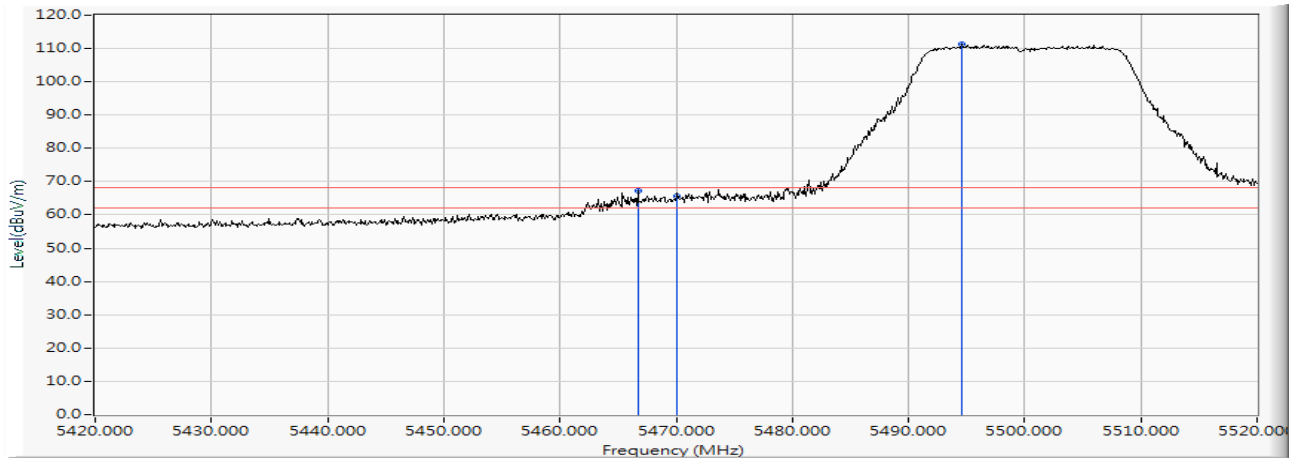

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5466.700	16.194	51.195	67.389	-0.831	68.220	PEAK
2		5470.000	16.200	49.416	65.616	-2.604	68.220	PEAK
3	*	5494.600	16.262	95.179	111.442	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 140 (5700MHz)


Horizontal

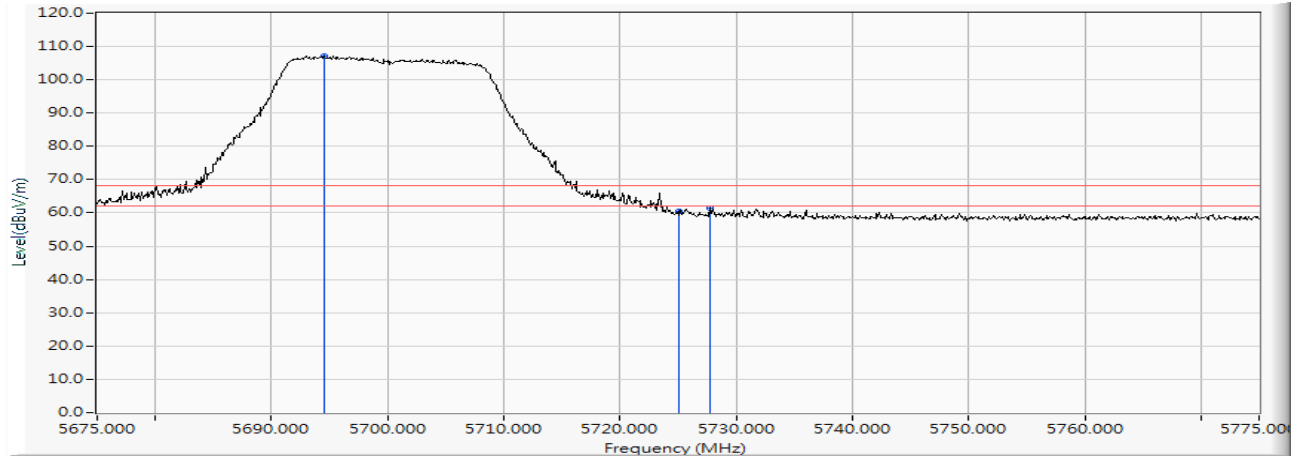

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5694.500	16.494	90.669	107.164	--	--	PEAK
2		5725.000	16.544	43.941	60.485	-7.735	68.220	PEAK
3		5727.700	16.548	44.877	61.425	-6.795	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 140 (5700MHz)


Vertical

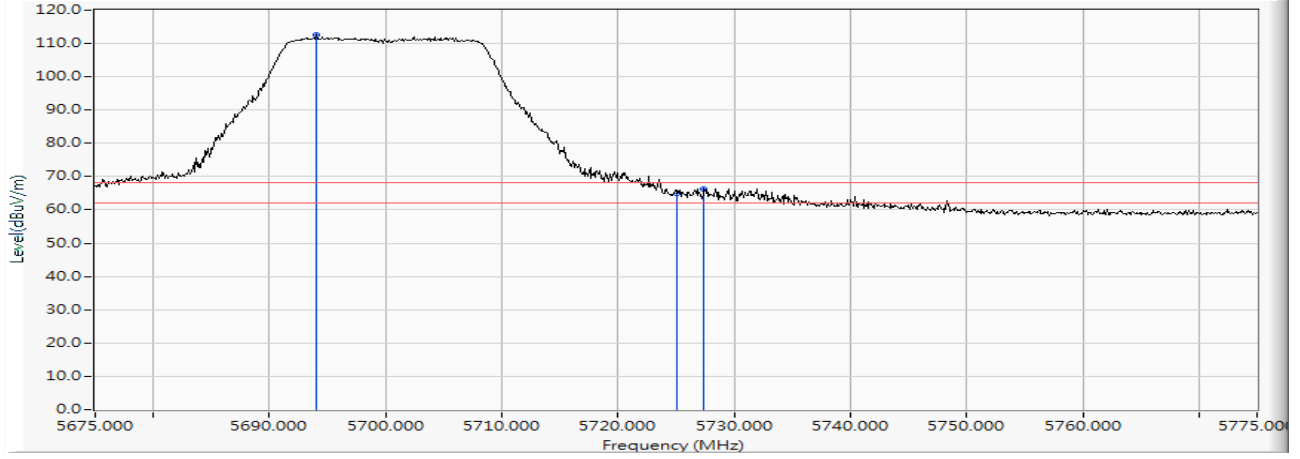

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5694.000	16.493	95.964	112.458	--	--	PEAK
2		5725.000	16.544	48.454	64.998	-3.222	68.220	PEAK
3		5727.400	16.548	49.877	66.424	-1.796	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 149 (5745MHz)


Horizontal

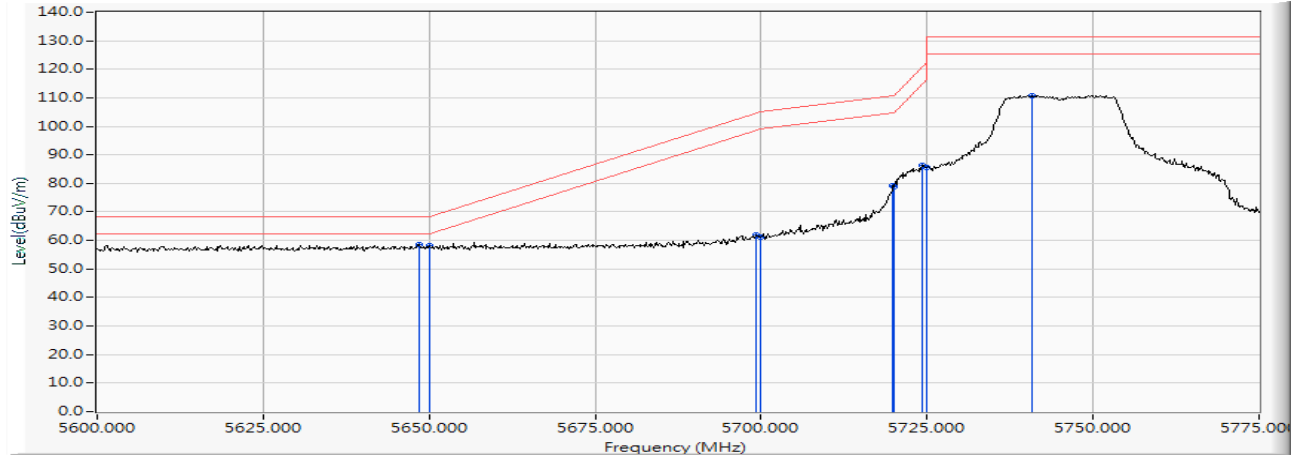

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5648.475	16.443	41.981	58.424	-9.796	68.220	PEAK
2		5650.000	16.447	41.577	58.024	-10.196	68.220	PEAK
3		5699.225	16.500	45.410	61.911	-42.716	104.627	PEAK
4		5700.000	16.502	44.843	61.345	-43.855	105.200	PEAK
5		5719.875	16.535	62.809	79.344	-31.421	110.765	PEAK
6		5720.000	16.535	62.378	78.913	-31.887	110.800	PEAK
7		5724.250	16.543	69.678	86.221	-34.269	120.490	PEAK
8		5725.000	16.544	69.219	85.763	-36.437	122.200	PEAK
9		5740.700	16.556	94.318	110.874	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 149 (5745MHz)


Vertical

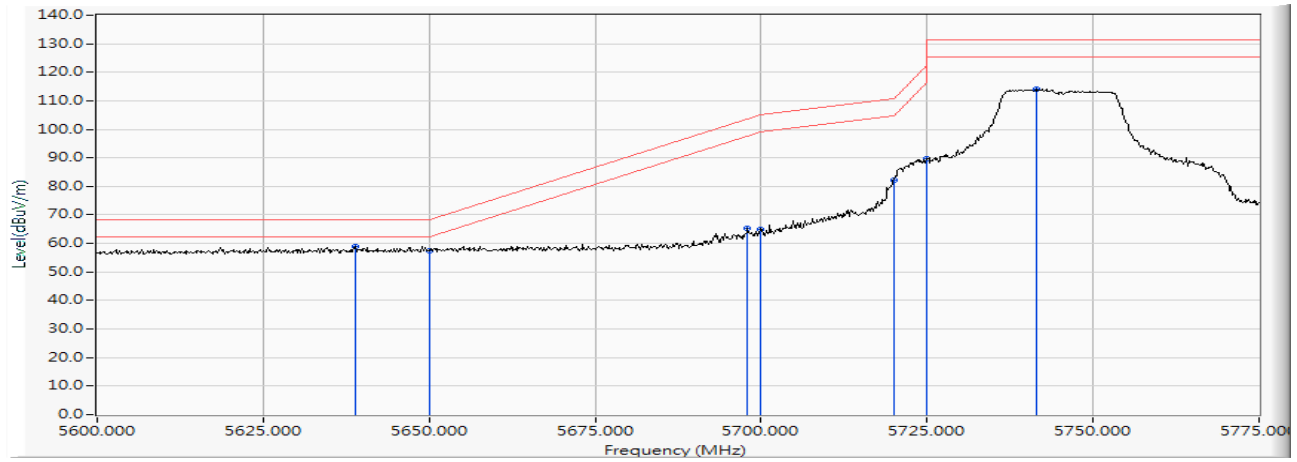

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5638.850	16.416	42.494	58.911	-9.309	68.220	PEAK
2		5650.000	16.447	41.028	57.475	-10.745	68.220	PEAK
3		5698.000	16.499	48.830	65.329	-38.392	103.721	PEAK
4		5700.000	16.502	48.591	65.093	-40.107	105.200	PEAK
5		5720.000	16.535	65.835	82.370	-28.430	110.800	PEAK
6		5725.000	16.544	73.024	89.568	-32.632	122.200	PEAK
7		5741.400	16.556	97.589	114.146	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 165 (5825MHz)


Horizontal

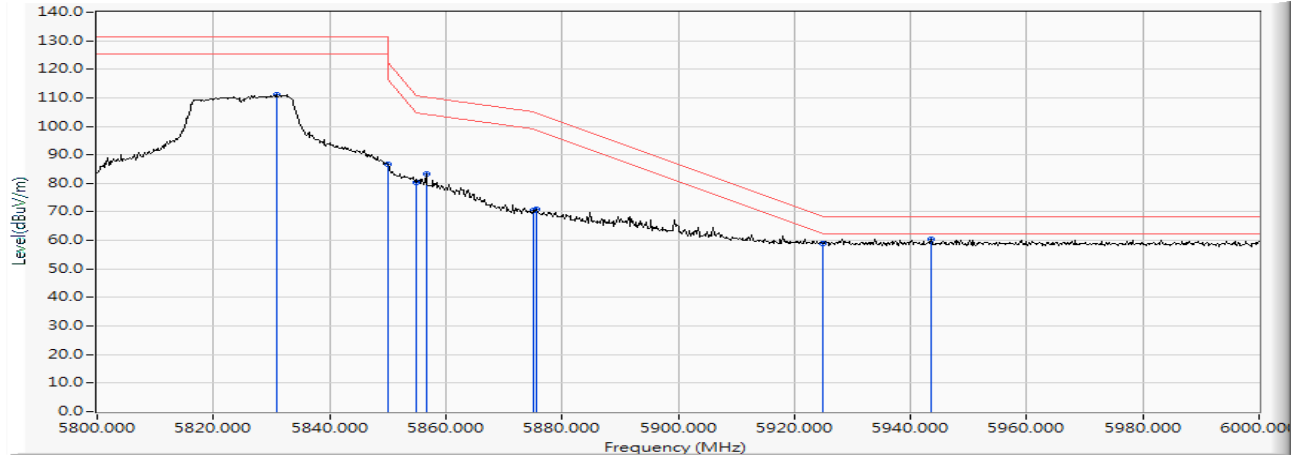

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5830.800	16.720	94.290	111.010	--	--	PEAK
2		5850.000	16.748	69.862	86.610	-35.590	122.200	PEAK
3		5855.000	16.758	63.436	80.194	-30.606	110.800	PEAK
4		5856.600	16.761	66.459	83.221	-27.131	110.352	PEAK
5		5875.000	16.807	53.615	70.423	-34.777	105.200	PEAK
6		5875.600	16.809	54.111	70.920	-33.836	104.756	PEAK
7		5925.000	16.920	42.132	59.052	-9.148	68.200	PEAK
8	*	5943.600	16.942	43.392	60.333	-7.867	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 165 (5825MHz)


Vertical

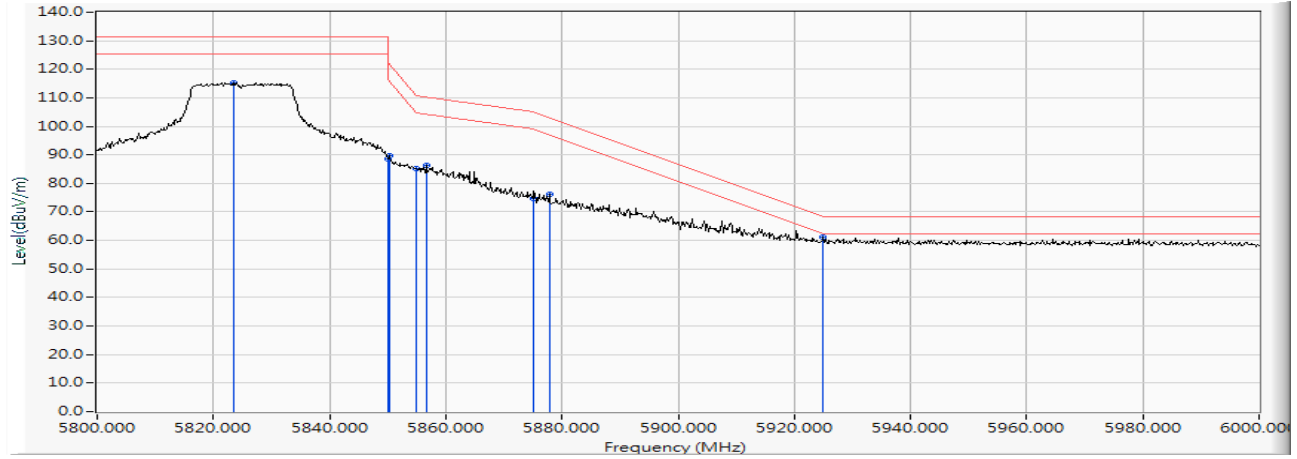

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5823.400	16.710	98.575	115.284	--	--	PEAK
2		5850.000	16.748	71.901	88.649	-33.551	122.200	PEAK
3		5850.200	16.748	72.933	89.682	-32.062	121.744	PEAK
4		5855.000	16.758	68.274	85.032	-25.768	110.800	PEAK
5		5856.600	16.761	69.465	86.227	-24.125	110.352	PEAK
6		5875.000	16.807	57.827	74.635	-30.565	105.200	PEAK
7		5877.800	16.816	59.282	76.097	-27.031	103.128	PEAK
8	*	5925.000	16.920	44.229	61.149	-7.051	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

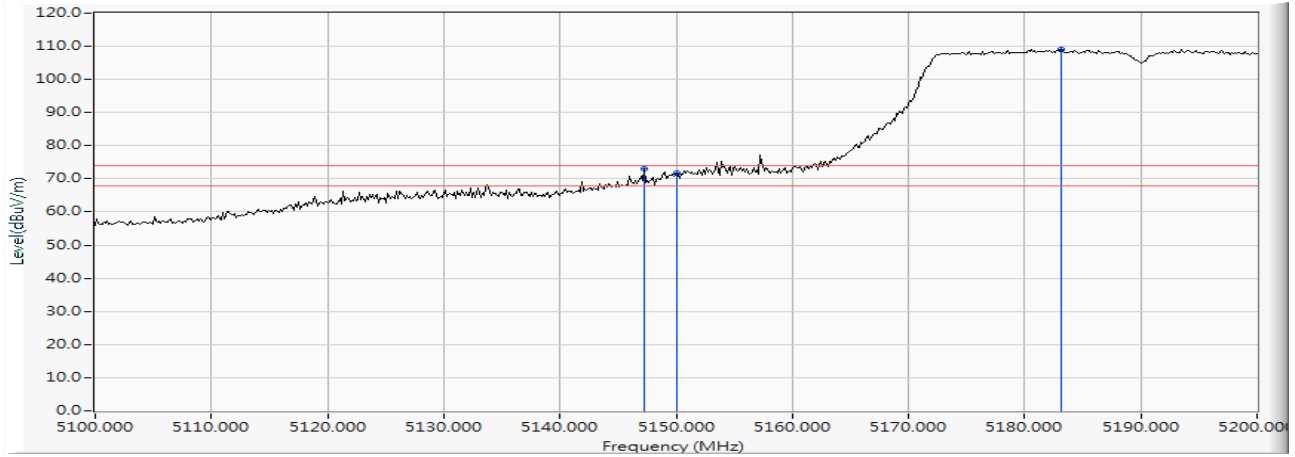


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5147.246	15.291	57.600	72.891	-1.109	74.000	PEAK
2		5150.000	15.307	56.387	71.694	-2.306	74.000	PEAK
3	*	5183.188	15.406	93.576	108.982	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

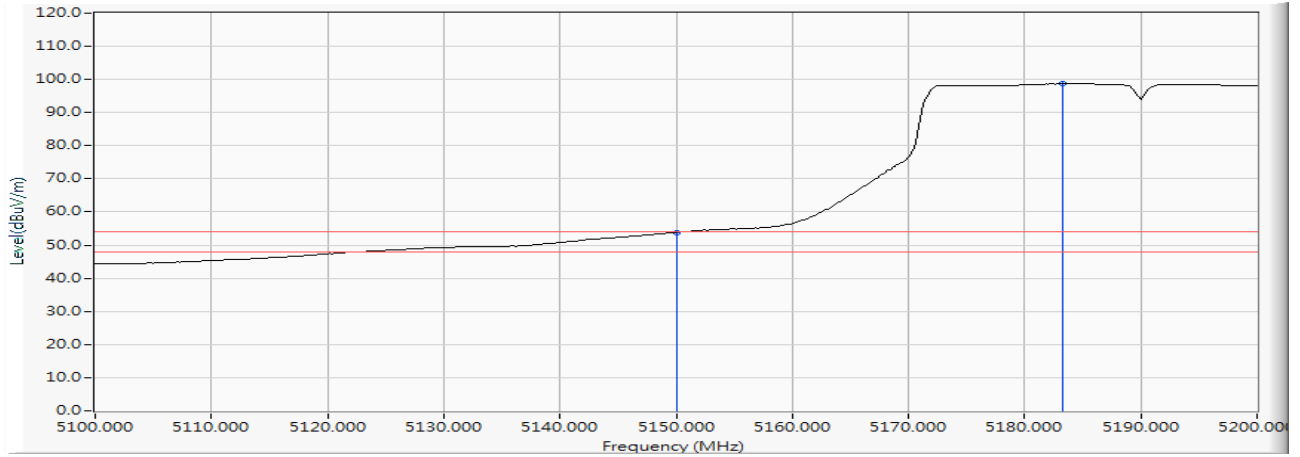


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	38.578	53.885	-0.115	54.000	AVERAGE
2	*	5183.333	15.407	83.356	98.763	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

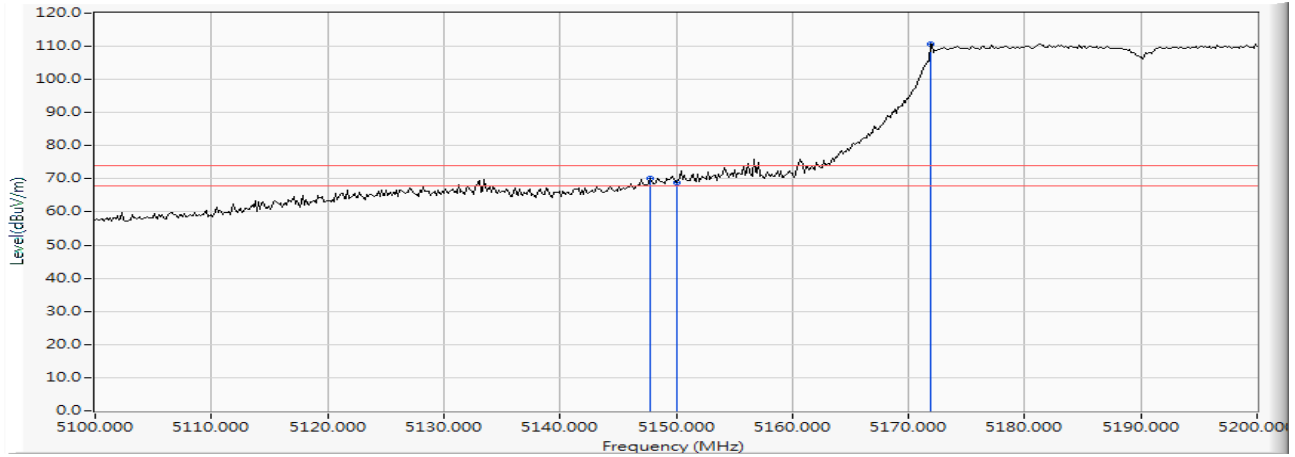


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5147.826	15.295	54.813	70.108	-3.892	74.000	PEAK
2		5150.000	15.307	53.548	68.855	-5.145	74.000	PEAK
3	*	5171.884	15.356	95.372	110.728	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

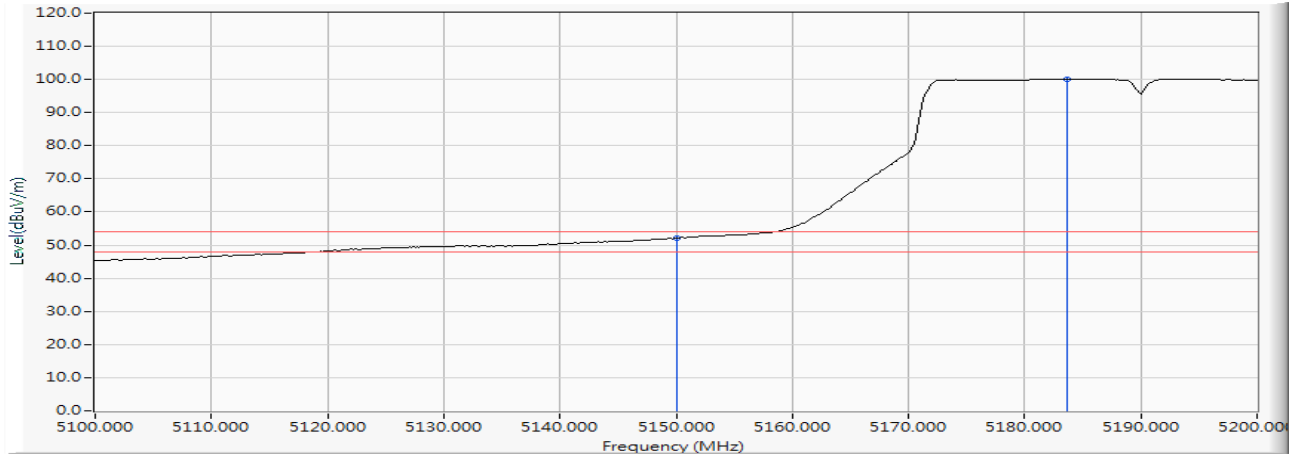


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	36.777	52.084	-1.916	54.000	AVERAGE
2	*	5183.623	15.408	84.781	100.189	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

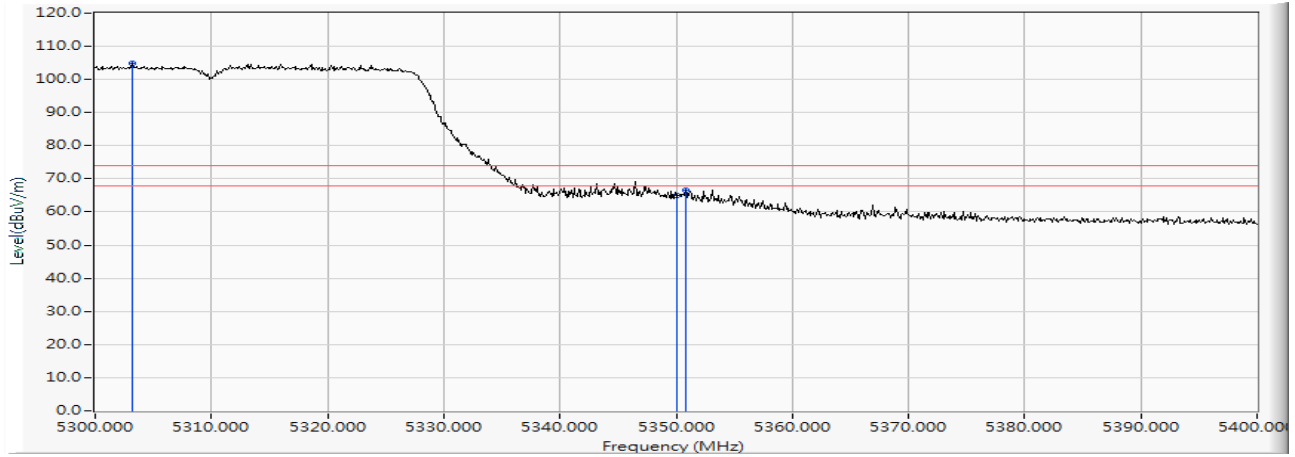


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5303.200	15.804	88.929	104.733	--	--	PEAK
2		5350.000	15.912	49.058	64.970	-9.030	74.000	PEAK
3		5350.800	15.915	50.594	66.509	-7.491	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

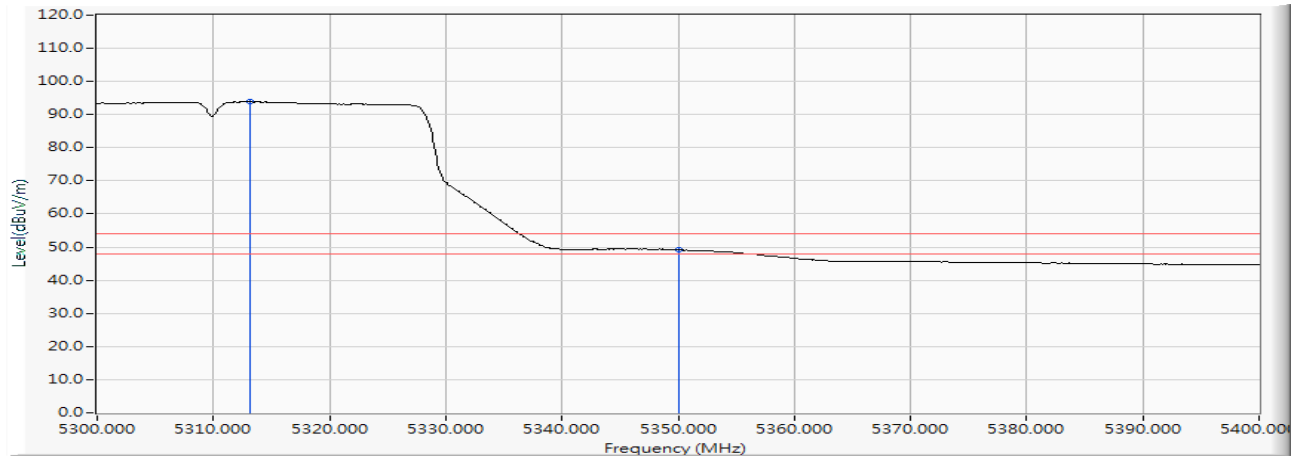


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.100	15.827	78.020	93.848	--	--	AVERAGE
2		5350.000	15.912	33.183	49.095	-4.905	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Vertical

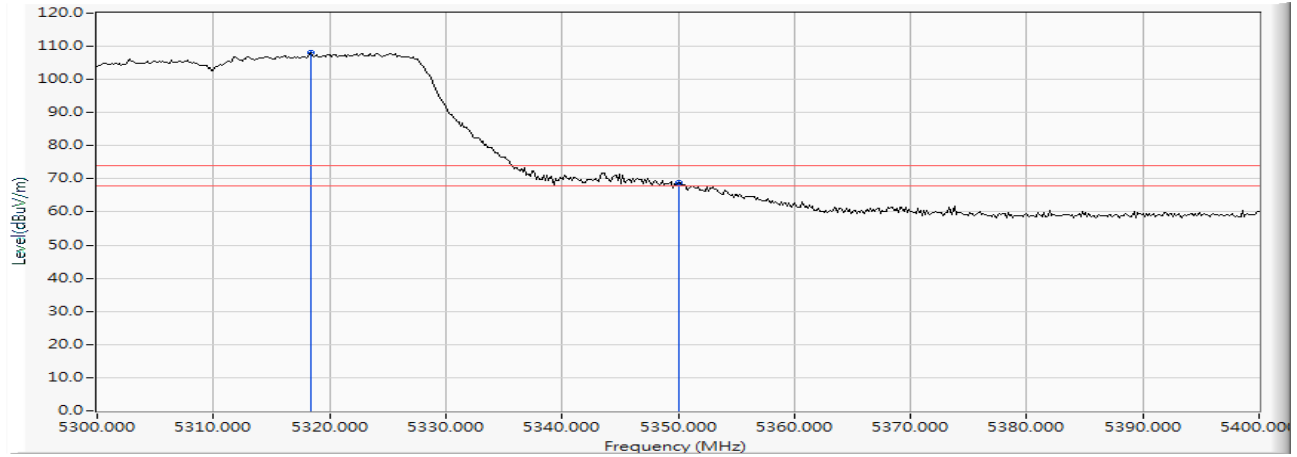


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5318.406	15.845	92.171	108.016	--	--	PEAK
2		5350.000	15.912	53.066	68.978	-5.022	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Vertical

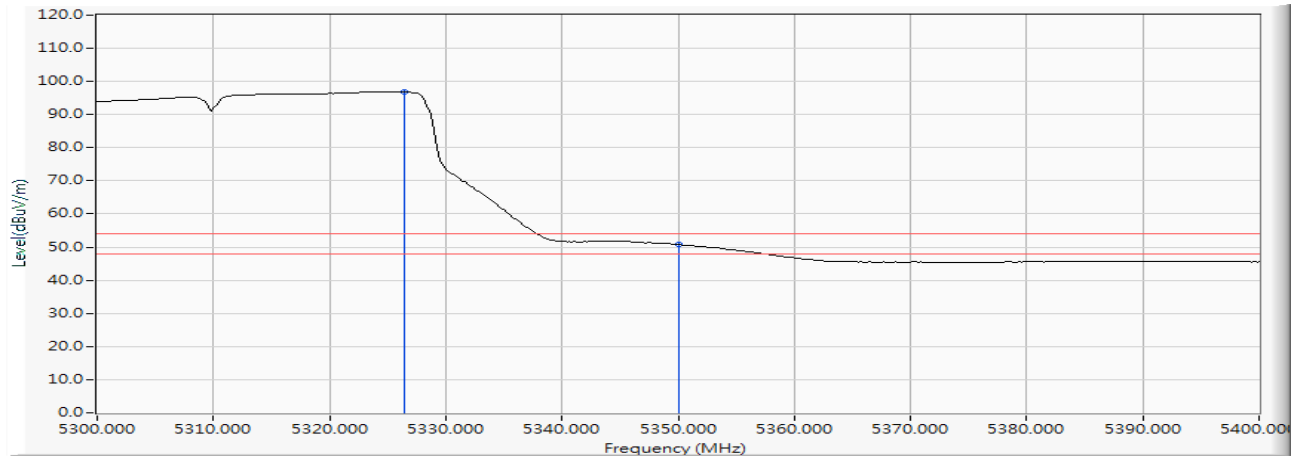


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5326.377	15.870	81.006	96.876	--	--	AVERAGE
2		5350.000	15.912	34.851	50.763	-3.237	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

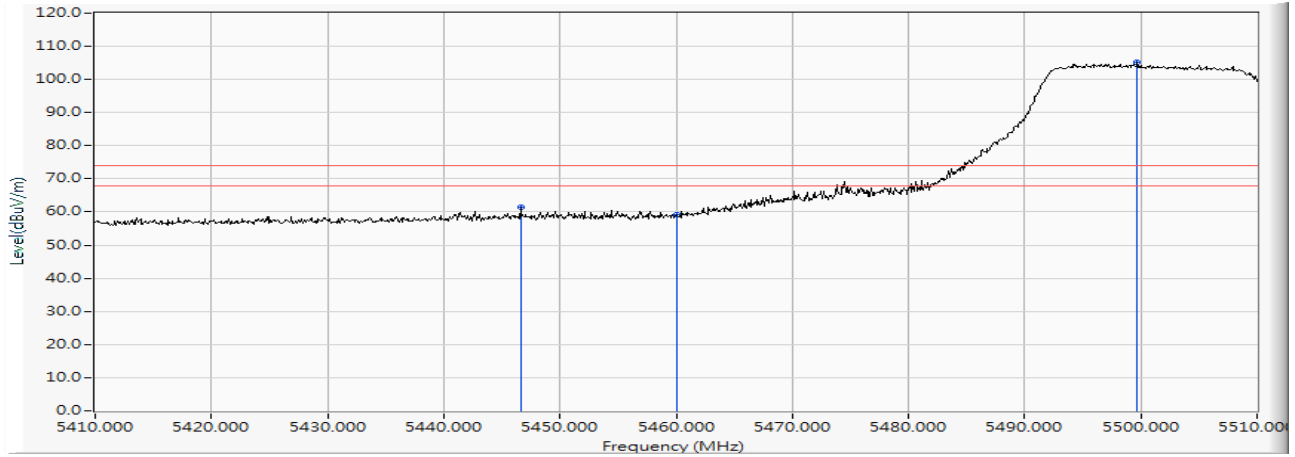


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5446.600	16.146	45.428	61.574	-12.426	74.000	PEAK
2		5460.000	16.185	42.955	59.140	-14.860	74.000	PEAK
3	*	5499.700	16.270	88.816	105.086	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

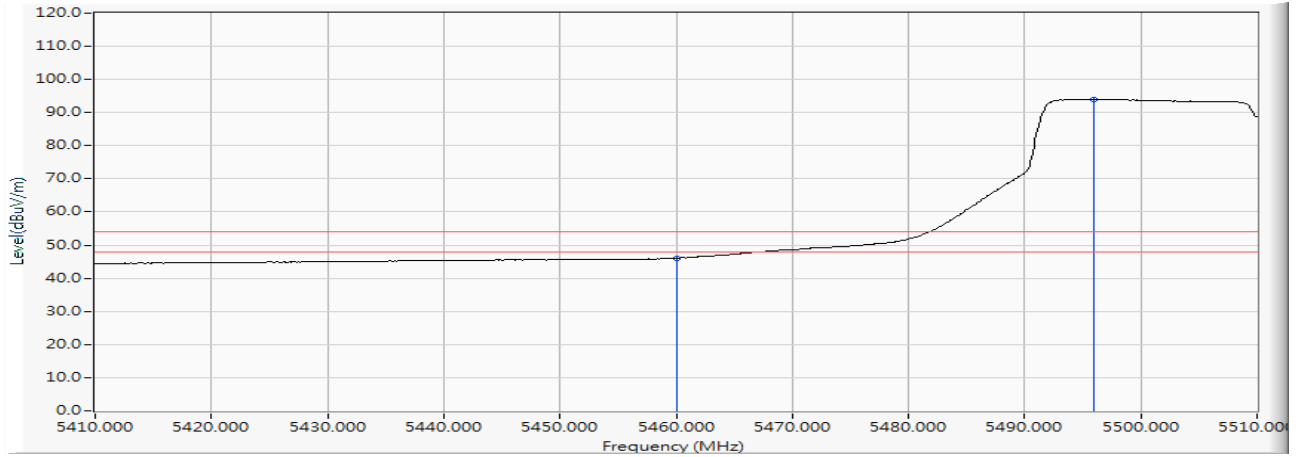


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	29.863	46.048	-7.952	54.000	AVERAGE
2	*	5496.000	16.265	77.726	93.991	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Vertical

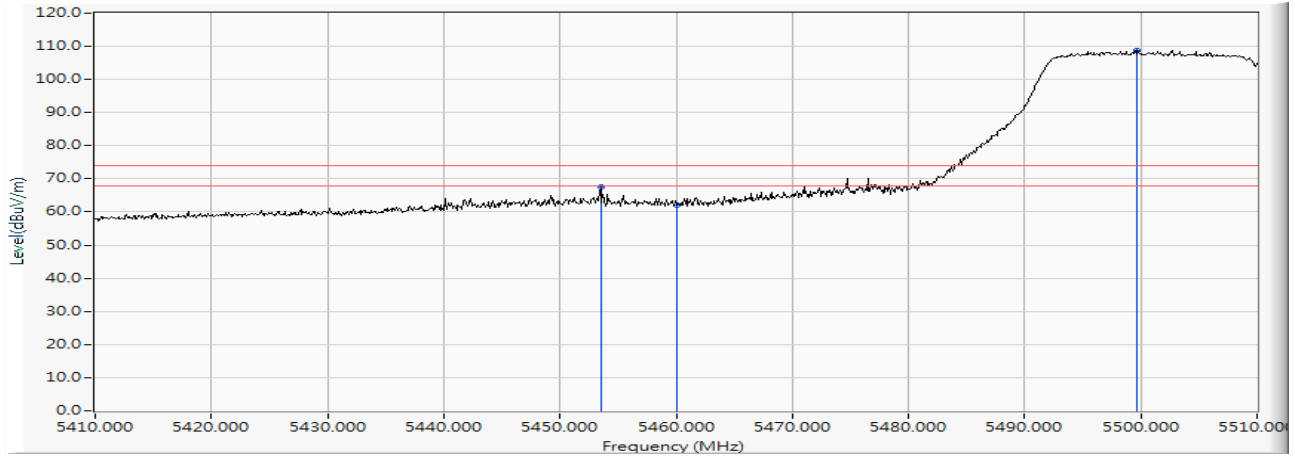


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5453.500	16.169	51.445	67.614	-6.386	74.000	PEAK
2		5460.000	16.185	45.936	62.121	-11.879	74.000	PEAK
3	*	5499.600	16.270	92.553	108.823	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Vertical

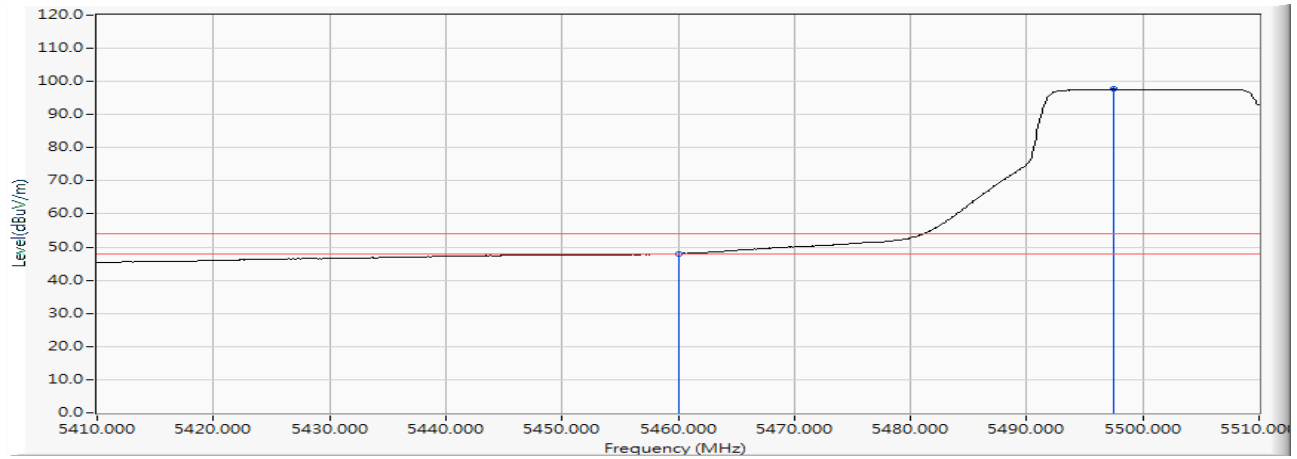


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	31.803	47.988	-6.012	54.000	AVERAGE
2	*	5497.500	16.267	81.413	97.680	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)


Horizontal

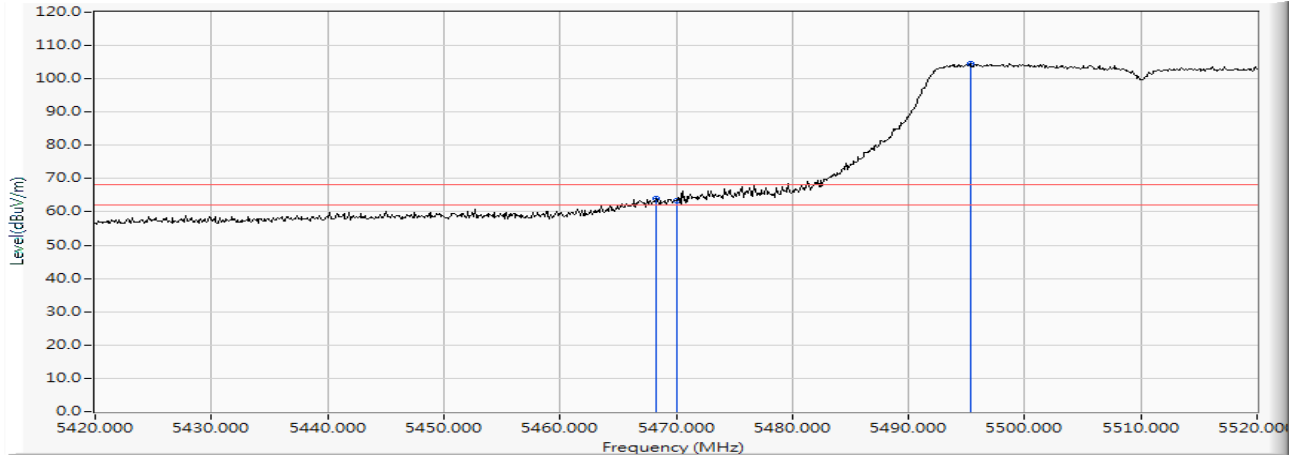

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.300	16.197	47.700	63.897	-4.323	68.220	PEAK
2		5470.000	16.200	47.116	63.316	-4.904	68.220	PEAK
3	*	5495.300	16.264	88.333	104.597	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)


Vertical

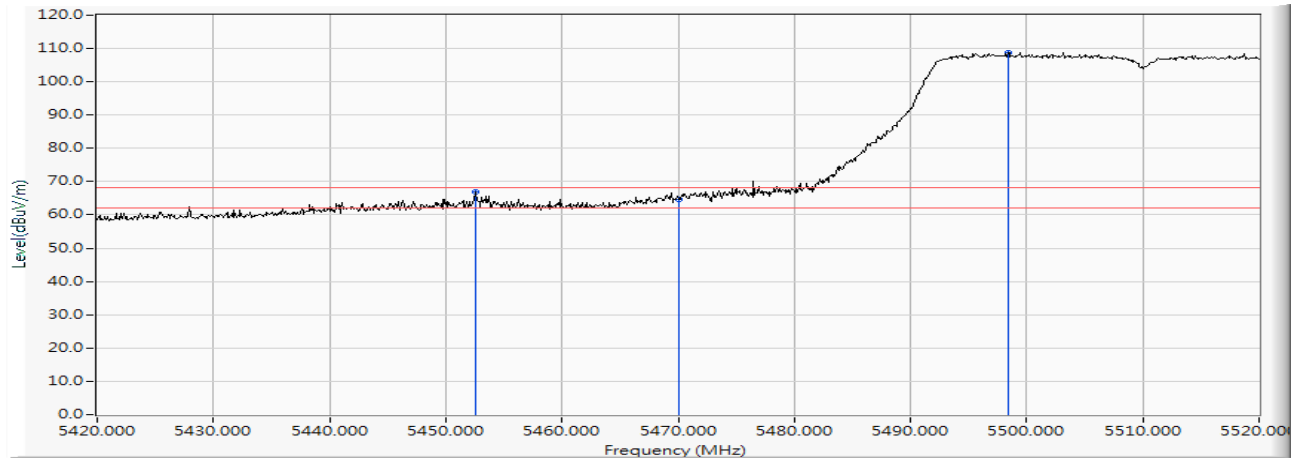

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5452.600	16.166	50.883	67.049	-1.171	68.220	PEAK
2		5470.000	16.200	48.622	64.822	-3.398	68.220	PEAK
3	*	5498.400	16.268	92.597	108.865	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)


Horizontal

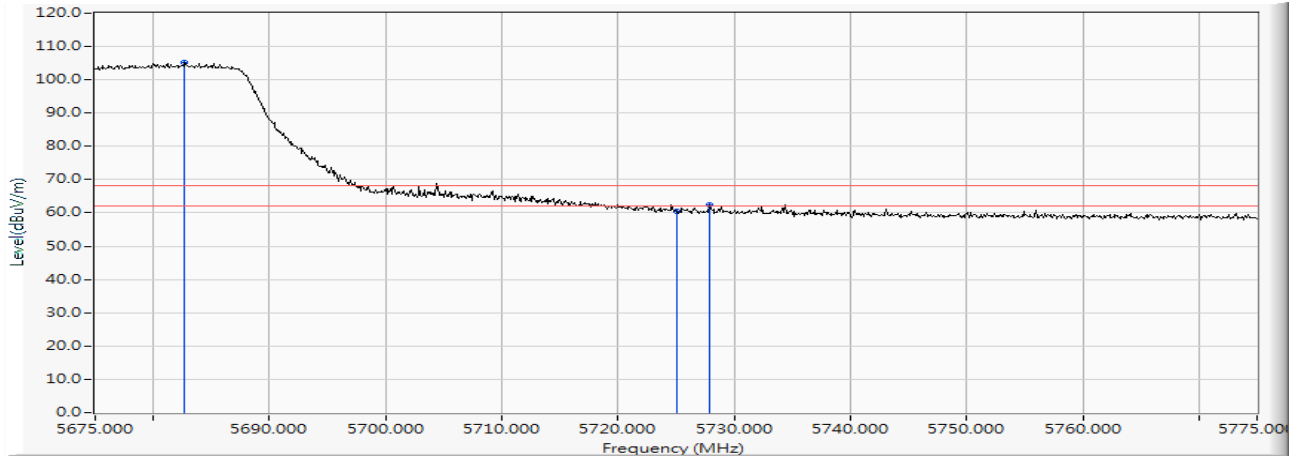

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5682.700	16.481	88.653	105.134	--	--	PEAK
2		5725.000	16.544	43.838	60.382	-7.838	68.220	PEAK
3		5727.900	16.548	45.907	62.455	-5.765	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)


Vertical

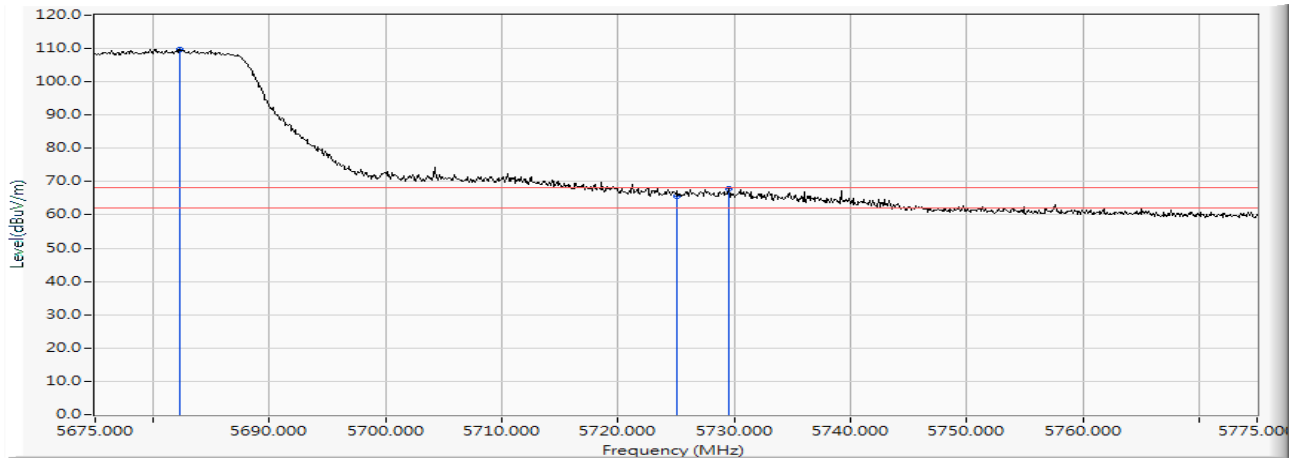

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5682.300	16.481	93.322	109.802	--	--	PEAK
2		5725.000	16.544	49.069	65.613	-2.607	68.220	PEAK
3		5729.500	16.548	51.435	67.984	-0.236	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)


Horizontal

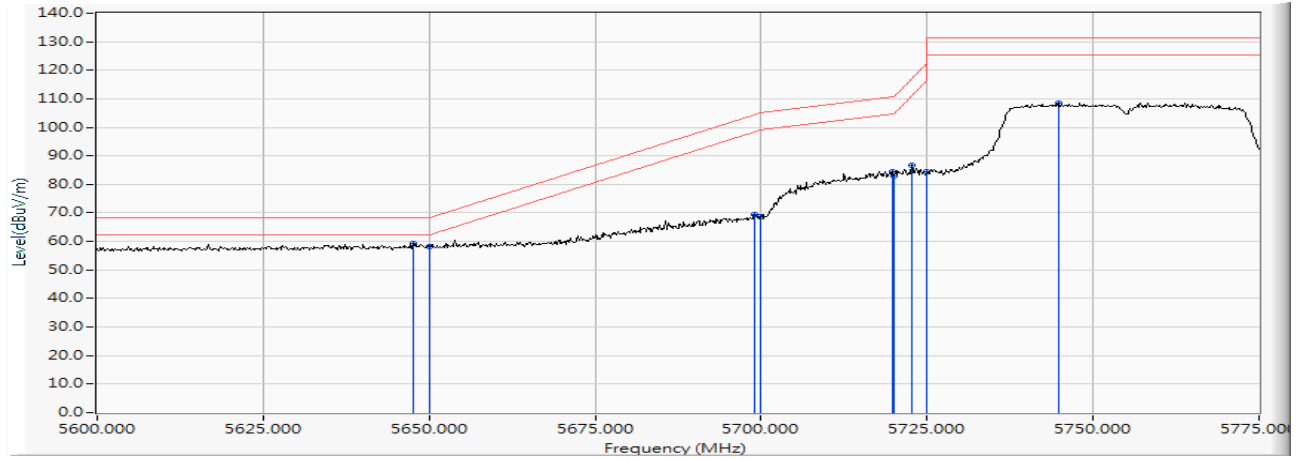

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5647.600	16.440	42.860	59.300	-8.920	68.220	PEAK
2		5650.000	16.447	41.614	58.061	-10.159	68.220	PEAK
3		5699.050	16.500	52.796	69.296	-35.201	104.497	PEAK
4		5700.000	16.502	52.072	68.574	-36.626	105.200	PEAK
5		5719.700	16.535	67.975	84.510	-26.206	110.716	PEAK
6		5720.000	16.535	66.570	83.105	-27.695	110.800	PEAK
7		5722.675	16.540	70.231	86.771	-30.128	116.899	PEAK
8		5725.000	16.544	67.731	84.275	-37.925	122.200	PEAK
9		5744.900	16.560	91.894	108.454	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)


Vertical

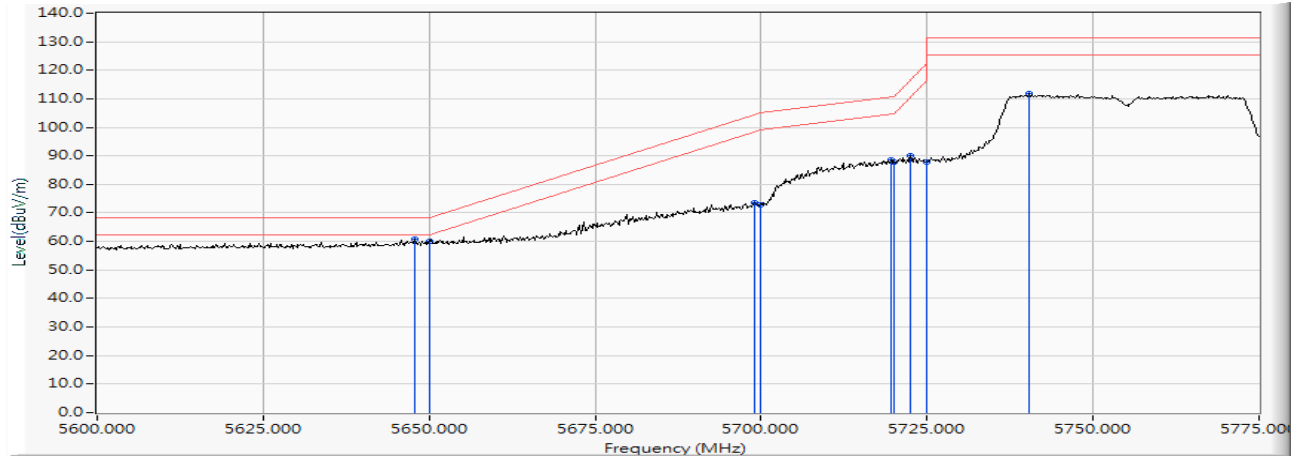

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5647.775	16.440	44.230	60.671	-7.549	68.220	PEAK
2		5650.000	16.447	43.505	59.952	-8.268	68.220	PEAK
3		5699.050	16.500	57.012	73.512	-30.985	104.497	PEAK
4		5700.000	16.502	56.407	72.909	-32.291	105.200	PEAK
5		5719.525	16.534	71.971	88.505	-22.162	110.667	PEAK
6		5720.000	16.535	71.251	87.786	-23.014	110.800	PEAK
7		5722.500	16.540	73.383	89.923	-26.577	116.500	PEAK
8		5725.000	16.544	71.363	87.907	-34.293	122.200	PEAK
9		5740.350	16.556	95.240	111.796	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)


Horizontal

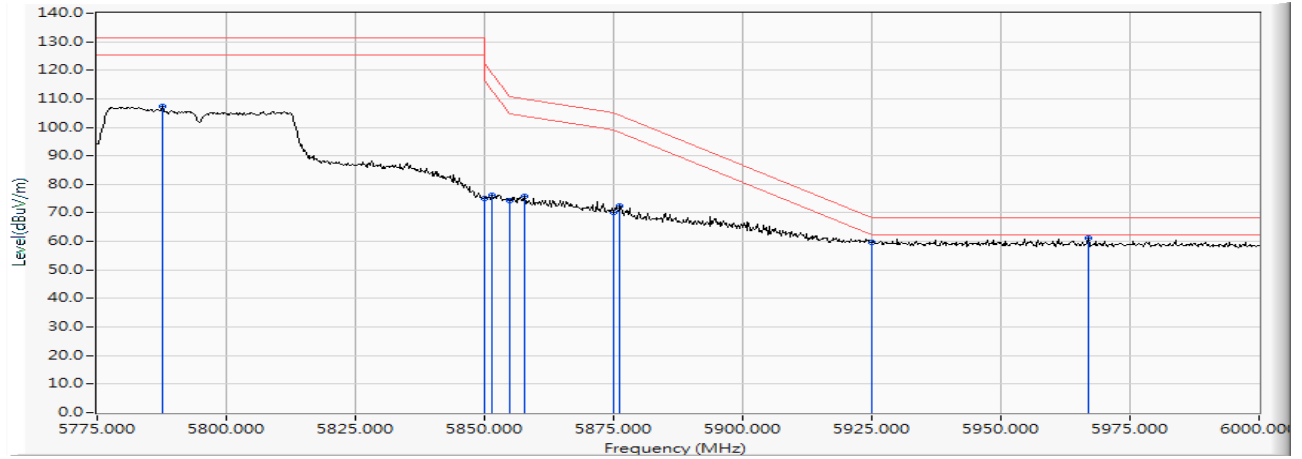

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5787.600	16.627	90.583	107.210	--	--	PEAK
2		5850.000	16.748	58.459	75.207	-46.993	122.200	PEAK
3		5851.500	16.750	59.508	76.259	-42.521	118.780	PEAK
4		5855.000	16.758	57.657	74.415	-36.385	110.800	PEAK
5		5857.800	16.765	58.894	75.659	-34.357	110.016	PEAK
6		5875.000	16.807	53.473	70.281	-34.919	105.200	PEAK
7		5876.250	16.811	55.658	72.469	-31.806	104.275	PEAK
8		5925.000	16.920	42.885	59.805	-8.395	68.200	PEAK
9	*	5966.925	16.990	44.052	61.042	-7.158	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)


Vertical

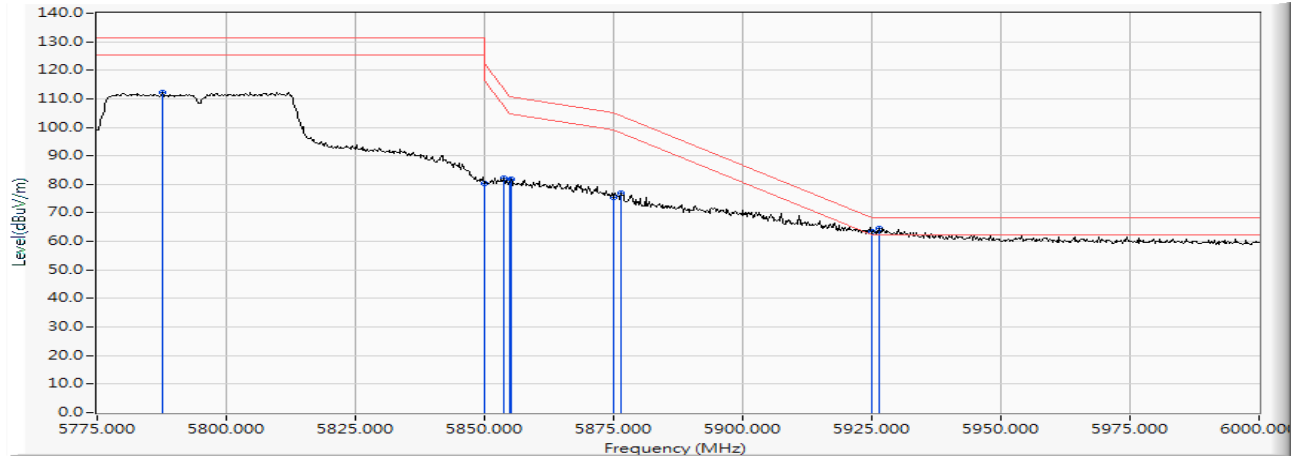

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5787.600	16.627	95.713	112.340	--	--	PEAK
2		5850.000	16.748	63.618	80.366	-41.834	122.200	PEAK
3		5853.750	16.754	65.427	82.182	-31.468	113.650	PEAK
4		5855.000	16.758	64.551	81.309	-29.491	110.800	PEAK
5		5855.100	16.758	64.931	81.689	-29.083	110.772	PEAK
6		5875.000	16.807	58.743	75.551	-29.649	105.200	PEAK
7		5876.475	16.812	60.203	77.015	-27.093	104.108	PEAK
8		5925.000	16.920	46.594	63.514	-4.686	68.200	PEAK
9	*	5926.425	16.922	47.632	64.553	-3.647	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

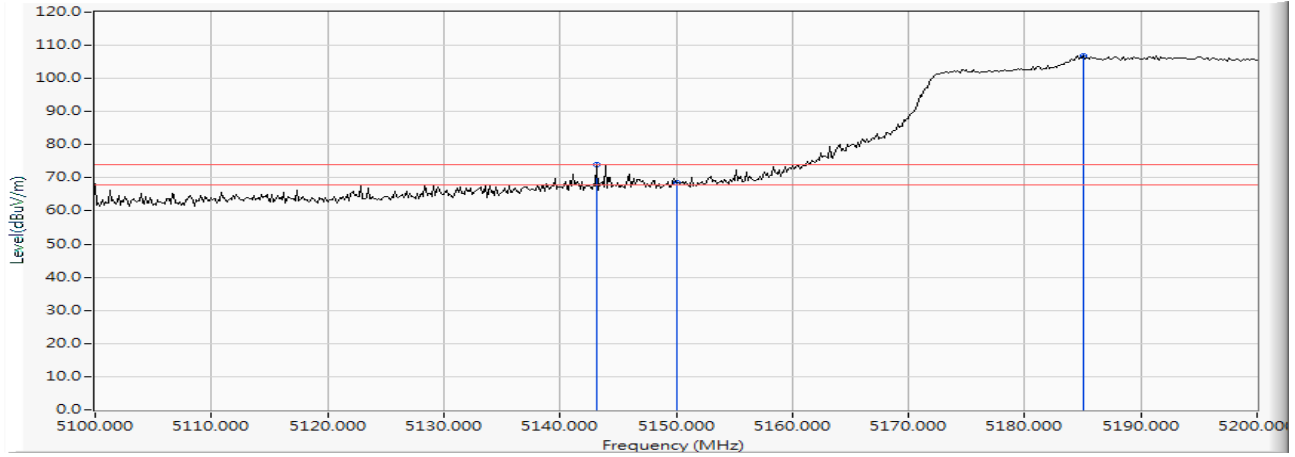


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5143.188	15.267	58.581	73.849	-0.151	74.000	PEAK
2		5150.000	15.307	53.279	68.586	-5.414	74.000	PEAK
3	*	5185.072	15.415	91.296	106.711	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

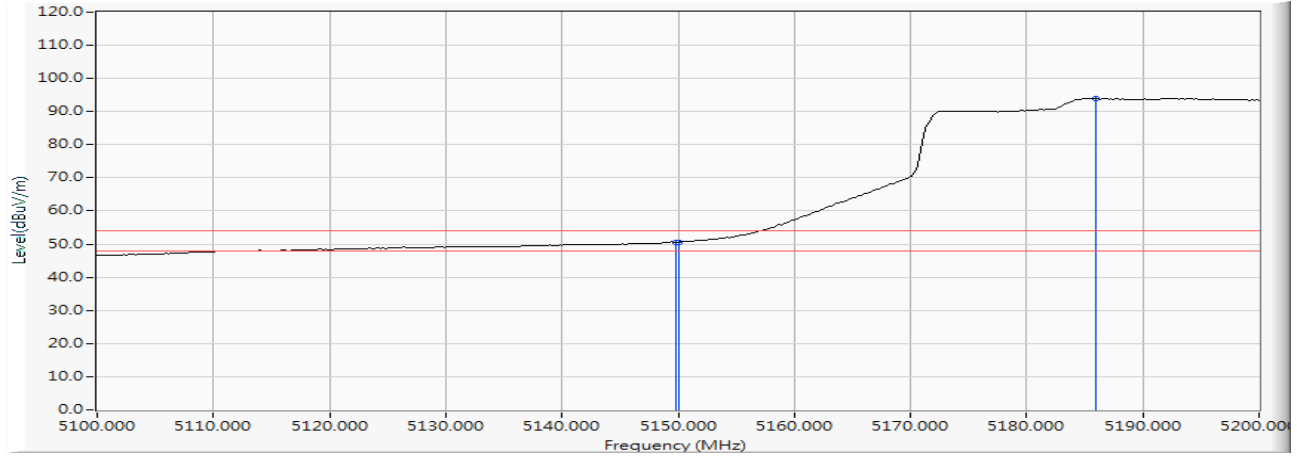


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.855	15.307	35.358	50.664	-3.336	54.000	AVERAGE
2		5150.000	15.307	35.342	50.649	-3.351	54.000	AVERAGE
3	*	5185.942	15.418	78.555	93.974	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Vertical

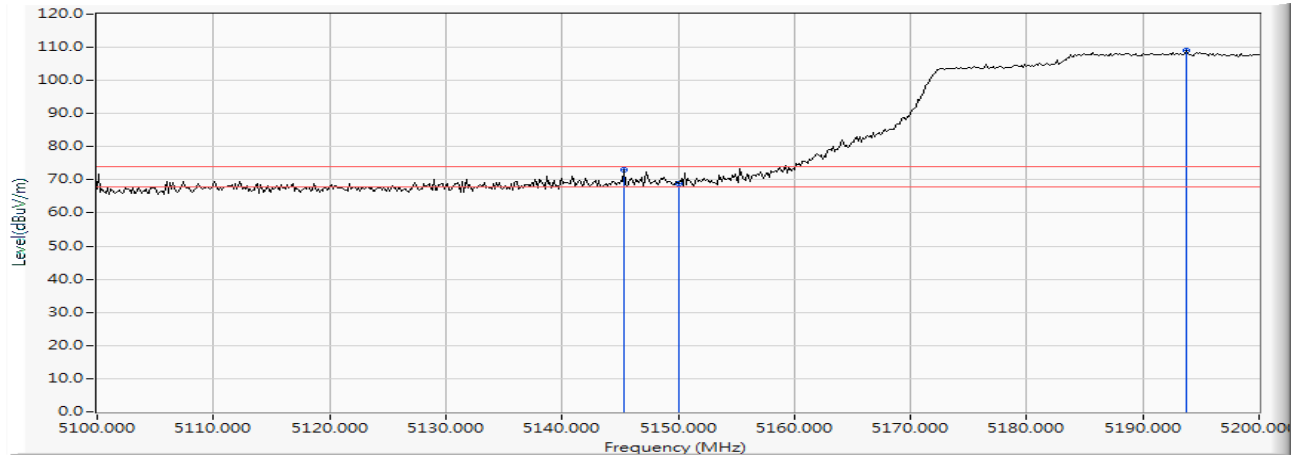


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5145.362	15.281	57.819	73.100	-0.900	74.000	PEAK
2		5150.000	15.307	53.509	68.816	-5.184	74.000	PEAK
3	*	5193.768	15.450	93.618	109.067	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Vertical

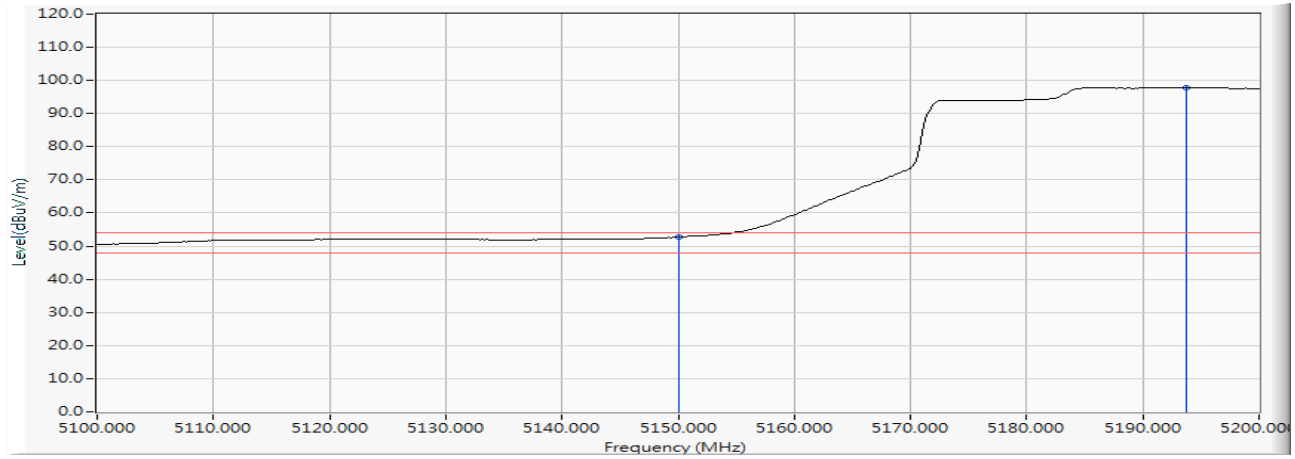


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	37.449	52.756	-1.244	54.000	AVERAGE
2	*	5193.768	15.450	82.399	97.848	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

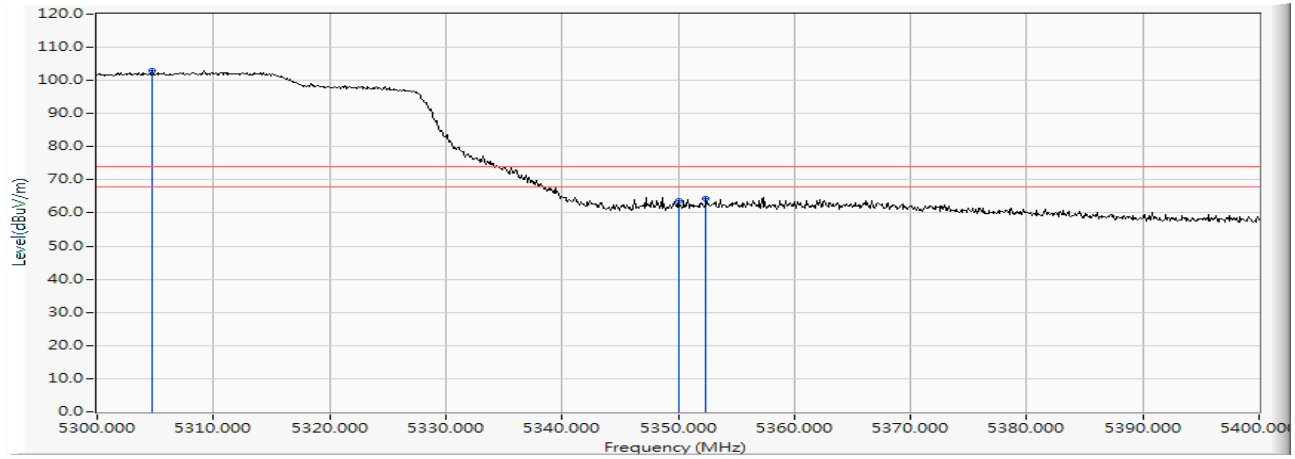


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5304.700	15.807	87.182	102.990	--	--	PEAK
2		5350.000	15.912	47.755	63.667	-10.333	74.000	PEAK
3		5352.400	15.920	48.439	64.359	-9.641	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

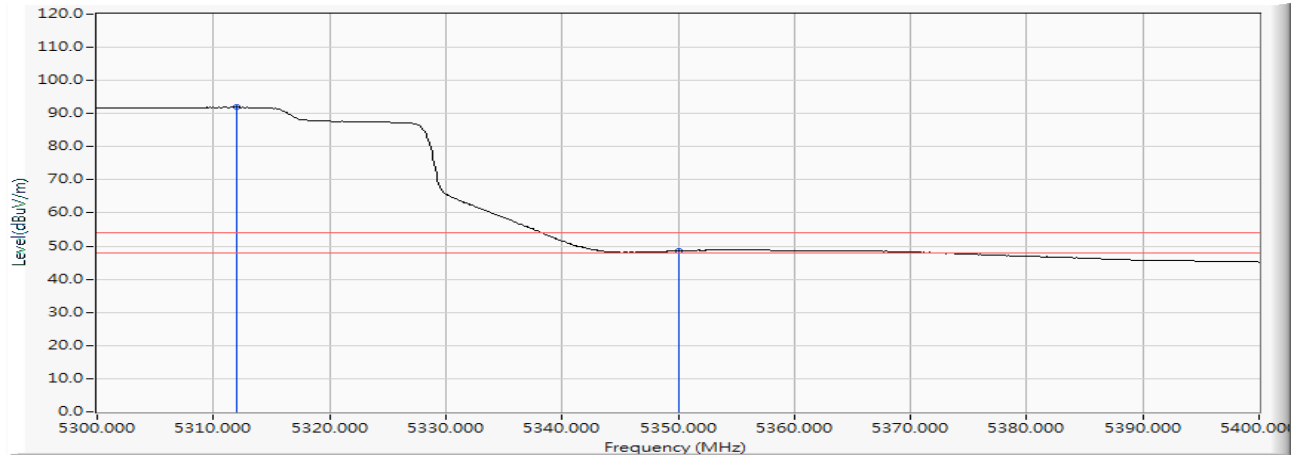


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5312.000	15.825	76.090	91.915	--	--	AVERAGE
2		5350.000	15.912	32.615	48.527	-5.473	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Vertical

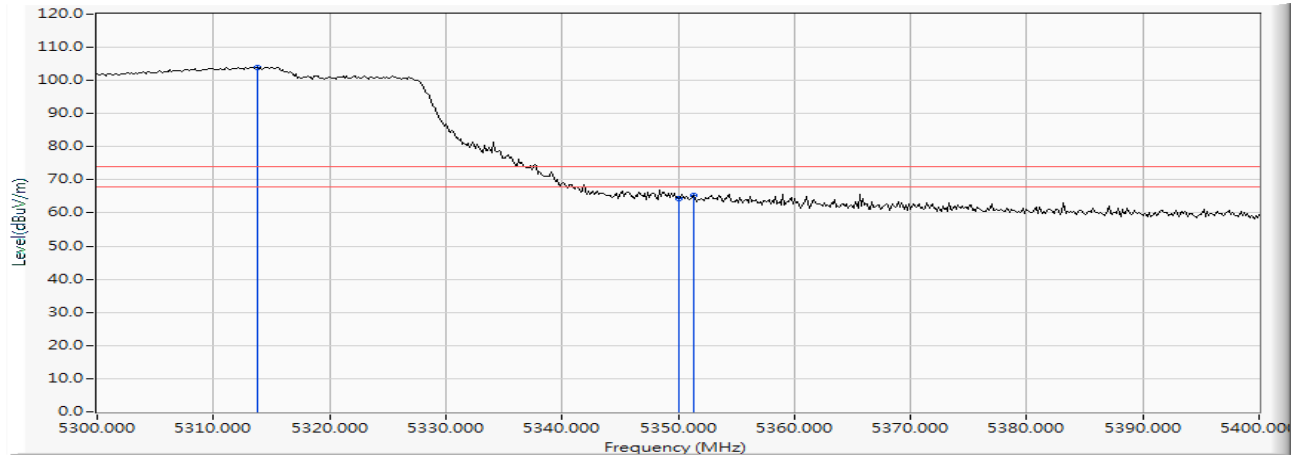


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.768	15.830	88.211	104.041	--	--	PEAK
2		5350.000	15.912	48.429	64.341	-9.659	74.000	PEAK
3		5351.304	15.917	49.353	65.269	-8.731	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Vertical

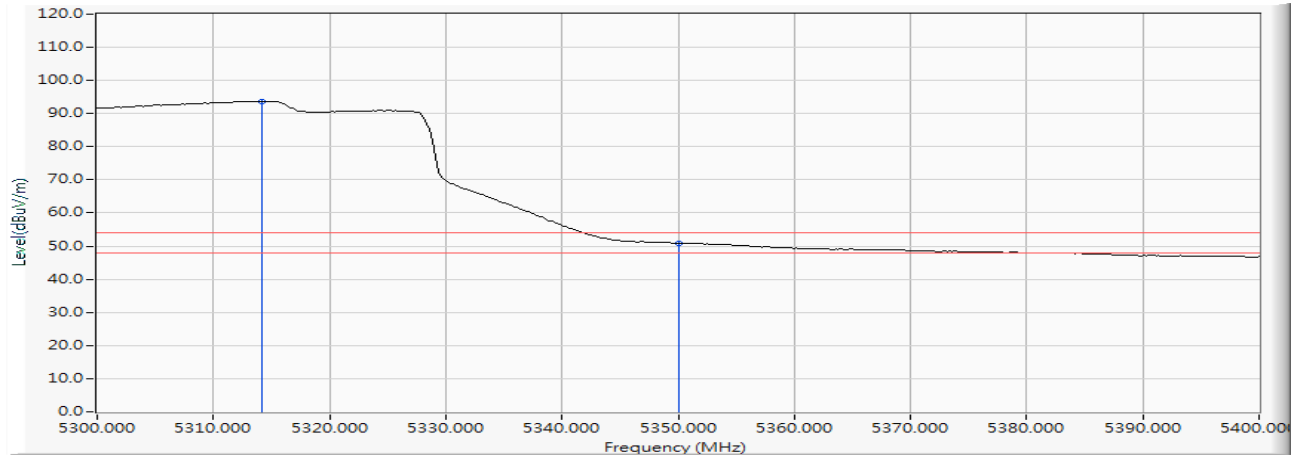


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.203	15.832	77.936	93.767	--	--	AVERAGE
2		5350.000	15.912	35.038	50.950	-3.050	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

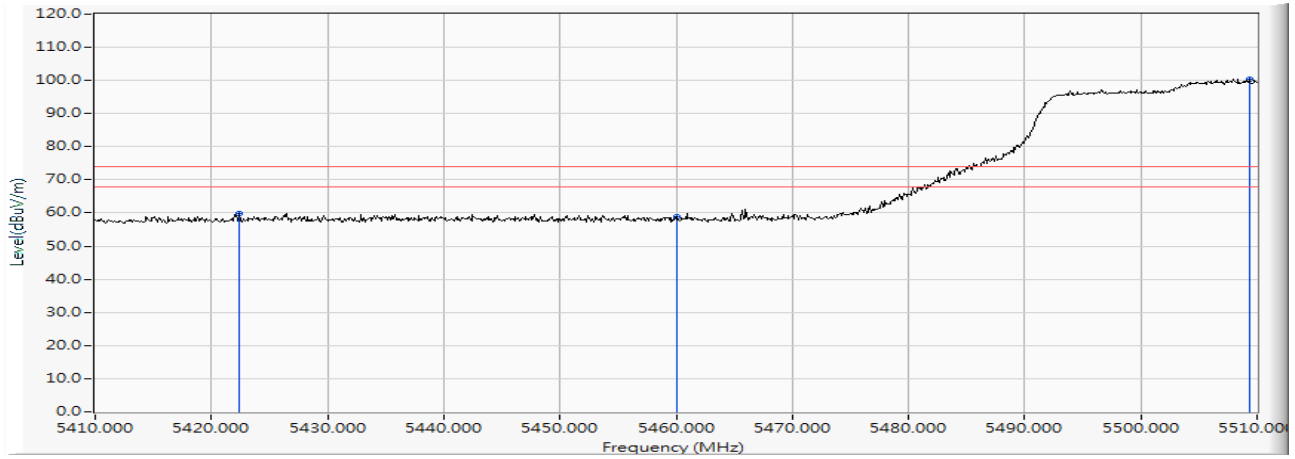


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5422.400	16.088	43.744	59.832	-14.168	74.000	PEAK
2		5460.000	16.185	42.778	58.963	-15.037	74.000	PEAK
3	*	5509.300	16.274	84.195	100.470	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

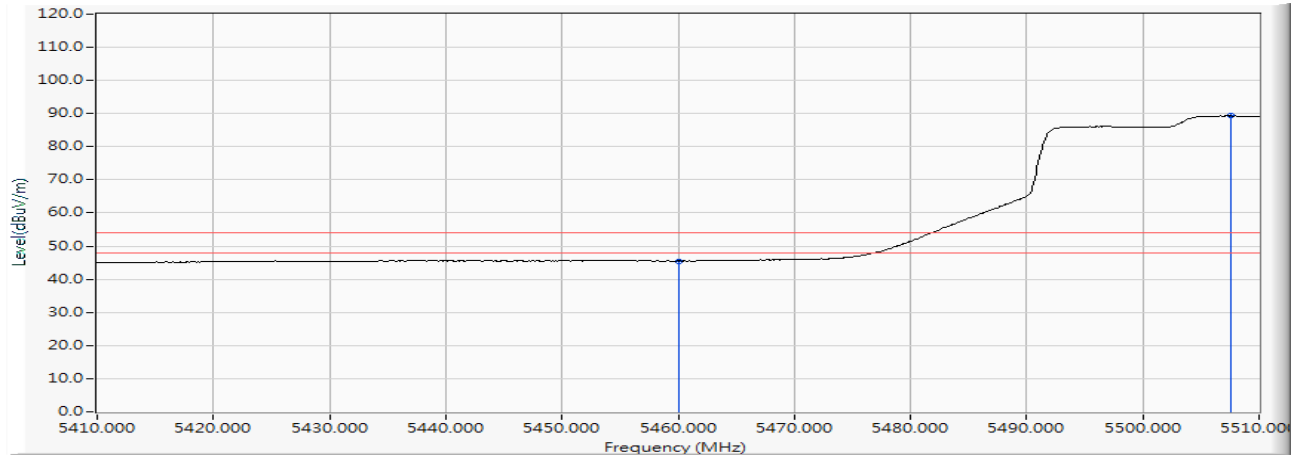


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	29.308	45.493	-8.507	54.000	AVERAGE
2	*	5507.600	16.274	73.095	89.369	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Vertical

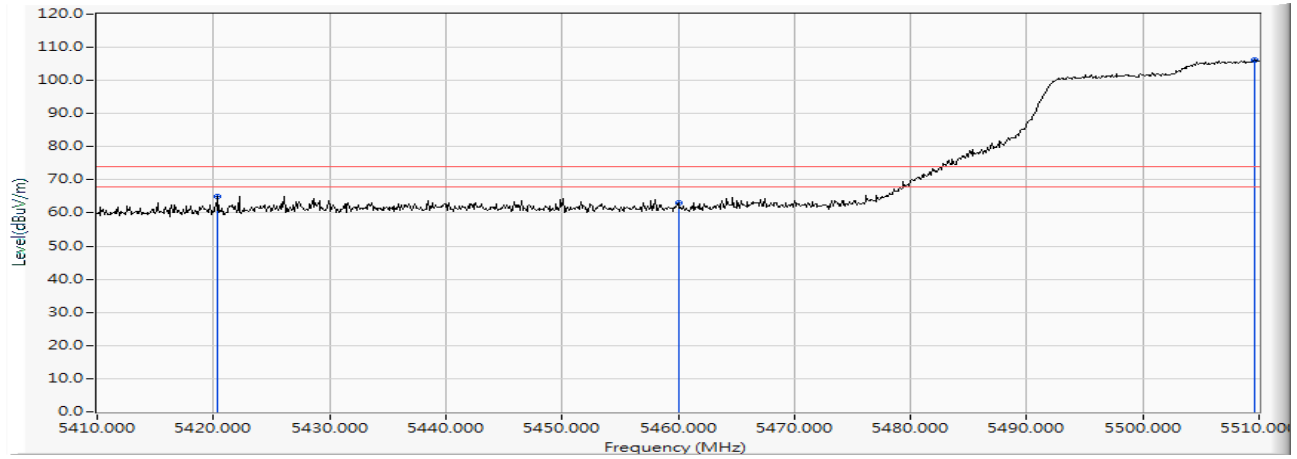


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5420.400	16.084	48.852	64.936	-9.064	74.000	PEAK
2		5460.000	16.185	47.014	63.199	-10.801	74.000	PEAK
3	*	5509.600	16.274	89.865	106.140	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Vertical

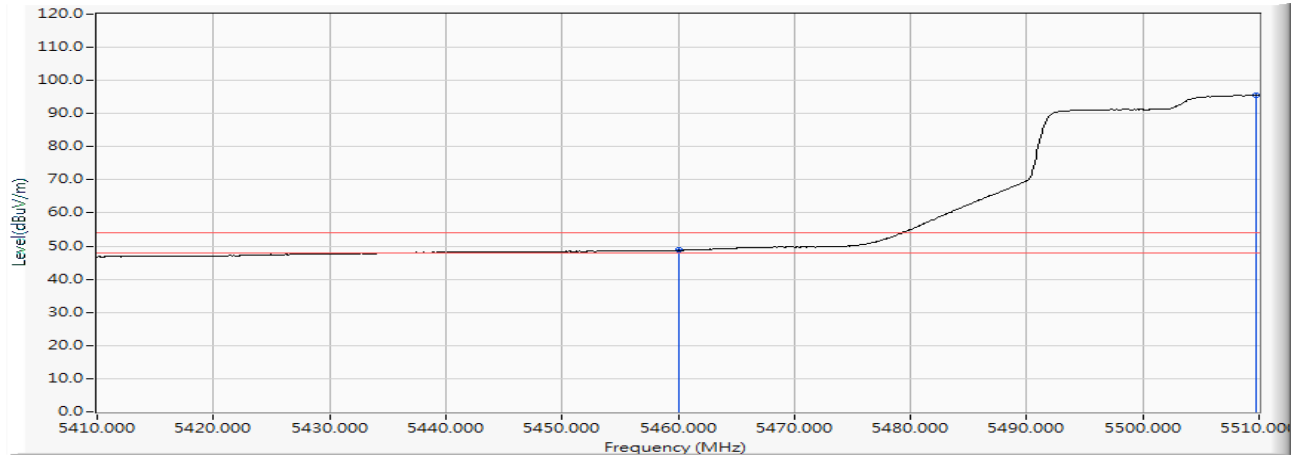


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	32.589	48.774	-5.226	54.000	AVERAGE
2	*	5509.800	16.275	79.308	95.583	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)


Horizontal

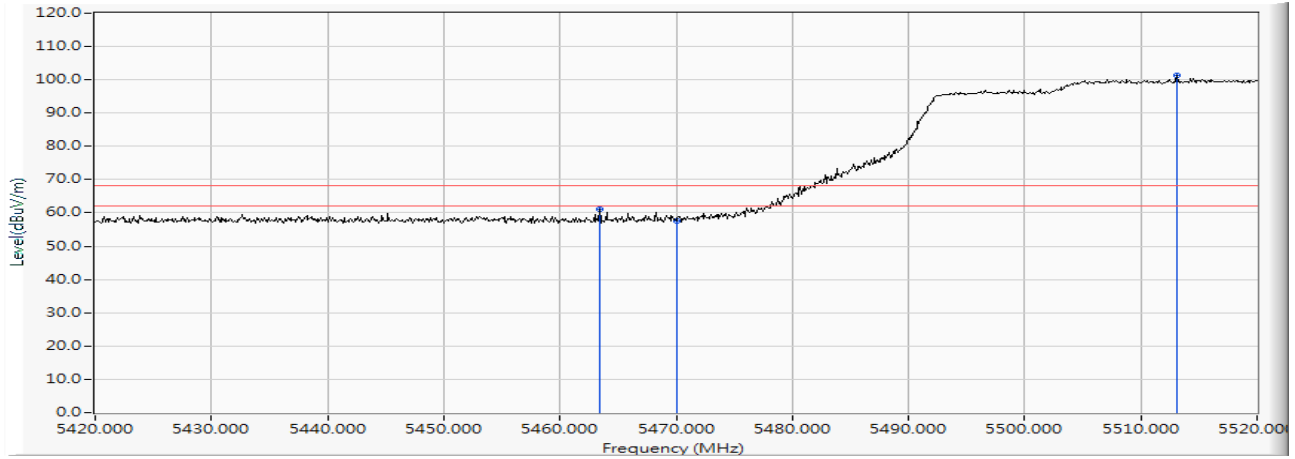

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5463.400	16.189	44.828	61.017	-7.203	68.220	PEAK
2		5470.000	16.200	41.359	57.559	-10.661	68.220	PEAK
3	*	5513.100	16.280	85.005	101.285	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)


Vertical

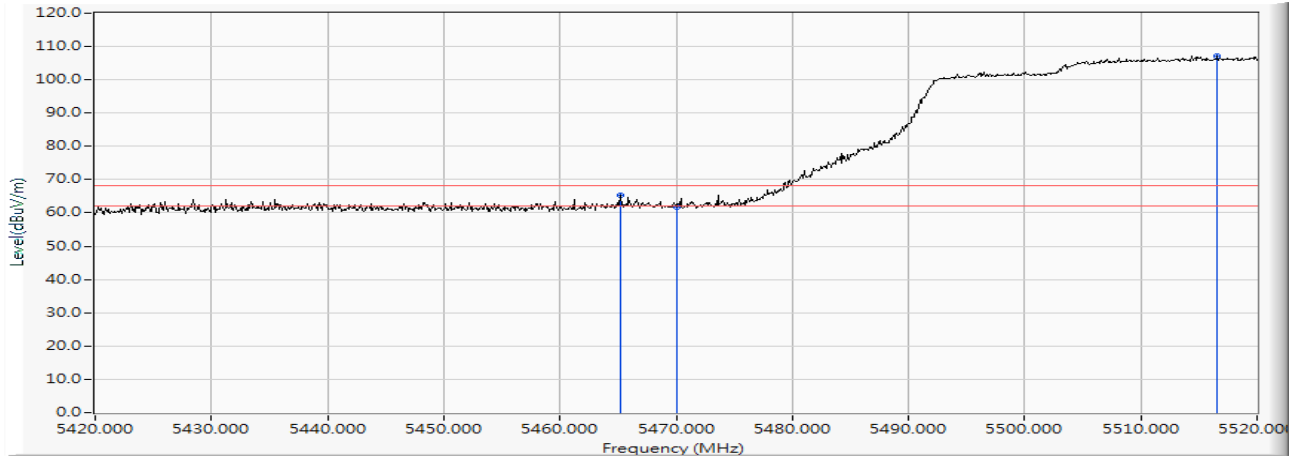

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5465.200	16.192	49.170	65.362	-2.858	68.220	PEAK
2		5470.000	16.200	45.559	61.759	-6.461	68.220	PEAK
3	*	5516.600	16.286	90.962	107.248	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)


Horizontal

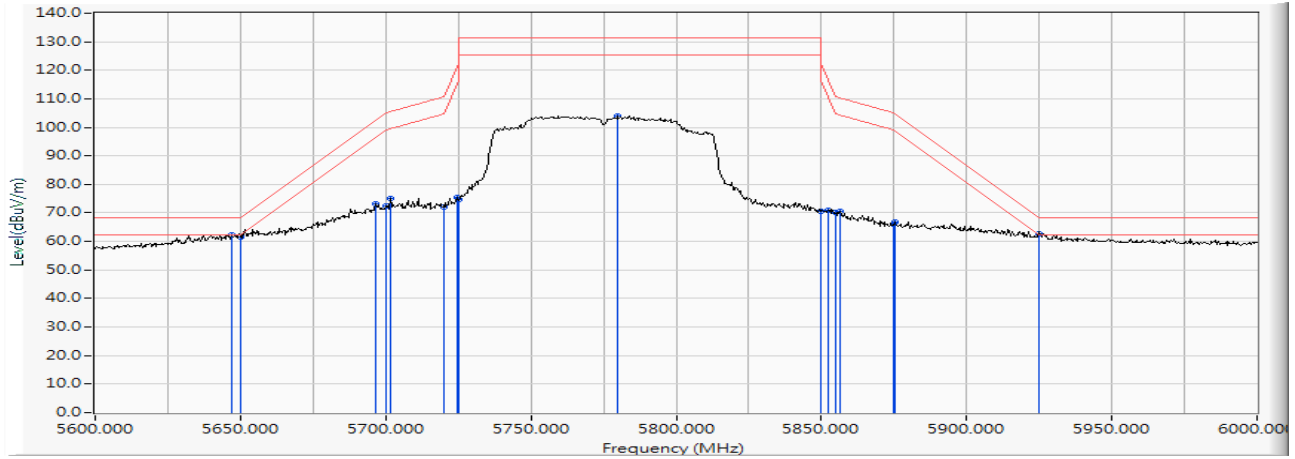

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5646.800	16.438	45.827	62.265	-5.955	68.220	PEAK
2		5650.000	16.447	45.010	61.457	-6.763	68.220	PEAK
3		5696.400	16.496	56.713	73.210	-29.327	102.537	PEAK
4		5700.000	16.502	55.861	72.363	-32.837	105.200	PEAK
5		5701.600	16.504	58.484	74.988	-30.660	105.648	PEAK
6		5720.000	16.535	55.564	72.099	-38.701	110.800	PEAK
7		5724.400	16.543	58.999	75.542	-45.290	120.832	PEAK
8		5725.000	16.544	58.159	74.703	-47.497	122.200	PEAK
9		5780.000	16.607	87.315	103.922	--	--	PEAK
10		5850.000	16.748	53.992	70.740	-51.460	122.200	PEAK
11		5852.400	16.752	54.303	71.055	-45.673	116.728	PEAK
12		5855.000	16.758	53.342	70.100	-40.700	110.800	PEAK
13		5856.400	16.761	53.748	70.510	-39.898	110.408	PEAK
14		5875.000	16.807	49.417	66.225	-38.975	105.200	PEAK
15		5875.200	16.808	50.034	66.842	-38.210	105.052	PEAK
16	*	5925.000	16.920	45.926	62.846	-5.354	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)


Vertical

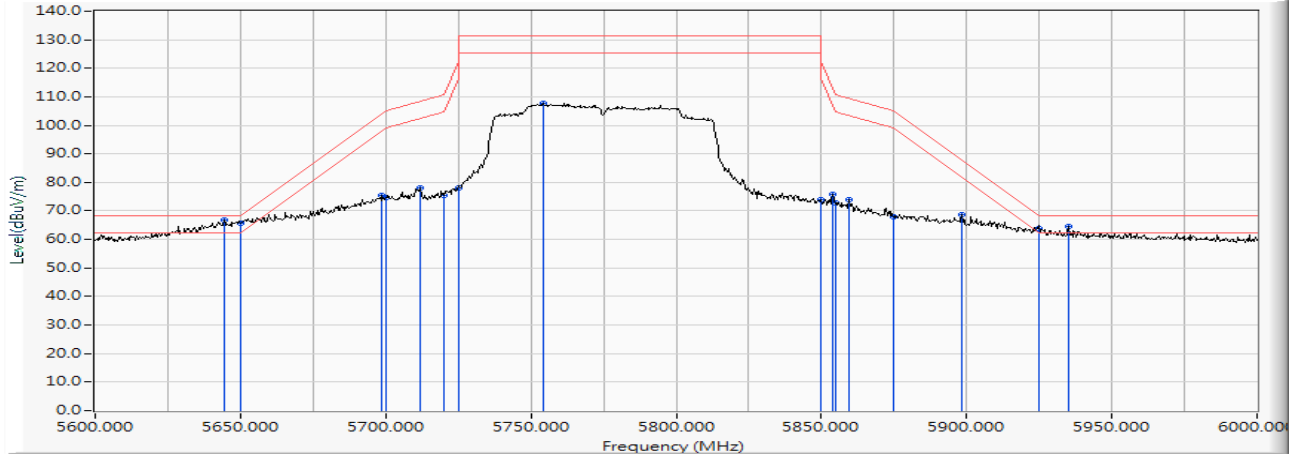

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5644.400	16.431	50.352	66.784	-1.436	68.220	PEAK
2		5650.000	16.447	49.382	65.829	-2.391	68.220	PEAK
3		5698.800	16.499	58.772	75.272	-29.040	104.312	PEAK
4		5700.000	16.502	58.230	74.732	-30.468	105.200	PEAK
5		5712.000	16.520	61.419	77.938	-30.622	108.560	PEAK
6		5720.000	16.535	58.751	75.286	-35.514	110.800	PEAK
7		5725.000	16.544	61.620	78.164	-44.036	122.200	PEAK
8		5754.400	16.575	91.101	107.676	--	--	PEAK
9		5850.000	16.748	57.068	73.816	-48.384	122.200	PEAK
10		5854.000	16.755	59.061	75.817	-37.263	113.080	PEAK
11		5855.000	16.758	55.924	72.682	-38.118	110.800	PEAK
12		5859.600	16.769	57.057	73.826	-35.686	109.512	PEAK
13		5875.000	16.807	50.998	67.806	-37.394	105.200	PEAK
14		5898.400	16.858	51.897	68.755	-19.129	87.884	PEAK
15		5925.000	16.920	46.899	63.819	-4.381	68.200	PEAK
16		5935.200	16.930	47.462	64.393	-3.807	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

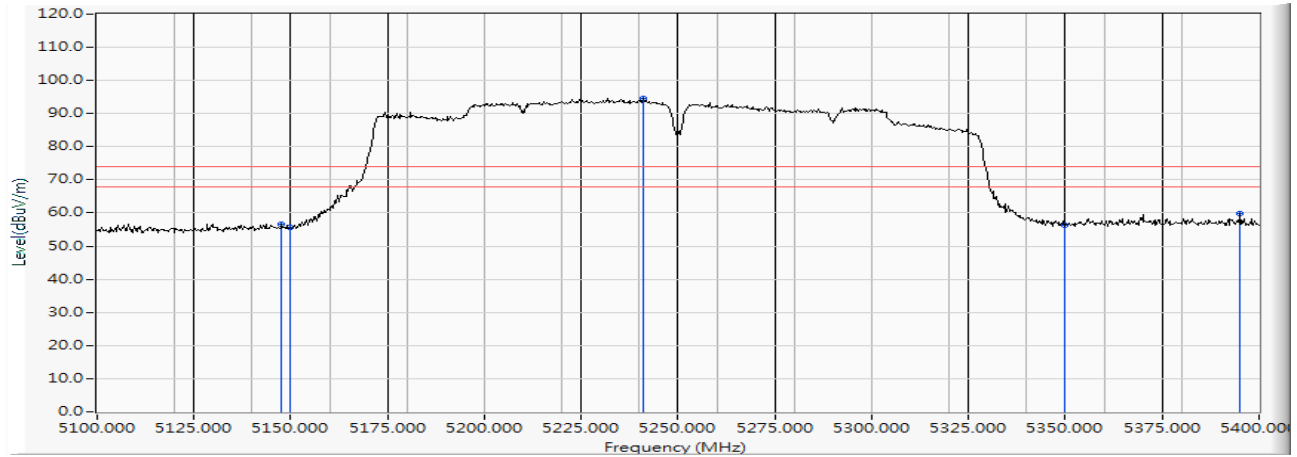


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5147.700	15.294	41.411	56.705	-17.295	74.000	PEAK
2		5150.000	15.307	40.238	55.545	-18.455	74.000	PEAK
3	*	5241.000	15.635	78.929	94.564	--	--	PEAK
4		5350.000	15.912	40.288	56.200	-17.800	74.000	PEAK
5		5395.200	16.024	43.887	59.910	-14.090	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

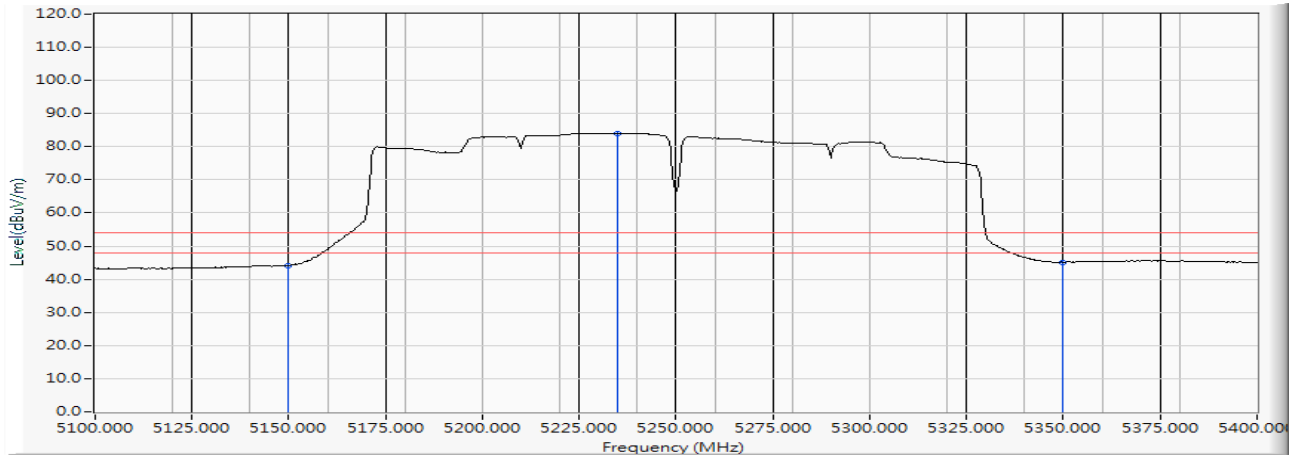


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	28.889	44.196	-9.804	54.000	AVERAGE
2	*	5235.000	15.618	68.471	84.089	--	--	AVERAGE
3		5350.000	15.912	29.255	45.167	-8.833	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Vertical

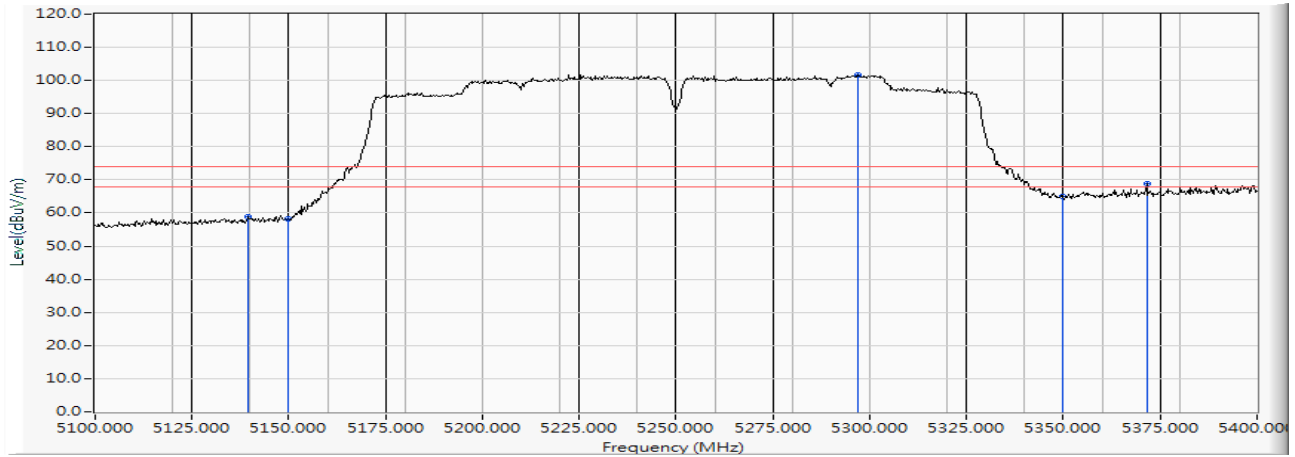


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5139.600	15.249	43.576	58.824	-15.176	74.000	PEAK
2		5150.000	15.307	42.805	58.112	-15.888	74.000	PEAK
3	*	5296.800	15.789	85.943	101.731	--	--	PEAK
4		5350.000	15.912	49.037	64.949	-9.051	74.000	PEAK
5		5371.500	15.977	52.971	68.948	-5.052	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Vertical

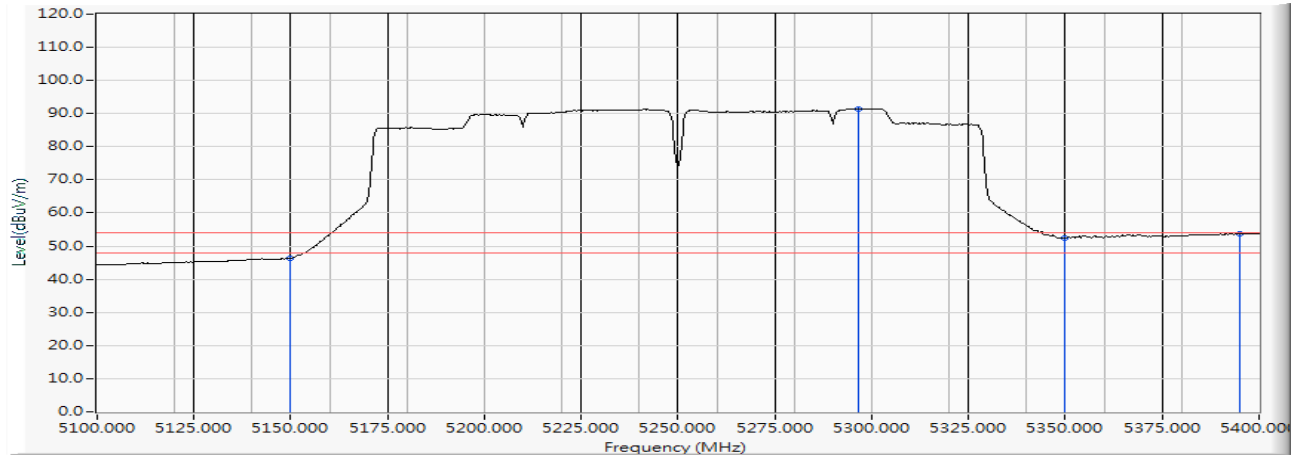


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	31.118	46.425	-7.575	54.000	AVERAGE
2	*	5296.500	15.787	75.695	91.482	--	--	AVERAGE
3		5350.000	15.912	36.477	52.389	-1.611	54.000	AVERAGE
4		5394.900	16.023	37.838	53.861	-0.139	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

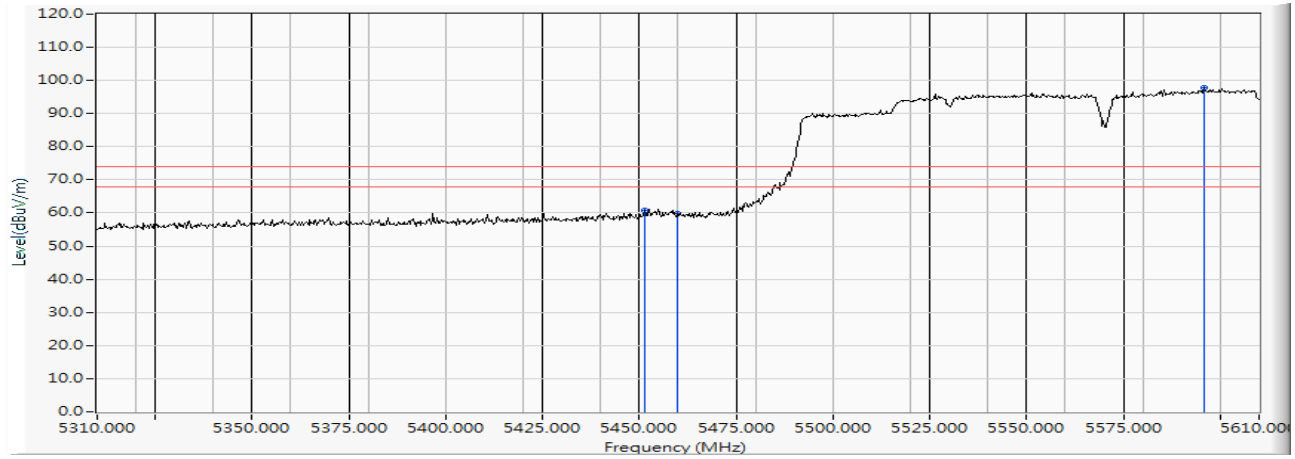


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5451.300	16.162	44.778	60.940	-13.060	74.000	PEAK
2		5460.000	16.185	43.501	59.686	-14.314	74.000	PEAK
3	*	5595.900	16.381	81.432	97.812	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

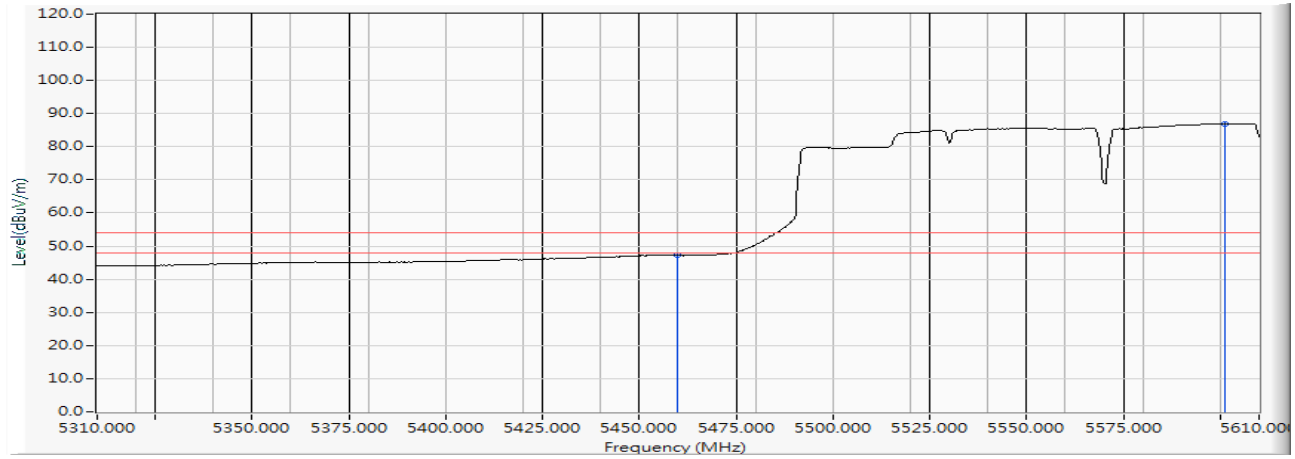


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	30.992	47.177	-6.823	54.000	AVERAGE
2	*	5601.000	16.385	70.600	86.984	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Vertical

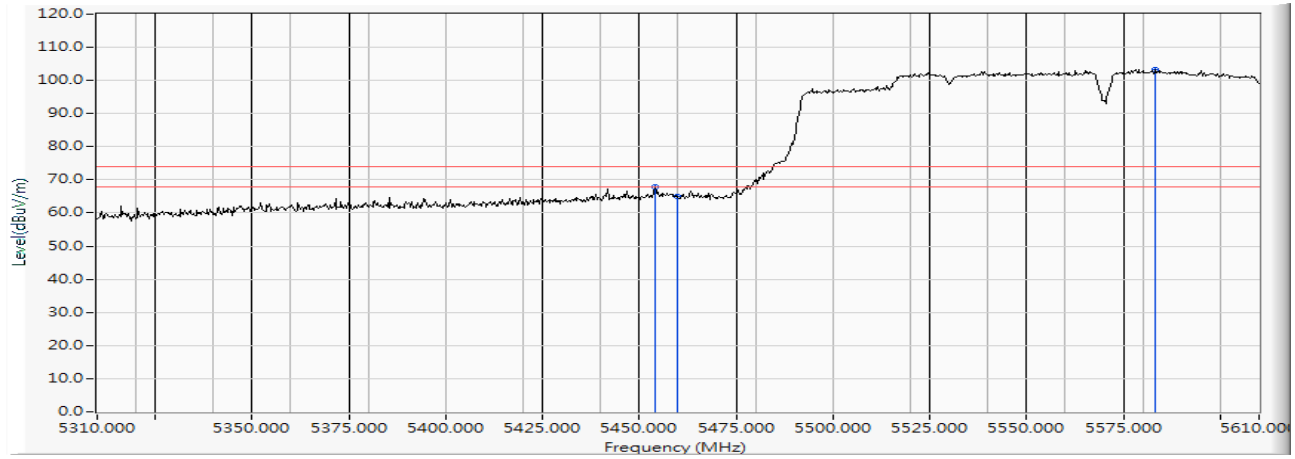


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5454.000	16.170	51.715	67.885	-6.115	74.000	PEAK
2		5460.000	16.185	48.833	65.018	-8.982	74.000	PEAK
3	*	5583.300	16.370	87.003	103.373	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Vertical

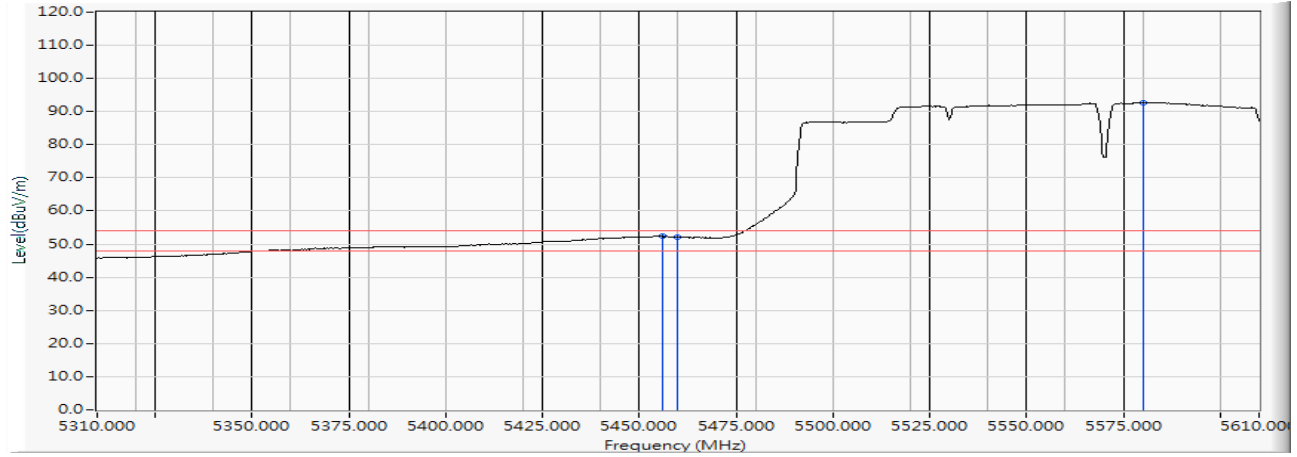


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5456.100	16.177	36.184	52.361	-1.639	54.000	AVERAGE
2		5460.000	16.185	35.902	52.087	-1.913	54.000	AVERAGE
3	*	5580.000	16.363	76.420	92.783	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)


Horizontal

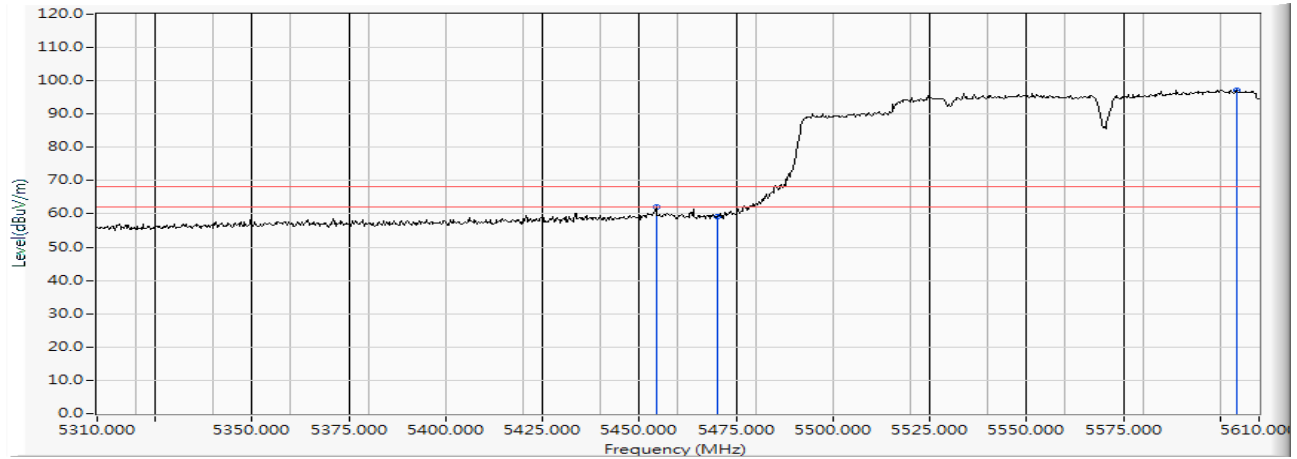

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5454.300	16.172	45.831	62.002	-6.218	68.220	PEAK
2		5470.000	16.200	42.845	59.045	-9.175	68.220	PEAK
3	*	5604.300	16.388	80.793	97.181	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)


Vertical

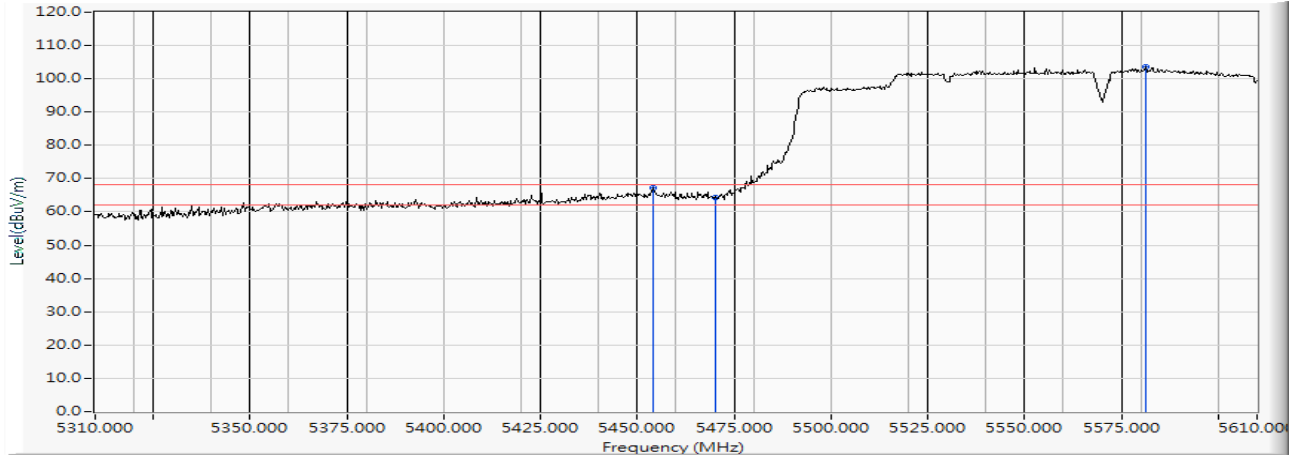

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5454.000	16.170	51.078	67.248	-0.972	68.220	PEAK
2		5470.000	16.200	48.200	64.400	-3.820	68.220	PEAK
3	*	5581.200	16.367	87.231	103.597	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

Horizontal

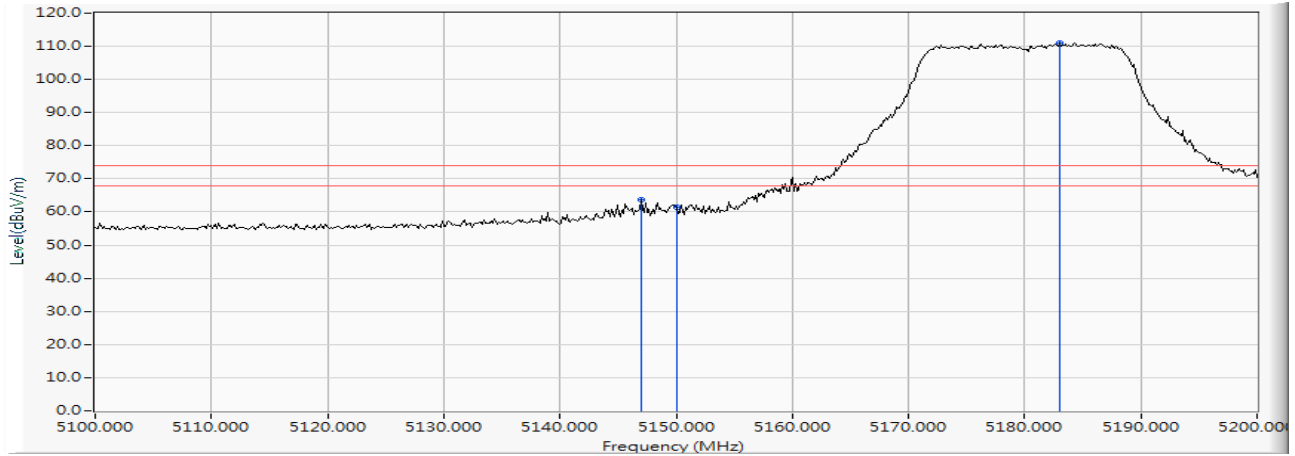


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5146.957	15.289	48.314	63.604	-10.396	74.000	PEAK
2	5150.000	15.307	46.253	61.560	-12.440	74.000	PEAK
3	* 5183.043	15.406	95.725	111.131	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

Horizontal

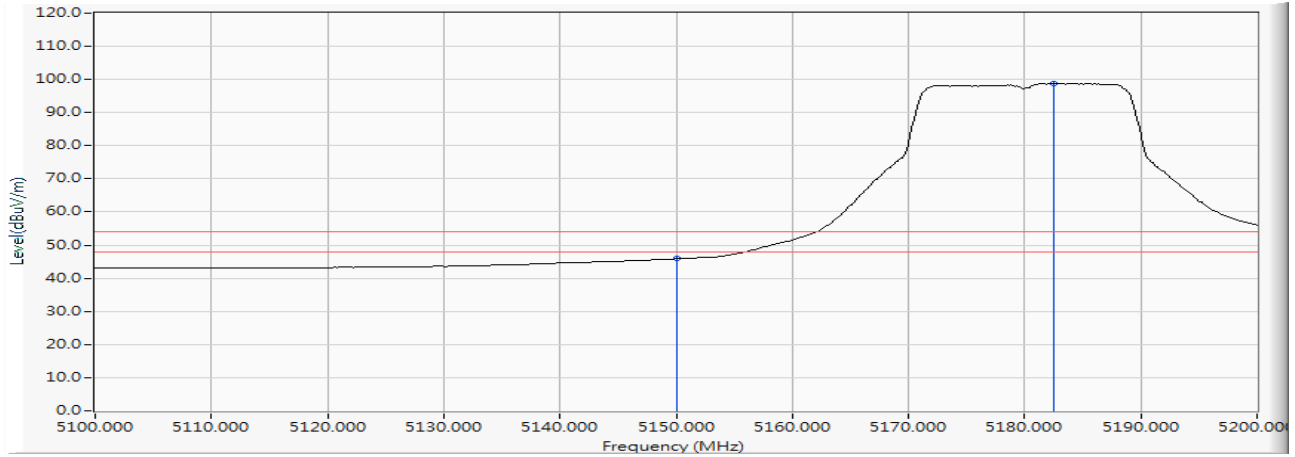


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	30.557	45.864	-8.136	54.000	AVERAGE
2	*	5182.464	15.403	83.451	98.854	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

Vertical

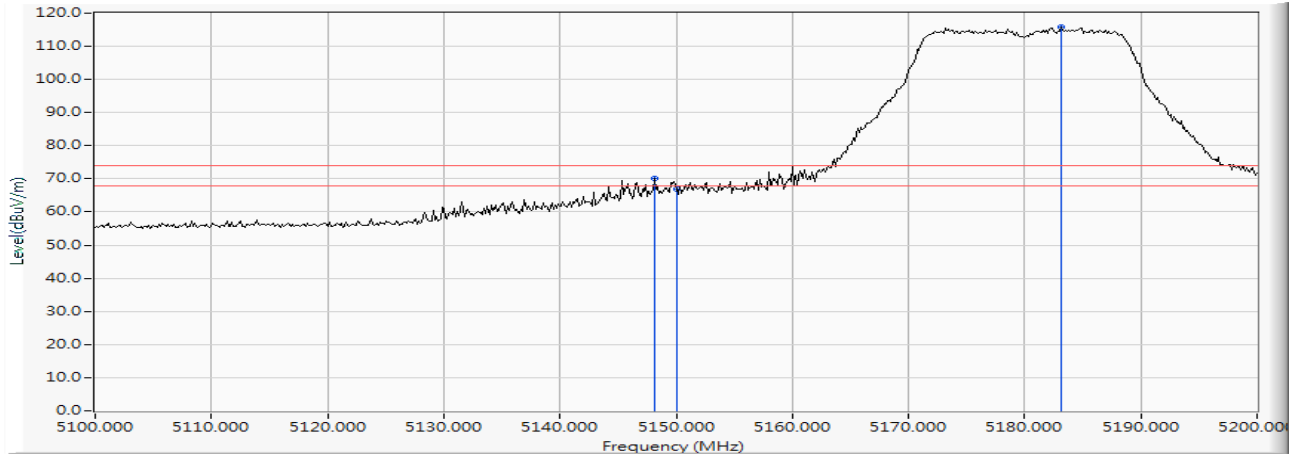


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.116	15.296	54.817	70.113	-3.887	74.000	PEAK
2		5150.000	15.307	51.744	67.051	-6.949	74.000	PEAK
3	*	5183.188	15.406	100.288	115.694	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

Vertical

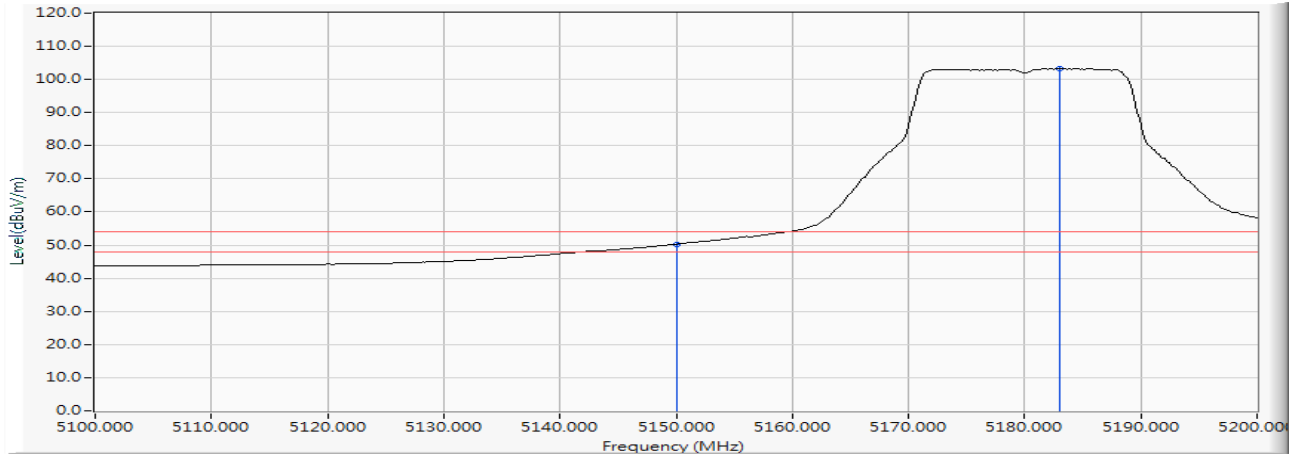


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	35.009	50.316	-3.684	54.000	AVERAGE
2	*	5183.043	15.406	87.851	103.257	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

Horizontal

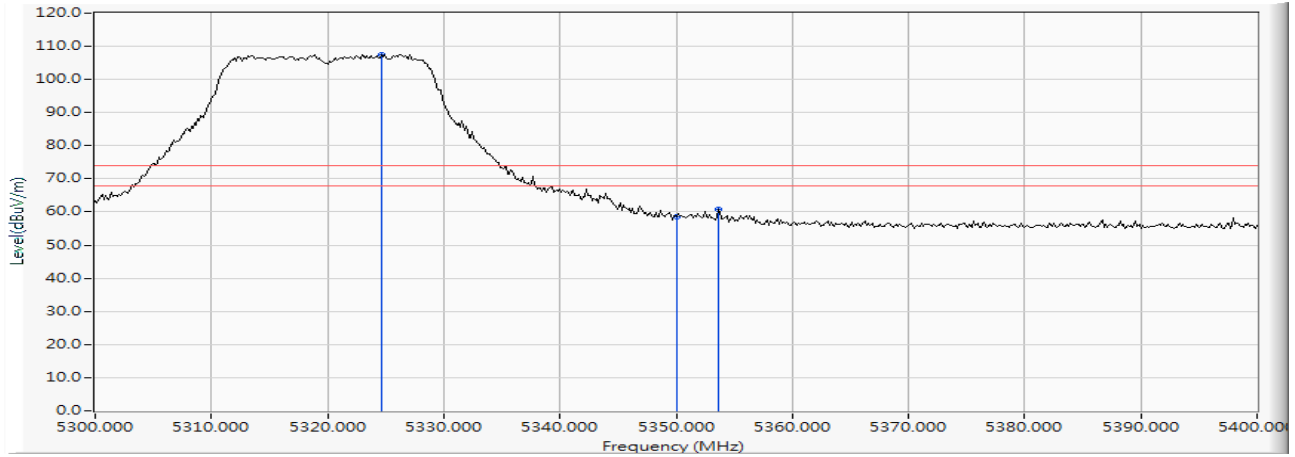


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5324.638	15.865	91.665	107.530	--	--	PEAK
2		5350.000	15.912	42.611	58.523	-15.477	74.000	PEAK
3		5353.623	15.923	44.960	60.884	-13.116	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

Horizontal

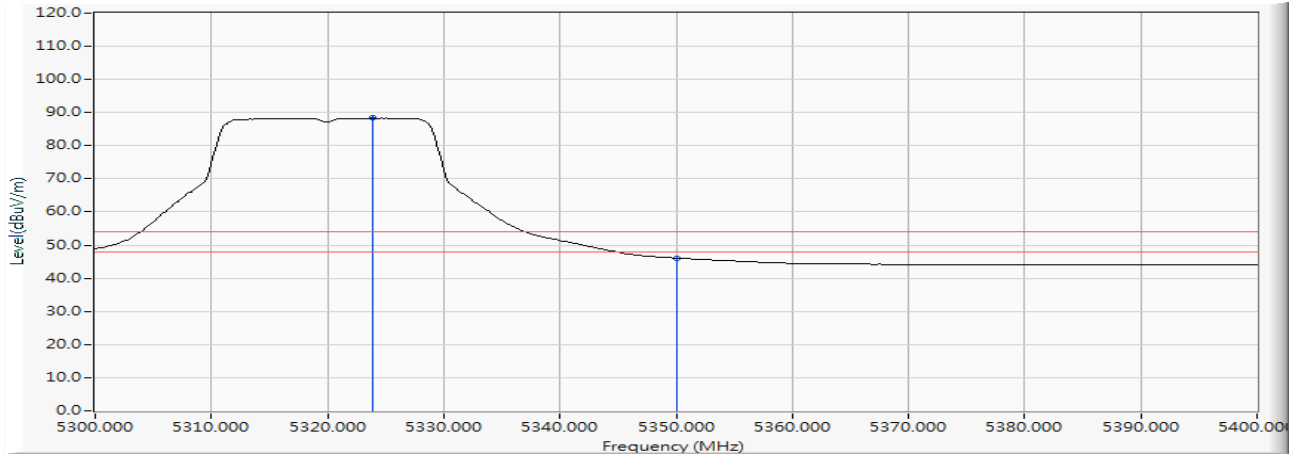


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5323.913	15.863	72.456	88.318	--	--	AVERAGE
2		5350.000	15.912	30.173	46.085	-7.915	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

Vertical

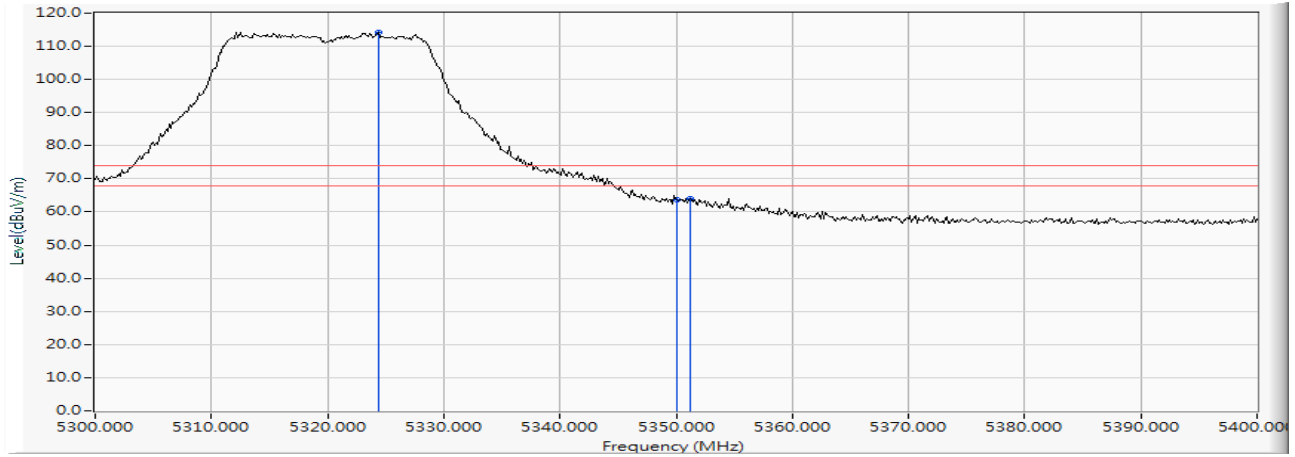


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5324.348	15.863	98.350	114.214	--	--	PEAK
2		5350.000	15.912	47.720	63.632	-10.368	74.000	PEAK
3		5351.159	15.915	48.105	64.021	-9.979	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

Vertical

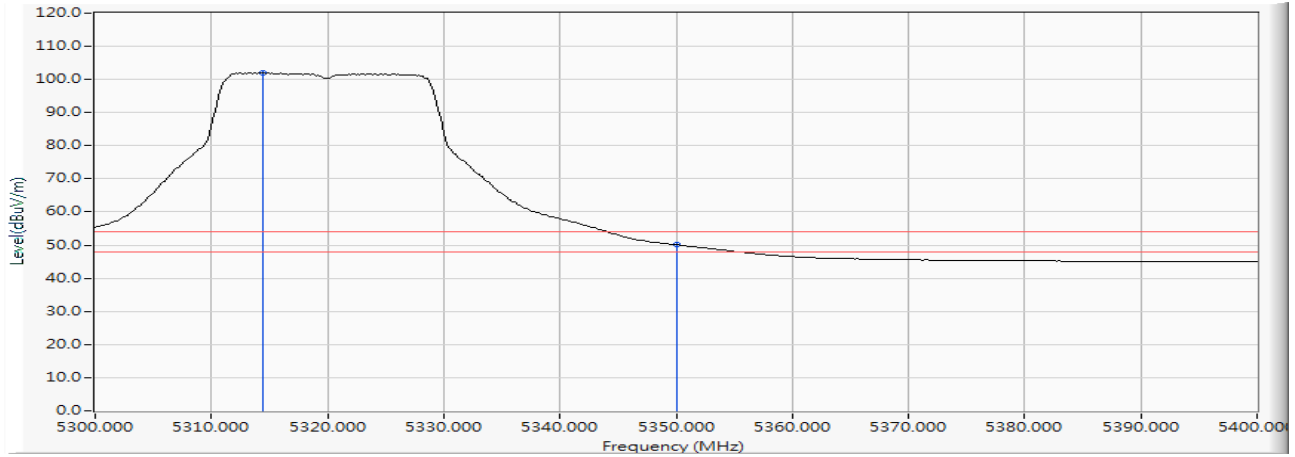


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.493	15.832	86.110	101.942	--	--	AVERAGE
2		5350.000	15.912	34.172	50.084	-3.916	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

Horizontal

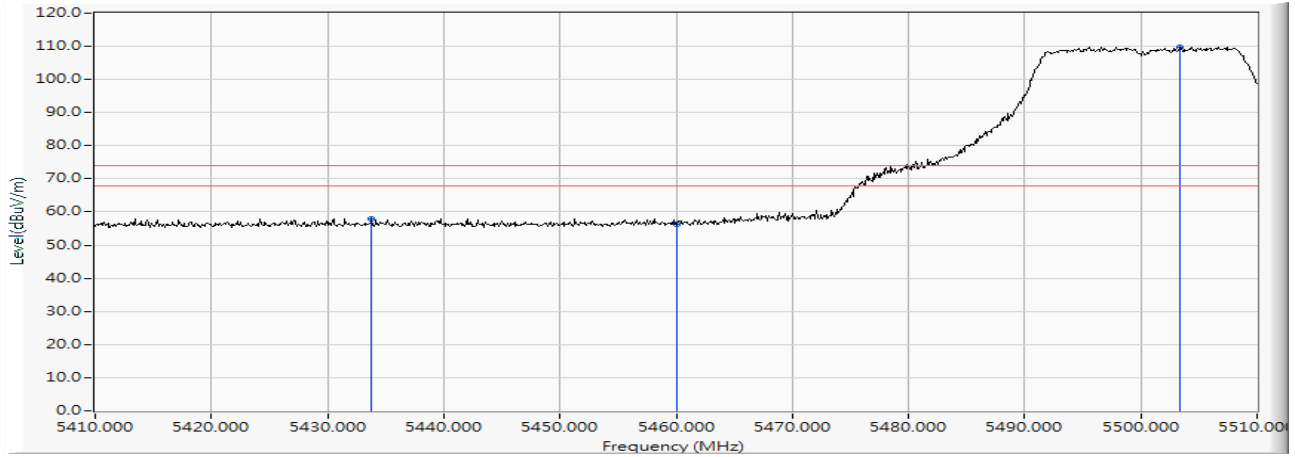


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5433.800	16.112	41.910	58.021	-15.979	74.000	PEAK
2		5460.000	16.185	40.104	56.289	-17.711	74.000	PEAK
3	*	5503.400	16.273	93.458	109.731	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

Horizontal

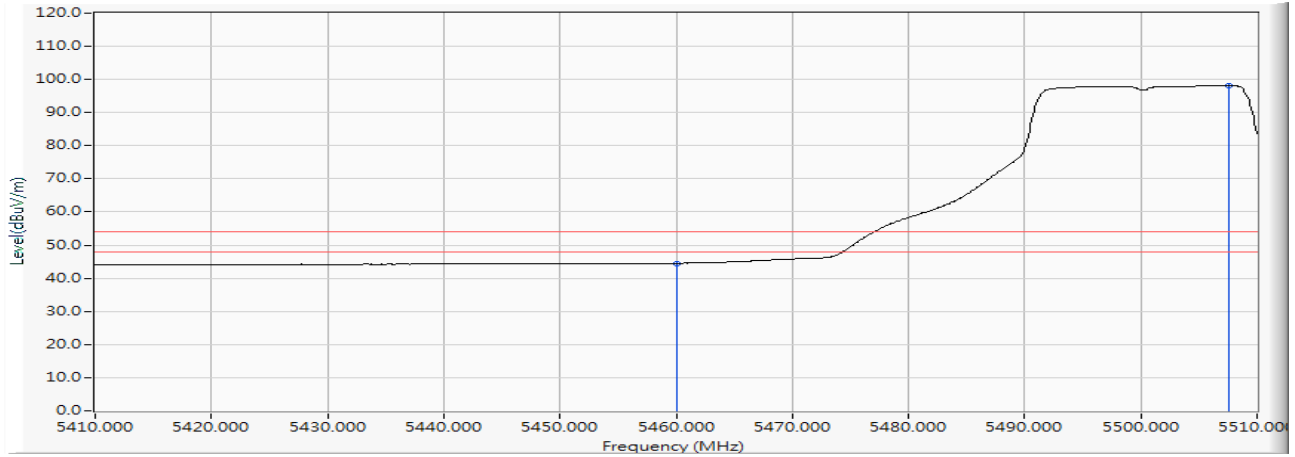


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	28.326	44.511	-9.489	54.000	AVERAGE
2	*	5507.600	16.274	81.977	98.251	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

Vertical

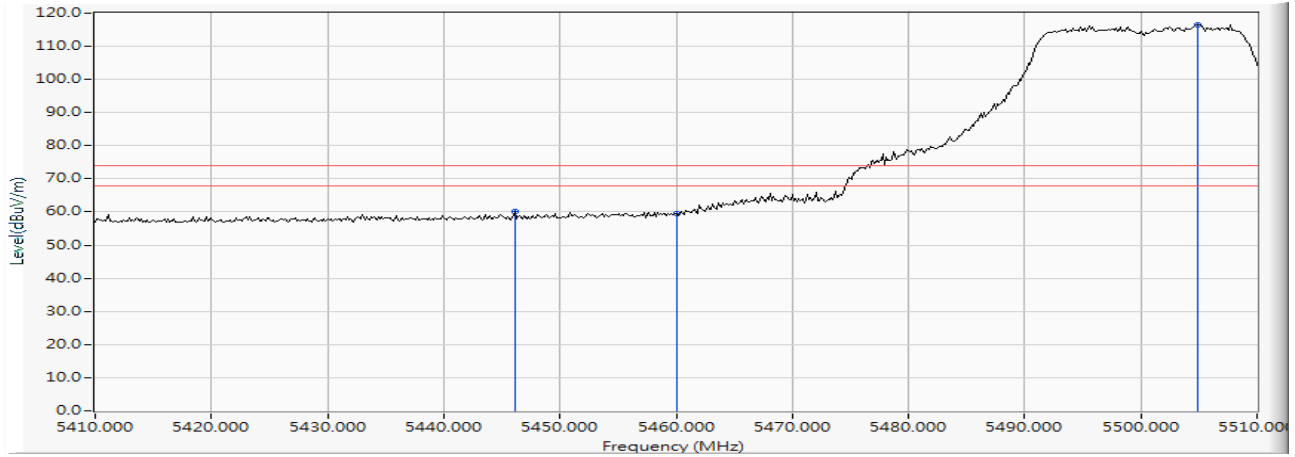


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5446.087	16.144	44.076	60.220	-13.780	74.000	PEAK
2		5460.000	16.185	43.454	59.639	-14.361	74.000	PEAK
3	*	5504.928	16.272	100.288	116.561	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

Vertical

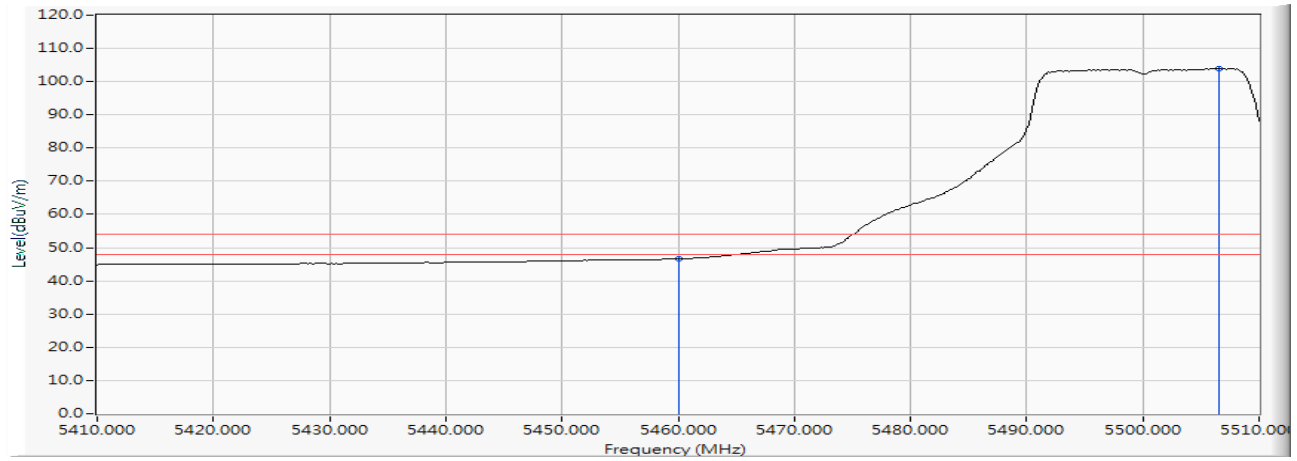


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	30.439	46.624	-7.376	54.000	AVERAGE
2	*	5506.522	16.273	87.600	103.873	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)


Horizontal

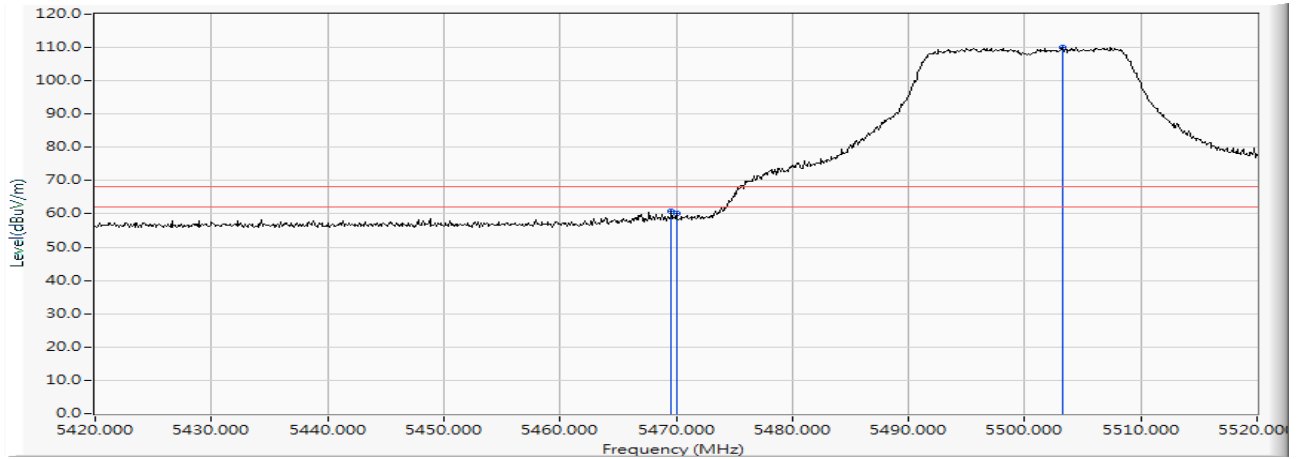

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5469.600	16.199	44.458	60.657	-7.563	68.220	PEAK
2		5470.000	16.200	43.824	60.024	-8.196	68.220	PEAK
3	*	5503.300	16.273	93.702	109.975	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)


Vertical

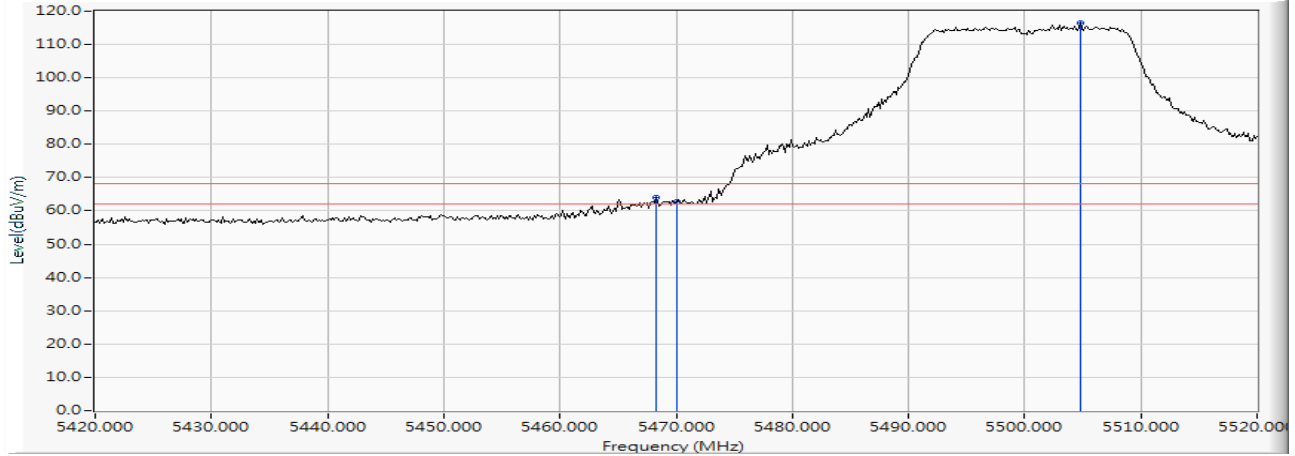

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.261	16.197	47.890	64.087	-4.133	68.220	PEAK
2		5470.000	16.200	46.393	62.593	-5.627	68.220	PEAK
3	*	5504.783	16.273	100.127	116.400	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 140 (5700MHz)


Horizontal

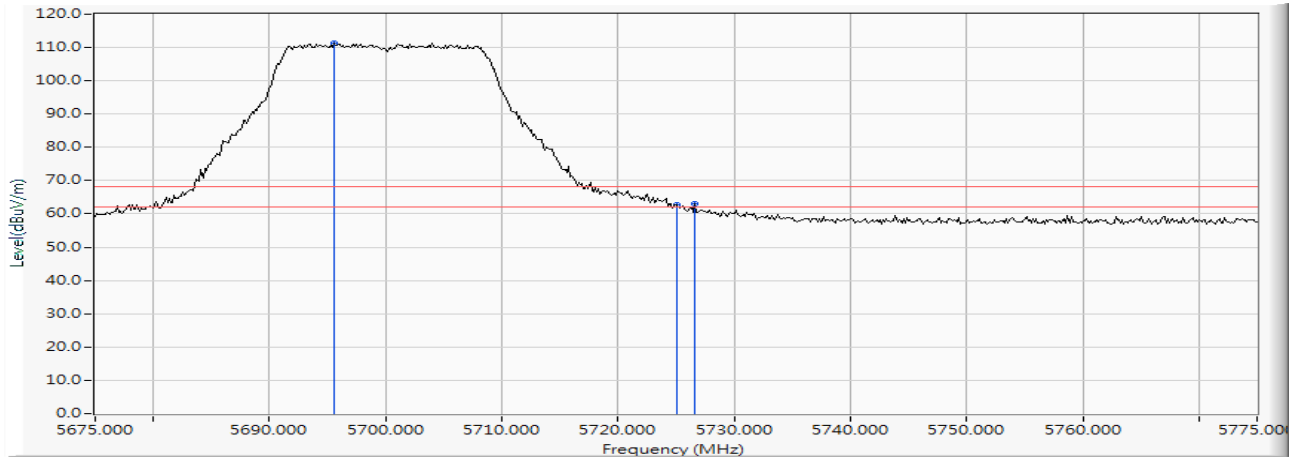

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5695.580	16.496	94.901	111.397	--	--	PEAK
2		5725.000	16.544	46.227	62.771	-5.449	68.220	PEAK
3		5726.594	16.547	46.381	62.928	-5.292	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 140 (5700MHz)


Vertical

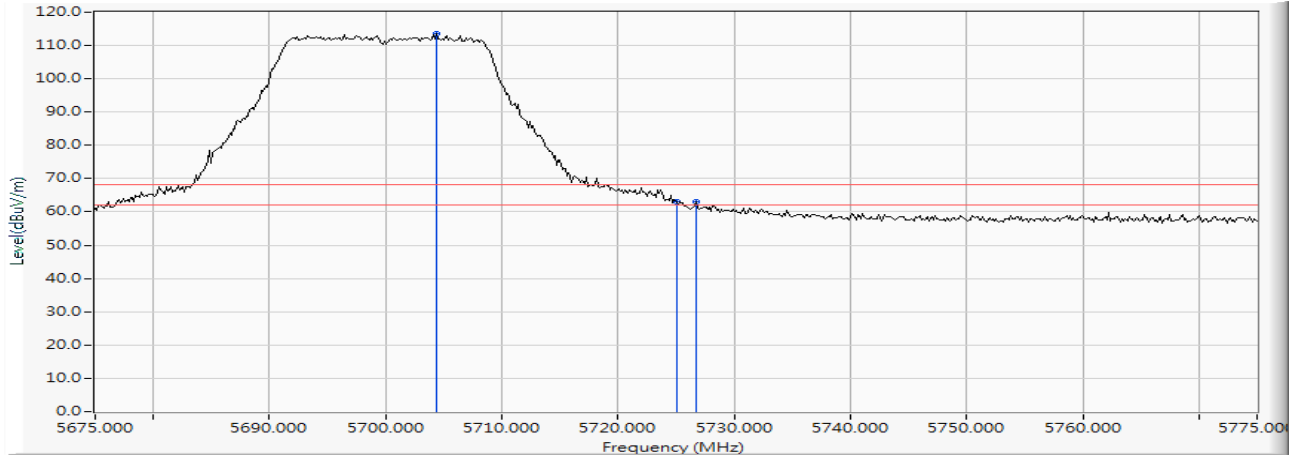

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5704.420	16.507	96.992	113.499	--	--	PEAK
2		5725.000	16.544	46.530	63.074	-5.146	68.220	PEAK
3		5726.739	16.547	46.565	63.112	-5.108	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 149 (5745MHz)


Horizontal

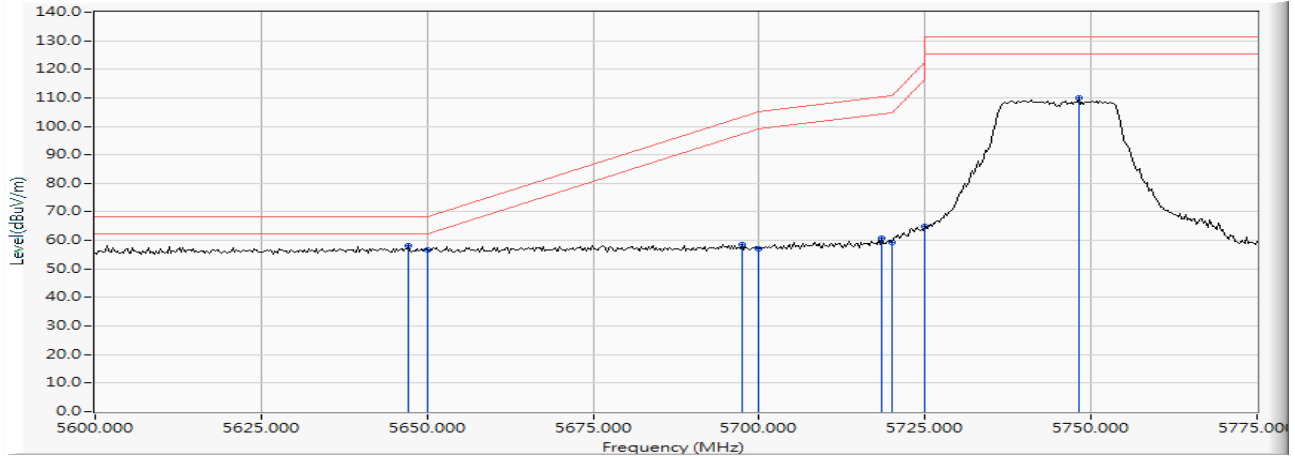

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5647.174	16.439	41.849	58.288	-9.932	68.220	PEAK
2		5650.000	16.447	40.059	56.506	-11.714	68.220	PEAK
3		5697.391	16.499	41.926	58.424	-44.846	103.270	PEAK
4		5700.000	16.502	40.735	57.237	-47.963	105.200	PEAK
5		5718.442	16.532	44.243	60.775	-49.589	110.364	PEAK
6		5720.000	16.535	42.947	59.482	-51.318	110.800	PEAK
7		5725.000	16.544	48.361	64.905	-57.295	122.200	PEAK
8		5748.116	16.565	93.547	110.112	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 149 (5745MHz)


Vertical

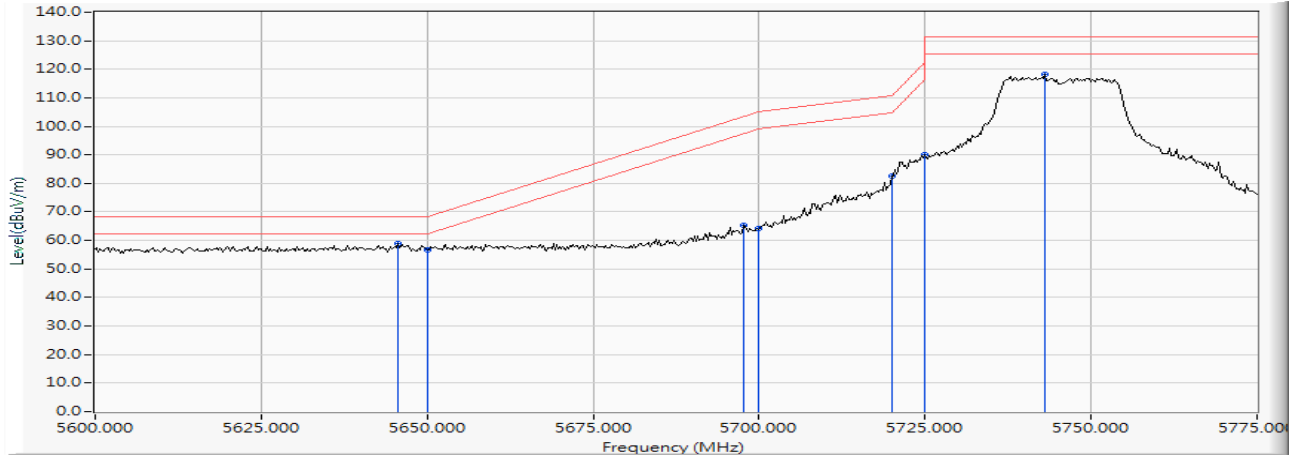

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5645.652	16.435	42.574	59.009	-9.211	68.220	PEAK
2		5650.000	16.447	40.368	56.815	-11.405	68.220	PEAK
3		5697.645	16.499	48.806	65.305	-38.153	103.458	PEAK
4		5700.000	16.502	47.551	64.053	-41.147	105.200	PEAK
5		5720.000	16.535	65.901	82.436	-28.364	110.800	PEAK
6		5725.000	16.544	73.486	90.030	-32.170	122.200	PEAK
7		5743.043	16.558	101.781	118.339	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/31
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 165 (5825MHz)


Horizontal

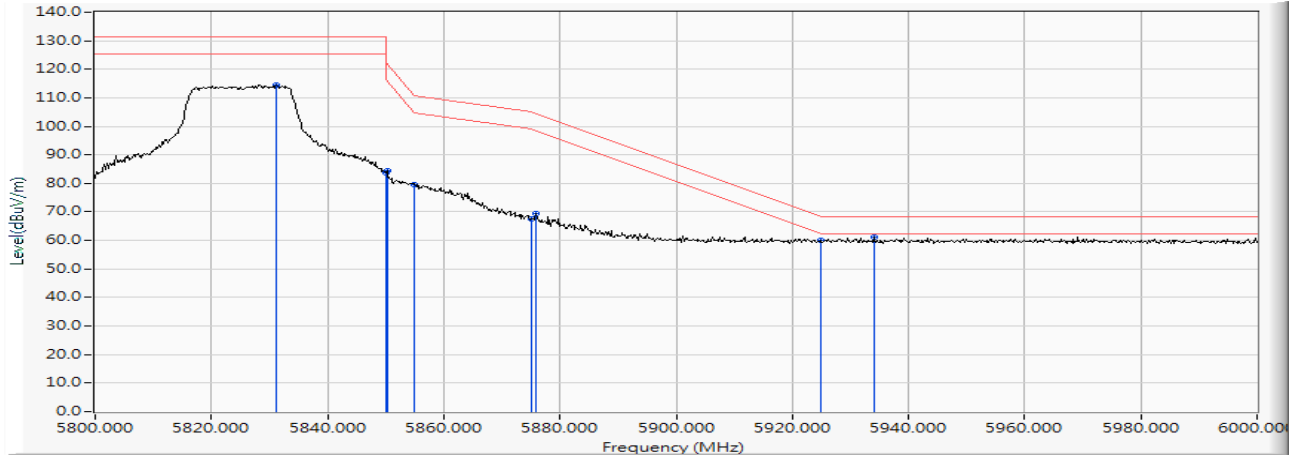

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5831.200	16.720	97.826	114.546	--	--	PEAK
2		5850.000	16.748	67.084	83.832	-38.368	122.200	PEAK
3		5850.200	16.748	67.624	84.373	-37.371	121.744	PEAK
4		5855.000	16.758	62.948	79.706	-31.094	110.800	PEAK
5		5875.000	16.807	50.655	67.463	-37.737	105.200	PEAK
6		5875.800	16.810	52.652	69.462	-35.146	104.608	PEAK
7		5925.000	16.920	43.185	60.105	-8.095	68.200	PEAK
8	*	5934.000	16.929	44.328	61.257	-6.943	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 165 (5825MHz)


Vertical

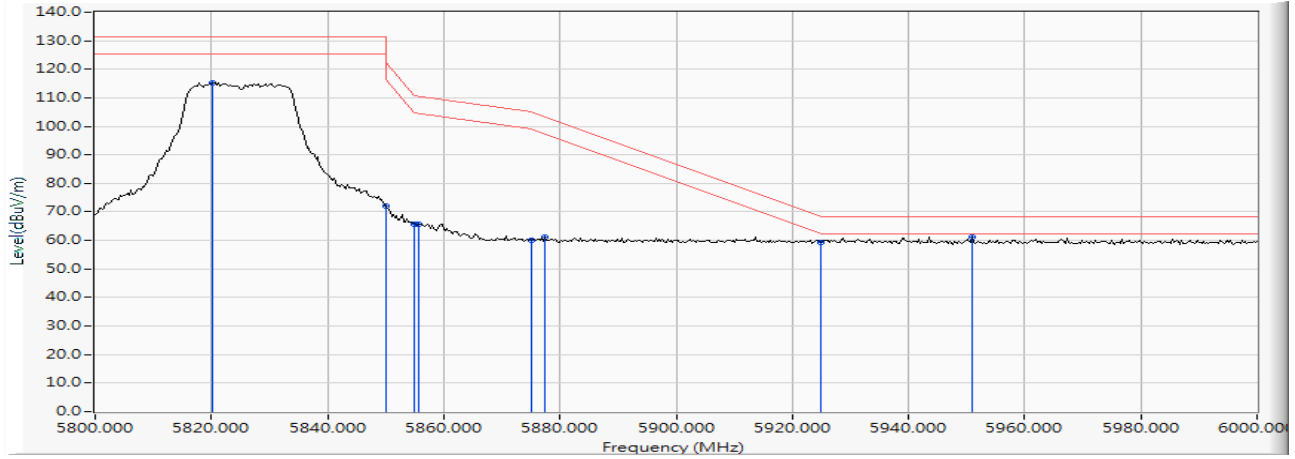

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5820.290	16.706	98.399	115.104	--	--	PEAK
2		5850.000	16.748	55.480	72.228	-49.972	122.200	PEAK
3		5855.000	16.758	49.013	65.771	-45.029	110.800	PEAK
4		5855.652	16.760	49.058	65.818	-44.799	110.617	PEAK
5		5875.000	16.807	43.396	60.204	-44.996	105.200	PEAK
6		5877.391	16.814	44.416	61.230	-42.201	103.431	PEAK
7		5925.000	16.920	42.559	59.479	-8.721	68.200	PEAK
8	*	5951.014	16.956	44.140	61.096	-7.104	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

Horizontal

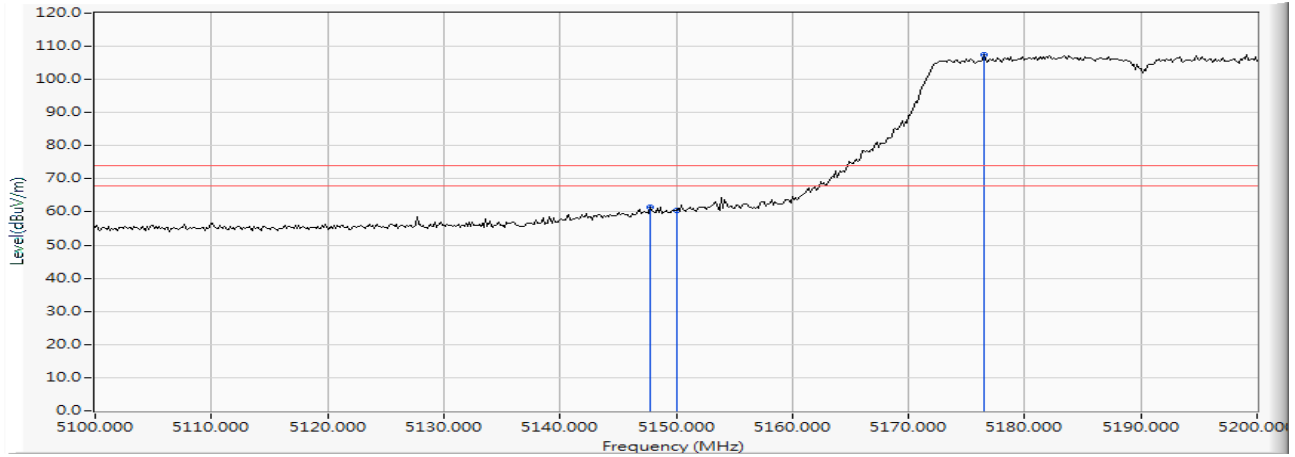


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5147.826	15.295	46.219	61.514	-12.486	74.000	PEAK
2		5150.000	15.307	45.315	60.622	-13.378	74.000	PEAK
3	*	5176.522	15.377	92.230	107.607	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

Horizontal

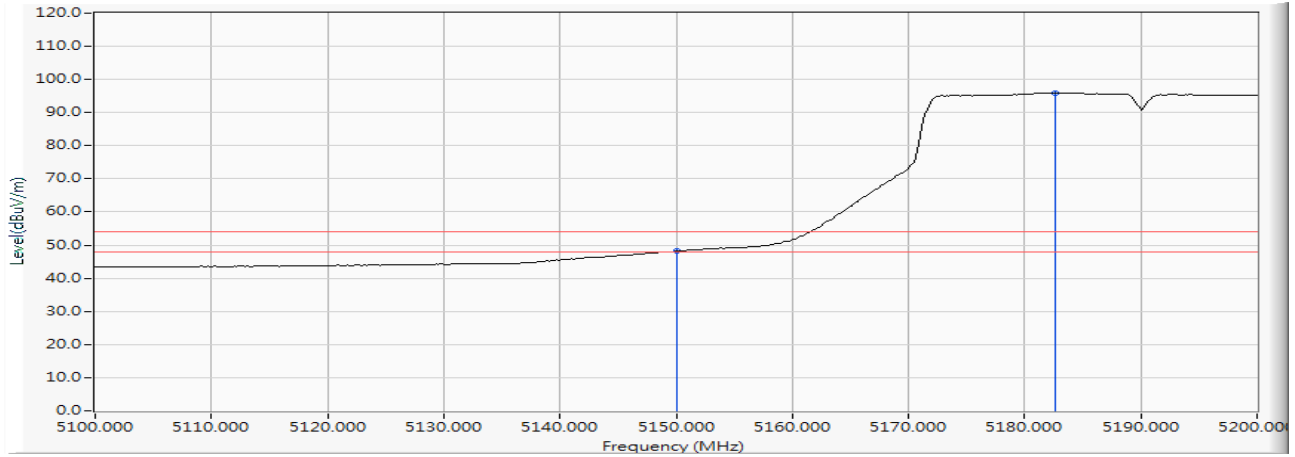


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	32.879	48.186	-5.814	54.000	AVERAGE
2	*	5182.609	15.403	80.513	95.917	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

Vertical

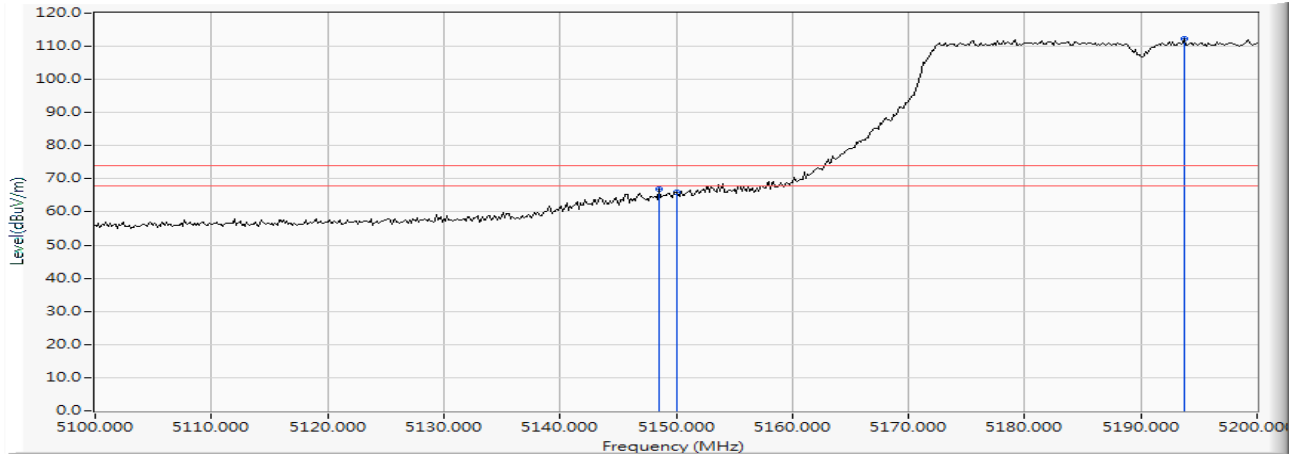


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.551	15.299	51.676	66.975	-7.025	74.000	PEAK
2		5150.000	15.307	50.609	65.916	-8.084	74.000	PEAK
3	*	5193.768	15.450	96.803	112.252	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

Vertical

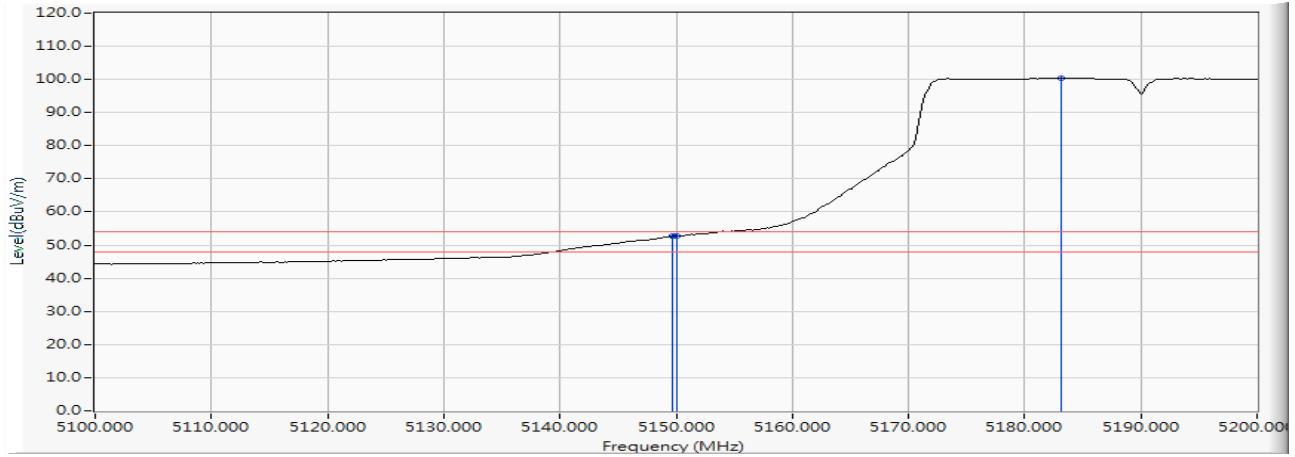


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.710	15.305	37.343	52.648	-1.352	54.000	AVERAGE
2		5150.000	15.307	37.321	52.628	-1.372	54.000	AVERAGE
3	*	5183.188	15.406	84.975	100.381	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

Horizontal

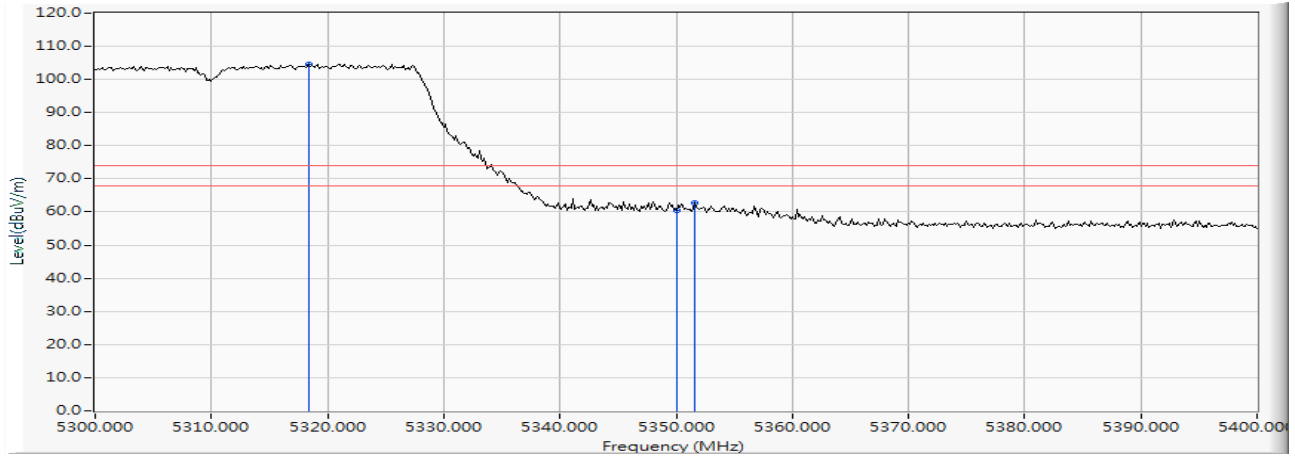


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5318.406	15.845	88.824	104.669	--	--	PEAK
2		5350.000	15.912	44.677	60.589	-13.411	74.000	PEAK
3		5351.594	15.917	46.857	62.774	-11.226	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

Horizontal

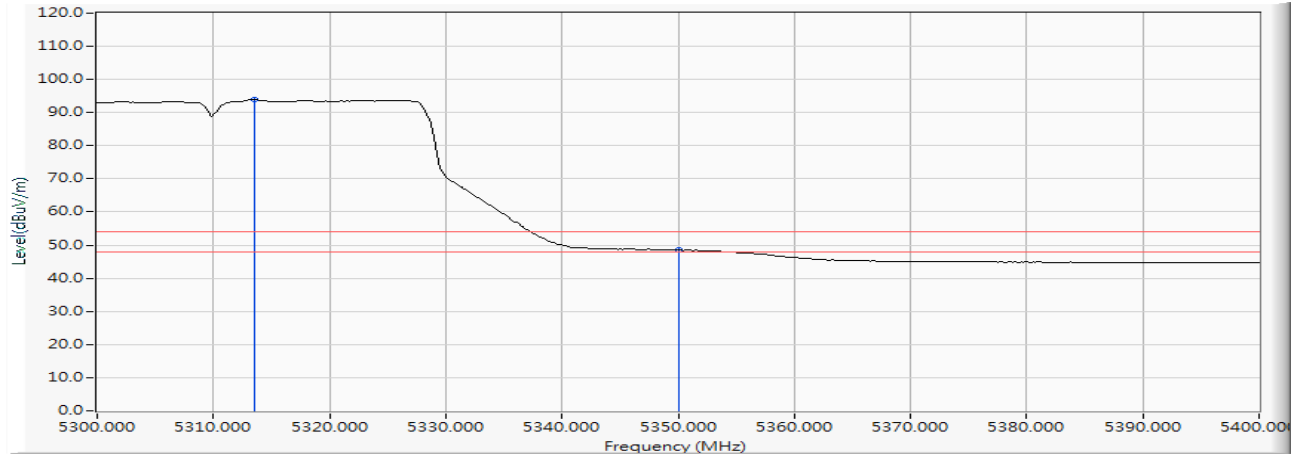


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.478	15.829	78.085	93.914	--	--	AVERAGE
2		5350.000	15.912	32.637	48.549	-5.451	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

Vertical

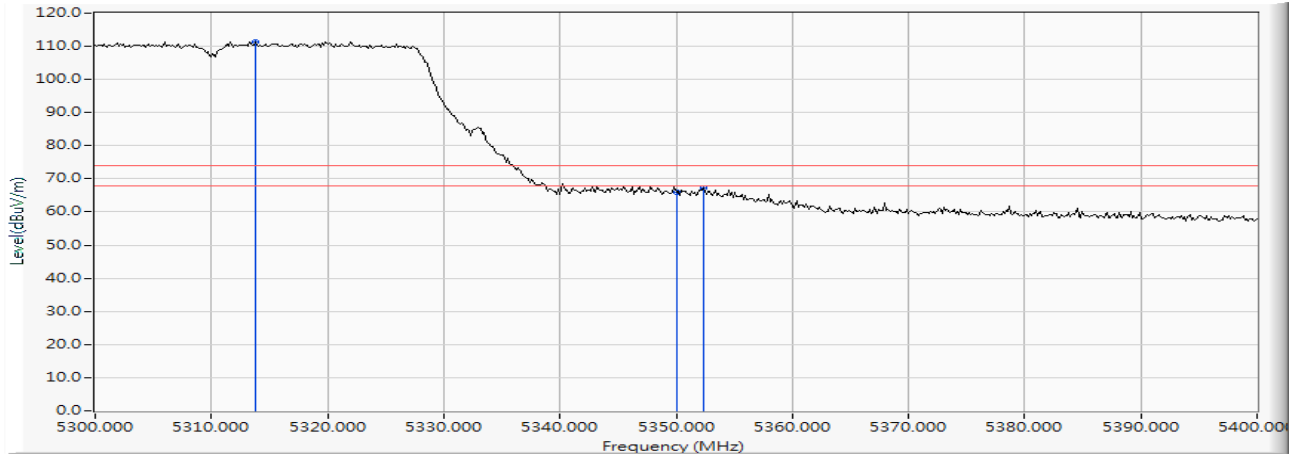


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.768	15.830	95.505	111.335	--	--	PEAK
2		5350.000	15.912	50.187	66.099	-7.901	74.000	PEAK
3		5352.319	15.920	51.395	67.315	-6.685	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

Vertical

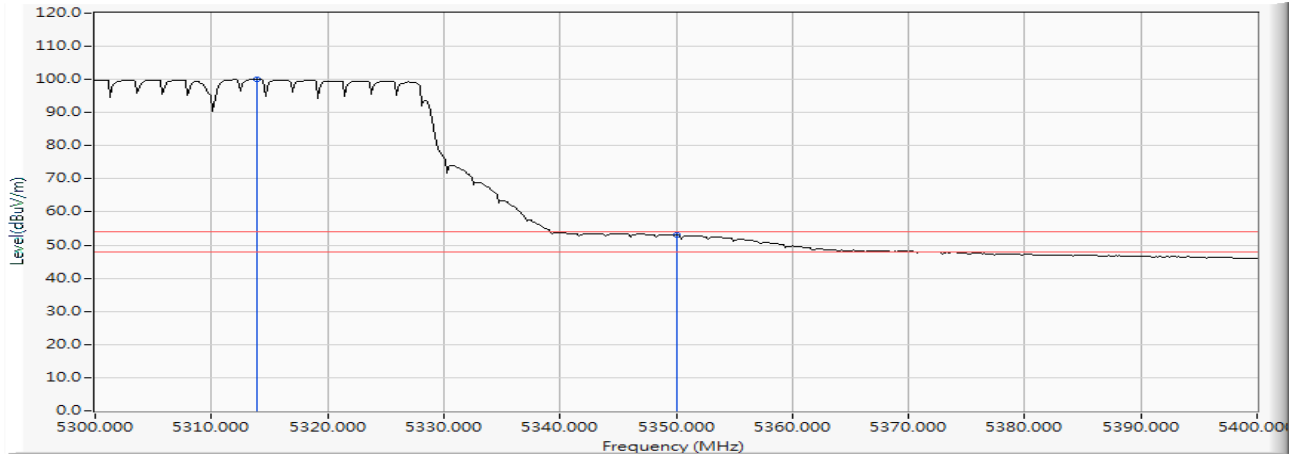


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.913	15.830	84.147	99.977	--	--	AVERAGE
2		5350.000	15.912	37.033	52.945	-1.055	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

Horizontal

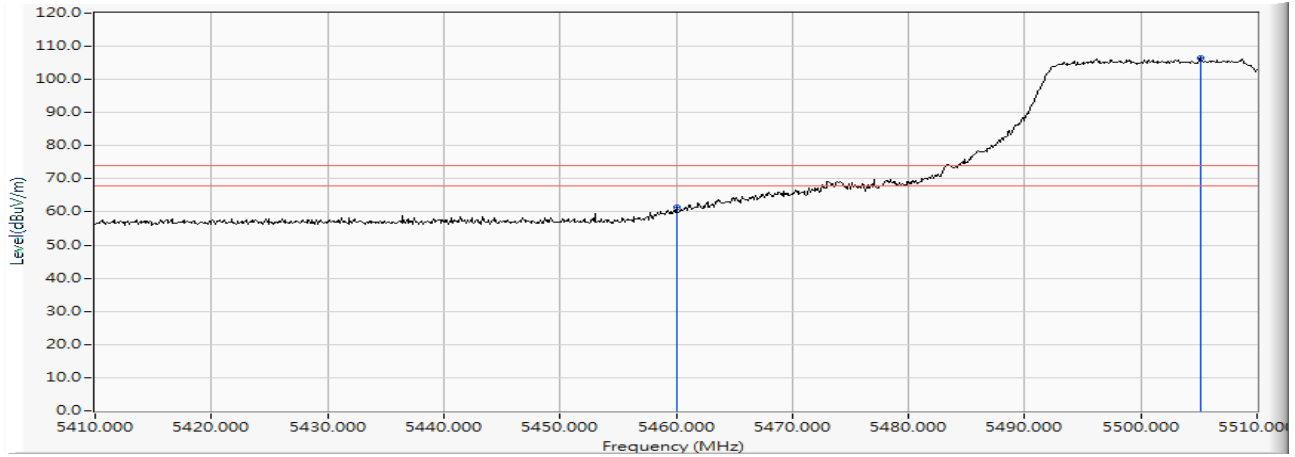


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	45.321	61.506	-12.494	74.000	PEAK
2	*	5505.100	16.272	90.081	106.354	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

Horizontal

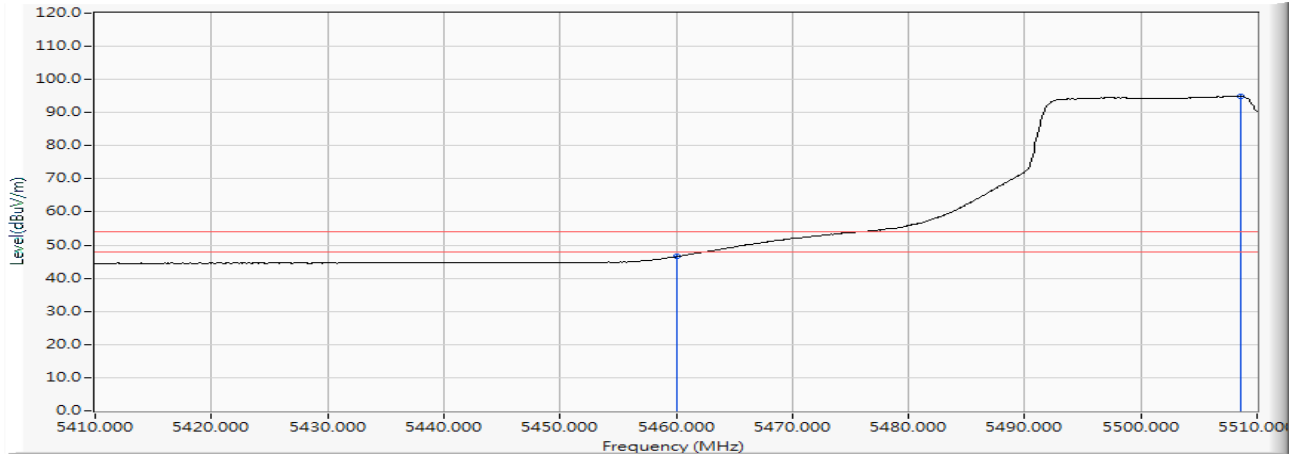


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	30.418	46.603	-7.397	54.000	AVERAGE
2	*	5508.600	16.274	78.660	94.934	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

Vertical

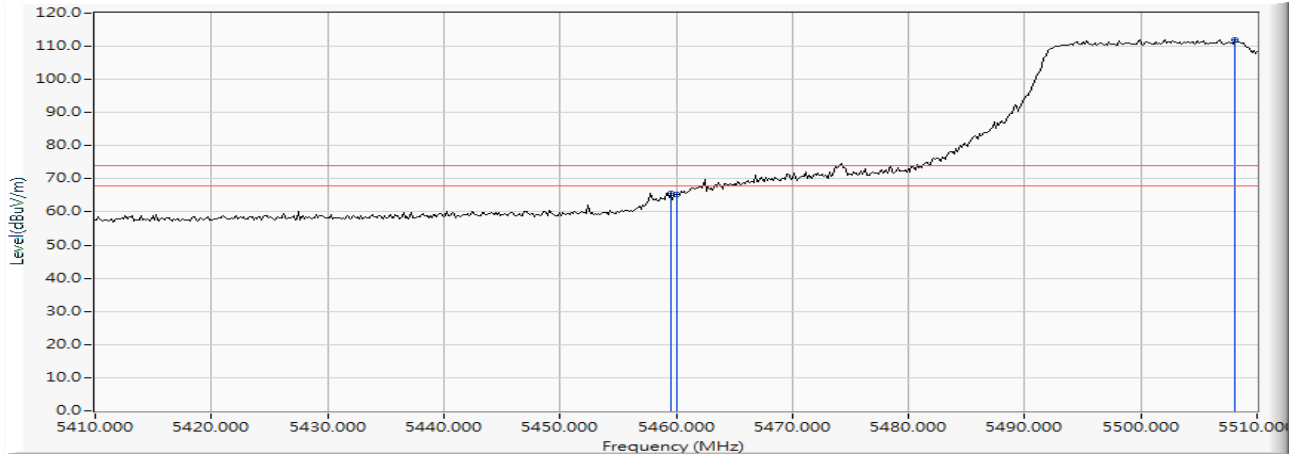


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5459.565	16.184	49.606	65.790	-8.210	74.000	PEAK
2		5460.000	16.185	49.129	65.314	-8.686	74.000	PEAK
3	*	5508.116	16.275	95.741	112.015	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

Vertical

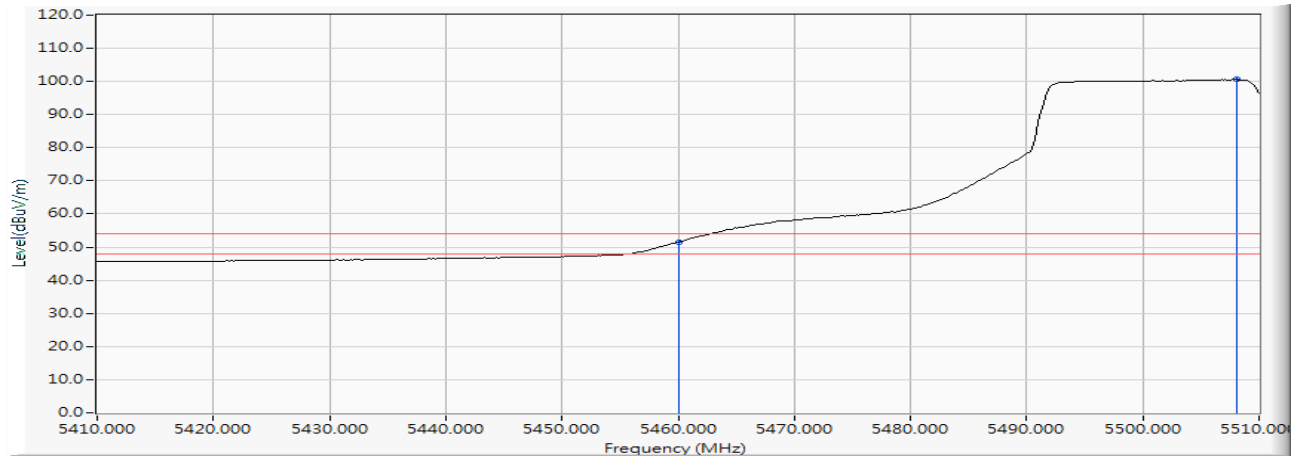


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	35.306	51.491	-2.509	54.000	AVERAGE
2	*	5508.116	16.275	84.292	100.566	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)


Horizontal

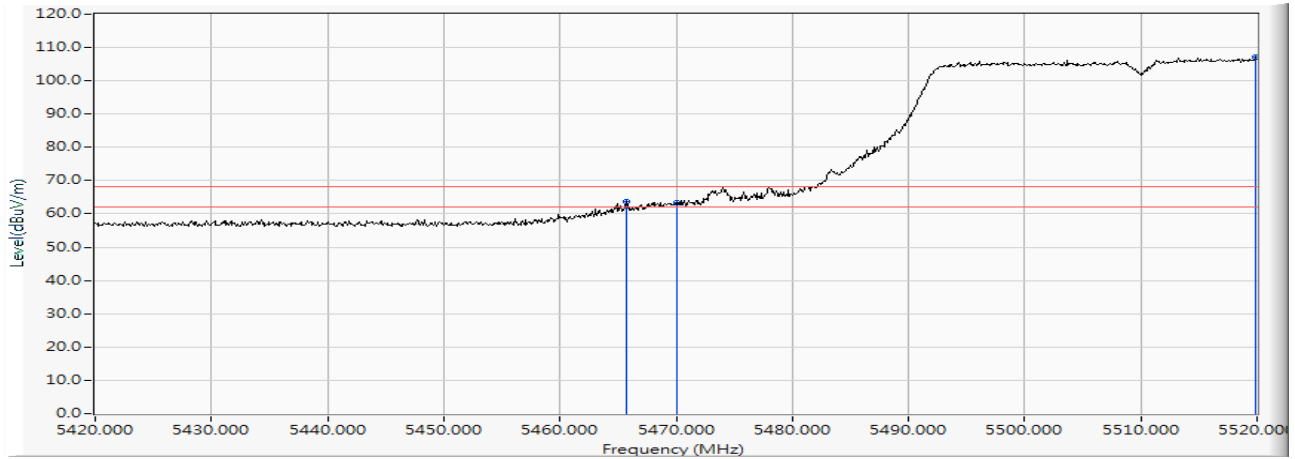

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5465.700	16.192	47.369	63.562	-4.658	68.220	PEAK
2		5470.000	16.200	47.316	63.516	-4.704	68.220	PEAK
3	*	5519.900	16.293	90.961	107.253	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)


Vertical

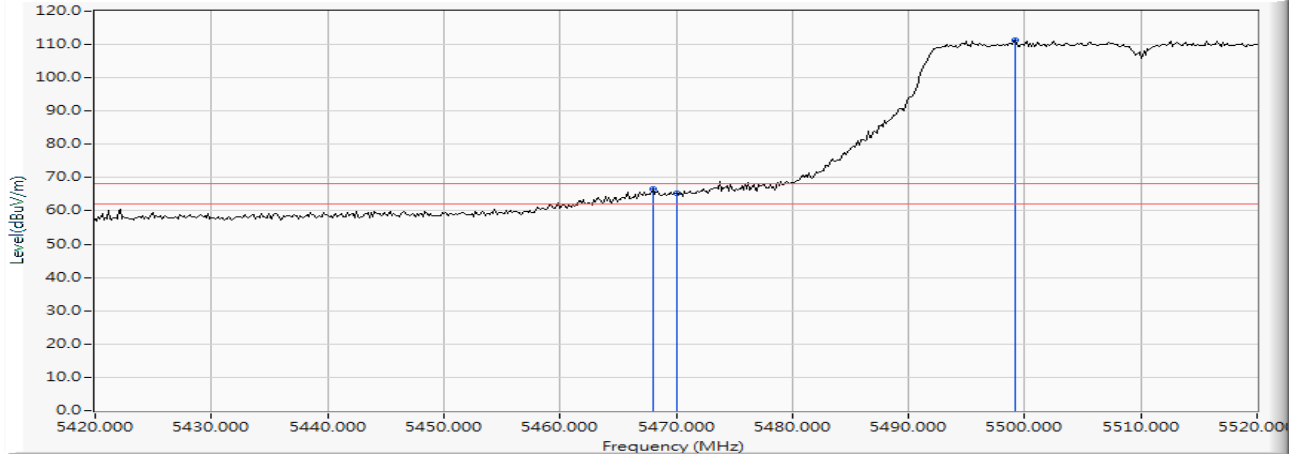

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5467.971	16.196	50.485	66.681	-1.539	68.220	PEAK
2		5470.000	16.200	49.259	65.459	-2.761	68.220	PEAK
3	*	5499.130	16.269	95.008	111.277	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/31
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 134 (5670MHz)


Horizontal

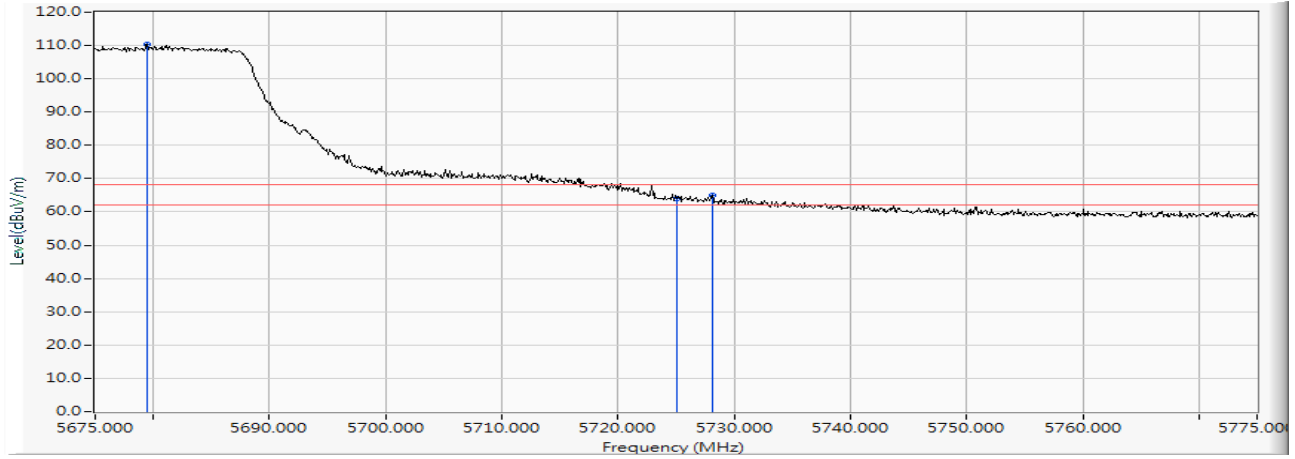

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5679.500	16.477	93.950	110.427	--	--	PEAK
2		5725.000	16.544	47.351	63.895	-4.325	68.220	PEAK
3		5728.100	16.549	48.364	64.912	-3.308	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/31
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 134 (5670MHz)


Vertical

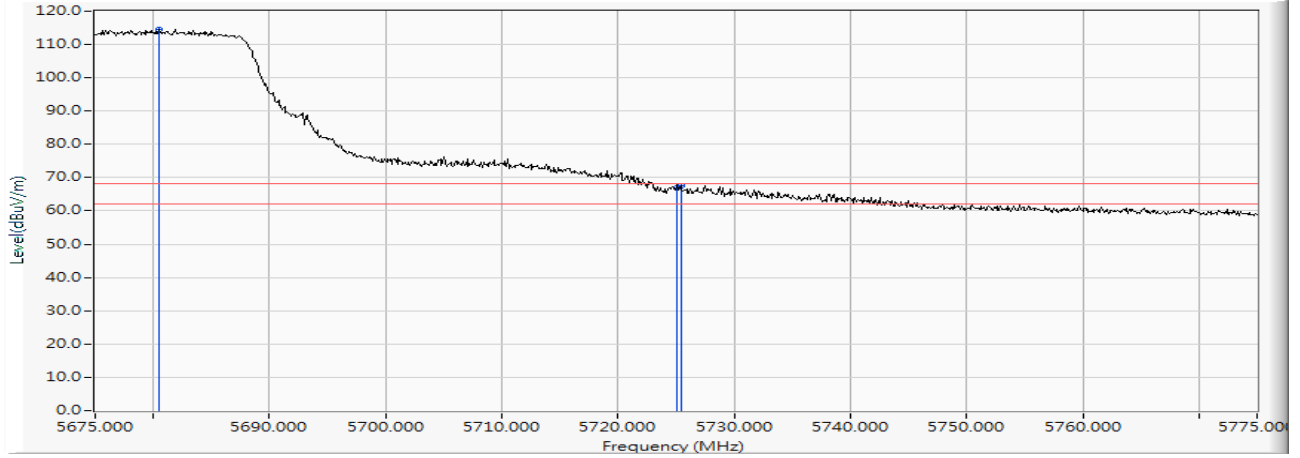

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5680.500	16.478	98.126	114.604	--	--	PEAK
2		5725.000	16.544	50.441	66.985	-1.235	68.220	PEAK
3		5725.400	16.545	51.134	67.679	-0.541	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 151 (5755MHz)


Horizontal

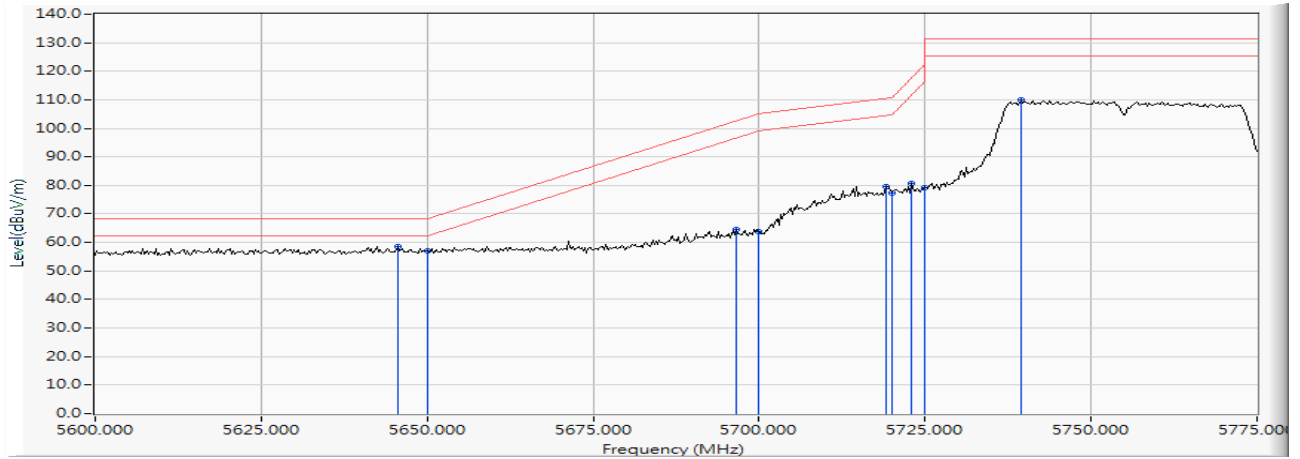

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5645.652	16.435	42.110	58.545	-9.675	68.220	PEAK
2		5650.000	16.447	40.646	57.093	-11.127	68.220	PEAK
3		5696.630	16.497	48.044	64.541	-38.167	102.708	PEAK
4		5700.000	16.502	47.232	63.734	-41.466	105.200	PEAK
5		5719.203	16.533	63.104	79.638	-30.939	110.577	PEAK
6		5720.000	16.535	60.887	77.422	-33.378	110.800	PEAK
7		5723.007	16.540	64.092	80.633	-37.023	117.656	PEAK
8		5725.000	16.544	62.799	79.343	-42.857	122.200	PEAK
9		5739.493	16.556	93.586	110.141	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 151 (5755MHz)


Vertical

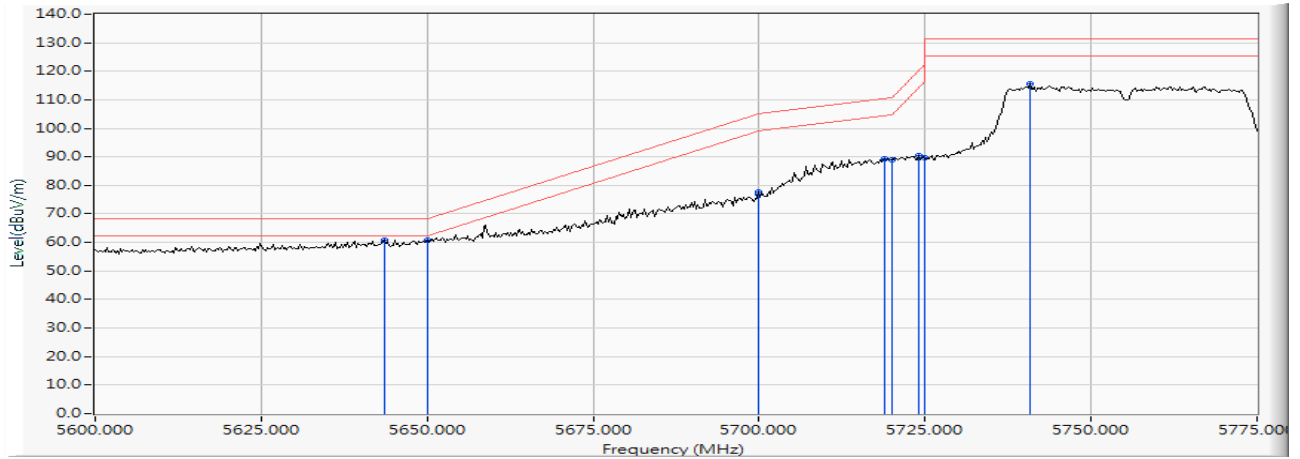

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5643.623	16.430	44.523	60.952	-7.268	68.220	PEAK
2		5650.000	16.447	44.352	60.799	-7.421	68.220	PEAK
3		5699.928	16.502	61.050	77.552	-27.595	105.147	PEAK
4		5700.000	16.502	60.544	77.046	-28.154	105.200	PEAK
5		5718.949	16.533	72.705	89.238	-21.268	110.506	PEAK
6		5720.000	16.535	72.559	89.094	-21.706	110.800	PEAK
7		5724.022	16.543	73.916	90.458	-29.512	119.970	PEAK
8		5725.000	16.544	72.979	89.523	-32.677	122.200	PEAK
9		5740.761	16.556	99.048	115.604	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/31
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 159 (5795MHz)


Horizontal

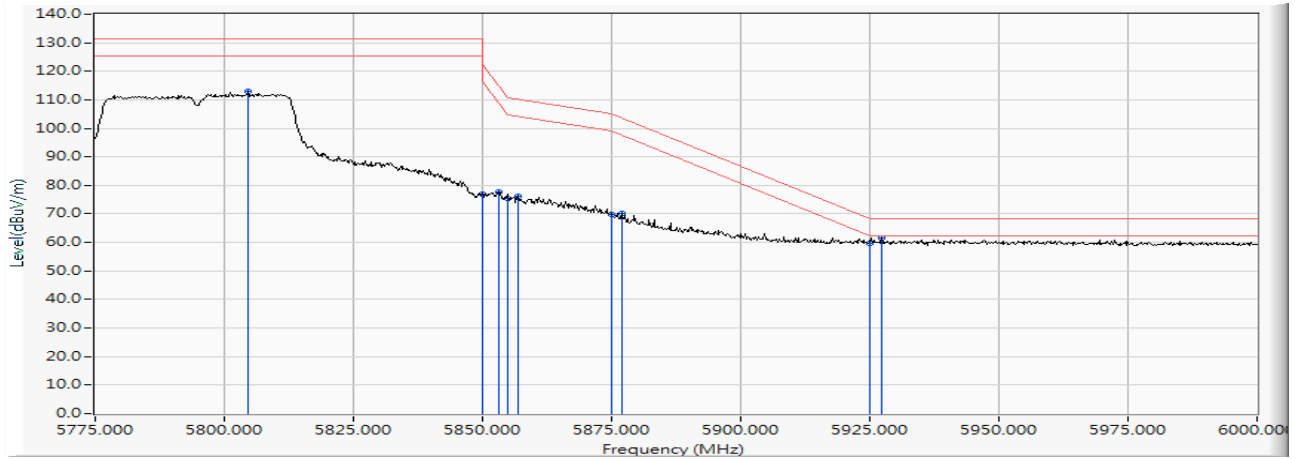

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5804.700	16.671	96.211	112.882	--	--	PEAK
2		5850.000	16.748	60.242	76.990	-45.210	122.200	PEAK
3		5853.075	16.754	60.895	77.649	-37.540	115.189	PEAK
4		5855.000	16.758	58.864	75.622	-35.178	110.800	PEAK
5		5856.900	16.763	59.570	76.333	-33.935	110.268	PEAK
6		5875.000	16.807	53.191	69.999	-35.201	105.200	PEAK
7		5876.925	16.813	53.546	70.359	-33.416	103.775	PEAK
8		5925.000	16.920	42.936	59.856	-8.344	68.200	PEAK
9	*	5927.325	16.922	44.610	61.532	-6.668	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/31
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 159 (5795MHz)


Vertical

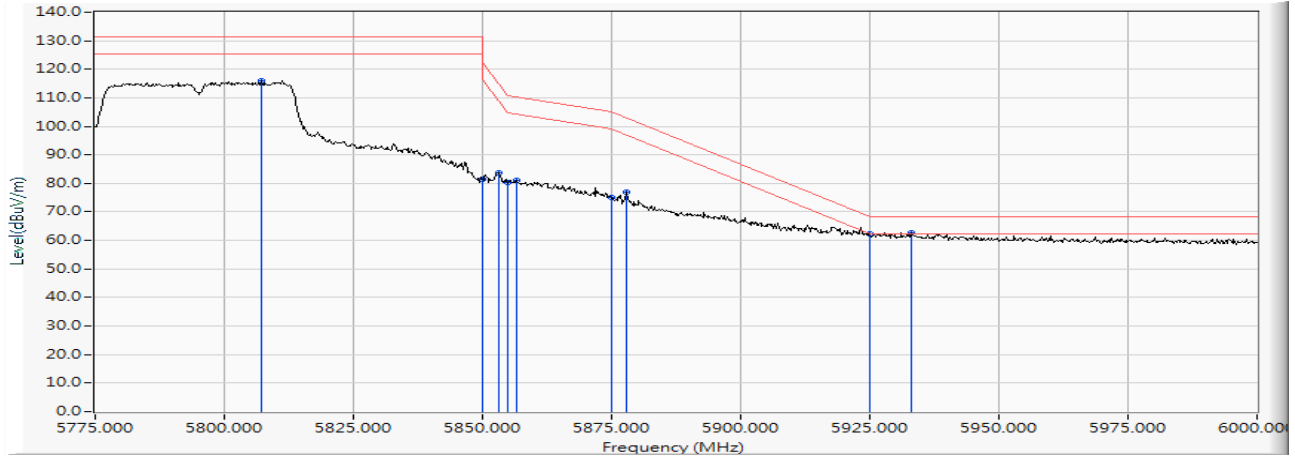

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5807.175	16.677	99.486	116.163	--	--	PEAK
2		5850.000	16.748	64.620	81.368	-40.832	122.200	PEAK
3		5853.075	16.754	66.890	83.644	-31.545	115.189	PEAK
4		5855.000	16.758	63.646	80.404	-30.396	110.800	PEAK
5		5856.675	16.762	64.422	81.184	-29.147	110.331	PEAK
6		5875.000	16.807	58.137	74.945	-30.255	105.200	PEAK
7		5877.825	16.816	59.981	76.796	-26.314	103.110	PEAK
8		5925.000	16.920	45.408	62.328	-5.872	68.200	PEAK
9	*	5932.950	16.929	45.857	62.785	-5.415	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

Horizontal

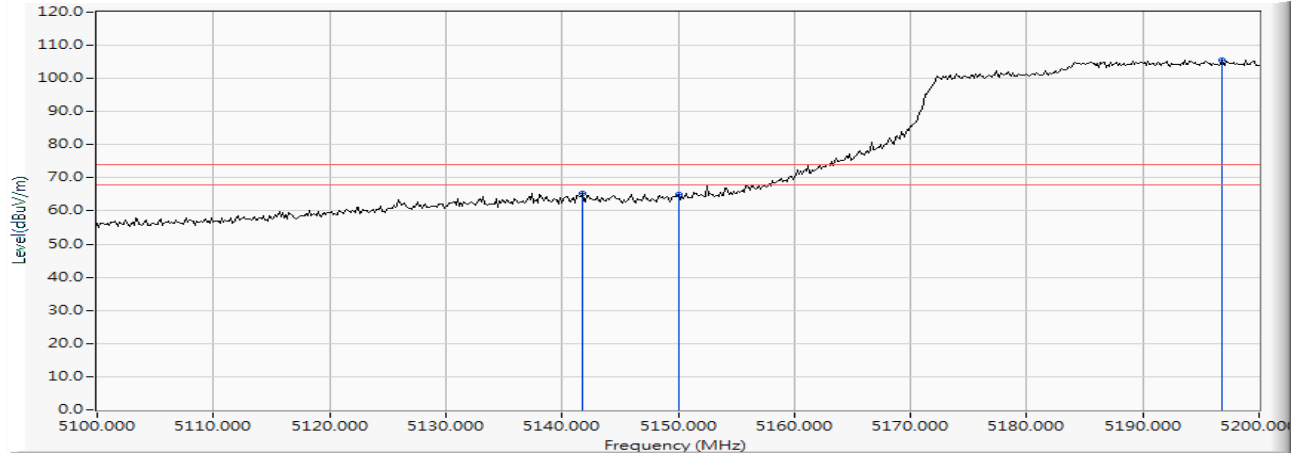


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5141.739	15.260	50.184	65.444	-8.556	74.000	PEAK
2		5150.000	15.307	49.624	64.931	-9.069	74.000	PEAK
3	*	5196.812	15.462	90.118	105.579	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

Horizontal

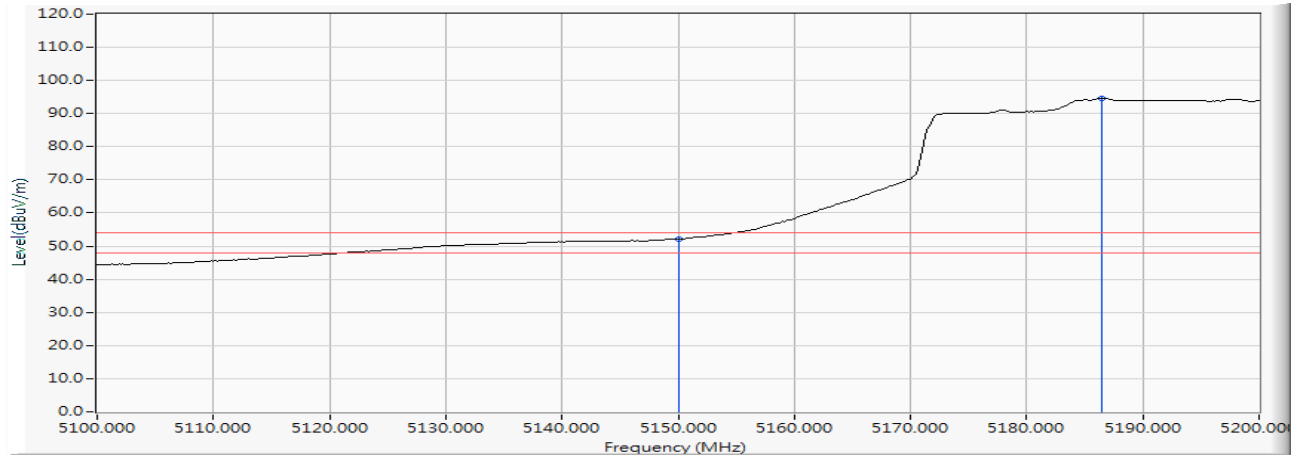


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	36.780	52.087	-1.913	54.000	AVERAGE
2	*	5186.522	15.421	79.320	94.741	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

Vertical

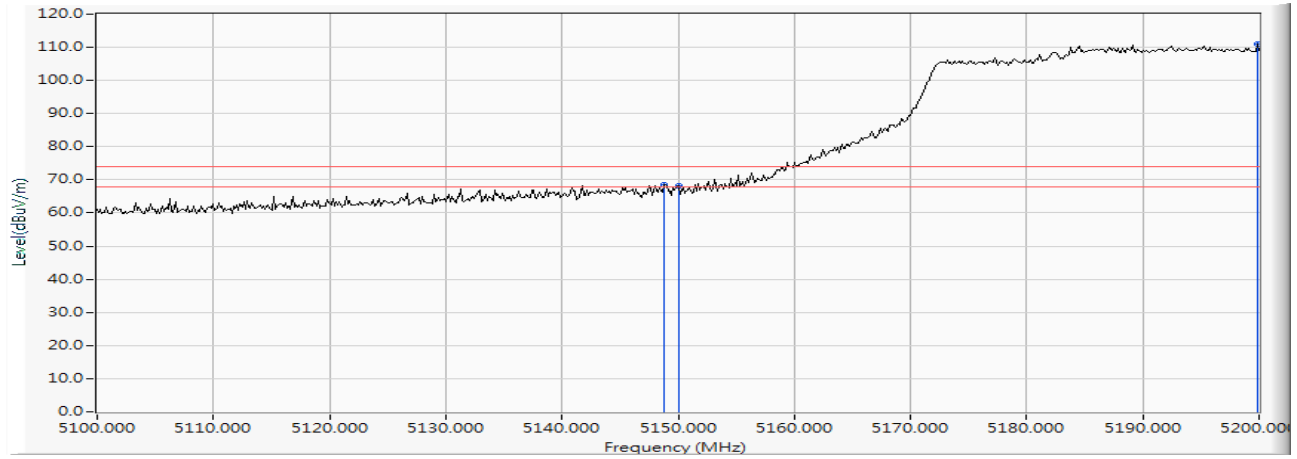


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.841	15.300	53.313	68.613	-5.387	74.000	PEAK
2		5150.000	15.307	52.817	68.124	-5.876	74.000	PEAK
3	*	5199.855	15.472	95.441	110.913	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

Vertical

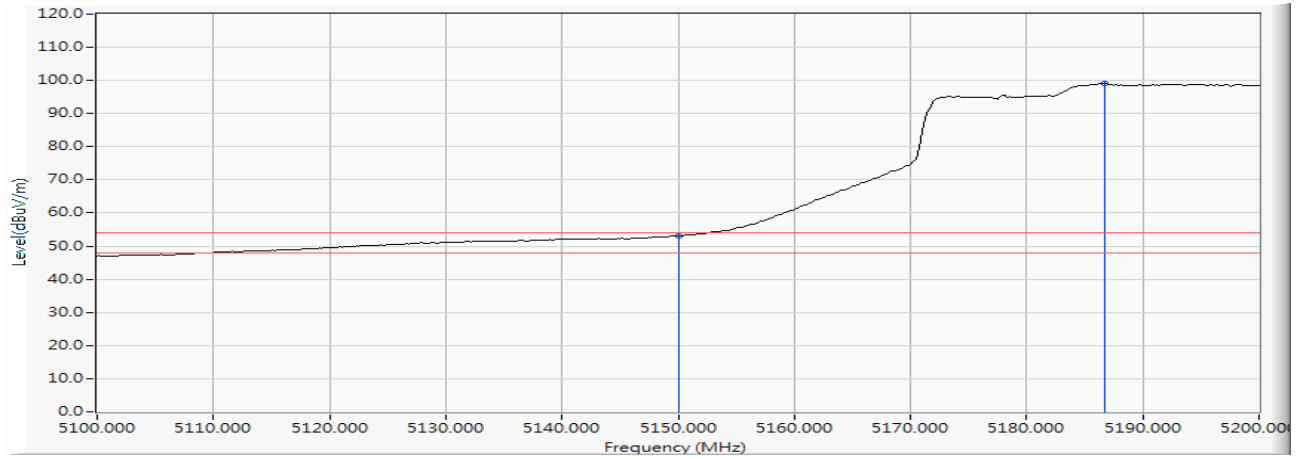


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	37.654	52.961	-1.039	54.000	AVERAGE
2	*	5186.667	15.421	83.661	99.083	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

Horizontal

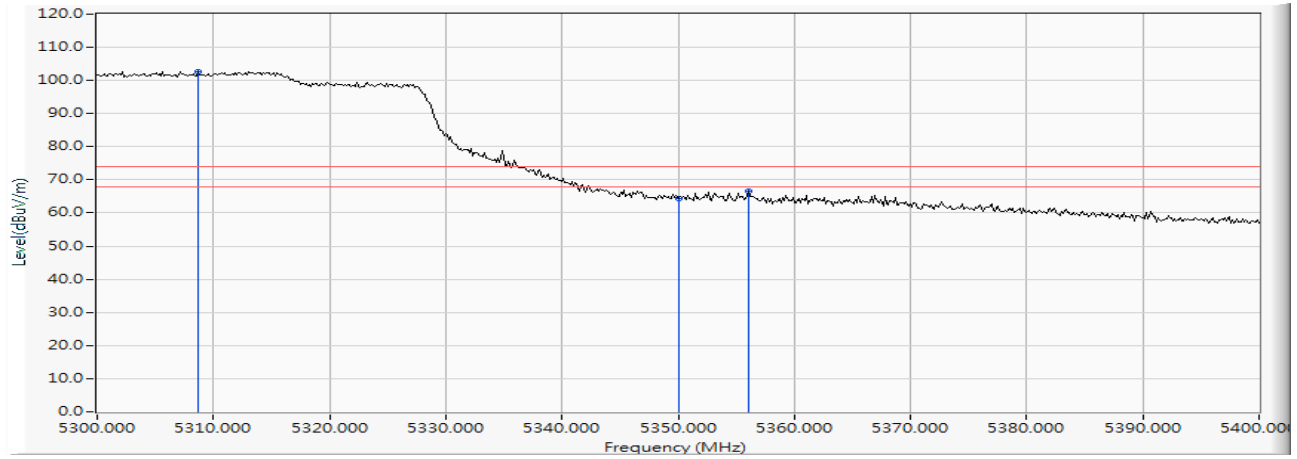


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5308.696	15.817	86.840	102.657	--	--	PEAK
2		5350.000	15.912	48.544	64.456	-9.544	74.000	PEAK
3		5356.087	15.931	50.720	66.651	-7.349	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

Horizontal

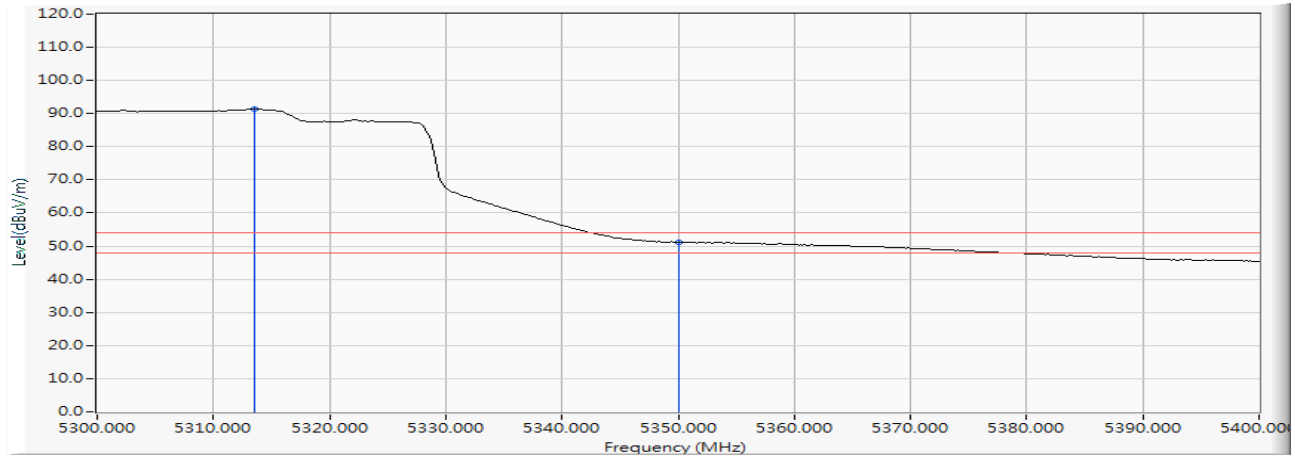


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.478	15.829	75.643	91.472	--	--	AVERAGE
2		5350.000	15.912	35.233	51.145	-2.855	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

Vertical

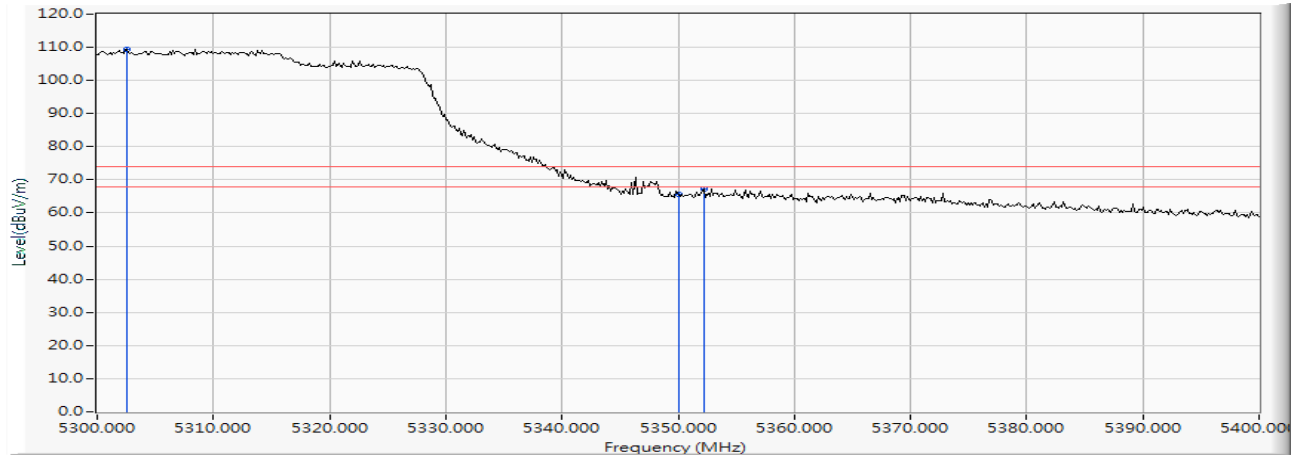


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5302.609	15.802	93.620	109.423	--	--	PEAK
2		5350.000	15.912	49.795	65.707	-8.293	74.000	PEAK
3		5352.174	15.919	51.400	67.319	-6.681	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

Vertical

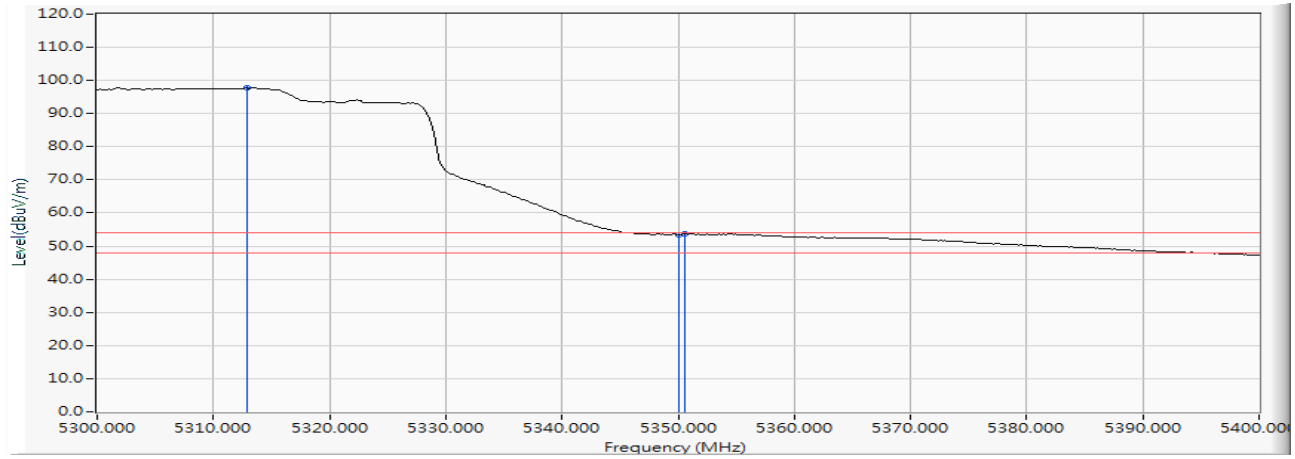


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5312.898	15.827	82.003	97.830	--	--	AVERAGE
2		5350.000	15.912	37.568	53.480	-0.520	54.000	AVERAGE
3		5350.580	15.914	37.663	53.577	-0.423	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Horizontal

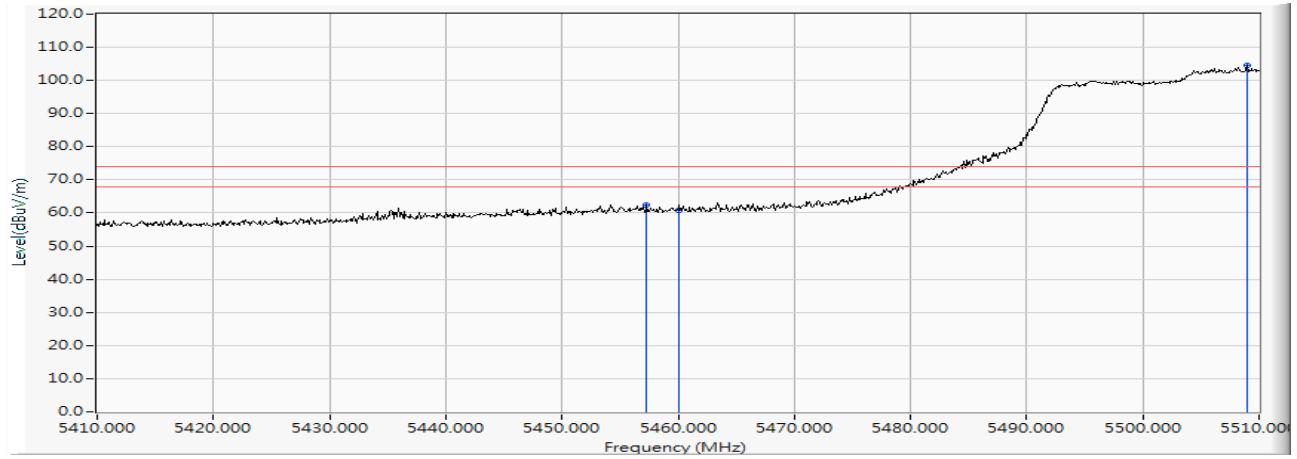


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5457.300	16.181	46.252	62.433	-11.567	74.000	PEAK
2		5460.000	16.185	44.661	60.846	-13.154	74.000	PEAK
3	*	5509.000	16.274	88.338	104.612	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Horizontal

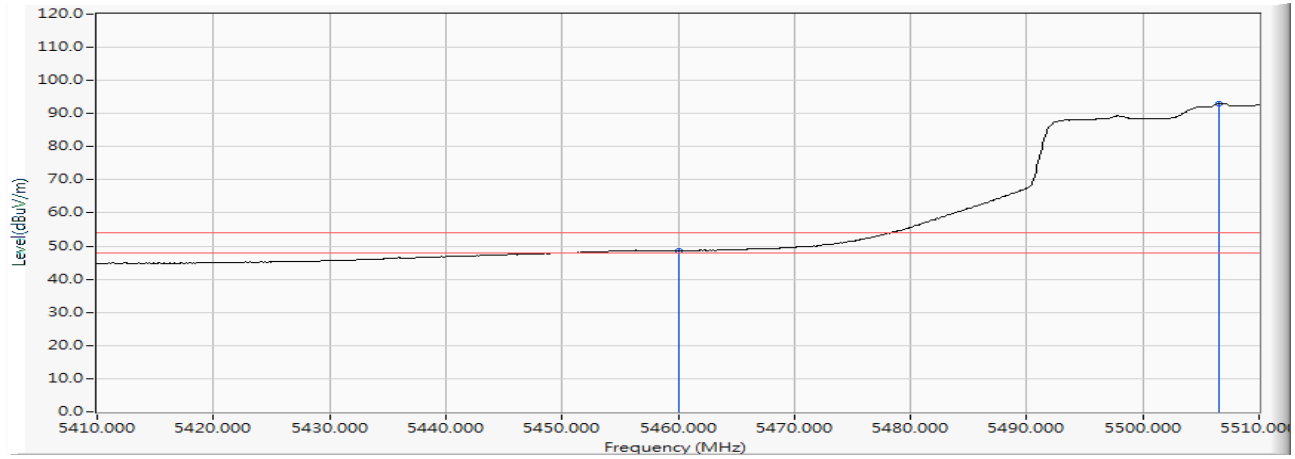


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	32.410	48.595	-5.405	54.000	AVERAGE
2	*	5506.600	16.273	76.770	93.043	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Vertical

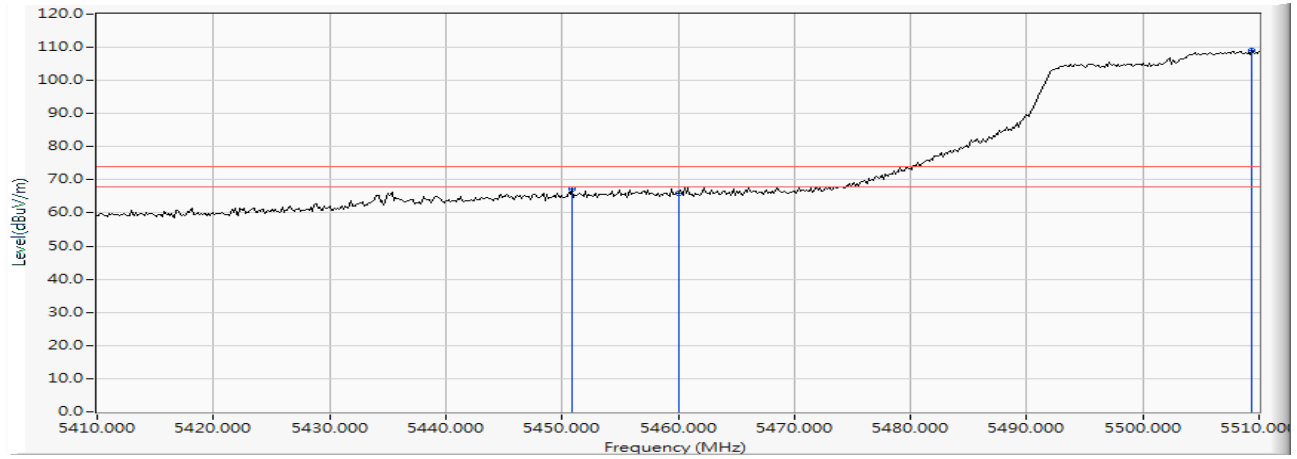


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5450.870	16.160	51.057	67.217	-6.783	74.000	PEAK
2		5460.000	16.185	49.771	65.956	-8.044	74.000	PEAK
3	*	5509.420	16.274	92.840	109.115	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Vertical

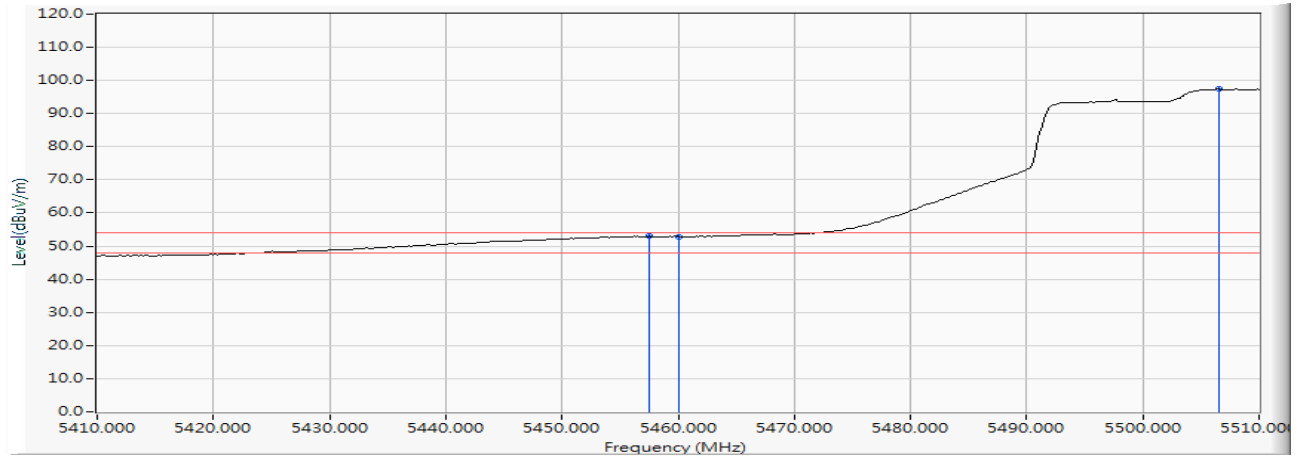


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5457.536	16.181	36.815	52.996	-1.004	54.000	AVERAGE
2		5460.000	16.185	36.561	52.746	-1.254	54.000	AVERAGE
3	*	5506.522	16.273	81.323	97.596	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)


Horizontal

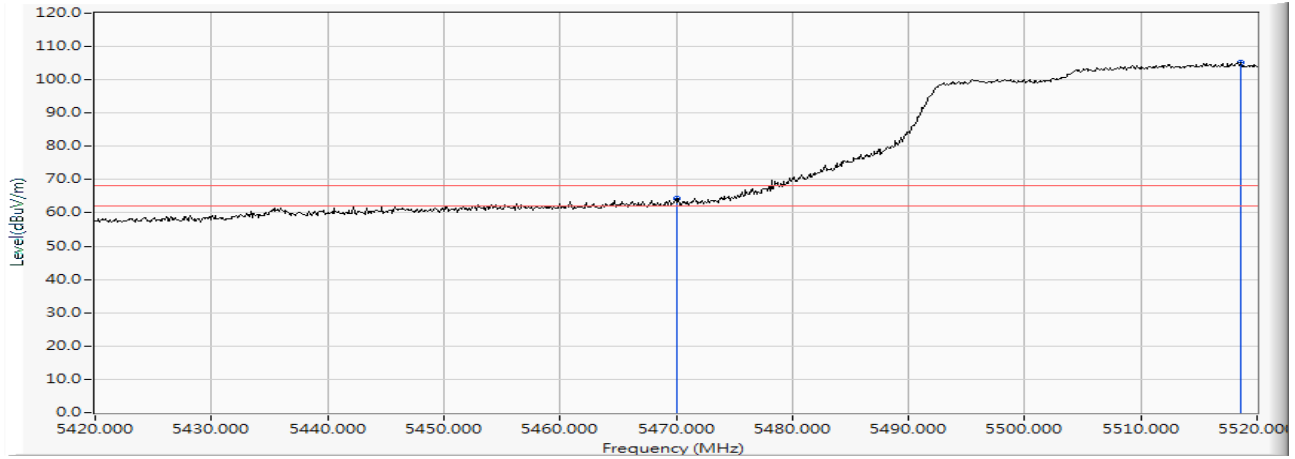

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5470.000	16.200	48.102	64.302	-3.918	68.220	PEAK
2	*	5518.600	16.289	89.023	105.313	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)


Vertical

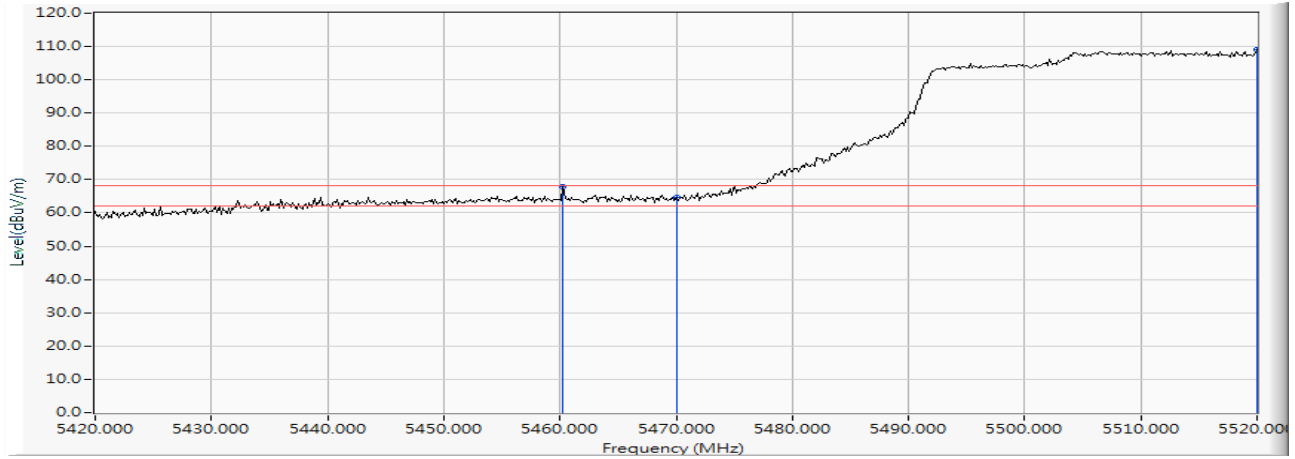

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.290	16.185	51.707	67.892	-0.328	68.220	PEAK
2		5470.000	16.200	48.408	64.608	-3.612	68.220	PEAK
3	*	5520.000	16.293	92.846	109.138	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 155 (5775MHz)


Horizontal

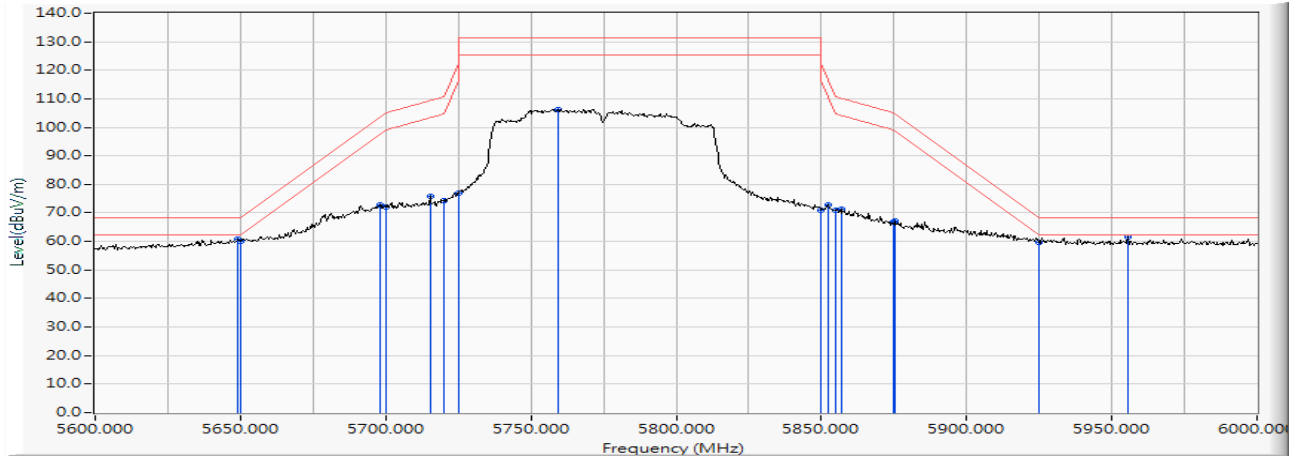

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5649.200	16.444	44.319	60.764	-7.456	68.220	PEAK
2		5650.000	16.447	43.485	59.932	-8.288	68.220	PEAK
3		5698.000	16.499	56.293	72.792	-30.929	103.721	PEAK
4		5700.000	16.502	55.645	72.147	-33.053	105.200	PEAK
5		5715.200	16.525	59.404	75.930	-33.526	109.456	PEAK
6		5720.000	16.535	57.808	74.343	-36.457	110.800	PEAK
7		5725.000	16.544	60.480	77.024	-45.176	122.200	PEAK
8		5759.200	16.582	89.757	106.339	--	--	PEAK
9		5850.000	16.748	54.060	70.808	-51.392	122.200	PEAK
10		5852.400	16.752	56.017	72.769	-43.959	116.728	PEAK
11		5855.000	16.758	54.171	70.929	-39.871	110.800	PEAK
12		5857.200	16.763	54.582	71.345	-38.839	110.184	PEAK
13		5875.000	16.807	49.899	66.707	-38.493	105.200	PEAK
14		5875.200	16.808	50.528	67.336	-37.716	105.052	PEAK
15		5925.000	16.920	42.660	59.580	-8.620	68.200	PEAK
16	*	5955.600	16.964	44.574	61.538	-6.662	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 155 (5775MHz)


Vertical

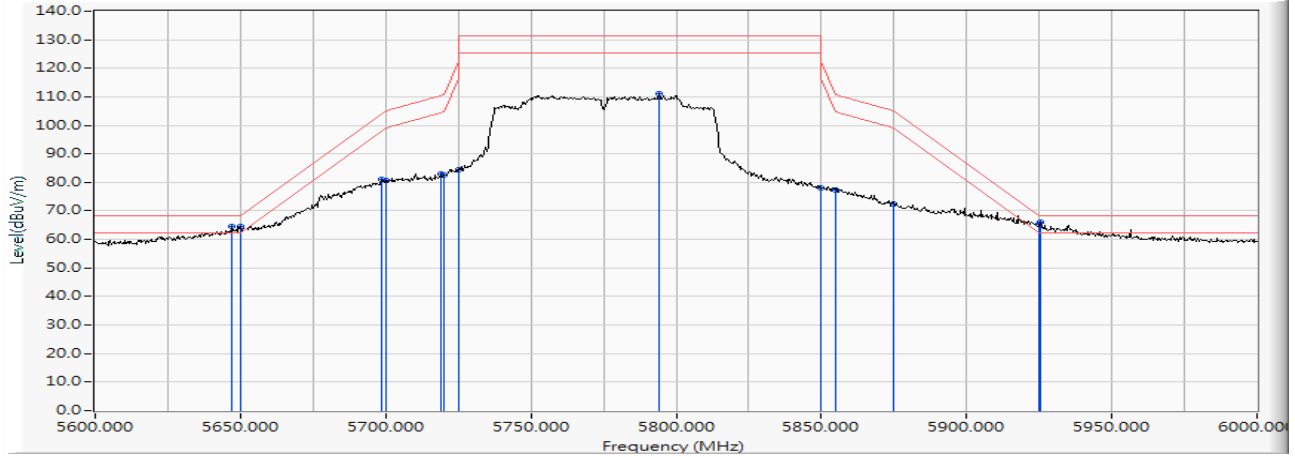

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5647.200	16.439	48.212	64.651	-3.569	68.220	PEAK
2		5650.000	16.447	48.174	64.621	-3.599	68.220	PEAK
3		5698.800	16.499	64.580	81.080	-23.232	104.312	PEAK
4		5700.000	16.502	64.273	80.775	-24.425	105.200	PEAK
5		5718.800	16.533	66.441	82.974	-27.490	110.464	PEAK
6		5720.000	16.535	66.000	82.535	-28.265	110.800	PEAK
7		5725.000	16.544	67.880	84.424	-37.776	122.200	PEAK
8		5794.000	16.643	94.330	110.974	--	--	PEAK
9		5850.000	16.748	61.297	78.045	-44.155	122.200	PEAK
10		5855.000	16.758	60.565	77.323	-33.477	110.800	PEAK
11		5875.000	16.807	55.672	72.480	-32.720	105.200	PEAK
12		5925.000	16.920	48.411	65.331	-2.869	68.200	PEAK
13	*	5925.200	16.920	49.211	66.131	-2.069	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

Horizontal

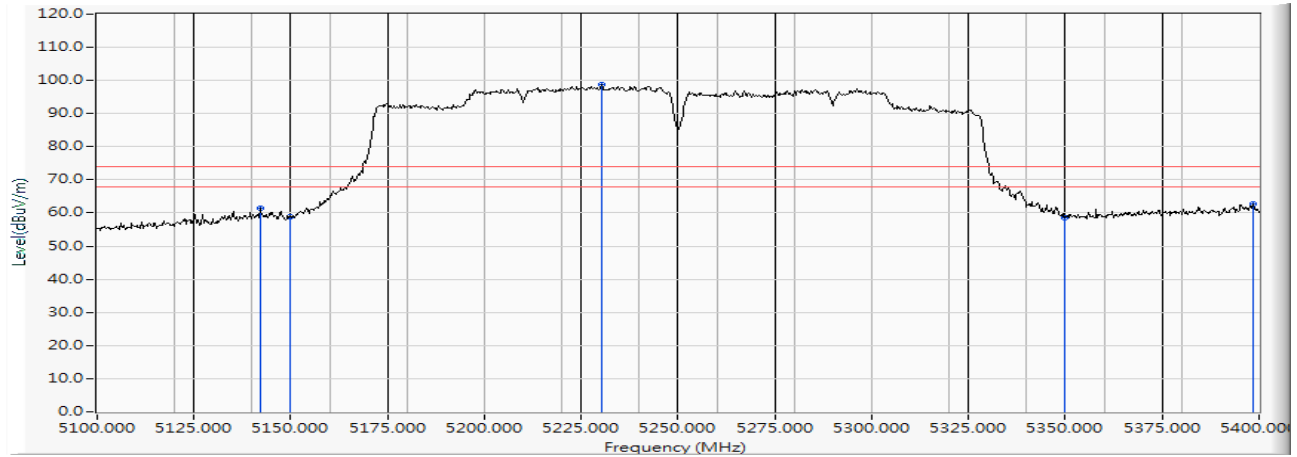


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5142.000	15.261	46.080	61.341	-12.659	74.000	PEAK
2		5150.000	15.307	43.493	58.800	-15.200	74.000	PEAK
3	*	5230.200	15.606	83.093	98.698	--	--	PEAK
4		5350.000	15.912	42.762	58.674	-15.326	74.000	PEAK
5		5398.500	16.027	46.803	62.830	-11.170	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

Horizontal

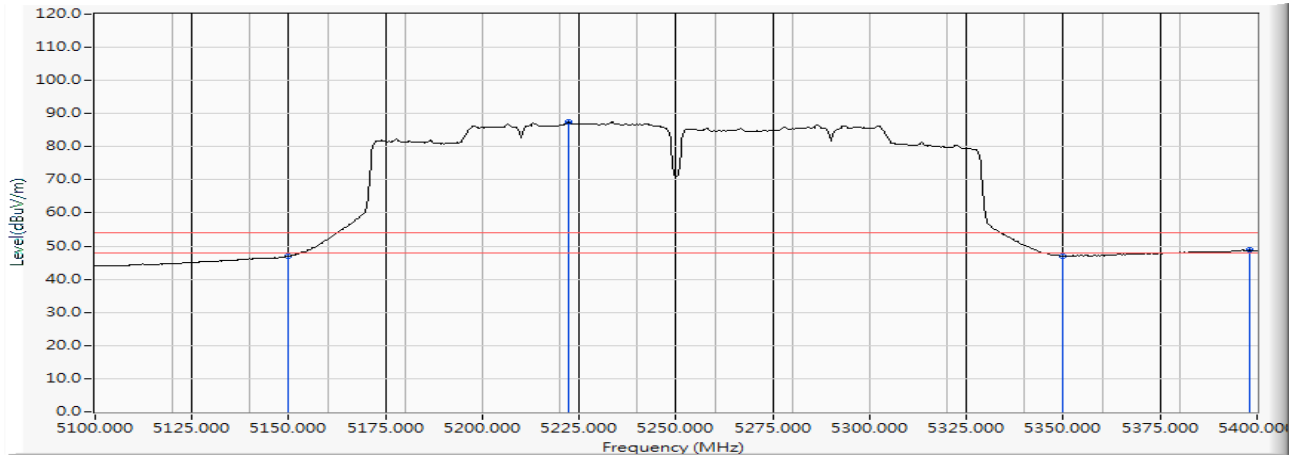


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	31.714	47.021	-6.979	54.000	AVERAGE
2	*	5222.400	15.582	71.885	87.467	--	--	AVERAGE
3		5350.000	15.912	31.156	47.068	-6.932	54.000	AVERAGE
4		5398.200	16.026	32.723	48.749	-5.251	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

Vertical

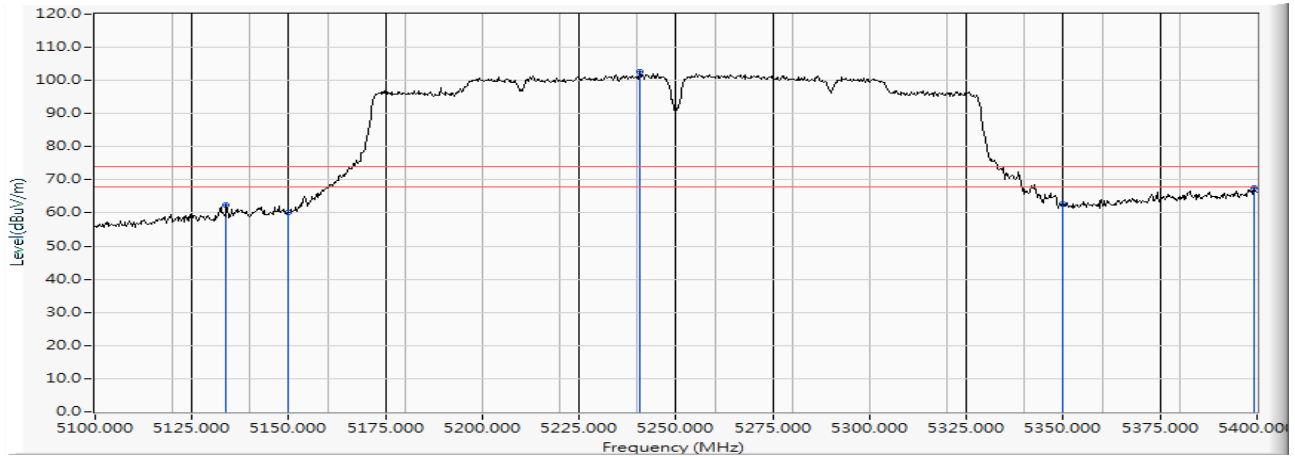


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5133.900	15.217	47.119	62.335	-11.665	74.000	PEAK
2		5150.000	15.307	44.816	60.123	-13.877	74.000	PEAK
3	*	5240.700	15.633	86.991	102.625	--	--	PEAK
4		5350.000	15.912	46.831	62.743	-11.257	74.000	PEAK
5		5399.100	16.027	51.525	67.552	-6.448	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

Vertical

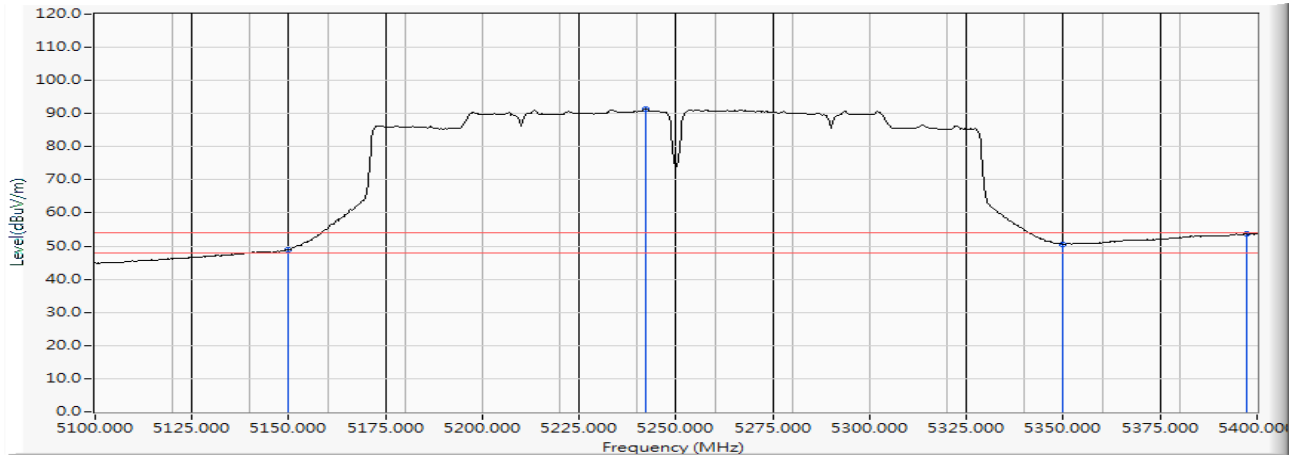


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	33.673	48.980	-5.020	54.000	AVERAGE
2	*	5242.200	15.640	75.877	91.517	--	--	AVERAGE
3		5350.000	15.912	34.741	50.653	-3.347	54.000	AVERAGE
4		5397.300	16.026	37.743	53.768	-0.232	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

Horizontal

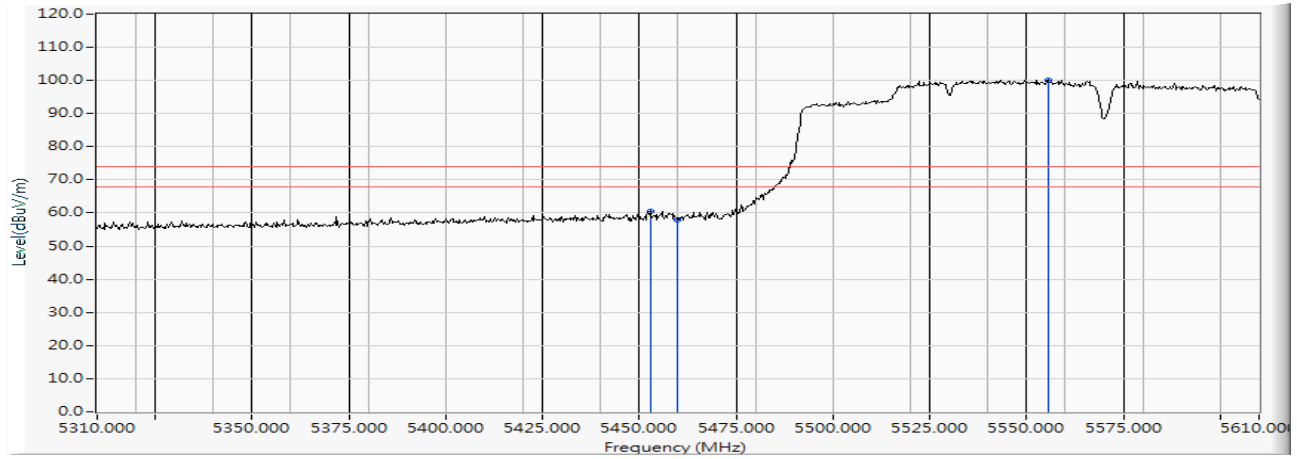


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5452.800	16.167	44.381	60.547	-13.453	74.000	PEAK
2		5460.000	16.185	41.875	58.060	-15.940	74.000	PEAK
3	*	5555.700	16.325	83.818	100.143	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

Horizontal

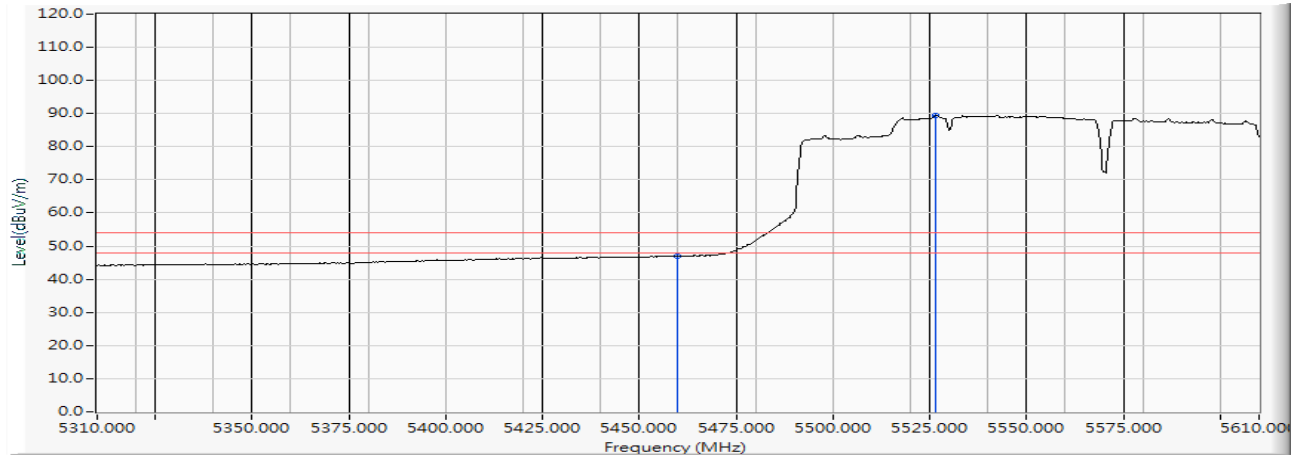


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	30.735	46.920	-7.080	54.000	AVERAGE
2	*	5526.600	16.304	73.238	89.542	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

Vertical

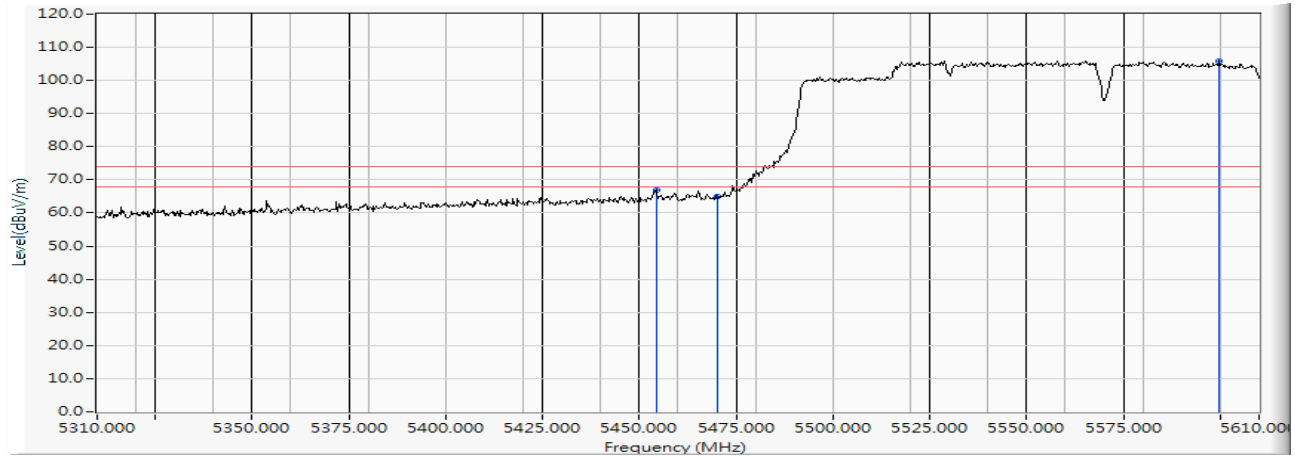


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5454.300	16.172	50.906	67.077	-6.923	74.000	PEAK
2		5470.000	16.200	48.722	64.922	-9.078	74.000	PEAK
3	*	5599.800	16.384	89.546	105.929	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

Vertical

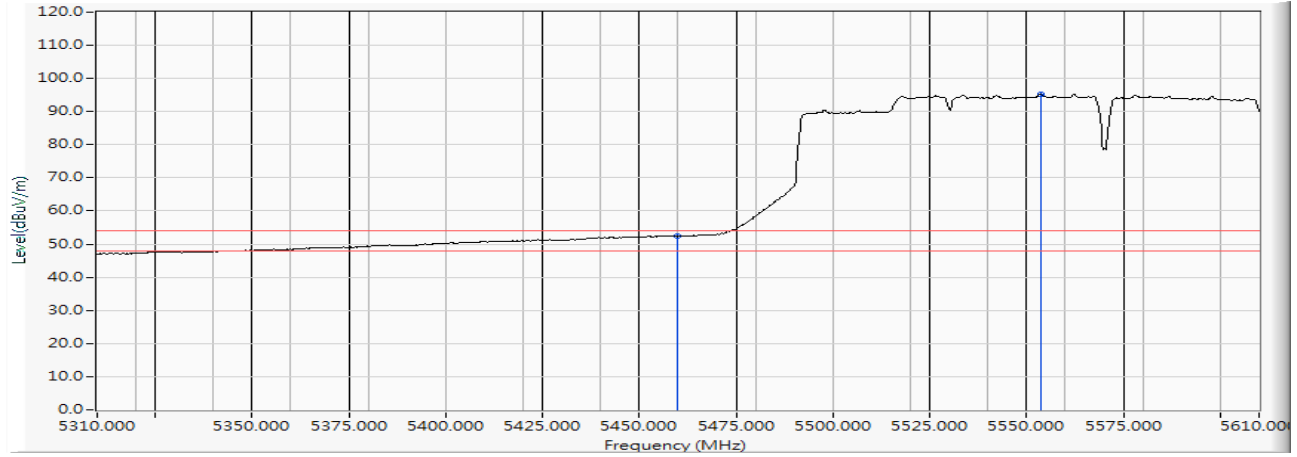


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	36.168	52.353	-1.647	54.000	AVERAGE
2	*	5553.600	16.325	78.892	95.217	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)


Horizontal

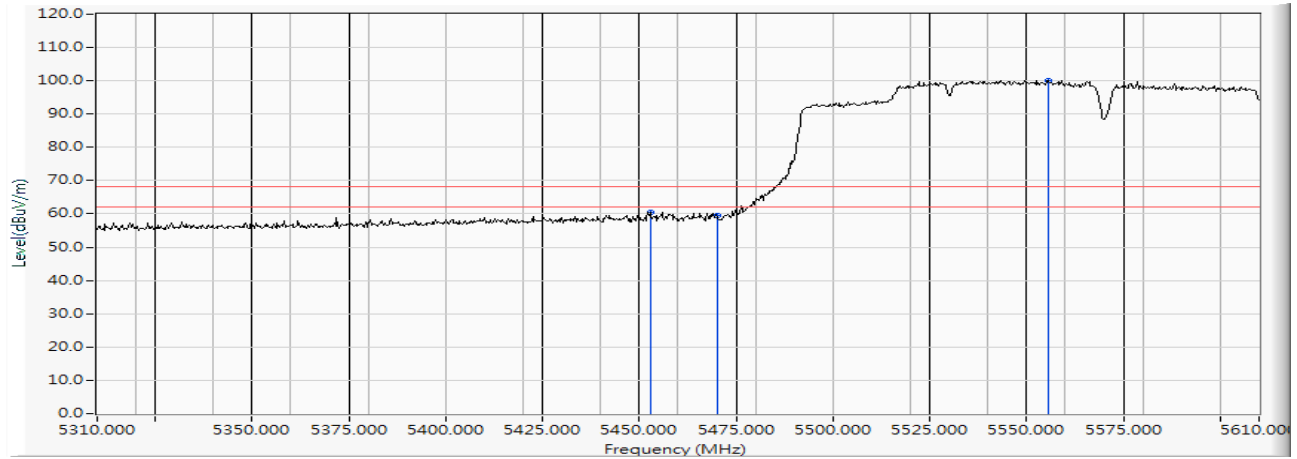

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5452.800	16.167	44.381	60.547	-7.673	68.220	PEAK
2		5470.000	16.200	43.349	59.549	-8.671	68.220	PEAK
3	*	5555.700	16.325	83.818	100.143	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)


Vertical

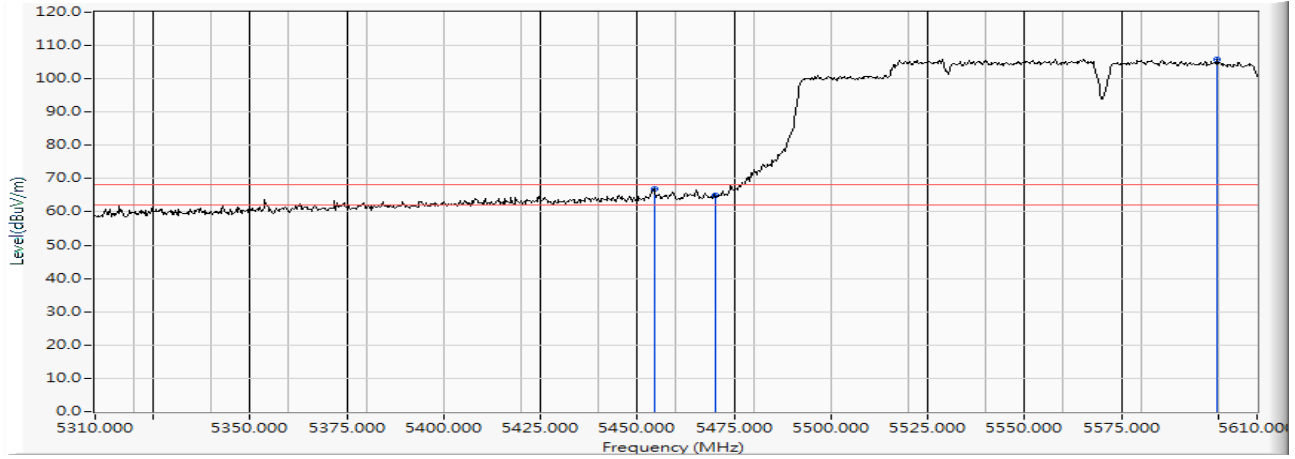

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5454.300	16.172	50.906	67.077	-1.143	68.220	PEAK
2		5470.000	16.200	48.722	64.922	-3.298	68.220	PEAK
3	*	5599.800	16.384	89.546	105.929	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Horizontal

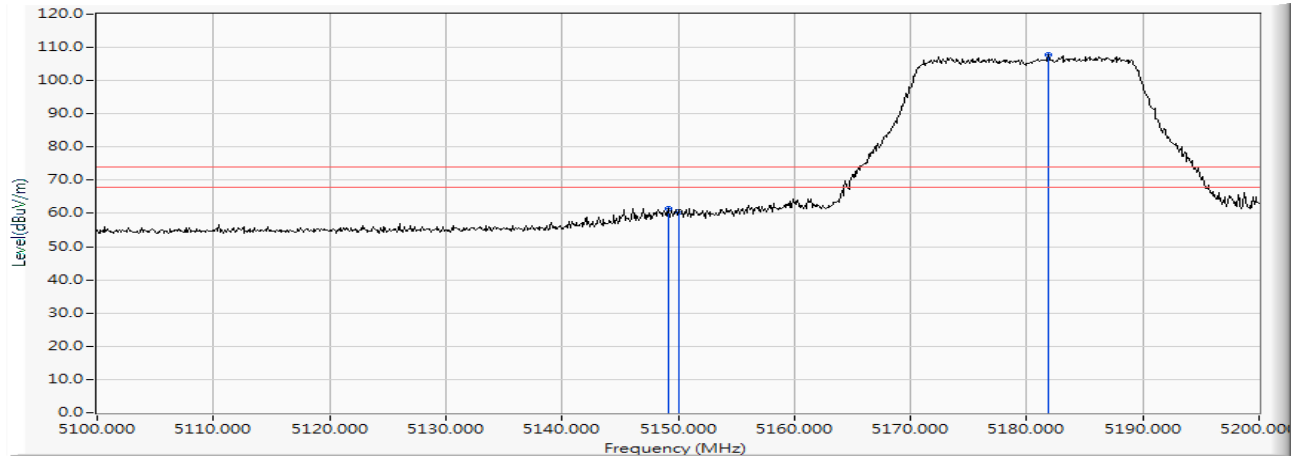


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.200	15.302	46.070	61.373	-12.627	74.000	PEAK
2		5150.000	15.307	45.178	60.485	-13.515	74.000	PEAK
3	*	5181.900	15.401	92.358	107.758	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Horizontal

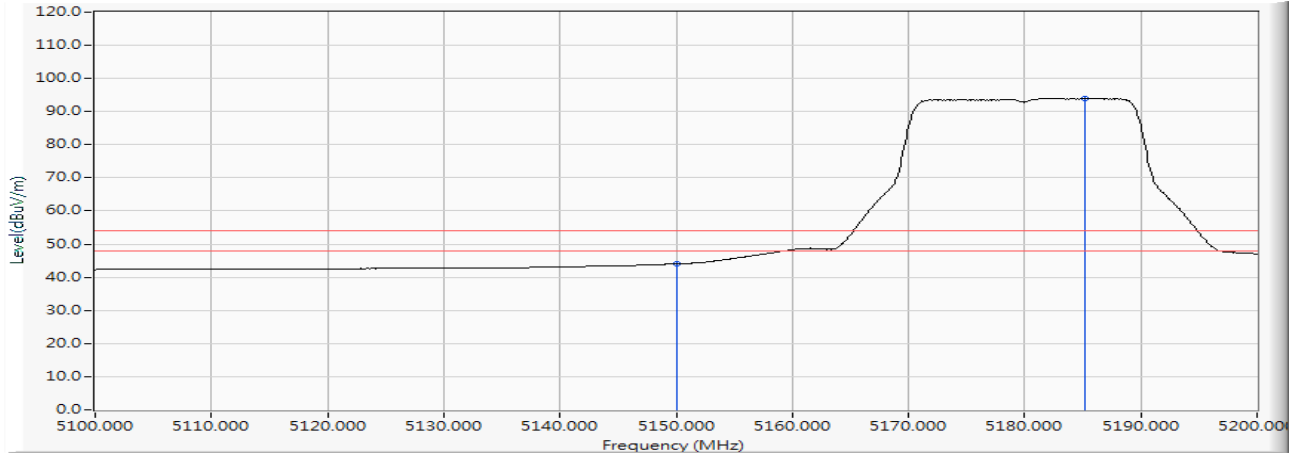


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	28.722	44.029	-9.971	54.000	AVERAGE
2	*	5185.200	15.415	78.665	94.080	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Vertical

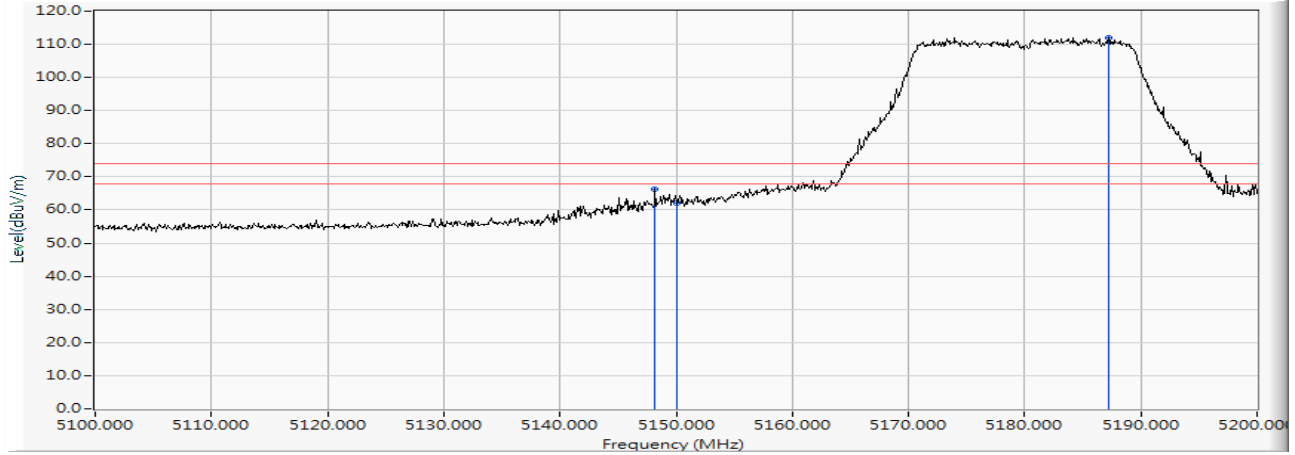


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.200	15.296	50.816	66.113	-7.887	74.000	PEAK
2		5150.000	15.307	46.625	61.932	-12.068	74.000	PEAK
3	*	5187.200	15.424	96.685	112.109	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Vertical

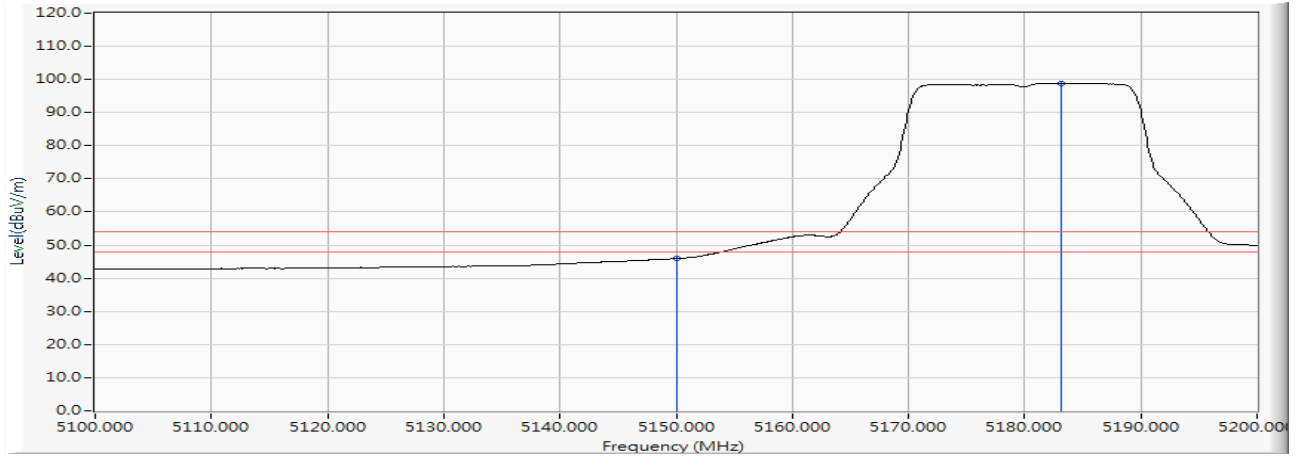


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	30.680	45.987	-8.013	54.000	AVERAGE
2	*	5183.100	15.406	83.457	98.863	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Horizontal

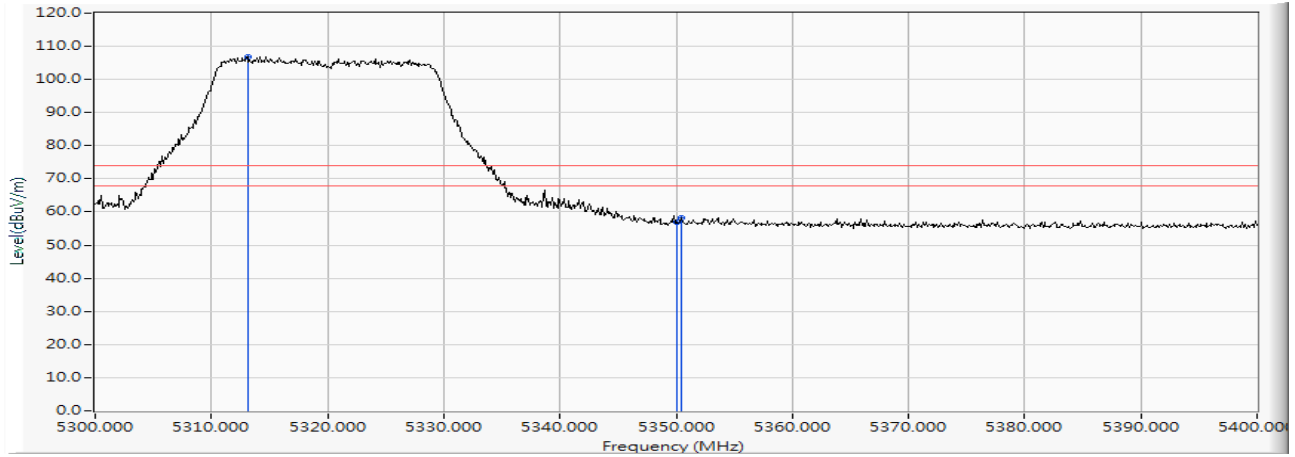


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.100	15.827	91.038	106.866	--	--	PEAK
2		5350.000	15.912	40.984	56.896	-17.104	74.000	PEAK
3		5350.400	15.914	42.324	58.237	-15.763	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Horizontal

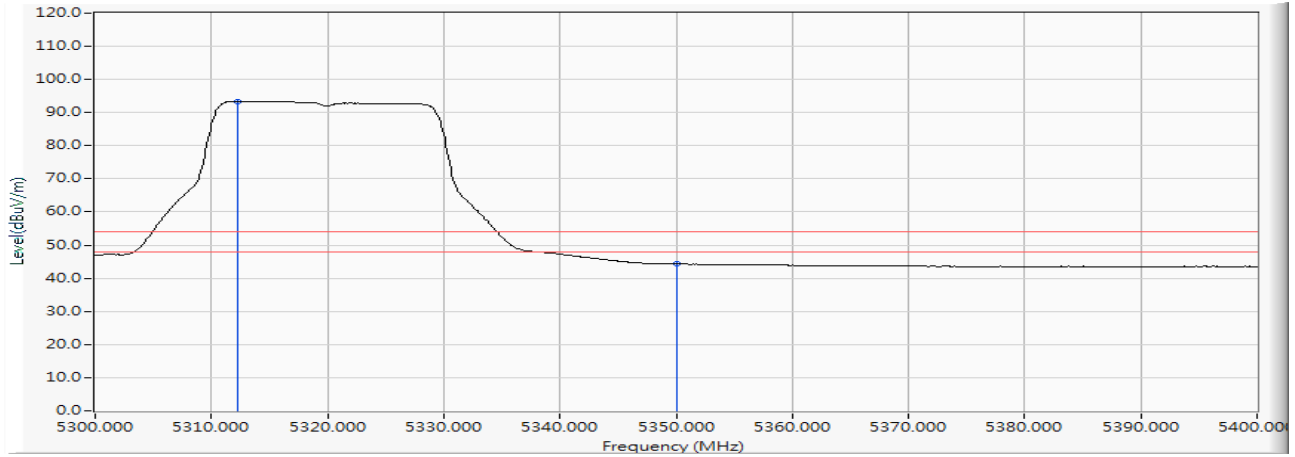


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5312.300	15.826	77.617	93.443	--	--	AVERAGE
2		5350.000	15.912	28.351	44.263	-9.737	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Vertical

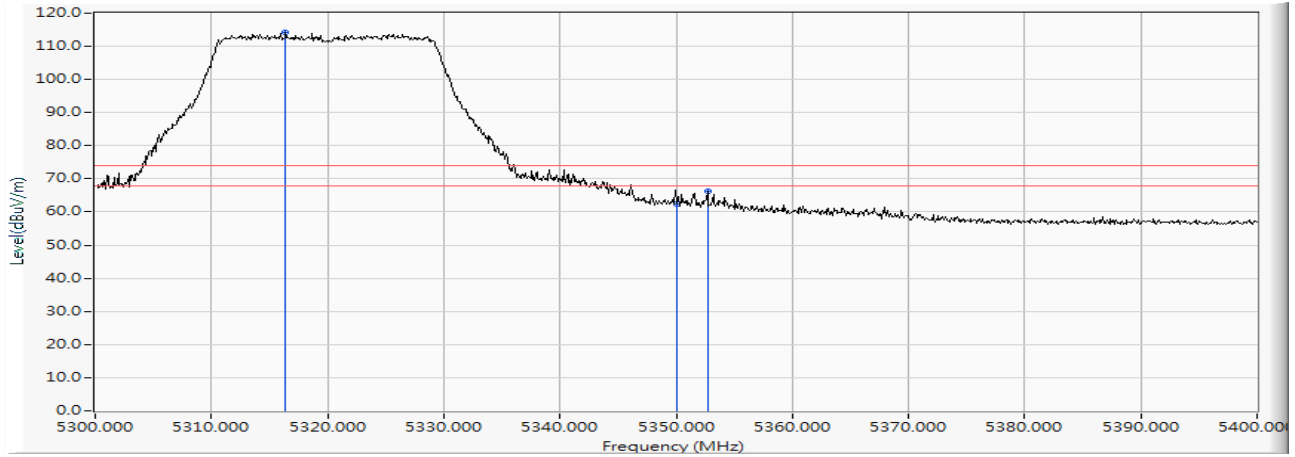


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5316.400	15.838	98.447	114.285	--	--	PEAK
2		5350.000	15.912	46.457	62.369	-11.631	74.000	PEAK
3		5352.700	15.920	50.414	66.335	-7.665	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Vertical

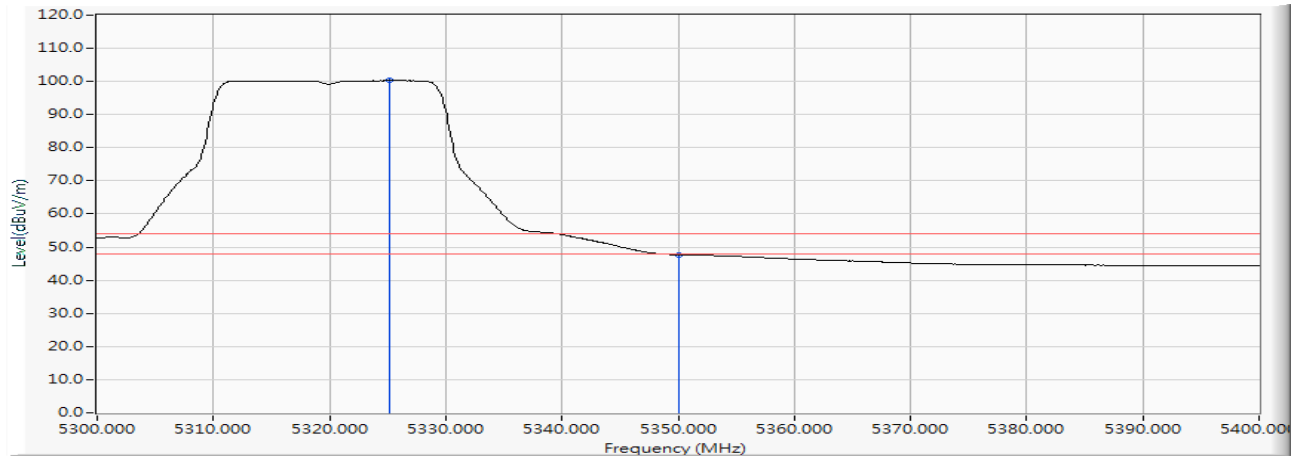


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5325.200	15.866	84.449	100.315	--	--	AVERAGE
2		5350.000	15.912	31.786	47.698	-6.302	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Horizontal

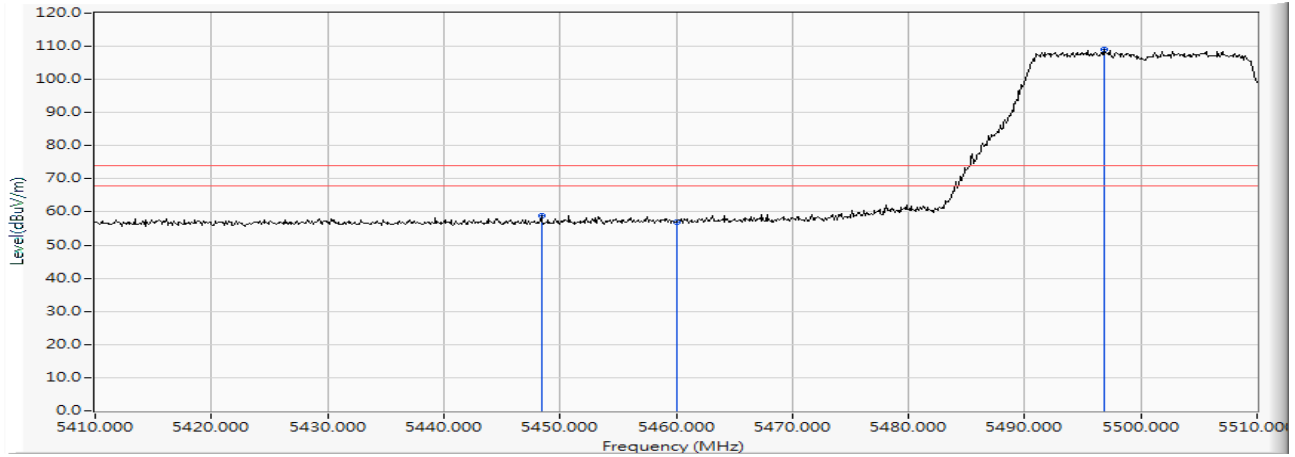


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5448.400	16.152	42.725	58.877	-15.123	74.000	PEAK
2		5460.000	16.185	40.665	56.850	-17.150	74.000	PEAK
3	*	5496.800	16.266	92.679	108.945	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Horizontal

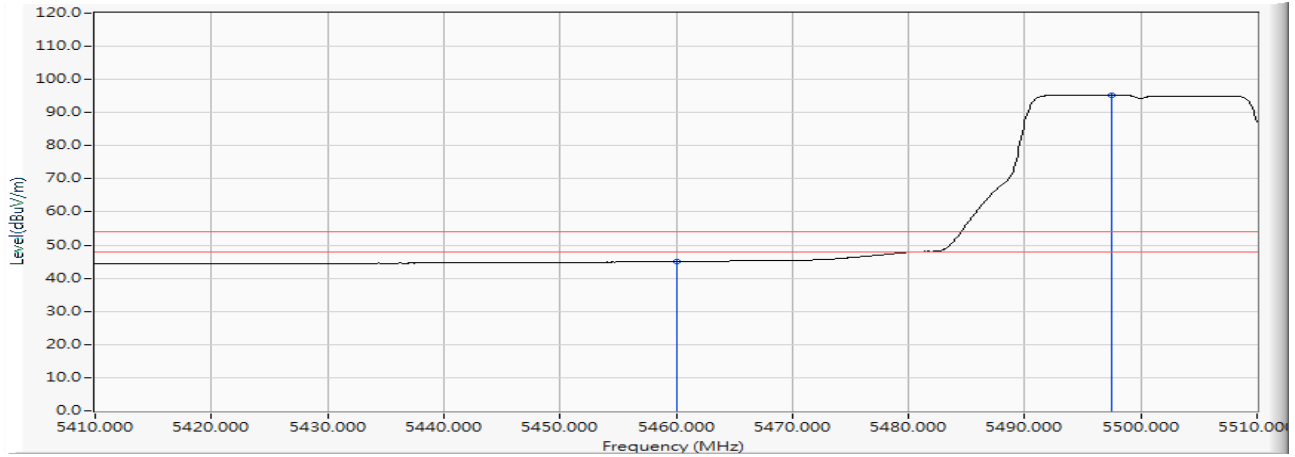


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	28.815	45.000	-9.000	54.000	AVERAGE
2	*	5497.500	16.267	79.067	95.334	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Vertical

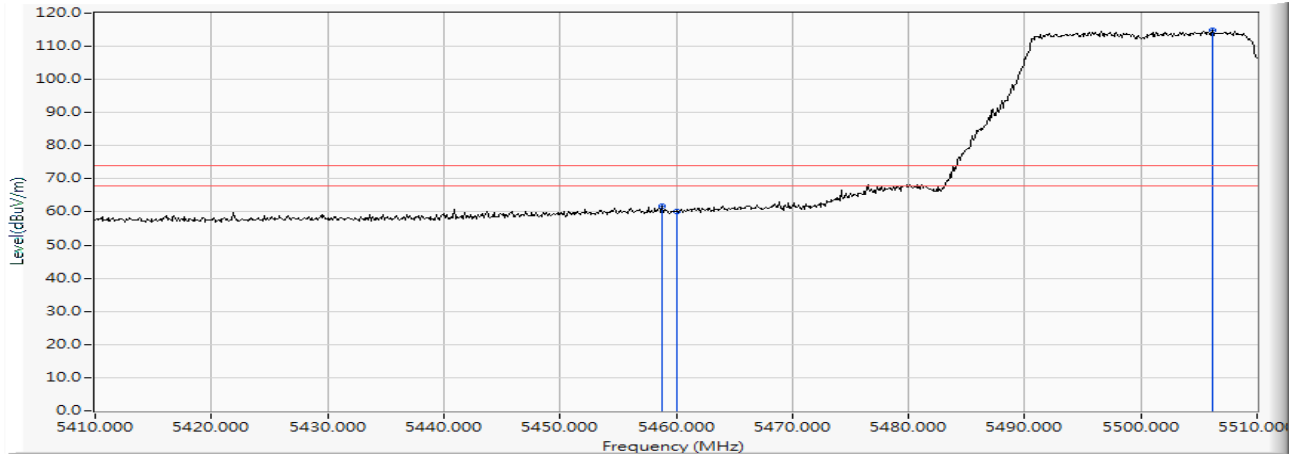


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.800	16.182	45.640	61.823	-12.177	74.000	PEAK
2		5460.000	16.185	43.955	60.140	-13.860	74.000	PEAK
3	*	5506.200	16.273	98.492	114.765	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Vertical

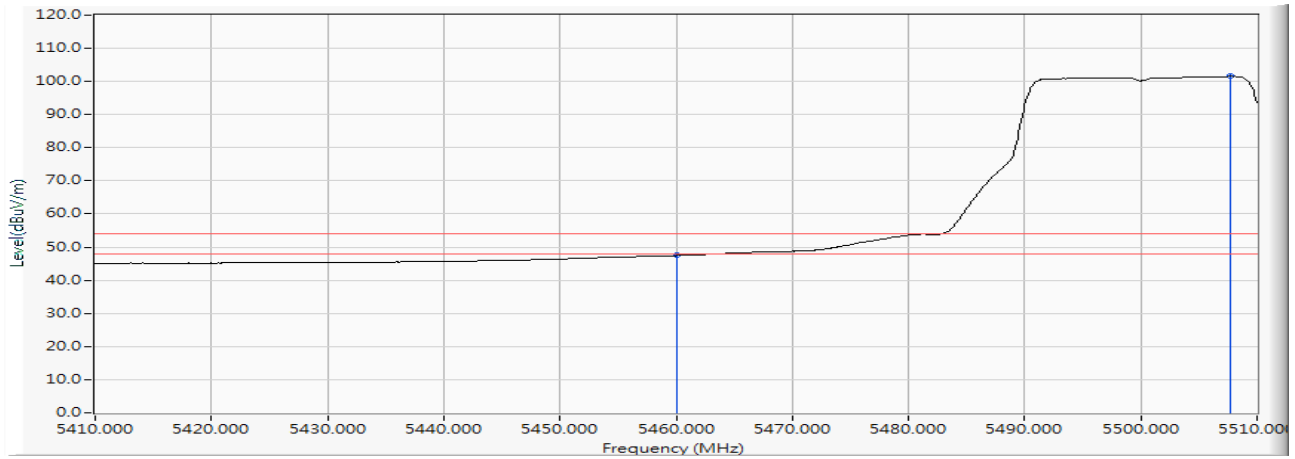


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	31.276	47.461	-6.539	54.000	AVERAGE
2	*	5507.700	16.274	85.244	101.518	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)


Horizontal

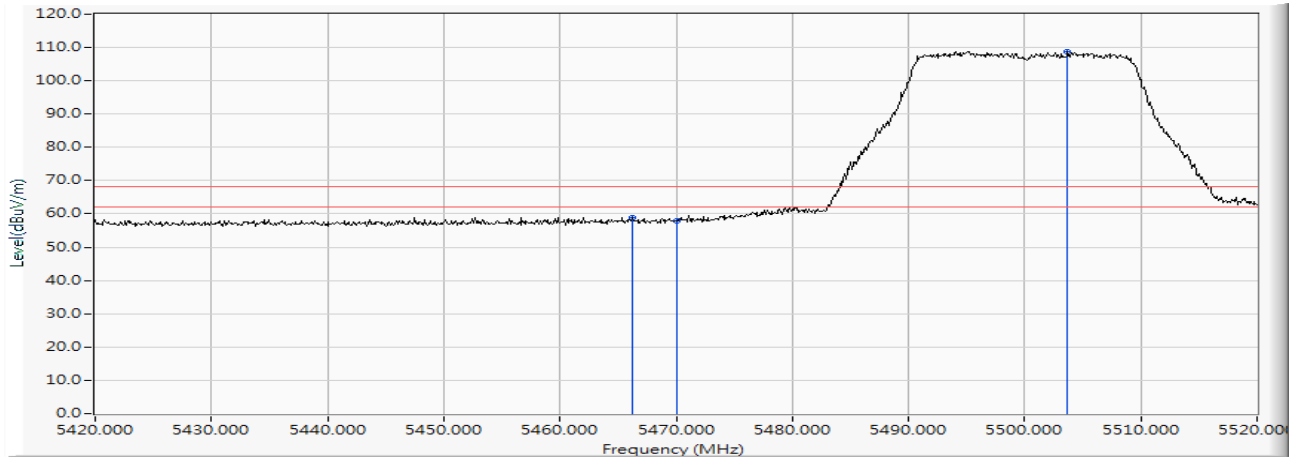

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5466.200	16.193	42.789	58.983	-9.237	68.220	PEAK
2		5470.000	16.200	41.764	57.964	-10.256	68.220	PEAK
3	*	5503.700	16.274	92.579	108.852	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)


Vertical

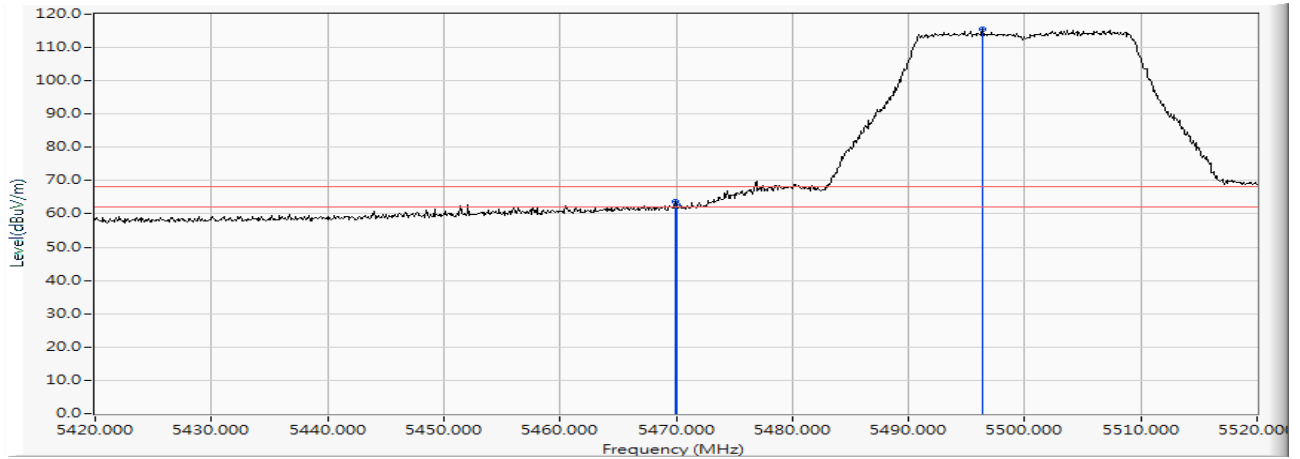

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5469.900	16.200	47.516	63.715	-4.505	68.220	PEAK
2		5470.000	16.200	46.420	62.620	-5.600	68.220	PEAK
3	*	5496.400	16.266	99.106	115.372	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 140 (5700MHz)


Horizontal

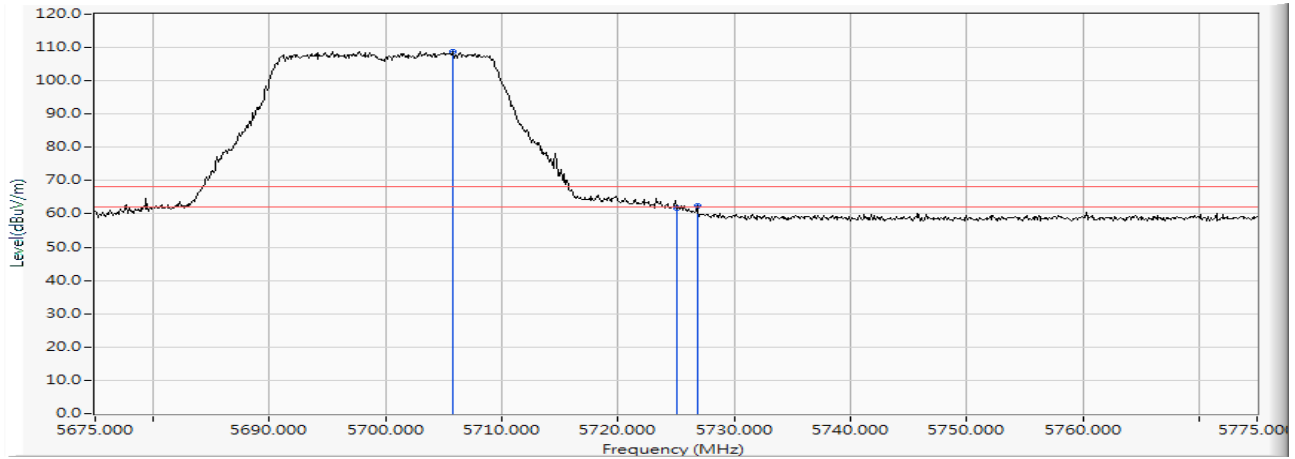

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5705.800	16.509	92.282	108.791	--	--	PEAK
2		5725.000	16.544	45.289	61.833	-6.387	68.220	PEAK
3		5726.800	16.547	45.910	62.457	-5.763	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 140 (5700MHz)


Vertical

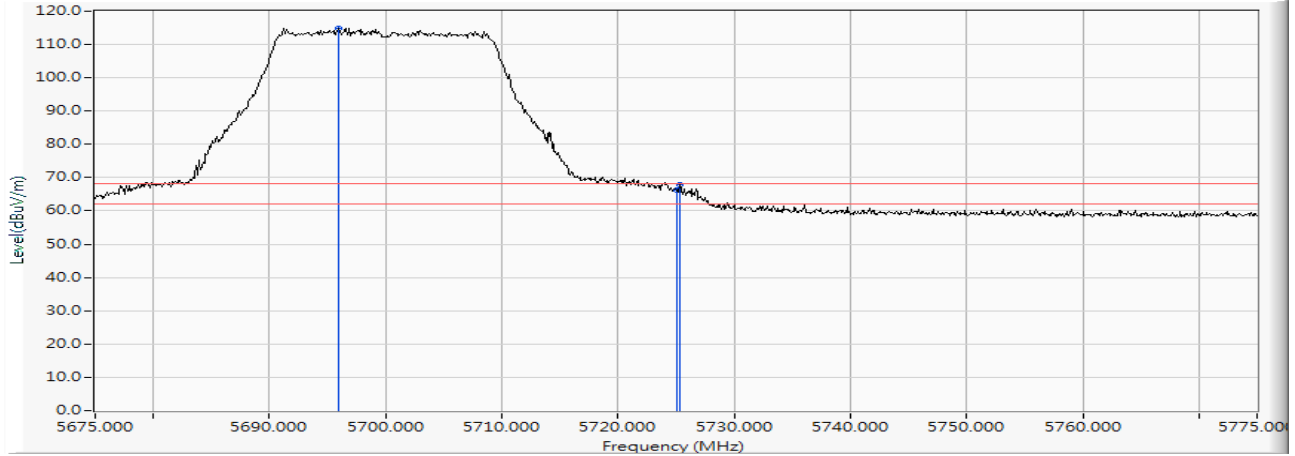

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5696.000	16.497	98.490	114.987	--	--	PEAK
2		5725.000	16.544	49.886	66.430	-1.790	68.220	PEAK
3		5725.300	16.544	51.263	67.808	-0.412	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 149 (5745MHz)


Horizontal

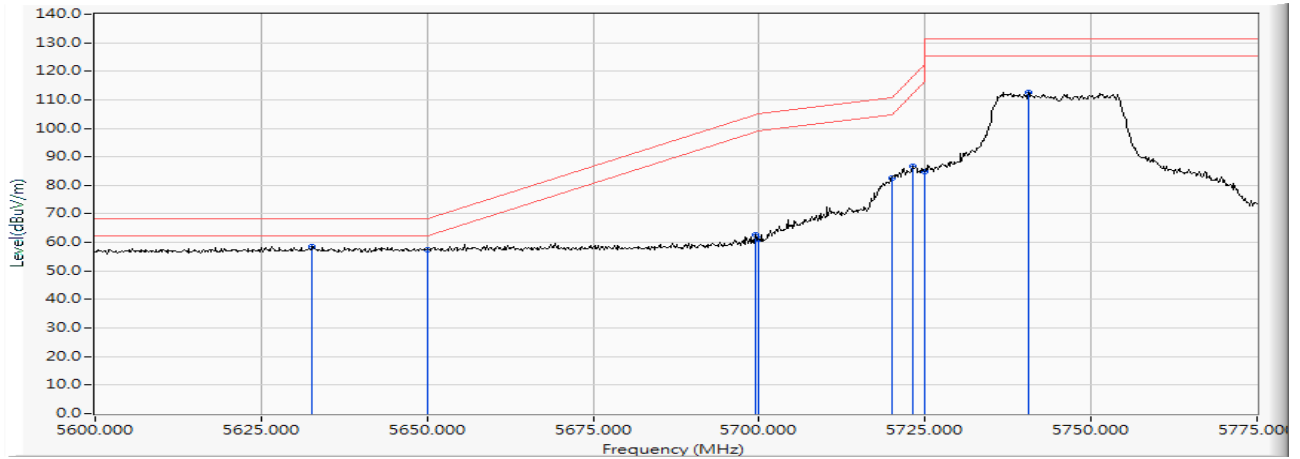

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5632.725	16.409	42.237	58.646	-9.574	68.220	PEAK
2		5650.000	16.447	41.134	57.581	-10.639	68.220	PEAK
3		5699.400	16.501	46.170	62.671	-42.085	104.756	PEAK
4		5700.000	16.502	44.619	61.121	-44.079	105.200	PEAK
5		5720.000	16.535	66.199	82.734	-28.066	110.800	PEAK
6		5723.200	16.541	70.045	86.586	-31.510	118.096	PEAK
7		5725.000	16.544	68.316	84.860	-37.340	122.200	PEAK
8		5740.525	16.556	95.872	112.428	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 149 (5745MHz)


Vertical

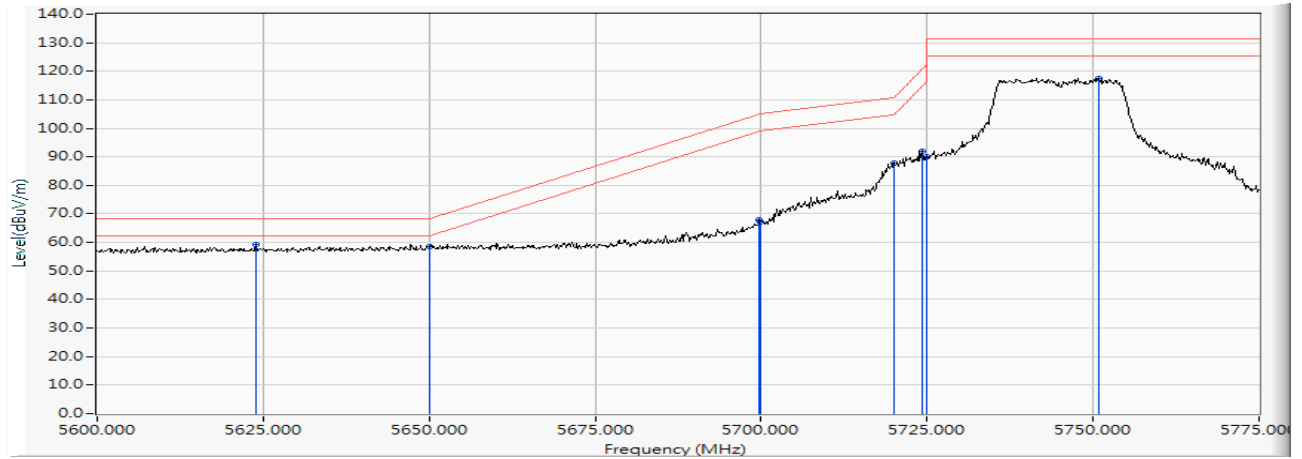

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5623.975	16.407	42.757	59.164	-9.056	68.220	PEAK
2		5650.000	16.447	41.941	58.388	-9.832	68.220	PEAK
3		5699.750	16.502	51.506	68.007	-37.008	105.015	PEAK
4		5700.000	16.502	50.754	67.256	-37.944	105.200	PEAK
5		5720.000	16.535	71.141	87.676	-23.124	110.800	PEAK
6		5724.250	16.543	75.589	92.132	-28.358	120.490	PEAK
7		5725.000	16.544	73.562	90.106	-32.094	122.200	PEAK
8		5750.850	16.570	101.013	117.582	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 165 (5825MHz)


Horizontal

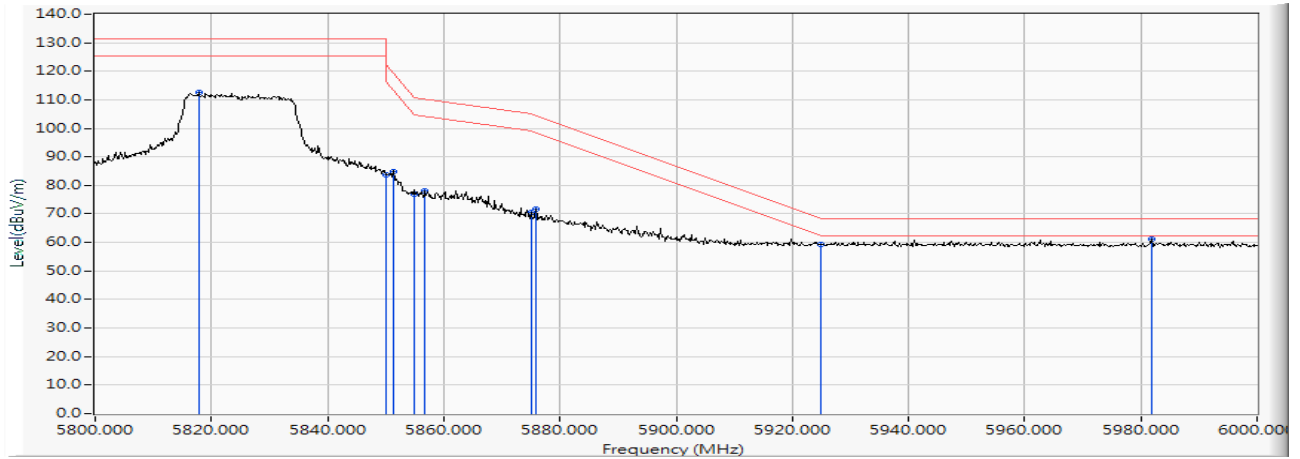

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5817.800	16.702	95.754	112.456	--	--	PEAK
2		5850.000	16.748	66.945	83.693	-38.507	122.200	PEAK
3		5851.400	16.750	68.263	85.013	-33.995	119.008	PEAK
4		5855.000	16.758	60.189	76.947	-33.853	110.800	PEAK
5		5856.800	16.763	61.424	78.187	-32.109	110.296	PEAK
6		5875.000	16.807	53.730	70.538	-34.662	105.200	PEAK
7		5875.800	16.810	54.905	71.715	-32.893	104.608	PEAK
8		5925.000	16.920	42.297	59.217	-8.983	68.200	PEAK
9	*	5981.800	17.023	44.191	61.214	-6.986	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 165 (5825MHz)


Vertical

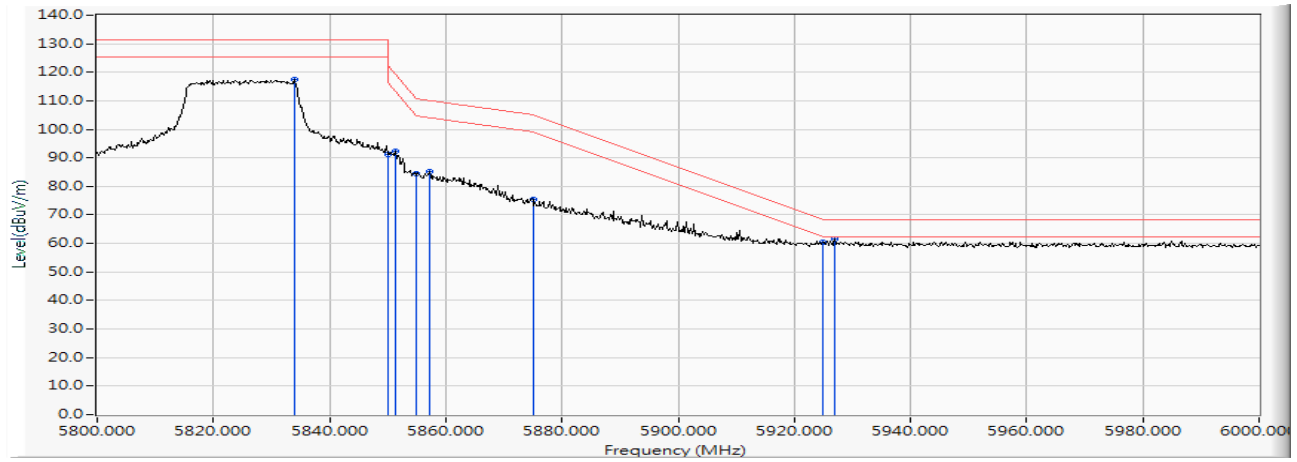

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5834.000	16.724	100.728	117.452	--	--	PEAK
2		5850.000	16.748	74.356	91.104	-31.096	122.200	PEAK
3		5851.400	16.750	75.763	92.513	-26.495	119.008	PEAK
4		5855.000	16.758	67.588	84.346	-26.454	110.800	PEAK
5		5857.200	16.763	68.432	85.195	-24.989	110.184	PEAK
6		5875.000	16.807	58.488	75.296	-29.904	105.200	PEAK
7		5925.000	16.920	43.622	60.542	-7.658	68.200	PEAK
8	*	5927.000	16.922	44.463	61.385	-6.815	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Horizontal

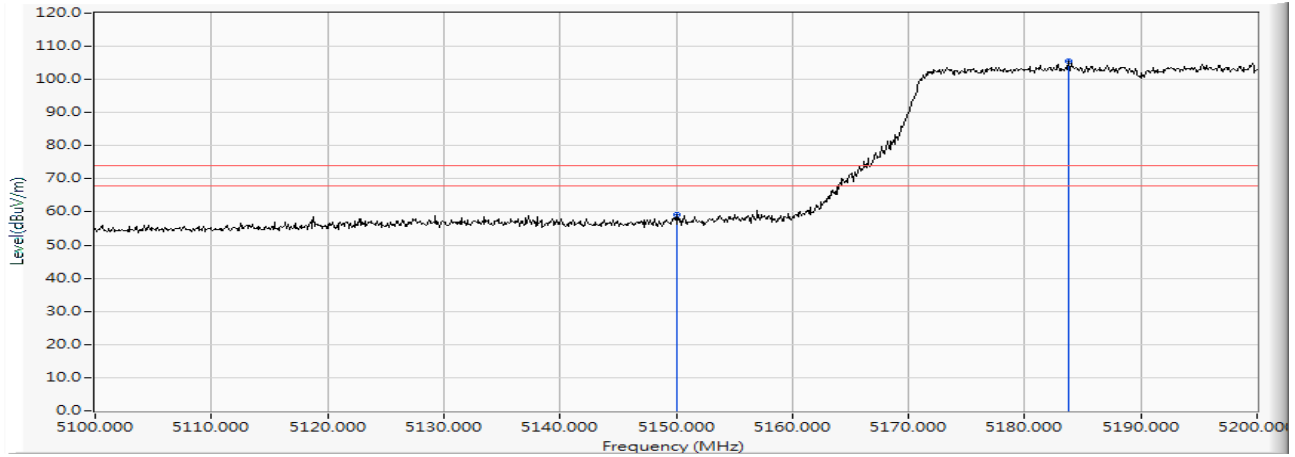


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	43.852	59.159	-14.841	74.000	PEAK
2	*	5183.800	15.409	90.170	105.579	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Horizontal

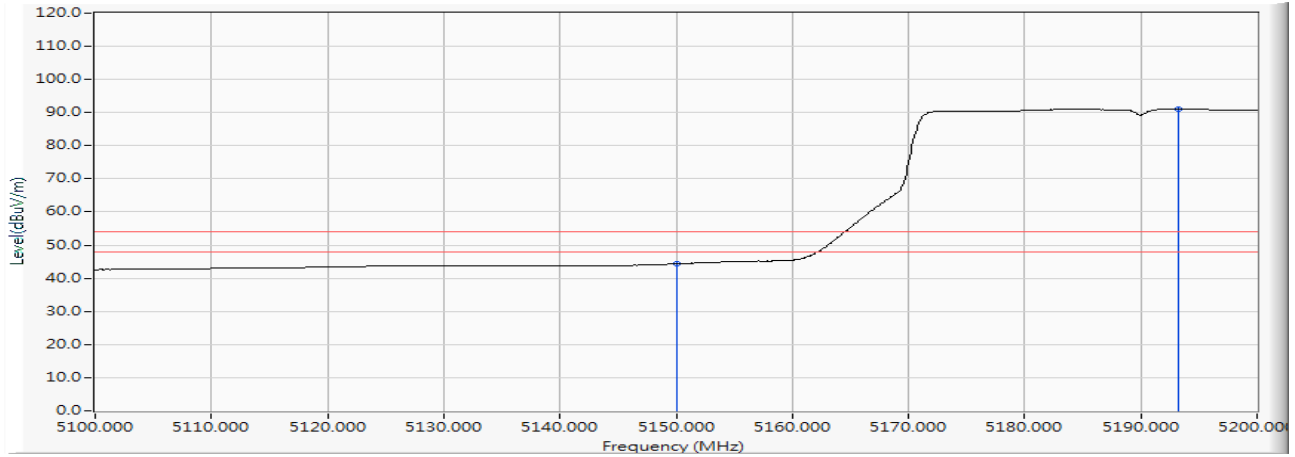


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	29.025	44.332	-9.668	54.000	AVERAGE
2	*	5193.200	15.447	75.600	91.047	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Vertical

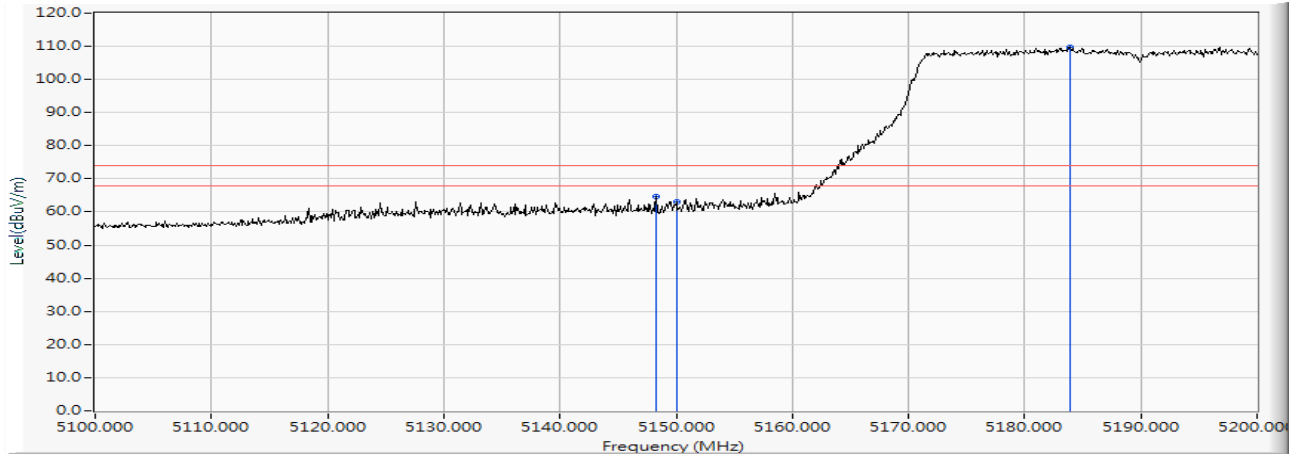


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.300	15.297	49.280	64.577	-9.423	74.000	PEAK
2		5150.000	15.307	47.812	63.119	-10.881	74.000	PEAK
3	*	5183.900	15.410	94.322	109.731	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Vertical

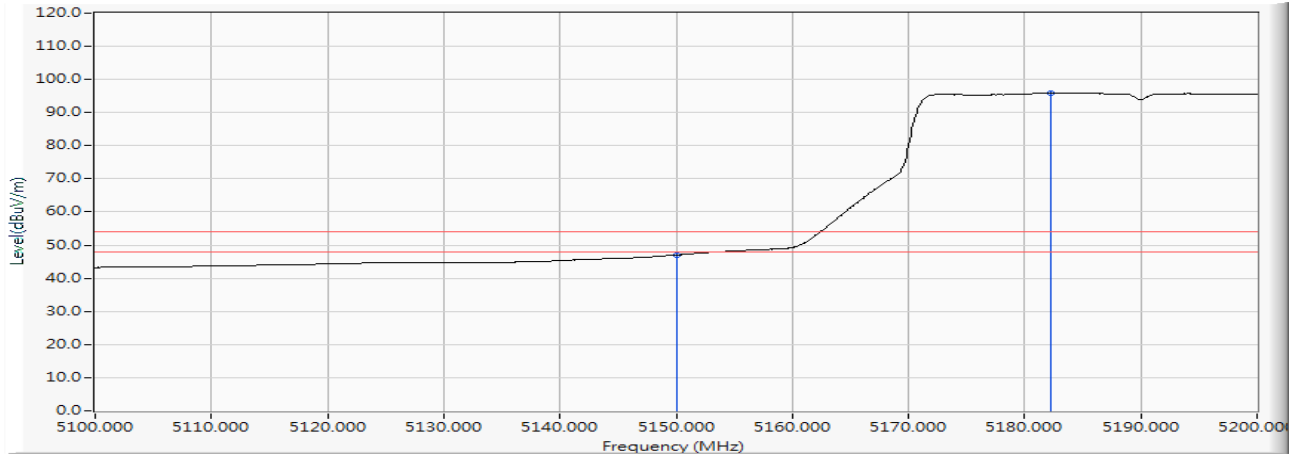


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	31.689	46.996	-7.004	54.000	AVERAGE
2	*	5182.200	15.401	80.508	95.910	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Horizontal

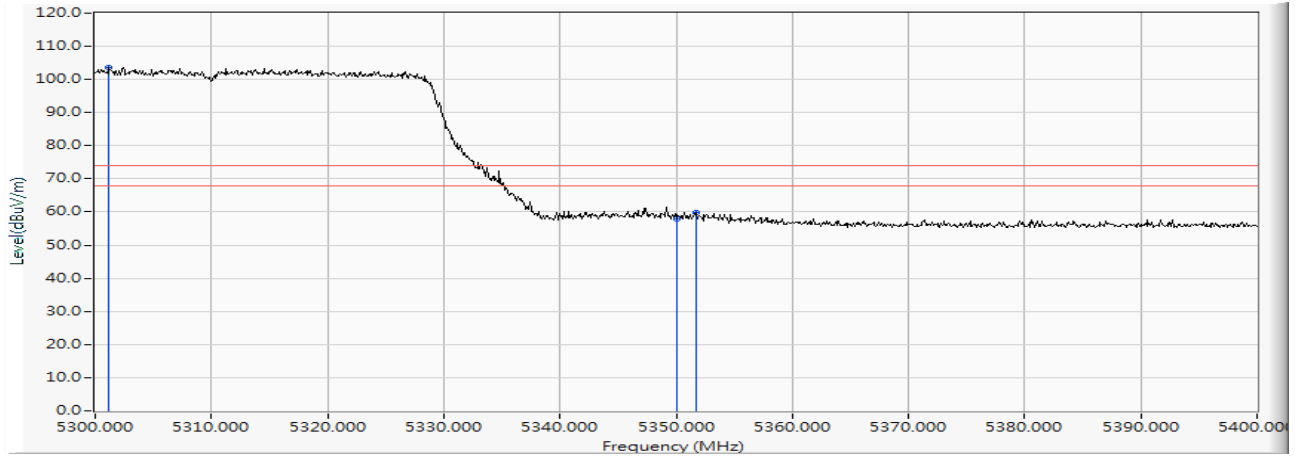


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5301.200	15.799	87.692	103.491	--	--	PEAK
2		5350.000	15.912	41.874	57.786	-16.214	74.000	PEAK
3		5351.700	15.917	43.944	59.862	-14.138	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Horizontal

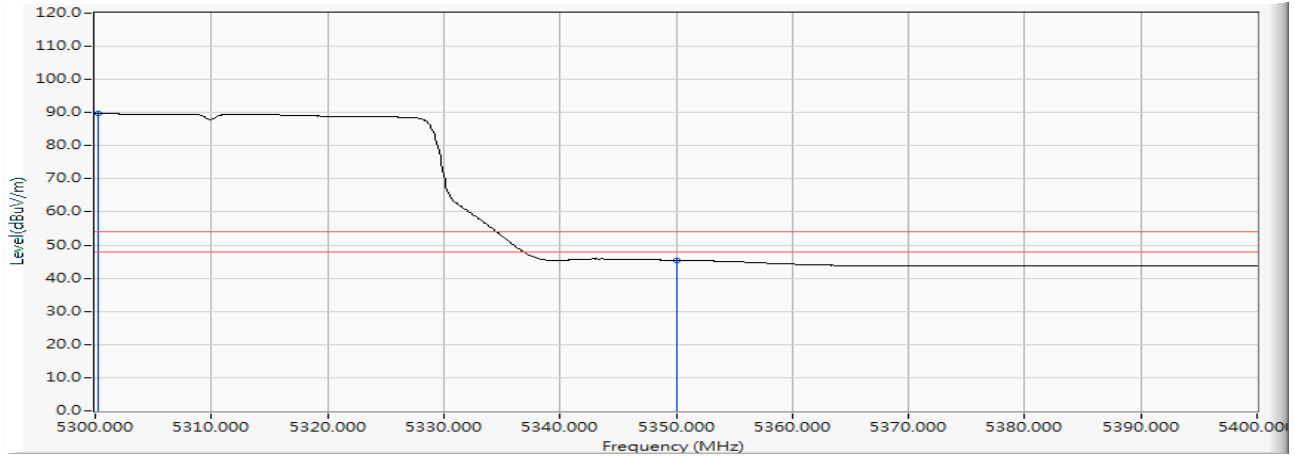


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5300.300	15.797	73.875	89.672	--	--	AVERAGE
2		5350.000	15.912	29.542	45.454	-8.546	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Vertical

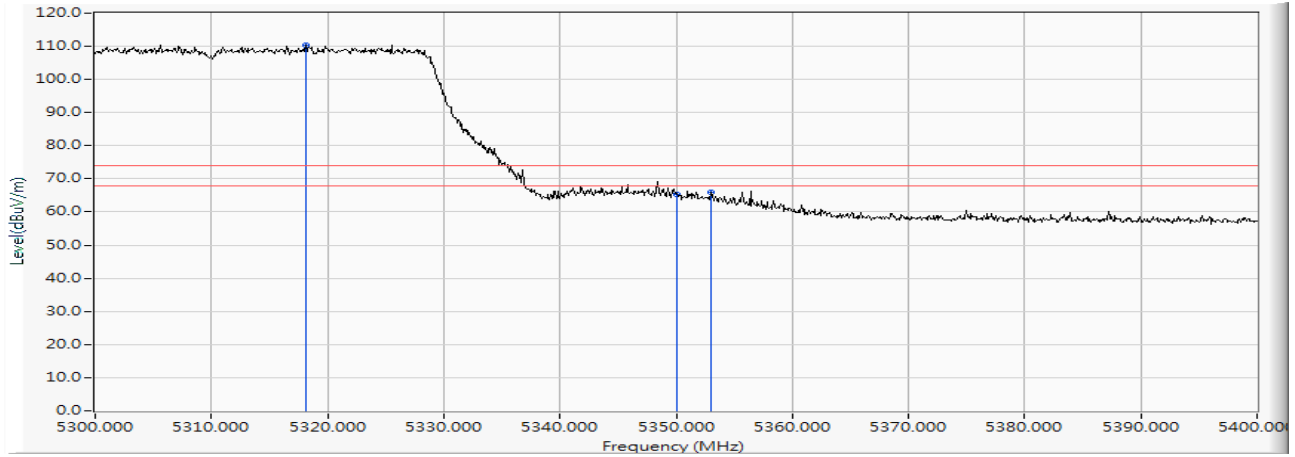


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5318.100	15.843	94.527	110.371	--	--	PEAK
2		5350.000	15.912	49.301	65.213	-8.787	74.000	PEAK
3		5353.000	15.922	49.991	65.913	-8.087	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Vertical

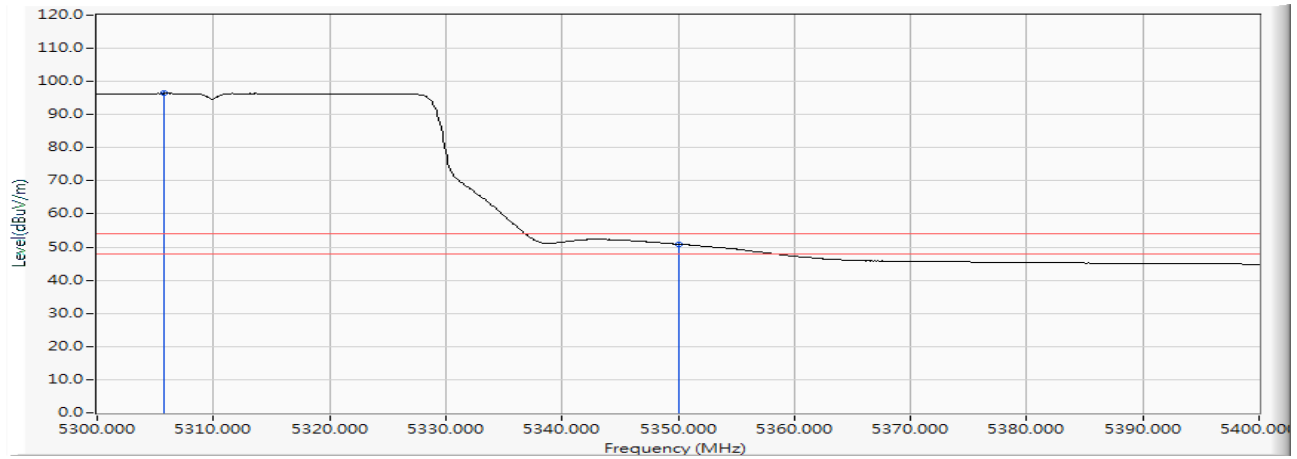


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5305.700	15.810	80.565	96.375	--	--	AVERAGE
2		5350.000	15.912	34.965	50.877	-3.123	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Horizontal

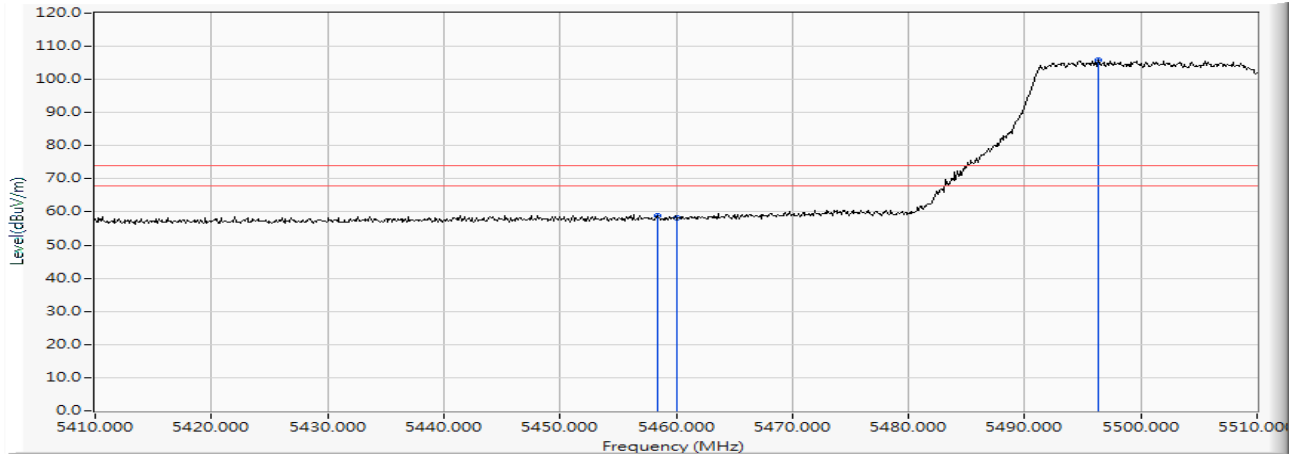


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.400	16.183	42.851	59.033	-14.967	74.000	PEAK
2		5460.000	16.185	42.098	58.283	-15.717	74.000	PEAK
3	*	5496.300	16.266	89.650	105.915	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Horizontal

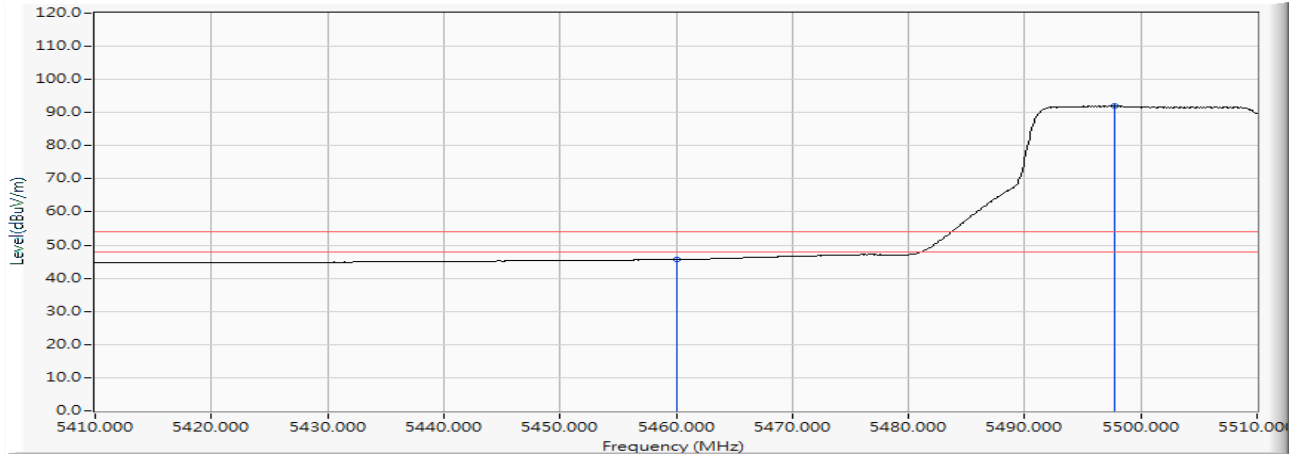


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	29.473	45.658	-8.342	54.000	AVERAGE
2	*	5497.700	16.267	75.676	91.943	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Vertical

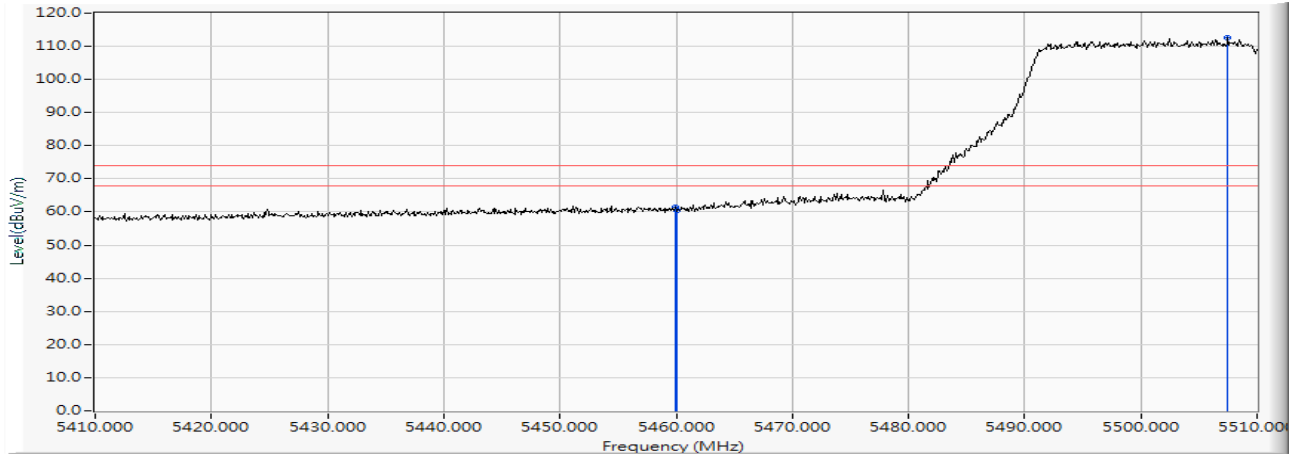


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5459.900	16.184	45.207	61.391	-12.609	74.000	PEAK
2		5460.000	16.185	44.331	60.516	-13.484	74.000	PEAK
3	*	5507.500	16.274	96.182	112.456	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Vertical

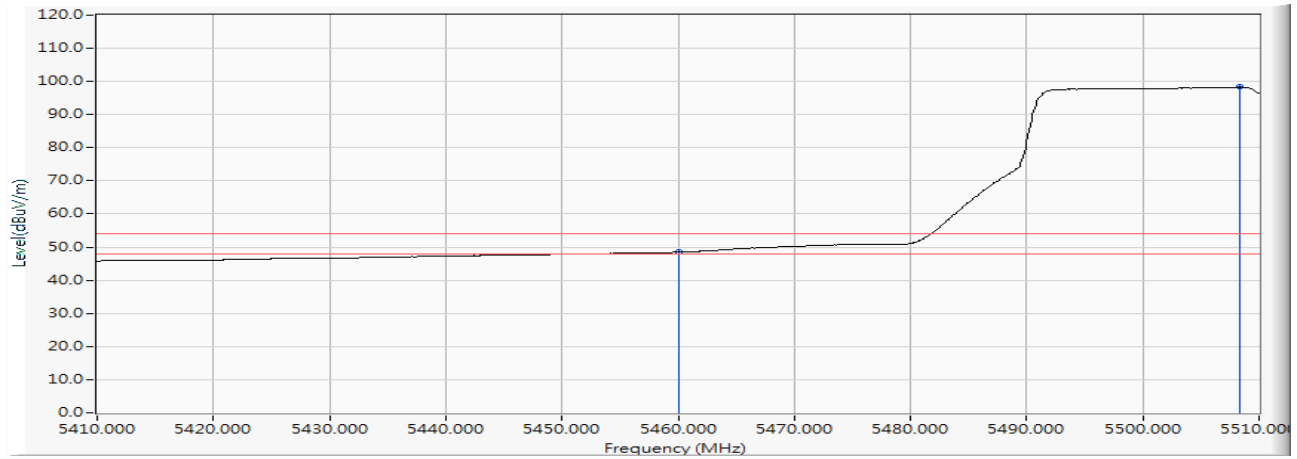


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	32.288	48.473	-5.527	54.000	AVERAGE
2	*	5508.400	16.275	82.023	98.297	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)


Horizontal

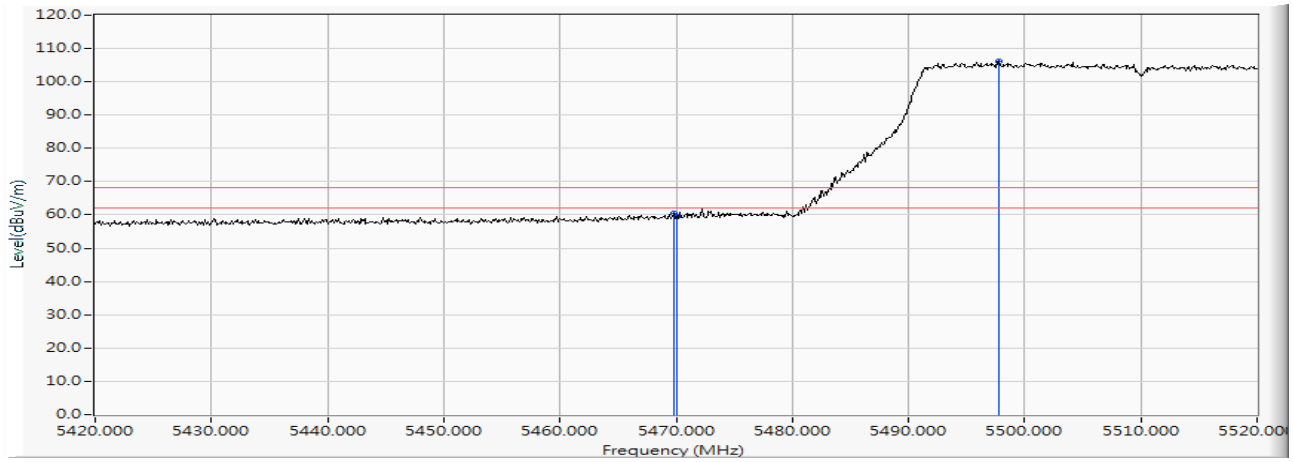

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5469.800	16.200	44.179	60.378	-7.842	68.220	PEAK
2		5470.000	16.200	43.436	59.636	-8.584	68.220	PEAK
3	*	5497.800	16.266	89.895	106.162	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)


Vertical

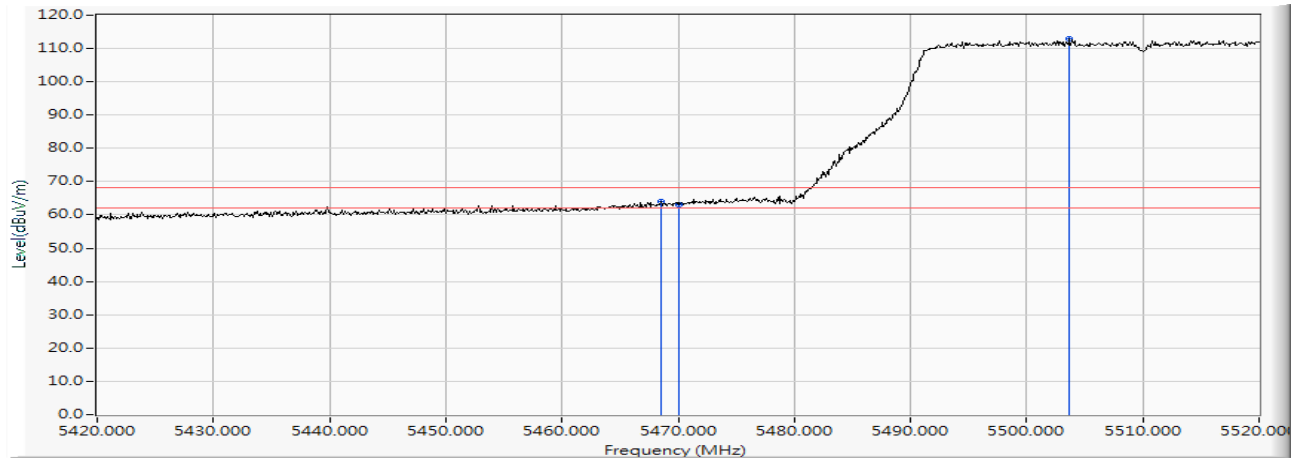

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.500	16.197	47.694	63.891	-4.329	68.220	PEAK
2		5470.000	16.200	46.920	63.120	-5.100	68.220	PEAK
3	*	5503.700	16.274	96.520	112.793	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 134 (5670MHz)


Horizontal

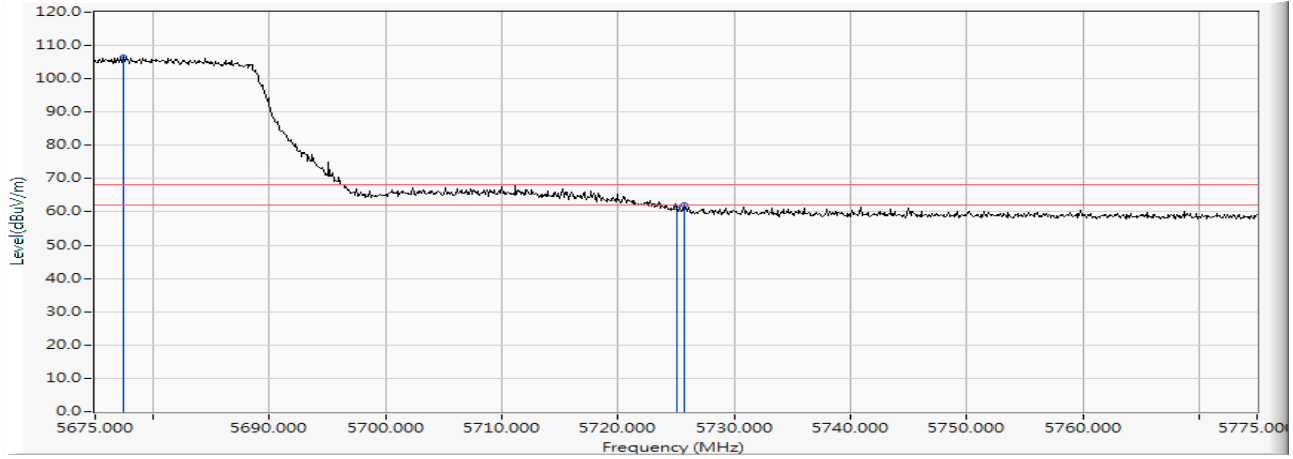

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5677.400	16.475	90.135	106.610	--	--	PEAK
2		5725.000	16.544	44.821	61.365	-6.855	68.220	PEAK
3		5725.700	16.546	45.663	62.208	-6.012	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 134 (5670MHz)


Vertical

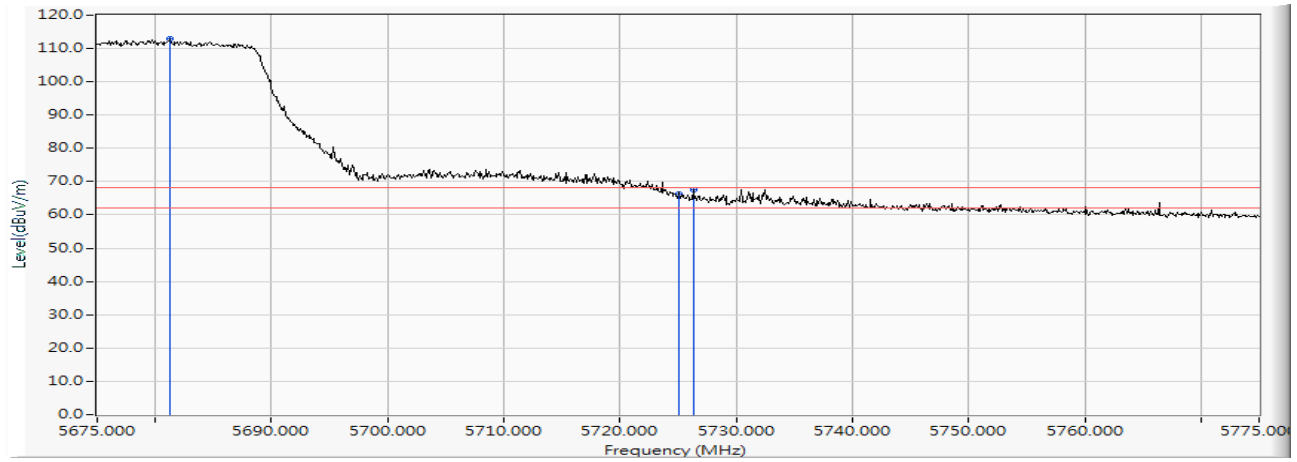

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5681.300	16.478	96.325	112.804	--	--	PEAK
2		5725.000	16.544	49.834	66.378	-1.842	68.220	PEAK
3		5726.300	16.547	51.156	67.703	-0.517	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 151 (5755MHz)


Horizontal

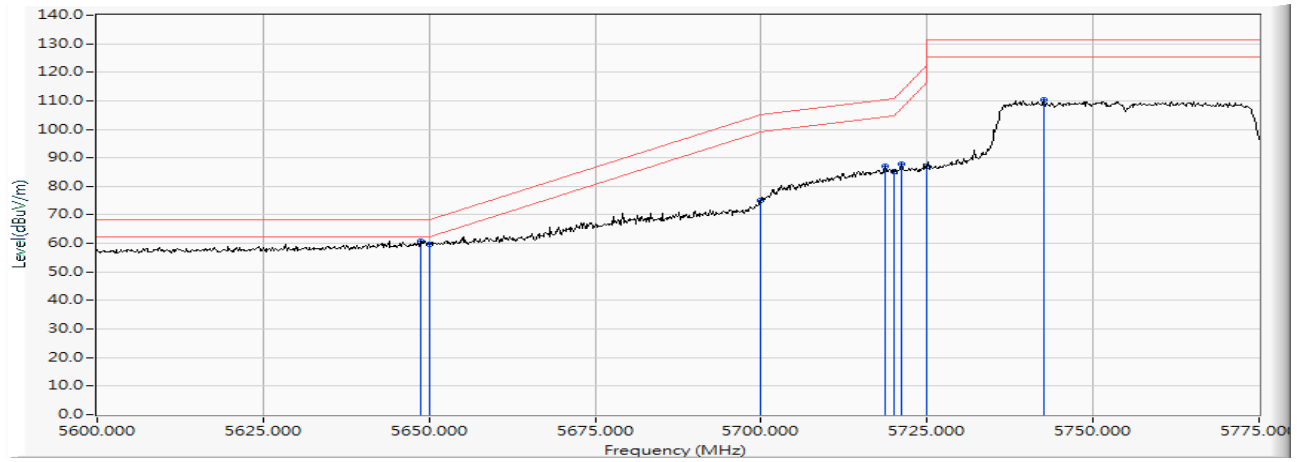

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5648.650	16.443	44.433	60.876	-7.344	68.220	PEAK
2		5650.000	16.447	43.355	59.802	-8.418	68.220	PEAK
3		5700.000	16.502	58.662	75.164	-30.036	105.200	PEAK
4		5718.650	16.533	70.374	86.906	-23.516	110.422	PEAK
5		5720.000	16.535	68.820	85.355	-25.445	110.800	PEAK
6		5721.100	16.536	71.262	87.799	-25.509	113.308	PEAK
7		5725.000	16.544	70.405	86.949	-35.251	122.200	PEAK
8		5742.625	16.558	93.709	110.267	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 151 (5755MHz)


Vertical

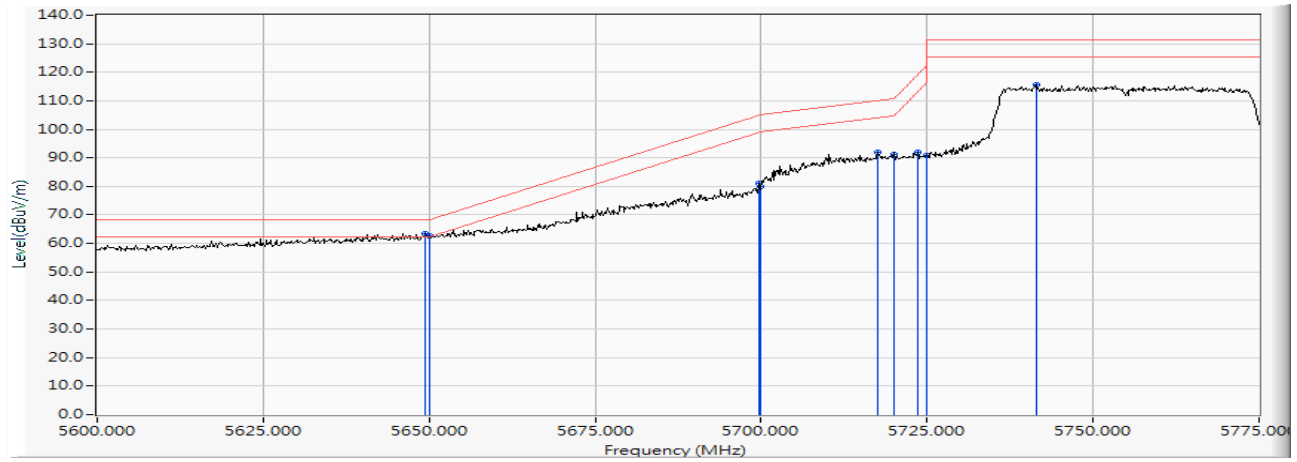

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5649.350	16.444	47.125	63.570	-4.650	68.220	PEAK
2		5650.000	16.447	46.095	62.542	-5.678	68.220	PEAK
3		5699.750	16.502	64.527	81.028	-23.987	105.015	PEAK
4		5700.000	16.502	63.626	80.128	-25.072	105.200	PEAK
5		5717.600	16.530	75.399	91.929	-18.199	110.128	PEAK
6		5720.000	16.535	74.812	91.347	-19.453	110.800	PEAK
7		5723.550	16.541	75.330	91.872	-27.022	118.894	PEAK
8		5725.000	16.544	74.388	90.932	-31.268	122.200	PEAK
9		5741.400	16.556	99.012	115.569	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 159 (5795MHz)


Horizontal

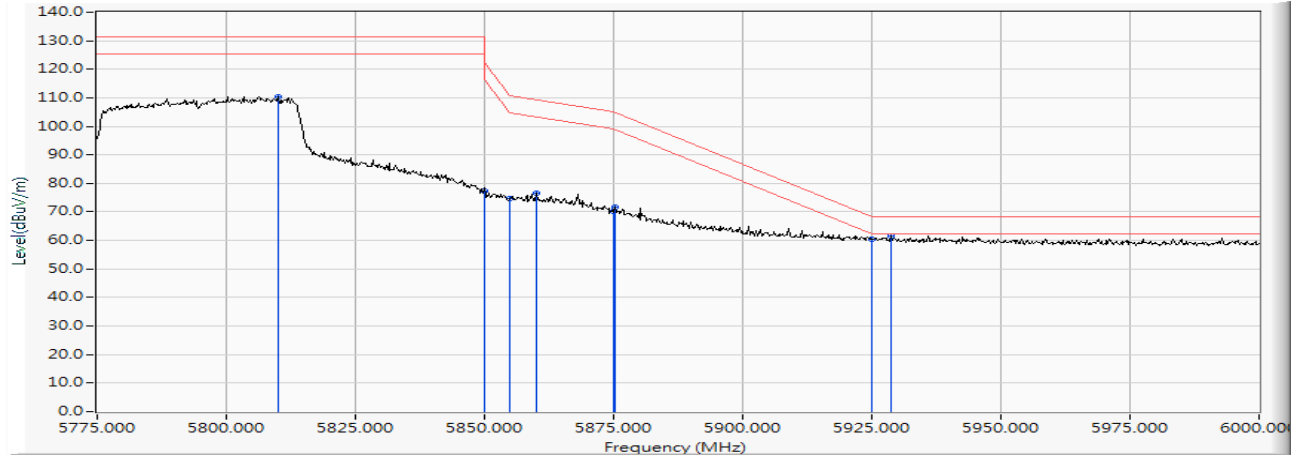

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5810.100	16.684	93.795	110.479	--	--	PEAK
2		5850.000	16.748	60.732	77.480	-44.720	122.200	PEAK
3		5855.000	16.758	58.081	74.839	-35.961	110.800	PEAK
4		5860.050	16.770	59.858	76.628	-32.758	109.386	PEAK
5		5875.000	16.807	53.333	70.141	-35.059	105.200	PEAK
6		5875.350	16.809	54.764	71.573	-33.368	104.941	PEAK
7		5925.000	16.920	43.551	60.471	-7.729	68.200	PEAK
8	*	5928.675	16.924	44.668	61.592	-6.608	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 159 (5795MHz)


Vertical

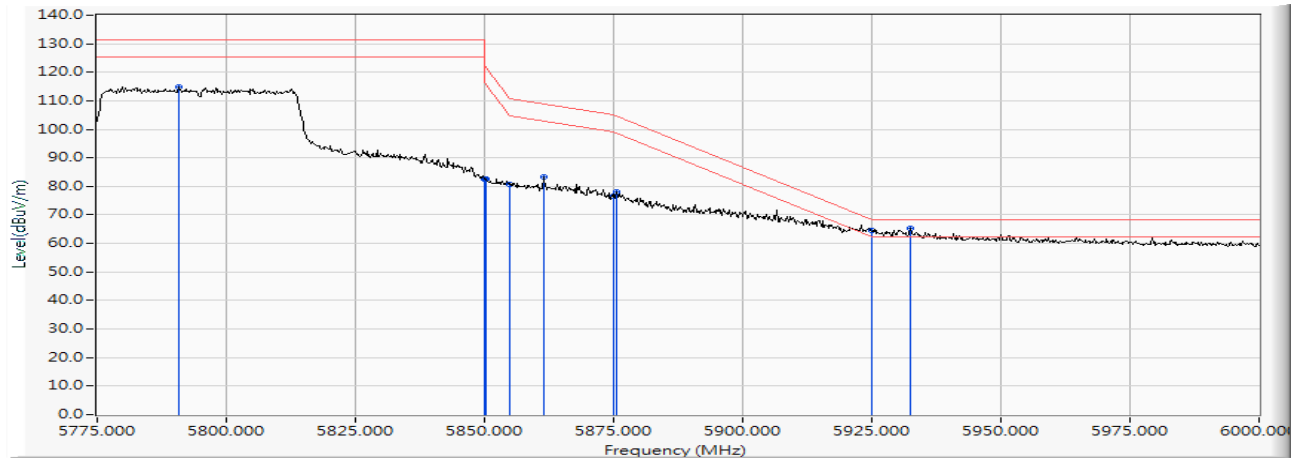

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5790.750	16.636	98.083	114.718	--	--	PEAK
2		5850.000	16.748	65.860	82.608	-39.592	122.200	PEAK
3		5850.150	16.748	65.941	82.690	-39.168	121.858	PEAK
4		5855.000	16.758	63.956	80.714	-30.086	110.800	PEAK
5		5861.400	16.773	66.578	83.352	-25.656	109.008	PEAK
6		5875.000	16.807	59.918	76.726	-28.474	105.200	PEAK
7		5875.575	16.809	61.194	78.003	-26.772	104.775	PEAK
8		5925.000	16.920	47.594	64.514	-3.686	68.200	PEAK
9	*	5932.500	16.928	48.379	65.307	-2.893	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Horizontal

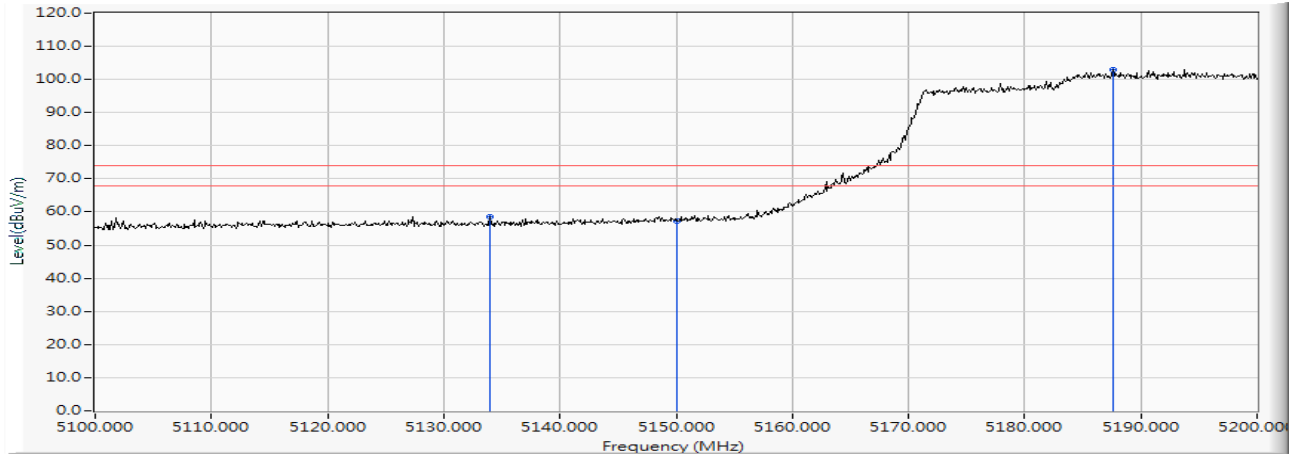


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5134.000	15.217	43.379	58.596	-15.404	74.000	PEAK
2		5150.000	15.307	42.051	57.358	-16.642	74.000	PEAK
3	*	5187.600	15.426	87.628	103.054	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Horizontal

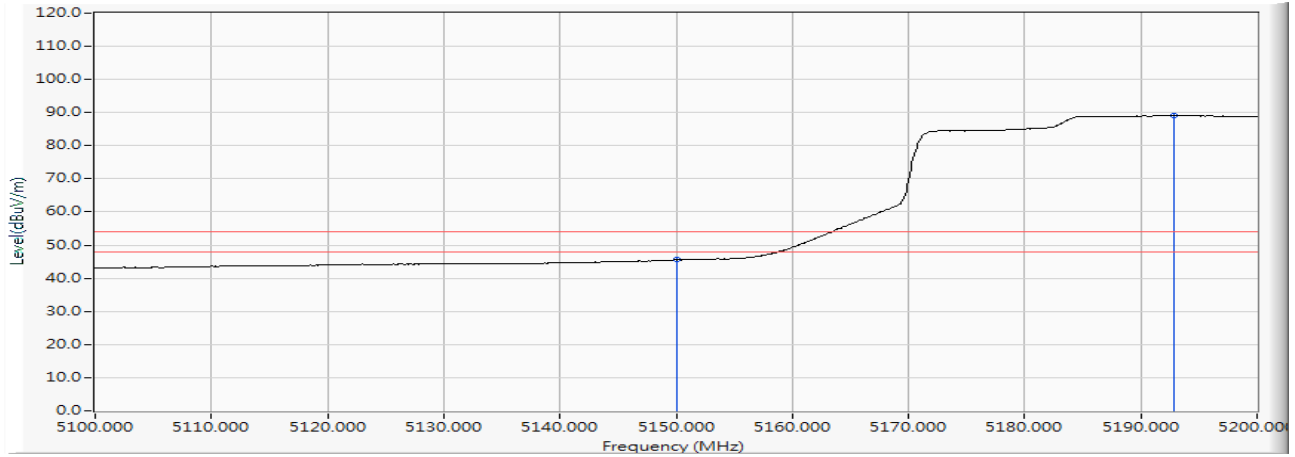


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	30.244	45.551	-8.449	54.000	AVERAGE
2	*	5192.800	15.445	73.685	89.130	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Vertical

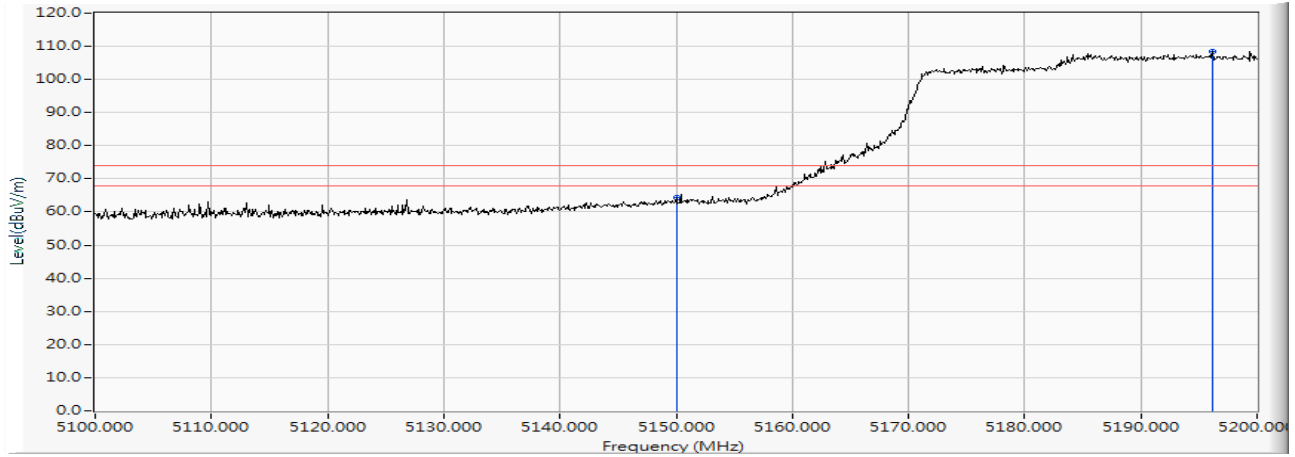


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	49.138	64.445	-9.555	74.000	PEAK
2	*	5196.200	15.458	92.870	108.328	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Vertical

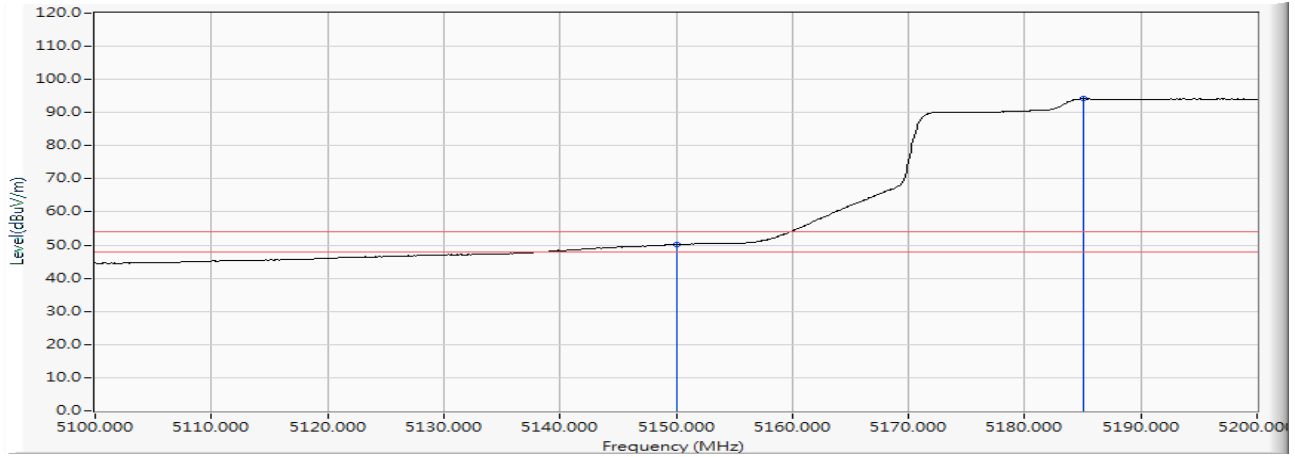


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	34.922	50.229	-3.771	54.000	AVERAGE
2	*	5185.000	15.415	78.738	94.152	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Horizontal

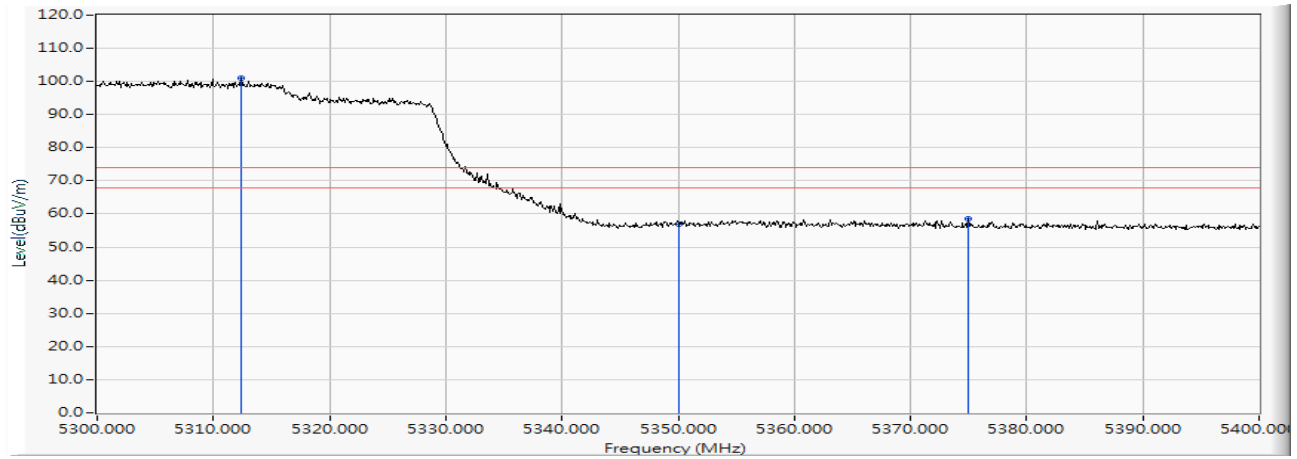


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5312.400	15.826	85.099	100.925	--	--	PEAK
2		5350.000	15.912	40.999	56.911	-17.089	74.000	PEAK
3		5375.000	15.986	42.424	58.410	-15.590	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Horizontal

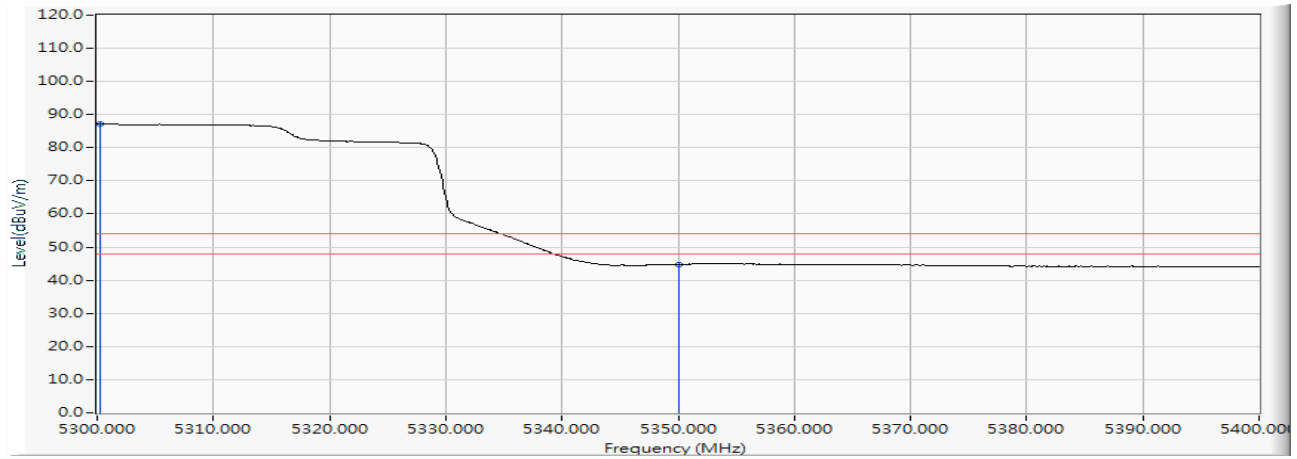


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5300.200	15.796	71.403	87.200	--	--	AVERAGE
2		5350.000	15.912	28.893	44.805	-9.195	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Vertical

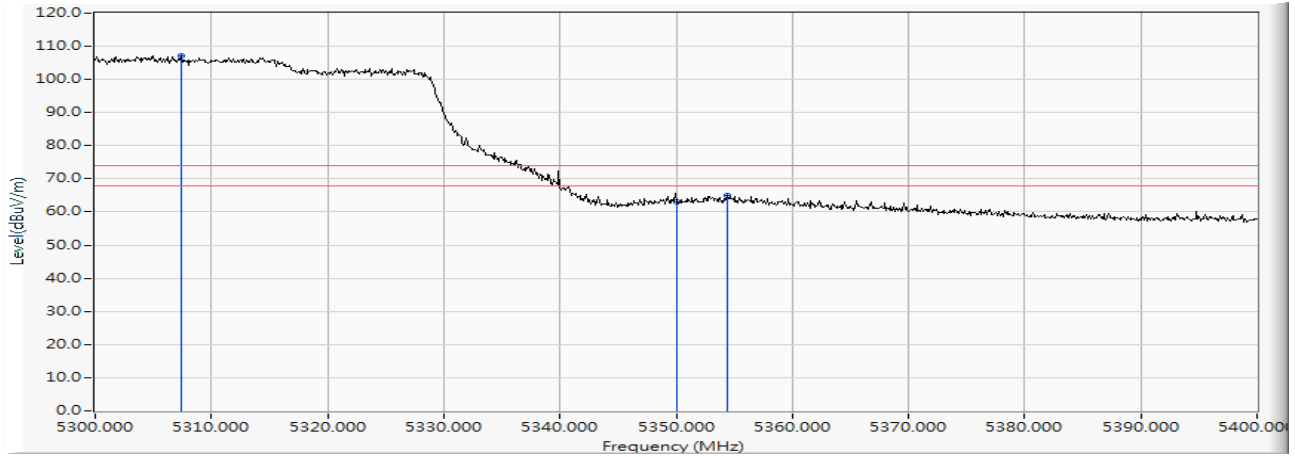


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5307.400	15.815	91.284	107.098	--	--	PEAK
2		5350.000	15.912	47.278	63.190	-10.810	74.000	PEAK
3		5354.400	15.926	49.145	65.071	-8.929	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Vertical

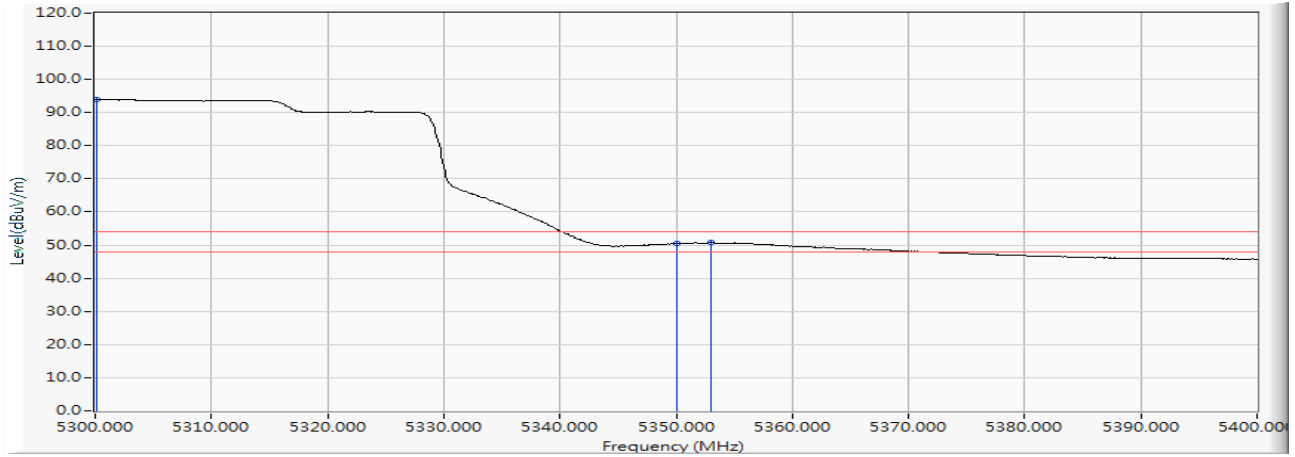


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5300.100	15.796	78.098	93.894	--	--	AVERAGE
2		5350.000	15.912	34.539	50.451	-3.549	54.000	AVERAGE
3		5353.000	15.922	34.870	50.792	-3.208	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Horizontal

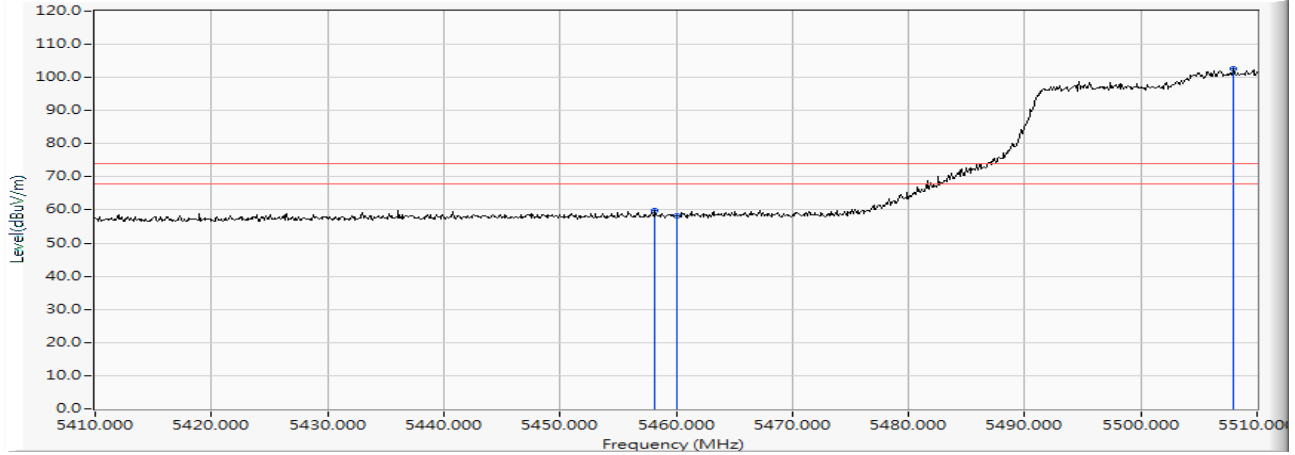


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.200	16.182	43.739	59.921	-14.079	74.000	PEAK
2		5460.000	16.185	41.934	58.119	-15.881	74.000	PEAK
3	*	5508.000	16.275	86.301	102.575	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Horizontal

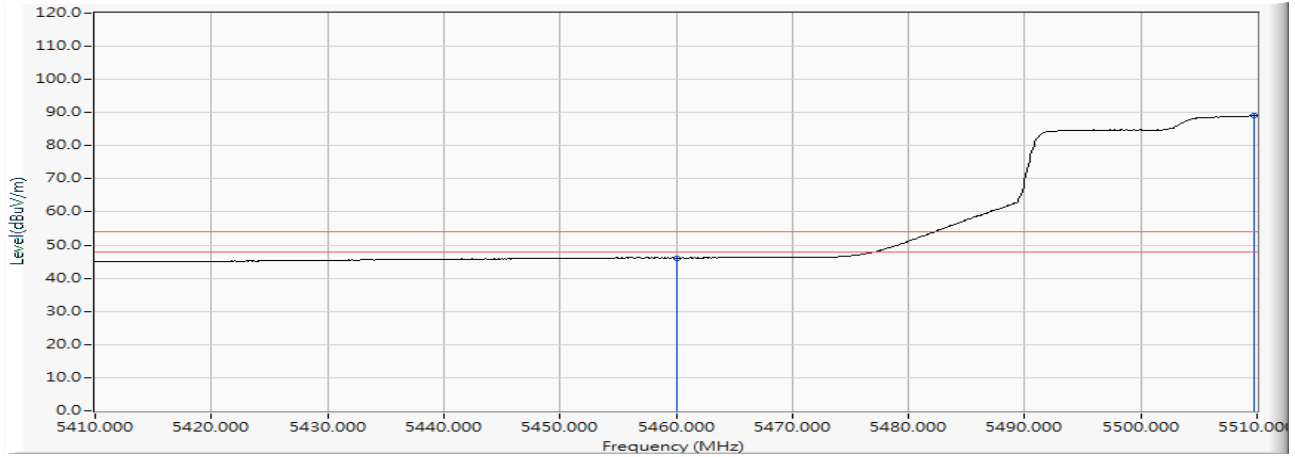


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	29.969	46.154	-7.846	54.000	AVERAGE
2	*	5509.700	16.275	72.815	89.090	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Vertical

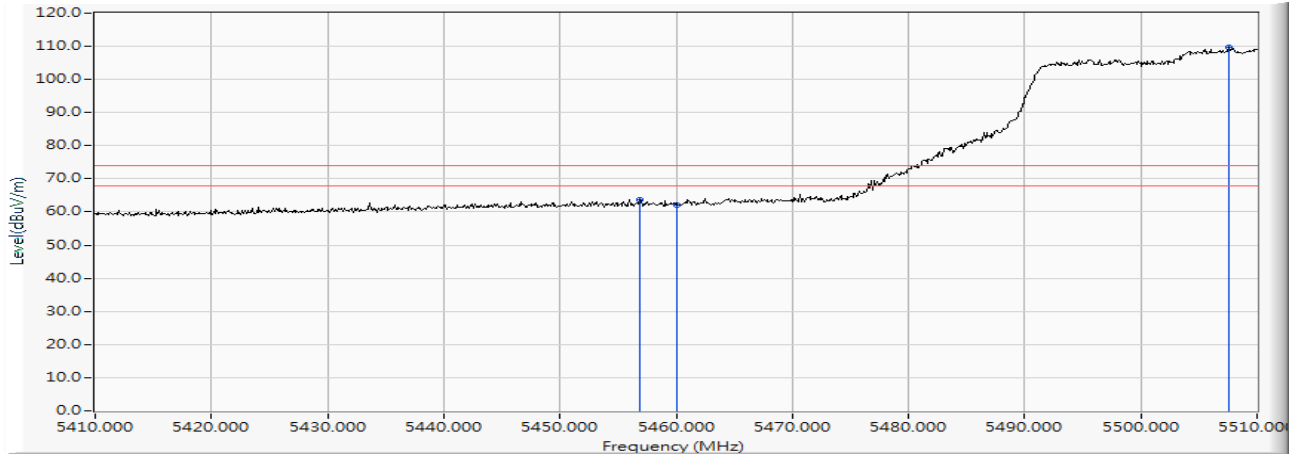


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5456.900	16.180	47.651	63.831	-10.169	74.000	PEAK
2		5460.000	16.185	45.941	62.126	-11.874	74.000	PEAK
3	*	5507.600	16.274	93.292	109.566	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Vertical

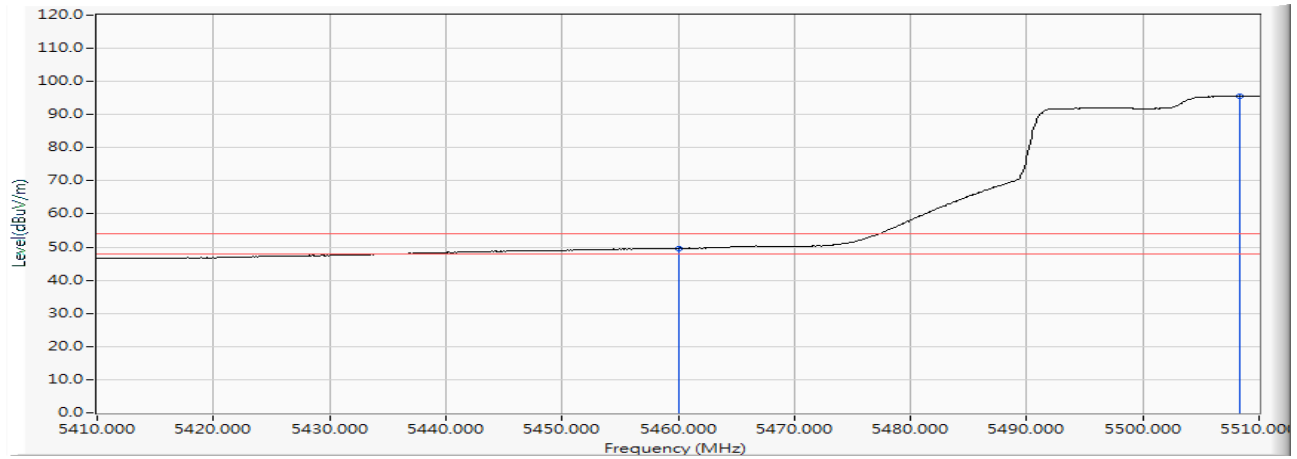


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	33.385	49.570	-4.430	54.000	AVERAGE
2	*	5508.400	16.275	79.329	95.603	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)


Horizontal

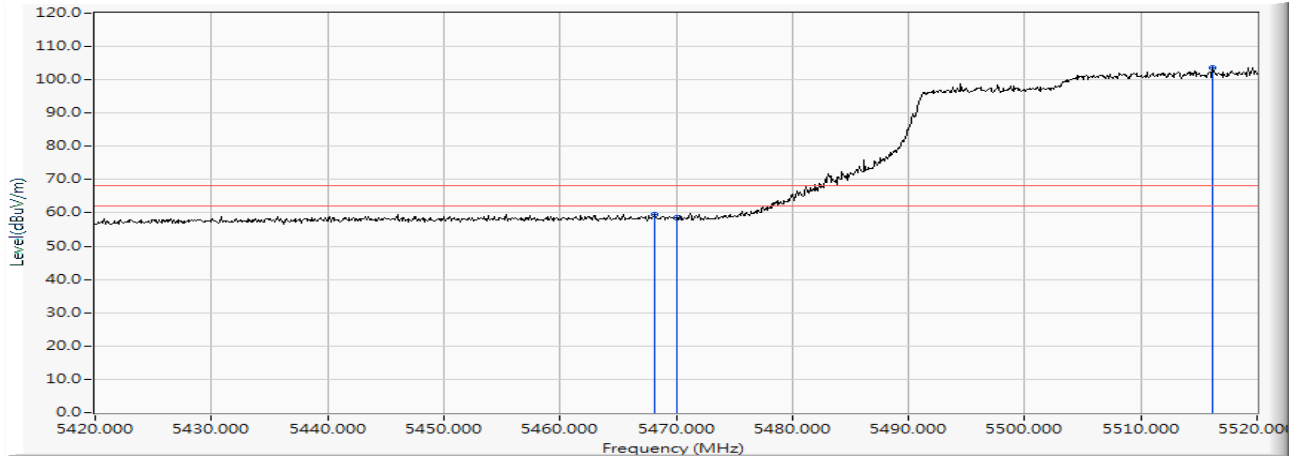

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.200	16.196	43.351	59.548	-8.672	68.220	PEAK
2		5470.000	16.200	42.353	58.553	-9.667	68.220	PEAK
3	*	5516.200	16.286	87.221	103.506	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)


Vertical

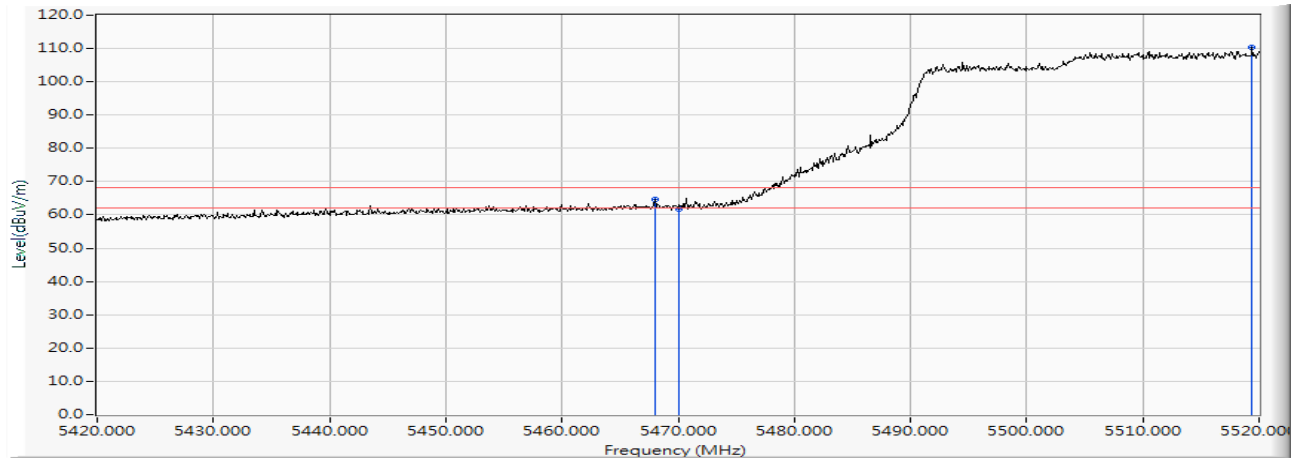

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.000	16.196	48.388	64.584	-3.636	68.220	PEAK
2		5470.000	16.200	45.491	61.691	-6.529	68.220	PEAK
3	*	5519.400	16.291	93.919	110.210	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 155 (5775MHz)


Horizontal

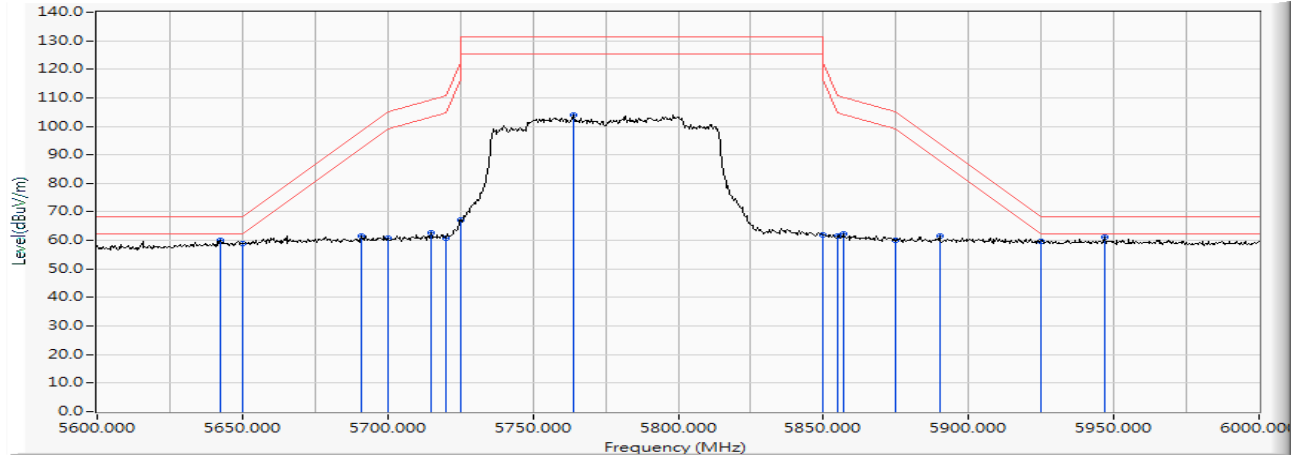

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5642.400	16.426	43.542	59.968	-8.252	68.220	PEAK
2		5650.000	16.447	42.468	58.915	-9.305	68.220	PEAK
3		5690.800	16.491	45.203	61.693	-36.703	98.396	PEAK
4		5700.000	16.502	44.143	60.645	-44.555	105.200	PEAK
5		5714.800	16.525	46.029	62.554	-46.790	109.344	PEAK
6		5720.000	16.535	44.353	60.888	-49.912	110.800	PEAK
7		5725.000	16.544	50.586	67.130	-55.070	122.200	PEAK
8		5764.000	16.589	87.220	103.810	--	--	PEAK
9		5850.000	16.748	45.149	61.897	-60.303	122.200	PEAK
10		5855.000	16.758	44.784	61.542	-49.258	110.800	PEAK
11		5856.800	16.763	45.628	62.391	-47.905	110.296	PEAK
12		5875.000	16.807	43.339	60.147	-45.053	105.200	PEAK
13		5890.000	16.847	44.548	61.395	-32.705	94.100	PEAK
14		5925.000	16.920	42.877	59.797	-8.403	68.200	PEAK
15	*	5946.800	16.948	44.298	61.246	-6.954	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 155 (5775MHz)


Vertical

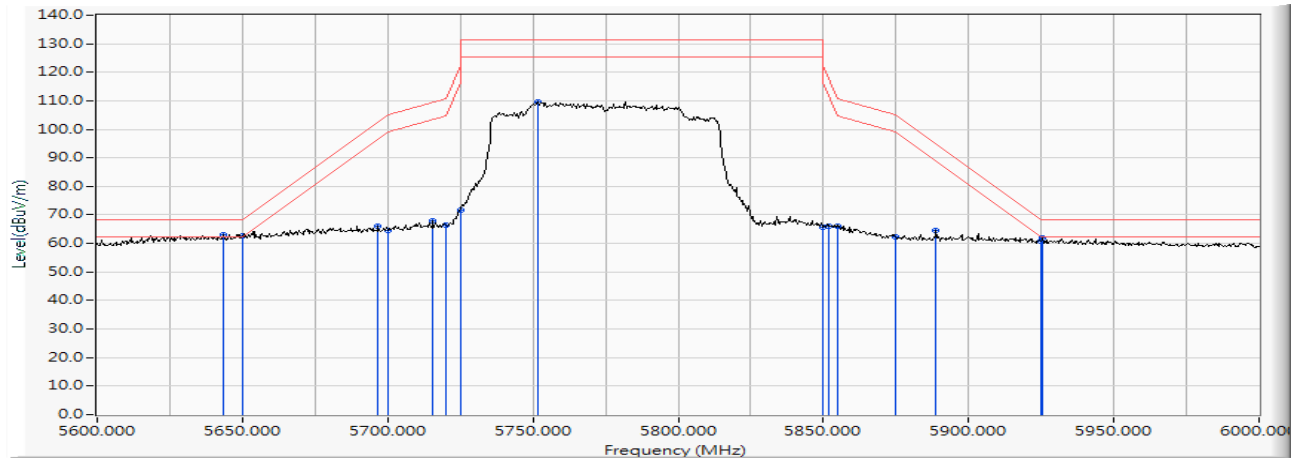

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5643.600	16.430	46.604	63.033	-5.187	68.220	PEAK
2		5650.000	16.447	46.120	62.567	-5.653	68.220	PEAK
3		5696.800	16.497	49.629	66.127	-36.706	102.833	PEAK
4		5700.000	16.502	48.058	64.560	-40.640	105.200	PEAK
5		5715.600	16.527	51.341	67.867	-41.701	109.568	PEAK
6		5720.000	16.535	49.722	66.257	-44.543	110.800	PEAK
7		5725.000	16.544	55.177	71.721	-50.479	122.200	PEAK
8		5751.600	16.570	93.066	109.636	--	--	PEAK
9		5850.000	16.748	48.924	65.672	-56.528	122.200	PEAK
10		5851.600	16.750	49.466	66.217	-52.335	118.552	PEAK
11		5855.000	16.758	49.309	66.067	-44.733	110.800	PEAK
12		5875.000	16.807	45.436	62.244	-42.956	105.200	PEAK
13		5888.800	16.846	47.681	64.527	-30.461	94.988	PEAK
14		5925.000	16.920	44.059	60.979	-7.221	68.200	PEAK
15		5925.600	16.920	44.886	61.806	-6.394	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Horizontal

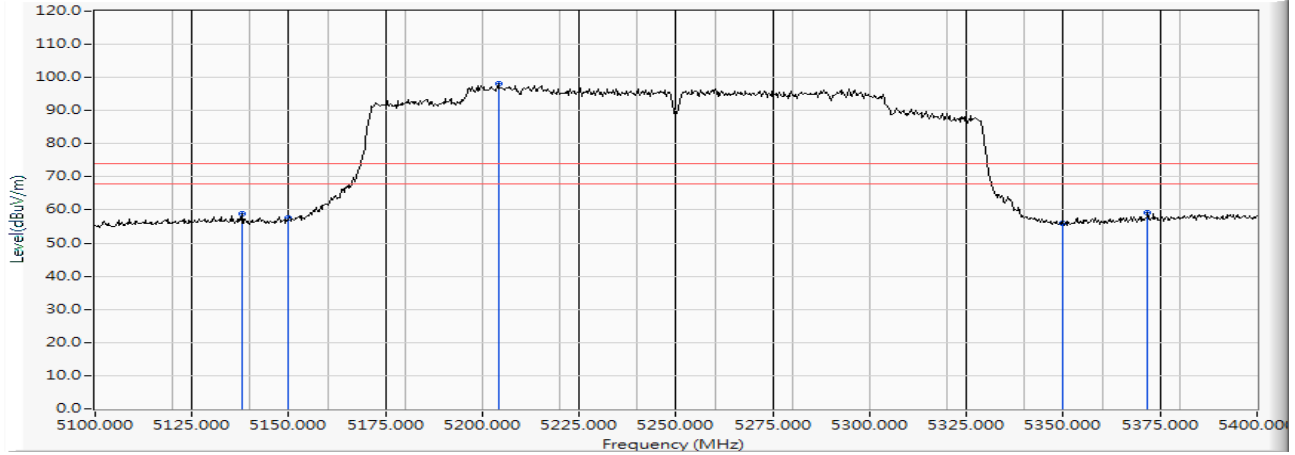


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5138.100	15.240	43.489	58.729	-15.271	74.000	PEAK
2		5150.000	15.307	42.135	57.442	-16.558	74.000	PEAK
3	*	5204.100	15.489	82.789	98.278	--	--	PEAK
4		5350.000	15.912	40.199	56.111	-17.889	74.000	PEAK
5		5371.800	15.978	43.347	59.325	-14.675	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Horizontal

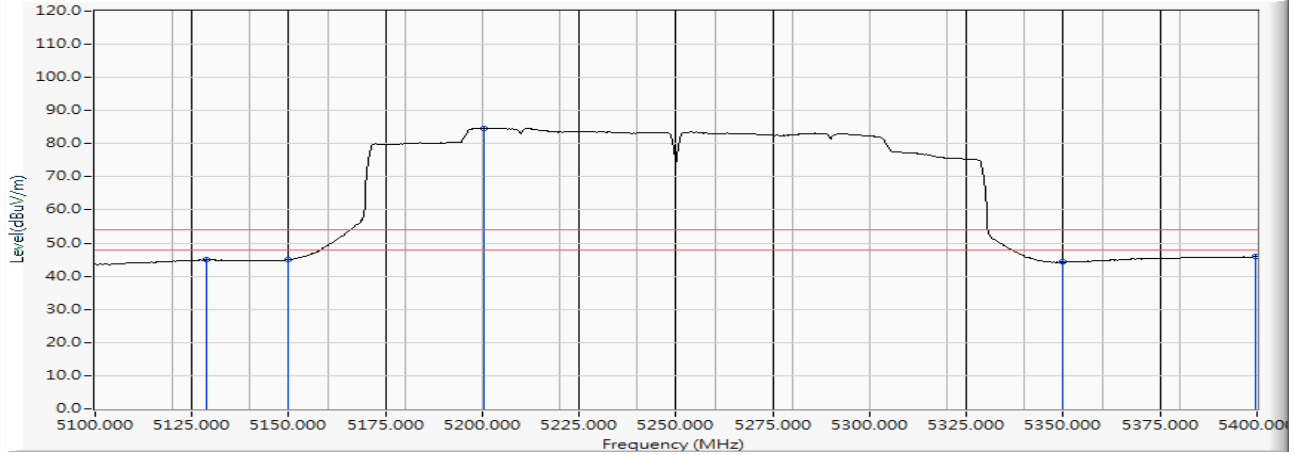


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5128.800	15.198	29.794	44.992	-9.008	54.000	AVERAGE
2		5150.000	15.307	29.704	45.011	-8.989	54.000	AVERAGE
3	*	5200.200	15.473	69.164	84.638	--	--	AVERAGE
4		5350.000	15.912	28.344	44.256	-9.744	54.000	AVERAGE
5		5399.700	16.028	30.009	46.037	-7.963	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Vertical

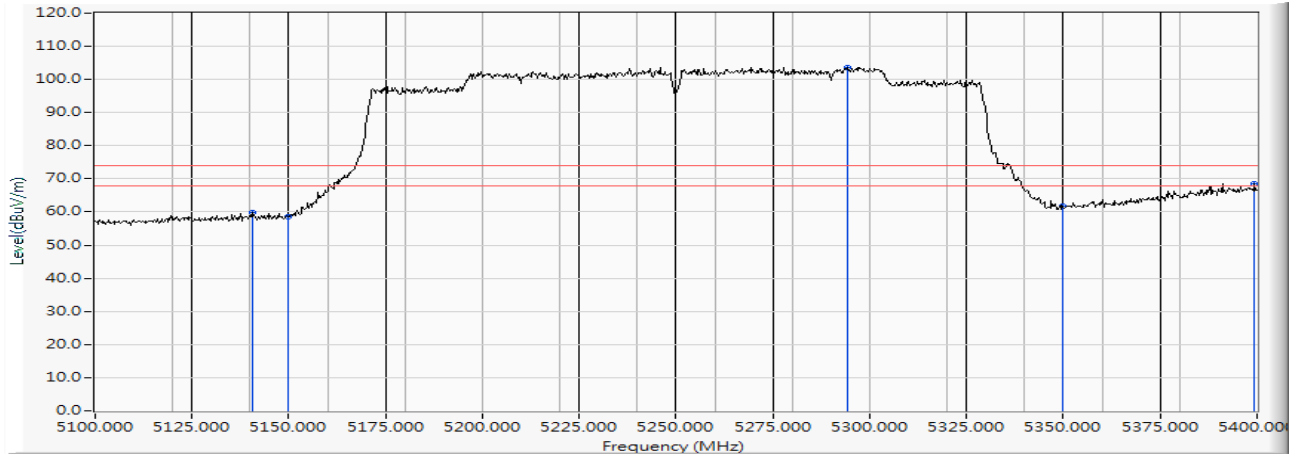


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5140.500	15.253	44.578	59.831	-14.169	74.000	PEAK
2		5150.000	15.307	43.193	58.500	-15.500	74.000	PEAK
3	*	5294.400	15.782	87.884	103.666	--	--	PEAK
4		5350.000	15.912	45.768	61.680	-12.320	74.000	PEAK
5		5399.400	16.028	52.518	68.546	-5.454	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Vertical

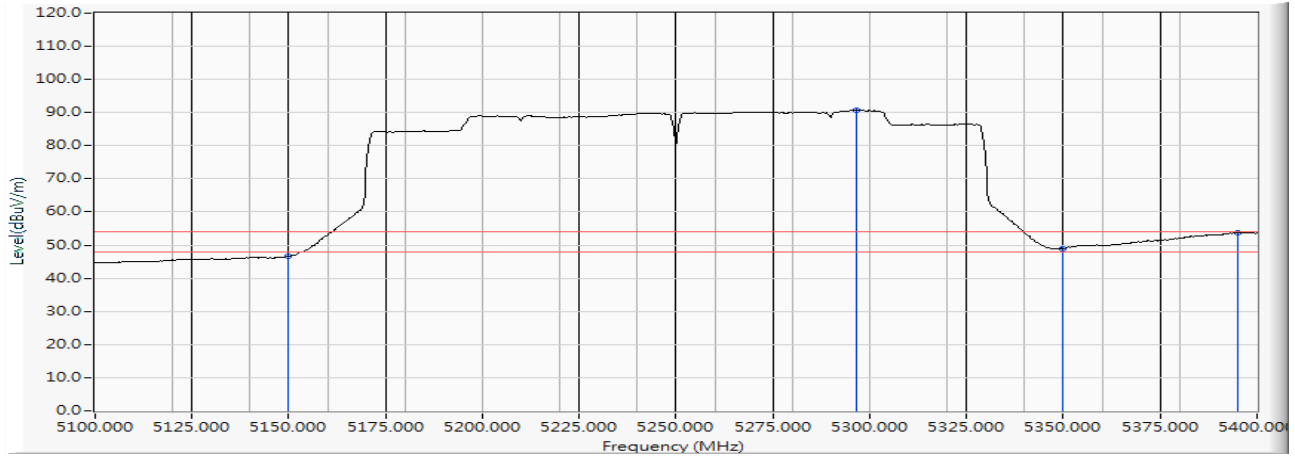


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	31.279	46.586	-7.414	54.000	AVERAGE
2	*	5296.500	15.787	74.904	90.691	--	--	AVERAGE
3		5350.000	15.912	33.065	48.977	-5.023	54.000	AVERAGE
4		5395.200	16.024	37.808	53.831	-0.169	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Horizontal

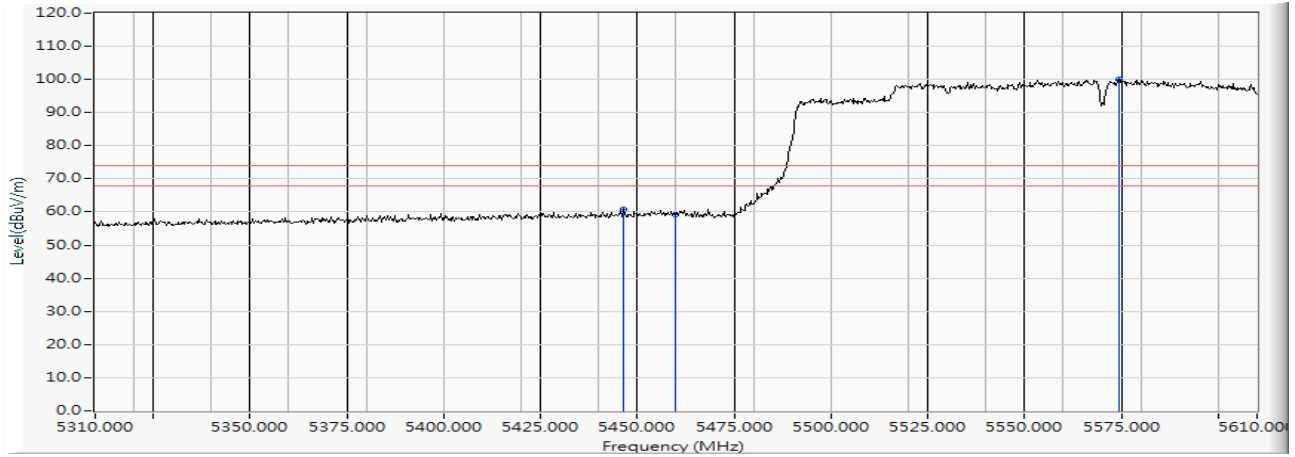


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5446.500	16.146	44.689	60.835	-13.165	74.000	PEAK
2		5460.000	16.185	42.906	59.091	-14.909	74.000	PEAK
3	*	5574.300	16.350	83.567	99.916	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Horizontal

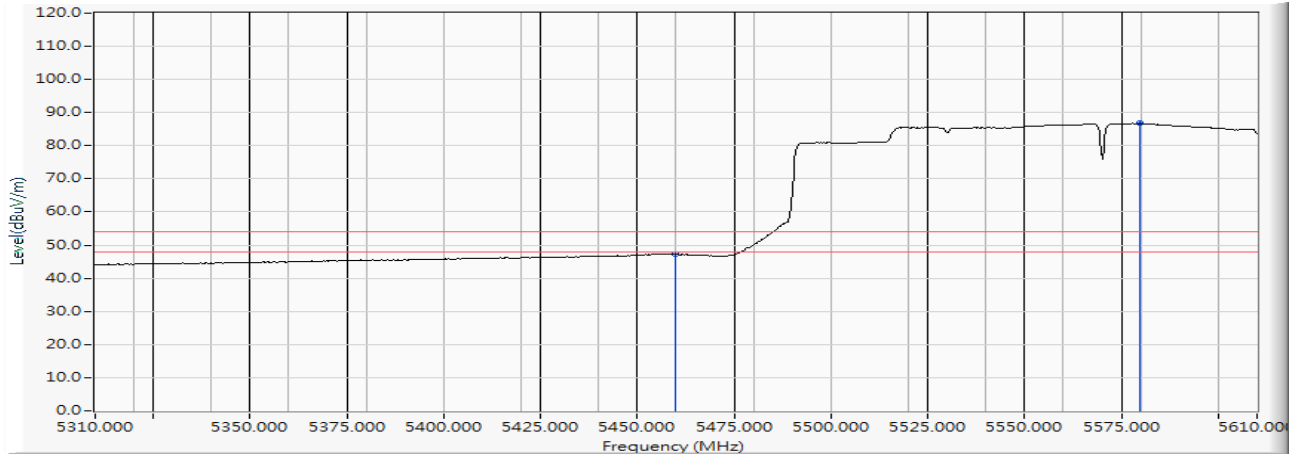


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	30.953	47.138	-6.862	54.000	AVERAGE
2	*	5579.700	16.362	70.386	86.748	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Vertical

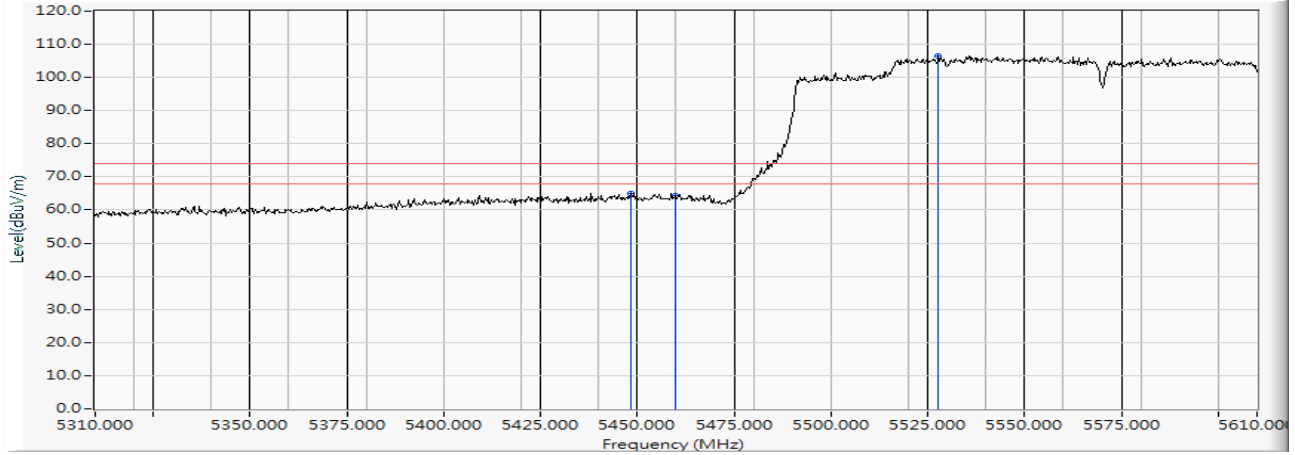


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5448.300	16.152	48.960	65.112	-8.888	74.000	PEAK
2		5460.000	16.185	48.035	64.220	-9.780	74.000	PEAK
3	*	5527.800	16.306	90.229	106.535	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Vertical

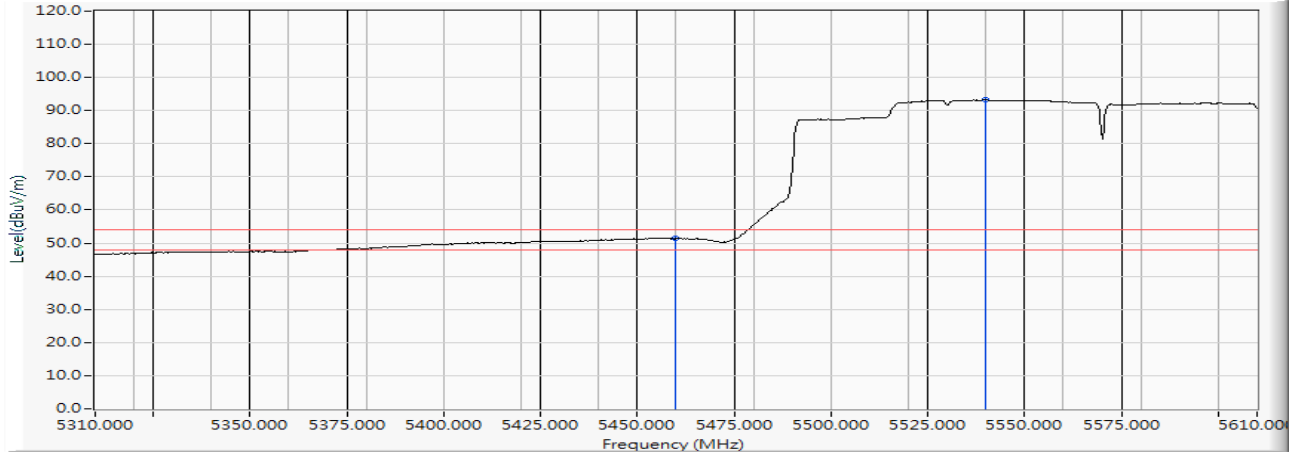


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	35.262	51.447	-2.553	54.000	AVERAGE
2	*	5539.800	16.318	76.930	93.248	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)


Horizontal

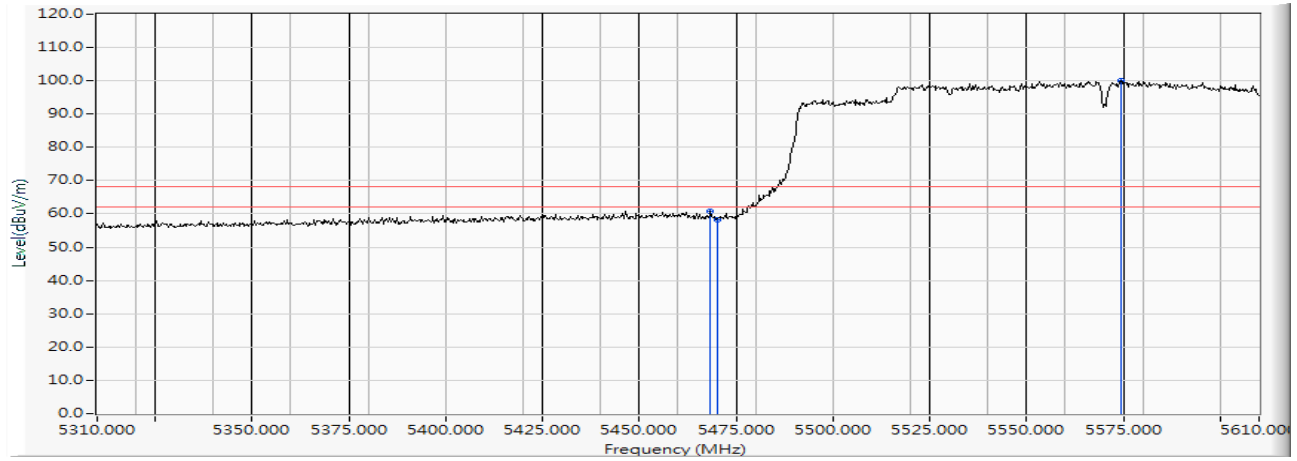

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.400	16.197	44.642	60.839	-7.381	68.220	PEAK
2		5470.000	16.200	42.181	58.381	-9.839	68.220	PEAK
3	*	5574.300	16.350	83.567	99.916	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)


Vertical

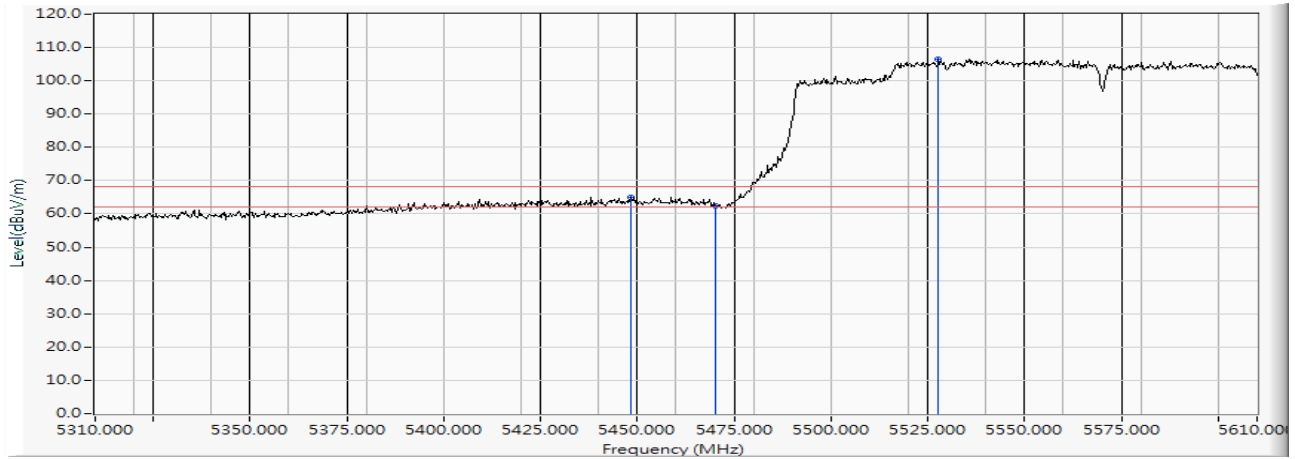

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5448.300	16.152	48.960	65.112	-3.108	68.220	PEAK
2		5470.000	16.200	46.077	62.277	-5.943	68.220	PEAK
3	*	5527.800	16.306	90.229	106.535	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Horizontal

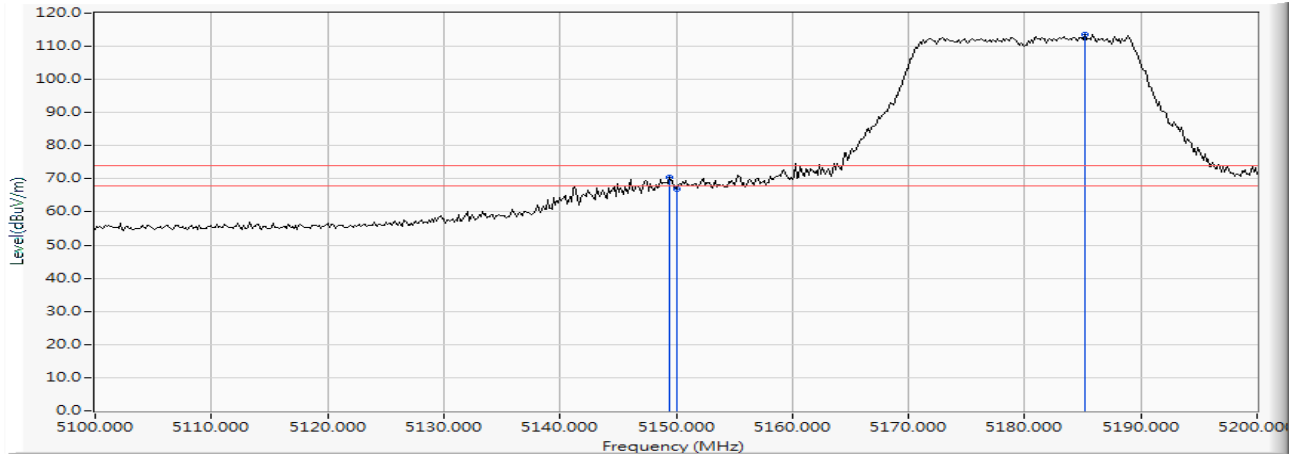


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.420	15.304	55.058	70.362	-3.638	74.000	PEAK
2		5150.000	15.307	51.767	67.074	-6.926	74.000	PEAK
3	*	5185.217	15.415	98.163	113.578	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Horizontal

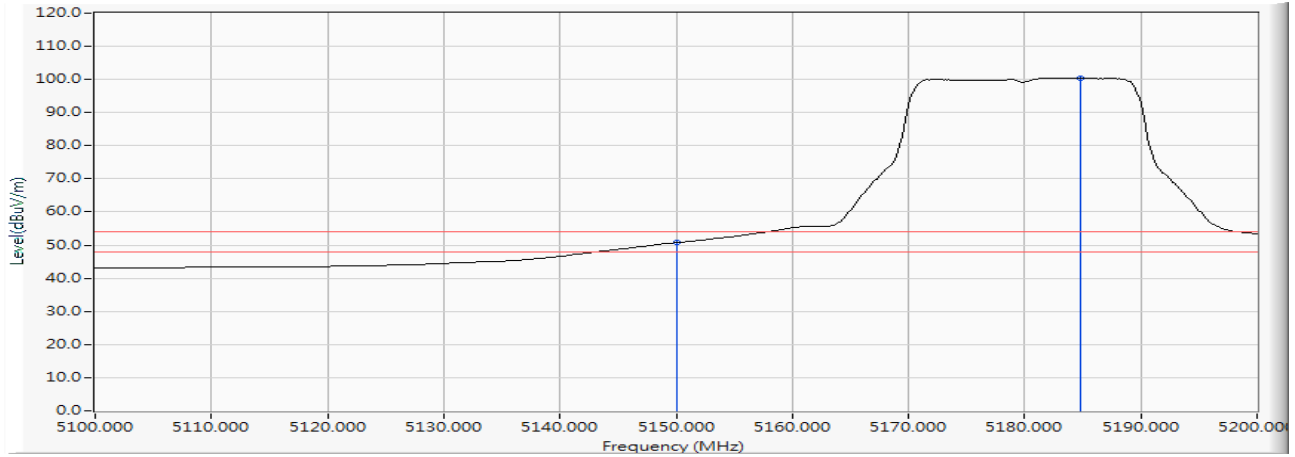


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	35.414	50.721	-3.279	54.000	AVERAGE
2	*	5184.783	15.413	84.997	100.410	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Vertical

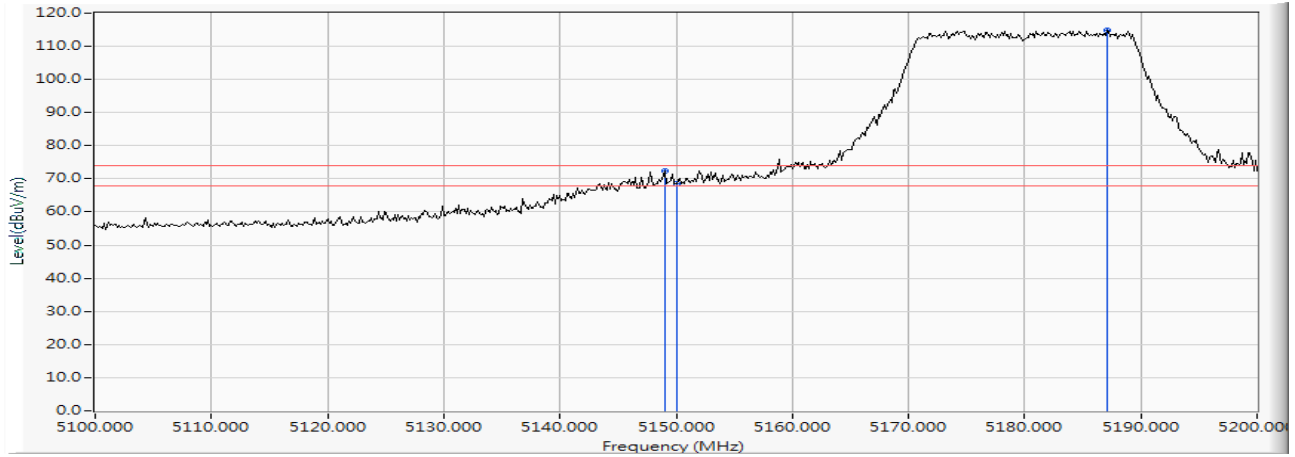


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.986	15.302	57.244	72.545	-1.455	74.000	PEAK
2		5150.000	15.307	53.080	68.387	-5.613	74.000	PEAK
3	*	5187.101	15.424	99.410	114.834	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Vertical

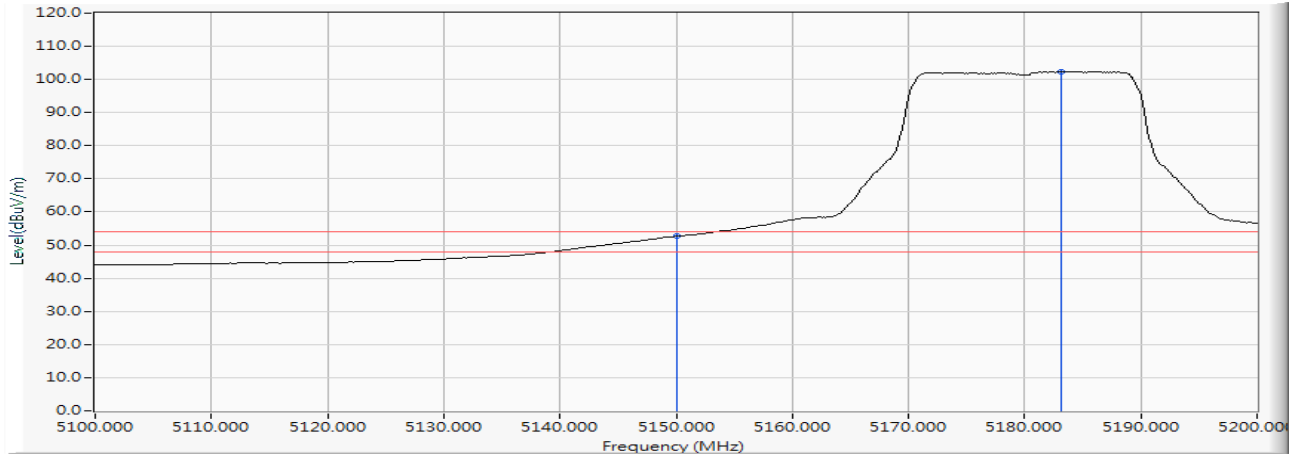


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	37.370	52.677	-1.323	54.000	PEAK
2	*	5183.188	15.406	86.928	102.334	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Horizontal

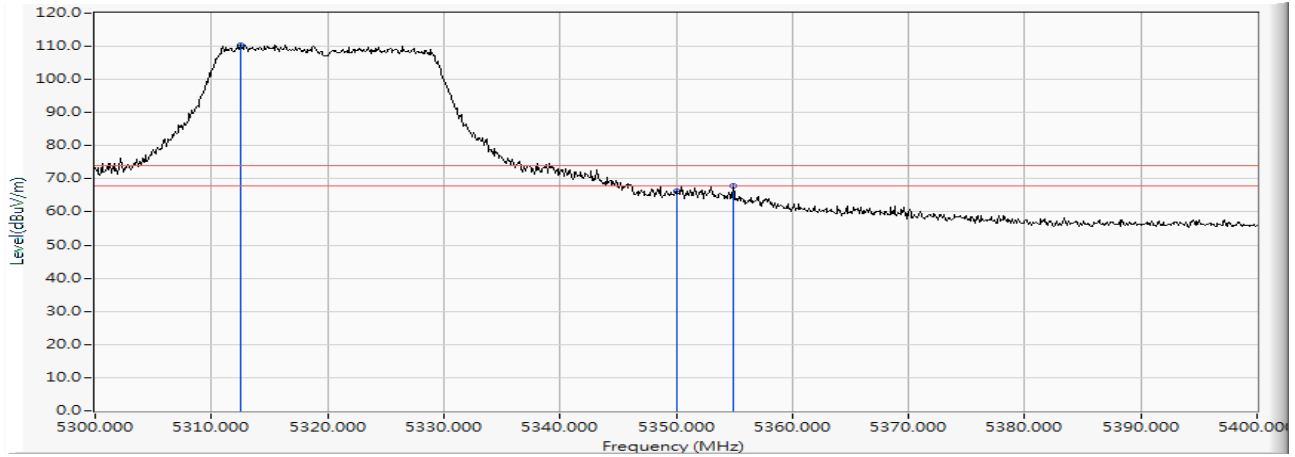


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5312.500	15.826	94.530	110.356	--	--	PEAK
2		5350.000	15.912	50.264	66.176	-7.824	74.000	PEAK
3		5354.900	15.927	52.075	68.002	-5.998	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Horizontal

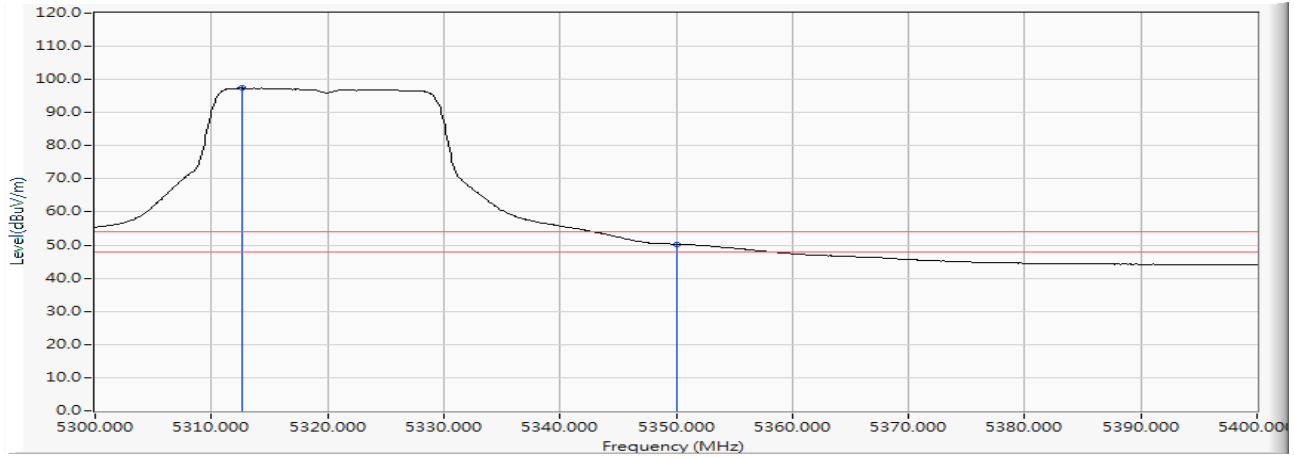


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5312.600	15.827	81.516	97.343	--	--	AVERAGE
2		5350.000	15.912	34.373	50.285	-3.715	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Vertical

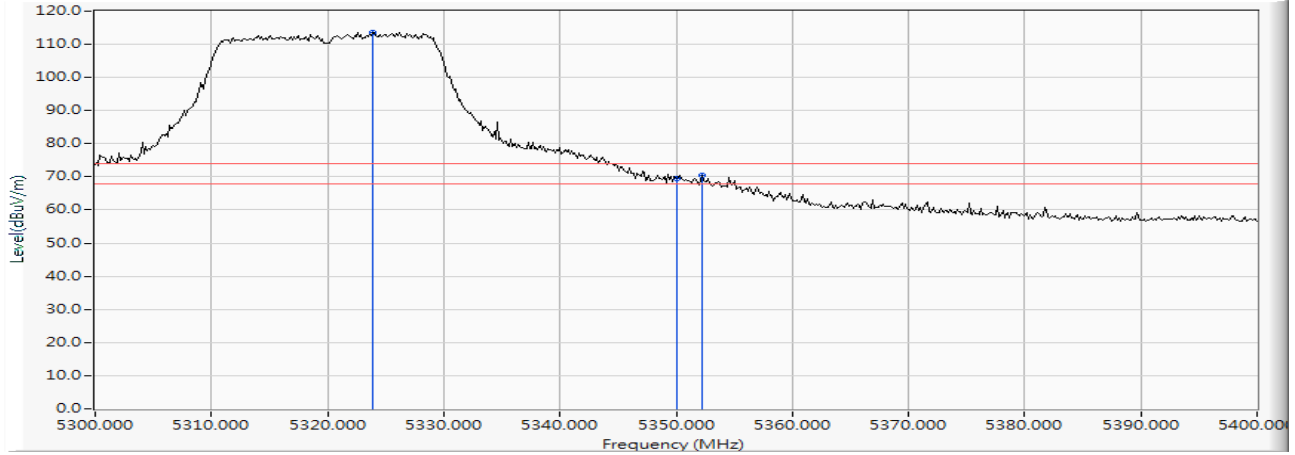


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5323.913	15.863	97.773	113.635	--	--	PEAK
2		5350.000	15.912	53.716	69.628	-4.372	74.000	PEAK
3		5352.174	15.919	54.697	70.616	-3.384	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Vertical

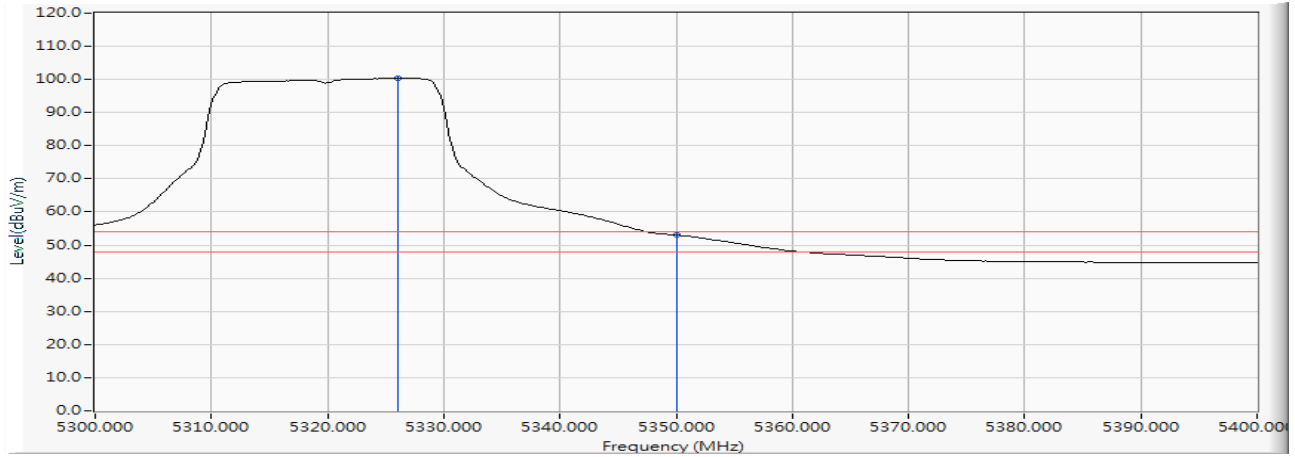


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5326.087	15.869	84.454	100.323	--	--	AVERAGE
2		5350.000	15.912	37.077	52.989	-1.011	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 : 2019/05/26
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Horizontal

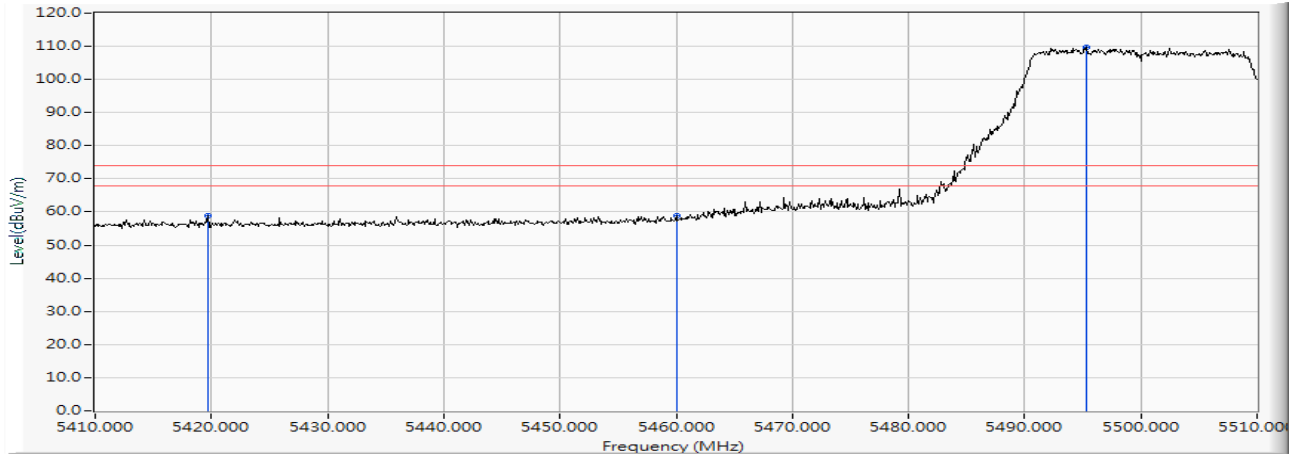


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5419.700	16.081	42.806	58.888	-15.112	74.000	PEAK
2		5460.000	16.185	42.596	58.781	-15.219	74.000	PEAK
3	*	5495.300	16.264	93.577	109.841	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Horizontal

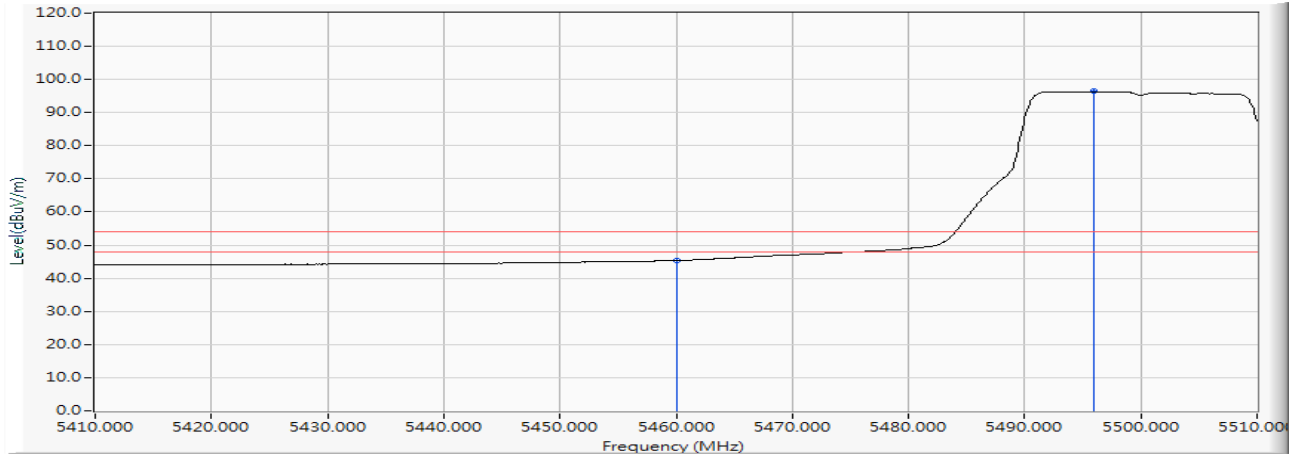


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	29.187	45.372	-8.628	54.000	AVERAGE
2	*	5496.000	16.265	80.089	96.354	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Vertical

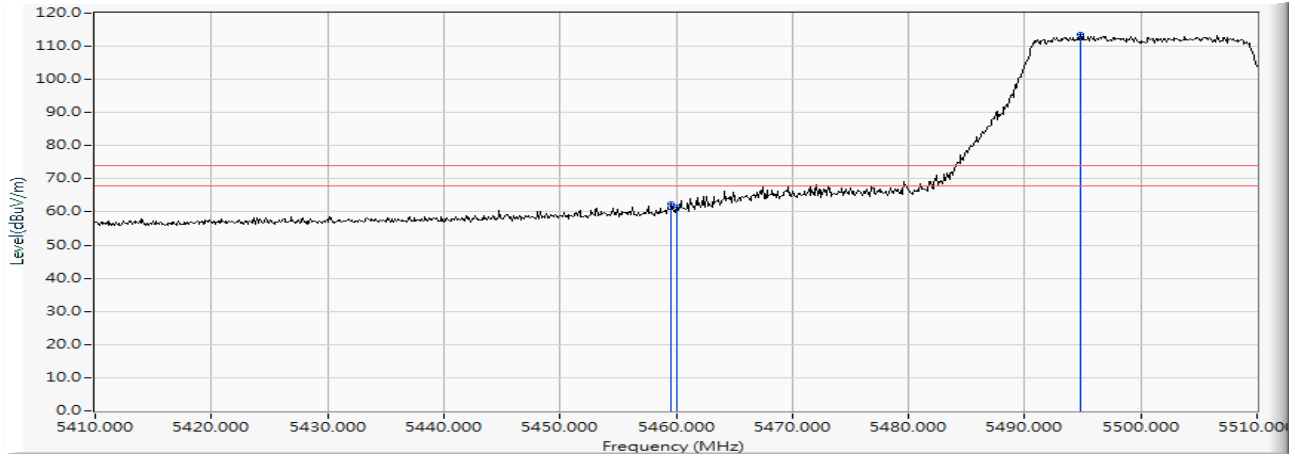


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5459.600	16.184	46.199	62.383	-11.617	74.000	PEAK
2		5460.000	16.185	45.378	61.563	-12.437	74.000	PEAK
3	*	5494.800	16.263	97.226	113.489	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Vertical

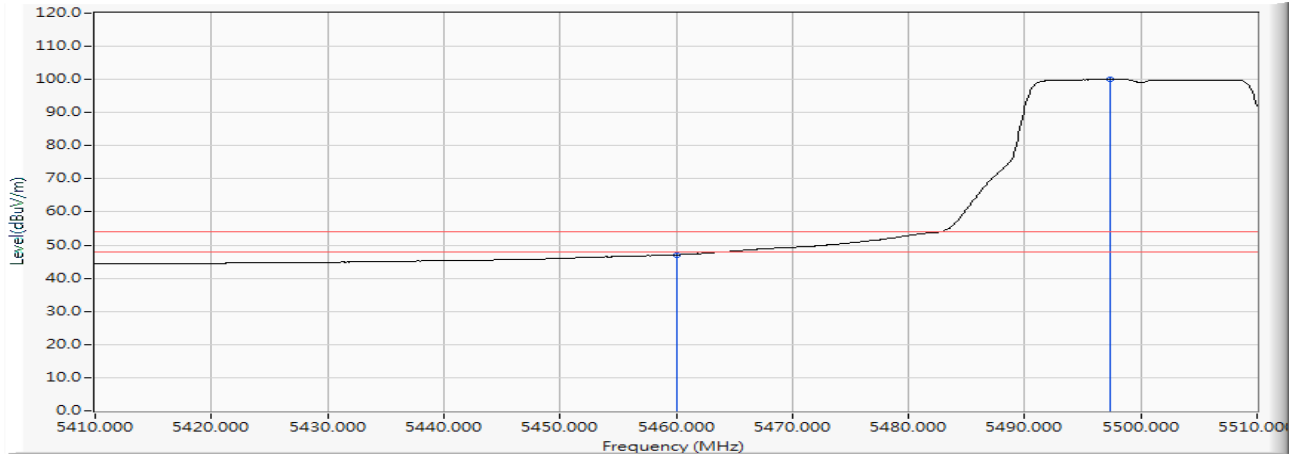


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	30.866	47.051	-6.949	54.000	AVERAGE
2	*	5497.400	16.267	83.787	100.054	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)


Horizontal

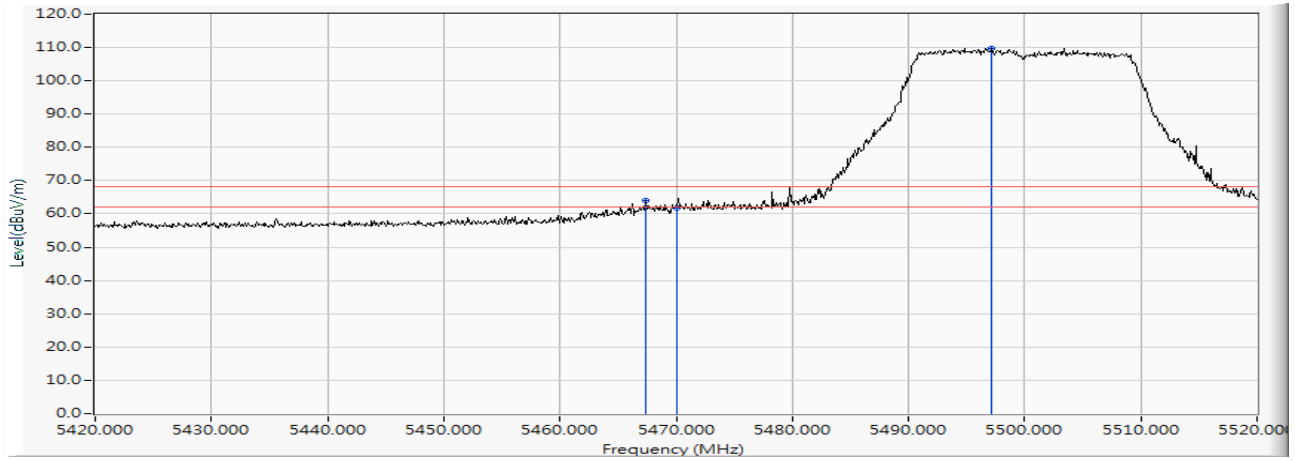

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5467.400	16.196	47.969	64.165	-4.055	68.220	PEAK
2		5470.000	16.200	45.712	61.912	-6.308	68.220	PEAK
3	*	5497.200	16.267	93.469	109.736	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)


Vertical

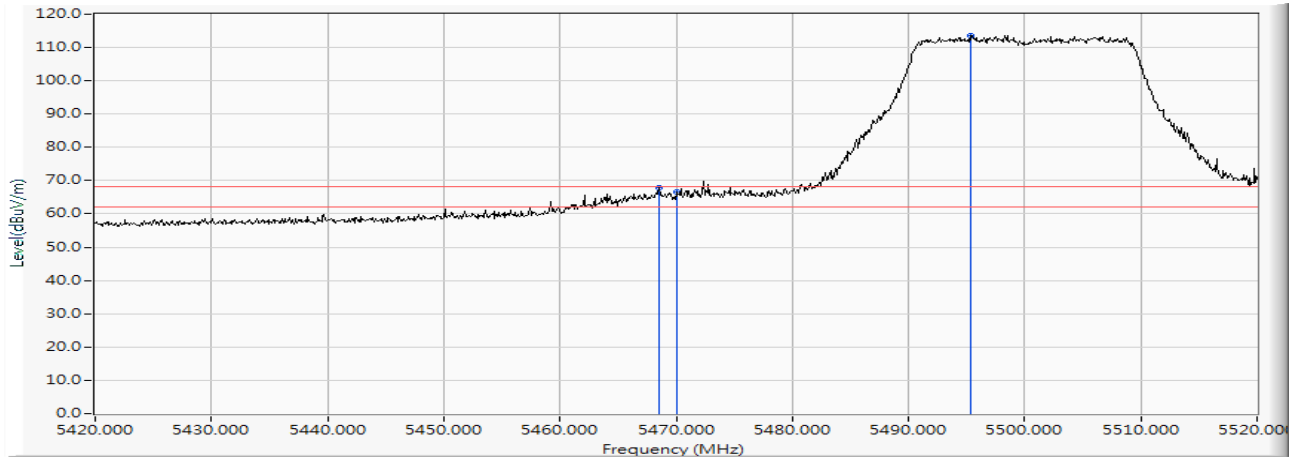

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.500	16.197	51.592	67.789	-0.431	68.220	PEAK
2		5470.000	16.200	50.454	66.654	-1.566	68.220	PEAK
3	*	5495.300	16.264	97.402	113.666	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 140 (5700MHz)


Horizontal

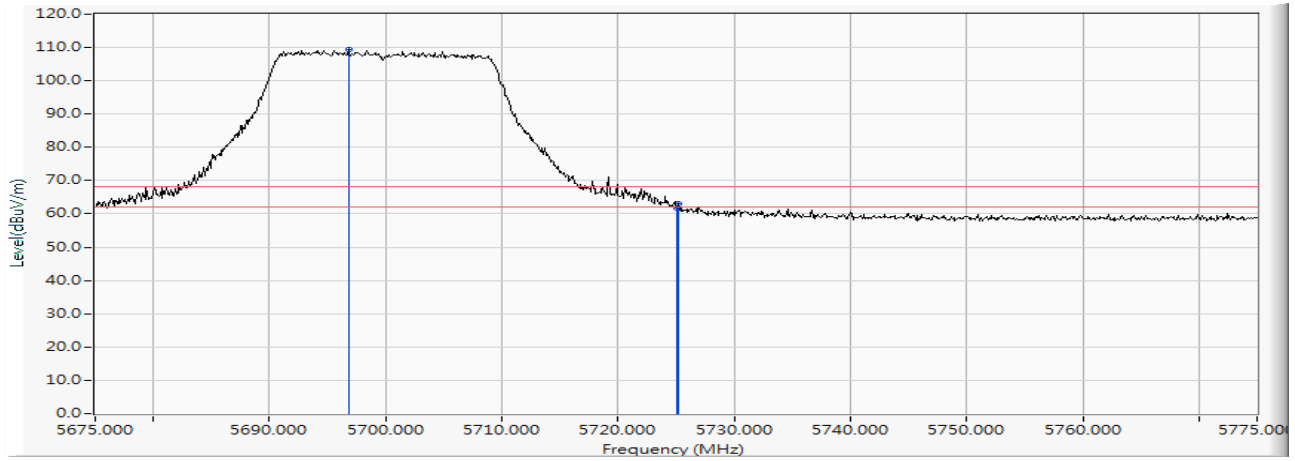

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5696.800	16.497	92.745	109.243	--	--	PEAK
2		5725.000	16.544	45.179	61.723	-6.497	68.220	PEAK
3		5725.200	16.544	46.464	63.009	-5.211	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 140 (5700MHz)


Vertical

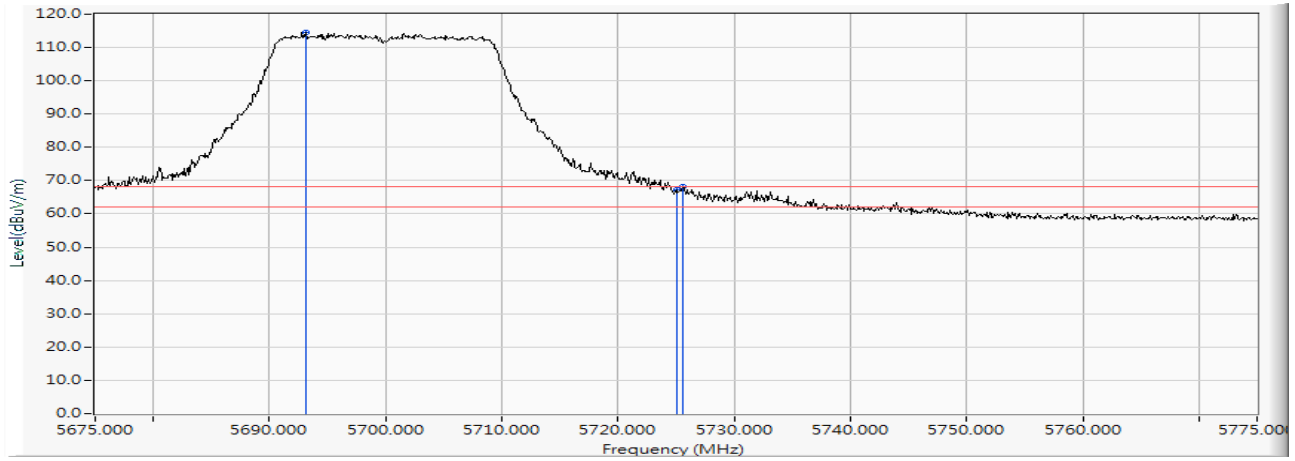

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5693.100	16.493	98.087	114.580	--	--	PEAK
2		5725.000	16.544	50.655	67.199	-1.021	68.220	PEAK
3		5725.600	16.546	51.575	68.120	-0.100	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 149 (5745MHz)


Horizontal

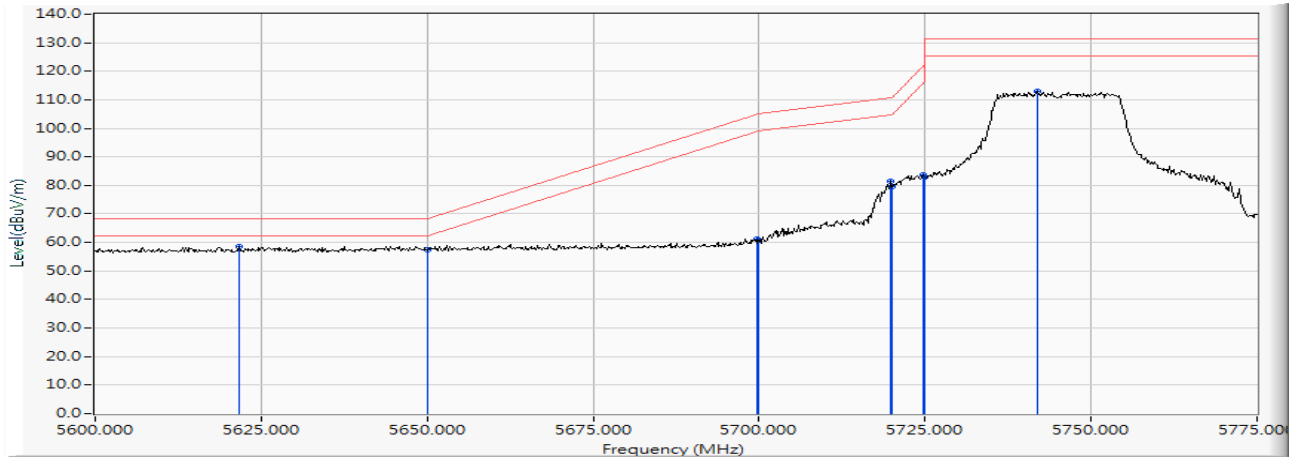

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5621.700	16.406	42.311	58.718	-9.502	68.220	PEAK
2		5650.000	16.447	40.866	57.313	-10.907	68.220	PEAK
3		5699.575	16.501	44.746	61.247	-43.639	104.886	PEAK
4		5700.000	16.502	44.402	60.904	-44.296	105.200	PEAK
5		5719.875	16.535	64.938	81.473	-29.292	110.765	PEAK
6		5720.000	16.535	63.199	79.734	-31.066	110.800	PEAK
7		5724.775	16.544	67.110	83.654	-38.033	121.687	PEAK
8		5725.000	16.544	66.334	82.878	-39.322	122.200	PEAK
9		5741.925	16.557	96.245	112.802	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 149 (5745MHz)


Vertical

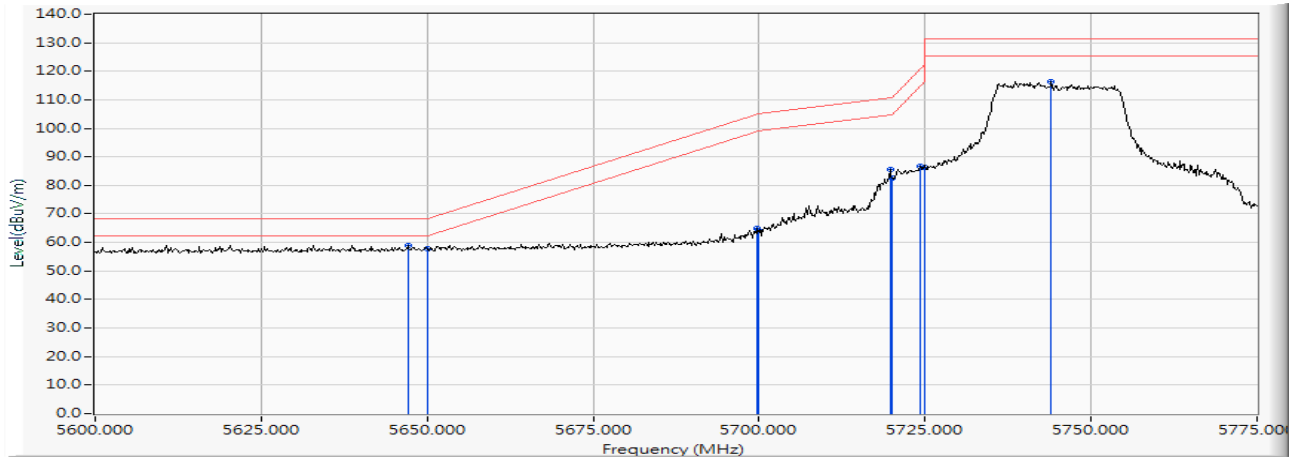

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5647.075	16.439	42.353	58.792	-9.428	68.220	PEAK
2		5650.000	16.447	41.483	57.930	-10.290	68.220	PEAK
3		5699.750	16.502	48.362	64.863	-40.152	105.015	PEAK
4		5700.000	16.502	47.707	64.209	-40.991	105.200	PEAK
5		5719.700	16.535	68.960	85.495	-25.221	110.716	PEAK
6		5720.000	16.535	66.111	82.646	-28.154	110.800	PEAK
7		5724.250	16.543	70.107	86.650	-33.840	120.490	PEAK
8		5725.000	16.544	69.950	86.494	-35.706	122.200	PEAK
9		5744.025	16.559	99.881	116.440	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 165 (5825MHz)


Horizontal

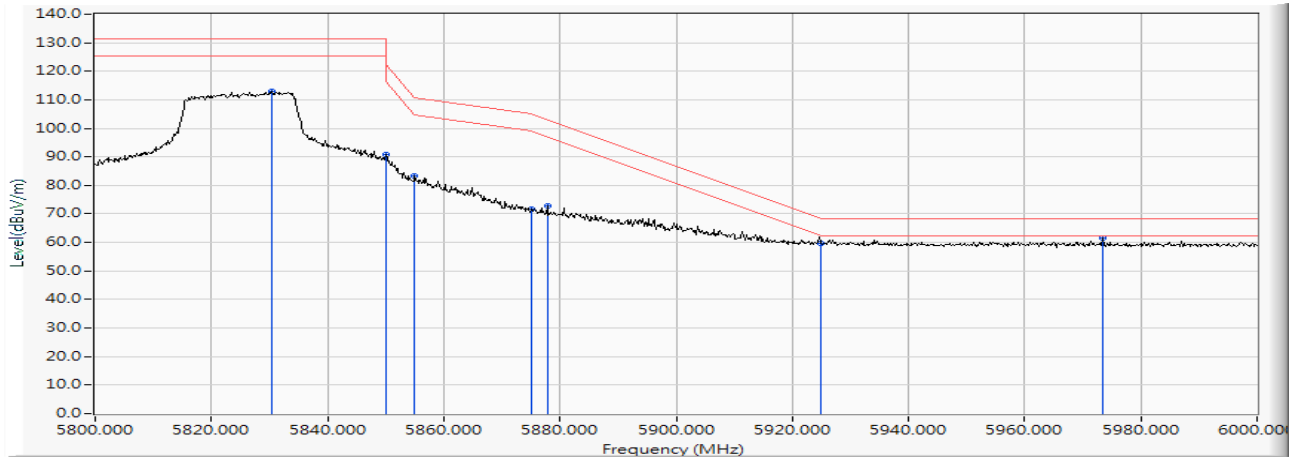

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5830.400	16.719	96.339	113.058	--	--	PEAK
2		5850.000	16.748	74.059	90.807	-31.393	122.200	PEAK
3		5855.000	16.758	66.446	83.204	-27.596	110.800	PEAK
4		5875.000	16.807	55.040	71.848	-33.352	105.200	PEAK
5		5877.800	16.816	55.959	72.774	-30.354	103.128	PEAK
6		5925.000	16.920	42.625	59.545	-8.655	68.200	PEAK
7	*	5973.400	17.007	44.602	61.608	-6.592	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 165 (5825MHz)


Vertical

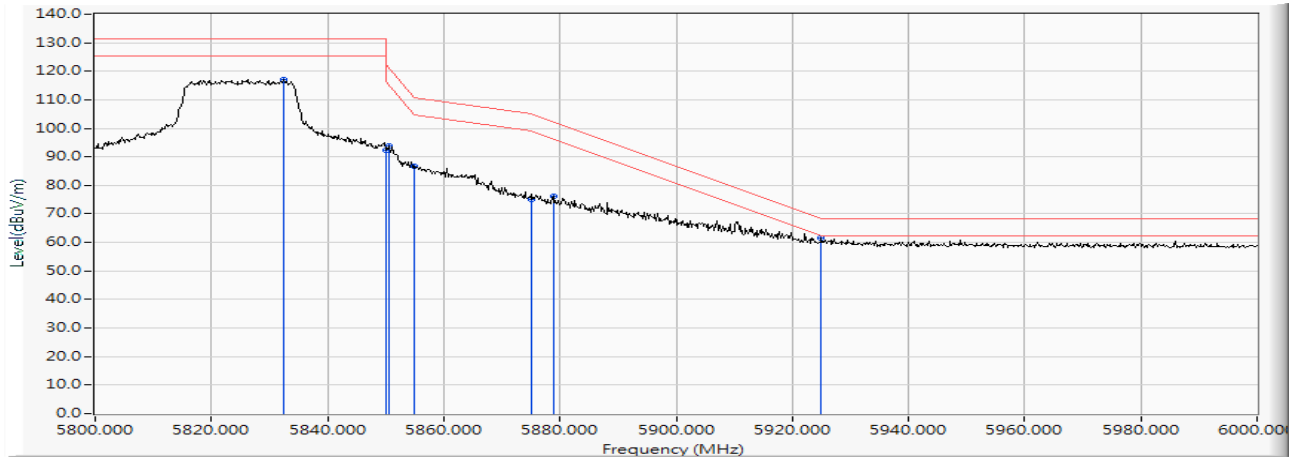

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5832.400	16.722	100.550	117.272	--	--	PEAK
2		5850.000	16.748	75.437	92.185	-30.015	122.200	PEAK
3		5850.600	16.749	77.038	93.787	-27.045	120.832	PEAK
4		5855.000	16.758	69.899	86.657	-24.143	110.800	PEAK
5		5875.000	16.807	58.087	74.895	-30.305	105.200	PEAK
6		5879.000	16.818	59.497	76.316	-25.924	102.240	PEAK
7	*	5925.000	16.920	44.629	61.549	-6.651	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Horizontal

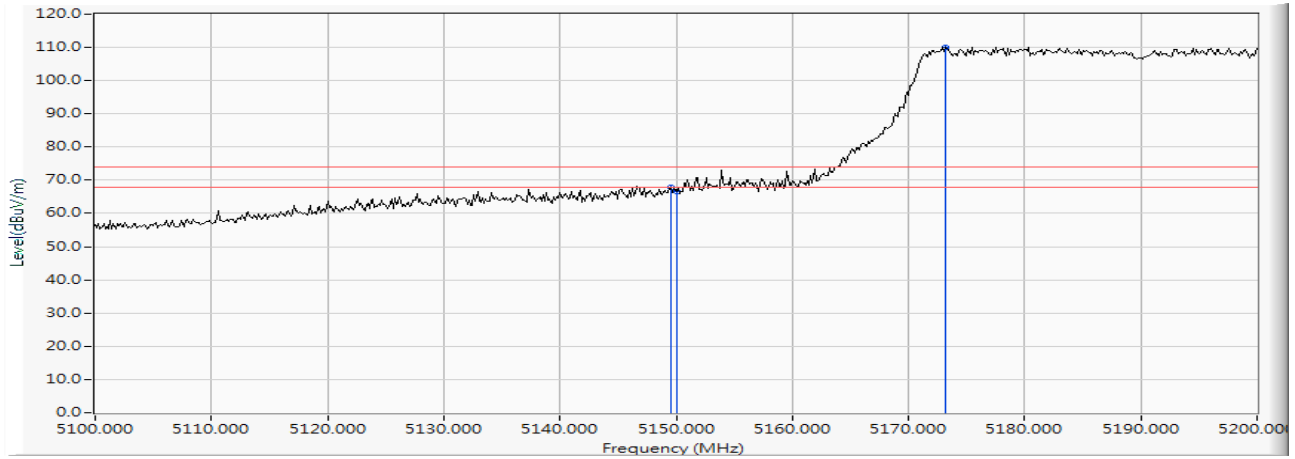


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.565	15.304	52.694	67.999	-6.001	74.000	PEAK
2		5150.000	15.307	51.360	66.667	-7.333	74.000	PEAK
3	*	5173.188	15.362	94.780	110.142	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Horizontal

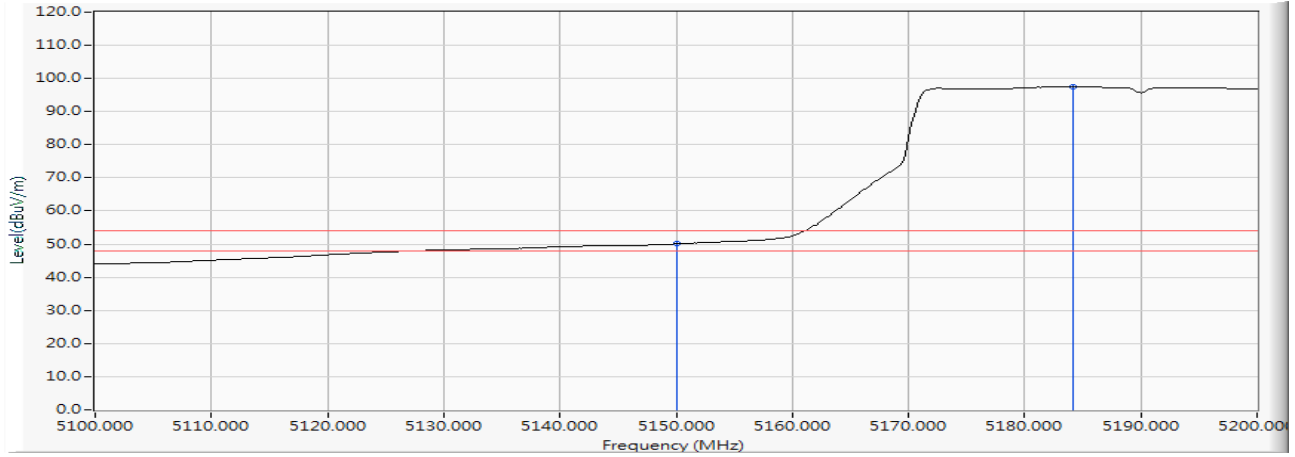


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	34.761	50.068	-3.932	54.000	AVERAGE
2	*	5184.203	15.410	82.014	97.425	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Vertical

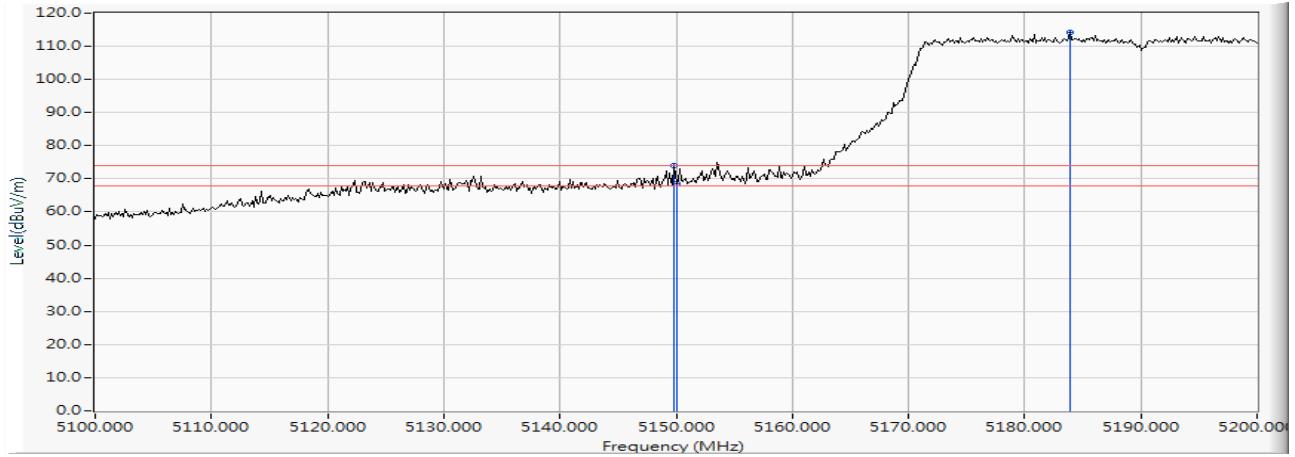


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.855	15.307	58.642	73.948	-0.052	74.000	PEAK
2		5150.000	15.307	53.297	68.604	-5.396	74.000	PEAK
3	*	5183.913	15.410	98.727	114.136	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Vertical

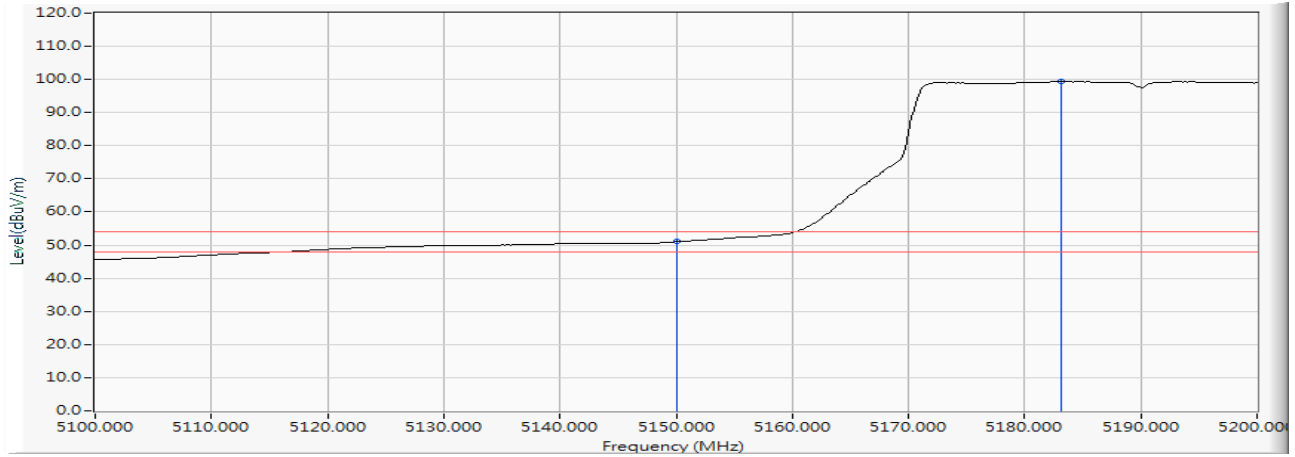


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	35.727	51.034	-2.966	54.000	AVERAGE
2	*	5183.188	15.406	83.918	99.324	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Horizontal

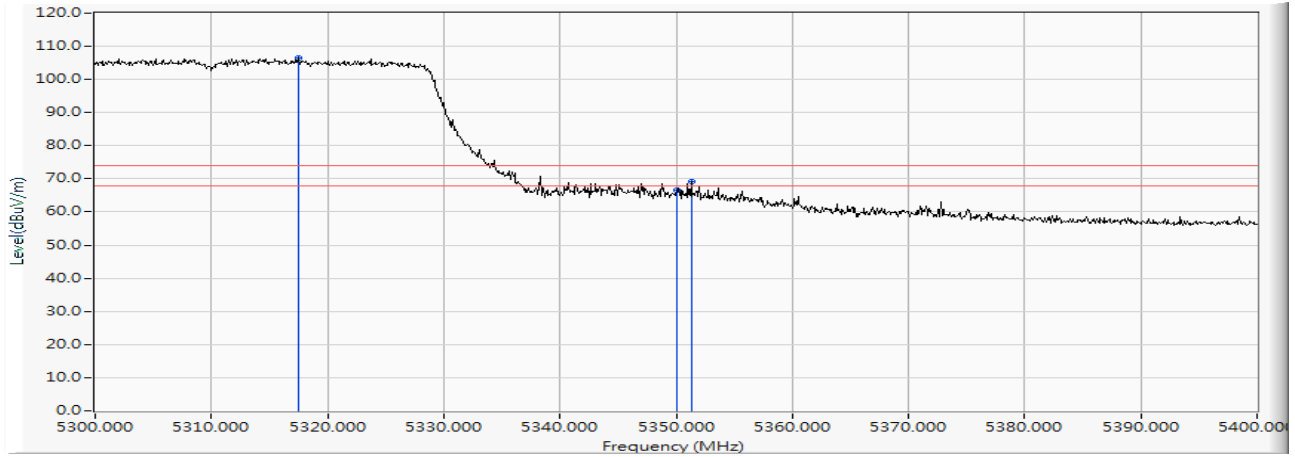


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5317.500	15.842	90.559	106.401	--	--	PEAK
2		5350.000	15.912	50.741	66.653	-7.347	74.000	PEAK
3		5351.300	15.917	53.141	69.057	-4.943	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Horizontal

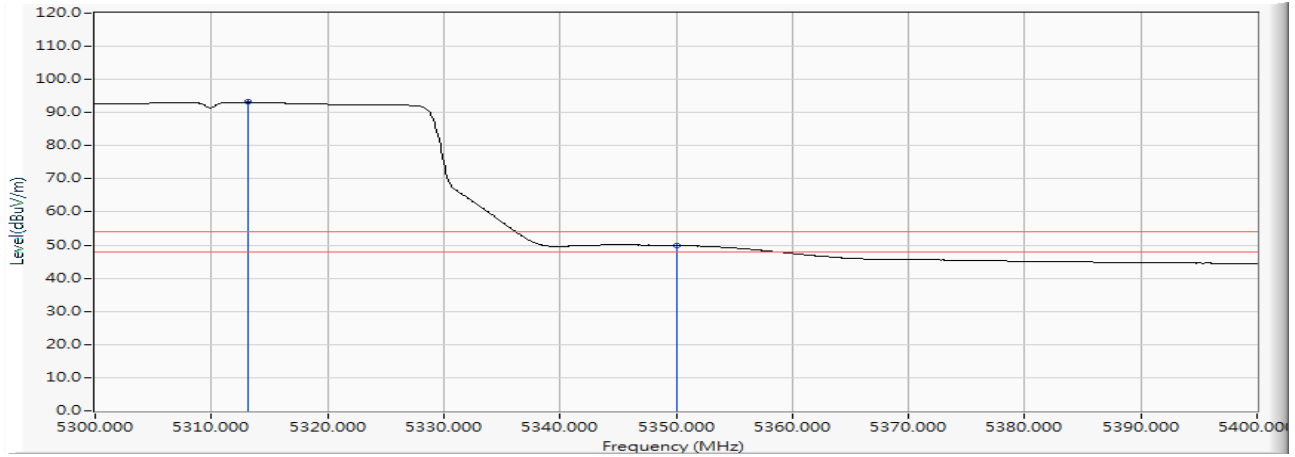


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5313.100	15.827	77.314	93.142	--	--	AVERAGE
2		5350.000	15.912	33.976	49.888	-4.112	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Vertical

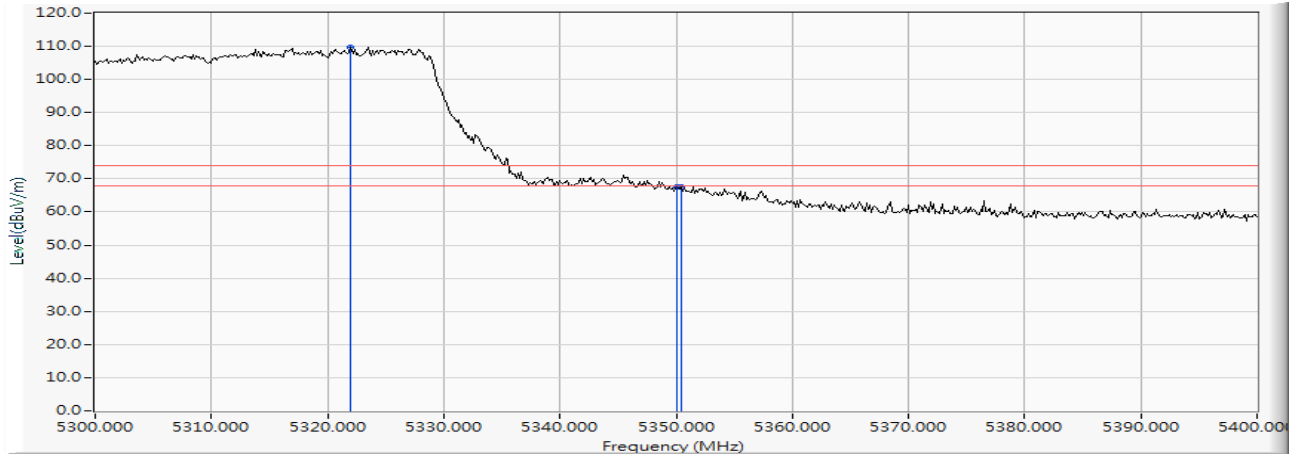


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5322.029	15.856	93.781	109.637	--	--	PEAK
2		5350.000	15.912	51.498	67.410	-6.590	74.000	PEAK
3		5350.435	15.914	51.574	67.487	-6.513	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Vertical

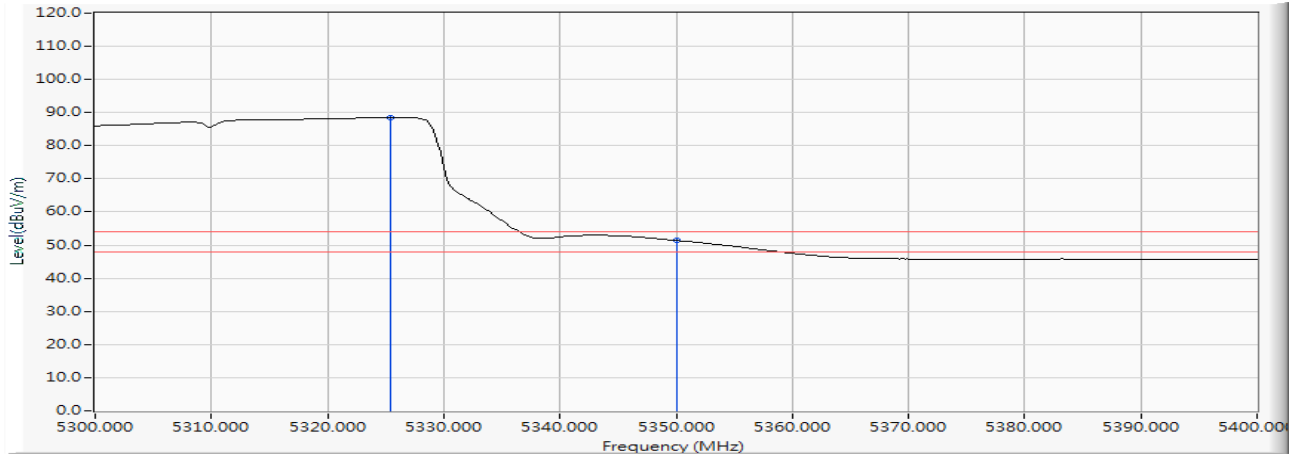


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5325.362	15.867	72.631	88.498	--	--	AVERAGE
2		5350.000	15.912	35.464	51.376	-2.624	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Horizontal

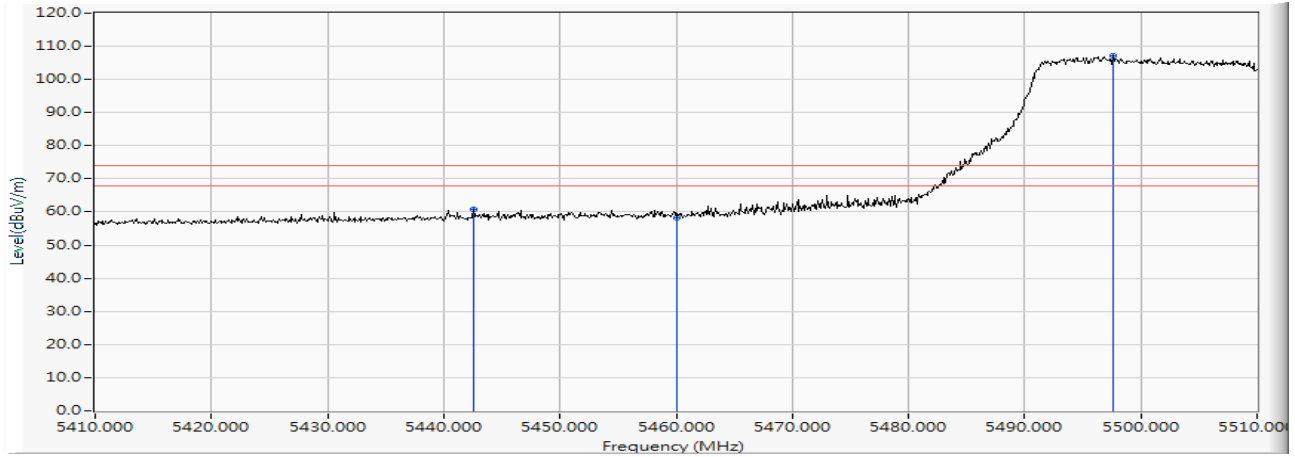


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5442.600	16.133	44.754	60.887	-13.113	74.000	PEAK
2		5460.000	16.185	42.028	58.213	-15.787	74.000	PEAK
3	*	5497.600	16.267	90.929	107.196	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Horizontal

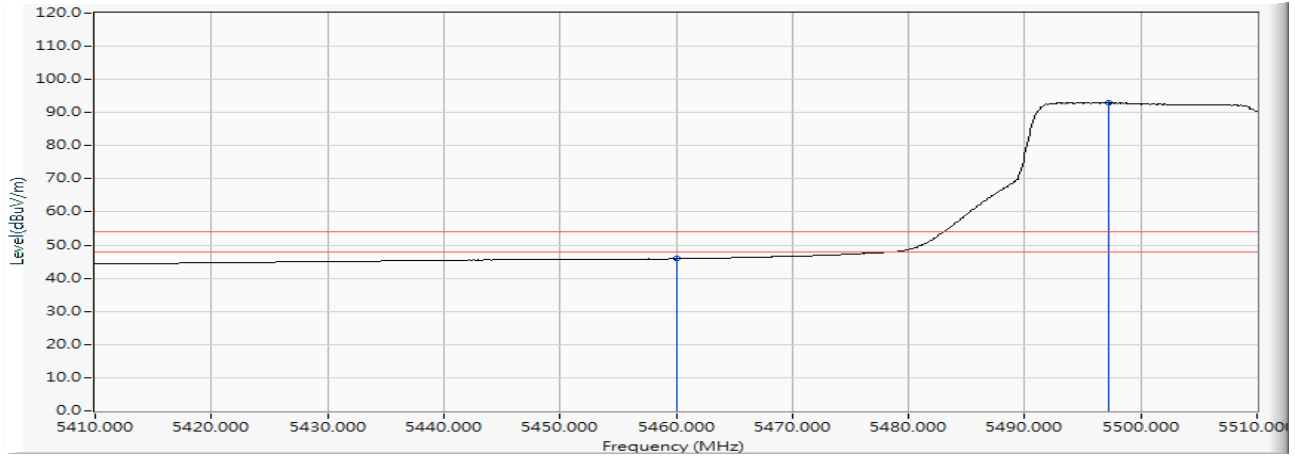


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	29.679	45.864	-8.136	54.000	AVERAGE
2	*	5497.200	16.267	76.710	92.977	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Vertical

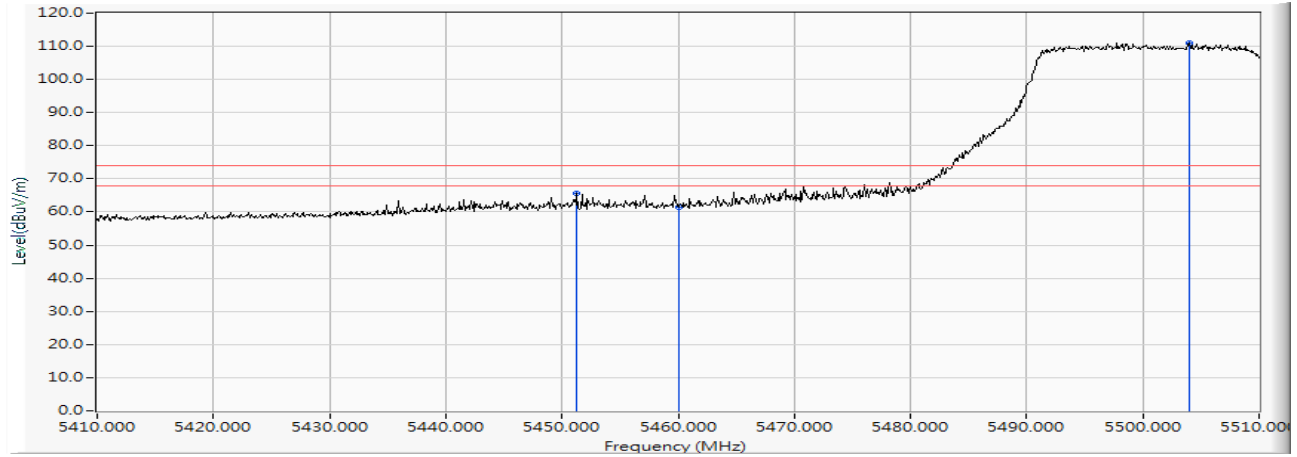


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5451.300	16.162	49.507	65.669	-8.331	74.000	PEAK
2		5460.000	16.185	45.407	61.592	-12.408	74.000	PEAK
3	*	5504.000	16.273	94.813	111.086	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Vertical

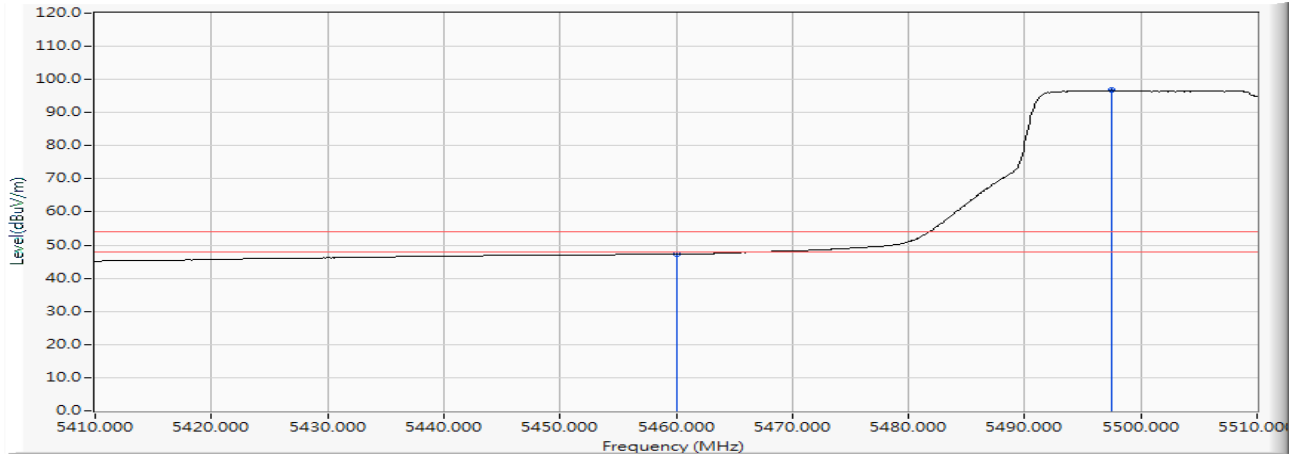


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	31.031	47.216	-6.784	54.000	AVERAGE
2	*	5497.500	16.267	80.419	96.686	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)


Horizontal

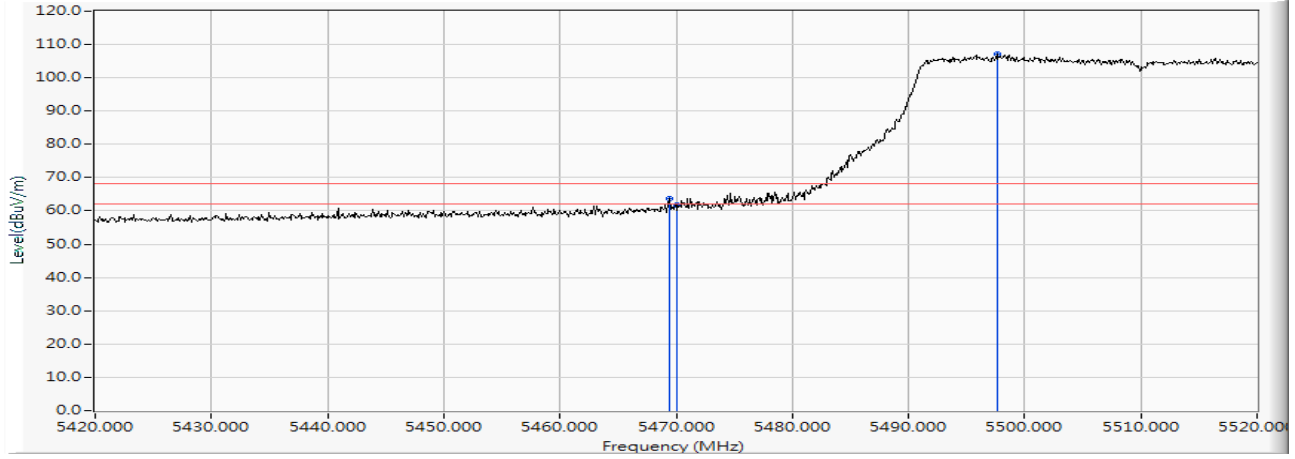

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5469.400	16.199	47.532	63.731	-4.489	68.220	PEAK
2		5470.000	16.200	45.424	61.624	-6.596	68.220	PEAK
3	*	5497.600	16.267	90.998	107.265	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)


Vertical

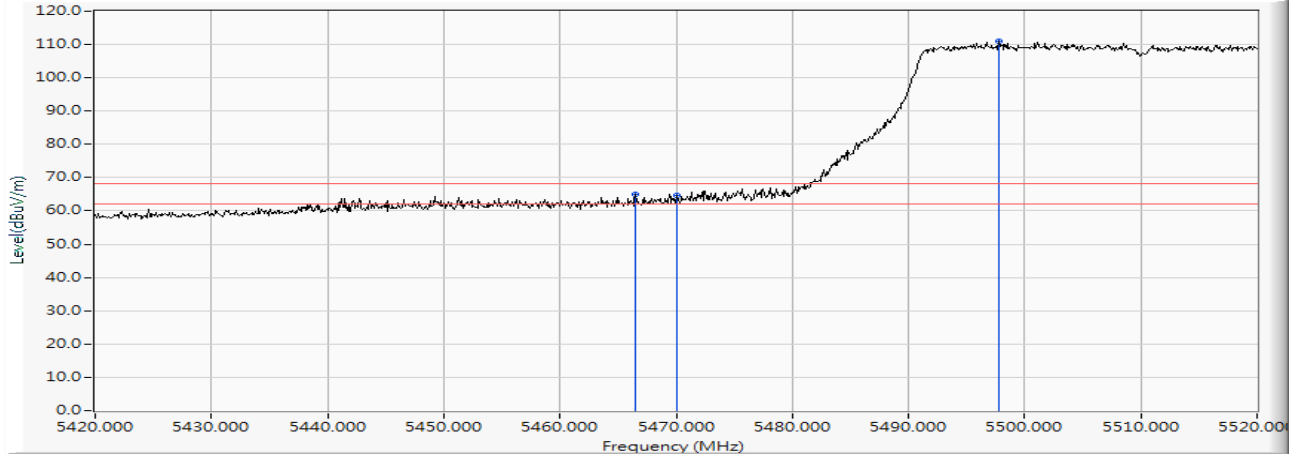

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5466.500	16.194	48.947	65.141	-3.079	68.220	PEAK
2		5470.000	16.200	48.569	64.769	-3.451	68.220	PEAK
3	*	5497.800	16.266	94.710	110.977	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 134 (5670MHz)


Horizontal

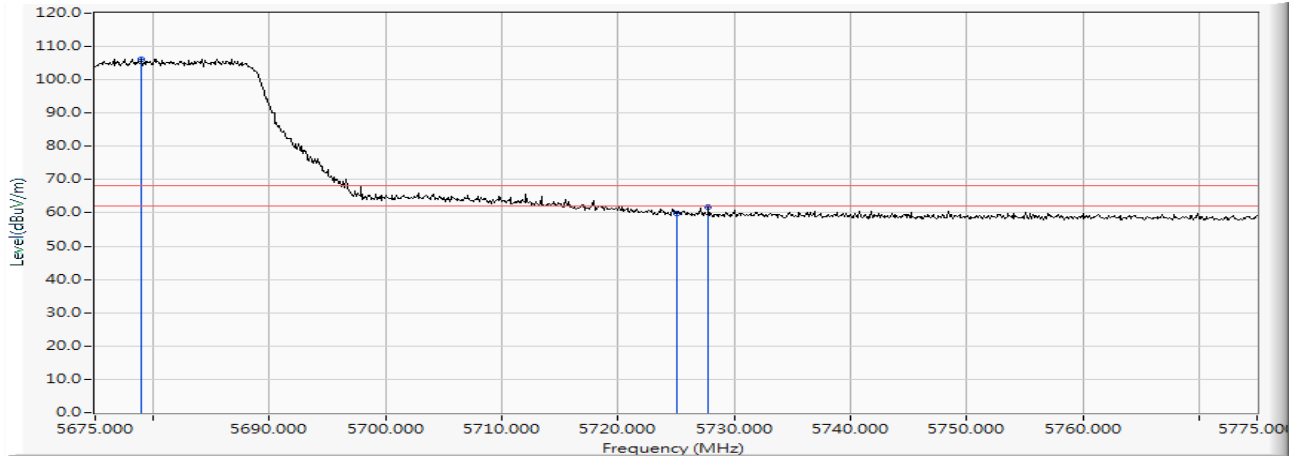

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5679.000	16.477	89.836	106.313	--	--	PEAK
2		5725.000	16.544	43.143	59.687	-8.533	68.220	PEAK
3		5727.800	16.548	45.062	61.610	-6.610	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 134 (5670MHz)


Vertical

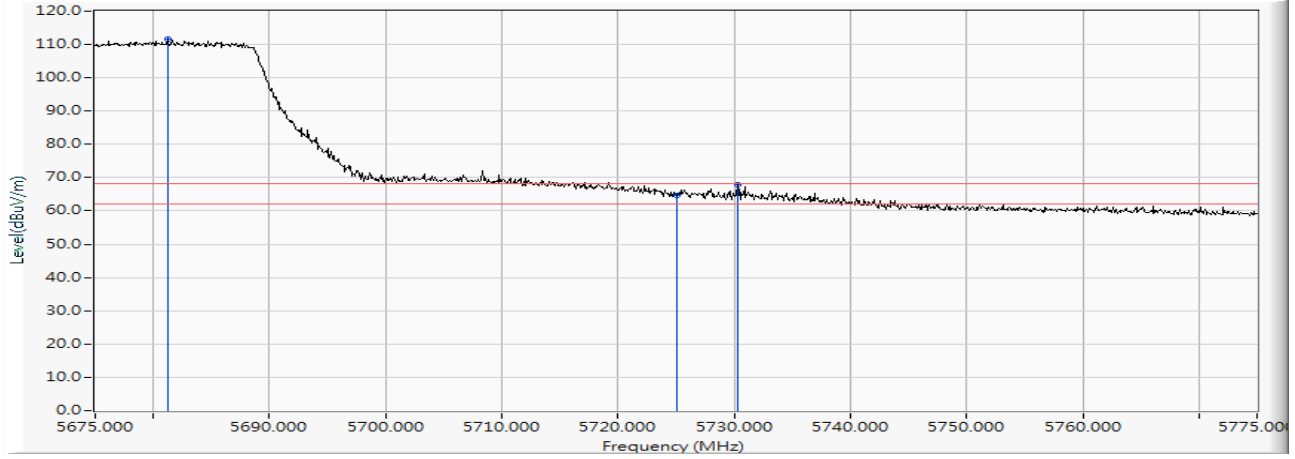

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5681.200	16.479	95.212	111.691	--	--	PEAK
2		5725.000	16.544	48.218	64.762	-3.458	68.220	PEAK
3		5730.300	16.549	51.246	67.795	-0.425	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 151 (5755MHz)


Horizontal

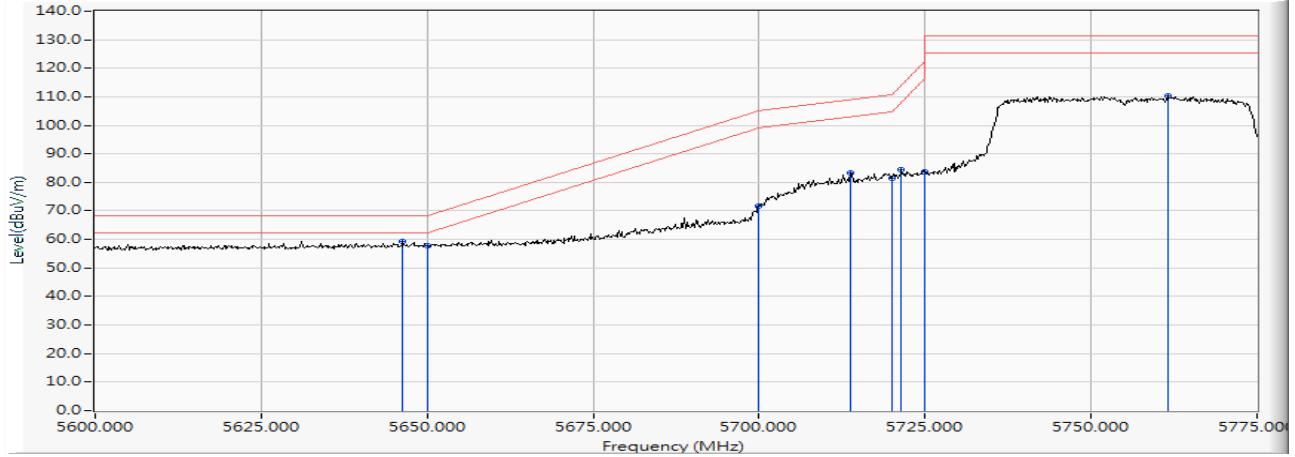

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5646.375	16.437	42.936	59.373	-8.847	68.220	PEAK
2		5650.000	16.447	41.266	57.713	-10.507	68.220	PEAK
3		5700.000	16.502	55.132	71.634	-33.566	105.200	PEAK
4		5713.750	16.524	66.675	83.198	-25.852	109.050	PEAK
5		5720.000	16.535	64.960	81.495	-29.305	110.800	PEAK
6		5721.450	16.538	67.984	84.522	-29.584	114.106	PEAK
7		5725.000	16.544	67.175	83.719	-38.481	122.200	PEAK
8		5761.525	16.586	93.725	110.311	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 151 (5755MHz)


Vertical

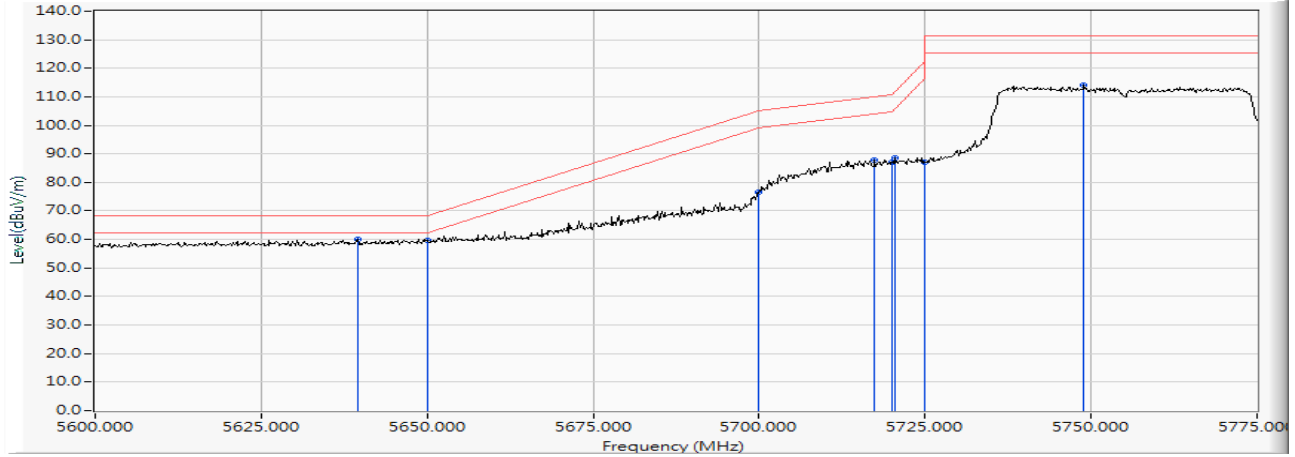

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5639.550	16.418	43.586	60.004	-8.216	68.220	PEAK
2		5650.000	16.447	43.187	59.634	-8.586	68.220	PEAK
3		5700.000	16.502	60.178	76.680	-28.520	105.200	PEAK
4		5717.425	16.530	71.292	87.822	-22.257	110.079	PEAK
5		5720.000	16.535	70.388	86.923	-23.877	110.800	PEAK
6		5720.400	16.536	72.174	88.710	-23.002	111.712	PEAK
7		5725.000	16.544	70.541	87.085	-35.115	122.200	PEAK
8		5748.925	16.566	97.369	113.935	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 159 (5795MHz)


Horizontal

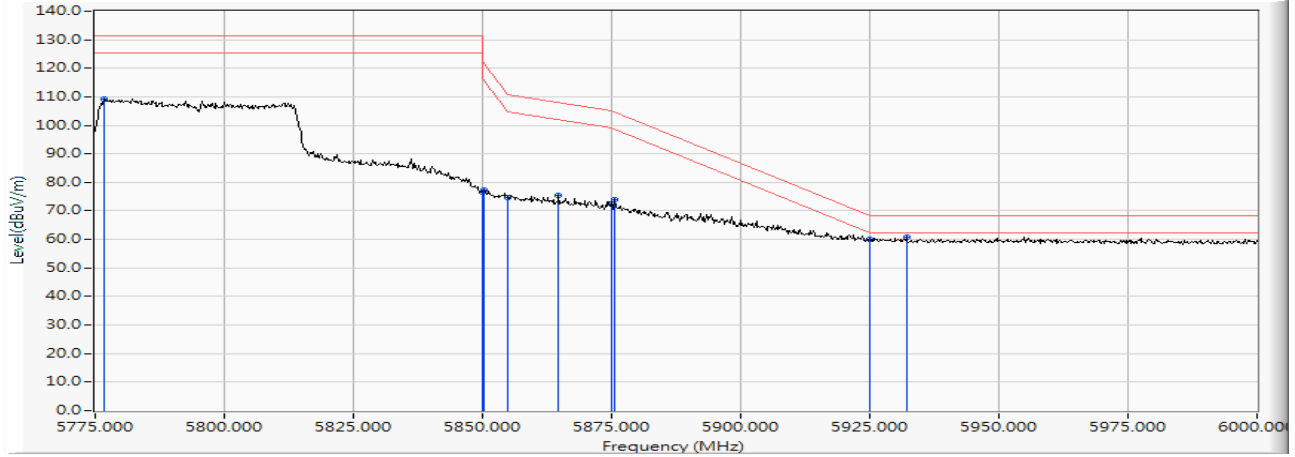

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5776.800	16.604	92.521	109.125	--	--	PEAK
2	5850.000	16.748	59.982	76.730	-45.470	122.200	PEAK
3	5850.375	16.749	60.719	77.468	-43.877	121.345	PEAK
4	5855.000	16.758	57.906	74.664	-36.136	110.800	PEAK
5	5864.775	16.782	58.474	75.256	-32.807	108.063	PEAK
6	5875.000	16.807	55.615	72.423	-32.777	105.200	PEAK
7	5875.575	16.809	56.968	73.777	-30.998	104.775	PEAK
8	5925.000	16.920	43.185	60.105	-8.095	68.200	PEAK
9	* 5932.050	16.927	43.991	60.918	-7.282	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 159 (5795MHz)


Vertical

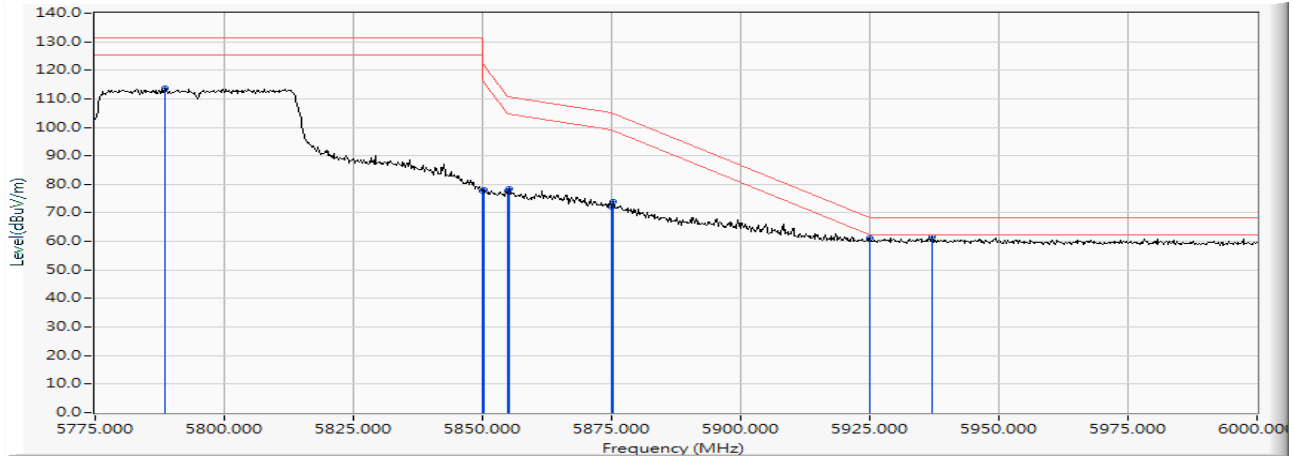

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5788.500	16.630	96.920	113.549	--	--	PEAK
2	5850.000	16.748	61.006	77.754	-44.446	122.200	PEAK
3	5850.375	16.749	61.329	78.078	-43.267	121.345	PEAK
4	5855.000	16.758	60.772	77.530	-33.270	110.800	PEAK
5	5855.100	16.758	61.535	78.293	-32.479	110.772	PEAK
6	5875.000	16.807	55.335	72.143	-33.057	105.200	PEAK
7	5875.350	16.809	57.022	73.831	-31.110	104.941	PEAK
8	5925.000	16.920	44.252	61.172	-7.028	68.200	PEAK
9	* 5937.000	16.933	44.459	61.392	-6.808	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Horizontal

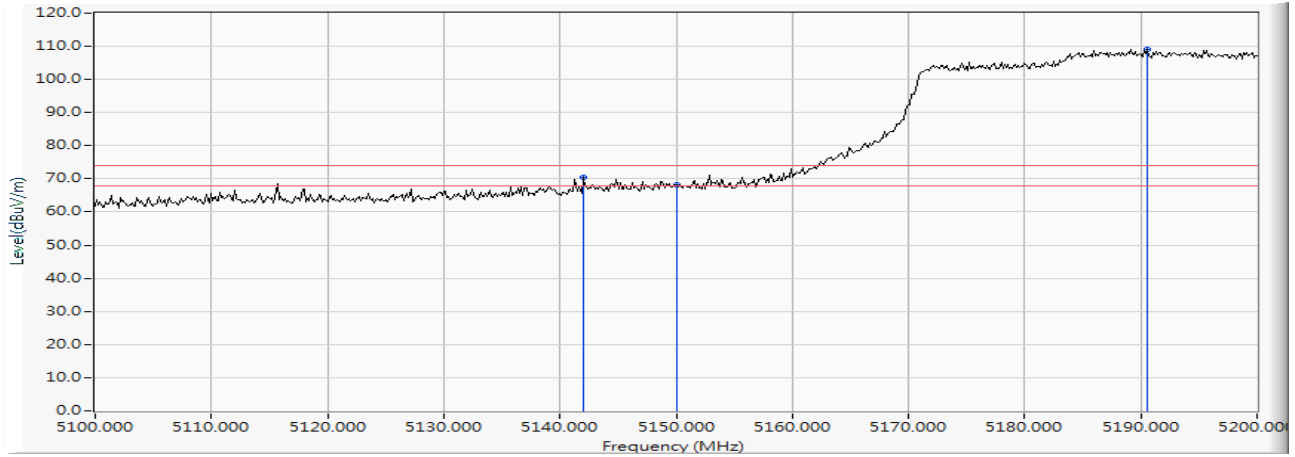


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5142.029	15.262	55.061	70.323	-3.677	74.000	PEAK
2		5150.000	15.307	52.737	68.044	-5.956	74.000	PEAK
3	*	5190.580	15.438	93.543	108.980	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Horizontal

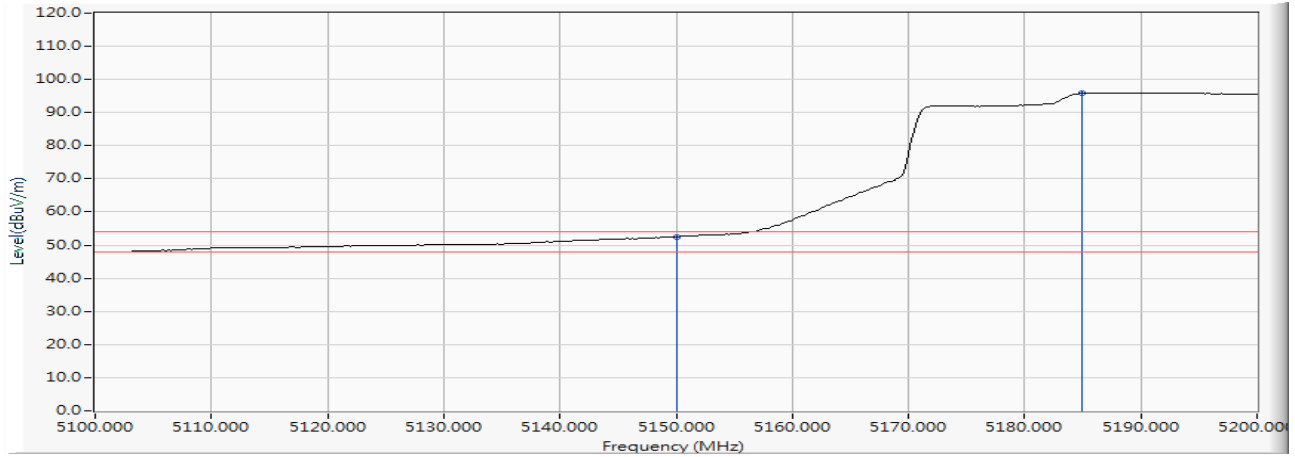


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	37.248	52.555	-1.445	54.000	AVERAGE
2	*	5184.928	15.415	80.529	95.943	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Vertical

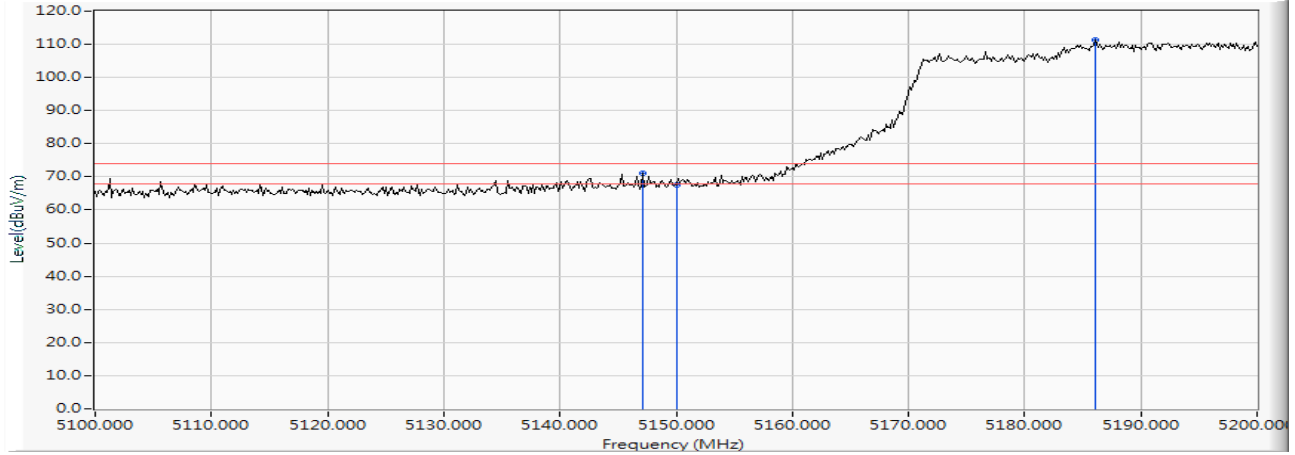


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5147.101	15.291	55.710	71.001	-2.999	74.000	PEAK
2		5150.000	15.307	52.331	67.638	-6.362	74.000	PEAK
3	*	5186.087	15.419	95.859	111.278	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/24
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Vertical

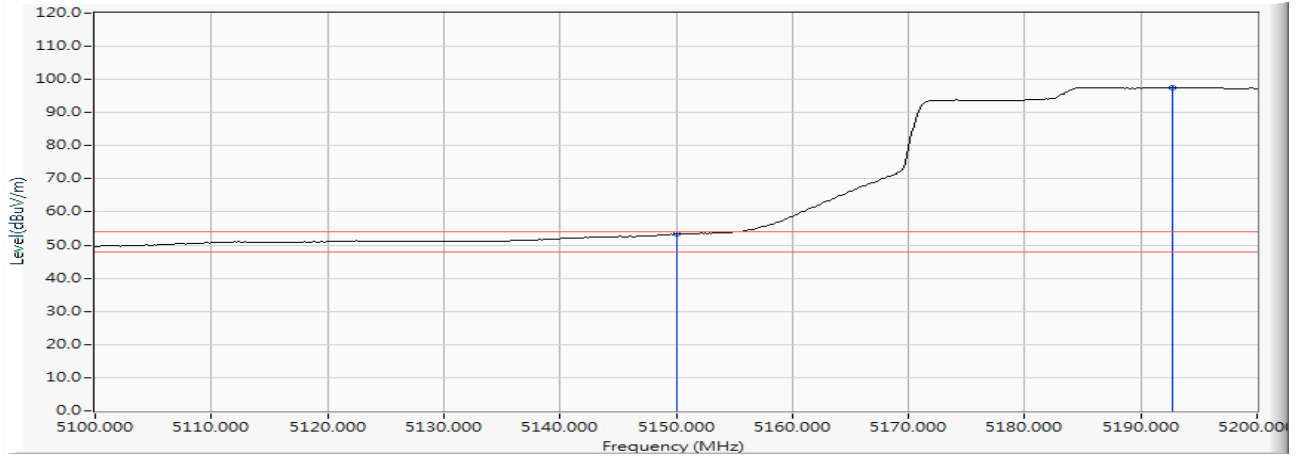


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	37.945	53.252	-0.748	54.000	AVERAGE
2	*	5192.754	15.445	82.166	97.611	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Horizontal

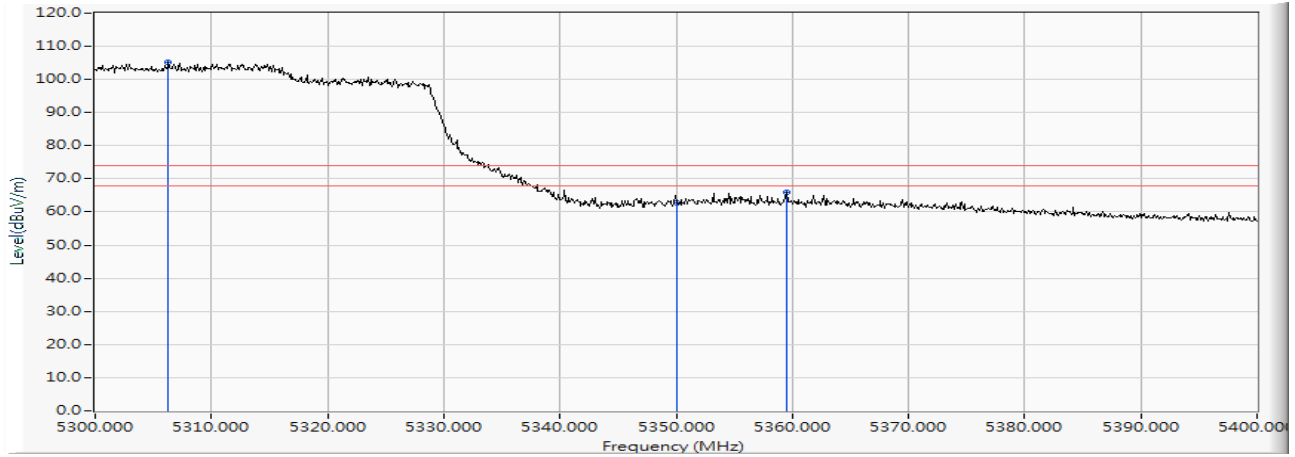


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5306.300	15.812	89.386	105.198	--	--	PEAK
2		5350.000	15.912	46.861	62.773	-11.227	74.000	PEAK
3		5359.500	15.942	49.945	65.887	-8.113	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Horizontal

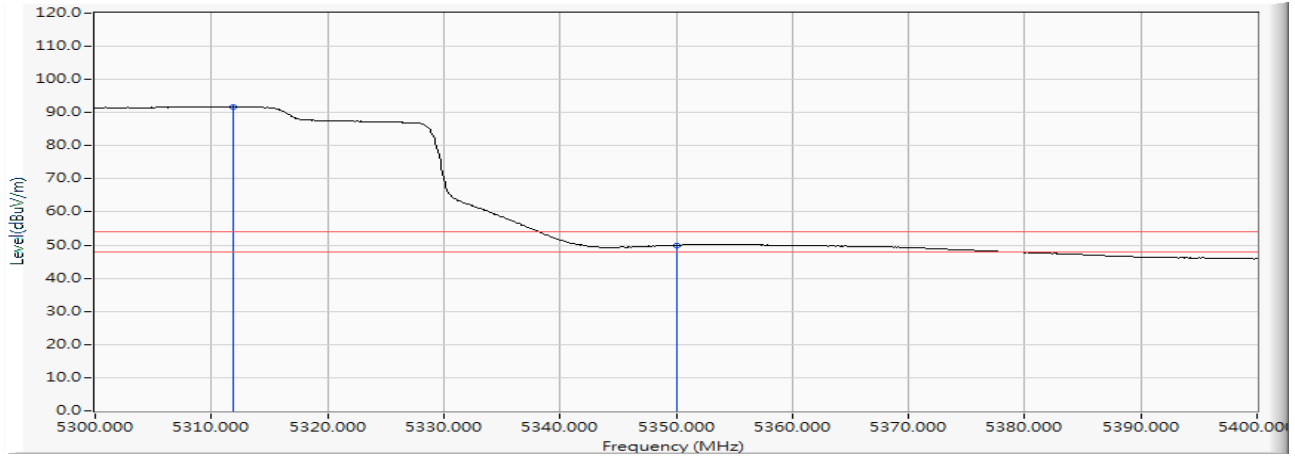


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5311.900	15.825	75.955	91.780	--	--	AVERAGE
2		5350.000	15.912	34.045	49.957	-4.043	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Vertical

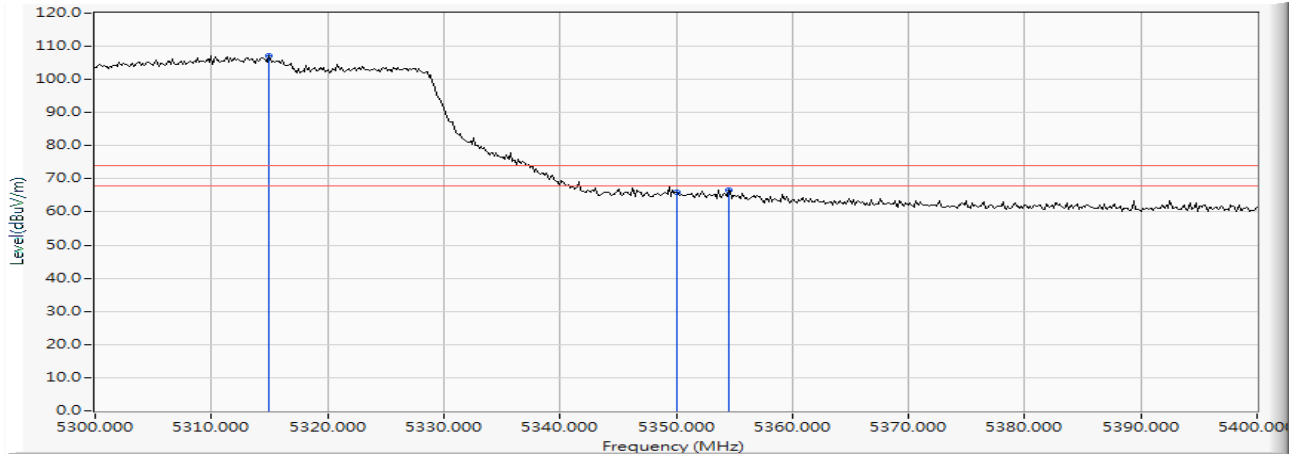


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.928	15.834	91.421	107.254	--	--	PEAK
2		5350.000	15.912	50.087	65.999	-8.001	74.000	PEAK
3		5354.493	15.927	50.584	66.510	-7.490	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/25
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Vertical

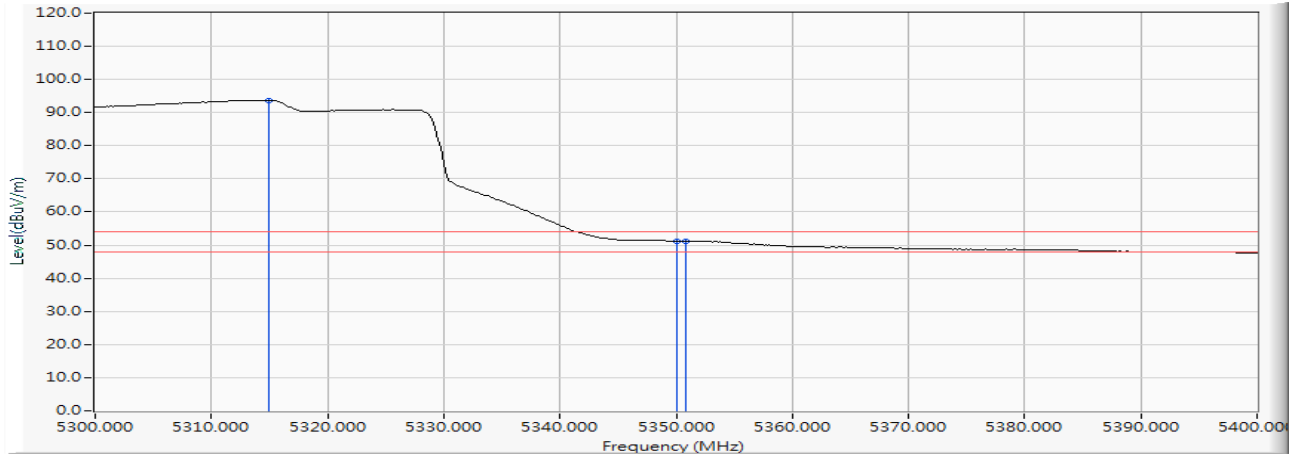


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.928	15.834	77.924	93.757	--	--	AVERAGE
2		5350.000	15.912	35.281	51.193	-2.807	54.000	AVERAGE
3		5350.870	15.915	35.392	51.307	-2.693	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Horizontal

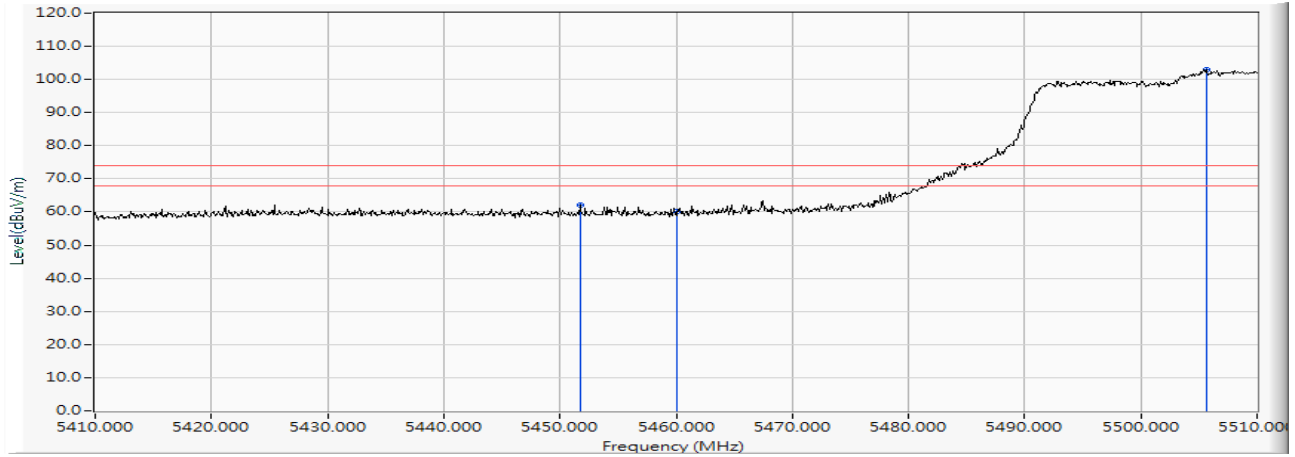


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5451.700	16.162	45.981	62.144	-11.856	74.000	PEAK
2		5460.000	16.185	43.879	60.064	-13.936	74.000	PEAK
3	*	5505.600	16.273	86.577	102.850	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Horizontal

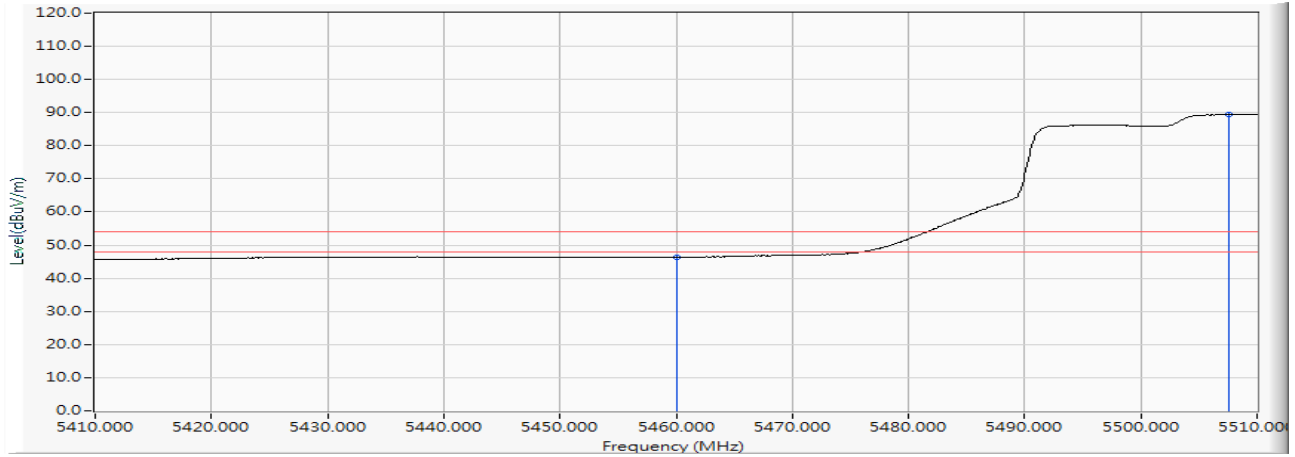


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	30.076	46.261	-7.739	54.000	AVERAGE
2	*	5507.600	16.274	73.145	89.419	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Vertical

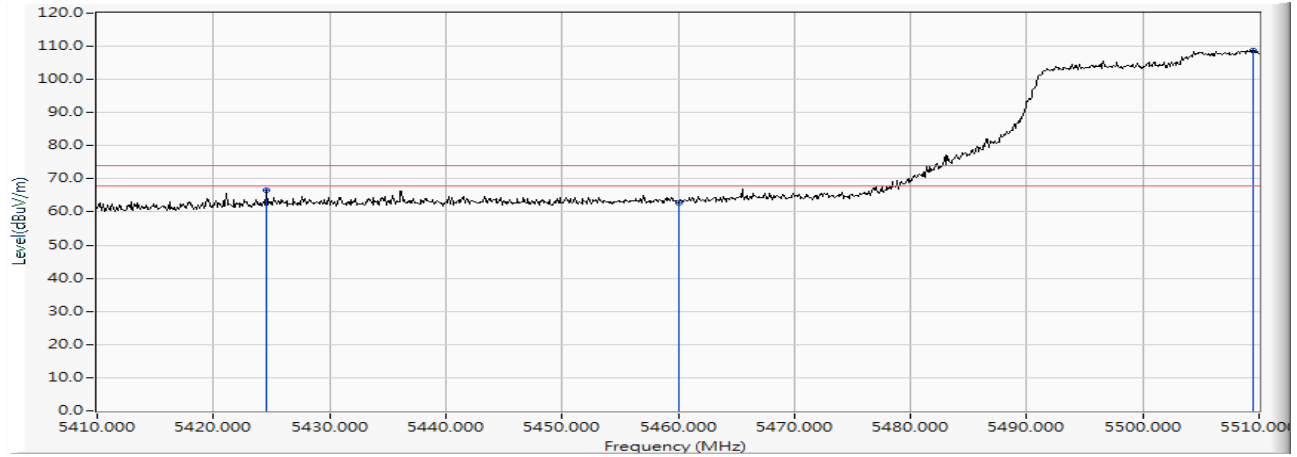


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5424.600	16.093	50.382	66.475	-7.525	74.000	PEAK
2		5460.000	16.185	46.635	62.820	-11.180	74.000	PEAK
3	*	5509.500	16.274	92.612	108.887	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Vertical

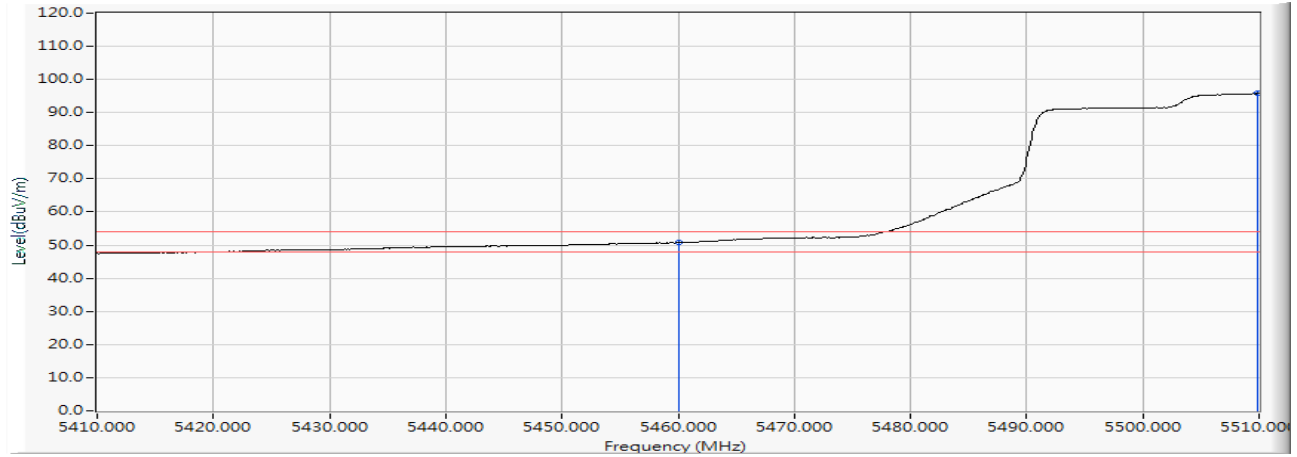


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	34.553	50.738	-3.262	54.000	AVERAGE
2	*	5509.900	16.275	79.487	95.762	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)


Horizontal

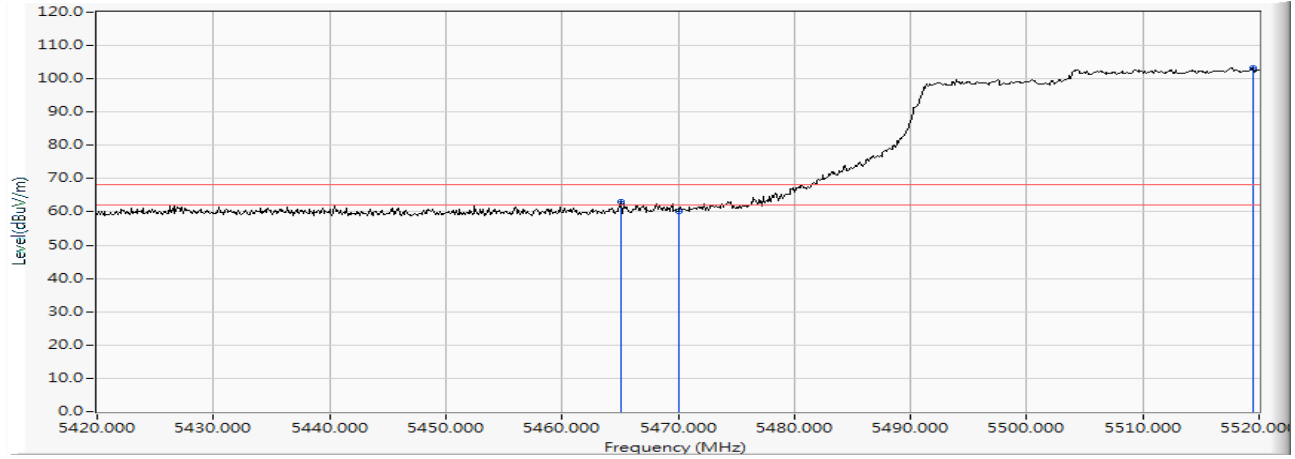

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5465.100	16.192	46.926	63.118	-5.102	68.220	PEAK
2		5470.000	16.200	44.051	60.251	-7.969	68.220	PEAK
3	*	5519.500	16.291	87.117	103.408	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)


Vertical

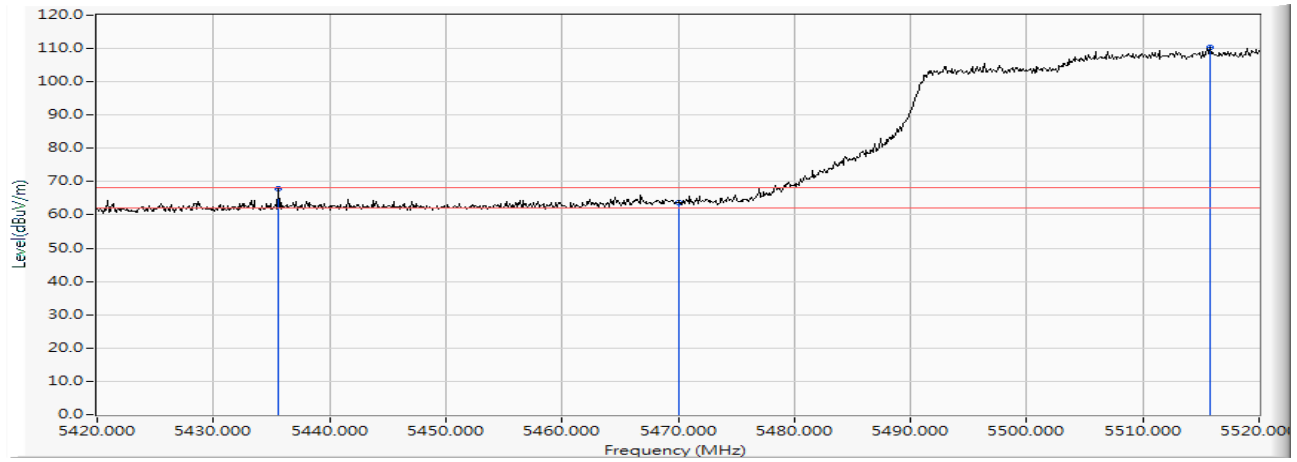

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5435.600	16.115	51.745	67.860	-0.360	68.220	PEAK
2		5470.000	16.200	47.527	63.727	-4.493	68.220	PEAK
3	*	5515.800	16.285	93.939	110.224	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 155 (5775MHz)


Horizontal

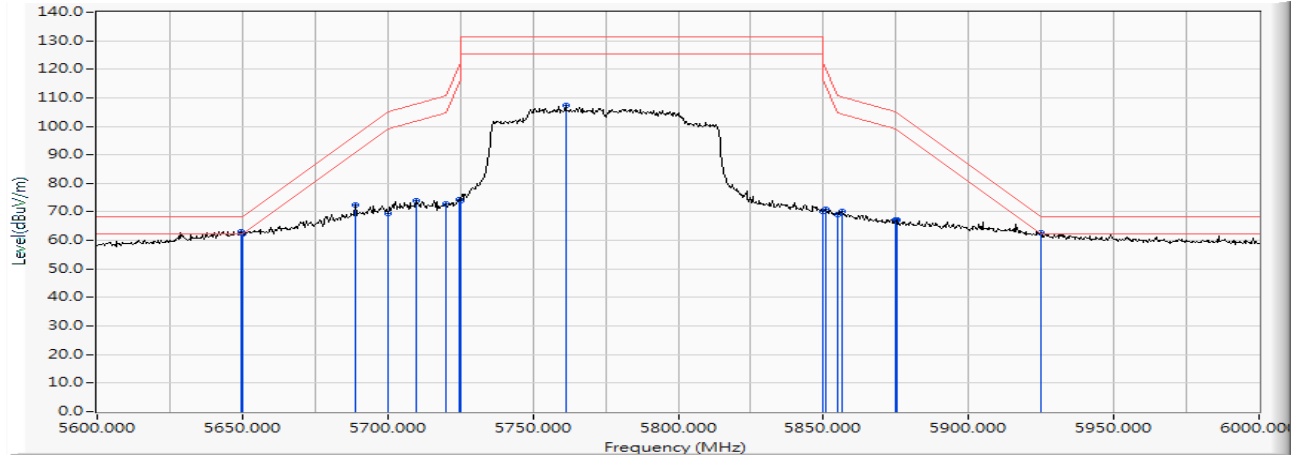

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5649.600	16.446	46.570	63.016	-5.204	68.220	PEAK
2		5650.000	16.447	45.822	62.269	-5.951	68.220	PEAK
3		5688.800	16.487	55.840	72.328	-24.588	96.916	PEAK
4		5700.000	16.502	53.109	69.611	-35.589	105.200	PEAK
5		5709.600	16.515	57.474	73.989	-33.899	107.888	PEAK
6		5720.000	16.535	56.183	72.718	-38.082	110.800	PEAK
7		5724.400	16.543	57.786	74.329	-46.503	120.832	PEAK
8		5725.000	16.544	57.366	73.910	-48.290	122.200	PEAK
9		5761.200	16.586	90.806	107.392	--	--	PEAK
10		5850.000	16.748	53.340	70.088	-52.112	122.200	PEAK
11		5850.800	16.750	54.267	71.016	-49.360	120.376	PEAK
12		5855.000	16.758	52.490	69.248	-41.552	110.800	PEAK
13		5856.400	16.761	53.471	70.233	-40.175	110.408	PEAK
14		5875.000	16.807	50.198	67.006	-38.194	105.200	PEAK
15		5875.200	16.808	50.213	67.021	-38.031	105.052	PEAK
16		5925.000	16.920	45.579	62.499	-5.701	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 155 (5775MHz)


Vertical

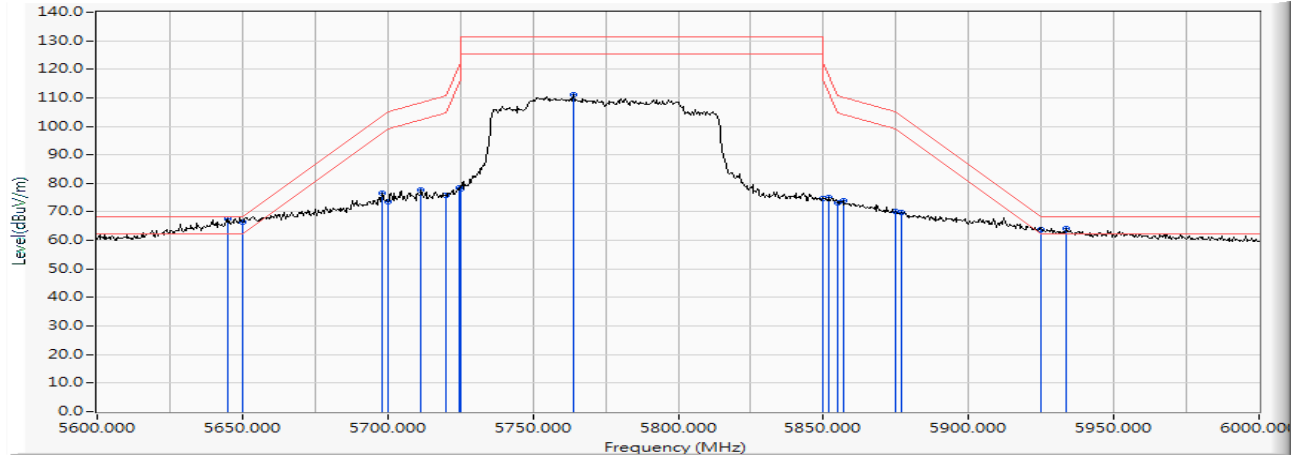

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5645.200	16.434	51.133	67.567	-0.653	68.220	PEAK
2		5650.000	16.447	49.861	66.308	-1.912	68.220	PEAK
3		5698.000	16.499	60.216	76.715	-27.006	103.721	PEAK
4		5700.000	16.502	57.058	73.560	-31.640	105.200	PEAK
5		5711.600	16.518	61.070	77.589	-30.859	108.448	PEAK
6		5720.000	16.535	59.337	75.872	-34.928	110.800	PEAK
7		5724.400	16.543	61.750	78.293	-42.539	120.832	PEAK
8		5725.000	16.544	61.560	78.104	-44.096	122.200	PEAK
9		5764.000	16.589	94.362	110.952	--	--	PEAK
10		5850.000	16.748	57.875	74.623	-47.577	122.200	PEAK
11		5851.600	16.750	58.266	75.017	-43.535	118.552	PEAK
12		5855.000	16.758	56.369	73.127	-37.673	110.800	PEAK
13		5856.800	16.763	57.353	74.116	-36.180	110.296	PEAK
14		5875.000	16.807	53.204	70.012	-35.188	105.200	PEAK
15		5876.800	16.813	53.064	69.877	-33.991	103.868	PEAK
16		5925.000	16.920	47.037	63.957	-4.243	68.200	PEAK
17		5933.600	16.929	47.354	64.283	-3.917	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Horizontal

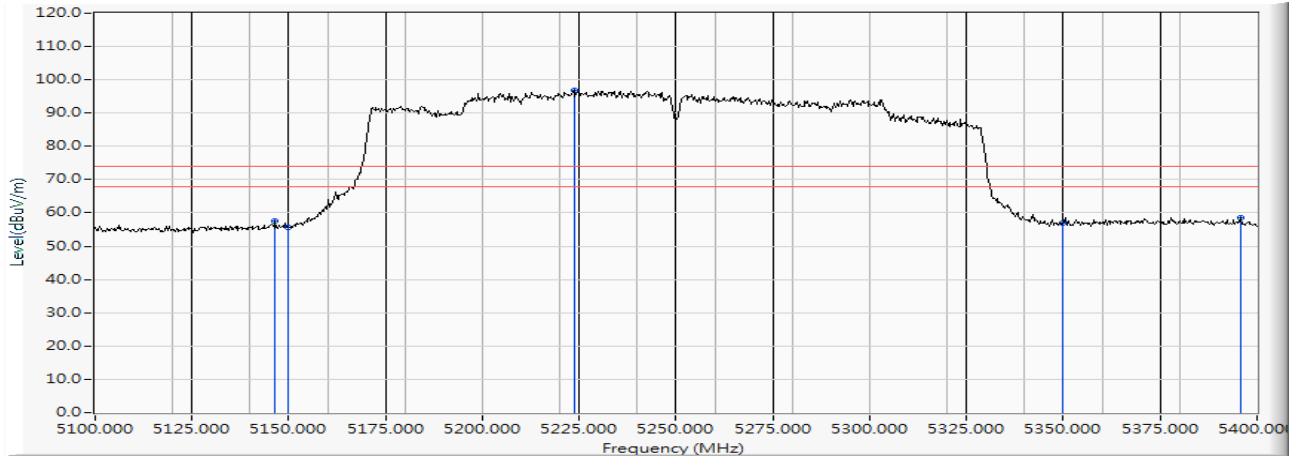


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5146.500	15.287	42.287	57.574	-16.426	74.000	PEAK
2		5150.000	15.307	40.343	55.650	-18.350	74.000	PEAK
3	*	5223.600	15.587	81.122	96.709	--	--	PEAK
4		5350.000	15.912	41.030	56.942	-17.058	74.000	PEAK
5		5395.800	16.024	42.659	58.683	-15.317	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Horizontal

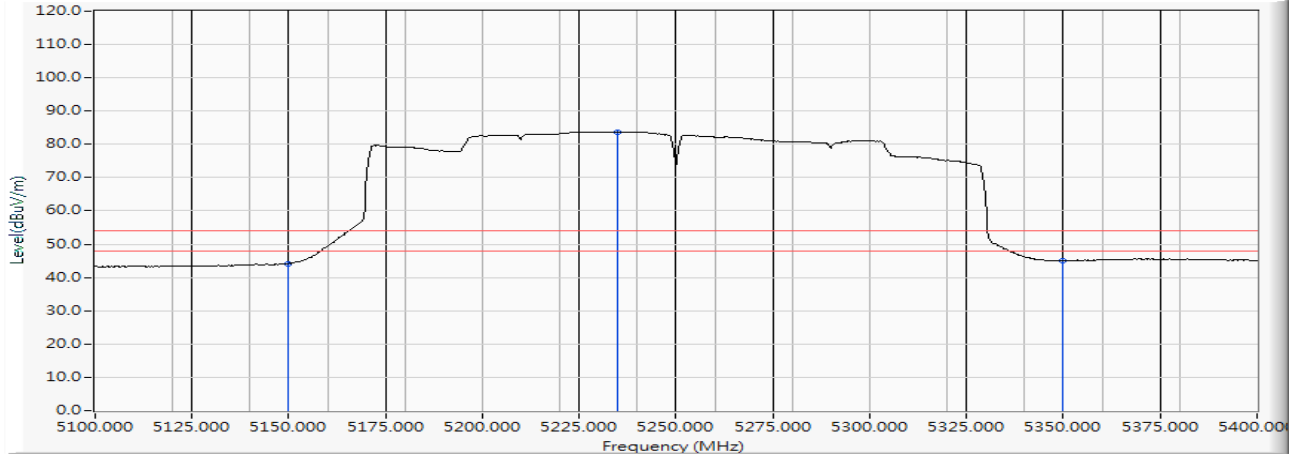


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	28.904	44.211	-9.789	54.000	AVERAGE
2	*	5235.000	15.618	68.155	83.773	--	--	AVERAGE
3		5350.000	15.912	29.035	44.947	-9.053	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Vertical

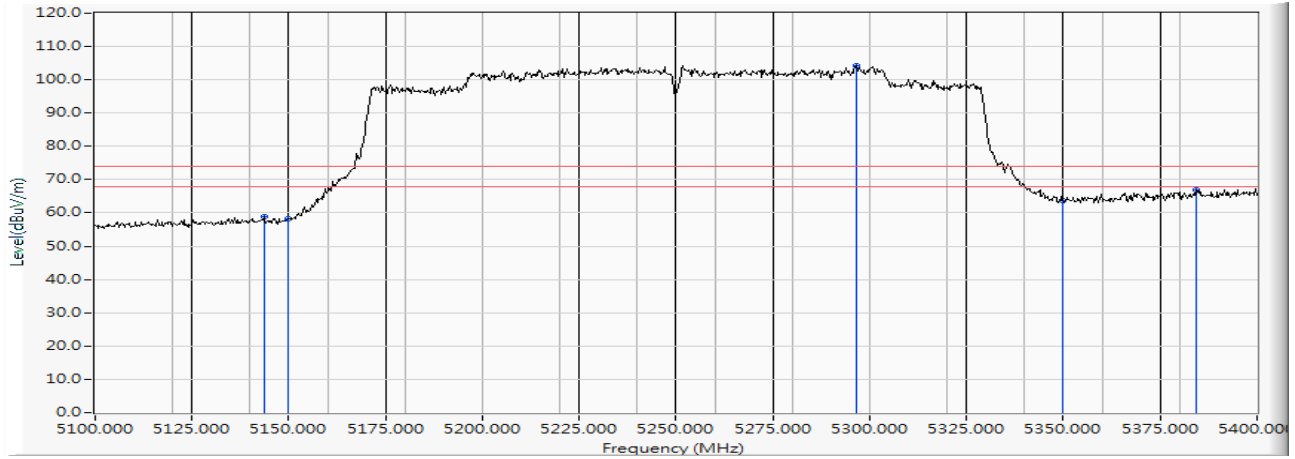


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5143.500	15.270	43.469	58.739	-15.261	74.000	PEAK
2		5150.000	15.307	42.839	58.146	-15.854	74.000	PEAK
3	*	5296.500	15.787	88.488	104.275	--	--	PEAK
4		5350.000	15.912	47.685	63.597	-10.403	74.000	PEAK
5		5384.100	16.010	51.013	67.024	-6.976	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Vertical

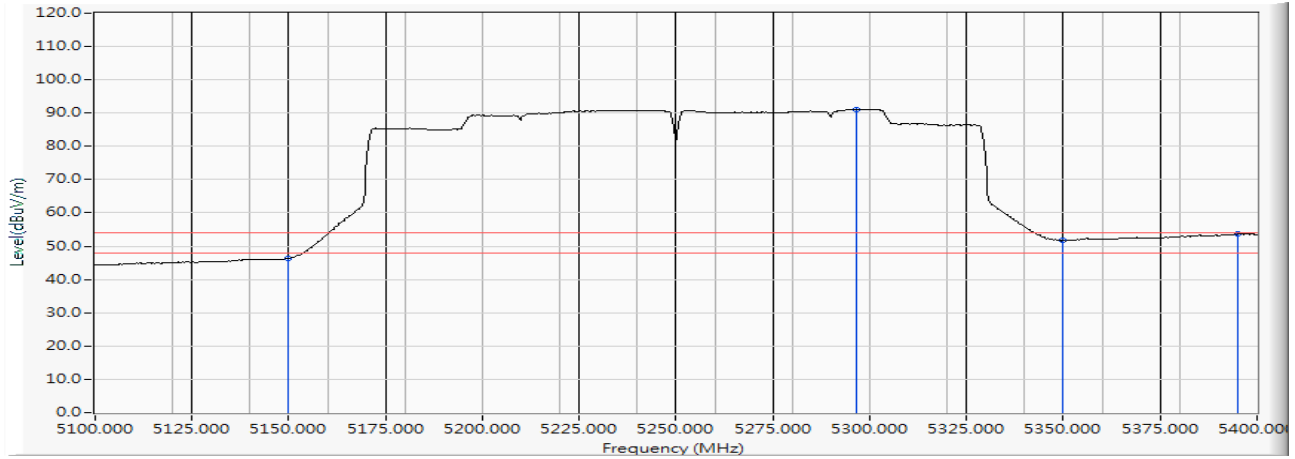


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	31.017	46.324	-7.676	54.000	AVERAGE
2	*	5296.500	15.787	75.346	91.133	--	--	AVERAGE
3		5350.000	15.912	35.751	51.663	-2.337	54.000	AVERAGE
4		5395.200	16.024	37.739	53.762	-0.238	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Horizontal

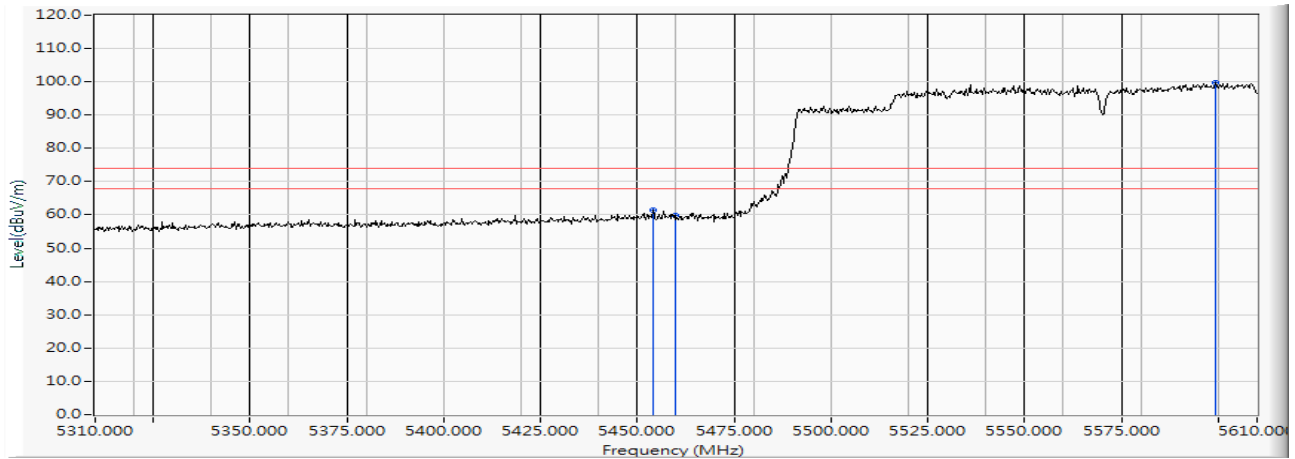


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5454.000	16.170	45.170	61.340	-12.660	74.000	PEAK
2		5460.000	16.185	43.577	59.762	-14.238	74.000	PEAK
3	*	5599.200	16.383	83.207	99.590	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Horizontal

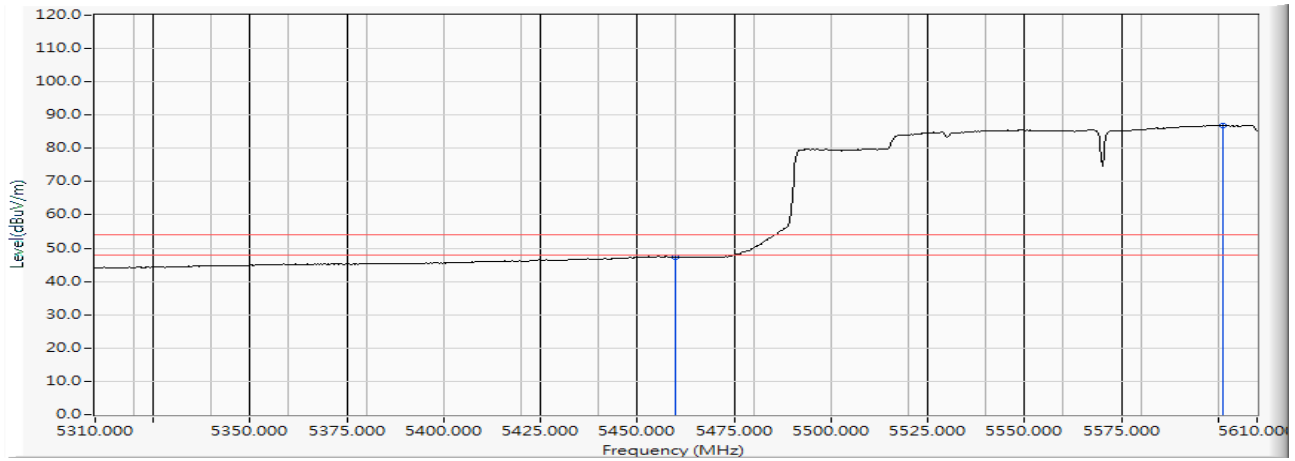


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	31.093	47.278	-6.722	54.000	AVERAGE
2	*	5601.000	16.385	70.528	86.912	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Vertical

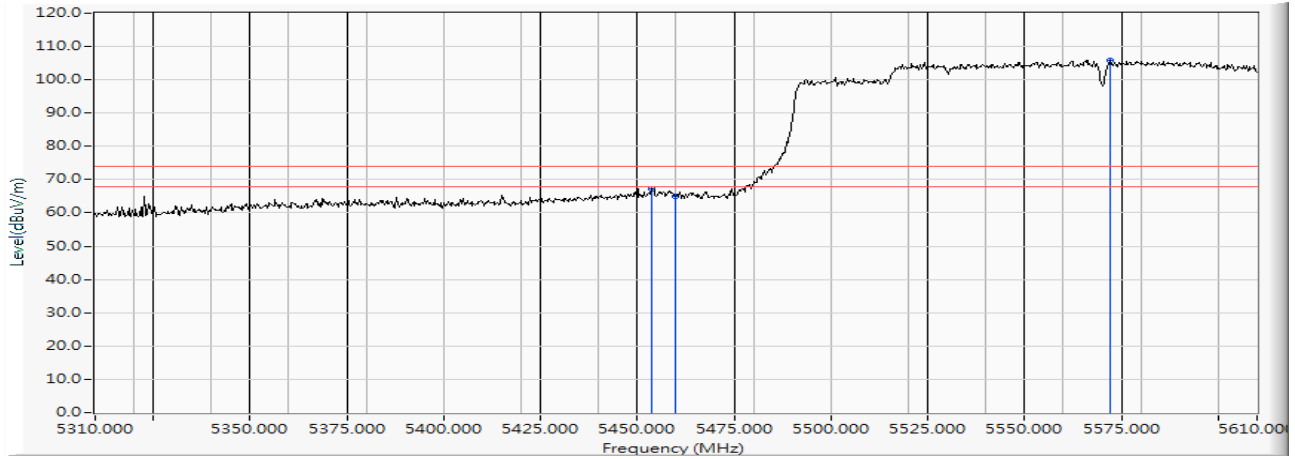


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5453.700	16.169	51.117	67.286	-6.714	74.000	PEAK
2		5460.000	16.185	48.960	65.145	-8.855	74.000	PEAK
3	*	5571.900	16.344	89.581	105.925	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Vertical

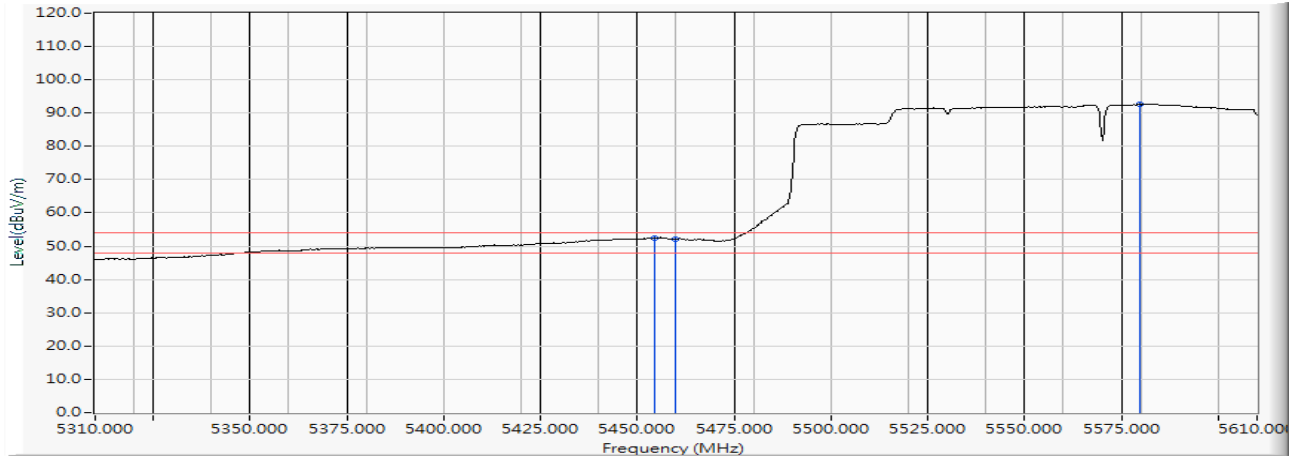


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5454.600	16.172	36.267	52.439	-1.561	54.000	AVERAGE
2		5460.000	16.185	35.804	51.989	-2.011	54.000	AVERAGE
3	*	5579.700	16.362	76.295	92.657	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)


Horizontal

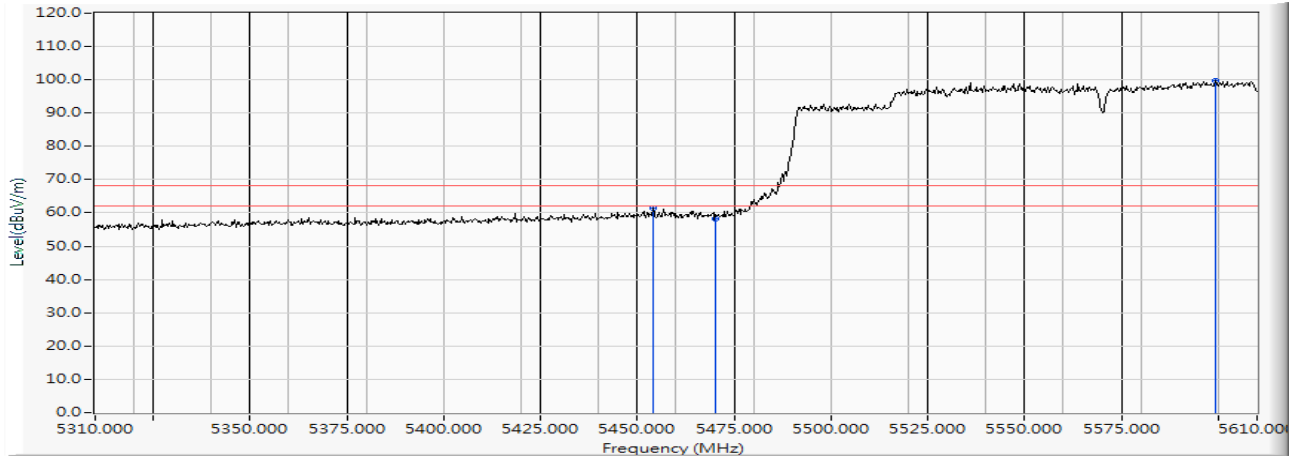

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5454.000	16.170	45.170	61.340	-6.880	68.220	PEAK
2	5470.000	16.200	42.148	58.348	-9.872	68.220	PEAK
3	* 5599.200	16.383	83.207	99.590	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/26
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)


Vertical

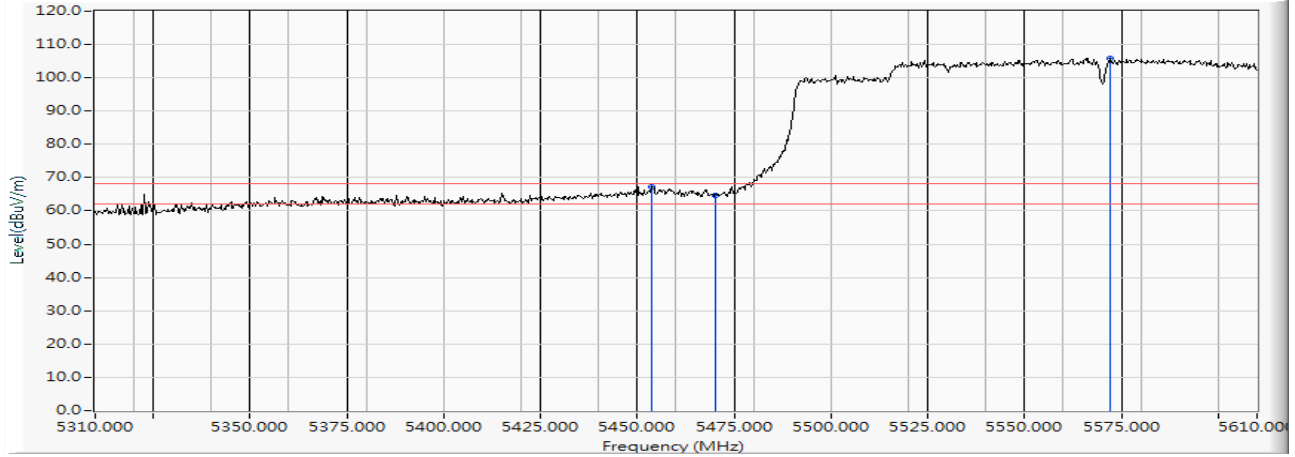

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5453.700	16.169	51.117	67.286	-0.934	68.220	PEAK
2		5470.000	16.200	48.450	64.650	-3.570	68.220	PEAK
3	*	5571.900	16.344	89.581	105.925	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 36 (5180MHz)

Horizontal

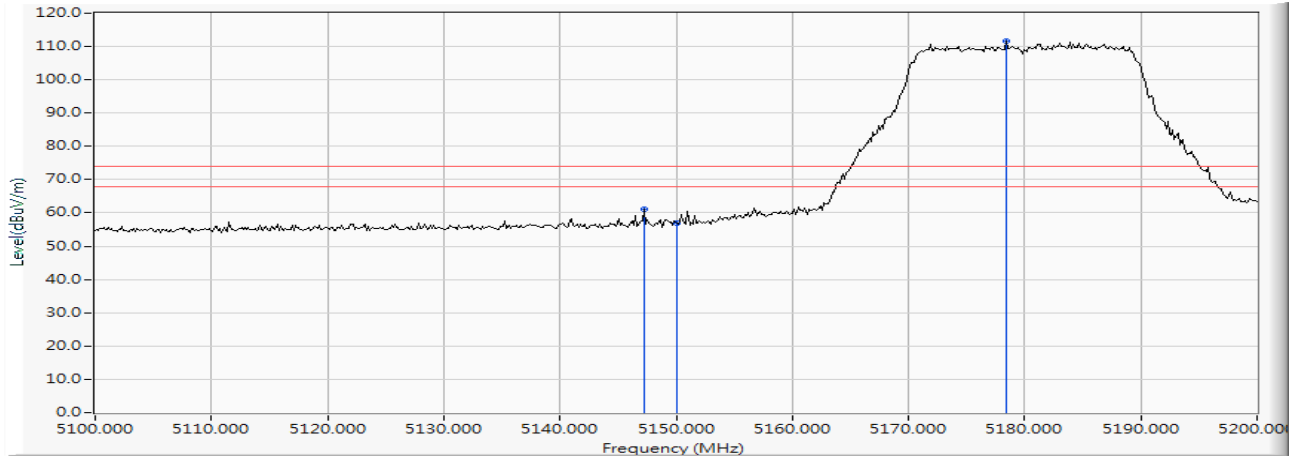


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5147.246	15.291	45.992	61.283	-12.717	74.000	PEAK
2	5150.000	15.307	41.502	56.809	-17.191	74.000	PEAK
3	* 5178.406	15.384	96.359	111.744	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 36 (5180MHz)

Horizontal

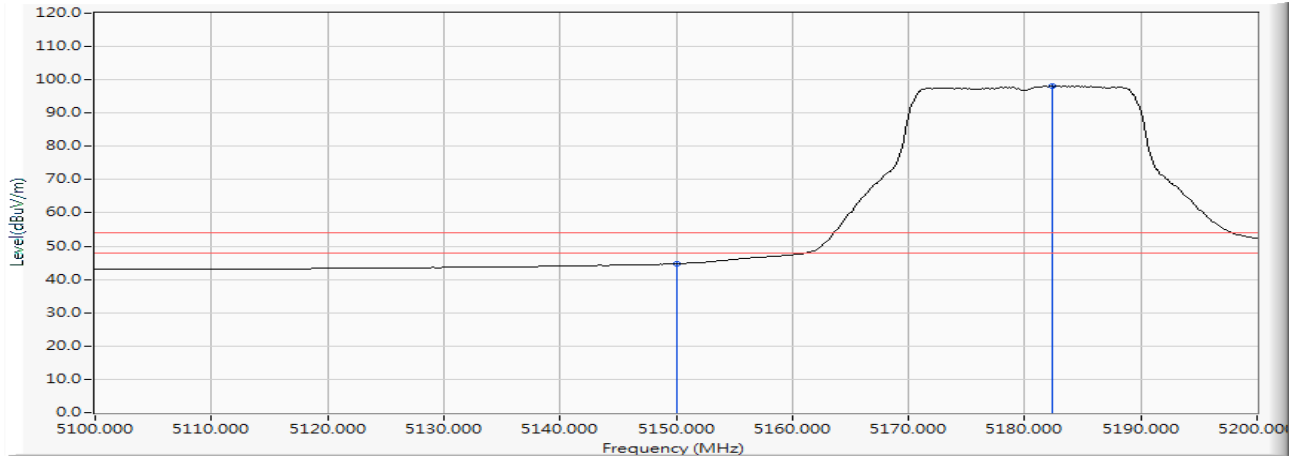


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	29.414	44.721	-9.279	54.000	AVERAGE
2	*	5182.319	15.403	82.720	98.122	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/06/03
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 36 (5180MHz)

Vertical

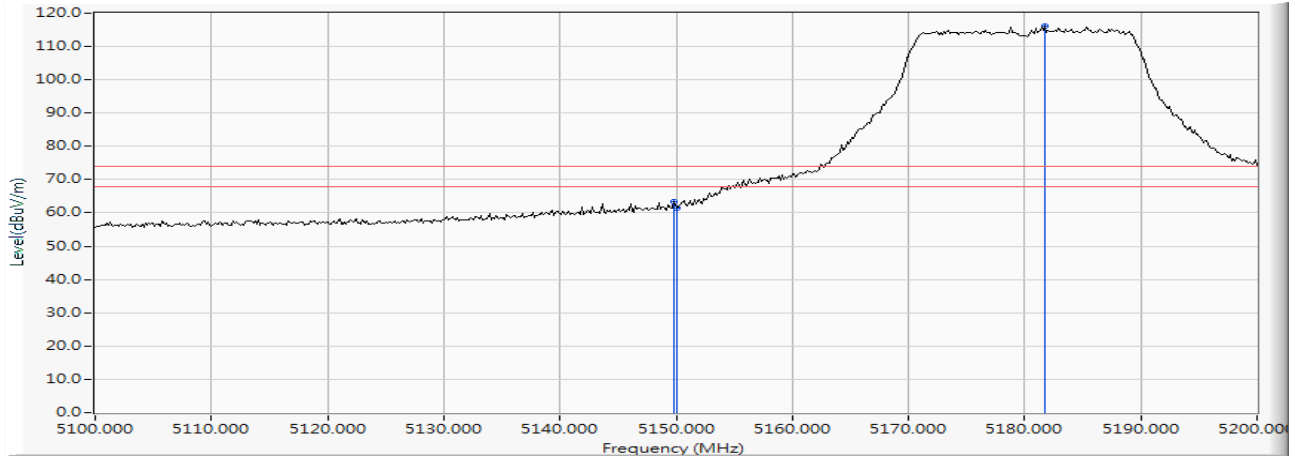


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.855	15.307	47.985	63.291	-10.709	74.000	PEAK
2		5150.000	15.307	46.070	61.377	-12.623	74.000	PEAK
3	*	5181.739	15.400	100.711	116.111	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/06/03
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 36 (5180MHz)

Vertical

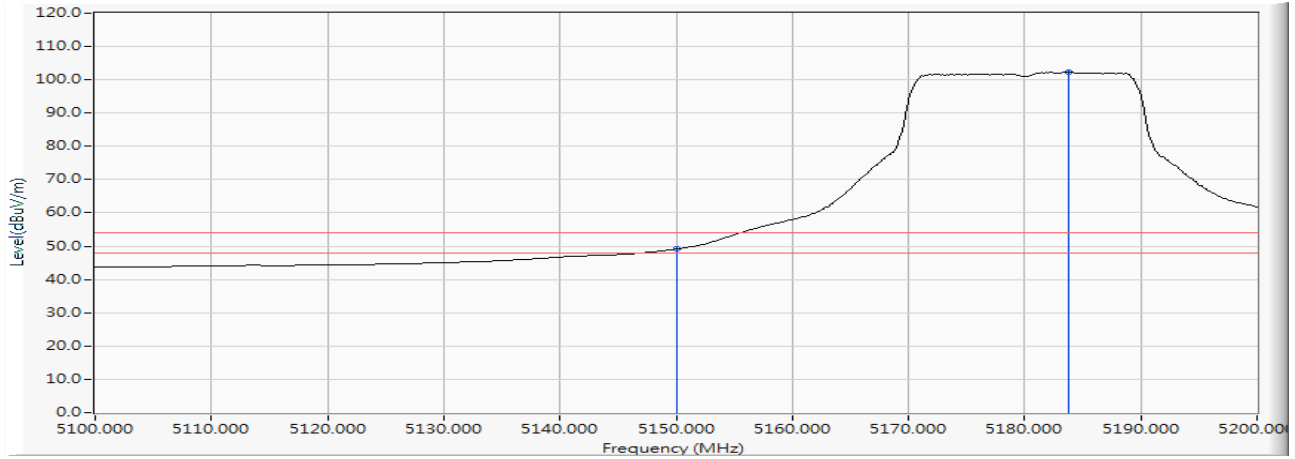


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	33.812	49.119	-4.881	54.000	AVERAGE
2	*	5183.768	15.409	86.901	102.310	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 64 (5320MHz)

Horizontal

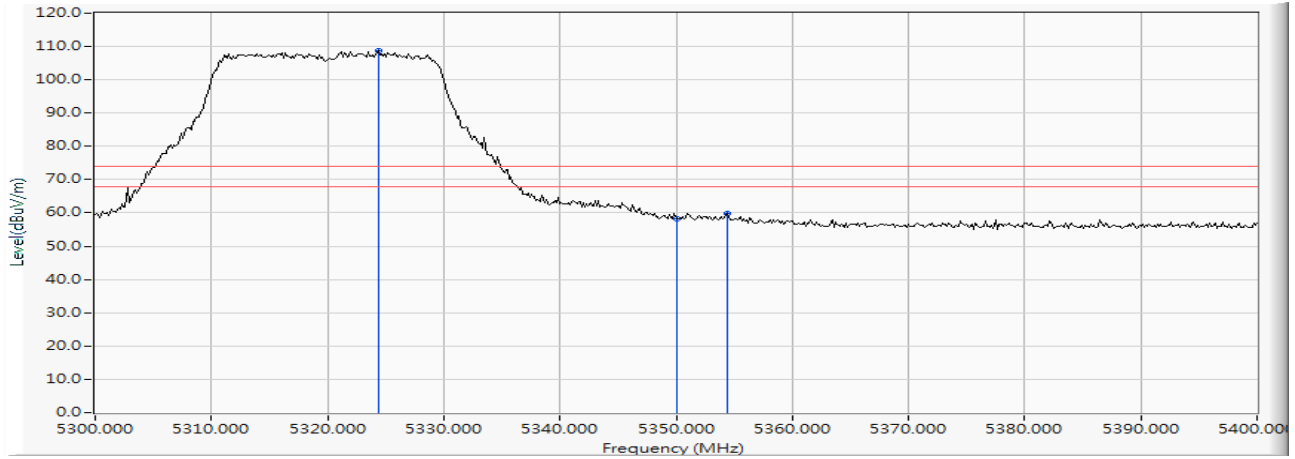


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5324.348	15.863	92.917	108.781	--	--	PEAK
2		5350.000	15.912	42.438	58.350	-15.650	74.000	PEAK
3		5354.348	15.925	43.918	59.844	-14.156	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 64 (5320MHz)

Horizontal

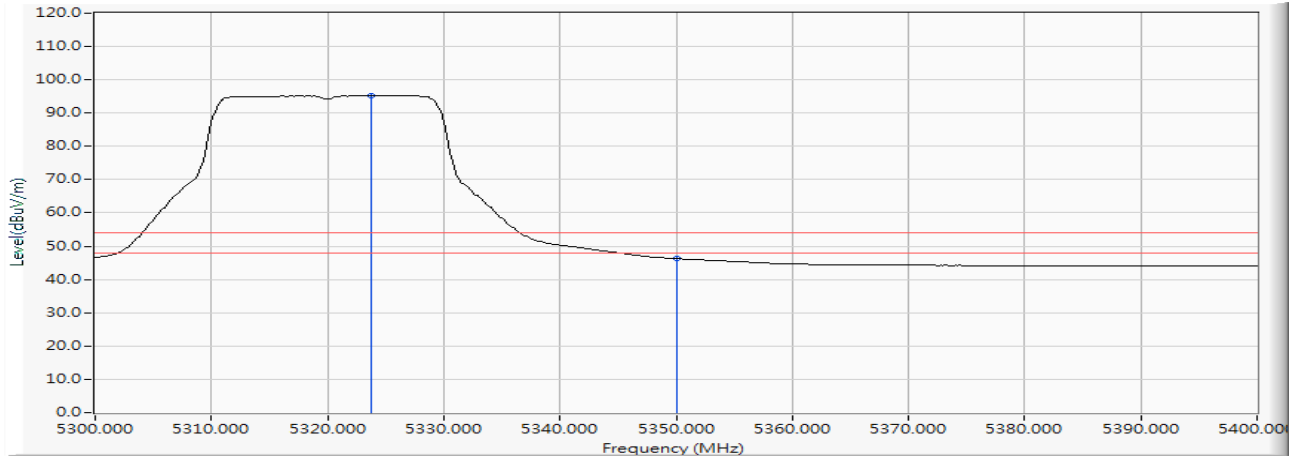


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5323.768	15.862	79.426	95.288	--	--	AVERAGE
2		5350.000	15.912	30.386	46.298	-7.702	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 64 (5320MHz)

Vertical

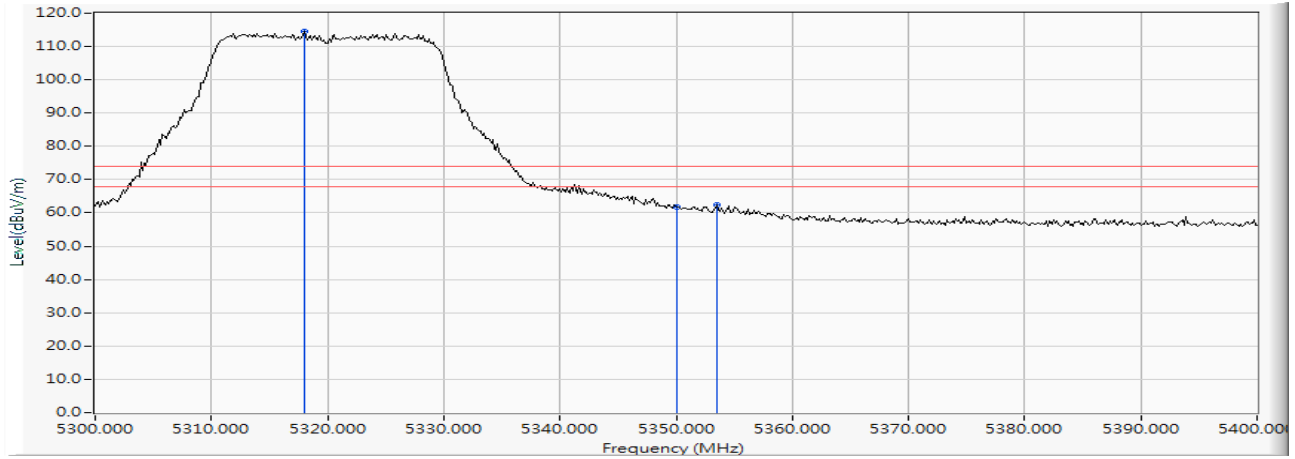


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5317.971	15.843	98.660	114.503	--	--	PEAK
2		5350.000	15.912	45.762	61.674	-12.326	74.000	PEAK
3		5353.478	15.923	46.433	62.356	-11.644	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 64 (5320MHz)

Vertical

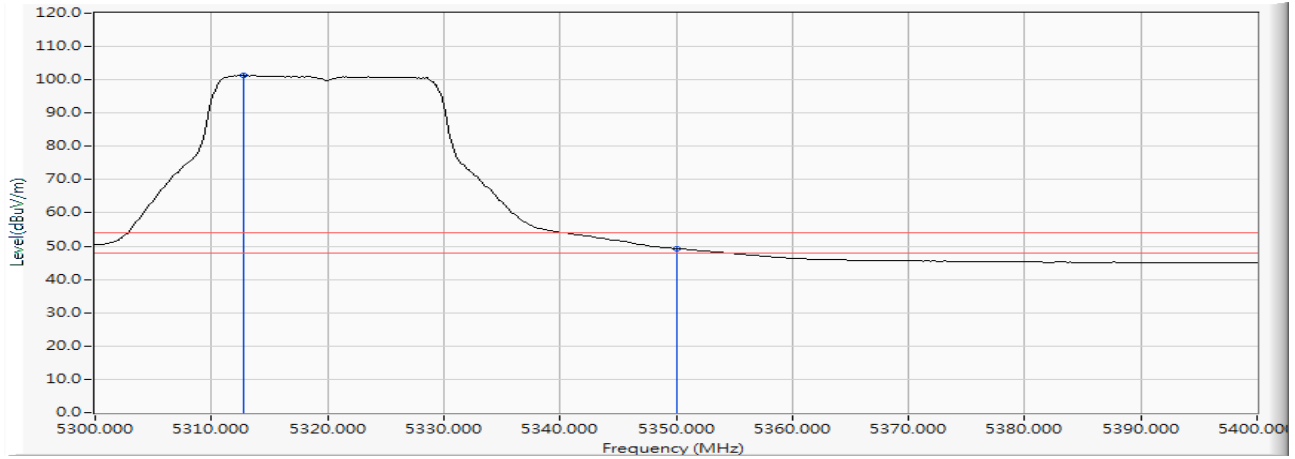


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5312.754	15.827	85.548	101.375	--	--	AVERAGE
2		5350.000	15.912	33.401	49.313	-4.687	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)

Horizontal

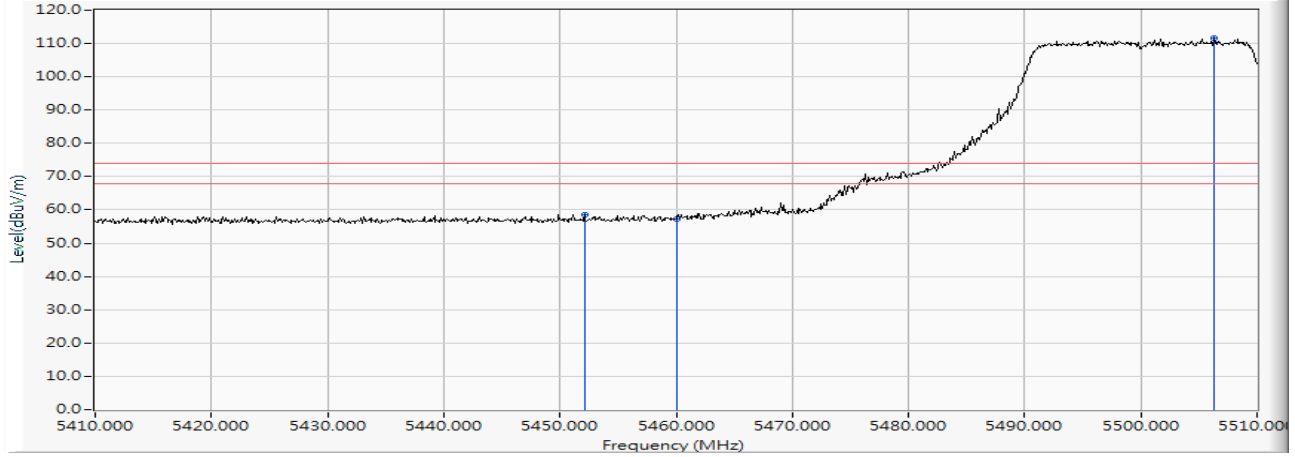


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5452.100	16.164	42.407	58.571	-15.429	74.000	PEAK
2		5460.000	16.185	41.002	57.187	-16.813	74.000	PEAK
3	*	5506.300	16.273	95.246	111.519	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)

Horizontal

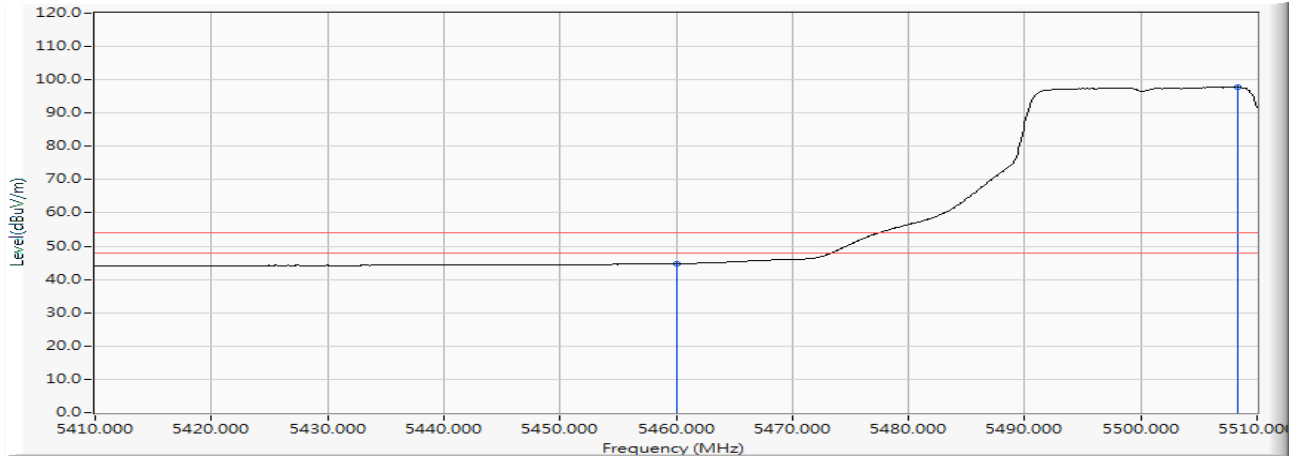


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	28.540	44.725	-9.275	54.000	AVERAGE
2	*	5508.300	16.275	81.612	97.886	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)

Vertical

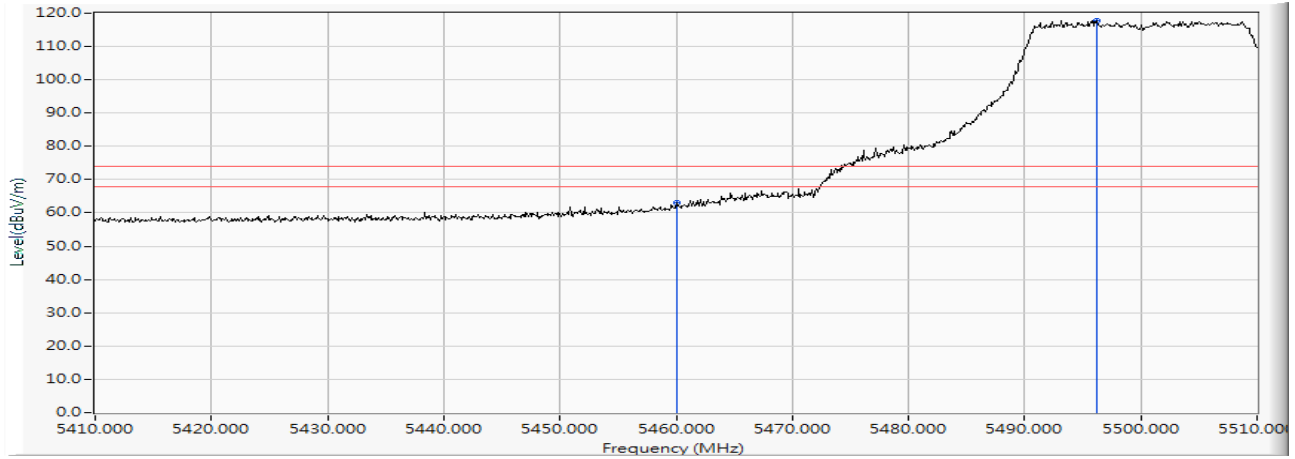


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	46.938	63.123	-10.877	74.000	PEAK
2	*	5496.200	16.265	101.603	117.868	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)

Vertical

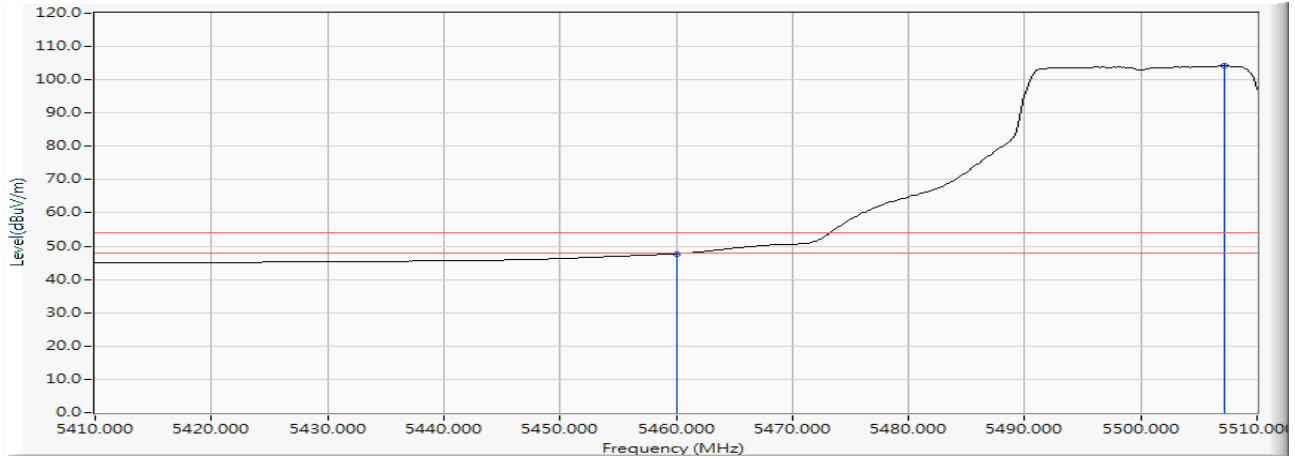


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	31.577	47.762	-6.238	54.000	AVERAGE
2	*	5507.246	16.274	87.905	104.179	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)


Horizontal

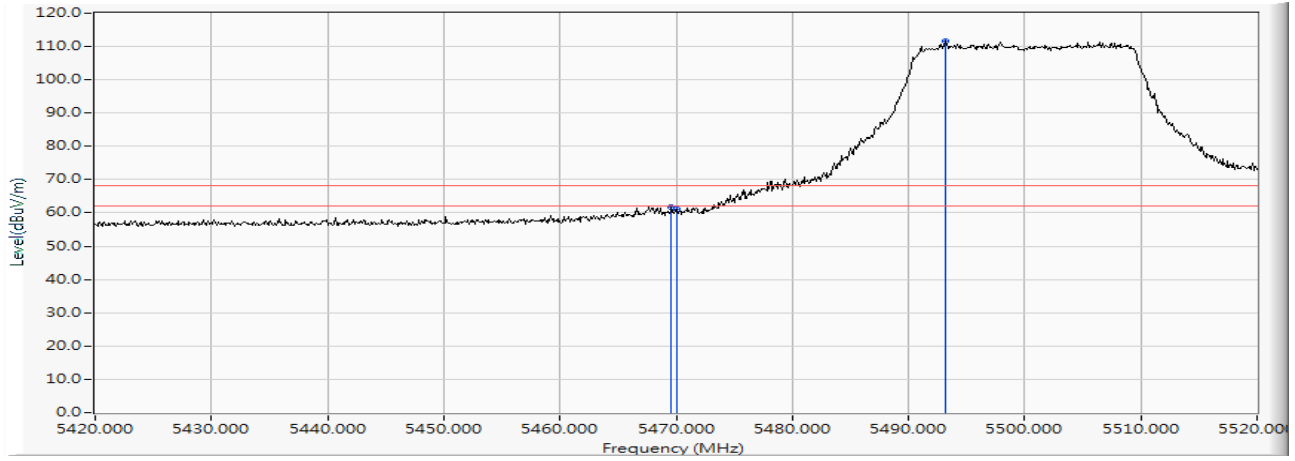

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5469.600	16.199	45.605	61.804	-6.416	68.220	PEAK
2		5470.000	16.200	44.858	61.058	-7.162	68.220	PEAK
3	*	5493.200	16.261	95.343	111.603	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)


Vertical

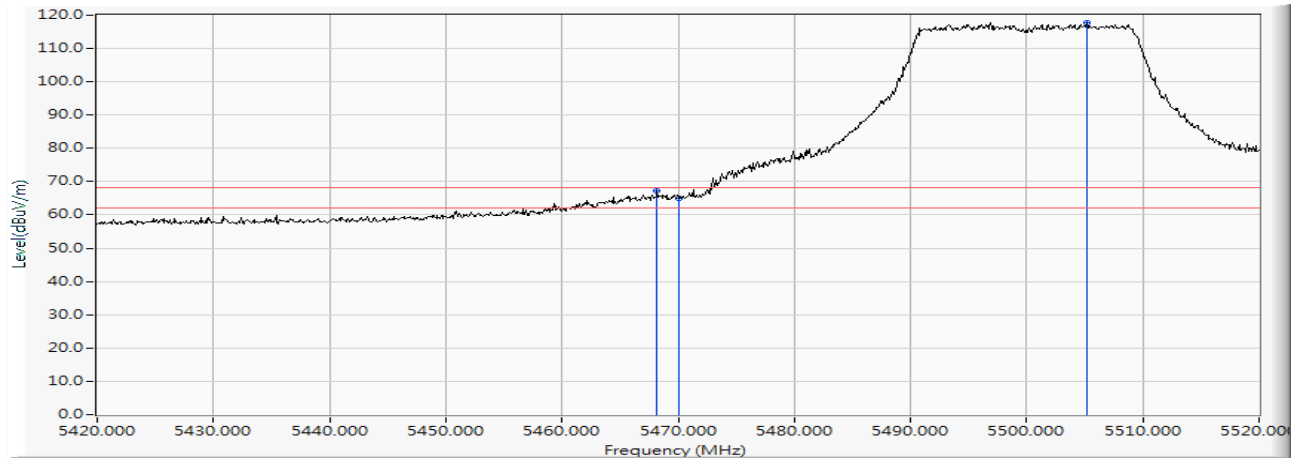

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.200	16.196	50.897	67.094	-1.126	68.220	PEAK
2		5470.000	16.200	48.769	64.969	-3.251	68.220	PEAK
3	*	5505.200	16.272	101.414	117.687	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 140 (5700MHz)


Horizontal

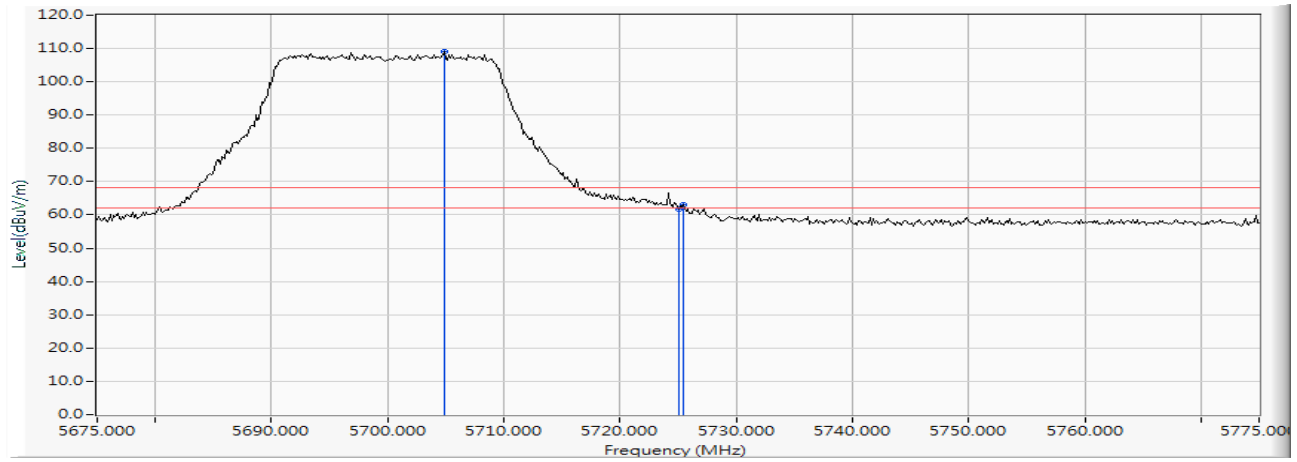

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5704.855	16.508	92.451	108.959	--	--	PEAK
2		5725.000	16.544	45.275	61.819	-6.401	68.220	PEAK
3		5725.435	16.545	46.649	63.194	-5.026	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 140 (5700MHz)


Vertical

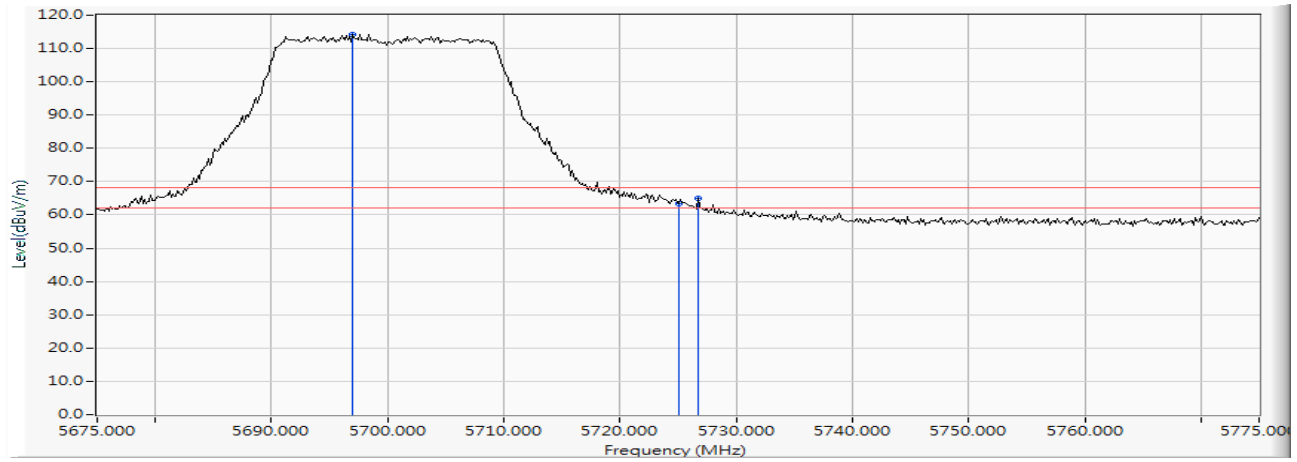

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5697.029	16.497	97.710	114.208	--	--	PEAK
2		5725.000	16.544	46.948	63.492	-4.728	68.220	PEAK
3		5726.739	16.547	48.513	65.060	-3.160	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 149 (5745MHz)


Horizontal

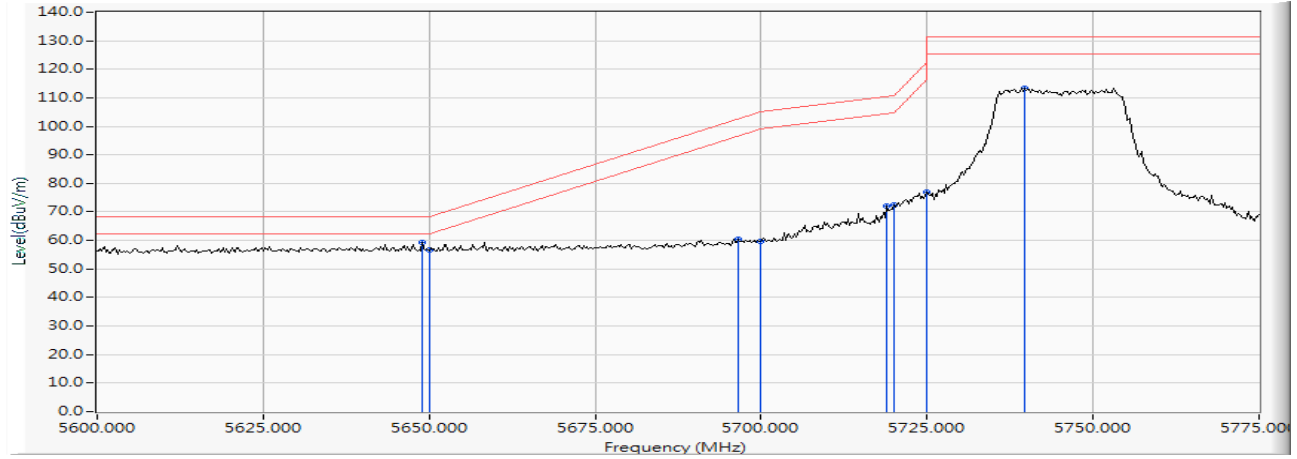

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5648.949	16.444	42.833	59.277	-8.943	68.220	PEAK
2		5650.000	16.447	40.134	56.581	-11.639	68.220	PEAK
3		5696.630	16.497	43.800	60.297	-42.411	102.708	PEAK
4		5700.000	16.502	43.274	59.776	-45.424	105.200	PEAK
5		5718.949	16.533	55.531	72.064	-38.442	110.506	PEAK
6		5720.000	16.535	55.843	72.378	-38.422	110.800	PEAK
7		5725.000	16.544	60.383	76.927	-45.273	122.200	PEAK
8		5739.746	16.556	96.802	113.358	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 149 (5745MHz)


Vertical

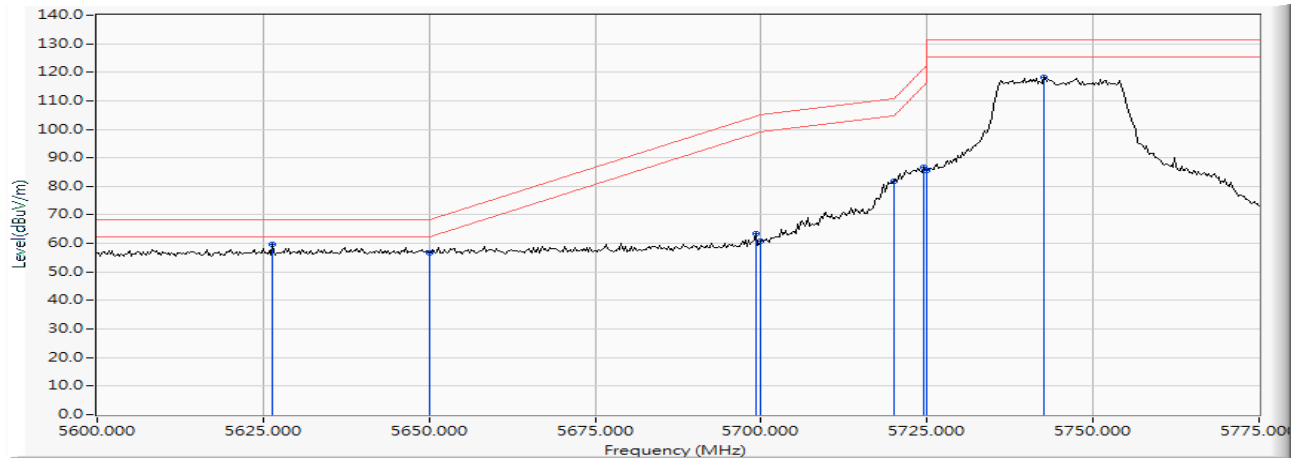

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5626.377	16.408	43.236	59.644	-8.576	68.220	PEAK
2		5650.000	16.447	40.215	56.662	-11.558	68.220	PEAK
3		5699.167	16.500	47.017	63.518	-41.066	104.584	PEAK
4		5700.000	16.502	44.197	60.699	-44.501	105.200	PEAK
5		5720.000	16.535	65.450	81.985	-28.815	110.800	PEAK
6		5724.529	16.543	70.174	86.717	-34.409	121.126	PEAK
7		5725.000	16.544	68.972	85.516	-36.684	122.200	PEAK
8		5742.536	16.557	101.741	118.298	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/31
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 165 (5825MHz)


Horizontal

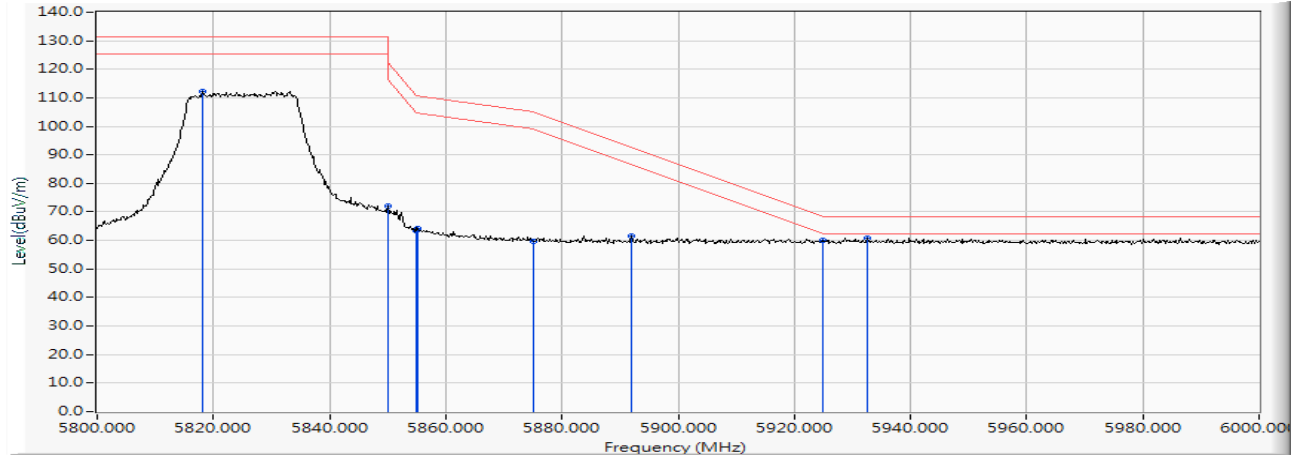

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5818.200	16.702	95.525	112.227	--	--	PEAK
2		5850.000	16.748	55.404	72.152	-50.048	122.200	PEAK
3		5855.000	16.758	46.820	63.578	-47.222	110.800	PEAK
4		5855.200	16.758	47.266	64.025	-46.719	110.744	PEAK
5		5875.000	16.807	42.889	59.697	-45.503	105.200	PEAK
6		5892.000	16.850	44.784	61.634	-30.986	92.620	PEAK
7		5925.000	16.920	43.154	60.074	-8.126	68.200	PEAK
8	*	5932.600	16.928	43.962	60.890	-7.310	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 165 (5825MHz)


Vertical

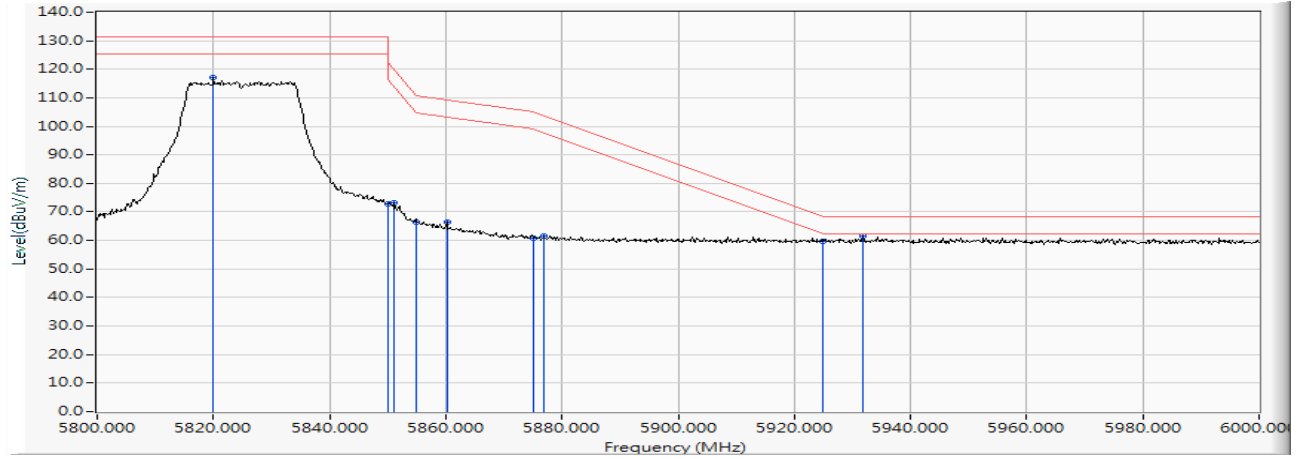

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5820.000	16.705	100.261	116.966	--	--	PEAK
2		5850.000	16.748	55.976	72.724	-49.476	122.200	PEAK
3		5851.000	16.750	56.378	73.128	-46.792	119.920	PEAK
4		5855.000	16.758	49.619	66.377	-44.423	110.800	PEAK
5		5860.200	16.770	49.713	66.484	-42.860	109.344	PEAK
6		5875.000	16.807	43.823	60.631	-44.569	105.200	PEAK
7		5877.000	16.813	44.846	61.659	-42.061	103.720	PEAK
8		5925.000	16.920	42.572	59.492	-8.708	68.200	PEAK
9	*	5931.800	16.927	44.496	61.423	-6.777	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 38 (5190MHz)

Horizontal

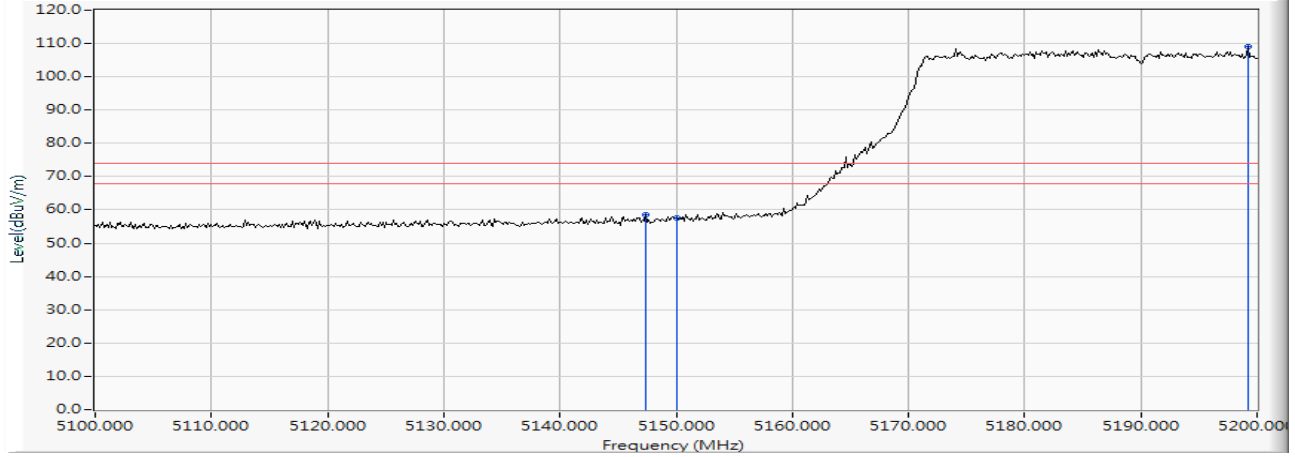


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5147.391	15.292	43.334	58.626	-15.374	74.000	PEAK
2		5150.000	15.307	42.143	57.450	-16.550	74.000	PEAK
3	*	5199.275	15.470	93.598	109.068	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 38 (5190MHz)

Horizontal

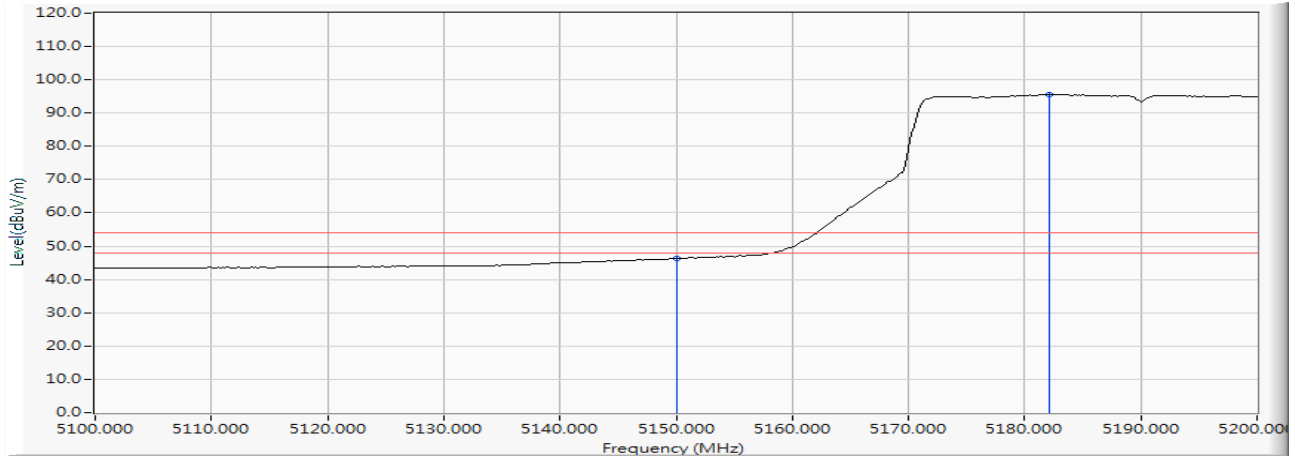


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	31.027	46.334	-7.666	54.000	AVERAGE
2	*	5182.174	15.401	80.262	95.664	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 38 (5190MHz)

Vertical

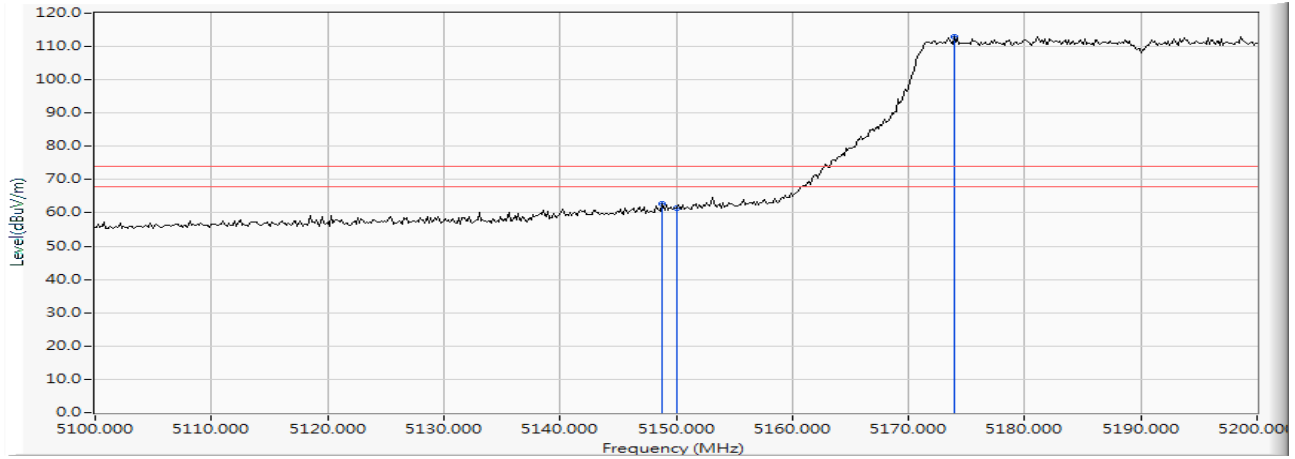


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.841	15.300	47.565	62.865	-11.135	74.000	PEAK
2		5150.000	15.307	46.255	61.562	-12.438	74.000	PEAK
3	*	5173.913	15.365	97.500	112.865	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 38 (5190MHz)

Vertical

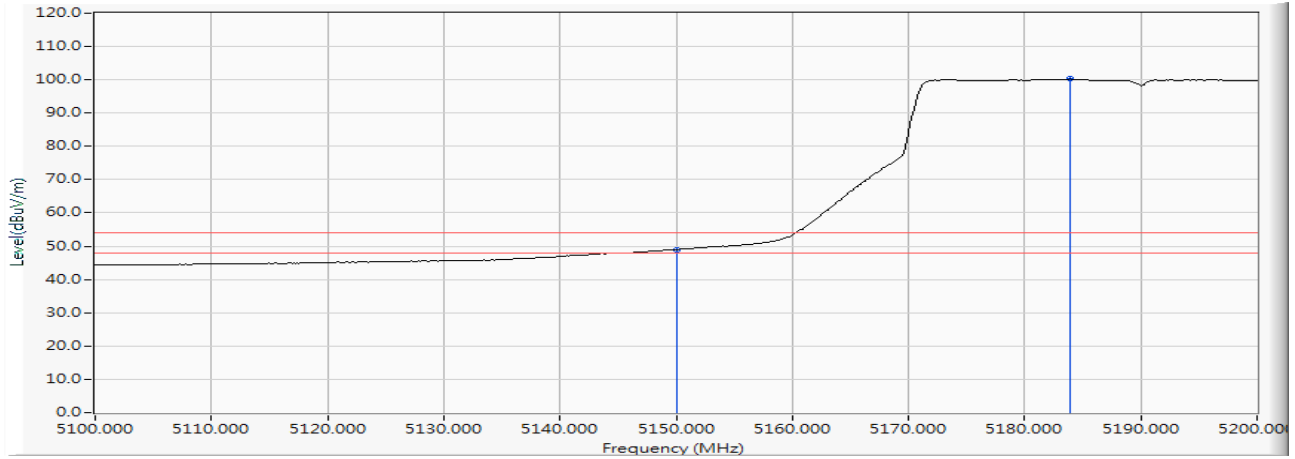


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	33.705	49.012	-4.988	54.000	AVERAGE
2	*	5183.913	15.410	84.824	100.233	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 62 (5310MHz)

Horizontal

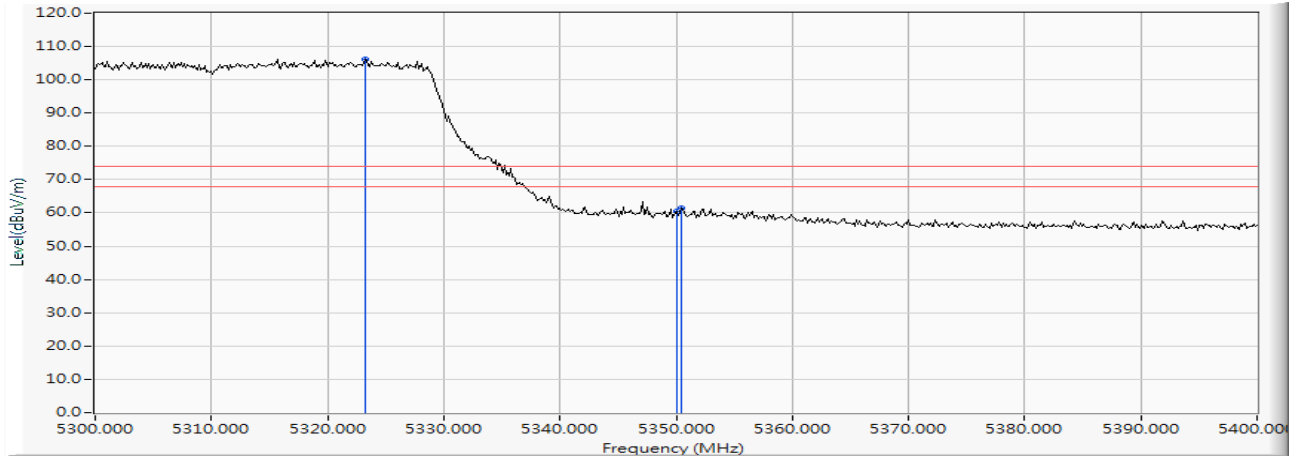


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5323.188	15.860	90.255	106.115	--	--	PEAK
2		5350.000	15.912	44.544	60.456	-13.544	74.000	PEAK
3		5350.435	15.914	45.566	61.479	-12.521	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 62 (5310MHz)

Horizontal

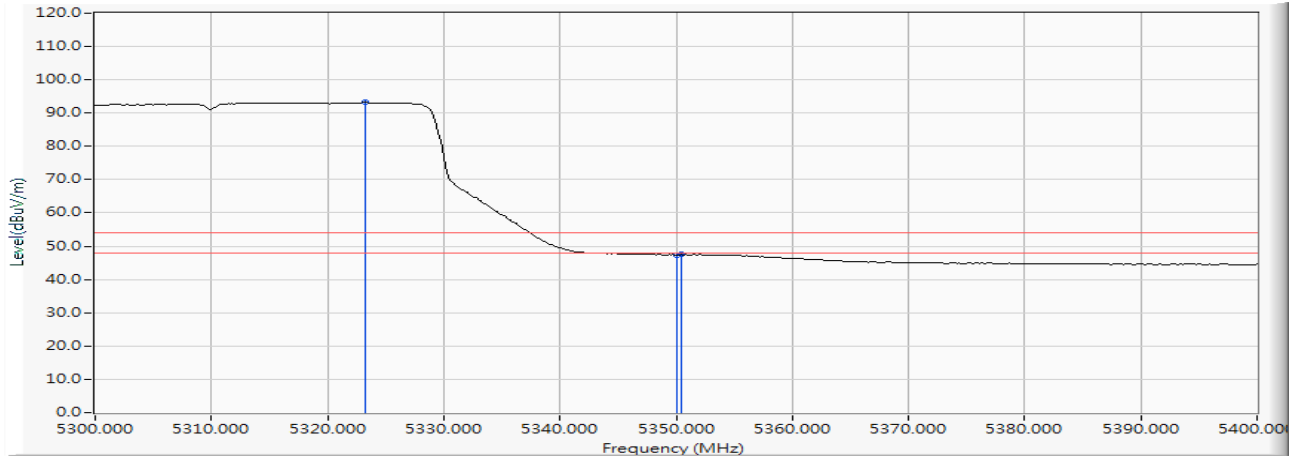


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5323.188	15.860	77.317	93.177	--	--	AVERAGE
2		5350.000	15.912	31.537	47.449	-6.551	54.000	AVERAGE
3		5350.435	15.914	31.565	47.478	-6.522	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 62 (5310MHz)

Vertical

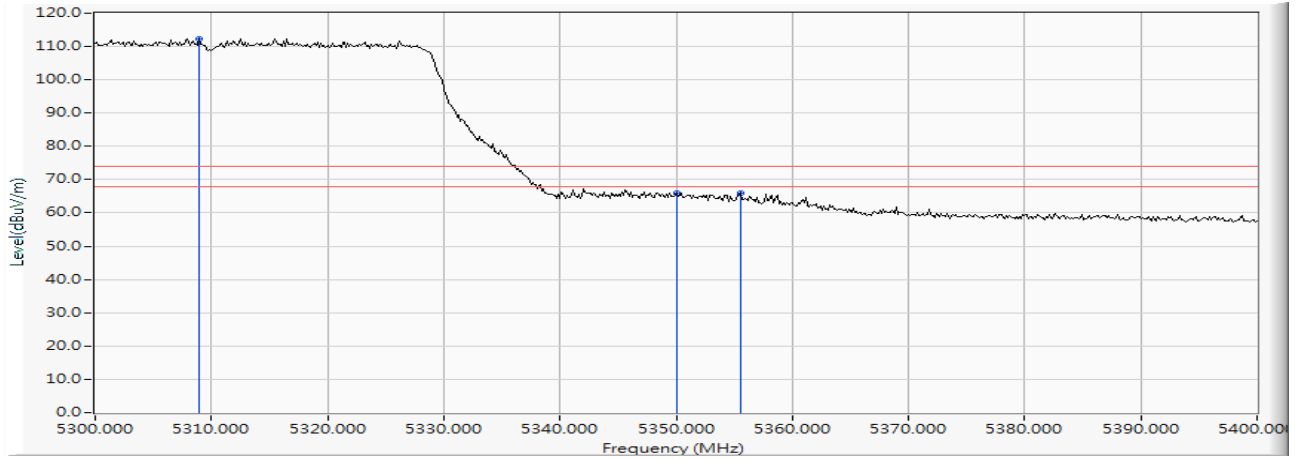


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5308.986	15.818	96.570	112.388	--	--	PEAK
2		5350.000	15.912	50.008	65.920	-8.080	74.000	PEAK
3		5355.507	15.930	50.120	66.049	-7.951	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 62 (5310MHz)

Vertical

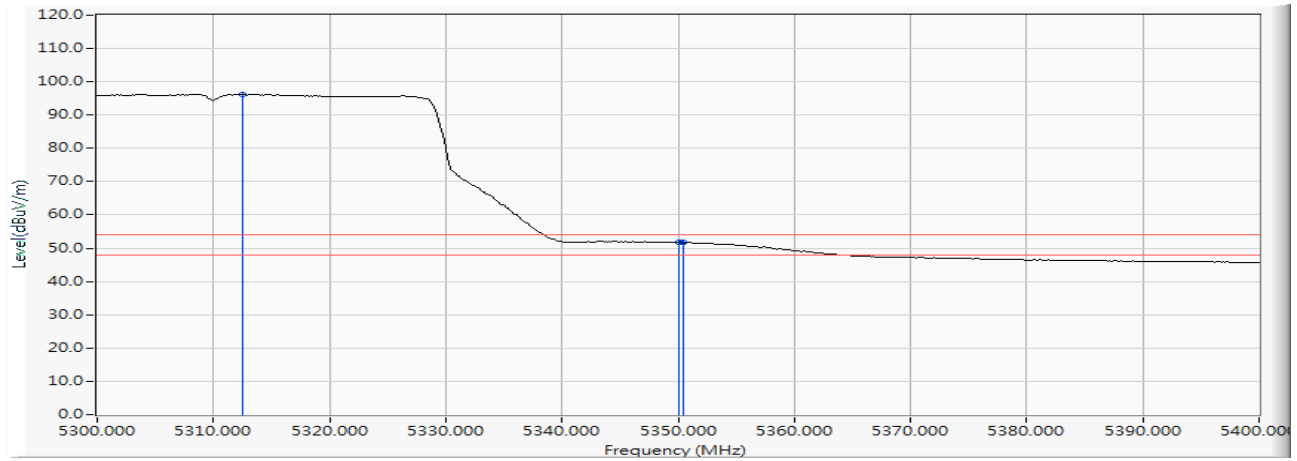


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5312.464	15.826	80.453	96.279	--	--	AVERAGE
2		5350.000	15.912	35.754	51.666	-2.334	54.000	AVERAGE
3		5350.435	15.914	35.853	51.766	-2.234	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)

Horizontal

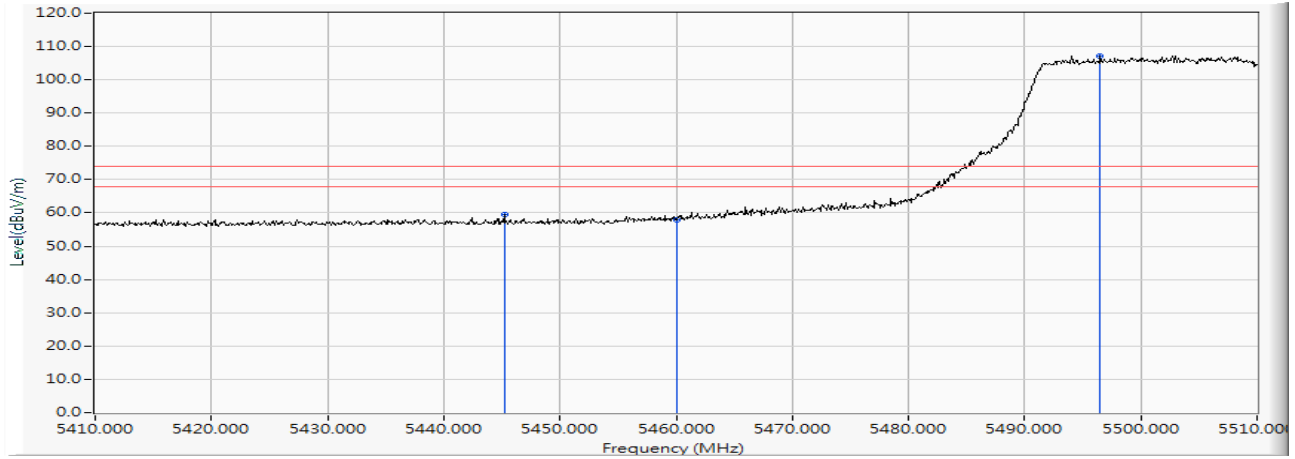


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5445.200	16.141	43.279	59.420	-14.580	74.000	PEAK
2		5460.000	16.185	41.754	57.939	-16.061	74.000	PEAK
3	*	5496.500	16.266	91.020	107.286	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)

Horizontal

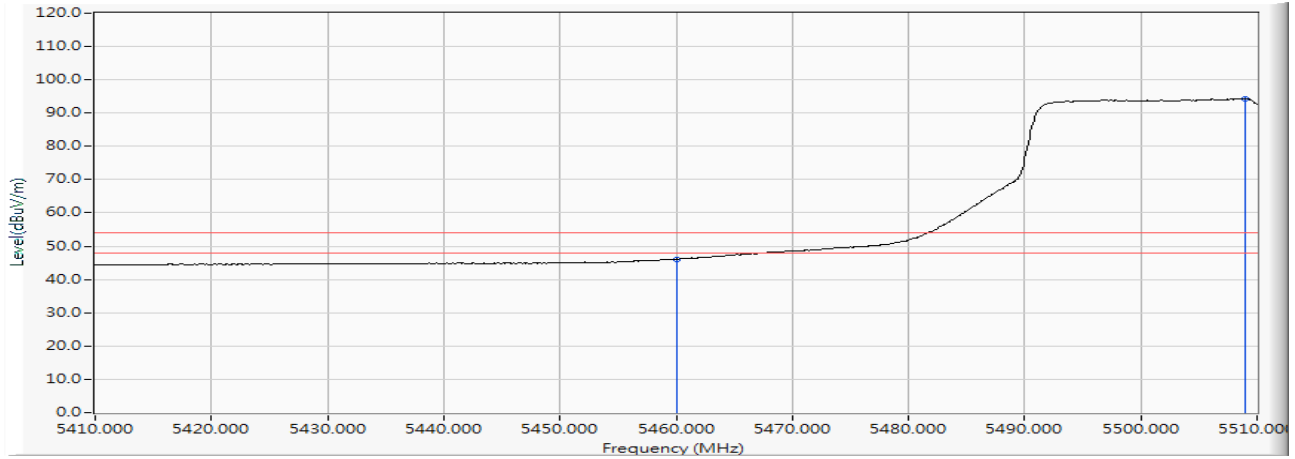


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	29.951	46.136	-7.864	54.000	AVERAGE
2	*	5509.000	16.274	78.060	94.334	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)

Vertical

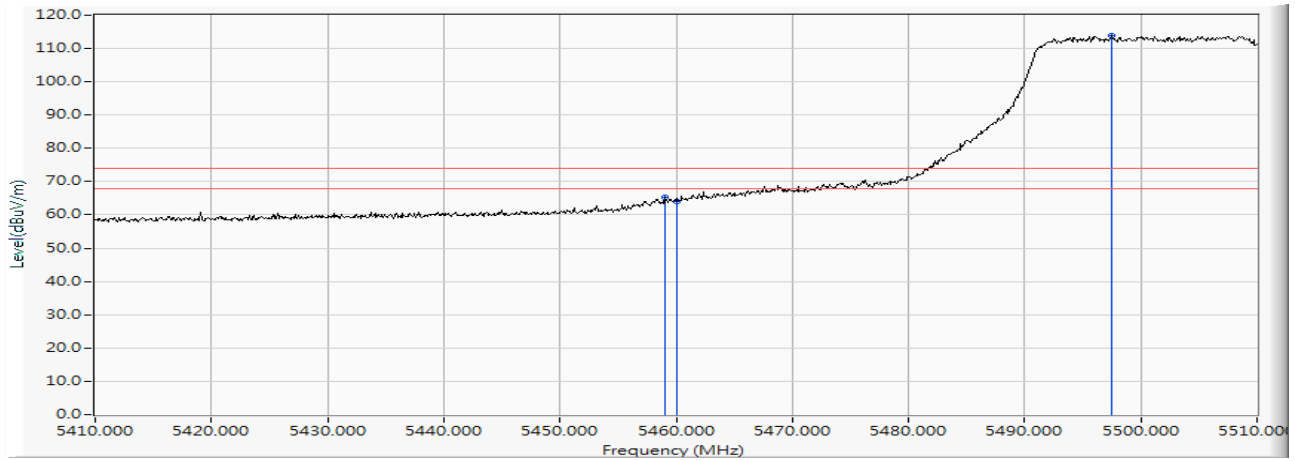


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5459.000	16.183	49.038	65.221	-8.779	74.000	PEAK
2		5460.000	16.185	47.890	64.075	-9.925	74.000	PEAK
3	*	5497.500	16.267	97.554	113.821	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)

Vertical

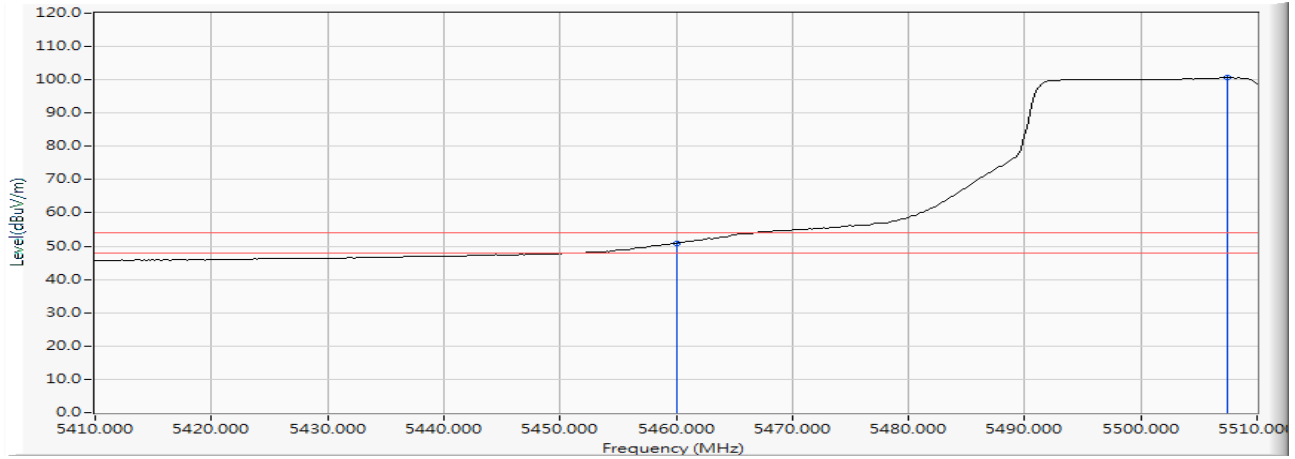


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	34.779	50.964	-3.036	54.000	AVERAGE
2	*	5507.391	16.274	84.472	100.746	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)


Horizontal

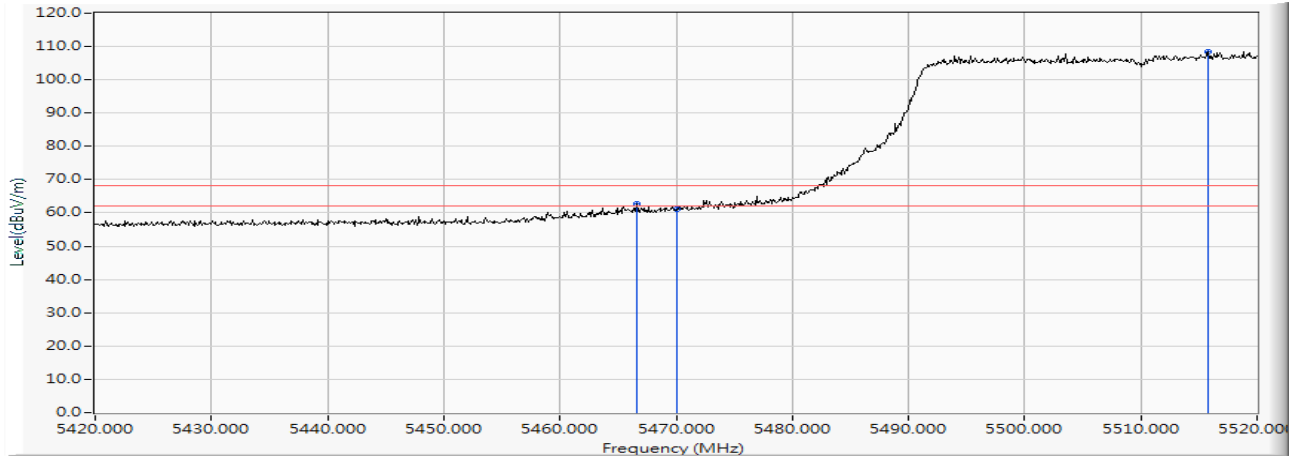

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5466.600	16.194	46.551	62.745	-5.475	68.220	PEAK
2		5470.000	16.200	44.949	61.149	-7.071	68.220	PEAK
3	*	5515.800	16.285	92.158	108.443	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)


Vertical

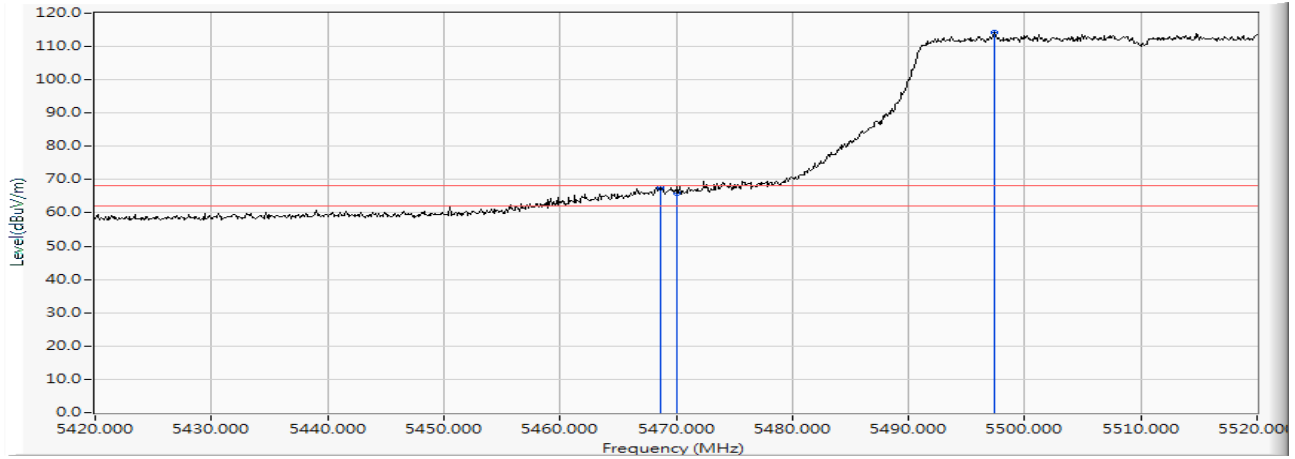

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.600	16.197	51.450	67.647	-0.573	68.220	PEAK
2		5470.000	16.200	49.845	66.045	-2.175	68.220	PEAK
3	*	5497.400	16.267	97.830	114.097	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/31
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 134 (5670MHz)


Horizontal

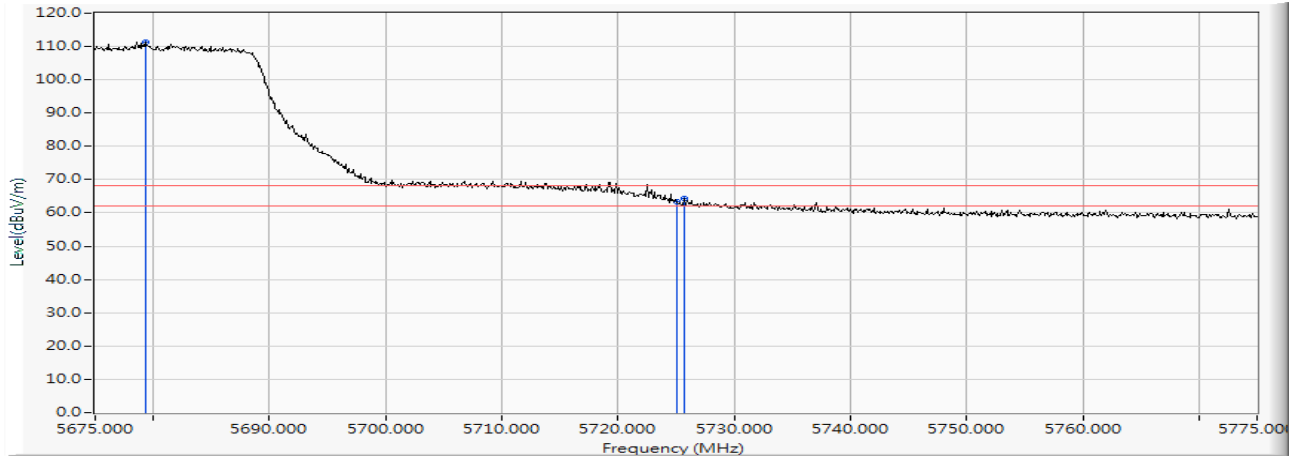

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5679.300	16.477	94.874	111.351	--	--	PEAK
2		5725.000	16.544	46.781	63.325	-4.895	68.220	PEAK
3		5725.700	16.546	47.756	64.301	-3.919	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/31
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 134 (5670MHz)


Vertical

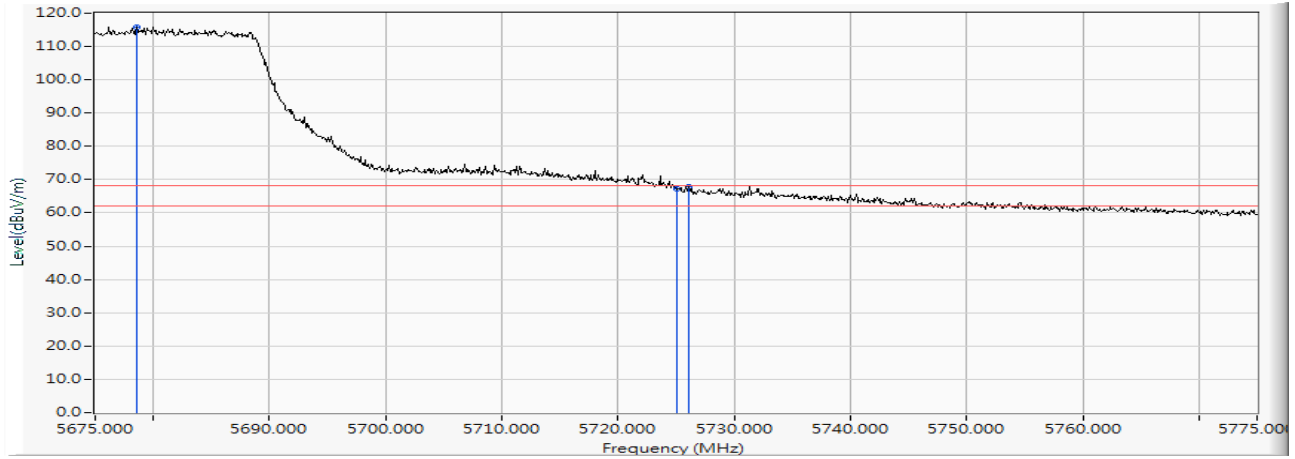

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5678.600	16.476	99.450	115.926	--	--	PEAK
2		5725.000	16.544	50.713	67.257	-0.963	68.220	PEAK
3		5726.100	16.546	51.465	68.011	-0.209	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 151 (5755MHz)


Horizontal

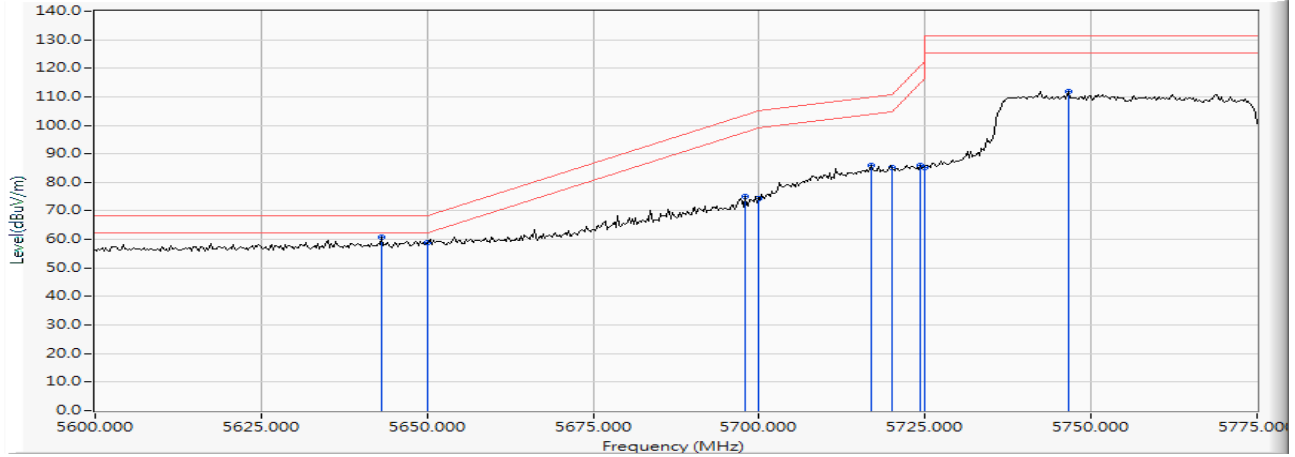

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5643.116	16.429	44.217	60.645	-7.575	68.220	PEAK
2		5650.000	16.447	42.378	58.825	-9.395	68.220	PEAK
3		5697.898	16.499	58.556	75.055	-28.590	103.645	PEAK
4		5700.000	16.502	57.965	74.467	-30.733	105.200	PEAK
5		5716.920	16.529	69.382	85.911	-24.027	109.938	PEAK
6		5720.000	16.535	68.505	85.040	-25.760	110.800	PEAK
7		5724.275	16.543	69.446	85.989	-34.558	120.547	PEAK
8		5725.000	16.544	68.840	85.384	-36.816	122.200	PEAK
9		5746.594	16.562	95.156	111.719	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 151 (5755MHz)


Vertical

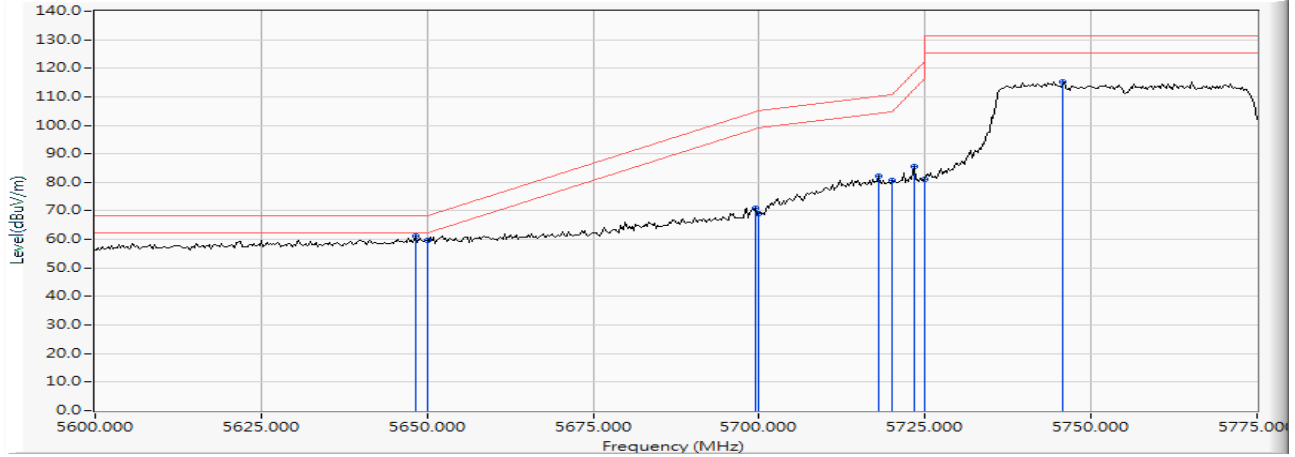

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5648.188	16.442	44.906	61.348	-6.872	68.220	PEAK
2		5650.000	16.447	43.230	59.677	-8.543	68.220	PEAK
3		5699.420	16.501	54.538	71.039	-33.732	104.771	PEAK
4		5700.000	16.502	52.676	69.178	-36.022	105.200	PEAK
5		5717.935	16.532	65.794	82.325	-27.897	110.222	PEAK
6		5720.000	16.535	64.005	80.540	-30.260	110.800	PEAK
7		5723.261	16.541	69.121	85.662	-32.573	118.235	PEAK
8		5725.000	16.544	64.709	81.253	-40.947	122.200	PEAK
9		5745.833	16.562	98.780	115.341	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/31
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 159 (5795MHz)


Horizontal

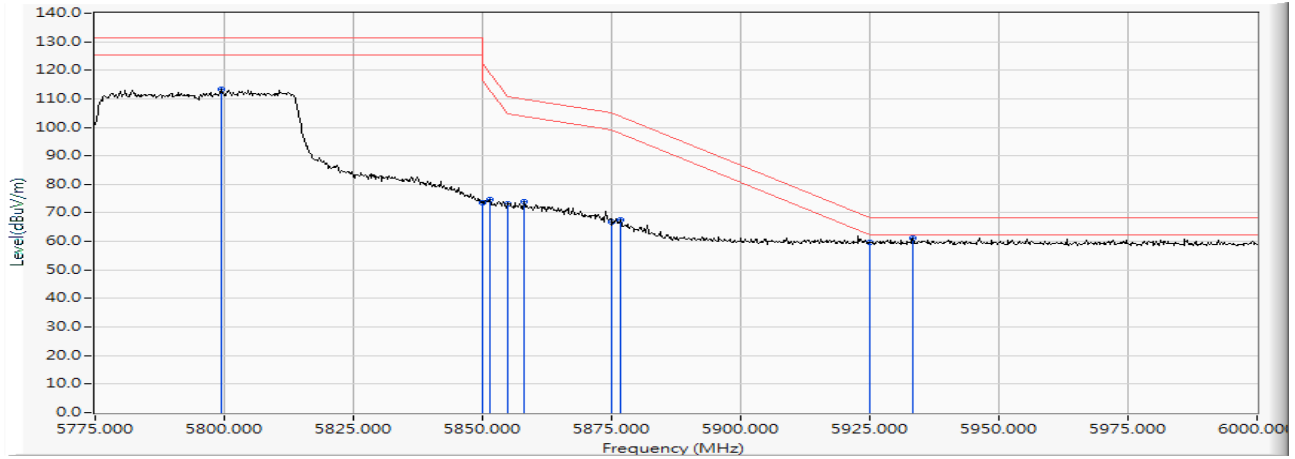

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5799.300	16.658	96.869	113.527	--	--	PEAK
2	5850.000	16.748	56.835	73.583	-48.617	122.200	PEAK
3	5851.500	16.750	58.114	74.865	-43.915	118.780	PEAK
4	5855.000	16.758	56.498	73.256	-37.544	110.800	PEAK
5	5858.025	16.766	57.201	73.966	-35.987	109.953	PEAK
6	5875.000	16.807	50.152	66.960	-38.240	105.200	PEAK
7	5876.700	16.811	50.776	67.588	-36.354	103.942	PEAK
8	5925.000	16.920	42.652	59.572	-8.628	68.200	PEAK
9	* 5933.400	16.929	44.374	61.303	-6.897	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/31
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 159 (5795MHz)


Vertical

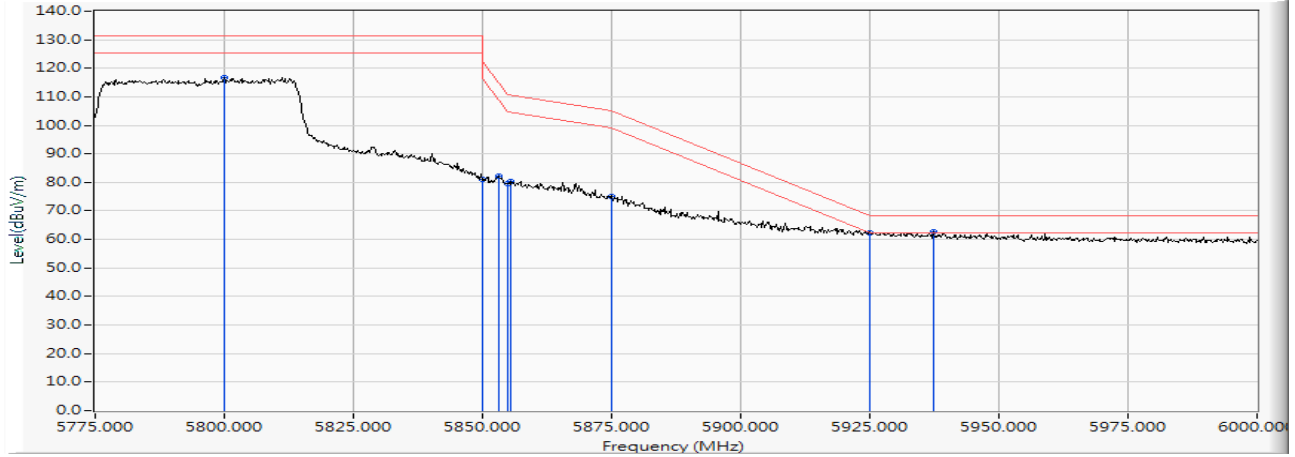

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5799.975	16.660	100.058	116.718	--	--	PEAK
2		5850.000	16.748	64.141	80.889	-41.311	122.200	PEAK
3		5853.075	16.754	65.489	82.243	-32.946	115.189	PEAK
4		5855.000	16.758	62.954	79.712	-31.088	110.800	PEAK
5		5855.550	16.760	63.723	80.483	-30.163	110.646	PEAK
6		5875.000	16.807	58.179	74.987	-30.213	105.200	PEAK
7		5925.000	16.920	45.440	62.360	-5.840	68.200	PEAK
8	*	5937.225	16.933	45.792	62.725	-5.475	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 42 (5210MHz)

Horizontal

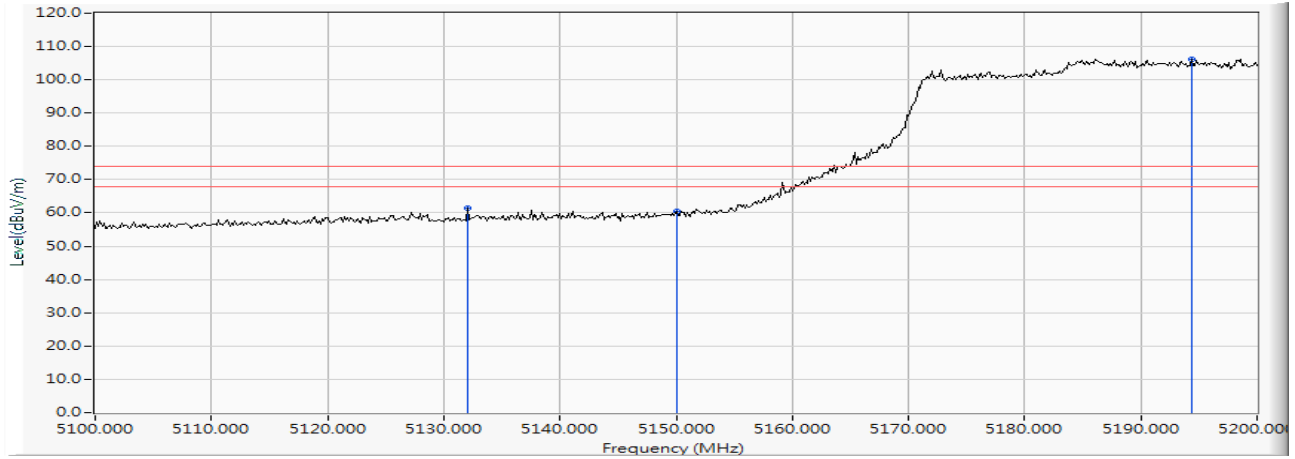


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5132.029	15.209	46.324	61.533	-12.467	74.000	PEAK
2		5150.000	15.307	45.065	60.372	-13.628	74.000	PEAK
3	*	5194.348	15.452	90.749	106.200	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 42 (5210MHz)

Horizontal

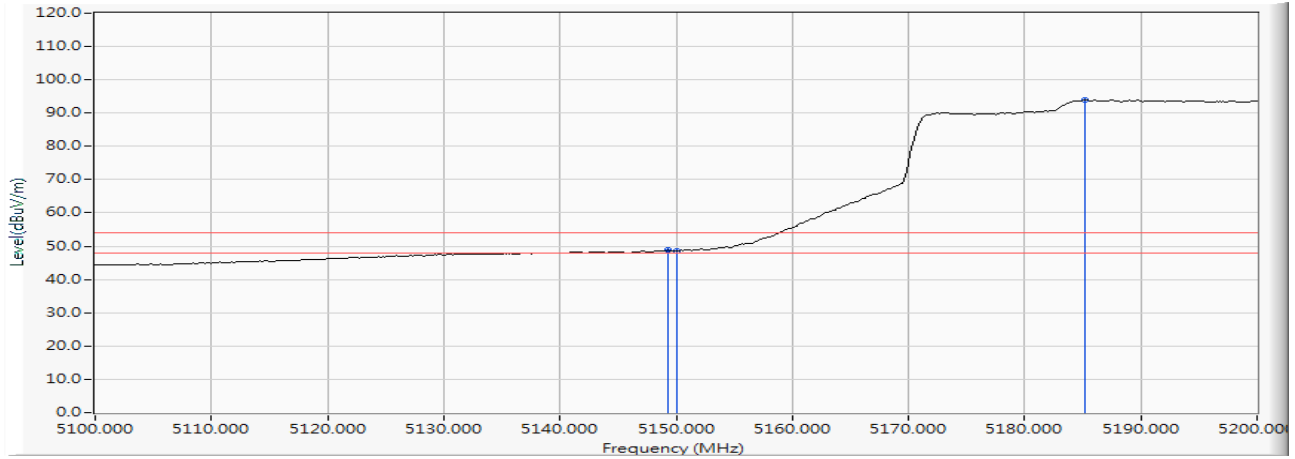


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.275	15.303	33.473	48.776	-5.224	54.000	AVERAGE
2		5150.000	15.307	33.306	48.613	-5.387	54.000	AVERAGE
3	*	5185.217	15.415	78.472	93.887	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 42 (5210MHz)

Vertical

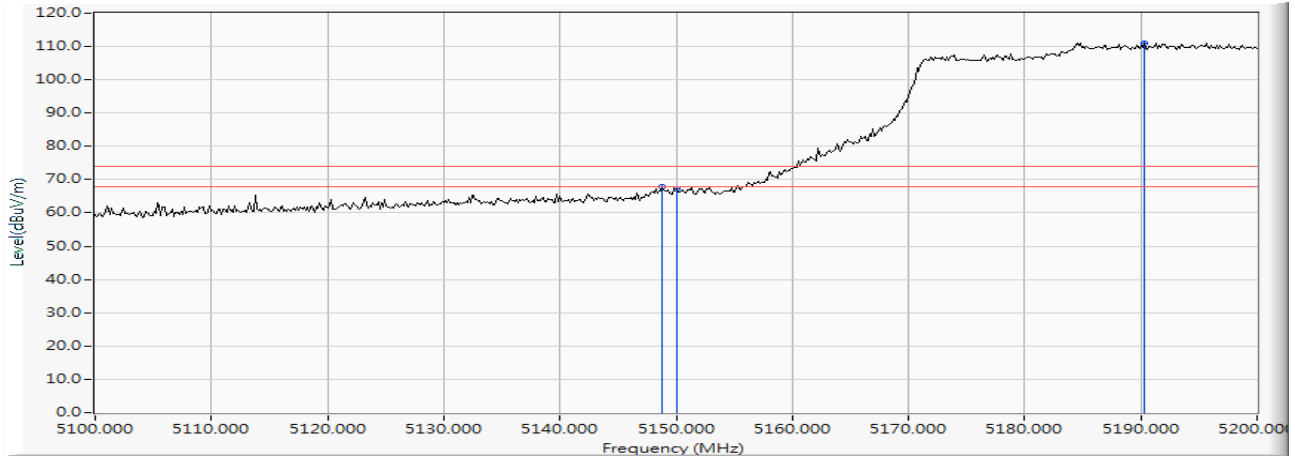


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5148.841	15.300	52.454	67.754	-6.246	74.000	PEAK
2		5150.000	15.307	51.956	67.263	-6.737	74.000	PEAK
3	*	5190.290	15.436	95.594	111.030	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/28
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 42 (5210MHz)

Vertical

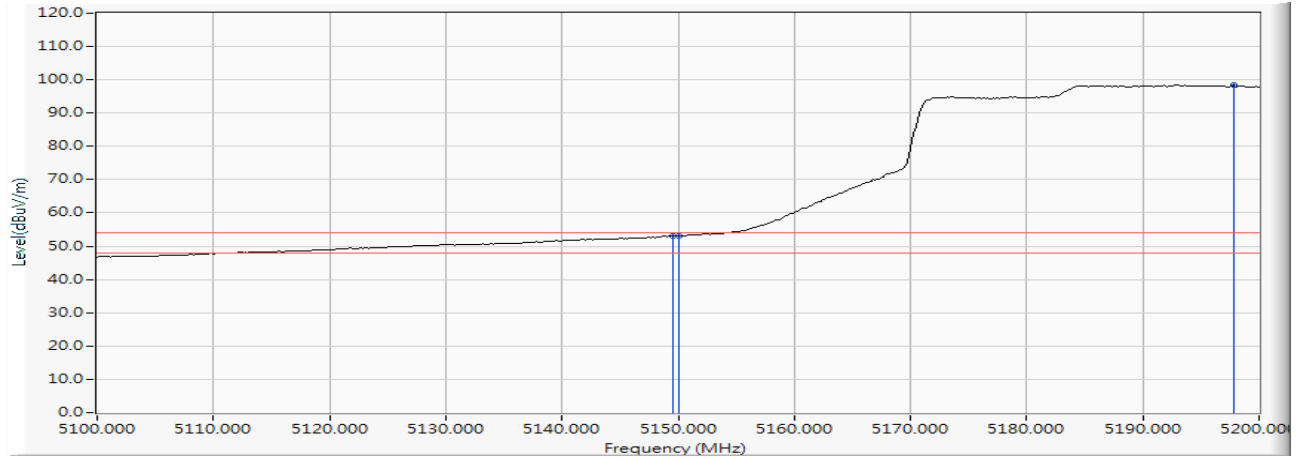


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.565	15.304	37.878	53.183	-0.817	54.000	AVERAGE
2		5150.000	15.307	37.831	53.138	-0.862	54.000	AVERAGE
3	*	5197.826	15.465	82.898	98.363	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 58 (5290MHz)

Horizontal

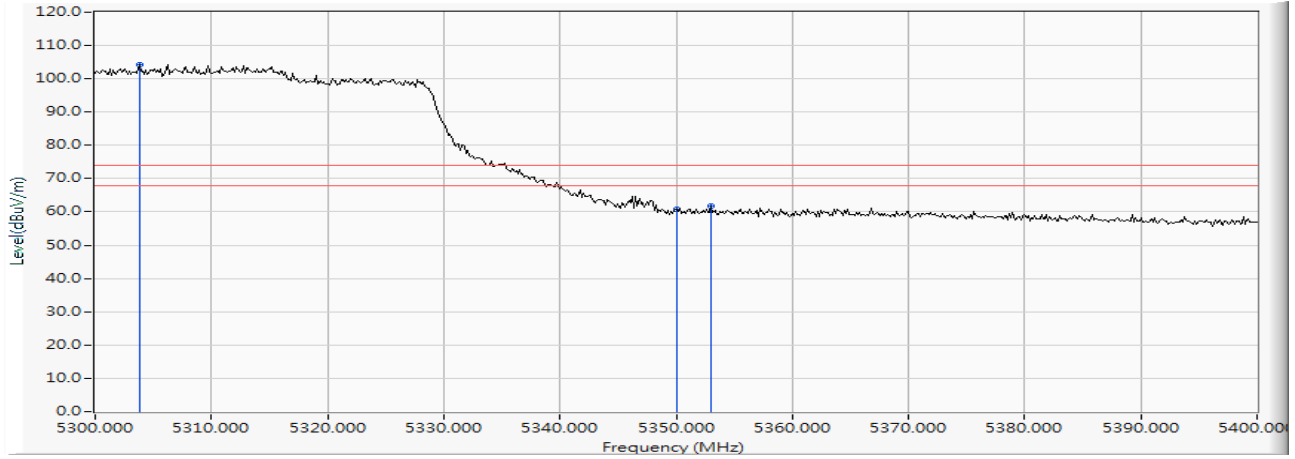


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5303.768	15.806	88.517	104.322	--	--	PEAK
2		5350.000	15.912	44.830	60.742	-13.258	74.000	PEAK
3		5353.043	15.922	45.718	61.640	-12.360	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 58 (5290MHz)

Horizontal

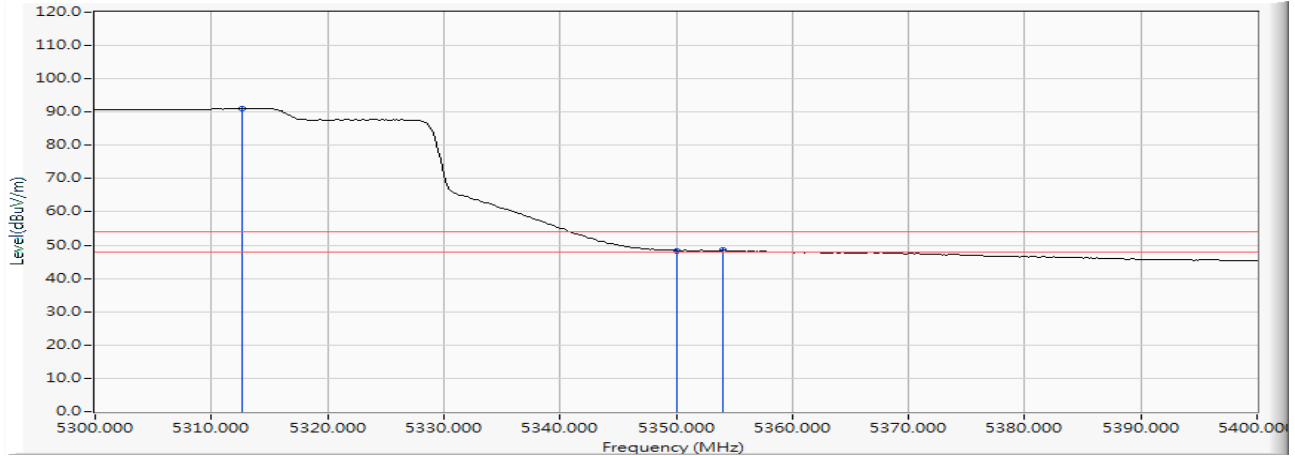


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5312.609	15.827	75.282	91.109	--	--	AVERAGE
2		5350.000	15.912	32.502	48.414	-5.586	54.000	AVERAGE
3		5354.058	15.925	32.524	48.449	-5.551	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 58 (5290MHz)

Vertical

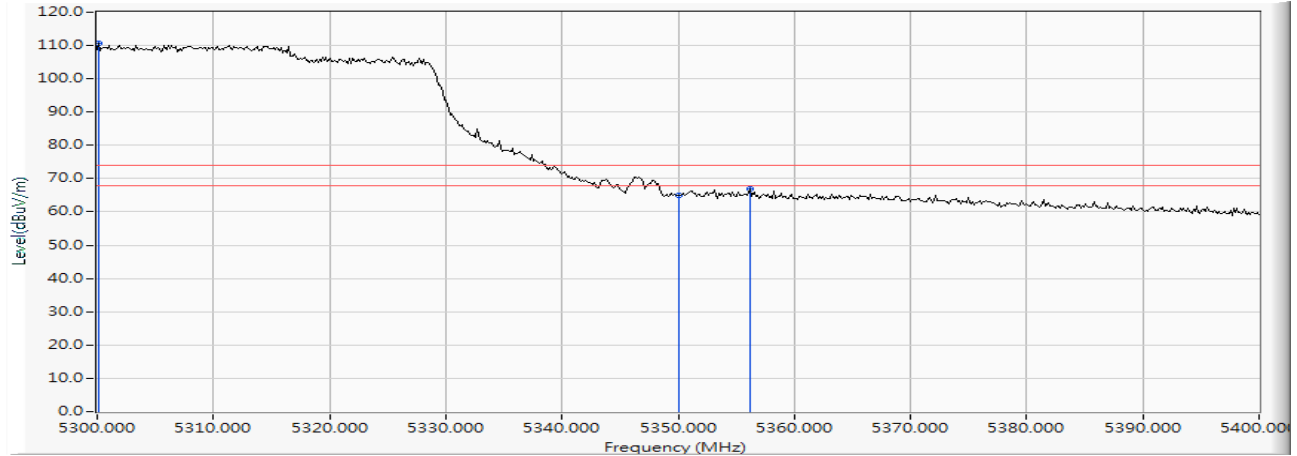


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5300.145	15.796	95.016	110.812	--	--	PEAK
2		5350.000	15.912	49.011	64.923	-9.077	74.000	PEAK
3		5356.232	15.932	50.825	66.757	-7.243	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/29
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 58 (5290MHz)

Vertical

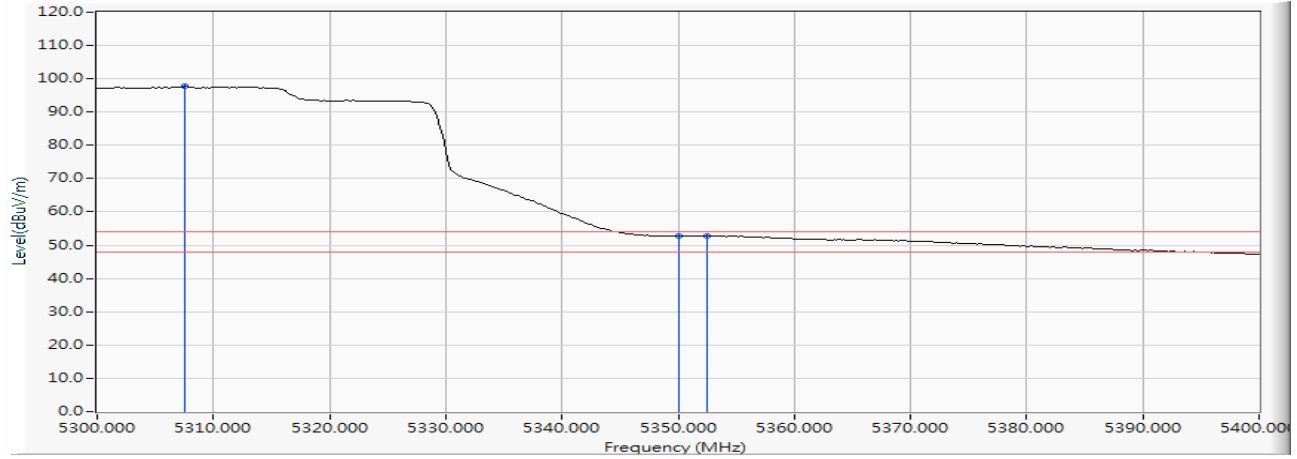


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5307.536	15.815	81.871	97.686	--	--	AVERAGE
2		5350.000	15.912	36.754	52.666	-1.334	54.000	AVERAGE
3		5352.464	15.920	36.886	52.806	-1.194	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)

Horizontal

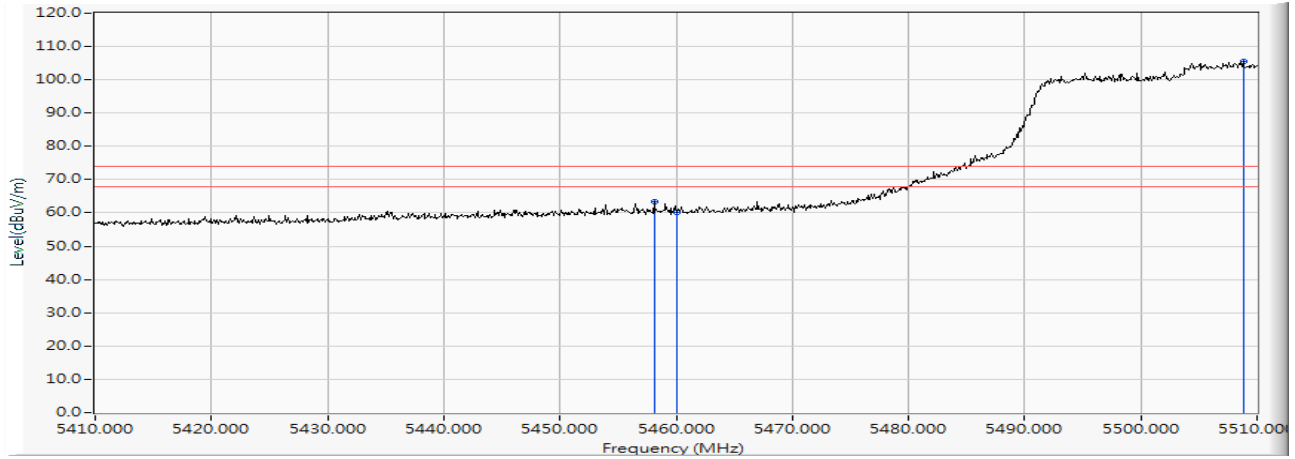


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5458.100	16.182	47.144	63.326	-10.674	74.000	PEAK
2		5460.000	16.185	43.960	60.145	-13.855	74.000	PEAK
3	*	5508.800	16.273	89.188	105.462	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)

Horizontal

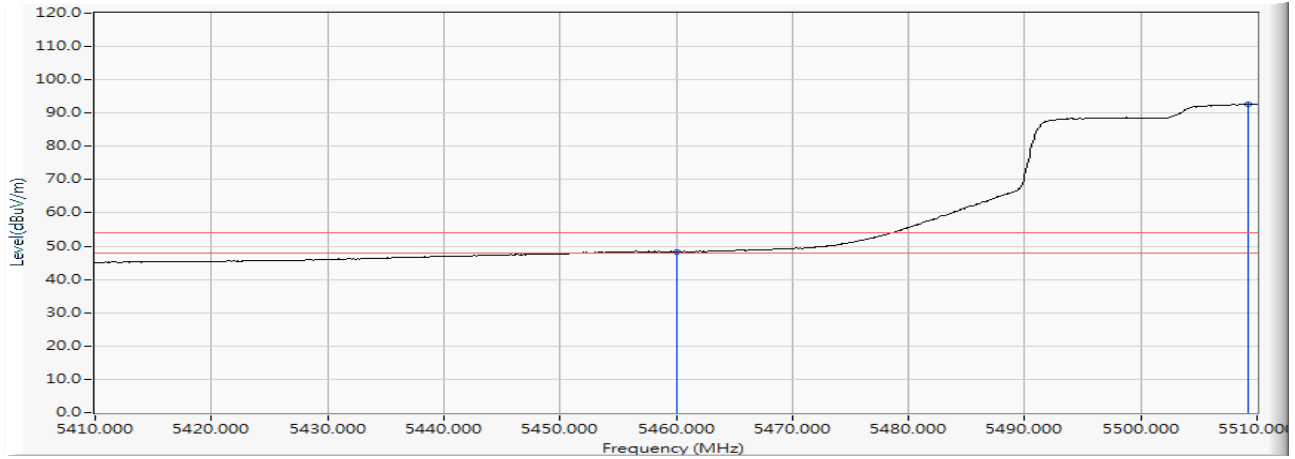


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	32.177	48.362	-5.638	54.000	AVERAGE
2	*	5509.200	16.274	76.516	92.791	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)

Vertical

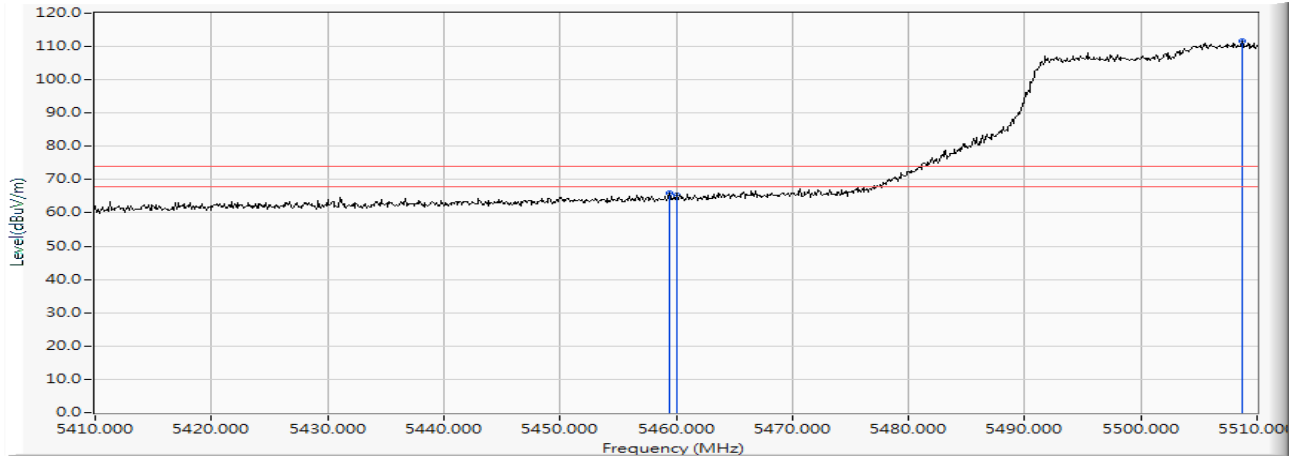


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5459.400	16.184	49.925	66.109	-7.891	74.000	PEAK
2		5460.000	16.185	49.165	65.350	-8.650	74.000	PEAK
3	*	5508.700	16.274	95.338	111.612	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)

Vertical

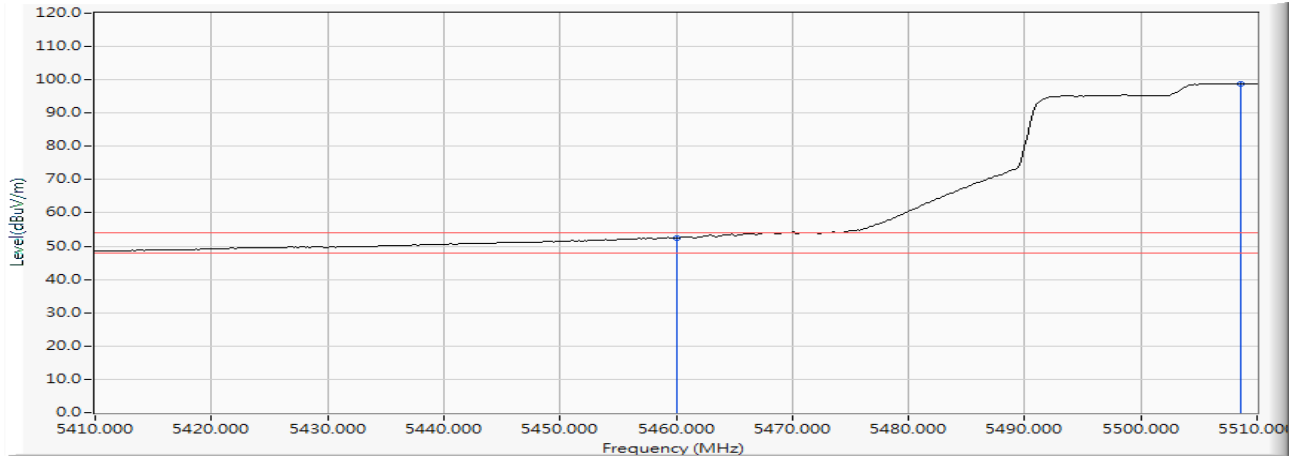


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	36.160	52.345	-1.655	54.000	AVERAGE
2	*	5508.551	16.274	82.636	98.910	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)


Horizontal

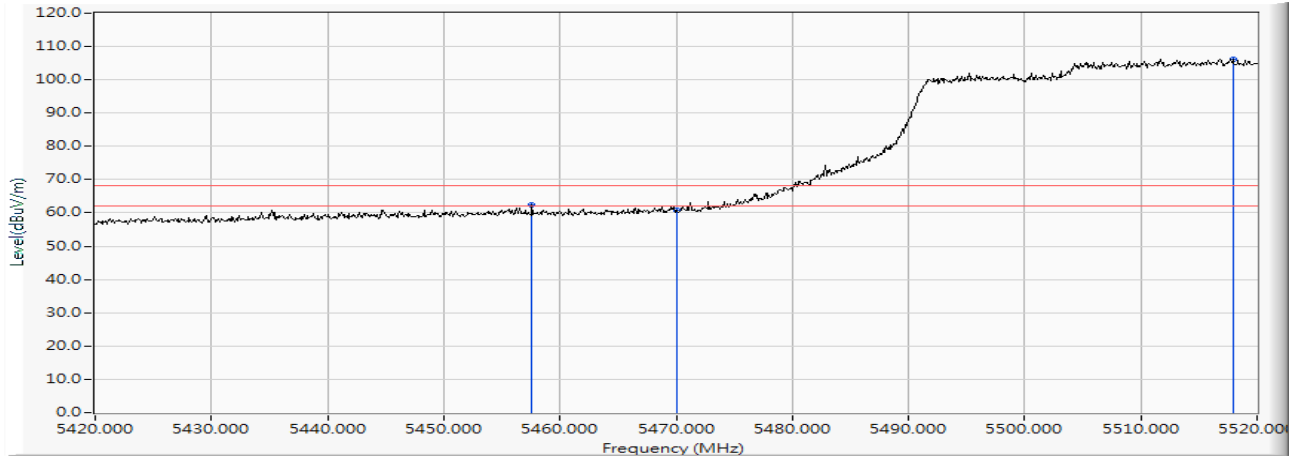

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5457.600	16.181	46.075	62.256	-5.964	68.220	PEAK
2		5470.000	16.200	44.574	60.774	-7.446	68.220	PEAK
3	*	5517.900	16.288	89.910	106.198	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)


Vertical

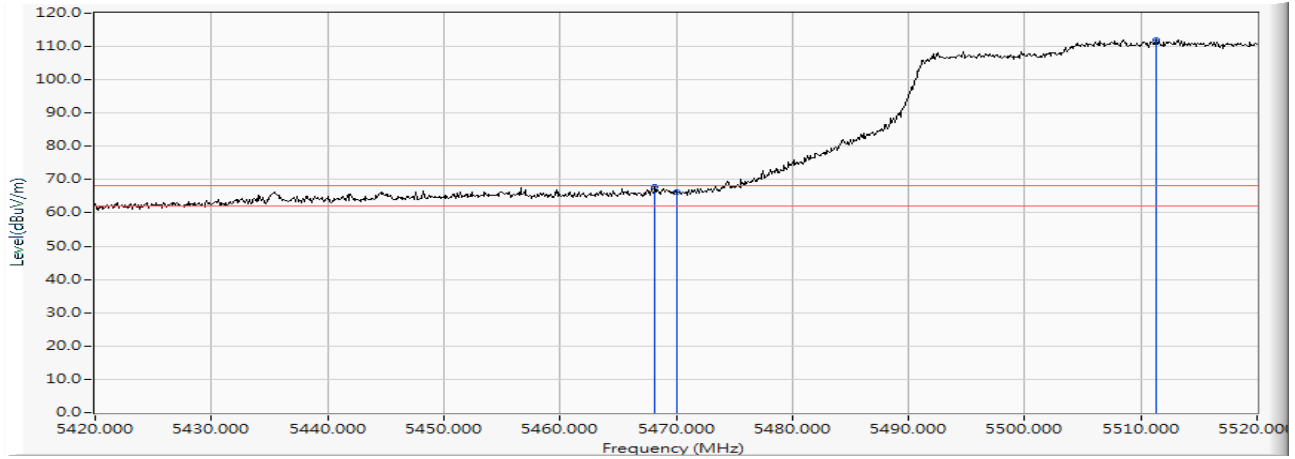

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5468.200	16.196	51.798	67.995	-0.225	68.220	PEAK
2		5470.000	16.200	50.023	66.223	-1.997	68.220	PEAK
3	*	5511.300	16.275	95.812	112.088	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 155 (5775MHz)


Horizontal

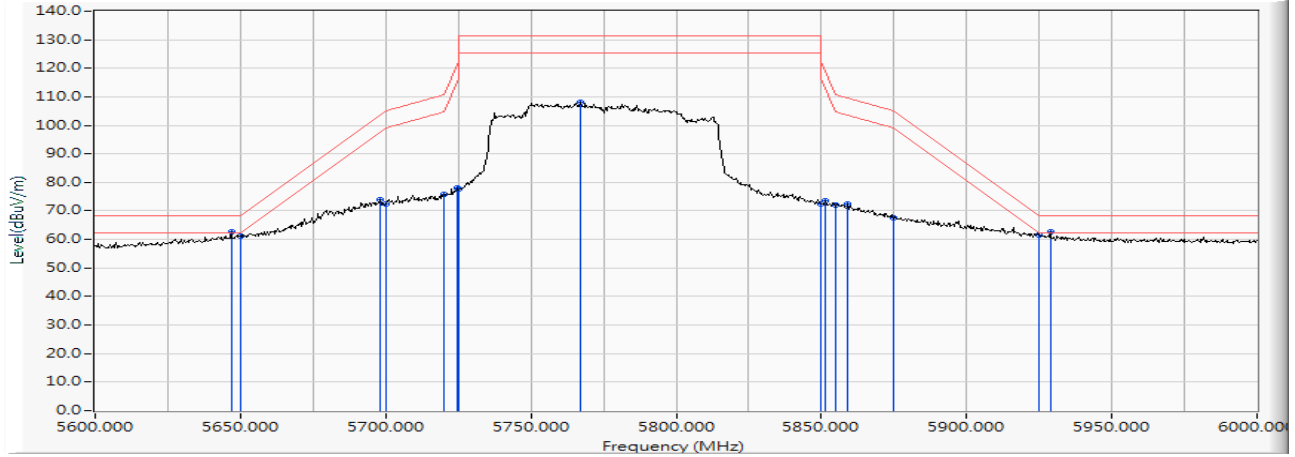

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5646.800	16.438	46.264	62.702	-5.518	68.220	PEAK
2		5650.000	16.447	44.652	61.099	-7.121	68.220	PEAK
3		5698.000	16.499	57.494	73.993	-29.728	103.721	PEAK
4		5700.000	16.502	56.030	72.532	-32.668	105.200	PEAK
5		5720.000	16.535	59.281	75.816	-34.984	110.800	PEAK
6		5724.800	16.544	61.611	78.155	-43.589	121.744	PEAK
7		5725.000	16.544	61.226	77.770	-44.430	122.200	PEAK
8		5767.200	16.593	91.480	108.073	--	--	PEAK
9		5850.000	16.748	55.626	72.374	-49.826	122.200	PEAK
10		5851.200	16.750	56.674	73.424	-46.040	119.464	PEAK
11		5855.000	16.758	55.255	72.013	-38.787	110.800	PEAK
12		5859.200	16.768	55.642	72.410	-37.214	109.624	PEAK
13		5875.000	16.807	50.726	67.534	-37.666	105.200	PEAK
14		5925.000	16.920	44.643	61.563	-6.637	68.200	PEAK
15	*	5928.800	16.924	45.769	62.693	-5.507	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 155 (5775MHz)


Vertical

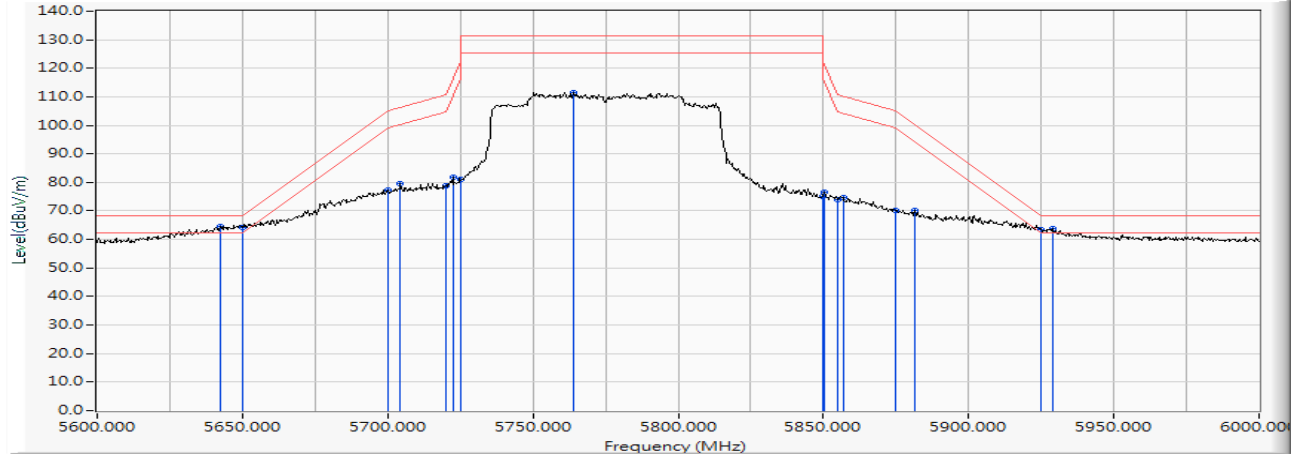

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5642.400	16.426	48.243	64.669	-3.551	68.220	PEAK
2		5650.000	16.447	47.692	64.139	-4.081	68.220	PEAK
3		5700.000	16.502	60.854	77.356	-27.844	105.200	PEAK
4		5704.400	16.507	63.199	79.706	-26.726	106.432	PEAK
5		5720.000	16.535	62.181	78.716	-32.084	110.800	PEAK
6		5722.400	16.540	65.172	81.711	-34.561	116.272	PEAK
7		5725.000	16.544	64.501	81.045	-41.155	122.200	PEAK
8		5764.000	16.589	94.978	111.568	--	--	PEAK
9		5850.000	16.748	58.189	74.937	-47.263	122.200	PEAK
10		5850.400	16.749	59.839	76.588	-44.700	121.288	PEAK
11		5855.000	16.758	57.283	74.041	-36.759	110.800	PEAK
12		5856.800	16.763	57.961	74.724	-35.572	110.296	PEAK
13		5875.000	16.807	53.249	70.057	-35.143	105.200	PEAK
14		5881.600	16.826	53.490	70.316	-30.000	100.316	PEAK
15		5925.000	16.920	46.391	63.311	-4.889	68.200	PEAK
16		5928.800	16.924	46.902	63.826	-4.374	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 50 (5250MHz)

Horizontal

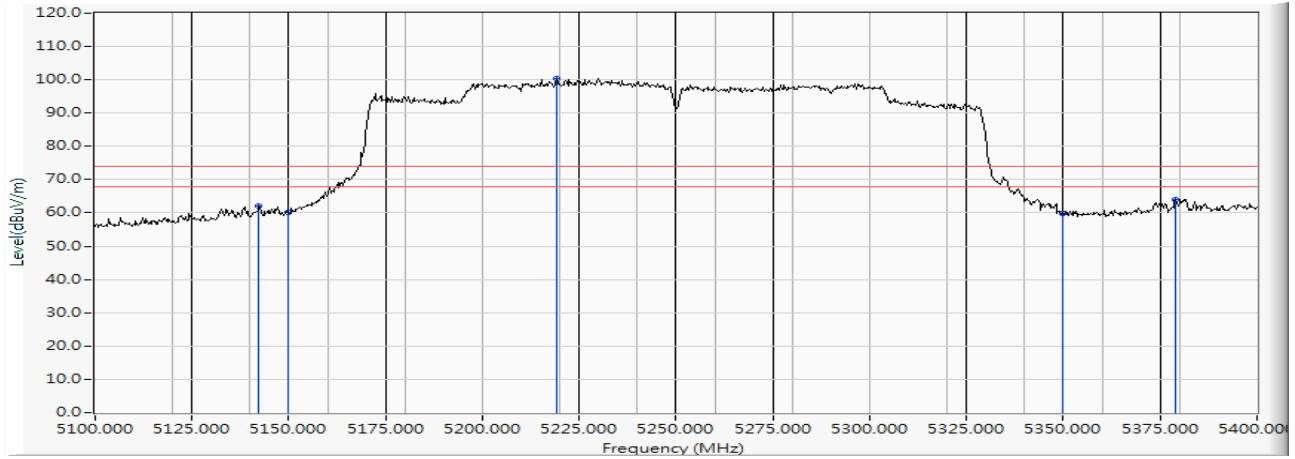


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5142.300	15.264	46.675	61.938	-12.062	74.000	PEAK
2		5150.000	15.307	44.709	60.016	-13.984	74.000	PEAK
3	*	5219.100	15.565	84.807	100.372	--	--	PEAK
4		5350.000	15.912	43.920	59.832	-14.168	74.000	PEAK
5		5379.000	15.997	47.988	63.985	-10.015	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 50 (5250MHz)

Horizontal

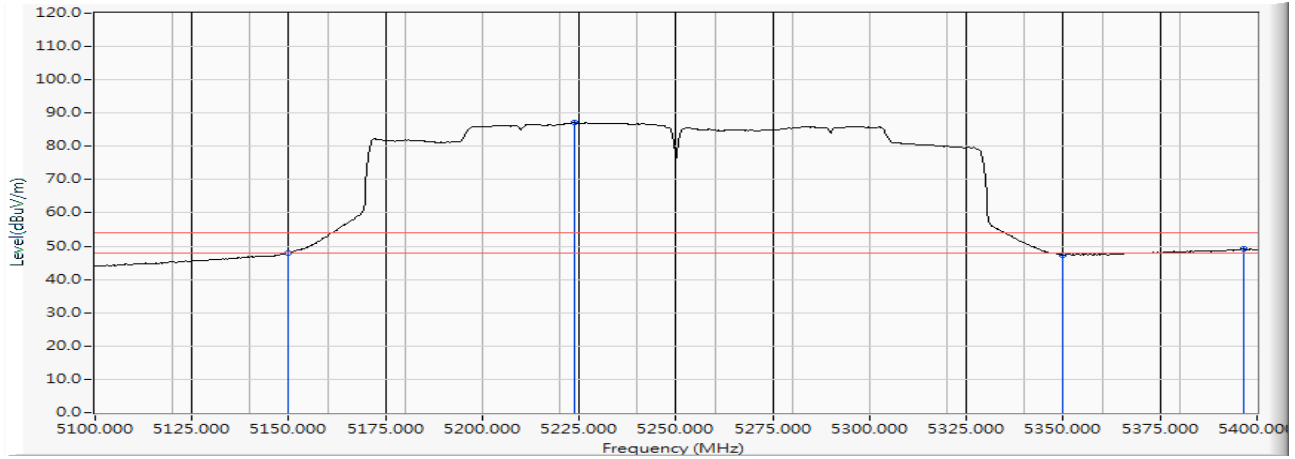


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	32.629	47.936	-6.064	54.000	AVERAGE
2	*	5223.900	15.589	71.560	87.148	--	--	AVERAGE
3		5350.000	15.912	31.505	47.417	-6.583	54.000	AVERAGE
4		5396.700	16.025	33.112	49.137	-4.863	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 50 (5250MHz)

Vertical

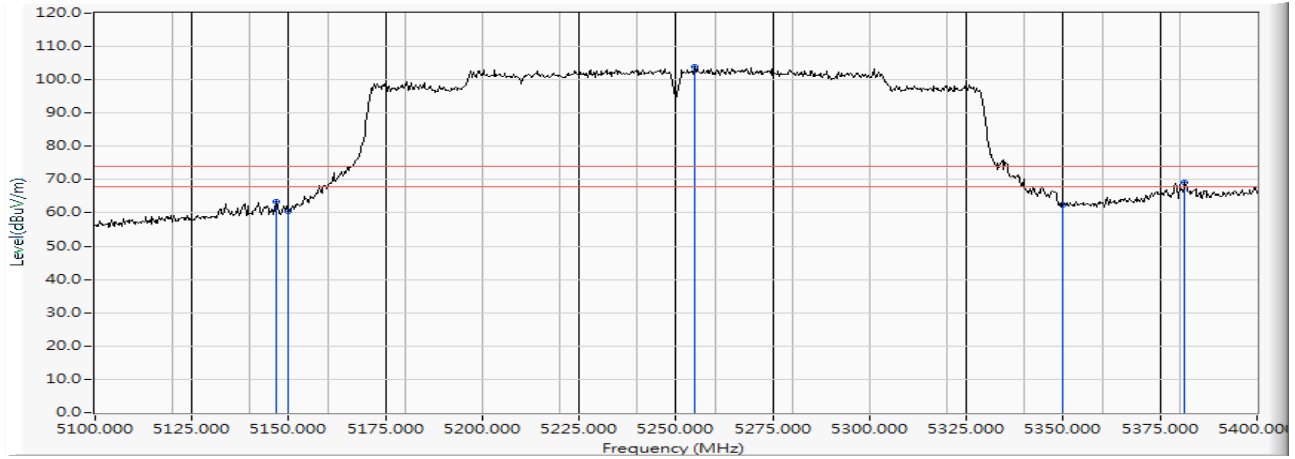


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5146.800	15.289	48.024	63.313	-10.687	74.000	PEAK
2		5150.000	15.307	45.027	60.334	-13.666	74.000	PEAK
3	*	5254.800	15.691	88.261	103.951	--	--	PEAK
4		5350.000	15.912	46.449	62.361	-11.639	74.000	PEAK
5		5381.400	16.004	53.096	69.099	-4.901	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 50 (5250MHz)

Vertical

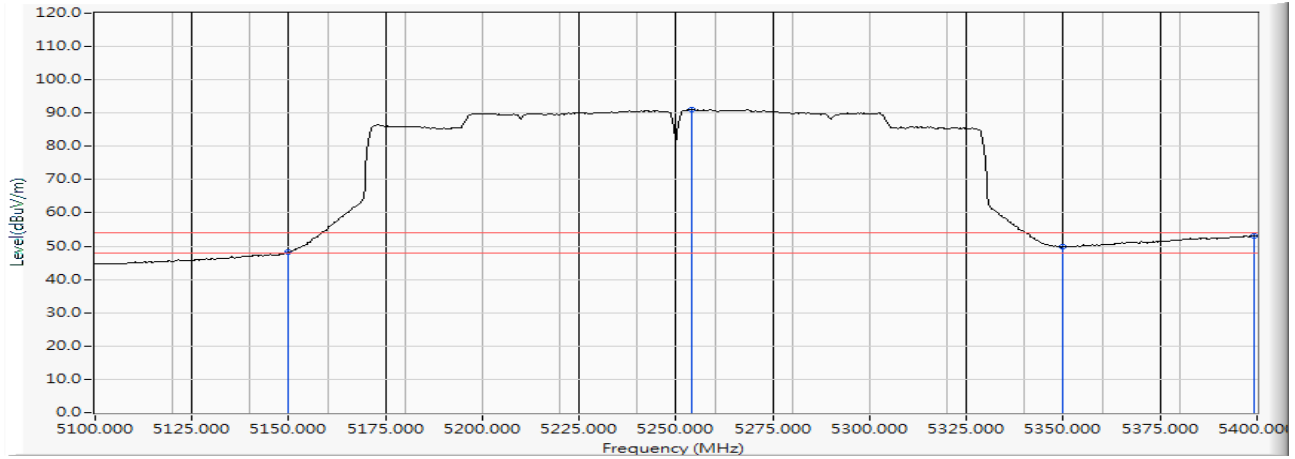


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	32.899	48.206	-5.794	54.000	AVERAGE
2	*	5253.900	15.688	75.428	91.116	--	--	AVERAGE
3		5350.000	15.912	33.879	49.791	-4.209	54.000	AVERAGE
4		5399.400	16.028	37.108	53.136	-0.864	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)

Horizontal

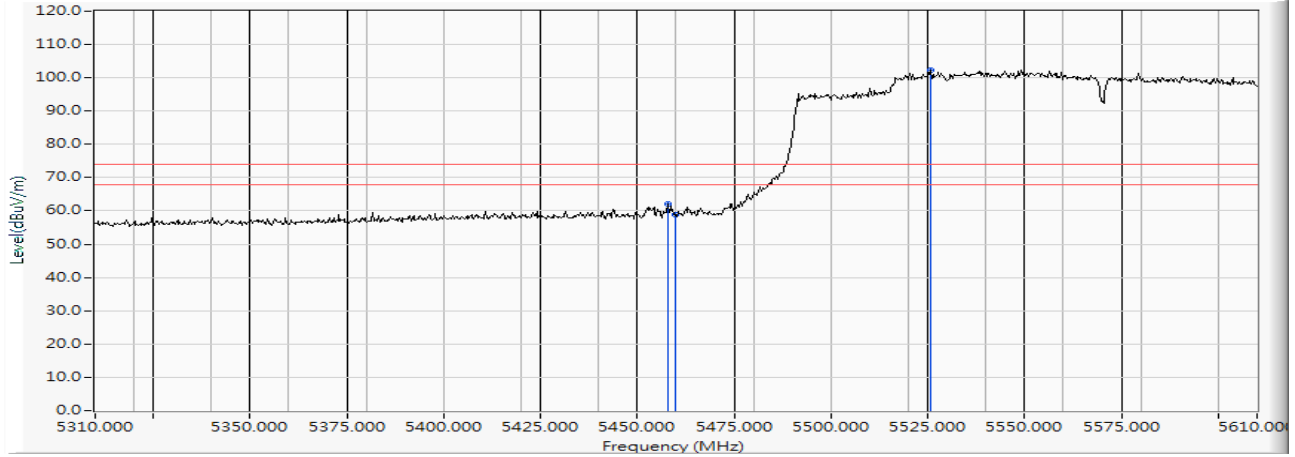


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5457.900	16.182	45.809	61.991	-12.009	74.000	PEAK
2	5460.000	16.185	42.552	58.737	-15.263	74.000	PEAK
3	* 5525.700	16.303	86.115	102.417	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)

Horizontal

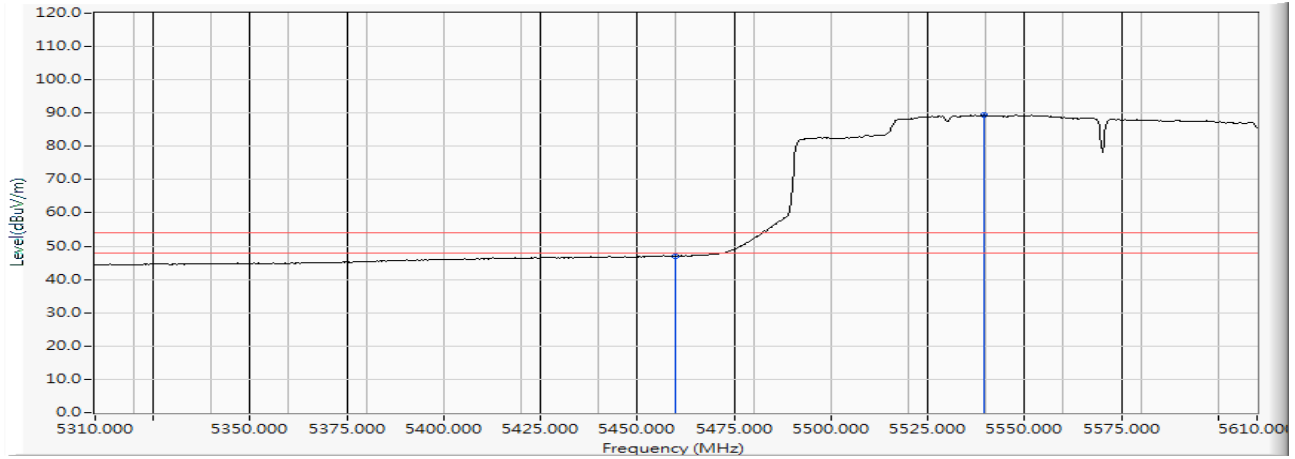


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	30.825	47.010	-6.990	54.000	AVERAGE
2	*	5539.500	16.318	73.088	89.406	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)

Vertical

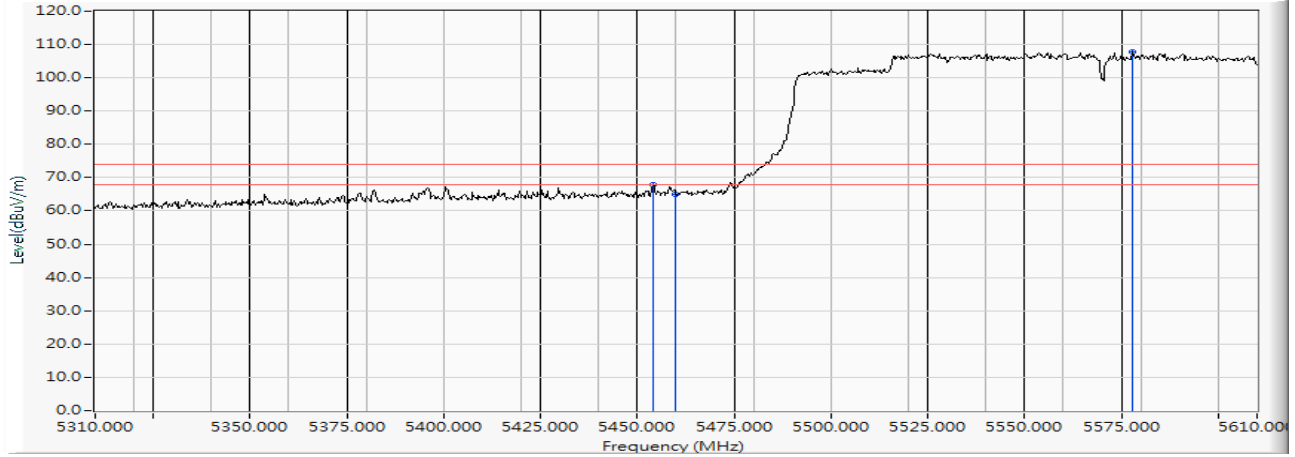


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	5454.000	16.170	51.577	67.747	-6.253	74.000	PEAK
2	5460.000	16.185	48.749	64.934	-9.066	74.000	PEAK
3	* 5577.900	16.358	91.323	107.681	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)

Vertical

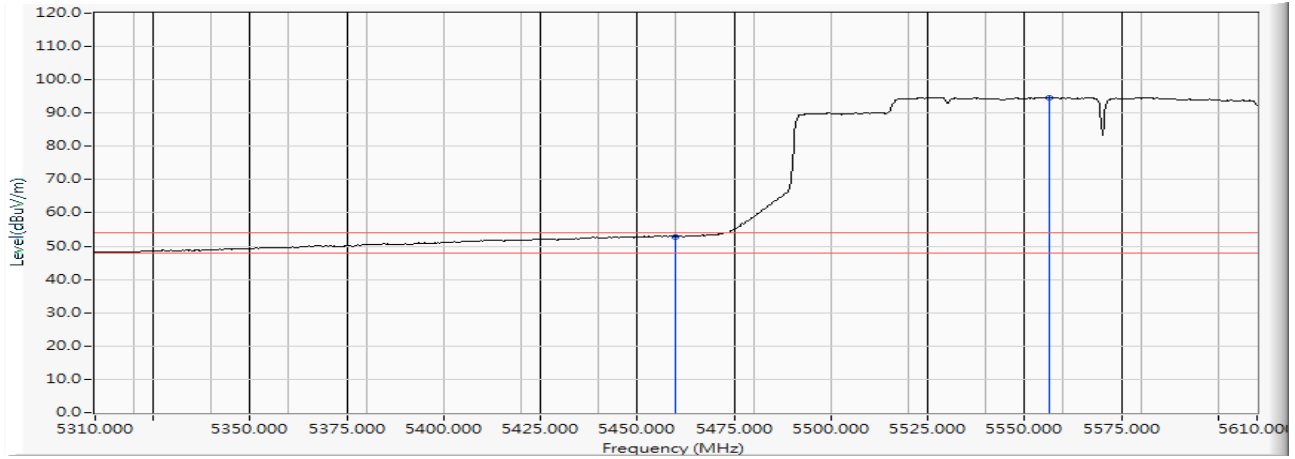


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5460.000	16.185	36.719	52.904	-1.096	54.000	AVERAGE
2	*	5556.300	16.324	78.398	94.723	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)


Horizontal

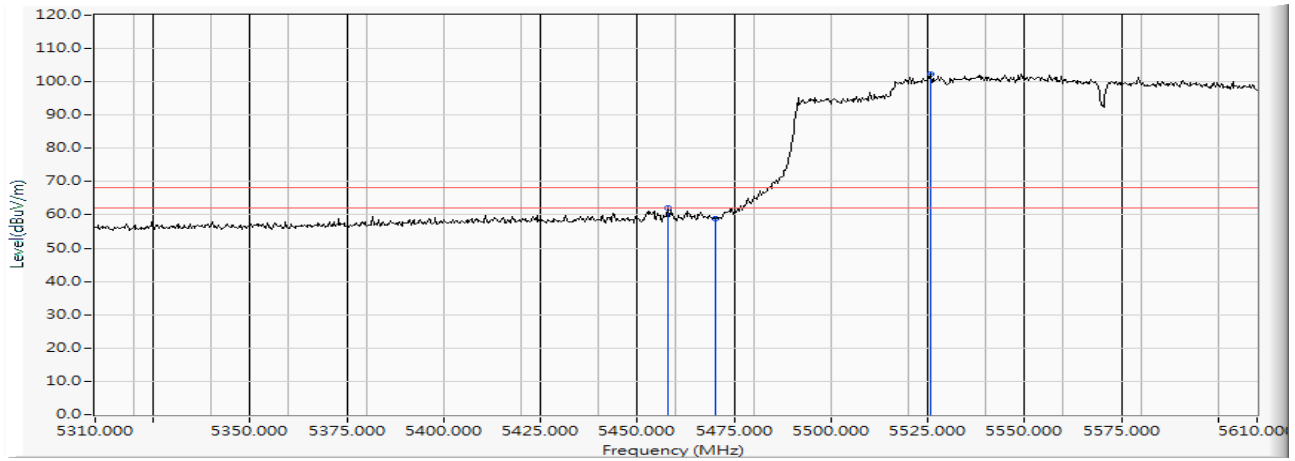

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5457.900	16.182	45.809	61.991	-6.229	68.220	PEAK
2		5470.000	16.200	42.727	58.927	-9.293	68.220	PEAK
3	*	5525.700	16.303	86.115	102.417	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/05/30
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)


Vertical

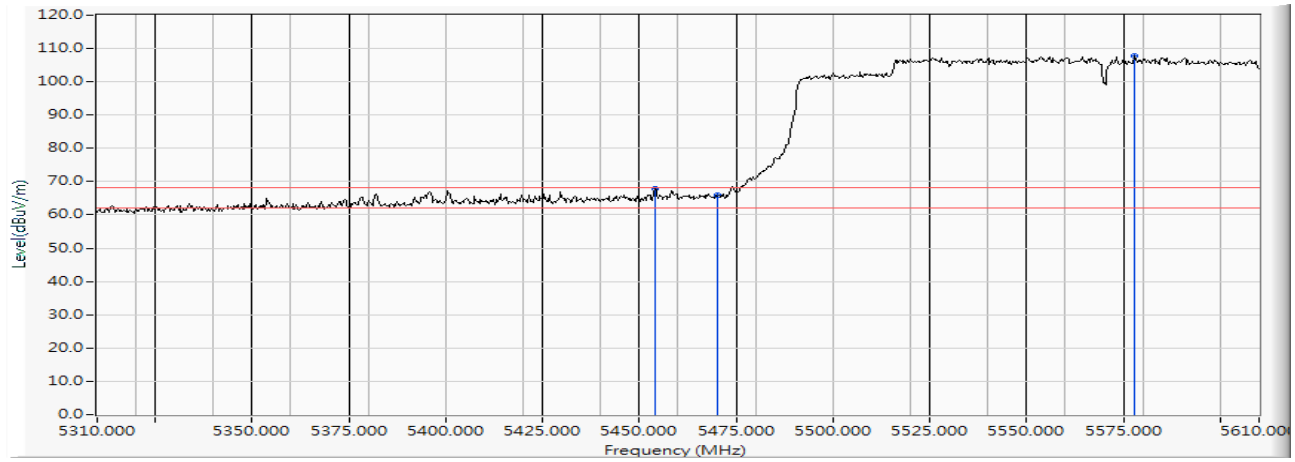

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5454.000	16.170	51.577	67.747	-0.473	68.220	PEAK
2		5470.000	16.200	49.594	65.794	-2.426	68.220	PEAK
3	*	5577.900	16.358	91.323	107.681	--	--	PEAK

5. Duty Cycle

5.1. Test Setup

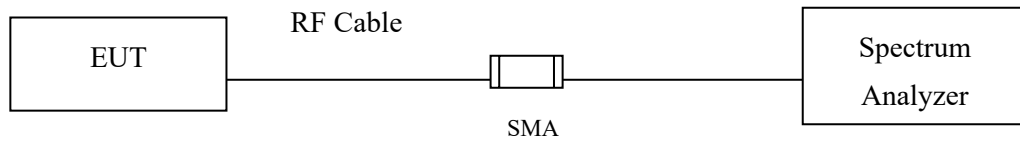

5.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to U-NII test procedure of KDB789033 for compliance to FCC 47CFR 15.407 requirements.

5.3. Uncertainty

$\pm 2.31\text{msec}$

5.4. Test Result of Duty Cycle

Product : Intel® Wi-Fi 6 AX200
 Test Item : Duty Cycle
 Test Mode : Mode 27: Transmit-SISO A

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	2.0725	2.3478	88.27	0.54
802.11n20	24.7536	25.1014	98.61	0.06
802.11n40	17.8696	18.2174	98.09	0.08
802.11ac80	11.0145	11.3043	97.44	0.11
802.11ac160	5.5072	5.7971	95.00	0.22
802.11ax20	24.7826	25.0000	99.13	0.04
802.11ax40	18.6957	18.9855	98.47	0.07
802.11ax80	8.9420	9.2319	96.86	0.14
802.11ax160	4.5072	4.7536	94.82	0.23

802.11a (SISO A)

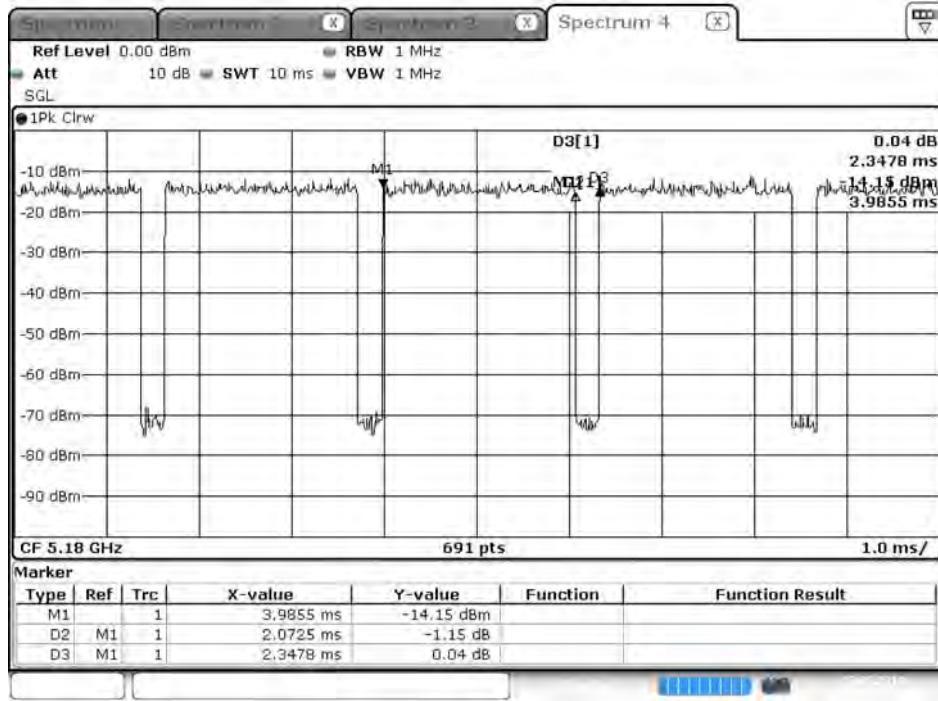


Date: 7 MAY 2019 12:56:46

802.11n20 (SISO A)

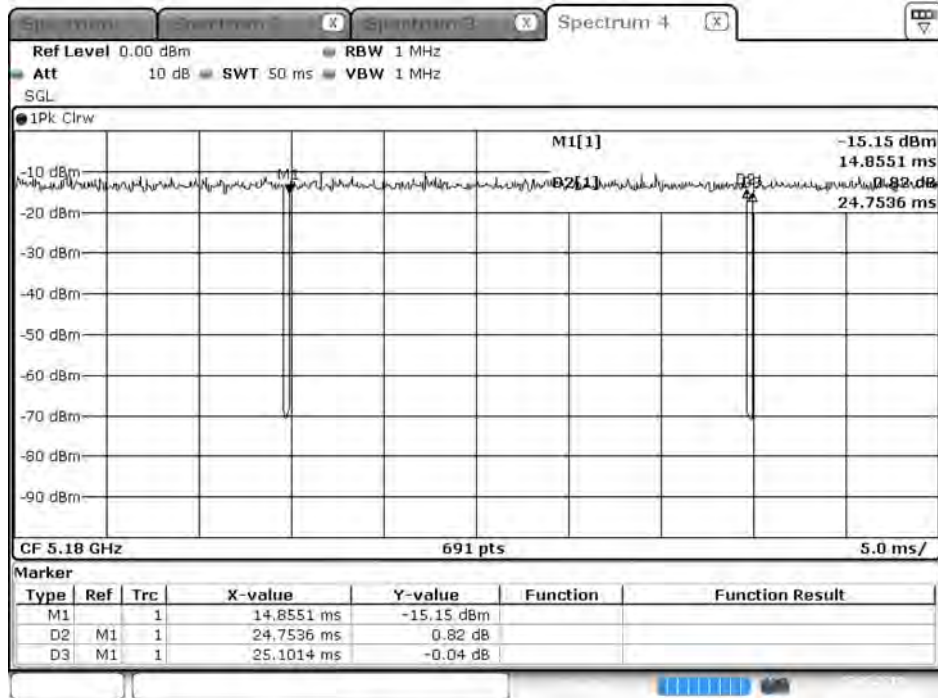


Date: 7 MAY 2019 12:57:58

802.11n40 (SISO A)

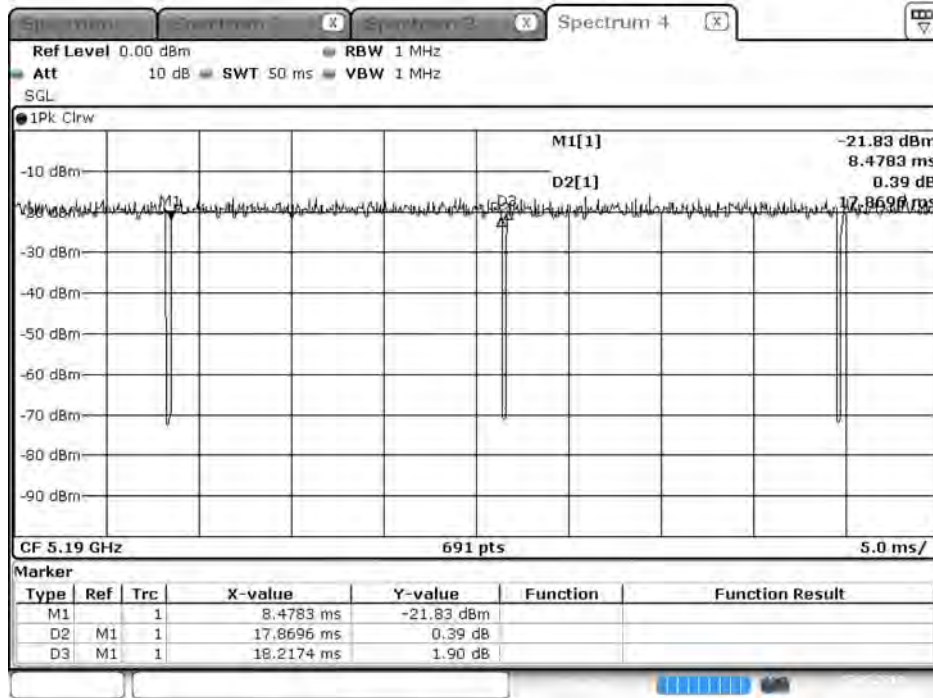


Date: 7 MAY 2019 12:59:33

802.11ac80 (SISO A)

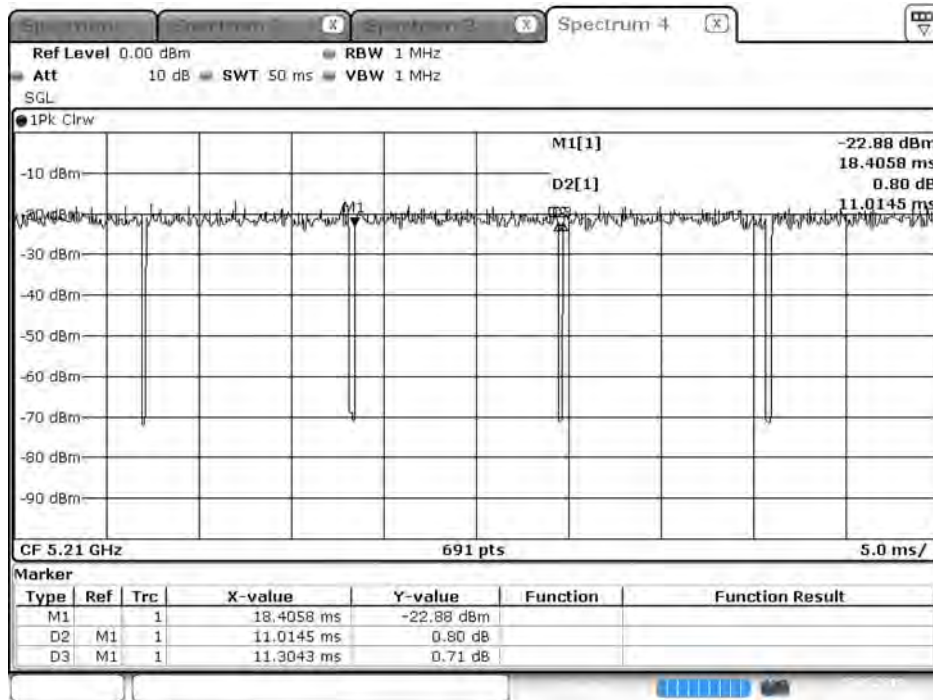


Date: 7 MAY 2019 13:01:12

802.11ac160 (SISO A)

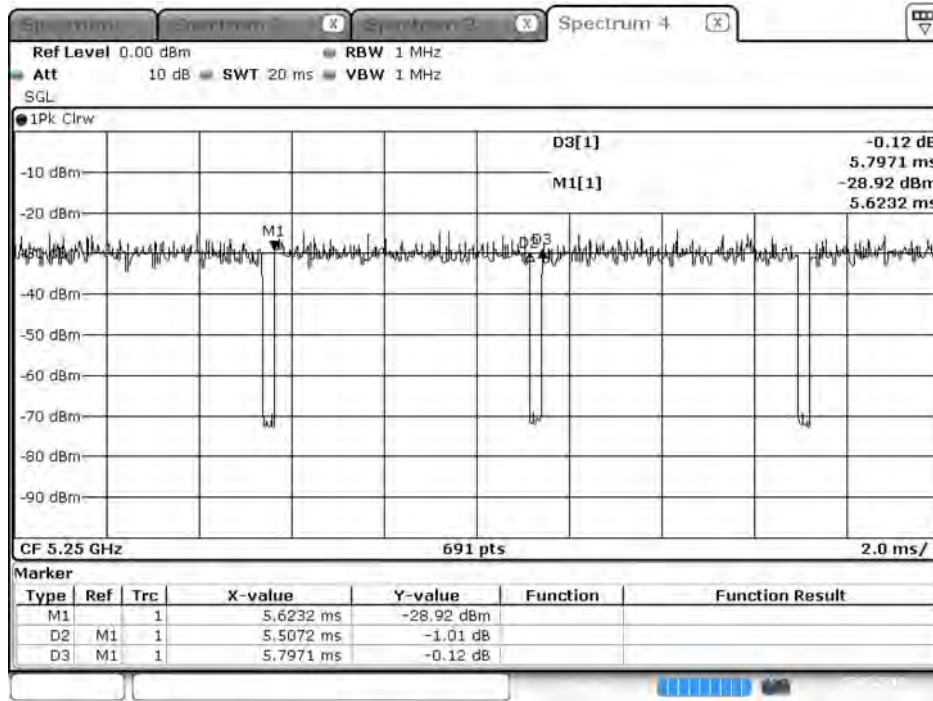


Date: 7 MAY 2019 13:02:15

802.11ax20 (SISO A)

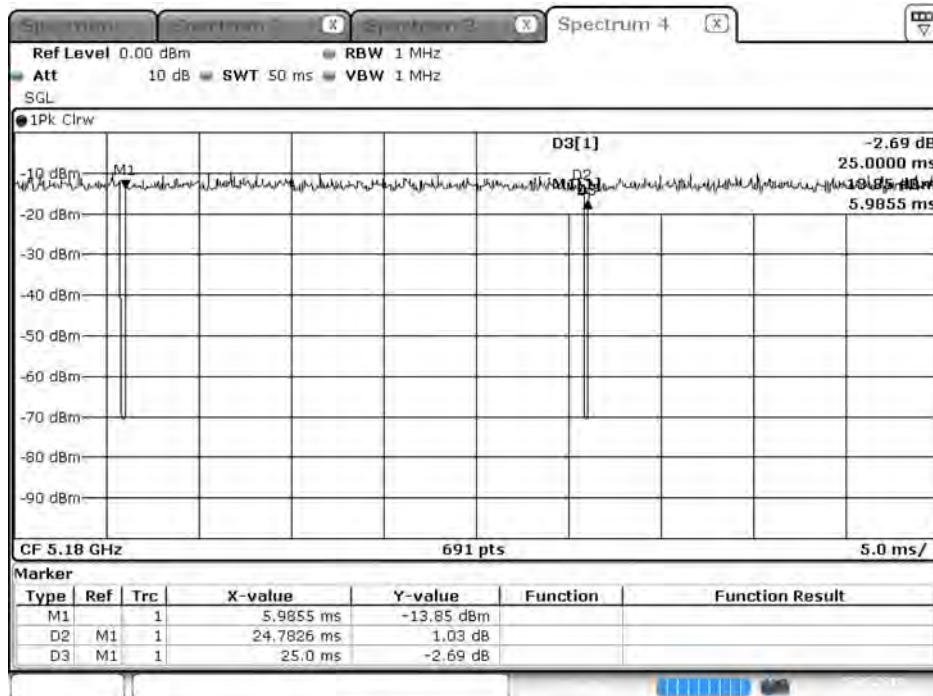


Date: 7 MAY 2019 13:03:55

802.11ax40 (SISO A)

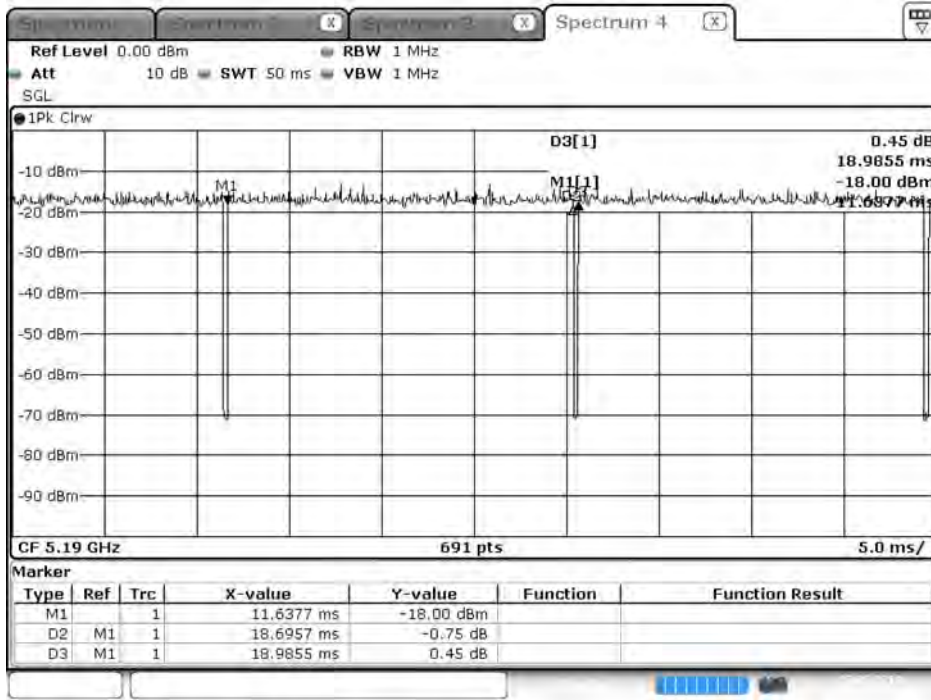

Date: 7 MAY 2019 13:05:33

802.11ax80 (SISO A)

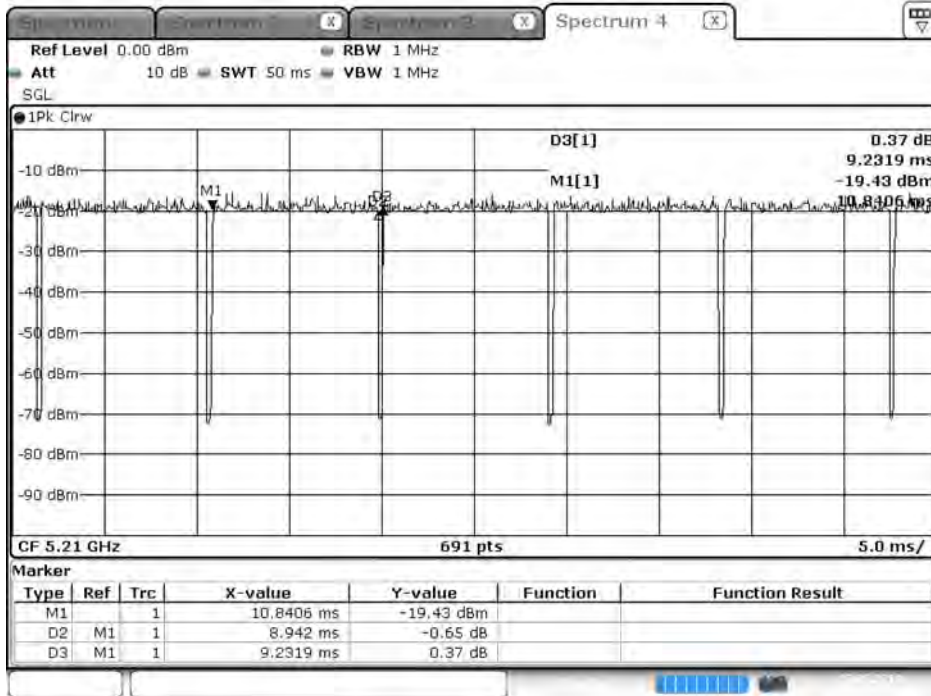

Date: 7 MAY 2019 13:07:01