


# FCC SAR TEST REPORT

**FCC ID** : PD9AX211D2  
**Equipment** : Portable Computing Device  
**Brand Name** : Microsoft  
**Model Name** : 2079  
**Applicant** : Intel Corporation  
425 rue de Goa Le Cargo B6, Antibes, 06600 France  
**Manufacturer** : Intel Corporation  
425 rue de Goa Le Cargo B6, Antibes, 06600 France  
**Standard** : FCC 47 CFR Part 2 (2.1093)

The product was received on Oct. 17, 2023 and testing was started from Oct. 17, 2023 and completed on Dec. 18, 2023. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Statement of Compliance ..... 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information ..... 5
3.1 General Information ..... 5
4. RF Exposure Limits..... 6
4.1 Uncontrolled Environment..... 6
4.2 Controlled Environment..... 6
4.3 RF Exposure limit for above 6GHz..... 7
5. Specific Absorption Rate (SAR)..... 8
5.1 Introduction ..... 8
5.2 SAR Definition..... 8
6. System Description and Setup ..... 9
6.1 Test Site Location..... 9
6.2 E-Field Probe ..... 10
6.3 Data Acquisition Electronics (DAE) ..... 10
6.4 Phantom..... 11
6.5 Device Holder..... 12
7. Measurement Procedures ..... 13
7.1 Spatial Peak SAR Evaluation..... 13
7.2 Power Reference Measurement..... 14
7.3 Area Scan ..... 14
7.4 Zoom Scan..... 15
7.5 Volume Scan Procedures..... 15
7.6 Power Drift Monitoring..... 15
8. Test Equipment List..... 16
9. System Verification ..... 17
9.1 Tissue Verification ..... 17
9.2 System Performance Check Results..... 18
9.3 PD System Performance Check Results..... 19
10. RF Exposure Positions ..... 19
11. WiFi/Bluetooth Output Power (Unit: dBm) ..... 20
12. Standalone SAR Test Exclusion considerations..... 34
13. SAR Test Results ..... 35
13.1 Body SAR ..... 36
13.2 6GHz PD SAR Result ..... 38
13.3 Repeated SAR Measurement ..... 39
14. Simultaneous Transmission Analysis..... 40
14.1 Body Exposure Conditions ..... 40
14.2 SPLSR Evaluation and Analysis..... 41
15. Uncertainty Assessment ..... 42
16. References..... 45
Appendix A. Plots of SAR System Performance Check
Appendix B. Plots of PD System Performance Check
Appendix C. Plots of High SAR Measurement
Appendix D. Plots of High PD Measurement
Appendix E. DASYS Calibration Certificate
Appendix F. Power verification and Supplemental SAR Results
Appendix G. Test Setup Photos and Antenna location





### 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Intel Corporation, Portable Computing Device, 2079, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary	Highest Simultaneous Transmission 1g SAR (W/kg)
			Body 1g SAR (W/kg)	
DTS	WLAN	2.4GHz WLAN	1.00	1.25
NII		5GHz WLAN	1.12	1.12
6CD		6GHz WLAN	0.48	1.12
DSS	2.4GHz Band	Bluetooth	0.25	1.25
Frequency Band			Reported APD (mW/cm <sup>2</sup> )	Reported PD Body 4cm <sup>2</sup> (mW/cm <sup>2</sup> )
6CD	WLAN	6GHz WLAN	0.33	0.73
Date of Testing:			2023/10/17 ~ 2023/12/18	

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), Human Exposure to RF Radiation Limits (1.0 mW/cm<sup>2</sup>=10 W/m<sup>2</sup>) specified in FCC 47 CFR part 1.1310 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang  
Report Producer: Paula Chen

### 2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- IEC/IEEE 62209-1528:2020
- SPEAG DASY6 System Handbook
- SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)



### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

Product Feature & Specification	
Equipment Name	Portable Computing Device
Brand Name	Microsoft
Model Name	2079
Integrated WLAN Module	Brand Name: Intel® Wi-Fi 6E AX211 Model Name: AX211D2W
FCC ID	PD9AX211D2
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6E: 5925 MHz~6425 MHz, 6425 MHz~6525 MHz, 6525 MHz~6875 MHz, 6875 MHz~7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
<b>Remark:</b> 1. Main = Ant B, Aux = Ant A 2. This device has two antenna vendors; RF exposure evaluation selects AWAN as the main test, HongBo will spot check worst case found in AWAN. 3. The FCC ID: C3K2079, NXP PN560 module is also integrated into the same host, NFC power and SAR testing data, which can be referred to Sporton SAR Test Report, Report No.: FA3O1204A and these results are used simultaneous transmission analysis.	

Antenna Information										
AWAN, Type:PIFA, Connector:IPEX, Peak Gain(dBi)										
Ant B Main model: 1415-0AEROQS	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
	2.35	2.90	2.69	4.05	3.99	3.65	3.21	2.16	2.67	3.69
Ant A Aux model: 1415-0AFPOQS	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
	0.64	3.10	3.12	3.88	3.45	3.40	3.91	3.35	3.35	4.79
HongBo, Type:PIFA, Connector:IPEX, Peak Gain(dBi)										
Ant B Main model: 1415-0AENOQS	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
	2.04	2.29	2.36	3.67	3.67	3.23	2.83	1.75	2.10	3.23
Ant A Aux model: 1415-0AFROQS	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
	0.47	2.84	2.81	3.44	3.01	3.01	3.68	3.14	3.14	4.48



### 4. RF Exposure Limits

#### 4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

#### 4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



**4.3 RF Exposure limit for above 6GHz**

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm<sup>2</sup> per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)


$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.



## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

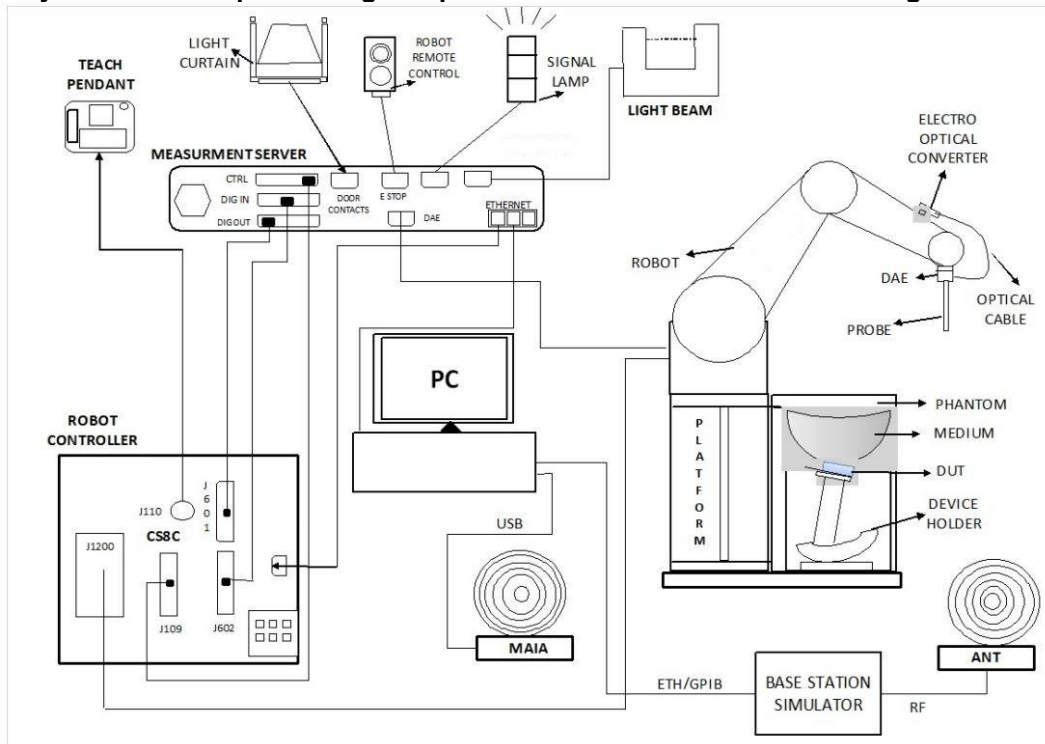

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 6.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY


**6.2 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	4 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	4 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.3 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**6.4 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.5 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small device, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device

## **7. Measurement Procedures**

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit <sup>(2)</sup>	D2450V2	929	Nov. 21, 2022	Nov. 19, 2024
SPEAG	2450MHz System Validation Kit <sup>(2)</sup>	D2450V2	806	Mar. 24, 2022	Mar. 22, 2024
SPEAG	5GHz System Validation Kit <sup>(2)</sup>	D5GHzV2	1006	May. 25, 2023	May. 23, 2025
SPEAG	5GHz System Validation Kit	D5GHzV2	1128	Nov. 23, 2022	Nov. 22, 2023
SPEAG	5GHz System Validation Kit <sup>(2)</sup>	D5GHzV2	1171	Apr. 20, 2021	Apr. 17, 2024
SPEAG	6500MHz System Validation Kit	D6.5GHzV2	1083	Oct. 20, 2023	Oct. 19, 2024
SPEAG	13MHz System Validation Kit <sup>(2)</sup>	CLA13	1022	Sep. 01, 2022	Aug. 30, 2024
SPEAG	5G Verification Source	10GHz	1020	Jan. 20, 2023	Jan. 19, 2024
SPEAG	EUmmWV Probe Tip Protection	EUmmWV4	9461	Oct. 12, 2023	Oct. 11, 2024
SPEAG	Data Acquisition Electronics	DAE4	656	Jan. 23, 2023	Jan. 22, 2024
SPEAG	Data Acquisition Electronics	DAE4	699	Feb. 22, 2023	Feb. 21, 2024
SPEAG	Data Acquisition Electronics	DAE4	1399	Feb. 21, 2023	Feb. 20, 2024
SPEAG	Data Acquisition Electronics	DAE4	1424	Jan. 19, 2023	Jan. 18, 2024
SPEAG	Data Acquisition Electronics	DAE4	1794	Feb. 01, 2023	Jan. 31, 2024
SPEAG	Data Acquisition Electronics	DAE4	1776	Mar. 03, 2023	Mar. 02, 2024
SPEAG	Data Acquisition Electronics	DAE4	1805	May. 16, 2023	May. 15, 2024
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 18, 2023	Sep. 17, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Mar. 22, 2023	Mar. 21, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	Apr. 25, 2023	Apr. 24, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7590	Mar. 23, 2023	Mar. 22, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7625	Jan. 26, 2023	Jan. 25, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7695	May. 22, 2023	May. 21, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7791	Feb. 22, 2023	Feb. 21, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7813	May. 24, 2023	May. 23, 2024
RCPTWN	Thermometer	HTC-1	TM685-1	Mar. 21, 2023	Mar. 20, 2024
RCPTWN	Thermometer	HTC-1	TM560-2	Mar. 21, 2023	Mar. 20, 2024
R&S	BT Base Station	CBT	100815	Mar. 05, 2023	Mar. 04, 2024
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 27, 2023	Sep. 26, 2024
Keysight	ENA Network Analyzer	E5071C	MY46316648	Sep. 07, 2023	Sep. 06, 2024
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2023	Sep. 18, 2024
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 09, 2023	Aug. 08, 2024
Anritsu	Power Meter	ML2495A	1419002	Aug. 17, 2023	Aug. 16, 2024
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2023	Aug. 17, 2024
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 10, 2023	Jul. 09, 2024
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2023	Oct. 15, 2024
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.



## **9. System Verification**

### **9.1 Tissue Verification**

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing


#### **<Tissue Dielectric Parameter Check Results>**

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
2450	22.8	1.810	39.300	1.80	39.20	0.56	0.26	±5	2023/10/17
2450	22.5	1.786	38.995	1.80	39.20	-0.78	-0.52	±5	2023/10/18
2450	22.5	1.795	39.747	1.80	39.20	-0.28	1.40	±5	2023/10/19
2450	22.6	1.759	39.001	1.80	39.20	-2.28	-0.51	±5	2023/12/6
2450	22.4	1.764	38.624	1.80	39.20	-2.00	-1.47	±5	2023/12/14
5250	22.8	4.670	36.900	4.71	35.95	-0.85	2.64	±5	2023/10/18
5250	22.3	4.707	35.818	4.71	35.95	-0.06	-0.37	±5	2023/10/18
5250	22.3	4.723	35.938	4.71	35.95	0.28	-0.03	±5	2023/11/3
5250	22.4	4.729	36.536	4.71	35.95	0.40	1.63	±5	2023/12/14
5600	22.8	5.050	36.400	5.07	35.50	-0.39	2.54	±5	2023/10/18
5600	22.3	5.034	35.304	5.07	35.50	-0.71	-0.55	±5	2023/10/18
5600	22.4	5.101	36.025	5.07	35.50	0.61	1.48	±5	2023/12/14
5750	22.8	5.190	36.200	5.22	35.35	-0.57	2.40	±5	2023/10/18
5750	22.3	5.207	35.043	5.22	35.35	-0.25	-0.87	±5	2023/10/18
5750	22.4	5.267	35.842	5.22	35.35	0.90	1.39	±5	2023/12/14
5850	22.3	5.306	34.971	5.32	35.25	-0.26	-0.79	±5	2023/10/18
5850	22.5	5.380	35.700	5.32	35.25	1.13	1.28	±5	2023/12/18
6500	22.4	6.210	34.800	6.07	34.50	2.31	0.87	±5	2023/10/20
6500	22.5	6.180	34.100	6.07	34.50	1.81	-1.16	±5	2023/12/18

**9.2 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR-14	2023/10/17	2450	50	D2450V2-929	EX3DV4 - SN7791	DAE4 Sn1794	2.520	52.400	50.4	-3.82
SAR-09	2023/10/18	2450	50	D2450V2-929	ES3DV3 - SN3270	DAE4 Sn1399	2.580	52.400	51.6	-1.53
SAR-08	2023/10/19	2450	50	D2450V2-806	EX3DV4 - SN3925	DAE4 Sn1424	2.390	52.700	47.8	-9.30
SAR-11	2023/12/6	2450	50	D2450V2-929	EX3DV4 - SN7813	DAE4 Sn699	2.600	52.400	52	-0.76
SAR-11	2023/12/14	2450	50	D2450V2-929	EX3DV4 - SN7813	DAE4 Sn699	2.610	52.400	52.2	-0.38
SAR-14	2023/10/18	5250	50	D5GHzV2-1128-5250	EX3DV4 - SN7791	DAE4 Sn1794	3.910	77.900	78.2	0.39
SAR-13	2023/10/18	5250	50	D5GHzV2-1128-5250	EX3DV4 - SN7625	DAE4 Sn1424	3.630	77.900	72.6	-6.80
SAR-15	2023/11/3	5250	100	D5GHzV2-1128-5250	EX3DV4 - SN7590	DAE4 Sn699	7.740	77.900	77.4	-0.64
SAR-11	2023/12/14	5250	50	D5GHzV2-1006-5250	EX3DV4 - SN7813	DAE4 Sn699	3.750	81.200	75	-7.64
SAR-14	2023/10/18	5600	50	D5GHzV2-1128-5600	EX3DV4 - SN7791	DAE4 Sn1794	4.280	80.100	85.6	6.87
SAR-08	2023/10/18	5600	50	D5GHzV2-1128-5600	EX3DV4 - SN7625	DAE4 Sn1424	3.960	80.100	79.2	-1.12
SAR-11	2023/12/14	5600	50	D5GHzV2-1006-5600	EX3DV4 - SN7813	DAE4 Sn699	4.040	84.700	80.8	-4.60
SAR-14	2023/10/18	5750	50	D5GHzV2-1128-5750	EX3DV4 - SN7791	DAE4 Sn1794	3.890	79.300	77.8	-1.89
SAR-13	2023/10/18	5750	50	D5GHzV2-1128-5750	EX3DV4 - SN7625	DAE4 Sn1424	3.790	79.300	75.8	-4.41
SAR-11	2023/12/14	5750	50	D5GHzV2-1006-5750	EX3DV4 - SN7813	DAE4 Sn699	3.780	80.900	75.6	-6.55
SAR-13	2023/10/18	5850	50	D5GHzV2-1006-5850	EX3DV4 - SN7625	DAE4 Sn1424	3.920	81.800	78.4	-4.16
SAR-16	2023/12/18	5850	100	D5GHzV2-1171-5850	EX3DV4 - SN3728	DAE4 Sn1776	7.480	82.300	74.8	-9.11
SAR-13	2023/10/20	6500	100	D6.5GHzV2-1083	EX3DV4 - SN7625	DAE4 Sn656	31.500	291.000	315	8.25
SAR-11	2023/12/18	6500	100	D6.5GHzV2-1083	EX3DV4 - SN7813	DAE4 Sn699	27.500	291.000	275	-5.50

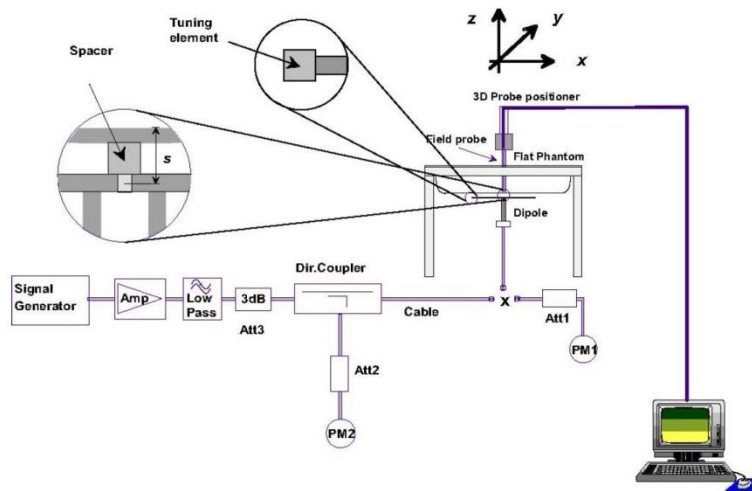

**Fig 8.3.1 System Performance Check Setup**




**Fig 8.3.2 Setup Photo**

**9.3 PD System Performance Check Results**

The system was verified to be within  $\pm 0.66$  dB of the power density targets on the calibration certificate according to the test system specification in the user’s manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG’s mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes

Test Location	Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm <sup>2</sup> (W/m <sup>2</sup> )	Targeted 4 cm <sup>2</sup> (W/m <sup>2</sup> )	Deviation (dB)	Date
SAR13	10G	10GHz_1020	EUmmWV4-9461	DAE4-1805	10mm	55.1	54.9	0.02	2023/11/10

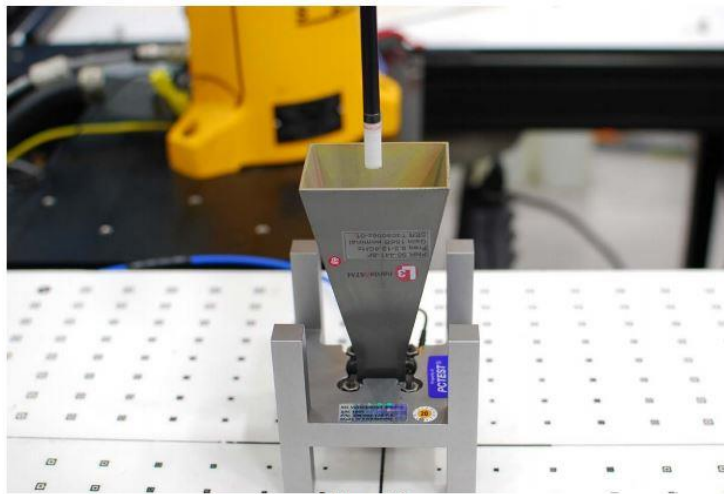

**Figure 4-3**  
System Verification Setup Photo

System Performance Check Setup

**10. RF Exposure Positions**

The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent device edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom



## 11. WiFi/Bluetooth Output Power (Unit: dBm)

### General Note:

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6\text{W/kg}$  and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
3. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, additional output power measurements were not necessary.
4. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC device or hotspot mode configurations with multiple test positions.
5. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
6. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
7. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4\text{ W/kg}$ , further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4\text{ W/kg}$ , SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8\text{ W/kg}$  or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8\text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.
8. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
9. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
10. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
11. When SAR testing for 802.11ax is required
  - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
  - b. Otherwise, consider the fully allocated channel for SAR testing
  - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel



<WLAN 2.4GHz Mode 1>

2.4GHz WLAN				Ant A			Ant B			Ant A+Ant B			
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
2.4GHz WLAN	802.11b 1Mbps	1	2412	17.00	17.50	99.50	16.96	17.50	99.50				
		6	2437	17.18	17.50		17.00	17.50					
		11	2462	17.15	17.50		16.82	17.50					
		12	2467	17.15	17.50		16.81	17.50					
		13	2472	17.16	17.50		15.88	16.50					
	802.11g 6Mbps	1	2412		17.50			17.50					
		6	2437		17.50			17.50					
		11	2462		17.50			17.50					
		12	2467		15.50			15.25					
		13	2472		12.50			12.50					
	802.11n-HT20 MCS0	1	2412		17.50			17.50					
		6	2437		17.50			17.50				20.51	
		11	2462		17.50			17.50				20.51	
		12	2467		15.50			15.25				18.39	
		13	2472		12.50			12.50				15.51	
	802.11n-HT40 MCS0	3	2422	Not Required	17.00	Not Required	Not Required	15.75	Not Required				19.04
		6	2437		17.25			17.50				20.39	
		9	2452		17.00			15.75				19.43	
		10	2457		12.75			12.50				15.64	
	802.11ax-HE20 MCS0	11	2462		11.50			10.25				13.93	Not Required
		1	2412		17.00			17.50		Not Required		20.27	
		6	2437		17.50			16.50				20.04	
		11	2462		17.00			16.75				19.89	
		12	2467		14.00			12.25				16.22	
	802.11ax-HE40 MCS0	13	2472		9.75			7.75				11.87	
		3	2422		16.50			15.50				19.04	
		6	2437		17.25			17.50				20.39	
		9	2452		17.00			15.75				19.43	
		10	2457		12.75			12.50				15.64	
			11	2462		11.50		10.25				13.93	



<WLAN 5GHz Mode 1>

5.2GHz WLAN				Ant A			Ant B			Ant A+Ant B								
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %						
	5.2GHz WLAN	802.11a 6Mbps	36	5180	Not Required	16.00	Not Required	Not Required	18.25	Not Required								
40			5200															
44			5220															
48			5240															
802.11n-HT20 MCS0		36	5180														20.28	
		40	5200														20.28	
		44	5220														20.28	
		48	5240														20.28	
802.11n-HT40 MCS0		38	5190											17.75			19.97	
		46	5230											18.25			20.28	
802.11ac-VHT20 MCS0		36	5180											18.25			20.28	
		40	5200											18.25			20.28	
		44	5220											18.25			20.28	
802.11ac-VHT40 MCS0		38	5190											17.75			19.97	
		46	5230											18.25			20.28	
802.11ac-VHT80 MCS0		42	5210											17.75			19.97	
802.11ax-HE20 MCS0		36	5180											18.25			20.28	
		40	5200											18.25			20.28	
		44	5220											18.25			20.28	
		48	5240											18.25			20.28	
802.11ax-HE40 MCS0	38	5190					17.75			19.97								
	46	5230					18.25			20.28								
802.11ax-HE80 MCS0	42	5210					17.75			19.97								



5.3GHz WLAN				Ant A			Ant B			Ant A+Ant B								
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %							
5.3GHz WLAN	802.11a 6Mbps	52	5260	Not required	Not required	17.89	18.25	97.70										
		56	5280			16.00	18.25											
		60	5300			16.00	18.25											
		64	5320			16.00	18.25											
	802.11n-HT20 MCS0	52	5260	Not required	Not required	Not Required	Not Required	Not Required		20.28	Not Required							
		56	5280						16.00	18.25		20.28						
		60	5300						16.00	18.25		20.28						
		64	5320						16.00	18.25		20.28						
	802.11n-HT40 MCS0	54	5270	15.81	16.00	99.00	17.94	18.25	99.00	20.28	Not Required							
		62	5310	15.93	16.00		16.73	17.25		19.68								
	802.11ac-VHT20 MCS0	52	5260	Not Required	Not Required	Not Required	Not Required	Not Required		20.28	Not Required							
		56	5280						16.00	18.25		20.28						
		60	5300						16.00	18.25		20.28						
		64	5320						16.00	18.25		20.28						
	802.11ac-VHT40 MCS0	54	5270	Not Required	Not Required	Not Required	Not Required	Not Required		20.28	Not Required							
		62	5310						16.00	17.25		19.68						
802.11ac-VHT80 MCS0	58	5290	16.00	16.00	98.70	Not Required	Not Required	Not Required	17.50	19.82								
802.11ac-VHT160 MCS0	50	5250	Not Required	Not Required	Not Required				Not Required	Not Required	14.00	17.01						
802.11ax-HE20 MCS0	52	5260									Not Required	Not Required	Not Required	Not Required	Not Required	18.25	20.28	
	56	5280														16.00	18.25	20.28
	60	5300														16.00	18.25	20.28
	64	5320														16.00	18.25	20.28
802.11ax-HE40 MCS0	54	5270									Not Required	Not Required	Not Required	Not Required	Not Required	18.25	20.28	
	62	5310														16.00	17.25	19.68
802.11ax-HE80 MCS0	58	5290									Not Required	Not Required	Not Required	Not Required	Not Required	17.50	19.82	
802.11ax-HE160 MCS0	50	5250														14.00	14.00	17.01



5.5GHz WLAN				Ant A			Ant B			Ant A+Ant B	
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	100	5500	Not Required	16.50	Not Required	Not Required	16.50	Not Required			
	116	5580		16.50							
	124	5620		16.50							
	132	5660		16.50							
	144	5720		16.50							
802.11n-HT20 MCS0	100	5500	Not Required	16.50	Not Required	Not Required	16.50	Not Required	19.51	Not Required	
	116	5580		16.50			19.51				
	124	5620		16.50			19.51				
	132	5660		16.50			19.51				
	144	5720		16.50			19.51				
802.11n-HT40 MCS0	102	5510	Not Required	16.50	Not Required	Not Required	16.50	Not Required	19.51	Not Required	
	110	5550		16.50			19.51				
	126	5630		16.50			19.51				
	134	5670		16.50			19.51				
	142	5710		16.50			19.51				
802.11ac-VHT20 MCS0	100	5500	Not Required	16.50	Not Required	Not Required	16.50	Not Required	19.51	Not Required	
	116	5580		16.50			19.51				
	124	5620		16.50			19.51				
	132	5660		16.50			19.51				
	144	5720		16.50			19.51				
802.11ac-VHT40 MCS0	102	5510	Not Required	16.50	Not Required	Not Required	16.50	Not Required	19.51	Not Required	
	110	5550		16.50			19.51				
	126	5630		16.50			19.51				
	134	5670		16.50			19.51				
	142	5710		16.50			19.51				
802.11ac-VHT80 MCS0	106	5530	15.39	16.50	98.70	Not Required	15.82	16.50	98.70	19.51	
	122	5610	15.50	16.50			15.95	16.50	19.51		
	138	5690	15.12	16.50			15.09	16.50	19.51		
802.11ac-VHT160 MCS0	114	5570	Not Required	16.00	Not Required	Not Required	16.00	Not Required	19.01	Not Required	
802.11ax-HE20 MCS0	100	5500		16.50			19.51				
	116	5580		16.50			19.51				
	124	5620		16.50			19.51				
	132	5660		16.50			19.51				
	144	5720	16.50	19.51							
802.11ax-HE40 MCS0	102	5510	Not Required	16.50	Not Required	Not Required	16.50	Not Required	19.51	Not Required	
	110	5550		16.50			19.51				
	126	5630		16.50			19.51				
	134	5670		16.50			19.51				
	142	5710		16.50			19.51				
802.11ax-HE80 MCS0	106	5530	Not Required	16.50	Not Required	Not Required	16.50	Not Required	19.51	Not Required	
	122	5610		16.50			19.51				
	138	5690		16.50			19.51				
802.11ax-HE160 MCS0	114	5570	Not Required	16.00	Not Required	Not Required	16.00	Not Required	19.01	Not Required	





5.8GHz WLAN				Ant A			Ant B			Ant A+Ant B							
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %						
5.8GHz WLAN	802.11a 6Mbps	149	5745	Not Required	15.50	Not Required	Not Required	17.00	Not Required	Not Required	Not Required						
		157	5785		15.50			17.00									
		165	5825		15.50			17.00									
	802.11n-HT20 MCS0	149	5745		15.50			17.00									
		157	5785		15.50			17.00									
		165	5825		15.50			17.00									
	802.11n-HT40 MCS0	151	5755		15.24			15.50				99.00	16.38	17.00	99.00		
		159	5795		15.28			15.50					16.50	17.00			
	802.11ac-VHT20 MCS0	149	5745		Not Required			15.50				Not Required	Not Required	17.00	Not Required	Not Required	Not Required
		157	5785	15.50		17.00											
		165	5825	15.50		17.00											
	802.11ac-VHT40 MCS0	151	5755	15.50		17.00											
		159	5795	15.50		17.00											
	802.11ac-VHT80 MCS0	155	5775	15.30		15.50	98.70	16.52	17.00	98.70							
	802.11ax-HE20 MCS0	149	5745	Not Required		15.50	Not Required	Not Required	17.00	Not Required	Not Required			Not Required			
		157	5785			15.50			17.00								
		165	5825			15.50			17.00								
	802.11ax-HE40 MCS0	151	5755		15.50	17.00											
159		5795	15.50		17.00												
802.11ax-HE80 MCS0	155	5775	15.50		17.00												

5.9GHz WLAN				Ant A			Ant B			Ant A+Ant B							
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %						
5.9GHz WLAN	802.11a 6Mbps	169	5845	Not Required	15.50	Not Required	Not Required	17.00	Not Required	Not Required	Not Required						
		173	5865		15.50			17.00									
		177	5885		15.50			17.00									
	802.11n-HT20 MCS0	169	5845		15.50			17.00									
		173	5865		15.50			17.00									
		177	5885		15.50			17.00									
	802.11n-HT40 MCS0	167	5835		15.26			15.50				99.00	16.54	17.00	99.00		
		175	5875		15.15			15.50					16.07	17.00			
	802.11ac-VHT20 MCS0	169	5845		Not Required			15.50				Not Required	Not Required	17.00	Not Required	Not Required	Not Required
		173	5865	15.50		17.00											
		177	5885	15.50		17.00											
	802.11ac-VHT40 MCS0	167	5835	15.50		17.00											
		175	5875	15.50		17.00											
	802.11ac-VHT80 MCS0	171	5855	15.08		15.50	98.70	16.56	17.00	98.70							
	802.11ac-VHT160 MCS0	163	5815	15.38		15.50	98.10	16.60	17.00	98.10							
	802.11ax-HE20 MCS0	169	5845	Not Required		15.50	Not Required	Not Required	17.00	Not Required	Not Required			Not Required			
		173	5865			15.50			17.00								
		177	5885		15.50	17.00											
802.11ax-HE40 MCS0	167	5835	15.50		17.00												
	175	5875	15.50		17.00												
802.11ax-HE80 MCS0	171	5855	15.50		17.00												
802.11ax-HE160 MCS0	163	5815	15.50		17.00												



<WLAN 6GHz Mode 1>

WiFi 6E				Ant A			Ant B			Ant A+Ant B						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %				
WiFi 6E	802.11ax-HE20 MCS0	1	5955	Not required	5.50	Not required	Not required	5.50	Not required	Not required	8.51	Not required				
		57	6235		5.50			8.51								
		113	6515		5.50			8.51								
		173	6815		4.75			7.76								
		233	7115		5.50			8.51								
	802.11ax-HE40 MCS0	3	5965		8.75			11.76								
		59	6245		8.75			11.76								
		107	6485		8.00			11.01								
		171	6805		8.00			11.01								
	802.11ax-HE80 MCS0	7	5985		11.25			14.26								
		71	6305		11.25			14.26								
		119	6545		11.25			14.26								
		167	6785		10.50			13.51								
		215	7025		10.50			13.51								
	802.11ax-HE160 MCS0	15	6025		13.73			14.00			98.10		13.70	14.00	98.10	17.01
		47	6185		13.69			14.00					13.68	14.00		17.01
		111	6505		13.31			14.00					13.47	14.00		17.01
		175	6825		12.08			13.25					11.99	13.25		16.26
		207	6985		13.05			13.25					12.81	13.25		16.26



<WLAN 2.4GHz Mode 2>

2.4GHz WLAN				Ant A			Ant B			Ant A+Ant B			
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.04	21.00	99.50	20.37	21.00	99.50				
		6	2437	20.11	21.00		20.20	21.00					
		11	2462	20.26	21.00		20.03	21.00					
		12	2467	18.99	20.00		18.86	19.75					
		13	2472	17.01	17.50		15.89	16.50					
	802.11g 6Mbps	1	2412	Not required	18.00	Not required	Not required	18.00	Not required	Not required			
		6	2437		21.00			21.00					
		11	2462		17.75			17.75					
		12	2467		15.50			15.25					
		13	2472		12.50			12.50					
	802.11n-HT20 MCS0	1	2412	Not required	18.00	Not required	Not required	18.00	Not required	Not required		21.01	Not required
		6	2437		21.00			21.00				24.01	
		11	2462		17.75			17.75				20.76	
		12	2467		15.50			15.25				18.39	
		13	2472		12.50			12.50				15.51	
	802.11n-HT40 MCS0	3	2422	Not required	16.50	Not required	Not required	15.50	Not required	Not required		19.04	Not required
		6	2437		17.25			17.75				20.52	
		9	2452		17.00			15.75				19.43	
		10	2457		12.75			12.50				15.64	
		11	2462		11.50			10.25				13.93	
	802.11ax-HE20 MCS0	1	2412	Not required	17.00	Not required	Not required	17.75	Not required	Not required		20.40	Not required
		6	2437		17.50			16.50				20.04	
		11	2462		17.00			16.75				19.89	
		12	2467		14.00			12.25				16.22	
		13	2472		9.75			7.75				11.87	
	802.11ax-HE40 MCS0	3	2422	Not required	16.50	Not required	Not required	15.50	Not required	Not required		19.04	Not required
		6	2437		17.25			17.75				20.52	
		9	2452		17.00			15.75				19.43	
		10	2457		12.75			12.50				15.64	
		11	2462		11.50			10.25				13.93	



<WLAN 5GHz Mode 2>

5.2GHz WLAN				Ant A			Ant B			Ant A+Ant B		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.2GHz WLAN	802.11a 6Mbps	36	5180	Not required	21.00	Not required	Not required	20.00	Not required			
		40	5200							20.75		
		44	5220							21.00		
		48	5240							21.00		
	802.11n-HT20 MCS0	36	5180							20.00	23.01	
		40	5200							21.00	23.89	
		44	5220							21.00	24.01	
		48	5240							21.00	24.01	
	802.11n-HT40 MCS0	38	5190							18.25	21.02	
		46	5230							20.50	23.27	
	802.11ac-VHT20 MCS0	36	5180							20.00	23.01	
		40	5200							21.00	23.89	
		44	5220							21.00	24.01	
	802.11ac-VHT40 MCS0	38	5190							18.25	21.02	
		46	5230							20.50	23.27	
	802.11ac-VHT80 MCS0	42	5210							17.50	20.64	
	802.11ax-HE20 MCS0	36	5180							20.00	23.01	
		40	5200							21.00	23.89	
		44	5220							21.00	24.01	
		48	5240							21.00	24.01	
802.11ax-HE40 MCS0	38	5190	18.25	21.02								
46	5230	20.50	23.27									
802.11ax-HE80 MCS0	42	5210	17.50	20.64								



5.3GHz WLAN				Ant A			Ant B			Ant A+Ant B		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
5.3GHz WLAN	802.11a 6Mbps	52	5260	Not required	Not required	Not required	21.00	Not required	Not required			
		56	5280				21.00					
		60	5300				21.00					
		64	5320				20.50					
	802.11n-HT20 MCS0	52	5260	Not required	Not required	Not required	21.00	Not required	Not required		24.01	
		56	5280				21.00				24.01	
		60	5300				21.00				24.01	
		64	5320				20.50				23.39	
	802.11n-HT40 MCS0	54	5270	20.27	21.00	99.00	20.52	21.00	99.00		24.01	
		62	5310	16.20	17.00		16.64	17.25			20.14	
	802.11ac-VHT20 MCS0	52	5260	Not required	Not required	Not required	21.00	Not required	Not required		24.01	
		56	5280				21.00				24.01	
		60	5300				21.00				24.01	
	802.11ac-VHT40 MCS0	64	5320	Not required	Not required	Not required	20.50	Not required	Not required		23.39	
		54	5270				21.00				24.01	
	802.11ac-VHT80 MCS0	62	5310	Not required	Not required	Not required	17.00	Not required	Not required		20.14	
		58	5290				16.75				17.50	
	802.11ac-VHT160 MCS0	50	5250	Not required	14.00	Not required	14.00	14.00	Not required		17.01	
	802.11ax-HE20 MCS0	52	5260	Not required	Not required	Not required	21.00	Not required	Not required		24.01	
		56	5280				21.00				24.01	
60		5300	21.00							24.01		
64		5320	20.50							23.39		
802.11ax-HE40 MCS0	54	5270	Not required	Not required	Not required	21.00	Not required	Not required		24.01		
	62	5310				17.00				20.14		
802.11ax-HE80 MCS0	58	5290	Not required	17.75	Not required	17.50	17.50	Not required		20.64		
802.11ax-HE160 MCS0	50	5250	Not required	14.00	Not required	14.00	14.00	Not required		17.01		



5.5GHz WLAN				Ant A			Ant B			Ant A+Ant B		
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
802.11a 6Mbps	100	5500	Not required	20.50	Not required	Not required	20.25	Not required	Not required	23.39	Not required	
	116	5580		21.00			21.00					
	124	5620		21.00			21.00					
	132	5660		21.00			21.00					
	144	5720		21.00			21.00					
802.11n-HT20 MCS0	100	5500	Not required	20.50	Not required	Not required	20.25	Not required	Not required	24.01	Not required	
	116	5580		21.00			21.00					
	124	5620		21.00			21.00					
	132	5660		21.00			21.00					
	144	5720		21.00			21.00					
802.11n-HT40 MCS0	102	5510	18.60	19.25	99.00	Not required	19.00	Not required	Not required	22.14	Not required	
	110	5550	19.59	21.00			21.00					
	126	5630	20.10	21.00			21.00					
	134	5670	20.35	21.00			21.00					
	142	5710	20.65	21.00			21.00					
802.11ac-VHT20 MCS0	100	5500	Not required	20.50	Not required	Not required	20.25	Not required	Not required	23.39	Not required	
	116	5580		21.00			21.00					
	124	5620		21.00			21.00					
	132	5660		21.00			21.00					
	144	5720		21.00			21.00					
802.11ac-VHT40 MCS0	102	5510	Not required	19.25	Not required	Not required	19.00	Not required	Not required	22.14	Not required	
	110	5550		20.25			21.00					
	126	5630		20.63			21.00					
	134	5670		20.75			21.00					
	142	5710		21.00			21.00					
802.11ac-VHT80 MCS0	106	5530	17.67	18.50	99.00	17.56	18.50	98.70	Not required	21.51	Not required	
	122	5610	20.03	21.00		20.15	21.00					
	138	5690	20.16	21.00		19.75	21.00					
802.11ac-VHT160 MCS0	114	5570	Not required	16.00	Not required	Not required	16.00	Not required	Not required	19.01	Not required	
802.11ax-HE20 MCS0	100	5500		20.50			20.25					
	116	5580		21.00			21.00					
	124	5620		21.00			21.00					
	132	5660		21.00			21.00					
	144	5720		21.00			21.00					
802.11ax-HE40 MCS0	102	5510		20.50			20.25					
	110	5550		21.00			21.00					
	126	5630		21.00			21.00					
	134	5670		21.00			21.00					
	142	5710		20.50			20.50					
802.11ax-HE80 MCS0	106	5530		18.50			18.50					
	122	5610		20.38			21.00					
	138	5690		20.88			21.00					
802.11ax-HE160 MCS0	114	5570		16.00			16.00					



5.8GHz WLAN				Ant A			Ant B			Ant A+Ant B				
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %			
802.11a 6Mbps	149	5745		21.00			21.00							
	157	5785		21.00			21.00							
	165	5825		21.00			21.00							
802.11n-HT20 MCS0	149	5745		21.00			21.00							
	157	5785		21.00			21.00							
	165	5825		21.00			21.00							
802.11n-HT40 MCS0	151	5755	Not required	21.00	Not required	Not required	21.00	Not required						
	159	5795		21.00			20.88							
802.11ac-VHT20 MCS0	149	5745		21.00			21.00							
	157	5785		21.00			21.00							
	165	5825		21.00			21.00							
802.11ac-VHT40 MCS0	151	5755		21.00			21.00		Not required					
	159	5795		21.00			20.88							
802.11ac-VHT80 MCS0	155	5775	20.30	21.00	98.70	20.04	21.00	98.70	Not required		Not required			
802.11ax-HE20 MCS0	149	5745		21.00			21.00							
	157	5785		21.00			21.00							
	165	5825		21.00			21.00							
802.11ax-HE40 MCS0	151	5755	Not required	21.00	Not required	Not required	21.00	Not required						
	159	5795		21.00			20.88							
802.11ax-HE80 MCS0	155	5775		21.00			21.00							

5.9GHz WLAN				Ant A			Ant B			Ant A+Ant B			
Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %		
802.11a 6Mbps	169	5845		20.00			20.00						
	173	5865		20.00			19.75						
	177	5885		18.00			18.25						
802.11n-HT20 MCS0	169	5845		20.00			20.00						
	173	5865		20.00			19.75						
	177	5885		18.00			18.25						
802.11n-HT40 MCS0	167	5835	Not required	21.00	Not required	Not required	20.75	Not required					
	175	5875		21.00			20.75						
802.11ac-VHT20 MCS0	169	5845		20.00			20.00						
	173	5865		20.00			19.75						
	177	5885		18.00			18.25						
802.11ac-VHT40 MCS0	167	5835		21.00			20.75						
	175	5875		21.00			20.75						
802.11ac-VHT80 MCS0	171	5855	20.76	21.00	98.70	20.02	21.00	98.70	Not required		Not required		
802.11ac-VHT160 MCS0	163	5815		17.25			17.00						
802.11ax-HE20 MCS0	169	5845		20.00			20.00						
	173	5865		20.00			19.75						
	177	5885	18.00	18.25									
802.11ax-HE40 MCS0	167	5835	Not required	21.00	Not required	Not required	20.88	Not required					
	175	5875		21.00			20.88						
802.11ax-HE80 MCS0	171	5855		21.00			20.50						
802.11ax-HE160 MCS0	163	5815		17.25			17.00						



<WLAN 6GHz Mode 2>

WiFi 6E				Ant A			Ant B			Ant A+Ant B						
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %	Average power (dBm)	Tune-Up Limit	Duty Cycle %				
WiFi 6E	802.11ax-HE20 MCS0	1	5955	Not required	5.50	Not required	Not required	5.50	Not required	Not required	8.51	Not required				
		57	6235		5.50			8.51								
		113	6515		5.50			8.51								
		173	6815		4.75			7.76								
		233	7115		5.50			8.51								
	802.11ax-HE40 MCS0	3	5965		8.75			11.76								
		59	6245		8.75			11.76								
		107	6485		8.00			11.01								
		171	6805		8.00			11.01								
	802.11ax-HE80 MCS0	7	5985		11.25			14.26								
		71	6305		11.25			14.26								
		119	6545		11.25			14.26								
		167	6785		10.50			13.51								
		215	7025		10.50			13.51								
	802.11ax-HE160 MCS0	15	6025		13.73			14.00			98.10		13.70	14.00	98.10	17.01
		47	6185		13.69			14.00					13.68	14.00		17.01
		111	6505		13.31			14.00					13.47	14.00		17.01
		175	6825		12.08			13.25					11.99	13.25		16.26
		207	6985		13.05			13.25					12.81	13.25		16.26



**<2.4GHz Bluetooth>**


**< Mode 1 / 2>**

Mode	Channel	Frequency (MHz)	Ant A		
			Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	10.03	6.40	6.36
	CH 39	2441	10.32	6.74	6.71
	CH 78	2480	10.49	6.48	6.39
Tune-up Limit			11	7	7

Mode	Channel	Frequency (MHz)	Ant A	
			Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	8.83	8.70
	CH 19	2440	9.18	9.11
	CH 39	2480	9.30	9.17
Tune-up Limit			10	10

**General Note:**

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 74.1% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

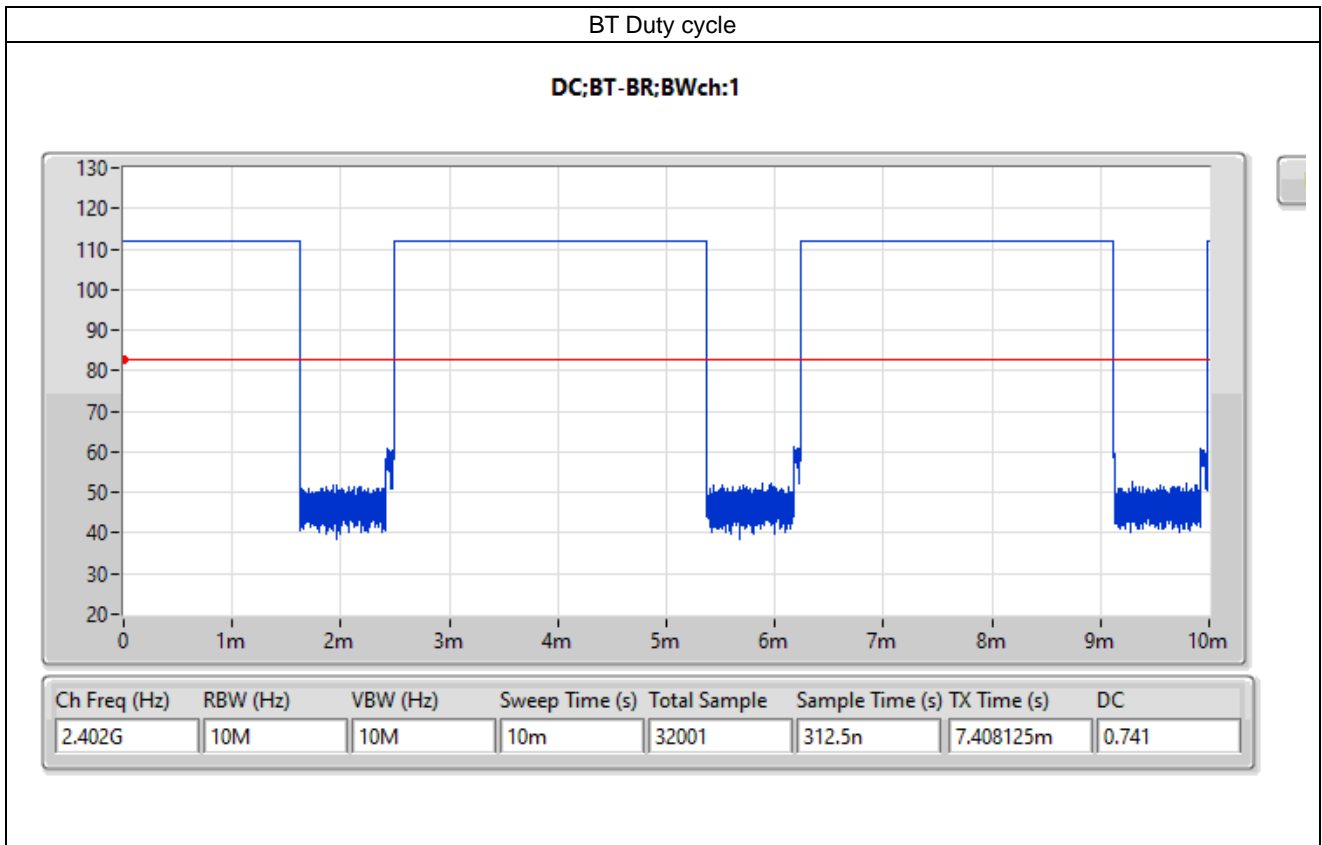



## 12. Standalone SAR Test Exclusion considerations

**General Note:**

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
  - $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
    - f(GHz) is the RF channel transmit frequency in GHz
    - Power and distance are rounded to the nearest mW and mm before calculation
    - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
  - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · ( f(MHz)/150)] mW, at 100 MHz to 1500 MHz
  - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	2.4GHz WLAN ANT B	BT/2.4GHz WLAN ANT A	5GHz WLAN ANT B	5GHz WLAN ANT A	6GHz WLAN ANT B	6GHz WLAN ANT A
	Calculated Frequency (MHz)	2437	2437	5855	5855	6985	6985
Maximum power (dBm)	21.0	21.0	21.0	21.0	14.0	14.0	
Maximum rated power(mW)	125.89	125.89	125.89	125.89	25.12	25.12	
Bottom Face	Separation distance(mm)	7.4	7.4	7.4	7.4	7.4	7.4
	exclusion threshold	26.6	26.6	41.2	41.2	9.0	9.0
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.00	5.00	5.00	5.00	5.00	5.00
	exclusion threshold	39.3	39.3	60.9	60.9	13.3	13.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	173.55	63.92	173.55	63.92	173.55	63.92
	exclusion threshold	235.0	322.0	201.0	605.0	196.0	196.0
	Testing required?	No	No	No	No	No	No
Edge 3	Separation distance(mm)	198.88	199.08	198.88	199.08	198.88	199.08
	exclusion threshold	1587.0	2518.0	1553.0	5881.0	1548.0	1548.0
	Testing required?	No	No	No	No	No	No
Edge 4	Separation distance(mm)	63.92	173.55	63.92	173.55	63.92	173.55
	exclusion threshold	1332.0	2103.0	1297.0	4884.0	1292.0	1292.0
	Testing required?	No	No	No	No	No	No
Bottom of device	Separation distance(mm)	206.26	206.46	206.26	206.46	206.26	206.46
	exclusion threshold	1659.0	2635.0	1627.0	6169.0	1619.0	1619.0
	Testing required?	No	No	No	No	No	No

## 13. SAR Test Results

### General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.

### WLAN Note:

- Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
- Per KDB 248227 D01v02r02, WLAN5.2GHz SAR testing is not required when the WLAN5.3GHz band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for WLAN5.2GHz band.
- When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
- For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
- For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
- Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$ W/kg and SAR peak to location ratio  $\leq 0.04$ , no additional SAR measurements for MIMO.
- During SAR testing the WLAN transmission was verified using a spectrum analyzer.

### WLAN PD Note:

- The WiFi 6E PD was performed according 2020 TCB workshop RF Exposure 5G RFX Policies Interim Procedures.
- First, evaluate SAR using 6-7 GHz parameters per IEC/IEEE 62209-1528:2020 and using highest SAR test configurations evaluate incident PD using the mmw near-field probe and total-field/power-density reconstruction method (2 mm closest meas. plane).
- Per Interim Procedures. The power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty  $> 30\%$ . Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor
- The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- The WiFi 6E RF Exposure results are used for simultaneous transmission analysis with the other transmitters and total exposure ratio, the analysis can be found in this report section 14.
- Absorbed power density (APD) using a 4cm<sup>2</sup> averaging area is reported based on SAR measurements.
- Power density was calculated by repeated E-field measurements on two measurement planes separated by  $\lambda/4$ .
- The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
- The measurement procedure consists of measuring the PD<sub>inc</sub> at two different distances: 2 mm (compliance distance) and  $\lambda/5$ . The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPD<sub>n</sub> fulfill the criterion described below. Since iPD ratio between the two distances is  $\geq -1$ dB, the grid step (0.0625) was sufficient for determining compliance at d=2mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$



13.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Configuration	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant B	Mode 1	6	2437	AWAN	17.00	17.50	1.122	99.5	1.005	-0.04	0.081	0.091
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	6	2437	AWAN	17.00	17.50	1.122	99.5	1.005	0.15	0.809	0.913
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	1	2412	AWAN	16.96	17.50	1.132	99.5	1.005	-0.08	0.801	0.911
01	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	11	2462	AWAN	16.82	17.50	1.169	99.5	1.005	0	0.852	1.001
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	12	2467	AWAN	16.81	17.50	1.172	99.5	1.005	-0.04	0.581	0.684
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	13	2472	AWAN	15.88	16.50	1.153	99.5	1.005	0.06	0.302	0.350
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	11	2462	HB	16.82	17.50	1.169	99.5	1.005	0.05	0.814	0.957
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	6	2437	HB	17.00	17.50	1.122	99.5	1.005	0.12	0.807	0.910
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	1	2412	HB	16.96	17.50	1.132	99.5	1.005	-0.11	0.787	0.896
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	12	2467	HB	16.81	17.50	1.172	99.5	1.005	0.08	0.601	0.707
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	13	2472	HB	15.88	16.50	1.153	99.5	1.005	0.12	0.287	0.332
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant A	Mode 1	6	2437	AWAN	17.18	17.50	1.076	99.5	1.005	-0.05	0.079	0.086
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant A	Mode 1	6	2437	AWAN	17.18	17.50	1.076	99.5	1.005	0.13	0.821	0.889
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant A	Mode 1	1	2412	AWAN	17.00	17.50	1.122	99.5	1.005	0.01	0.846	0.954
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant A	Mode 1	11	2462	AWAN	17.15	17.50	1.084	99.5	1.005	0.12	0.781	0.851
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant A	Mode 1	12	2467	AWAN	17.15	17.50	1.084	99.5	1.005	-0.1	0.602	0.656
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant A	Mode 1	13	2472	AWAN	17.16	17.50	1.081	99.5	1.005	0.17	0.392	0.426
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant A	Mode 1	1	2412	HB	17.00	17.50	1.122	99.5	1.005	0.04	0.817	0.921
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant A	Mode 1	6	2437	HB	17.18	17.50	1.076	99.5	1.005	0.03	0.792	0.857
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant A	Mode 1	11	2462	HB	17.15	17.50	1.084	99.5	1.005	0.14	0.752	0.820
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant A	Mode 1	12	2467	HB	17.15	17.50	1.084	99.5	1.005	-0.02	0.619	0.674
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant A	Mode 1	13	2472	HB	17.16	17.50	1.081	99.5	1.005	0.12	0.380	0.413



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant B	Mode 1	54	5270	AWAN	17.94	18.25	1.074	99	1.010	-0.05	0.226	0.245
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant B	Mode 1	54	5270	AWAN	17.94	18.25	1.074	99	1.010	-0.15	0.762	0.827
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant B	Mode 1	62	5310	AWAN	16.73	17.25	1.127	99	1.010	0.08	0.629	0.716
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Ant B	Mode 1	52	5260	AWAN	17.89	18.25	1.086	97.7	1.024	0.01	0.738	0.821
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Ant B	Mode 1	52	5260	HB	17.89	18.25	1.086	97.7	1.024	0.13	0.719	0.800
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Ant B	Mode 1	56	5280	HB	17.70	18.25	1.135	99	1.010	-0.07	0.717	0.822
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Ant B	Mode 1	60	5300	HB	17.76	18.25	1.119	99	1.010	-0.11	0.516	0.583
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	Ant B	Mode 1	64	5320	HB	17.65	18.25	1.148	99	1.010	0.15	0.516	0.598
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant A	Mode 1	58	5290	AWAN	16.00	16.00	1.000	98.7	1.013	0.04	0.073	0.074
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant A	Mode 1	58	5290	AWAN	16.00	16.00	1.000	98.7	1.013	0.15	0.829	0.840
02	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant A	Mode 1	54	5270	AWAN	15.81	16.00	1.045	99	1.010	-0.09	0.881	0.930
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant A	Mode 1	54	5270	HB	15.81	16.00	1.045	99	1.010	-0.14	0.668	0.704
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant A	Mode 1	62	5310	HB	15.93	16.00	1.016	99	1.010	0.06	0.799	0.820
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant B	Mode 1	122	5610	AWAN	15.95	16.50	1.135	98.7	1.013	-0.07	0.369	0.425
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant B	Mode 1	122	5610	AWAN	15.95	16.50	1.135	98.7	1.013	0.04	0.767	0.881
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant B	Mode 1	106	5530	AWAN	15.82	16.50	1.169	98.7	1.013	0.13	0.330	0.391
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant B	Mode 1	138	5690	AWAN	15.09	16.50	1.384	98.7	1.013	0.02	0.798	1.118
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant B	Mode 1	138	5690	HB	15.09	16.50	1.384	98.7	1.013	-0.08	0.730	1.023
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant B	Mode 1	122	5610	HB	15.95	16.50	1.135	98.7	1.013	-0.05	0.747	0.859
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant B	Mode 1	106	5530	HB	15.82	16.50	1.169	98.7	1.013	0.11	0.327	0.387
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant A	Mode 1	122	5610	AWAN	15.50	16.50	1.259	98.1	1.019	-0.11	0.048	0.062
03	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant A	Mode 1	122	5610	AWAN	15.50	16.50	1.259	98.7	1.013	0.09	0.879	1.121
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant A	Mode 1	106	5530	AWAN	15.39	16.50	1.291	98.7	1.013	0.14	0.842	1.101
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant A	Mode 1	138	5690	AWAN	15.12	16.50	1.374	98.7	1.013	-0.02	0.685	0.953
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant A	Mode 1	122	5610	HB	15.50	16.50	1.259	98.7	1.013	0.11	0.480	0.612
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant B	Mode 1	155	5775	AWAN	16.52	17.00	1.117	98.7	1.013	-0.02	0.477	0.540
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant B	Mode 1	155	5775	AWAN	16.52	17.00	1.117	98.7	1.013	0.13	0.845	0.956
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant B	Mode 1	159	5795	AWAN	16.50	17.00	1.122	99	1.010	-0.02	0.901	1.021
04	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant B	Mode 1	151	5755	HB	16.38	17.00	1.153	99	1.010	-0.02	0.901	1.050
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant B	Mode 1	159	5795	HB	16.50	17.00	1.122	99	1.010	-0.09	0.759	0.860
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	Ant A	Mode 1	155	5775	AWAN	15.30	15.50	1.047	98.7	1.013	-0.11	0.074	0.078
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant A	Mode 1	155	5775	AWAN	15.30	15.50	1.047	98.7	1.013	0.07	0.829	0.879
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant A	Mode 1	151	5755	AWAN	15.24	15.50	1.062	99	1.010	-0.05	0.729	0.782
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant A	Mode 1	155	5775	HB	15.30	15.50	1.047	98.7	1.013	0.16	0.813	0.863
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant A	Mode 1	151	5755	HB	15.24	15.50	1.062	99	1.010	0.01	0.689	0.739
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Face	0mm	Ant B	Mode 1	163	5815	AWAN	16.60	17.00	1.096	98.1	1.019	-0.06	0.337	0.377
	WLAN5GHz	802.11ac-VHT160 MCS0	Edge 1	0mm	Ant B	Mode 1	163	5815	AWAN	16.60	17.00	1.096	98.1	1.019	-0.05	0.815	0.911
05	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant B	Mode 1	171	5855	AWAN	16.56	17.00	1.107	98.7	1.013	0.01	0.848	0.951
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant B	Mode 1	171	5855	HB	16.56	17.00	1.107	98.7	1.013	-0.03	0.655	0.734
	WLAN5GHz	802.11ac-VHT160 MCS0	Bottom Face	0mm	Ant A	Mode 1	163	5815	AWAN	15.38	15.50	1.028	98.1	1.019	0.05	0.067	0.070
	WLAN5GHz	802.11ac-VHT160 MCS0	Edge 1	0mm	Ant A	Mode 1	163	5815	AWAN	15.38	15.50	1.028	98.1	1.019	0.11	0.805	0.843
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant A	Mode 1	171	5855	AWAN	15.08	15.50	1.102	98.7	1.013	-0.14	0.838	0.935
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant A	Mode 1	171	5855	HB	15.08	15.50	1.102	98.7	1.013	-0.18	0.704	0.786



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured APD (W/m <sup>2</sup> )	Reported APD (W/m <sup>2</sup> )
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Face	0mm	Ant B	Mode 1	15	6025	AWAN	13.72	14.00	1.067	98.1	1.019	-0.03	0.206	0.224	1.660	1.804
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant B	Mode 1	15	6025	AWAN	13.72	14.00	1.067	98.1	1.019	0.01	0.323	0.351	2.879	3.129
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant B	Mode 1	47	6185	AWAN	13.70	14.00	1.072	98.1	1.019	0.01	0.420	0.459	2.810	3.068
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant B	Mode 1	111	6505	AWAN	13.47	14.00	1.130	98.1	1.019	0.16	0.394	0.454	2.410	2.775
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant B	Mode 1	175	6825	AWAN	11.99	13.25	1.337	98.1	1.019	-0.05	0.282	0.384	2.030	2.765
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant B	Mode 1	207	6985	AWAN	12.81	13.25	1.107	98.1	1.019	0.11	0.280	0.316	2.250	2.537
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant B	Mode 1	47	6185	HB	13.70	14.00	1.072	98.1	1.019	-0.1	0.389	0.425	2.210	2.413
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Face	0mm	Ant A	Mode 1	15	6025	AWAN	13.73	14.00	1.194	98.1	1.019	0.02	0.033	0.040	0.210	0.256
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant A	Mode 1	15	6025	AWAN	13.73	14.00	1.064	98.1	1.019	-0.02	0.414	0.449	2.790	3.025
06	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant A	Mode 1	47	6185	AWAN	13.69	14.00	1.074	98.1	1.019	0.15	0.436	0.477	3.010	3.294
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant A	Mode 1	111	6505	AWAN	13.31	14.00	1.172	98.1	1.019	0.03	0.397	0.474	2.610	3.118
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant A	Mode 1	175	6825	AWAN	12.08	13.25	1.309	98.1	1.019	0.17	0.334	0.446	2.400	3.202

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Bottom Face	0mm	Ant A	Mode 1	78	2480	AWAN	10.49	11.00	1.125	74.1	1.124	0.1	0.001	0.001
	Bluetooth	1Mbps	Edge 1	0mm	Ant A	Mode 1	78	2480	AWAN	10.49	11.00	1.125	74.1	1.124	0.09	0.055	0.070
07	Bluetooth	1Mbps	Edge 1	0mm	Ant A	Mode 1	0	2402	AWAN	10.03	11.00	1.250	74.1	1.124	0.03	0.176	0.247
	Bluetooth	1Mbps	Edge 1	0mm	Ant A	Mode 1	39	2441	AWAN	10.32	11.00	1.169	74.1	1.124	0.05	0.053	0.070
	Bluetooth	1Mbps	Edge 1	0mm	Ant A	Mode 1	0	2402	HB	10.03	11.00	1.250	74.1	1.124	-0.01	0.107	0.150

13.2 6GHz PD SAR Result

Band	Mode	Test Position	Gap (mm)	Antenna	Antenna Vendor	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Grid Step (λ)	iPDn	iPD ratio (≥ -1)	Normal psPD (W/m <sup>2</sup> )	Total psPD (W/m <sup>2</sup> )
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant B	AWAN	Mode 1	15	6025	13.73	0.0625	2.26	2.270036408	3.89	4.3
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	10mm	Ant B	AWAN	Mode 1	15	6025	13.73	0.25	1.34		1.06	1.37
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant B	AWAN	Mode 1	207	6985	13.05	0.0625	1.78	2.25114137	1.55	2.24
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	8.59mm	Ant B	AWAN	Mode 1	207	6985	13.05	0.25	1.06		0.856	0.933

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Antenna Vendor	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Grid Step (λ)	Scaling Factor for Measurement Uncertainty	Power Drift (dB)	Normal psPD (W/m <sup>2</sup> )	Scaled Normal psPD (W/m <sup>2</sup> )	Total psPD (W/m <sup>2</sup> )	Scaled Total psPD (W/m <sup>2</sup> )
1	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant B	AWAN	Mode 1	15	6025	13.72	14.00	1.067	98.00	1.020	0.0625	1.5535	-0.01	3.89	6.57	4.3	7.27
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant B	AWAN	Mode 1	47	6185	13.70	14.00	1.072	98.00	1.020	0.0625	1.5535	0.01	2.42	4.11	2.68	4.55
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant B	AWAN	Mode 1	111	6505	13.47	14.00	1.130	98.00	1.020	0.0625	1.5535	0.15	2.5	4.48	2.77	4.96
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant B	AWAN	Mode 1	175	6825	11.99	13.25	1.337	98.00	1.020	0.0625	1.5535	-0.02	1.63	3.45	1.87	3.96
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant B	AWAN	Mode 1	207	6985	12.81	13.25	1.107	98.00	1.020	0.0625	1.5535	0.01	1.55	2.72	2.24	3.93
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant B	HB	Mode 1	15	6025	13.72	14.00	1.067	98.00	1.020	0.0625	1.5535	0.07	1.58	2.67	1.77	2.99
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant A	AWAN	Mode 1	15	6025	13.73	14.00	1.064	98.00	1.020	0.0625	1.5535	0.01	0.206	0.35	2.48	4.18
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant A	AWAN	Mode 1	47	6185	13.69	14.00	1.074	98.00	1.020	0.0625	1.5535	0.02	2.44	4.15	3.06	5.21
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant A	AWAN	Mode 1	111	6505	13.31	14.00	1.172	98.00	1.020	0.0625	1.5535	-0.08	2.17	4.03	3.17	5.89
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant A	AWAN	Mode 1	175	6825	12.08	13.25	1.309	98.00	1.020	0.0625	1.5535	-0.07	1.48	3.07	1.69	3.51
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant A	AWAN	Mode 1	207	6985	13.05	13.25	1.047	98.00	1.020	0.0625	1.5535	-0.14	3.04	5.04	3.81	6.32
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant A	HB	Mode 1	207	6985	13.05	13.25	1.047	98.00	1.020	0.0625	1.5535	0.01	2.53	4.20	2.87	4.76



13.3 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	11	2462	AWAN	16.82	17.50	1.169	99.5	1.005	0	0.852	-	1.001
2nd	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant B	Mode 1	11	2462	AWAN	16.82	17.50	1.169	99.5	1.005	0	0.845	1.01	0.993
1st	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant A	Mode 1	54	5270	AWAN	15.81	16.00	1.045	99	1.010	-0.09	0.881	-	0.930
2nd	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant A	Mode 1	54	5270	AWAN	15.81	16.00	1.045	99	1.010	-0.09	0.872	1.01	0.920
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant A	Mode 1	122	5610	AWAN	15.50	16.50	1.259	98.7	1.013	0.09	0.879	-	1.121
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant A	Mode 1	122	5610	AWAN	15.50	16.50	1.259	98.7	1.013	0.09	0.871	1.01	1.111
1st	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant B	Mode 1	151	5755	HB	16.38	17.00	1.153	99	1.010	-0.02	0.901	-	1.050
2nd	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant B	Mode 1	151	5755	HB	16.38	17.00	1.153	99	1.010	-0.02	0.867	1.04	1.010
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant B	Mode 1	171	5855	AWAN	16.56	17.00	1.107	98.7	1.013	0.01	0.848	-	0.951
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	Ant B	Mode 1	171	5855	AWAN	16.56	17	1.107	98.7	1.013	0.01	0.831	1.02	0.932

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/kg$ .
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/kg$ , only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.



**14. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Body
1.	WLAN2.4GHz Ant A + WLAN2.4GHz Ant B + NFC	Yes
2.	WLAN2.4GHz Ant B+ NFC+ Bluetooth Ant A	Yes
3.	WLAN5/6GHz Ant A + WLAN5/6GHz Ant B + NFC +Bluetooth Ant A	Yes

**General Note:**

1. The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
2. WLAN RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode. Therefore, SPLSR calculation was choose worst case with SAR test results of each antenna in SISO mode perform evaluation.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
  - v) The SPLSR calculated results please refer to section 14.2.

**14.1 Body Exposure Conditions**


Exposure Position	1	2	3	4	5	6	3+4+5+6 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)	2+5+6 Summed 1g SAR (W/kg)	1+2+5 SPLSR	1+2+5 Case No	3+4+5+6 SPLSR	3+4+5+6 Case No
	WLAN2.4GHz Ant A 1g SAR (W/kg)	WLAN2.4GHz Ant B 1g SAR (W/kg)	WLAN5/6GHz Ant A 1g SAR (W/kg)	WLAN5/6GHz Ant B 1g SAR (W/kg)	NFC 1g SAR (W/kg)	Bluetooth Ant A 1g SAR (W/kg)							
Bottom Face at 0mm	0.086	0.091	0.088	0.540	0.001	0.001	<b>0.630</b>	<b>0.178</b>	<b>0.093</b>				
Edge 1 at 0mm	0.954	1.001	1.121	1.118	0.001	0.247	<b>2.487</b>	<b>1.956</b>	<b>1.249</b>	<b>0.02</b>	<b>Case 1</b>	<b>0.03</b>	<b>Case 2</b>



**14.2 SPLSR Evaluation and Analysis**

**General Note:**

1. Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Therefore, the adjacent transmit antennas will be summed first, and then the SPLSR calculation will be evaluated with the farther transmitted antennas.
2.  $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$ . If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary
3. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

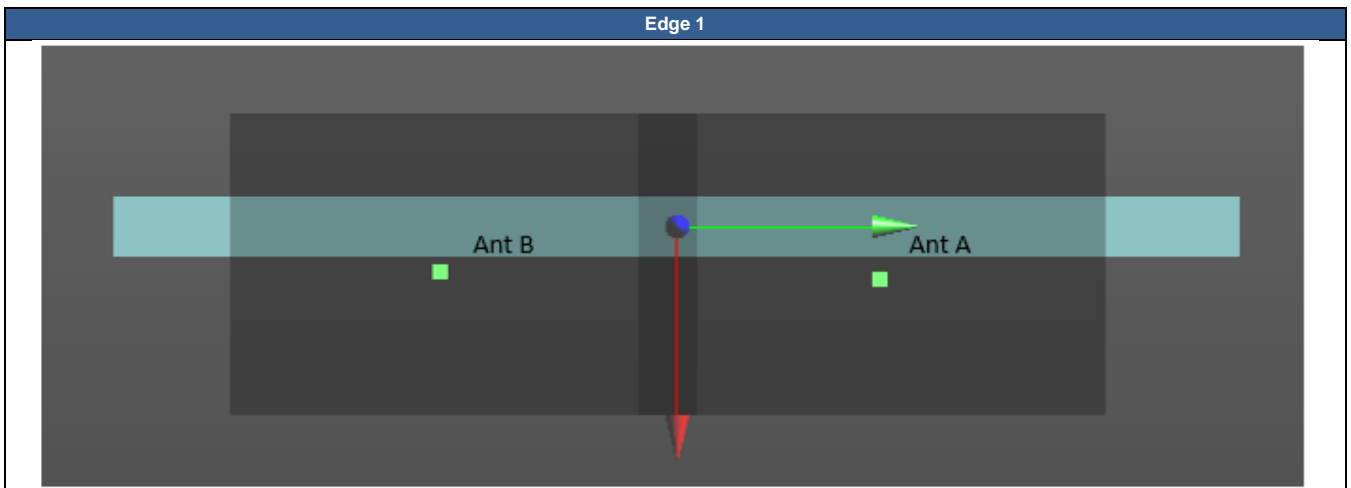

Case 1	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WLAN2.4GHz_802.11b 1Mbps_Ant A	Edge 1	0.954	0	5	-60	-181	122.0	1.956	0.02	Not required
	WLAN2.4GHz_802.11b 1Mbps_Ant B+NFC		1.002	0	3.2	62	-181				
Case 2	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WLAN5GHz_802.11ac-VHT80 MCS0_AntB + NFC	Edge 1	1.119	0	3.8	-75	-181	127.8	2.487	0.03	Not required
	WLAN5GHz_802.11ac-VHT80 MCS0_Ant A + BT_Ant A		1.368	0	4.4	52.8	-181				

**Test Engineer :** Randy Lin and Jefferson Lin

## **15. Uncertainty Assessment**

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

<b>Uncertainty Distributions</b>	<b>Normal</b>	<b>Rectangular</b>	<b>Triangular</b>	<b>U-Shape</b>
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

### **Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.



**Applicable for SAR Measurements:**

Uncertainty Budget (4 MHz - 10 GHz range)							
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	18.60	N	2	1	1	9.3	9.3
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Linearity	4.70	R	1.732	1	1	2.7	2.7
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Post-processing	4.00	R	1.732	1	1	2.3	2.3
<b>Test Sample Related</b>							
Device Holder	3.60	N	1	1	1	3.6	3.6
Test sample Positioning	3.03	N	1	1	1	3.0	3.0
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Power Drift	5.00	R	1.732	1	1	2.9	2.9
<b>Phantom and Setup</b>							
Phantom Uncertainty	7.60	R	1.732	1	1	4.4	4.4
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.77	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.77	2.3	2.2
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.77	1.1	1.1
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.77	1.7	1.6
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						14.5%	14.2%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						29.0%	28.4%



**Applicable for Power Density Measurements:**

Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	Standard Uncertainty (±dB)
Probe Calibration	0.49	N	1	1	0.49
Probe correction	0.00	R	1.732	1	0.00
Frequency response (BW ≤ 1 GHz)	0.20	R	1.732	1	0.12
Sensor cross coupling	0.00	R	1.732	1	0.00
Isotropy	0.50	R	1.732	1	0.29
Linearity	0.20	R	1.732	1	0.12
Probe scattering	0.00	R	1.732	1	0.00
Probe positioning offset	0.30	R	1.732	1	0.17
Probe positioning repeatability	0.04	R	1.732	1	0.02
Sensor mechanical offset	0.00	R	1.732	1	0.00
Probe spatial resolution	0.00	R	1.732	1	0.00
Field impedance dependence	0.00	R	1.732	1	0.00
Amplitude and phase drift	0.00	R	1.732	1	0.00
Amplitude and phase noise	0.04	R	1.732	1	0.02
Measurement area truncation	0.00	R	1.732	1	0.00
Data acquisition	0.03	N	1	1	0.03
Sampling	0.00	R	1.732	1	0.00
Field reconstruction	2.00	R	1.732	1	1.15
Forward transformation	0.00	R	1.732	1	0.00
Power density scaling	0.00	R	1.732	1	0.00
Spatial averaging	0.10	R	1.732	1	0.06
System detection limit	0.04	R	1.732	1	0.02
<b>Uncertainty terms dependent on the DUT and environmental factors</b>					
Probe coupling with DUT	0.00	R	1.732	1	0.0
Modulation response	0.40	R	1.732	1	0.2
Integration time	0.00	R	1.732	1	0.0
Response time	0.00	R	1.732	1	0.0
Device holder influence	0.10	R	1.732	1	0.1
DUT alignment	0.00	R	1.732	1	0.0
RF ambient conditions	0.04	R	1.732	1	0.0
Ambient reflections	0.04	R	1.732	1	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.0
Drift of the DUT		R	1.732	1	
<b>Combined Std. Uncertainty</b>					<b>1.34</b>
<b>Expanded STD Uncertainty (95%)</b>					<b>2.68</b>



## **16. References**

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [7] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [10] IEC/IEEE 62209-1528:2020, “Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)”, Oct. 2020
- [11] SPEAG DASY6 System Handbook
- [12] SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)