



# TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card
Brand Name	Intel® Wi-Fi 6E AX211
Model Name	AX211D2WH
FCC ID	PD9AX211D2H
Date of Test Start/End	2022-04-25 / 2022-06-01
Features	802.11ax, Tri Band, 2x2 Wi-Fi 6E + Bluetooth® 5.2 (see section 5)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15 E (see section 1)
---------------------	---

Test Report identification	220117-04.TR09
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.  
Reference to accreditation shall be used only by full reproduction of test report.

Issued by \_\_\_\_\_ Reviewed by \_\_\_\_\_

Khodor RIDA  
(Test Engineer Lead)

Zayd OUACHICHA  
(Technical Manager)

Intel Corporation S.A.S – WRF Lab  
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France  
Tel. +33493001400 / Fax +33493001401

# Table of Contents

---

1. Standards, reference documents and applicable test methods .....	3
2. General conditions, competences and guarantees .....	3
3. Environmental Conditions .....	3
4. Test samples .....	4
5. EUT Features .....	5
6. Remarks and comments .....	6
7. Test Verdicts summary .....	6
7.1. 802.11 a/n/ac/ax – U-NII- 4 .....	6
8. Document Revision History .....	6
<b>Annex A. Test &amp; System Description .....</b>	<b>7</b>
A.1 MEASUREMENT SYSTEM .....	7
A.1 TEST EQUIPMENT LIST .....	9
A.2 MEASUREMENT UNCERTAINTY EVALUATION .....	11
<b>Annex B. Test Results U-NII-4.....</b>	<b>12</b>
B.1 TEST CONDITIONS .....	12
B.2 TEST RESULTS TABLES .....	13
B.2.1 RADIATED SPURIOUS EMISSION.....	13
<b>Annex C. Photographs .....</b>	<b>15</b>
C.1 TEST SETUP .....	15
C.2 TEST SAMPLE .....	16

## 1. Standards, reference documents and applicable test methods

FCC	<ol style="list-style-type: none"> <li>1. FCC Title 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices. 2020-10-01 Edition</li> <li>2. FCC Title 47 CFR part 15 – Subpart C – §15.209 Radiated emission limits; general requirements. 2020-10-01 Edition</li> <li>3. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band.</li> <li>4. FCC OET KDB 789033 D02 v02r01 - Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) devices part 15, subpart E</li> <li>5. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.</li> <li>6. FCC OET KDB 291074 D01 v01 - General Requirements</li> <li>7. FCC OET KDB 291074 D02 v01 - EMC Measurement</li> <li>8. FCC OET KDB 291074 D03 v01 - QA General Questions and Answers</li> <li>9. FCC OET KDB 291074 D04 v01 – UN5GHz Checklist v01</li> </ol>
-----	---

## 2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

## 3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	23.0°C ± 1.6°C
Humidity	43.9% ± 14.6%

#### 4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	220117-04.S03	WiFi 6E Module	AX211D2WH	2C0DA7F5BA4F	2022-01-19	Used for 1-18 GHz Radiated Spurious Emissions tests
	180000-01.S05	Socket	Adapter 1216SD to M.2	-	2017-08-09	
	210611-02.S17	Adaptor	PowerBy SNJ A4	-	2021-07-02	
	220225-03.S07	Microwave Absorber	Eccosorb BSR-1	-	2022-03-14	
	210209-01.S06	Extender	ADEXELEC	-	2020-06-04	
	200611-03.S30	Laptop	Latitude 5401	6DJLK13	2020-08-19	
	220117-04.S22	Antenna 5 GHz	WRF-8dBi-Monopole-5G	-	2022-04-21	
	220117-04.S23	Antenna 5 GHz	WRF-8dBi-Monopole-5G	-	2022-04-21	
#02	220117-04.S01	WiFi 6E Module	AX211D2WH	7C0DA7F5B6AD	2022-01-19	Used for 30 MHz-1 GHz and for 18-40 GHz Radiated Spurious Emissions tests
	180001-01.S21	Socket	Socket WsP/ThP /GfP/HrP	-	2021-06-07	
	200611-01.S09	Adaptor	PowerBy SNJ A4	-	2020-11-30	
	220225-03.S07	Microwave Absorber	Eccosorb BSR-1	-	2022-03-14	
	220225-03.S23	Extender	ADEXELEC	-	2022-03-14	
	170000-01.S13	Laptop	Latitude 5470	FT6LMC2	2017-05-30	
	220117-04.S24	Antenna 5 GHz	WRF-8dBi-Monopole-5G	-	2022-04-21	
	220117-04.S25	Antenna 5 GHz	WRF-8dBi-Monopole-5G	-	2022-04-21	

## 5. EUT Features

The herein information is provided by the customer.

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	Intel® Wi-Fi 6E AX211		
Model Name	AX211D2WH		
Software Version	DRTU_00699_99.0.69C		
Driver Version	99.0.69.5		
Prototype / Production	Production		
Supported Radios	802.11b/g/n/ax	2.4GHz (2400.0 – 2483.5 MHz)	
	802.11a/n/ac/ax	5.2GHz (5150.0 – 5350.0 MHz)	
		5.6GHz (5470.0 – 5725.0 MHz)	
		5.8GHz (5725.0 – 5895.0 MHz)	
	802.11ax	6.0GHz (5925.0 - 7125.0MHz)	
	Bluetooth 5.2	2.4GHz (2400.0 – 2483.5 MHz)	
Additional information			
Antenna Information	Transmitter	Chain 1 (A)	Chain 2 (B)
	Manufacturer	Intel WRF Lab	Intel WRF Lab
	Antenna type	Monopole	Monopole
	Part number	WRF-8dBi-Monopole-5G	WRF-8dBi-Monopole-5G
	Declared Antenna gain (dBi)	+8.26	+8.26

## 6. Remarks and comments

1. No deviations were made from the test methods listed in section 1 of this report
2. The low, mid, high channels were tested for each RF chain (A, B or A+B), bandwidth, modulation and sub-band. Only the worst case among the low, mid and high channels per sub-band has been reported

## 7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

### 7.1. 802.11 a/n/ac/ax – U-NII- 4

FCC part	Test name	Verdict
15.407 (b) (3) 15.209	Undesirable emissions limits: Spurious emissions (radiated)	P

## 8. Document Revision History

Revision #	Modified by	Revision Details
Rev. 00	K.Khatib	First Issue

# Annex A. Test & System Description

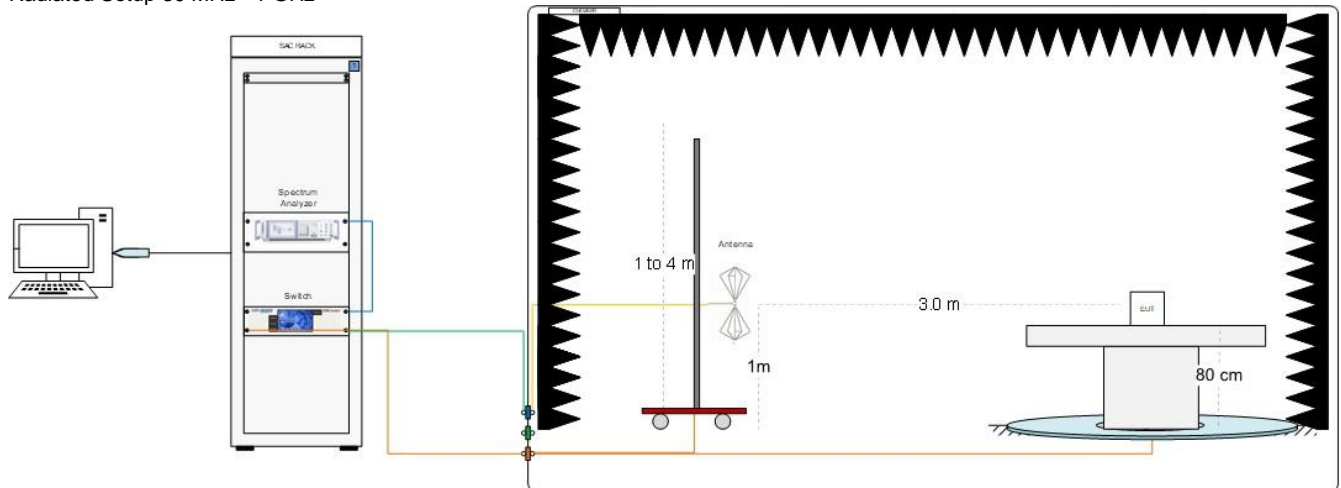
## A.1 Measurement System

Measurements were performed using the following setups, made in accordance to the general provisions of ANSI C63.10 2013.


The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.


### Radiated test setup

#### Radiated Setup 30 MHz - 1 GHz



#### Radiated Setup 1 GHz - 9.5 GHz

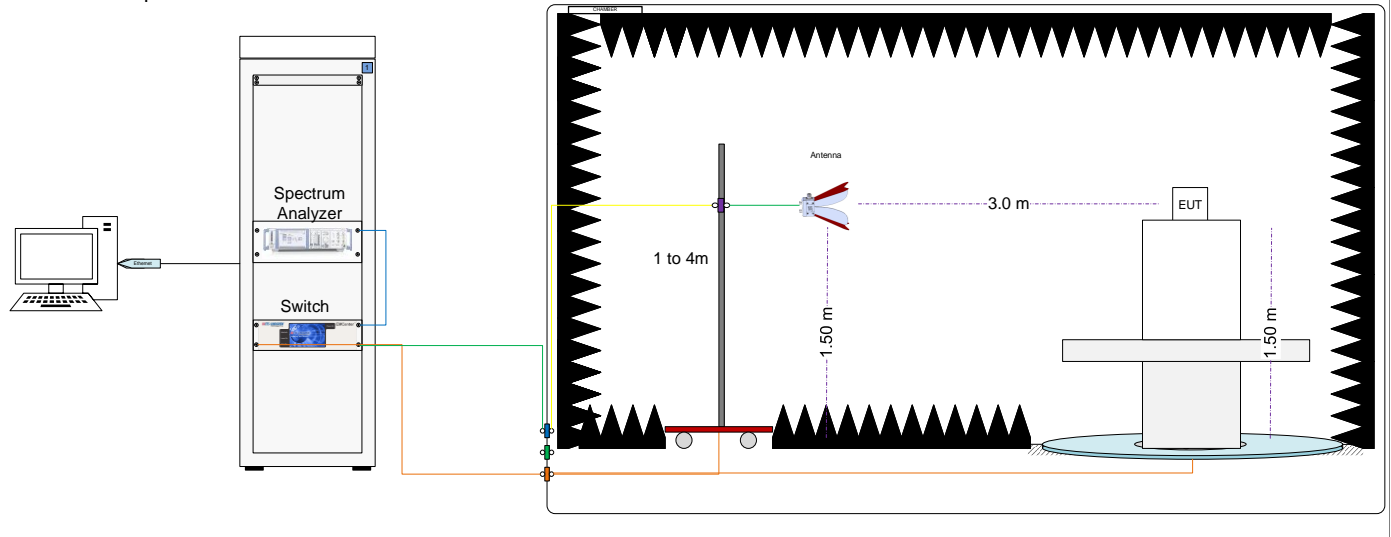

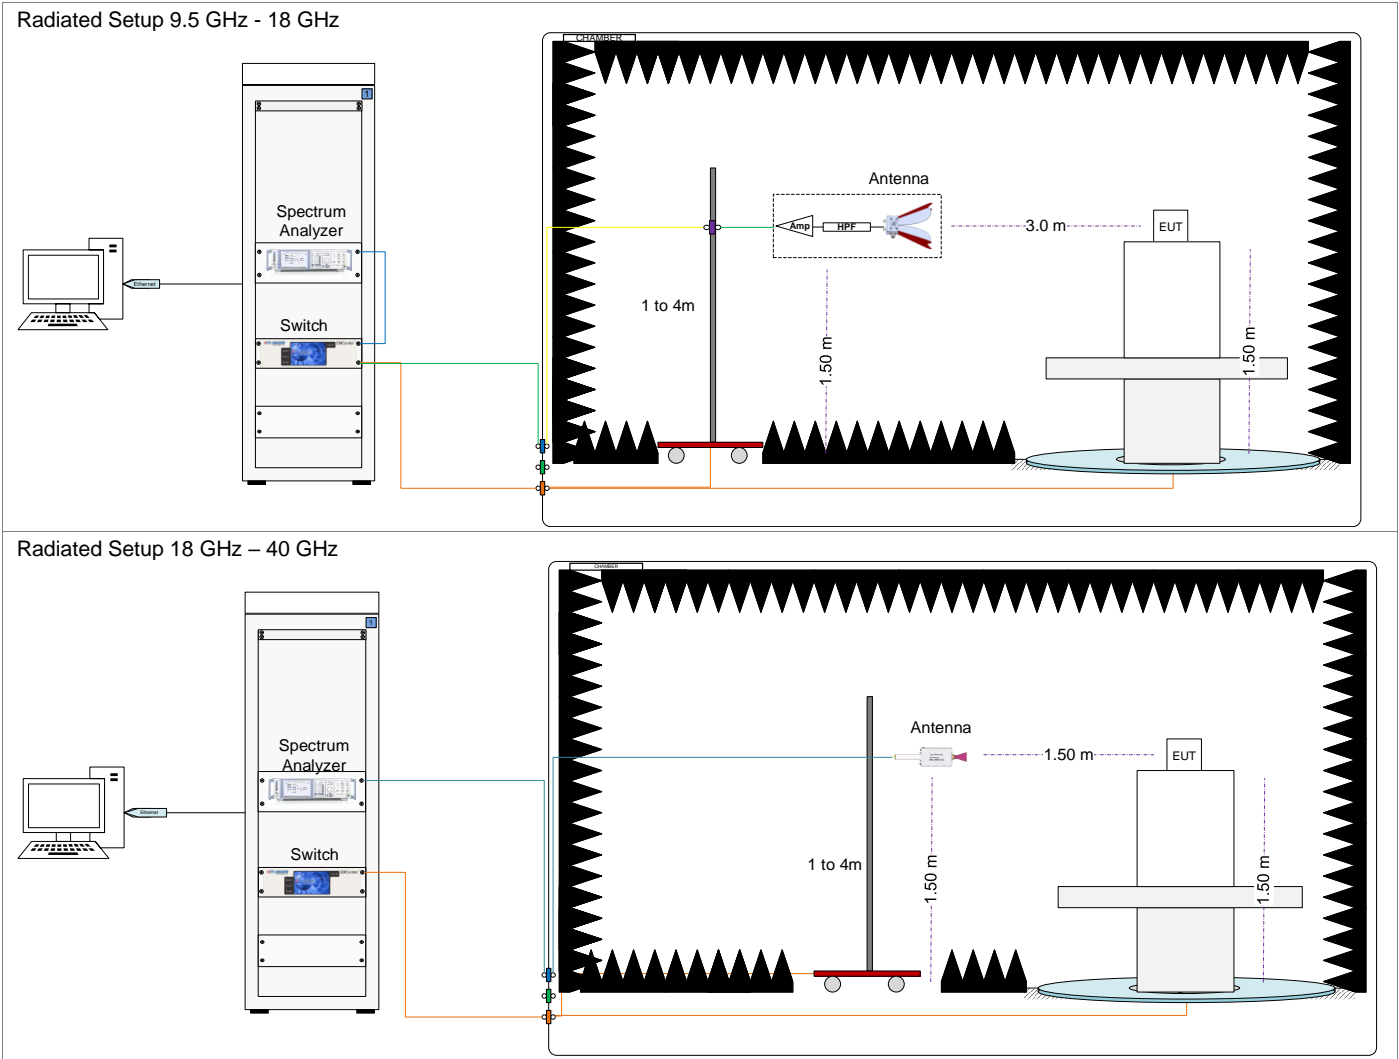

Sample Calculation

The spurious received voltage  $V$  (dB $\mu$ V) in the spectrum Analyzer is converted to Electric field strength using the transducer factor  $F$  corresponding to the Rx path Loss:

$$F \text{ (dB/m)} = \text{Rx Antenna Factor (dB/m)} + \text{Cable losses (dB)} - \text{Amplifiers Gain (dBi)}$$

$$E \text{ (dB}\mu\text{V/m)} = V \text{ (dB}\mu\text{V)} + F \text{ (dB/m)}$$

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \cdot \log(D_{\text{Meas}}/D_{\text{SpecLimit}})$$

where

$E_{\text{SpecLimit}}$  is the field strength of the emission at the distance specified by the limit, in dB $\mu$ V/m

$E_{\text{Meas}}$  is the field strength of the emission at the measurement distance, in dB $\mu$ V/m

$D_{\text{Meas}}$  is the measurement distance, in m

$D_{\text{SpecLimit}}$  is the distance specified by the limit, in m



## A.1 Test Equipment List

Radiated Setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
006-000	Anechoic chamber	FACT 3	5720	ETS Lindgren	2022-01-12	2024-01-12
006-001	Turntable	-	-	ETS Lindgren	N/A	N/A
006-008	Measurement Software v11.30.00	EMC32	100623	Rohde & Schwarz	N/A	N/A
147-000	Spectrum analyzer	FSW43	101847	Rohde & Schwarz	2020-11-02	2022-11-02
006-002	Switch & Positioning	EMC center	00159757	ETS Lindgren	N/A	N/A
006-011	Boresight antenna mast	BAM4.0-P	P/278/2890.01	Maturo	N/A	N/A
006-019	Biconical antenna 30 MHz – 1 GHz	UBAA9115 + BBVU9135 + DGA9552N	0286 + CH 9044	Schwarzbeck	2022-02-01	2024-02-01
057-000	Horn Antenna 3117 + Amplifier + HPF9.5	3117	00167062+00169546	ETS-Lindgren	2020-06-26	2022-06-26
007-008	Double Horn Ridged antenna	3116C-PA	00169308bis + 00196308	ETS-Lindgren	2021-08-05	2023-08-05
059-000	Double ridged horn antenna	3117-PA	00201542	ETS-Lindgren	2021-08-05	2023-08-05
006-059	RF Cable 7.0m	R286304174	20.46.369	Radiall	2022-03-04	2022-09-04
006-051	RF Cable 1.0m	CBL-1.5M-SMSM+	202879	Mini-Circuits	2022-02-02	2022-08-02
006-030	RF Cable 1.2m	UFA147A-0-0480-200200	MFR 64639223720-003	Micro-coax	2022-02-02	2022-08-02
006-034	Cable 1m - 1GHz to 18GHz	UFA147A	-	Utilflex	2022-02-02	2022-08-02
006-036*	Cable 1m – 30 MHz - 18GHz	UFB311A-0-0590-50U50U	MFR 64639 223230-001	Micro-coax	2022-02-02	2022-05-09
026-018	RF Cable 1.2m	0500990991200KE	18.23.179	Radiall	2022-05-09	2022-11-09
006-038*	Cable 7m - 18GHz to 40GHz	R286304009	-	Radiall	2022-02-02	2022-05-16
006-039	RF Cable 2.5m	0500990992500KE	19.23.395	Radiall	2022-02-02	2022-08-02
365-000	Temperature & Humidity logger	RA12E-TH1-RAS	00-80-A3-E1-6E-55	Avtech	2021-03-08	2023-03-08

N/A: Not Applicable

\*Item Not used during the out of calibration period

Radiated Setup #2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
007-000	Anechoic chamber	RFD-FA-100	5996	ETS Lindgren	2021-09-14	2023-09-14
007-002	Turntable	-	-	ETS Lindgren	N/A	N/A
007-003	Antenna Tower	2171B-3.0M	00150123	ETS Lindgren	N/A	N/A
007-006	Switch & Positioner	EMCenter	00151232	ETS Lindgren	N/A	N/A
007-005	Measurement SW, V11.20.00	EMC32	100401	Rohde & Schwarz	N/A	N/A
127-000	Spectrum Analyzer	FSV40	101358	Rohde & Schwarz	2021-01-15	2023-01-15
007-007	Double Ridge Horn (1-18GHz)	3117	00152266	ETS Lindgren	2022-03-29	2024-03-29
057-000	Horn Antenna 3117 + Amplifier + HPF9.5	3117	00167062+00169546	ETS-Lindgren	2020-06-26	2022-06-26
007-008	Double Horn Ridged antenna	3116C-PA	00169308bis 00196308	ETS-Lindgren	2021-08-05	2023-08-05
059-000	Double ridged horn antenna	3117-PA	00201542	ETS-Lindgren	2021-08-05	2023-08-05
007-022	RF Cable 1-18GHz, 1.5m	0501050991200GX	19.23.493	Radiall	2022-02-03	2022-08-03
007-020	RF Cable 1-18GHz, 1.2 m	2301761761200PJ	12.22.1104	Radiall	2022-02-03	2022-08-03
007-011	RF Cable 1-18GHz – 6.5m	140-8500-11-51	001	Spectrum	2022-02-03	2022-08-03
007-015	RF Cable 1GHz-18GHz 1.5m	-	-	Spirent	2022-02-03	2022-08-03
007-014	RF Cable 18-40 GHz 6m	R286304009	1747364	Radiall	2022-02-03	2022-08-03
007-023	RF Cable 1m DC-40GHz	PE360-100CM	-	Pasternack	2022-02-03	2022-08-03
007-018	RF Cable 1-9.5GHz 1.2m	0500990991200KE	-	Radiall	2022-02-03	2022-08-03
325-000	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-B9B7C6	Avtech	2022-01-17	2024-01-17

N/A: Not Applicable

Shared Radiated Equipment

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
412-000	DRTU Power finder V2.0	-	-	Intel	NA	NA
139-000	Power Sensor	NRP-Z81	104383	Rohde & Schwarz	2021-04-07	2023-04-07
140-000	Power Sensor	NRP-Z81	104382	Rohde & Schwarz	2022-03-25	2024-03-25

## A.2 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of  $k = 2$  to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Radiated tests <1GHz	$\pm 6.24$	dB
Radiated tests 1GHz – 40 GHz	$\pm 6.04$	dB

# Annex B. Test Results U-NII-4

The herein test results were performed by:

Test case measurement	Test Personnel
Radiated spurious emissions	K.Khatib, R.Simonini

## B.1 Test Conditions

For 802.11a mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, but not simultaneously.

For 802.11n20 & 802.11ax20 (20 MHz channel bandwidth), 802.11n40 and 802.11ax40 (40MHz channel bandwidth) 802.11ac80 & 802.11ax80 (80MHz channel bandwidth), and 802.11ac160 & 802.11ax160 (160MHz channel bandwidth) modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, and also simultaneously.

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

Transmission	Mode	Bandwidth (MHz)	Worst Case Data Rate
SISO	802.11a	20	6Mbps
	802.11n	20	HT0
		40	HT0
	802.11ac	80/160	VHT0
	802.11ax	20/40/80/160	HE0
MIMO	802.11n	20/40	HT8
	802.11ac	80/160	VHT0
	802.11ax	20/40/80/160	HE0

## B.2 Test Results Tables

### B.2.1 Radiated spurious emission

#### Standard references

FCC part	Limits																				
15.407 (b) (5) (iii)	For transmitters operating solely in the 5.850-5.895 GHz band or operating on a channel that spans across 5.725-5.895 GHz: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.																				
15.407 (b) (5) (ii)	For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz																				
15.209	<p>Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):</p> <table border="1" data-bbox="432 846 1425 1072"> <thead> <tr> <th data-bbox="432 846 683 913">Freq Range (MHz)</th> <th data-bbox="683 846 927 913">Field Strength (µV/m)</th> <th data-bbox="927 846 1176 913">Field Strength (dBµV/m)</th> <th data-bbox="1176 846 1425 913">Meas. Distance (m)</th> </tr> </thead> <tbody> <tr> <td data-bbox="432 913 683 954">30-88</td> <td data-bbox="683 913 927 954">100</td> <td data-bbox="927 913 1176 954">40</td> <td data-bbox="1176 913 1425 954">3</td> </tr> <tr> <td data-bbox="432 954 683 994">88-216</td> <td data-bbox="683 954 927 994">150</td> <td data-bbox="927 954 1176 994">43.5</td> <td data-bbox="1176 954 1425 994">3</td> </tr> <tr> <td data-bbox="432 994 683 1034">216-960</td> <td data-bbox="683 994 927 1034">200</td> <td data-bbox="927 994 1176 1034">46</td> <td data-bbox="1176 994 1425 1034">3</td> </tr> <tr> <td data-bbox="432 1034 683 1072">Above 960</td> <td data-bbox="683 1034 927 1072">500</td> <td data-bbox="927 1034 1176 1072">54</td> <td data-bbox="1176 1034 1425 1072">3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.</p>	Freq Range (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

#### Test procedure

The radiated setups shown in section *Test & System Description* were used to measure the radiated spurious emissions.

Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration selected from the chapter Annex B and using the low, middle and high channels.

Test Results

**30 MHz – 1 GHz, Radiated spurious emissions**

**Radiated Spurious – All modes**

Frequency	QuasiPeak	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	---
36.8	27.9	40.0	12.1	V
37.3	34.1	40.0	5.9	V

Note 1: The detected spurious signals do not depend on either the operating channel or the modulation mode.

802.11a


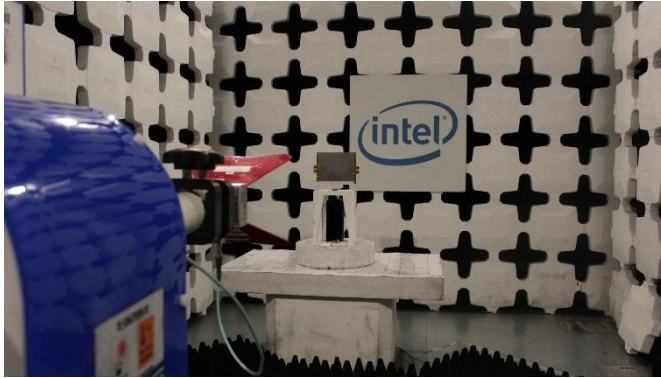
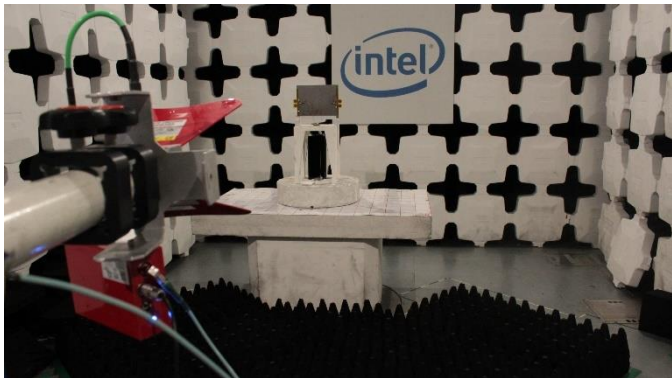
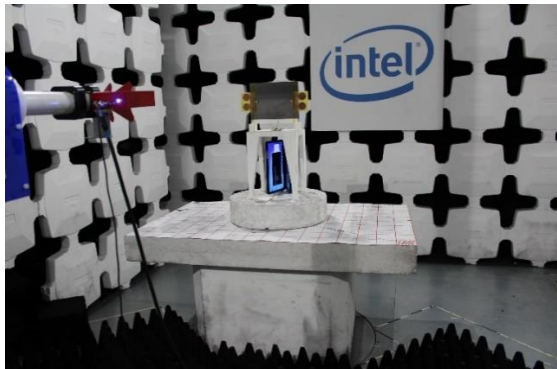
**1 GHz – 40 GHz, 802.11a, 6Mbps, Chain A**

**Radiated Spurious – CH175**





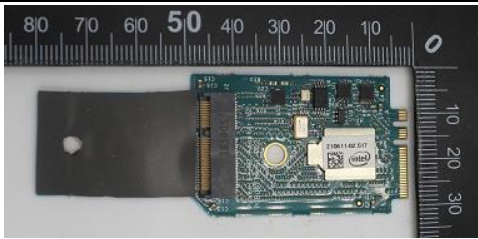
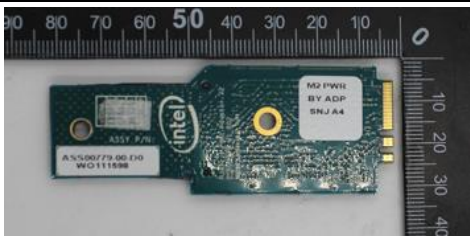
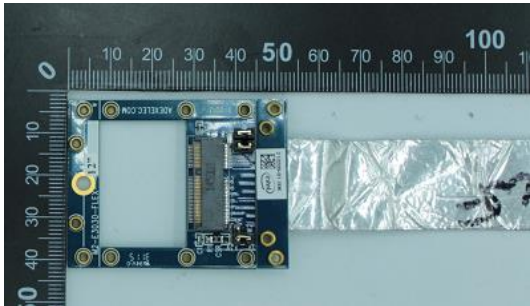

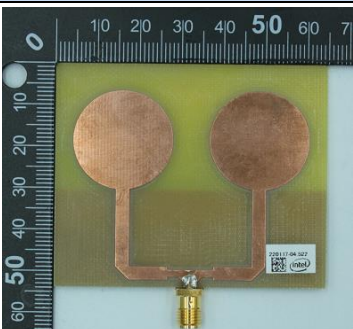

Frequency	MaxPeak	Average	RMS	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dBµV/m	dB	---
1672.9	52.8	---	---	74.0	21.4	H
1672.9	---	42.7	---	54.0	11.3	H
11756.2	---	47.6	---	54.0	6.4	H
11756.2	57.1	---	---	74.0	16.9	H
23512.2	47.8	---	---	88.2	40.4	V
23512.2	---	---	39.0	68.2	29.2	V

# Annex C. Photographs

## C.1 Test Setup





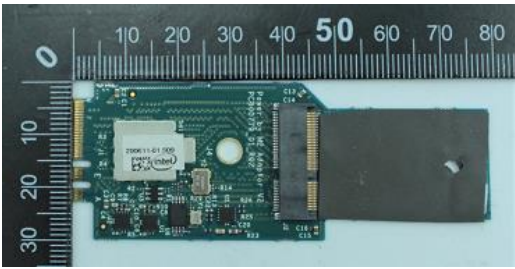
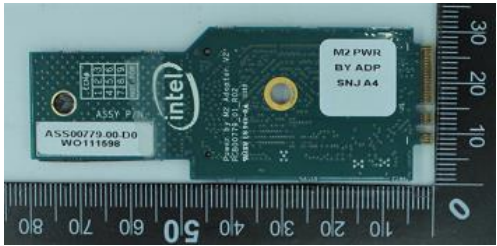
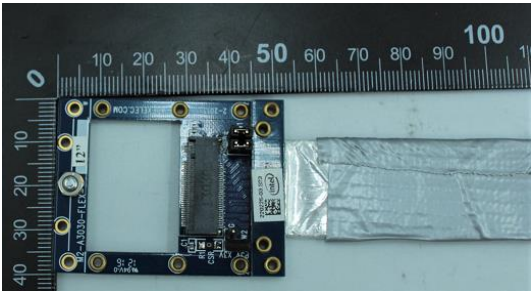



30 MHz – 1 GHz	1GHz – 9.5GHz
	
9.5 GHz – 18 GHz	18 GHz – 40 GHz
	

### C.2 Test Sample

Sample #01	
<b>Module Front</b> 	<b>Module Back</b> 
<b>Socket front</b> 	<b>Socket back</b> 
<b>Adaptor front (with absorber)</b> 	<b>Adaptor back</b> 
<b>Extender board</b> 	<b>Laptop</b> 
<b>Antenna 1</b> 	<b>Antenna 2</b> 



**Sample #02**

<p>Module Front</p>	<p>Module Back</p>
	
<p>Socket front</p>	<p>Socket back</p>
	
<p>Adaptor front (with absorber)</p>	<p>Adaptor back</p>
	
<p>Extender board</p>	<p>Laptop</p>
	
<p>Antenna 1</p>	<p>Antenna 2</p>
	

### **End of the report**

**This page is left intentionally blank and marks the last page of the test report.**