

**Regulatory WLAN Antenna Information
2.45/5GHz XXX17 Multiple Band Antennas with Cable
& Connector
For IEEE802.11b/g/a, UNII**

(English Language Required for Intel Regulatory Review / Approval)

Intel Corporation

Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	N/A	N/A	N/A	N/A
1E	Main & Aux antenna (Peak Gain W/ cable loss)	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Main & Aux antenna (Peak Gain only)	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Main & Aux antenna (Cable loss W/ connector)	Required	Required	Required	Required	Required
2	Dimensioned Photographs or Drawings of main & auxiliary antennas	Required	Desired	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	Required	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Required	Required	Required
5	Photograph(s) or Drawings showing location of antennas in platform.	Required	Required	Required	Required	Desired
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas and distance those antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A


Antenna Information

Section 1. Antenna Assembly Specifications

Antenna Assembly Summary:

1A Antenna Part Number	1B Manufacture	1C Antenna Type	1D Cable Assembly Part Number and Information	1E Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G VSWR	1H Cable Loss (dBi)
P/N: CAN4313360012501B Main Antenna	Phycomp/ Yageo Corporation	Semi-PIFA	Connector: (Hirose U.FL-LP) 50 ohm Coaxial. Length: 760mm diameter: 1.37mm	2400-2500MHz 0.6 dBi (peak)	2400-2500MHz 0.71 dBi (peak)	2400-2500MHz 2.5 max	2400-2500MHz -1.31 dBi (peak)
				5150MHz 1.4 dBi (peak)	5150MHz 0.02 dBi (peak)	5150MHz 2.85 max	5150MHz -1.42 dBi (peak)
				5350MHz 3.3 dBi (peak)	5350MHz -1.06 dBi (peak)	5350MHz 2.85 max	5350MHz -2.24 dBi (peak)
				5725MHz 4.0 dBi (peak)	5725MHz -1.71 dBi (peak)	5725MHz 2.85 max	5725MHz -2.29 dBi (peak)
P/N: CAN4313360012501B Auxiliary Antenna	Phycomp/ Yageo Corporation	Semi-PIFA	Connector: (Hirose U.FL-LP) 50 ohm Coaxial. Length: 950mm diameter: 1.37mm	2400-2500MHz 0.6 dBi (peak)	2400-2500MHz 1.03 dBi (peak)	2400-2500MHz 2.5 max	2400-2500MHz -1.63 dBi (peak)
				5150MHz 0.3 dBi (peak)	5150MHz 2.17 dBi (peak)	5150MHz 2.85 max	5150MHz -2.47 dBi (peak)
				5350MHz 2.3 dBi (peak)	5350MHz 0.28 dBi (peak)	5350MHz 2.85 max	5350MHz -2.58 dBi (peak)
				5725MHz 3.5 dBi (peak)	5725MHz -0.89 dBi (peak)	5725MHz 2.85 max	5725MHz -2.61 dBi (peak)
P/N: CAN431335902451B Bluetooth Antenna	Phycomp/ Yageo Corporation	Semi-PIFA	Connector: (Hirose U.FL-LP) 50 ohm Coaxial. Length: 69mm diameter: 0.81mm	2400-2500MHz 1.4 dBi (peak)	2400-2500MHz dBi (peak)	2400-2500MHz 2.0 max	2400-2500MHz 0.37 dBi (peak)

Section 2. Dimensioned Photos or Drawings of Antennas

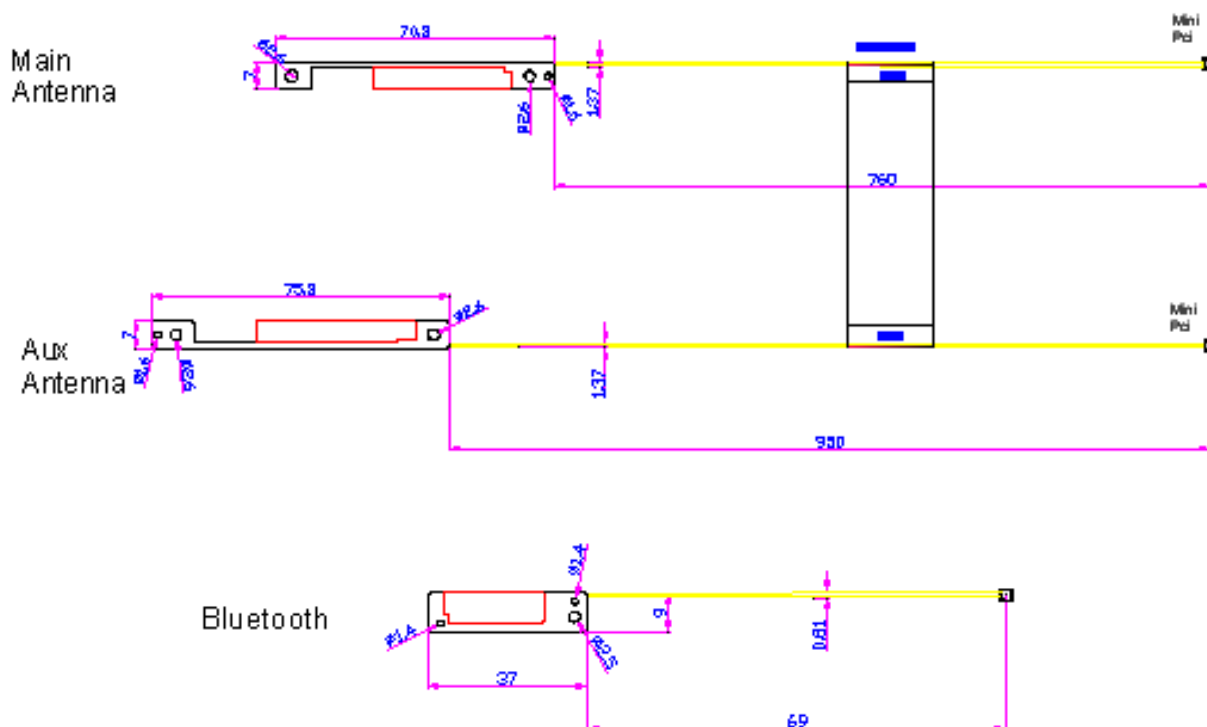


Section 3. Radiation characteristics of antennae Loaded in Host Platform

2400-2500MHz radiation characteristic


Main Antenna (Left Antenna: Red-Vertical Polarization; Blue-Horizontal Polarization)

Main antenna: 2400 MHz (Only YZ Plane)

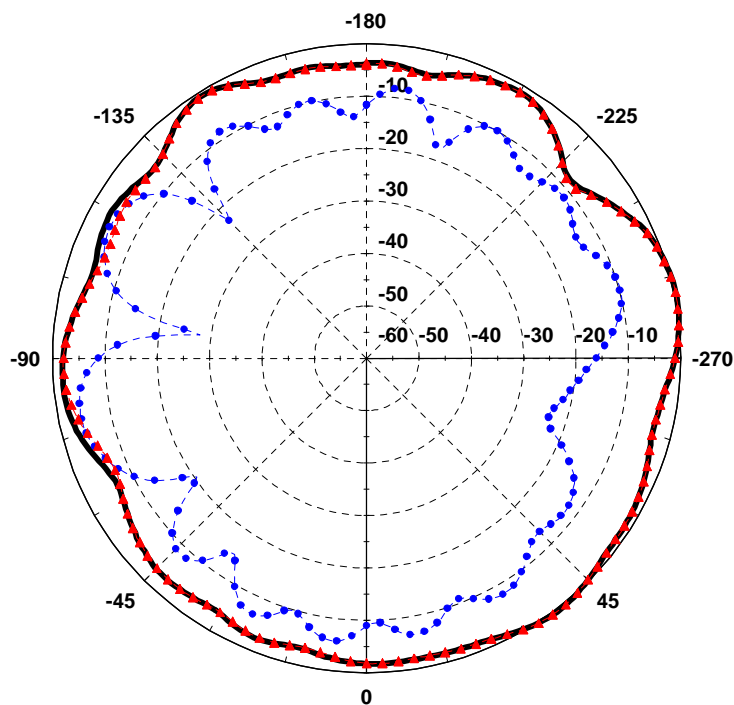


Vertical Pol.(max)=	0.5
Vertical Pol.(avg)=	-2.7
Horizontal Pol.(max)=	-4.3
Horizontal Pol.(avg)=	-9.7
Total Gain(max)=	0.6
Total Gain(avg)=	-2.5
Unit = dBi	

Main antenna: 2500 MHz (Only YZ Plane)

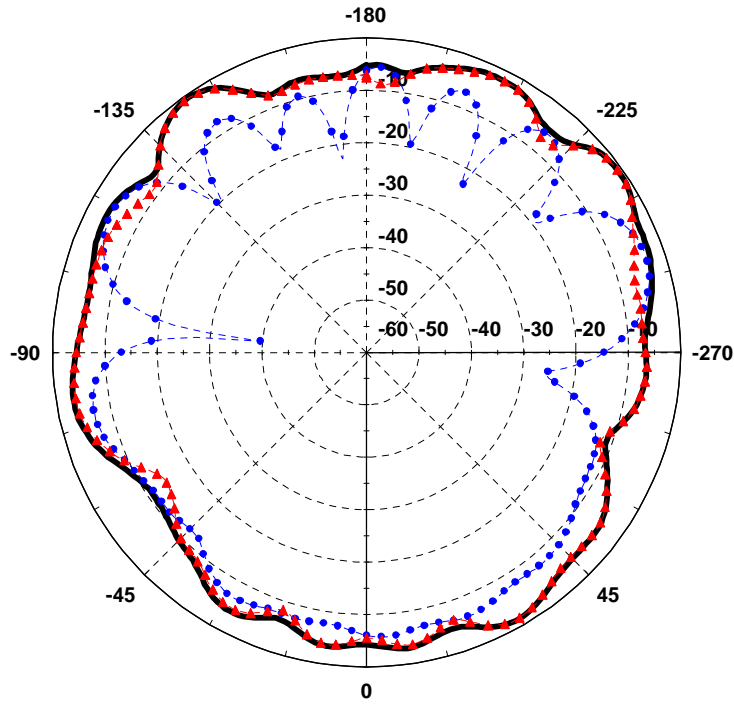


Vertical Pol.(max)=	-0.7
Vertical Pol.(avg)=	-5.0
Horizontal Pol.(max)=	-3.6
Horizontal Pol.(avg)=	-8.4
Total Gain(max)=	-0.6
Total Gain(avg)=	-4.4
Unit = dBi	

Auxiliary antenna: 2400 MHz (Only YZ Plane)

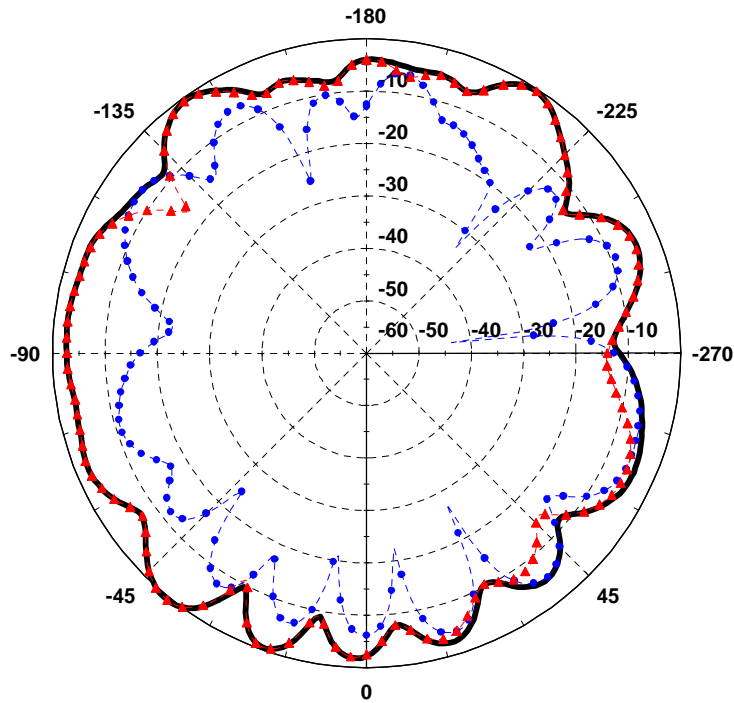

Vertical Pol.(max)=	0.6
Vertical Pol.(avg)=	-4.7
Horizontal Pol.(max)=	-4.2
Horizontal Pol.(avg)=	-10.1
Total Gain(max)=	0.6
Total Gain(avg)=	-4.3
Unit = dBi	

Auxiliary antenna: 2500 MHz (Only YZ Plane)

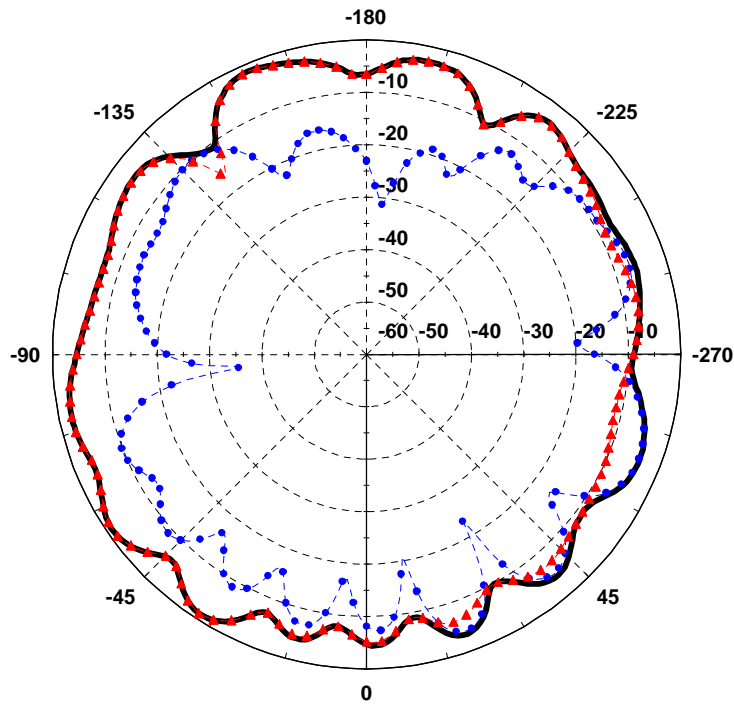


Vertical Pol.(max)=	-1.1
Vertical Pol.(avg)=	-5.3
Horizontal Pol.(max)=	-3.9
Horizontal Pol.(avg)=	-10.4
Total Gain(max)=	-1.0
Total Gain(avg)=	-4.8
Unit = dBi	

2400-2500MHz radiation characteristic


Bluetooth Antenna (Red-Vertical Polarization; Blue-Horizontal Polarization)

Main antenna: 2400 MHz

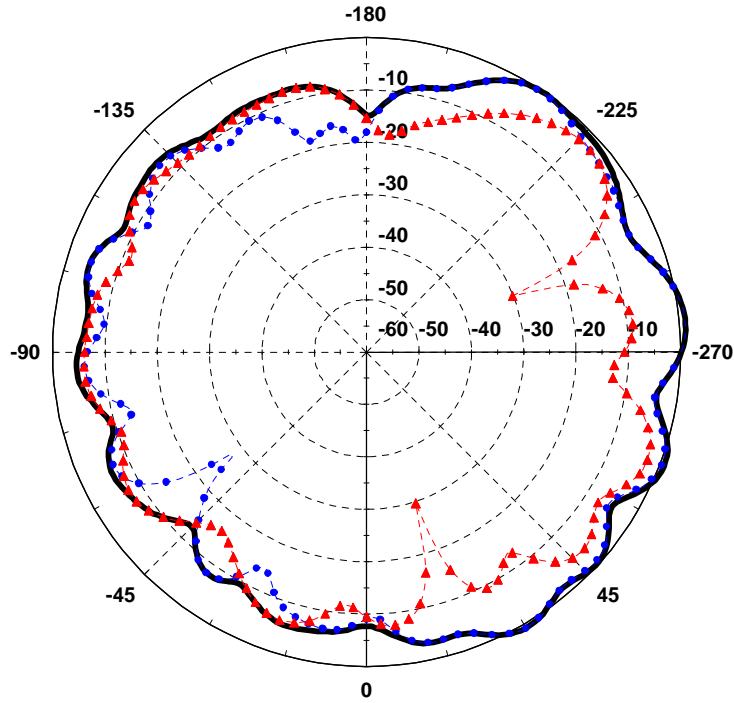


Vertical Pol.(max)=	-2.5
Vertical Pol.(avg)=	-7.9
Horizontal Pol.(max)=	1.1
Horizontal Pol.(avg)=	-4.4
Total Gain(max)=	1.2
Total Gain(avg)=	-3.7
Unit = dBi	

Main antenna: 2440 MHz

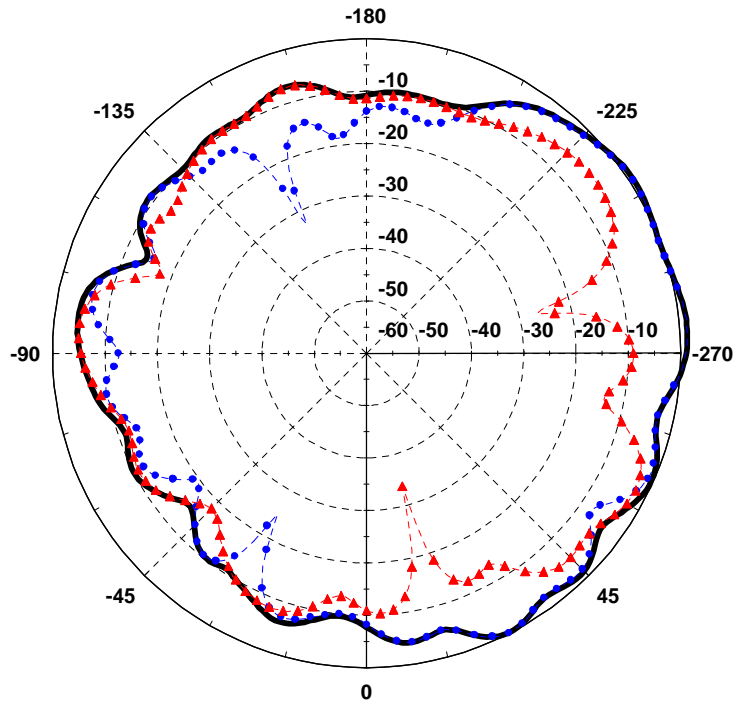

Vertical Pol.(max)=	-2.3
Vertical Pol.(avg)=	-8.7
Horizontal Pol.(max)=	1.4
Horizontal Pol.(avg)=	-4.6
Total Gain(max)=	1.4
Total Gain(avg)=	-4.0
Unit = dBi	


Main antenna: 2480 MHz

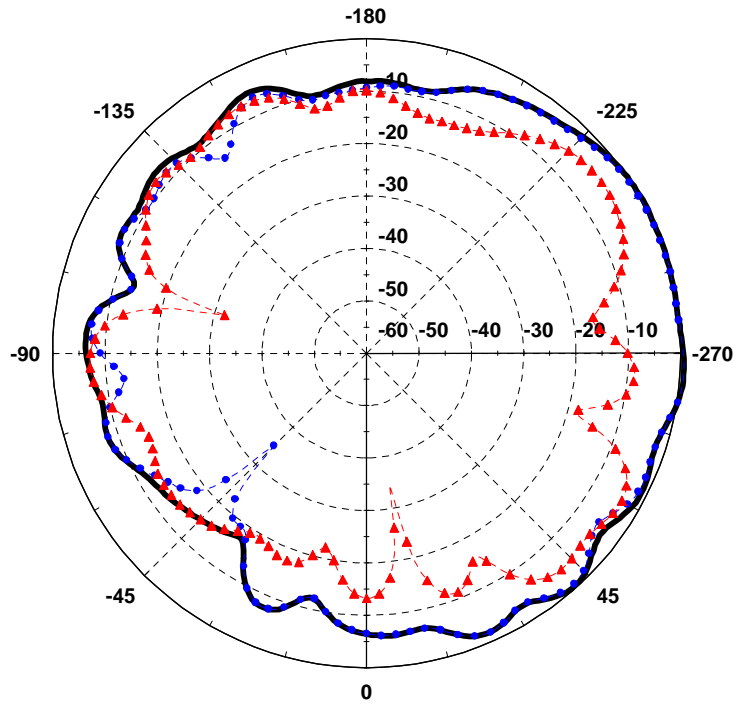

Vertical Pol.(max)=	-3.7
Vertical Pol.(avg)=	-9.4
Horizontal Pol.(max)=	0.7
Horizontal Pol.(avg)=	-4.5
Total Gain(max)=	0.7
Total Gain(avg)=	-4.1
Unit = dBi	


1900-5900 MHz radiation characteristic

Main antenna: 5150 MHz (Only YZ Plane)

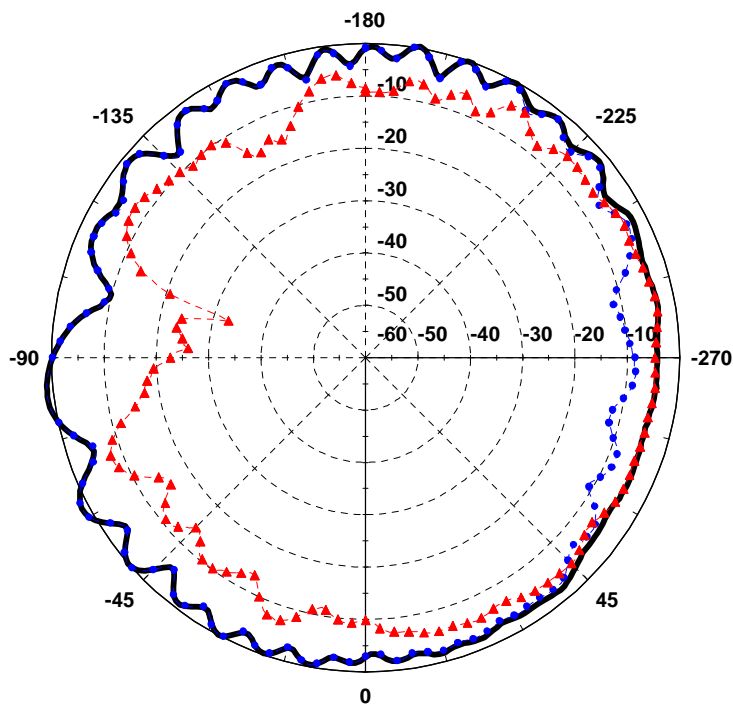


Vertical Pol.(max)=	-3.4
Vertical Pol.(avg)=	-7.4
Horizontal Pol.(max)=	1.4
Horizontal Pol.(avg)=	-2.9
Total Gain(max)=	1.4
Total Gain(avg)=	-2.4
Unit = dBi	

Main antenna: 5350 MHz (Only YZ Plane)

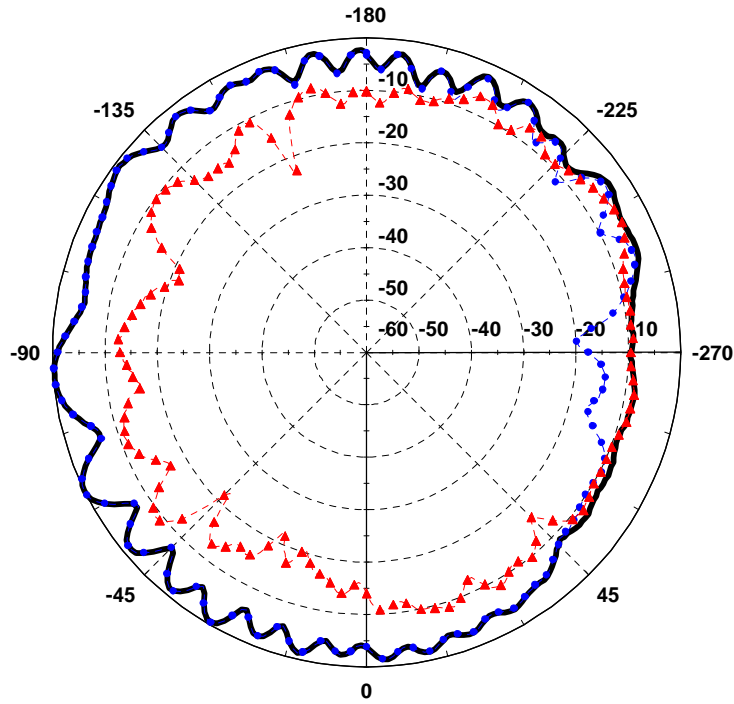


Vertical Pol.(max)=	-5.3
Vertical Pol.(avg)=	-10.6
Horizontal Pol.(max)=	0.1
Horizontal Pol.(avg)=	-4.2
Total Gain(max)=	0.1
Total Gain(avg)=	-3.9
Unit = dBi	

Main antenna: 5725 MHz (Only YZ Plane)

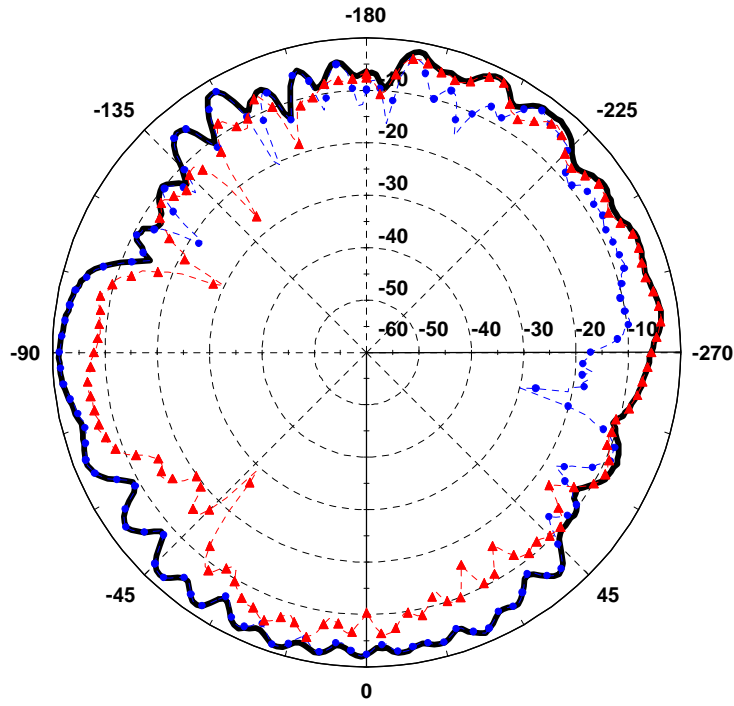


Vertical Pol.(max)=	-1.9
Vertical Pol.(avg)=	-7.8
Horizontal Pol.(max)=	-1.2
Horizontal Pol.(avg)=	-5.6
Total Gain(max)=	-1.1
Total Gain(avg)=	-4.5
Unit = dBi	

Auxiliary antenna: 5150 MHz (Only YZ Plane)

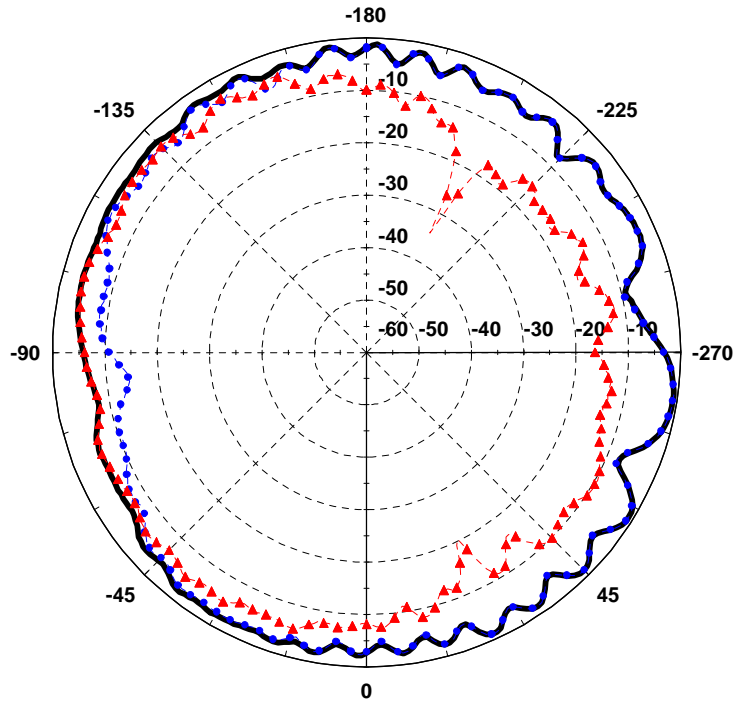


Vertical Pol.(max)=	-4.1
Vertical Pol.(avg)=	-8.1
Horizontal Pol.(max)=	-0.8
Horizontal Pol.(avg)=	-4.1
Total Gain(max)=	-0.8
Total Gain(avg)=	-3.5
Unit = dBi	

Auxiliary antenna: 5350 MHz (Only YZ Plane)

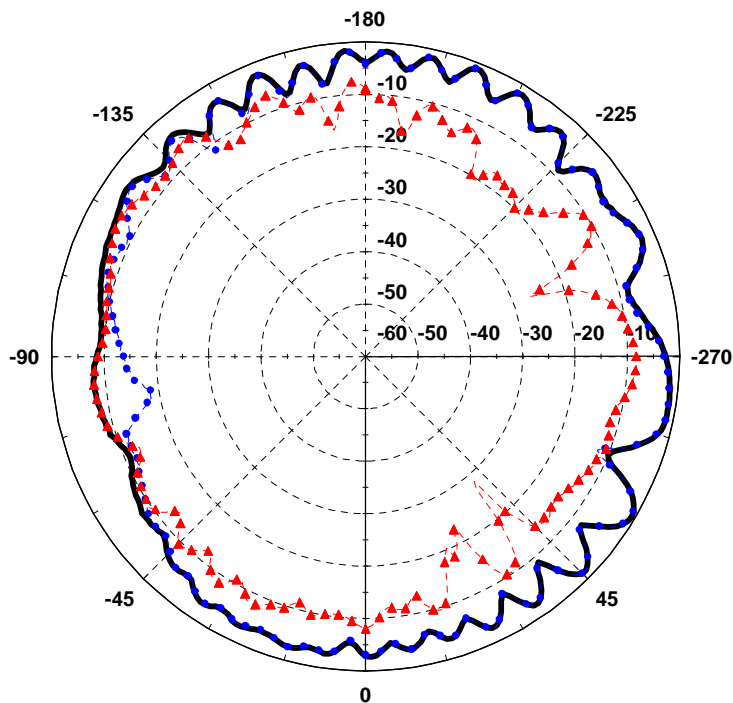

Vertical Pol.(max)=	-6.0
Vertical Pol.(avg)=	-10.4
Horizontal Pol.(max)=	-0.7
Horizontal Pol.(avg)=	-4.9
Total Gain(max)=	-0.7
Total Gain(avg)=	-4.6
Unit = dBi	

Auxiliary antenna: 5725 MHz

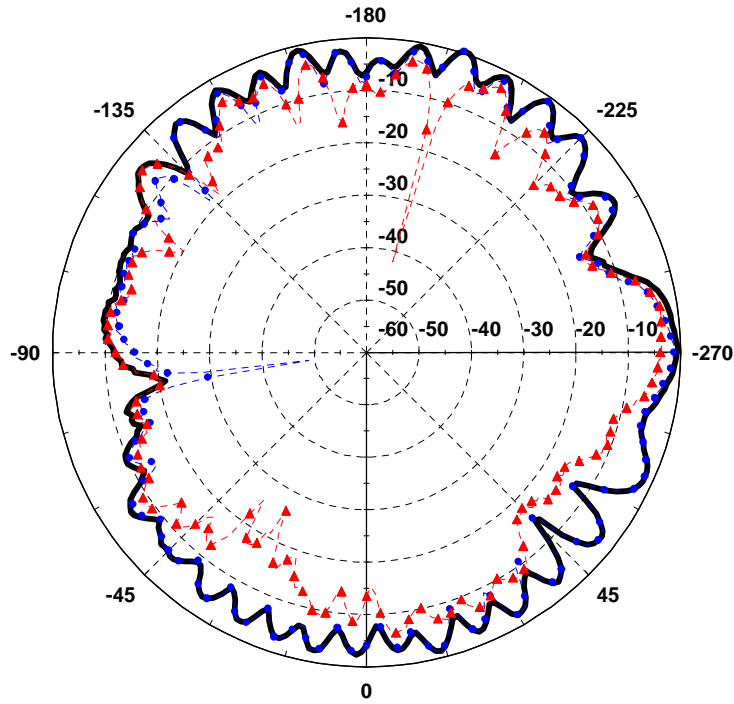


Vertical Pol.(max)=	-3.2
Vertical Pol.(avg)=	-9.0
Horizontal Pol.(max)=	0.4
Horizontal Pol.(avg)=	-5.4
Total Gain(max)=	0.4
Total Gain(avg)=	-4.8
Unit = dBi	

400-2500MHz radiation characteristic


Main Antenna (Red-Vertical Polarization; Blue-Horizontal Polarization)

Main antenna: 2400 MHz (Only XZ Plane)

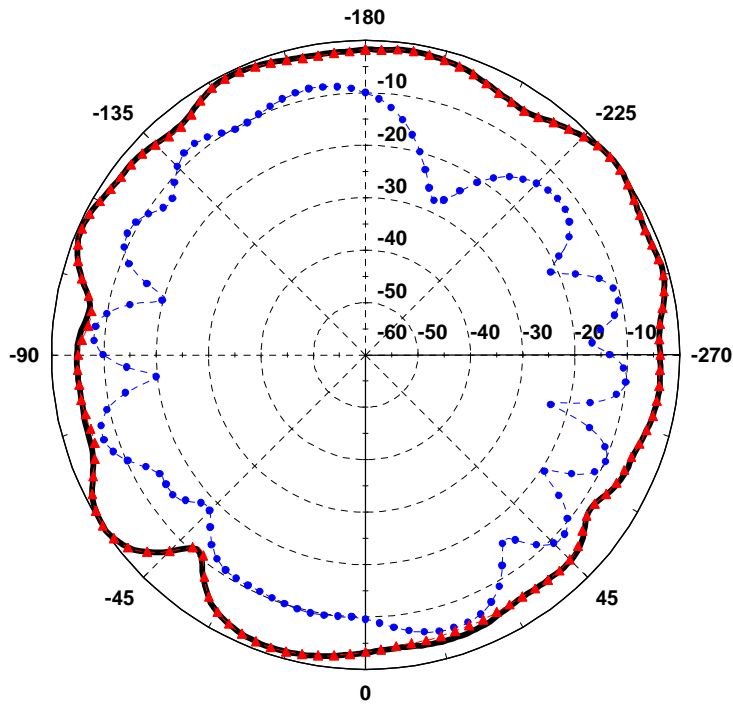


Vertical Pol.(max)=	0.2
Vertical Pol.(avg)=	-2.9
Horizontal Pol.(max)=	-5.2
Horizontal Pol.(avg)=	-10.7
Total Gain(max)=	0.2
Total Gain(avg)=	-2.8
Unit = dBi	

Main antenna: 2500 MHz (Only XZ Plane)

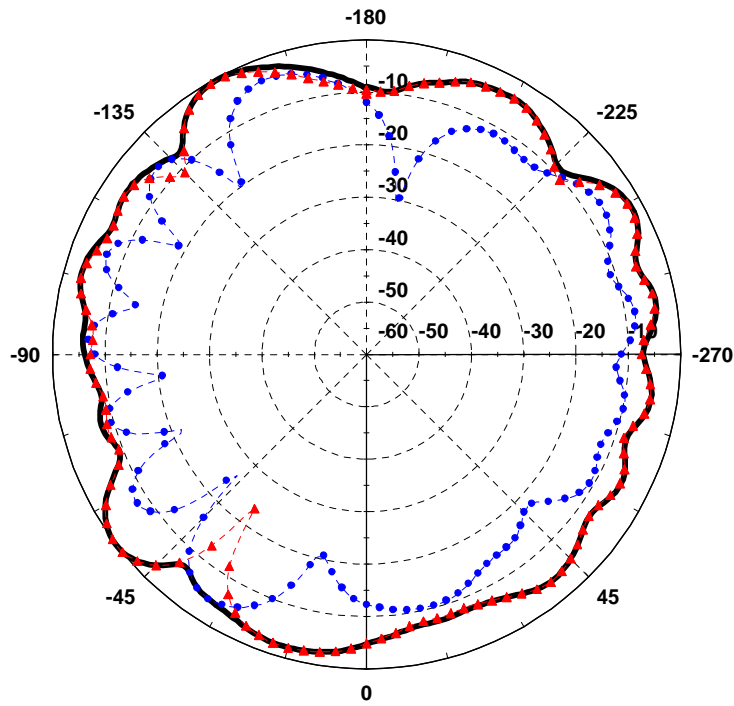


Vertical Pol.(max)=	0.1
Vertical Pol.(avg)=	-5.0
Horizontal Pol.(max)=	-4.1
Horizontal Pol.(avg)=	-9.8
Total Gain(max)=	0.1
Total Gain(avg)=	-4.5
Unit = dBi	

Auxiliary antenna: 2400 MHz (Only XZ Plane)

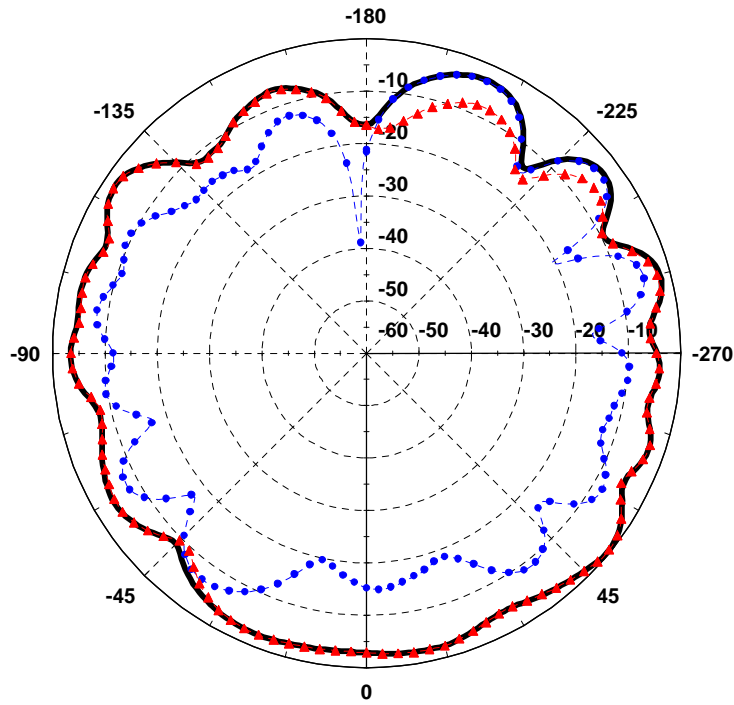

Vertical Pol.(max)=	-0.4
Vertical Pol.(avg)=	-4.9
Horizontal Pol.(max)=	-3.3
Horizontal Pol.(avg)=	-9.8
Total Gain(max)=	-0.4
Total Gain(avg)=	-4.4
Unit = dBi	


Auxiliary antenna: 2500 MHz (Only XZ Plane)

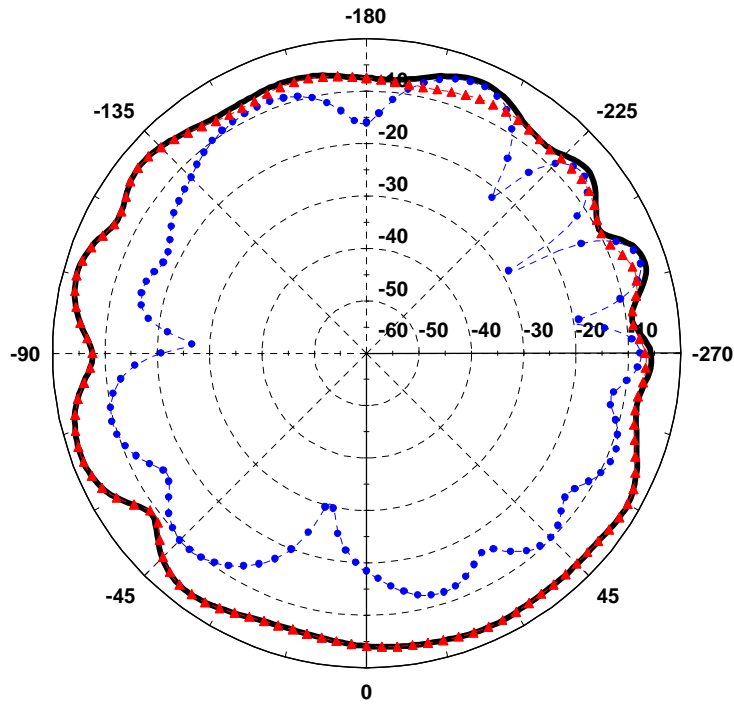

Vertical Pol.(max)=	-2.0
Vertical Pol.(avg)=	-5.0
Horizontal Pol.(max)=	-4.4
Horizontal Pol.(avg)=	-10.7
Total Gain(max)=	-2.0
Total Gain(avg)=	-4.7
Unit = dBi	


1900-5900 MHz radiation characteristic

Main antenna: 5150 MHz (Only XZ Plane)

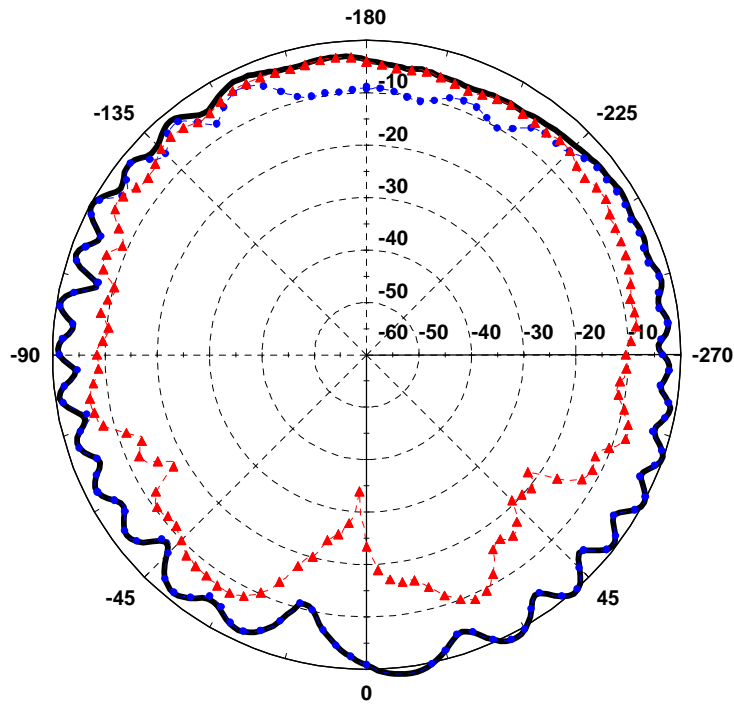


Vertical Pol.(max)=	-2.9
Vertical Pol.(avg)=	-7.5
Horizontal Pol.(max)=	1.4
Horizontal Pol.(avg)=	-3.2
Total Gain(max)=	1.4
Total Gain(avg)=	-2.6
Unit = dBi	

Main antenna: 5350 MHz (Only XZ Plane)

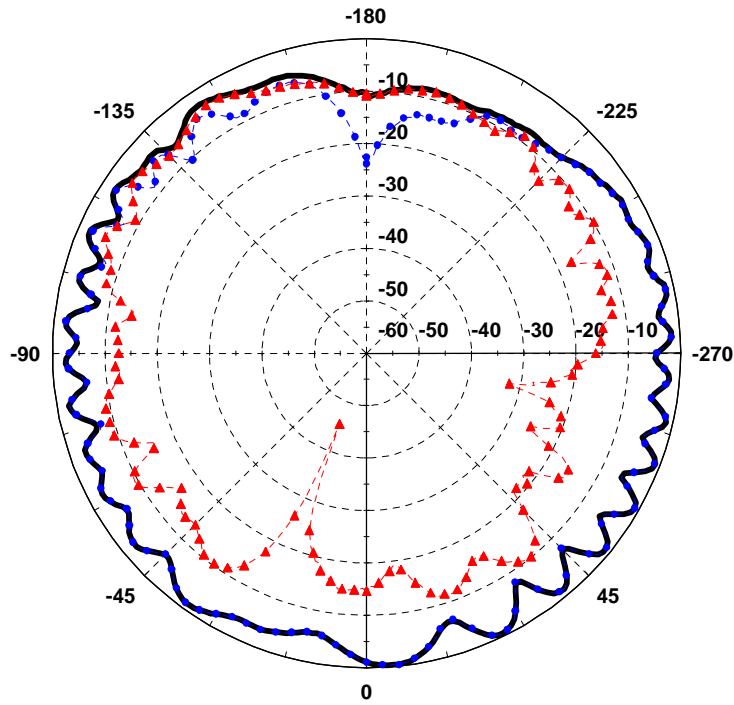


Vertical Pol.(max)=	-3.6
Vertical Pol.(avg)=	-10.3
Horizontal Pol.(max)=	-0.2
Horizontal Pol.(avg)=	-4.3
Total Gain(max)=	-0.2
Total Gain(avg)=	-3.9
Unit = dBi	

Main antenna: 5725 MHz (Only XZ Plane)

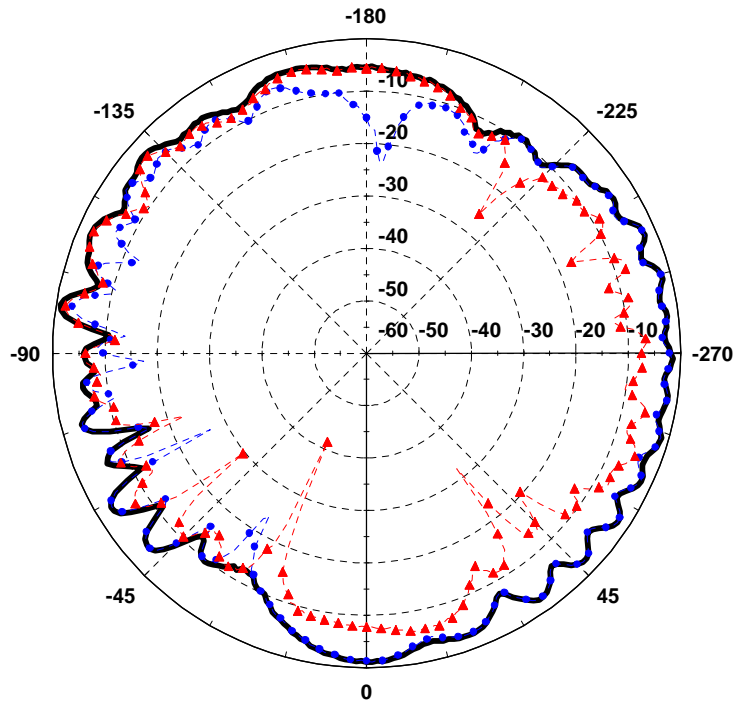


Vertical Pol.(max)=	-1.7
Vertical Pol.(avg)=	-8.0
Horizontal Pol.(max)=	-1.1
Horizontal Pol.(avg)=	-5.6
Total Gain(max)=	-0.8
Total Gain(avg)=	-4.6
Unit = dBi	

Auxiliary antenna: 5150 MHz (Only XZ Plane)

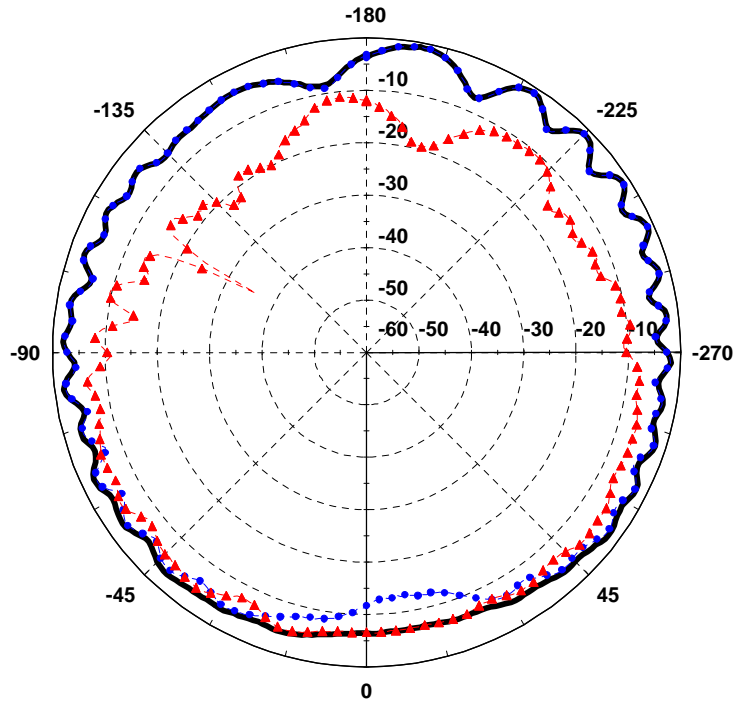


Vertical Pol.(max)=	-4.5
Vertical Pol.(avg)=	-8.5
Horizontal Pol.(max)=	-0.8
Horizontal Pol.(avg)=	-4.3
Total Gain(max)=	-0.8
Total Gain(avg)=	-3.8
Unit = dBi	

Auxiliary antenna: 5350 MHz (Only XZ Plane)

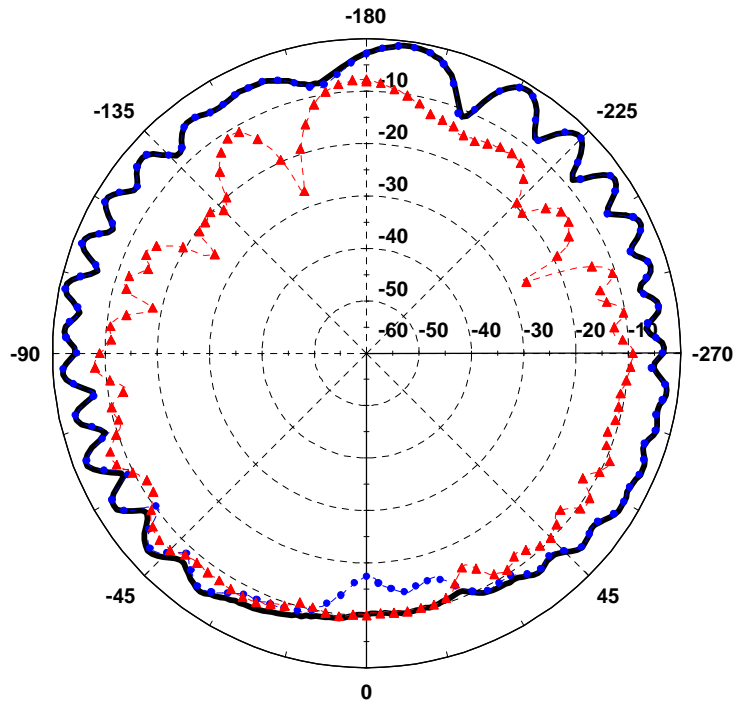

Vertical Pol.(max)=	-6.7
Vertical Pol.(avg)=	-11.0
Horizontal Pol.(max)=	-0.9
Horizontal Pol.(avg)=	-4.9
Total Gain(max)=	-0.9
Total Gain(avg)=	-4.7
Unit = dBi	

Auxiliary antenna: 5725 MHz (Only XZ Plane)

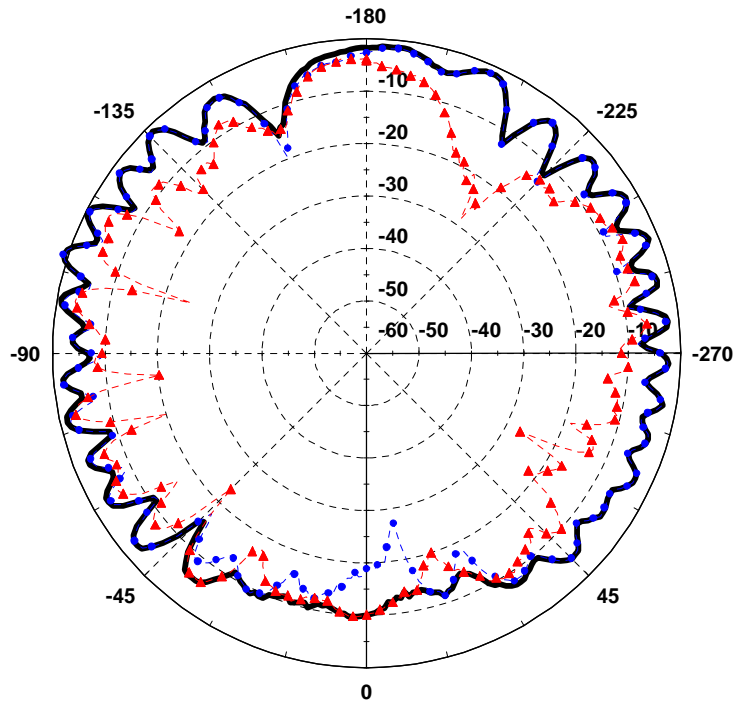


Vertical Pol.(max)=	-3.2
Vertical Pol.(avg)=	-9.3
Horizontal Pol.(max)=	0.9
Horizontal Pol.(avg)=	-5.3
Total Gain(max)=	0.9
Total Gain(avg)=	-4.8
Unit = dBi	

2400-2500MHz radiation characteristic


Main Antenna (Left Antenna: Red-Vertical Polarization; Blue-Horizontal Polarization)

Main antenna: 2400 MHz (Only XY Plane)

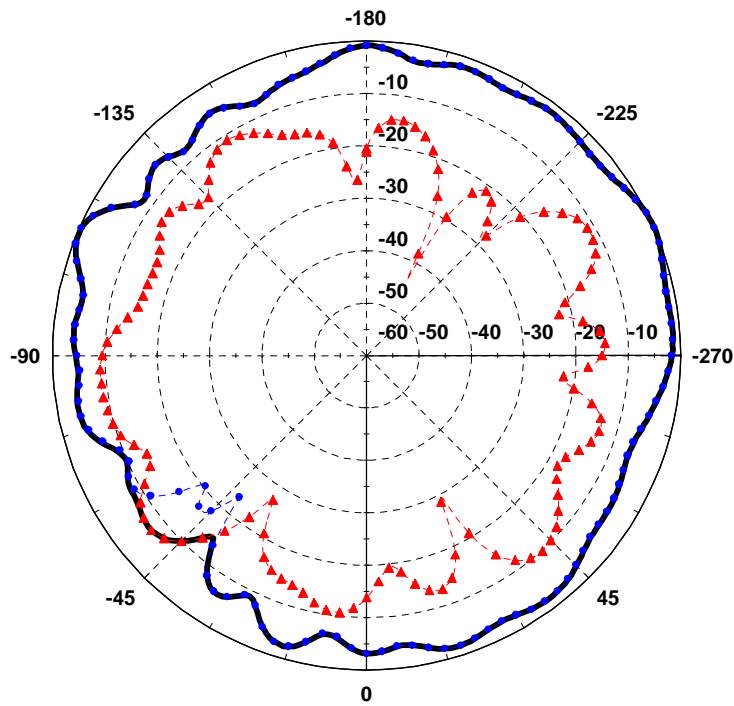


Vertical Pol.(max)=	-7.0
Vertical Pol.(avg)=	-13.6
Horizontal Pol.(max)=	0.1
Horizontal Pol.(avg)=	-3.6
Total Gain(max)=	0.1
Total Gain(avg)=	-3.5
Unit = dBi	

Main antenna: 2500 MHz (Only XY Plane)

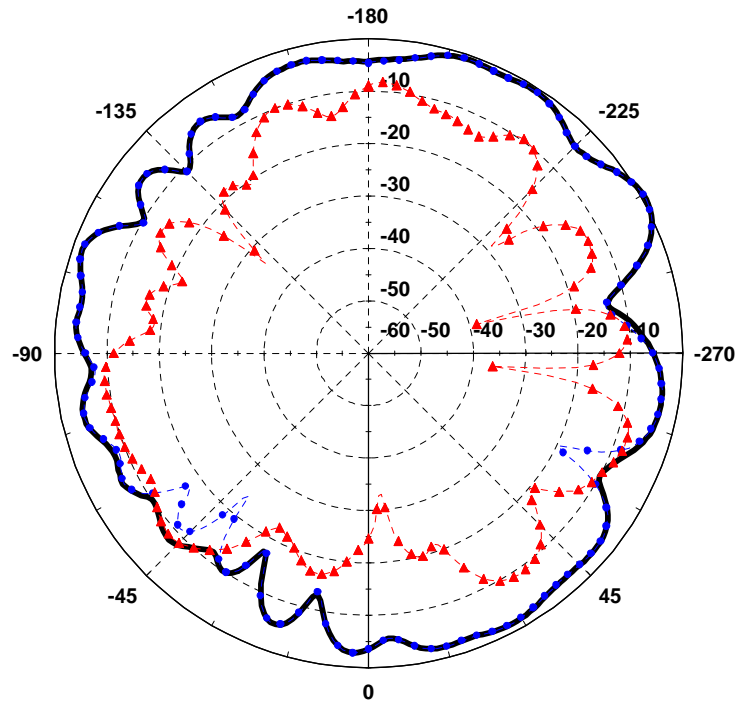


Vertical Pol.(max)=	-8.0
Vertical Pol.(avg)=	-12.6
Horizontal Pol.(max)=	0.6
Horizontal Pol.(avg)=	-4.3
Total Gain(max)=	0.6
Total Gain(avg)=	-4.1
Unit = dBi	

Auxiliary antenna: 2400 MHz (Only XY Plane)

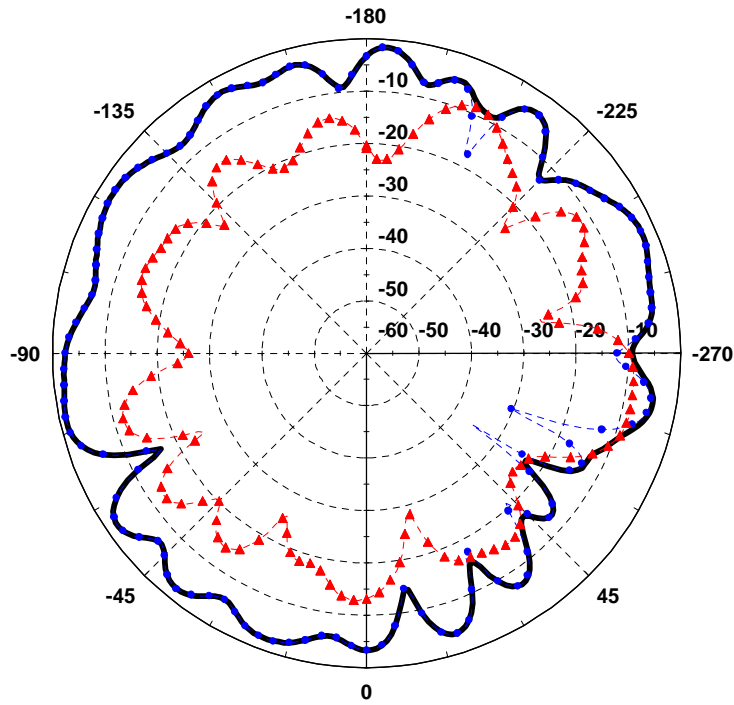

Vertical Pol.(max)=	-8.5
Vertical Pol.(avg)=	-14.7
Horizontal Pol.(max)=	-1.2
Horizontal Pol.(avg)=	-5.1
Total Gain(max)=	-1.2
Total Gain(avg)=	-5.0
Unit = dBi	


Auxiliary antenna: 2500 MHz (Only XY Plane)

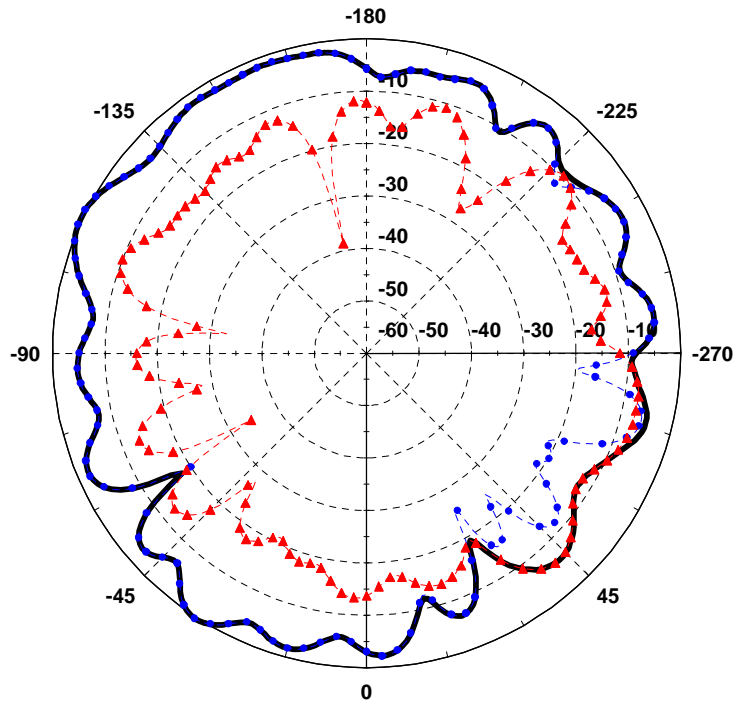

Vertical Pol.(max)=	-6.0
Vertical Pol.(avg)=	-13.0
Horizontal Pol.(max)=	0.4
Horizontal Pol.(avg)=	-4.7
Total Gain(max)=	0.4
Total Gain(avg)=	-4.4
Unit = dBi	


1900-5900 MHz radiation characteristic

Main antenna: 5150 MHz (Only XY Plane)

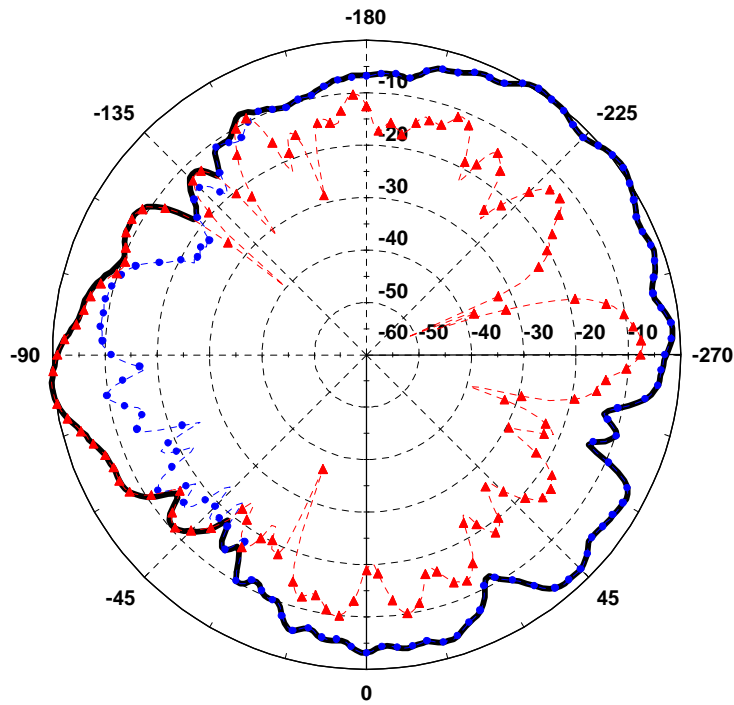


Vertical Pol.(max)=	0.4
Vertical Pol.(avg)=	-10.0
Horizontal Pol.(max)=	0.8
Horizontal Pol.(avg)=	-5.4
Total Gain(max)=	0.8
Total Gain(avg)=	-4.4
Unit = dBi	

main antenna: 5350 MHz (Only XY Plane)

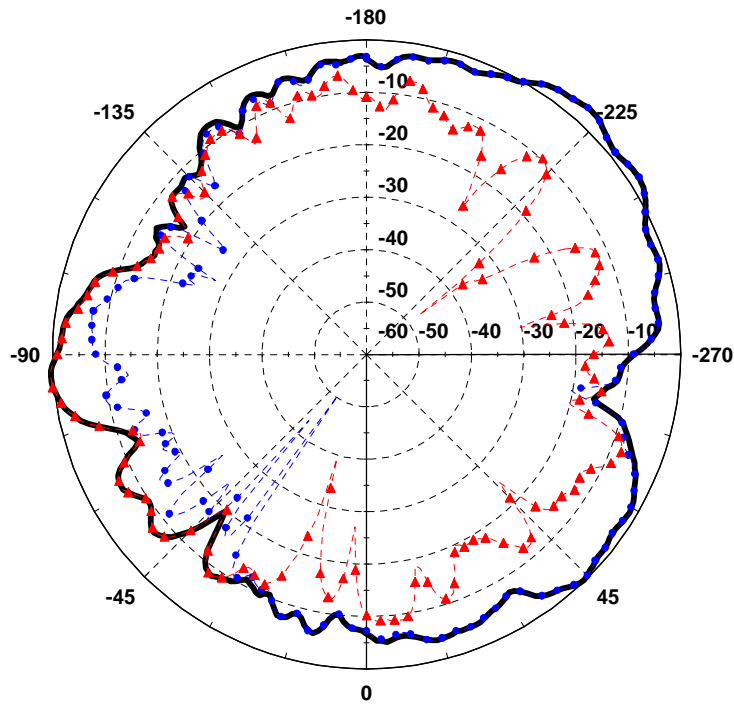


Vertical Pol.(max)=	0.5
Vertical Pol.(avg)=	-9.4
Horizontal Pol.(max)=	3.3
Horizontal Pol.(avg)=	-4.2
Total Gain(max)=	3.3
Total Gain(avg)=	-3.5
Unit = dBi	

Main antenna: 5725 MHz (Only XY Plane)

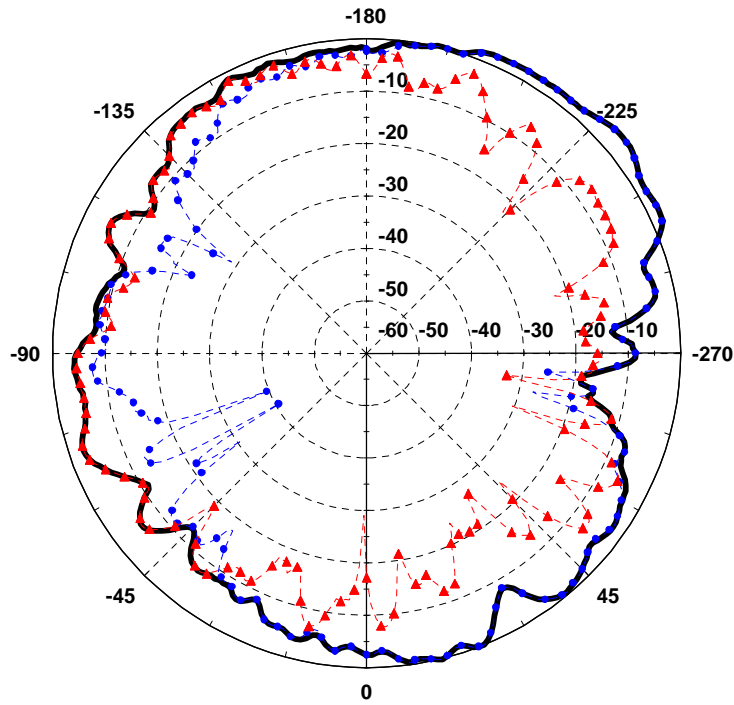


Vertical Pol.(max)=	-1.7
Vertical Pol.(avg)=	-7.7
Horizontal Pol.(max)=	4.0
Horizontal Pol.(avg)=	-3.0
Total Gain(max)=	4.0
Total Gain(avg)=	-2.3
Unit = dBi	

Auxiliary antenna: 5150 MHz (Only XY Plane)

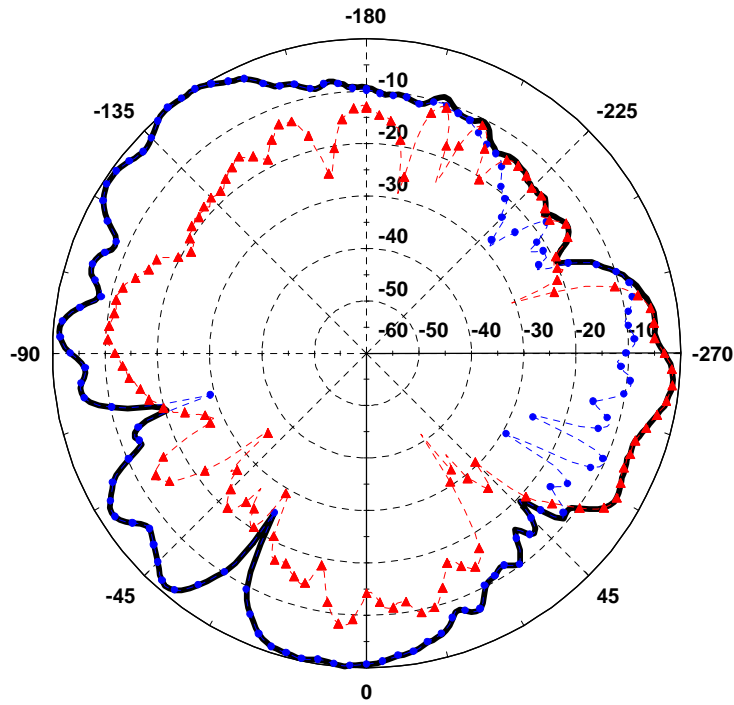


Vertical Pol.(max)=	-1.3
Vertical Pol.(avg)=	-11.0
Horizontal Pol.(max)=	0.3
Horizontal Pol.(avg)=	-5.5
Total Gain(max)=	0.3
Total Gain(avg)=	-4.8
Unit = dBi	

Auxiliary antenna: 5350 MHz (Only XY Plane)

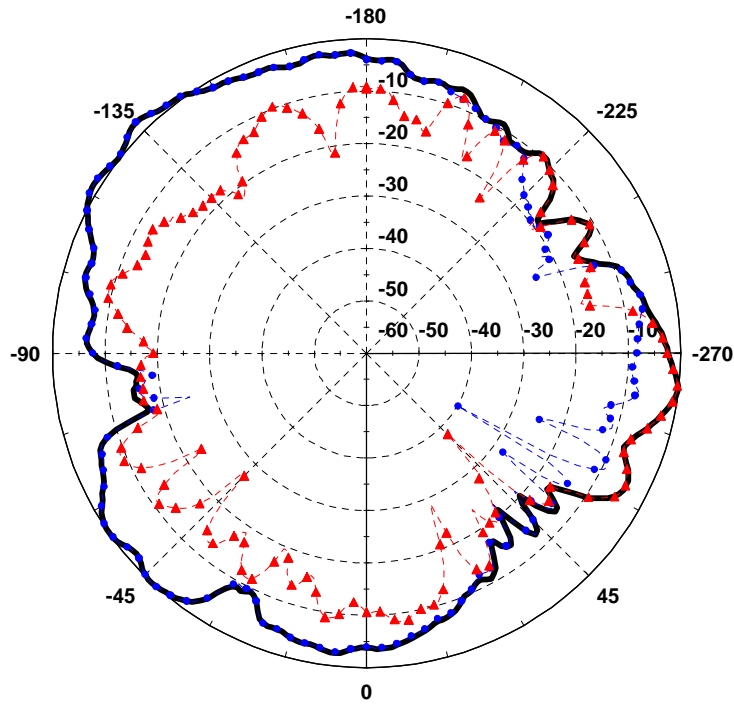

Vertical Pol.(max)=	-0.3
Vertical Pol.(avg)=	-10.2
Horizontal Pol.(max)=	2.3
Horizontal Pol.(avg)=	-4.5
Total Gain(max)=	2.3
Total Gain(avg)=	-3.9
Unit = dBi	

Auxiliary antenna: 5725 MHz (Only XY Plane)

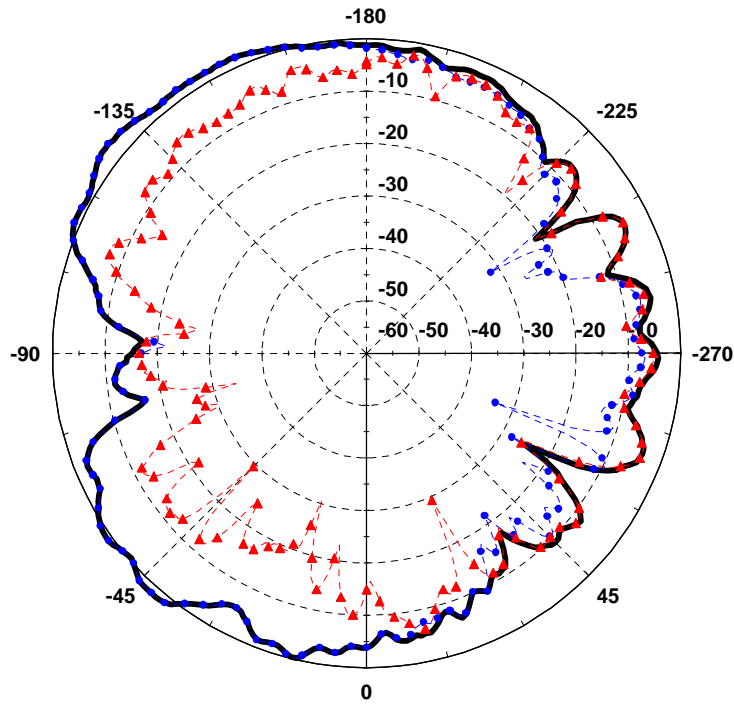


Vertical Pol.(max)=	-2.3
Vertical Pol.(avg)=	-8.7
Horizontal Pol.(max)=	3.5
Horizontal Pol.(avg)=	-2.9
Total Gain(max)=	3.5
Total Gain(avg)=	-2.5
Unit = dBi	

Section 4. Host Platform Information


DEM / ODM Host platform: Asustek XXX17 Platform

Section 5. Antenna Host Platform Location Information

include a dimensioned photos or dimensioned drawings of main and auxiliary antenna placements.

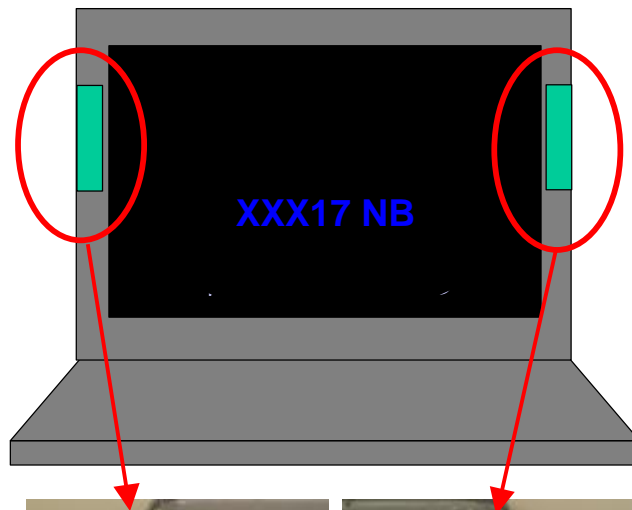


Left: Aux Antenna Right: Main Antenna

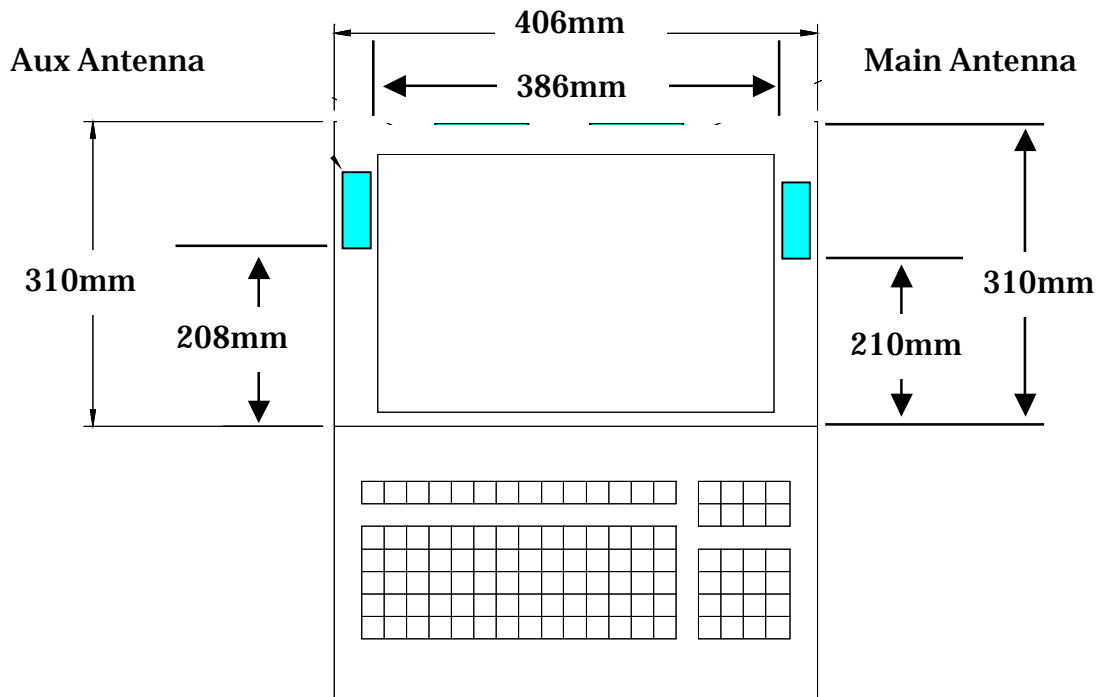

Section 6. Antenna dimensional information for SAR evaluation

include a dimensioned photos or dimensioned drawings showing the distance (mm) between the transmit (main) antenna and the user (excluding hands, wrist, feet, and ankle)

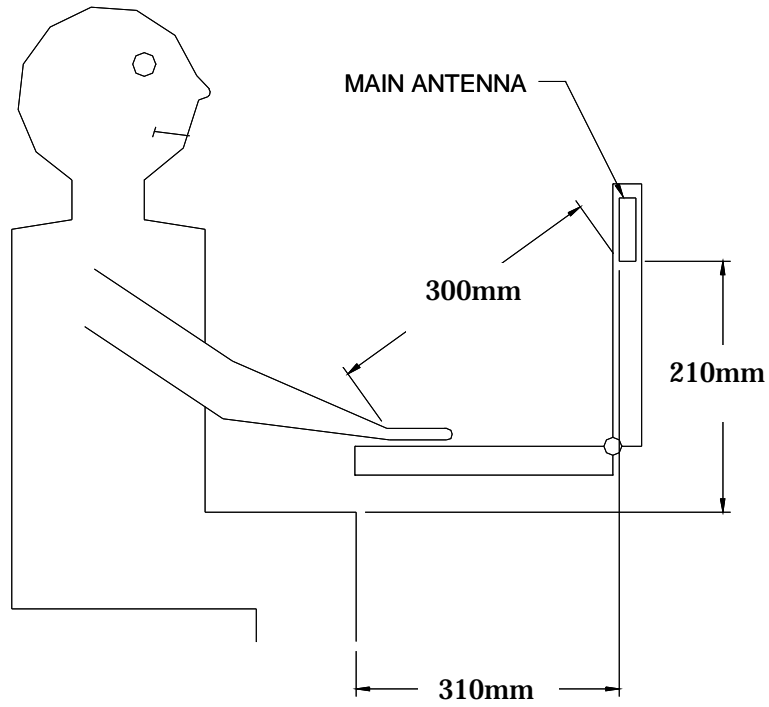

Section 7. Diagram Example of Co-Location Antenna Separation

Indicate distance between WLAN module antennas and Bluetooth/other radio antenna element.

Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

