



# FCC Test Report

FCC Part 22,24 / RSS 132,133

**FOR:**

**MODEL #: iLM4530, iLM4230**

**@Road, A Trimble Company**

**47071 Bayside Pkwy.  
Fremont, CA 94538  
U.S.A.**

**FCC ID: PDC-ILM4X30GS**

**IC: 5079A-ILM4X30**

**TEST REPORT #: ATROA\_005\_07002\_FCC22\_24\_rev3  
DATE: 2007-5-18**



Certificate # 2135.01



**Bluetooth  
Qualification Test  
Facility  
(BQTF)**



LAB CODE 20020328-00

**FCC listed#  
101450**

**IC recognized #  
3925**

**CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

## Table of Contents

<b>1 ASSESSMENT .....</b>	<b>4</b>
<i>EMC &amp; Radio.....</i>	<i>4</i>
<i>EMC &amp; Radio.....</i>	<i>4</i>
1.1 IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT.....	5
1.2 IDENTIFICATION OF THE CLIENT .....	5
1.3 IDENTIFICATION OF THE MANUFACTURER.....	5
<b>2 EQUIPMENT UNDER TEST (EUT).....</b>	<b>6</b>
2.1 SPECIFICATION OF THE EQUIPMENT UNDER TEST .....	6
2.2 IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT) .....	6
2.3 IDENTIFICATION OF ACCESSORY EQUIPMENT: NONE.....	6
<b>3 SUBJECT OF INVESTIGATION.....</b>	<b>7</b>
<b>4 MEASUREMENTS.....</b>	<b>8</b>
4.1 RF POWER OUTPUT .....	8
4.1.1 <i>FCC 2.1046 Measurements required: RF power output.....</i>	<i>8</i>
4.1.2 <i>Limits: .....</i>	<i>8</i>
4.1.2.1 FCC 22.913 (a) Effective radiated power limits.....	8
4.1.2.2 FCC 24.232 (b)(c) Power limits.....	8
4.1.3 <i>Conducted Output Power Measurement procedure:.....</i>	<i>8</i>
4.1.4 <i>Radiated Output Power Measurement procedure:.....</i>	<i>8</i>
4.1.5 <i>ERP Results 850 MHz band: .....</i>	<i>10</i>
4.1.6 <i>EIRP Results 1900 MHz band:.....</i>	<i>10</i>
4.2 OCCUPIED BANDWIDTH/EMISSION BANDWIDTH .....	17
4.2.1 <i>FCC 2.1049 Measurements required: Occupied bandwidth.....</i>	<i>17</i>
4.2.2 <i>Occupied / emission bandwidth measurement procedure:.....</i>	<i>17</i>
4.2.3 <i>Occupied / Emission bandwidth results 850 MHz band: .....</i>	<i>18</i>
4.3 FREQUENCY STABILITY .....	19
4.3.1 <i>Limit .....</i>	<i>19</i>
4.3.2 <i>FREQUENCY STABILITY (GSM-850) .....</i>	<i>20</i>
4.3.3 <i>FREQUENCY STABILITY (PCS-1900) .....</i>	<i>20</i>
4.4 SPURIOUS EMISSIONS CONDUCTED.....	21
4.4.1 <i>FCC 2.1051 Measurements required: Spurious emissions at antenna terminals. ....</i>	<i>21</i>
4.4.2 <i>Limits: .....</i>	<i>21</i>
4.4.2.1 FCC 22.917 Emission limitations for cellular equipment.....	21
4.4.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.....	21
4.4.3 <i>Conducted out of band emissions measurement procedure: .....</i>	<i>22</i>
4.5 SPURIOUS EMISSIONS RADIATED .....	22
4.5.1 <i>FCC 2.1053 Measurements required: Field strength of spurious radiation.....</i>	<i>23</i>
4.5.2 <i>Limits: .....</i>	<i>23</i>
4.5.2.1 FCC 22.917 Emission limitations for cellular equipment.....	23
4.5.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.....	23
4.5.3 <i>Radiated out of band measurement procedure: .....</i>	<i>24</i>
4.5.4 <i>Radiated out of band emissions results on EUT: .....</i>	<i>26</i>
4.5.4.1 RESULTS OF RADIATED TESTS GSM-850: .....	26
4.5.4.2 RADIATED SPURIOUS EMISSIONS (GSM-850).....	27

4.5.4.3	RESULTS OF RADIATED TESTS PCS-1900:.....	34
4.5.4.4	RADIATED SPURIOUS EMISSIONS(PCS 1900) .....	35
4.6	RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 & 133 .....	43
4.6.1	<i>Receiver Spurious on EUT 850 MHz</i> .....	44
4.6.2	<i>Receiver Spurious on EUT 1900 MHz</i> .....	47
<b>5</b>	<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS</b> .....	<b>51</b>
<b>6</b>	<b>REFERENCES</b> .....	<b>52</b>
<b>7</b>	<b>BLOCK DIAGRAMS</b> .....	<b>53</b>

## 1 Assessment

**The following is in compliance with the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS132 and RSS133.**

Company	Description	Model #
@Road, A Trimble Company	Internet Location Manager	iLM4530, iLM4230

**Technical responsibility for area of testing:**

**Lothar Schmidt**

**2007-5-18 EMC & Radio (Technical Manager)**

Date	Section	Name	Signature
------	---------	------	-----------

**This report is prepared by:**

**Peter Mu**

**2007-5-18 EMC & Radio (EMC Project Engineer)**

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the following test reports:

Test Report conducted 850.pdf  
Test Report conducted 1900.pdf

## Administrative Data

### **1.1 Identification of the Testing Laboratory Issuing the EMC Test Report**

Company Name:	<b>CETECOM Inc.</b>
Department:	<b>EMC</b>
Address:	<b>411 Dixon Landing Road Milpitas, CA 95035 U.S.A.</b>
Telephone:	<b>+1 (408) 586 6200</b>
Fax:	<b>+1 (408) 586 6299</b>
Responsible Test Lab Manager:	<b>Lothar Schmidt</b>
Responsible Project Leader:	<b>Peter Mu</b>
Date of test:	<b>2007-3-20 to 2007-4-11</b>

### **1.2 Identification of the Client**

Applicant's Name:	<b>@Road, A Trimble Company</b>
Street Address:	<b>47071 Bayside Pkwy.</b>
City/Zip Code	<b>Fremont, CA 94538</b>
Country	<b>USA</b>
Contact Person:	<b>Hung Phan</b>
Phone No.	<b>(510)870-1252</b>
Fax:	<b>(510)870-1281</b>
e-mail:	<b>hphan@road-inc.com</b>

### **1.3 Identification of the Manufacturer**

Manufacturer	<b>@Road, A Trimble Company</b>
Street Address	<b>47071 Bayside Pkwy.</b>
City/Zip Code	<b>Fremont, CA 94538</b>
Country	<b>USA</b>

## 2 Equipment under Test (EUT)

### 2.1 Specification of the Equipment under Test

<b>Marketing Name of EUT (if not same as Model No.)</b>	<b>iLM4000</b>
<b>Description</b>	The <b>iLM4530</b> Internet Location Manager combines GPS with a GPRS wireless data modem to provide Mobile Resource Management information. The <b>iLM4530</b> is a quad-band (850/900/1800/1900 MHz) GPRS device. This device is intended to be used in vehicle only.
<b>Model No.</b>	<b>iLM4530, iLM4230</b>
<b>FCC-ID</b>	<b>PDC-ILM4X30GS</b>
<b>IC-ID (Industry Canada)</b>	<b>5079A-ILM4X30</b>
Frequency Range:	<b>824.2MHz – 848.8MHz for GSM 850</b> <b>1850.2MHz – 1909.8MHz for PCS 1900</b>
Type(s) of Modulation:	<b>GMSK</b>
Number of Channels:	<b>124 for GSM-850, 299 for PCS-1900</b>
Antenna Type:	<b>Tribands Cell/PCS/GPS Combo Antenna</b>
Max. Output Power:	<b>Conducted : Tests Conducted not by Cetecom. Report submitted separately.</b> <b>Radiated : see section 4.1.5 and 4.1.6</b> 24.93dBm (0.311W) @ 836.6MHz ERP, Antenna Option A 22.93dBm (0.196W) @1880MHz EIRP, Antenna Option J

Note: The iLM4530 and the iLM4520 are using the identical radio module and have a very similar circuitry and functionality. All radiated measurements were done on the iLM4530.

### 2.2 Identification of the Equipment Under Test (EUT)

EUT #	TYPE	MANF.	MODEL	SERIAL #
1	EUT	<b>@Road</b>	iLM4530	#17
2	EUT	<b>@Road</b>	iLM4530	#18
3	EUT	<b>@Road</b>	iLM4230	#1
4	EUT	<b>@Road</b>	iLM4230	#2

### 2.3 Identification of Accessory equipment: None

### **3   Subject of Investigation**

All testing was performed on the EUT listed in Section 3. The EUT was maximized in the X,Y, Z positions , all data in this report shows the worst case between horizontal and vertical polarization for above 1GHz. The dual band antenna used has 2dBi only and is provided with a 3m cable.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS132 and RSS133.

This EUT is a FCC approved module with the FCC ID **PDC-iLM4X30GS** This report refers only to the radiated measurements. The conducted measurements are documented in test report

Test Report conducted 850.pdf

Test Report conducted 1900.pdf

## 4 Measurements

### 4.1 RF Power Output

#### 4.1.1 FCC 2.1046 Measurements required: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

#### 4.1.2 Limits:

##### 4.1.2.1 **FCC 22.913 (a) Effective radiated power limits.**

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.


##### 4.1.2.2 **FCC 24.232 (b)(c) Power limits.**

(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).  
(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

#### 4.1.3 Conducted Output Power Measurement procedure:

Based on TIA-603C 2004

##### 2.2.1 Conducted Carrier Output Power Rating

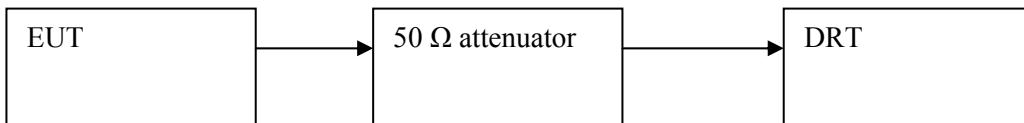


1. Connect the equipment as shown in the above diagram. A Digital Radiocommunication Tester (DRT) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the DRT to set the EUT to its maximum power at the required channel.
3. Record the output power level measured by the DRT.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

#### 4.1.4 Radiated Output Power Measurement procedure:

Based on TIA-603C 2004

##### 2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

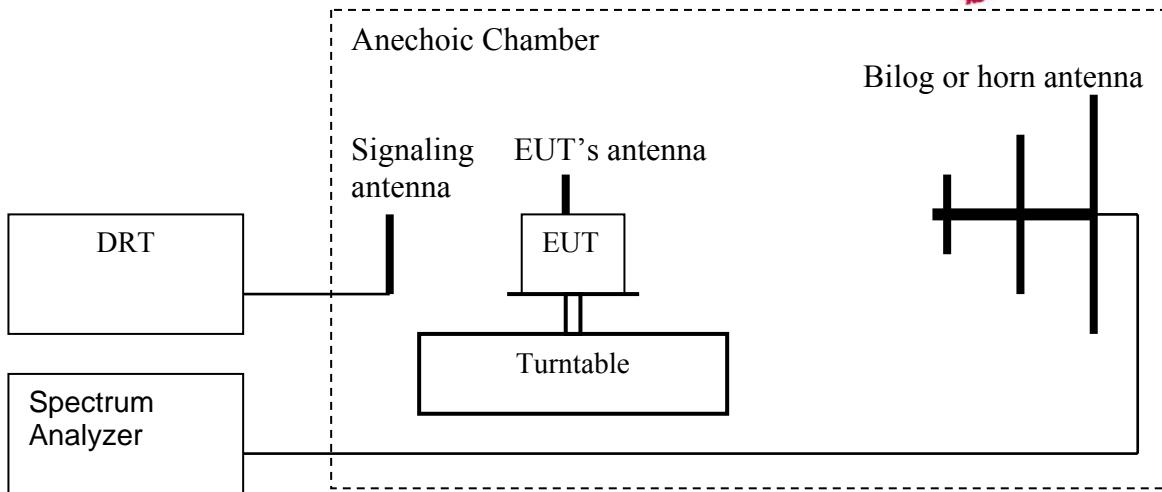

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the ERP using the following equation:  
$$\text{ERP (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$$
8. Determine the EIRP using the following equation:  
$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.14 \text{ (dB)}$$
9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band. **Spectrum analyzer settings = rbw=vbw=3MHz**

(note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)

#### **4.1.5 ERP Results 850 MHz band:**

<b>Power Control Level</b>	<b>Burst Peak ERP</b>
<b>5</b>	<b>≤38.45dBm (7W)</b>

<b>Frequency (MHz)</b>	<b>Effective Radiated Power (dBm)</b>	
	<b>GPRS</b>	<b>EGPRS</b>
<b>824.2</b>	<b>22.73</b>	<b>N/A</b>
<b>836.6</b>	<b>24.93</b>	<b>N/A</b>
<b>848.8</b>	<b>24.22</b>	<b>N/A</b>

Note: Measurement made with antenna option A which has the highest predicted gain of all the available options in this band.

#### **4.1.6 EIRP Results 1900 MHz band:**

<b>Power Control Level</b>	<b>Burst Peak EIRP</b>
<b>0</b>	<b>≤33dBm (2W)</b>

<b>Frequency (MHz)</b>	<b>Effective Isotropic Radiated Power (dBm)</b>	
	<b>GSM</b>	<b>EGPRS</b>
<b>1850.2</b>	<b>22.74</b>	<b>N/A</b>
<b>1880.0</b>	<b>22.93</b>	<b>N/A</b>
<b>1909.8</b>	<b>22.65</b>	<b>N/A</b>

Note: Measurement made with antenna option J which has the highest predicted gain of all the available options in this band.

**EIRP (GSM 850)**

§22.913(a)

**CHANNEL 128 GPRS**

EUT: Unit 18

Customer: @Road

Test Mode: GSM850

ANT Orientation: V

EUT Orientation: 30° Option A

Test Engineer: Peter Mu

Power Supply: 12V DC


Comments:

**SWEEP TABLE: "EIRP 850 CH 128 H"**

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
819.2 MHz	829.2 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 824.009619 MHz 24.87 dBm

Level [dBm]

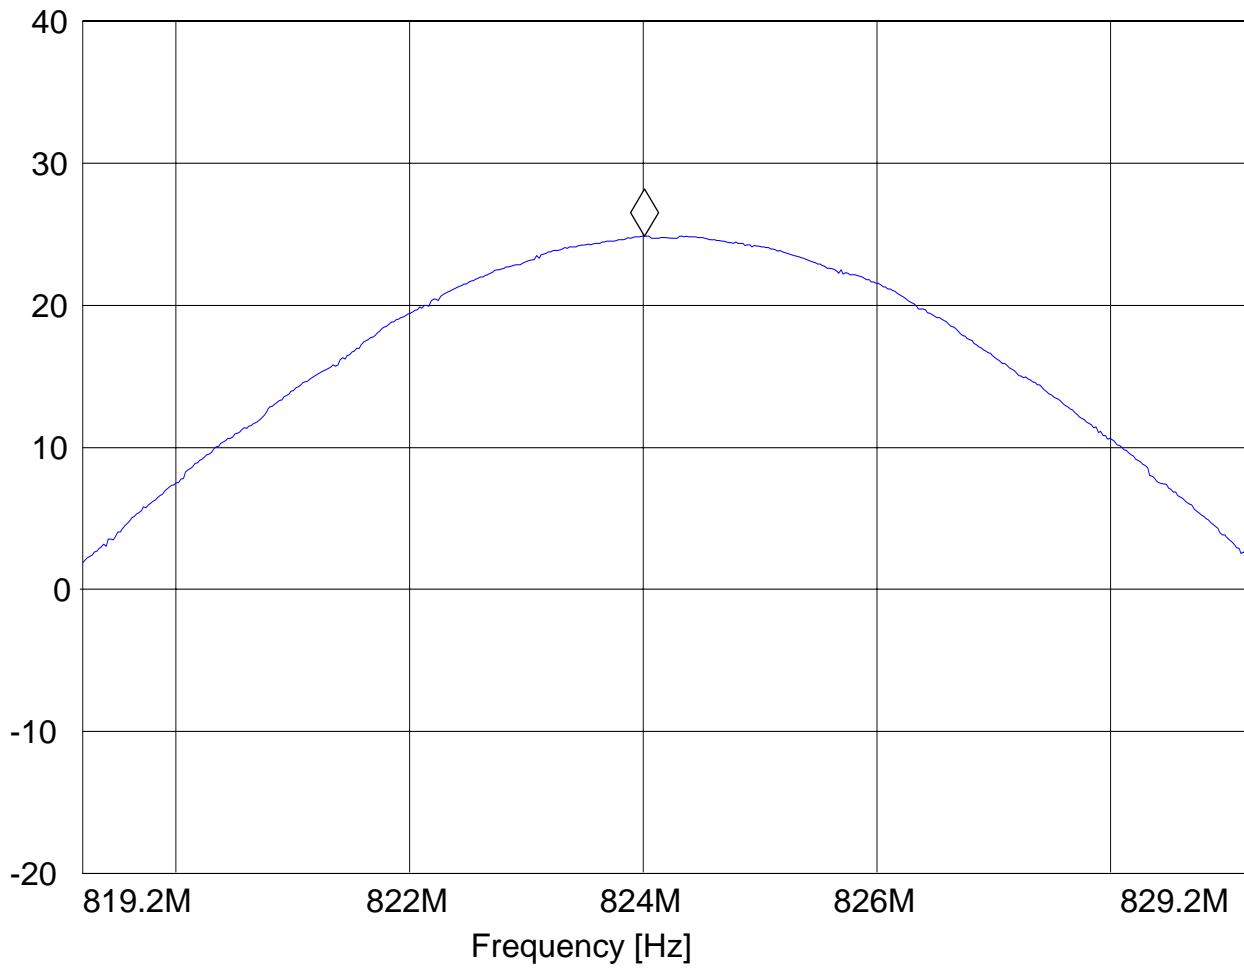

**EIRP (GSM 850)****§22.913(a)****CHANNEL 190 GPRS**

EUT: Unit 18

Customer: @Road

Test Mode: GSM850

ANT Orientation: V

EUT Orientation: 30° Option A

Test Engineer: Peter Mu

Power Supply: 12V DC


Comments:

**SWEEP TABLE: "EIRP 850 CH 190 H"**

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
831.6 MHz	841.6 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 836.56994 MHz 27.07 dBm

Level [dBm]

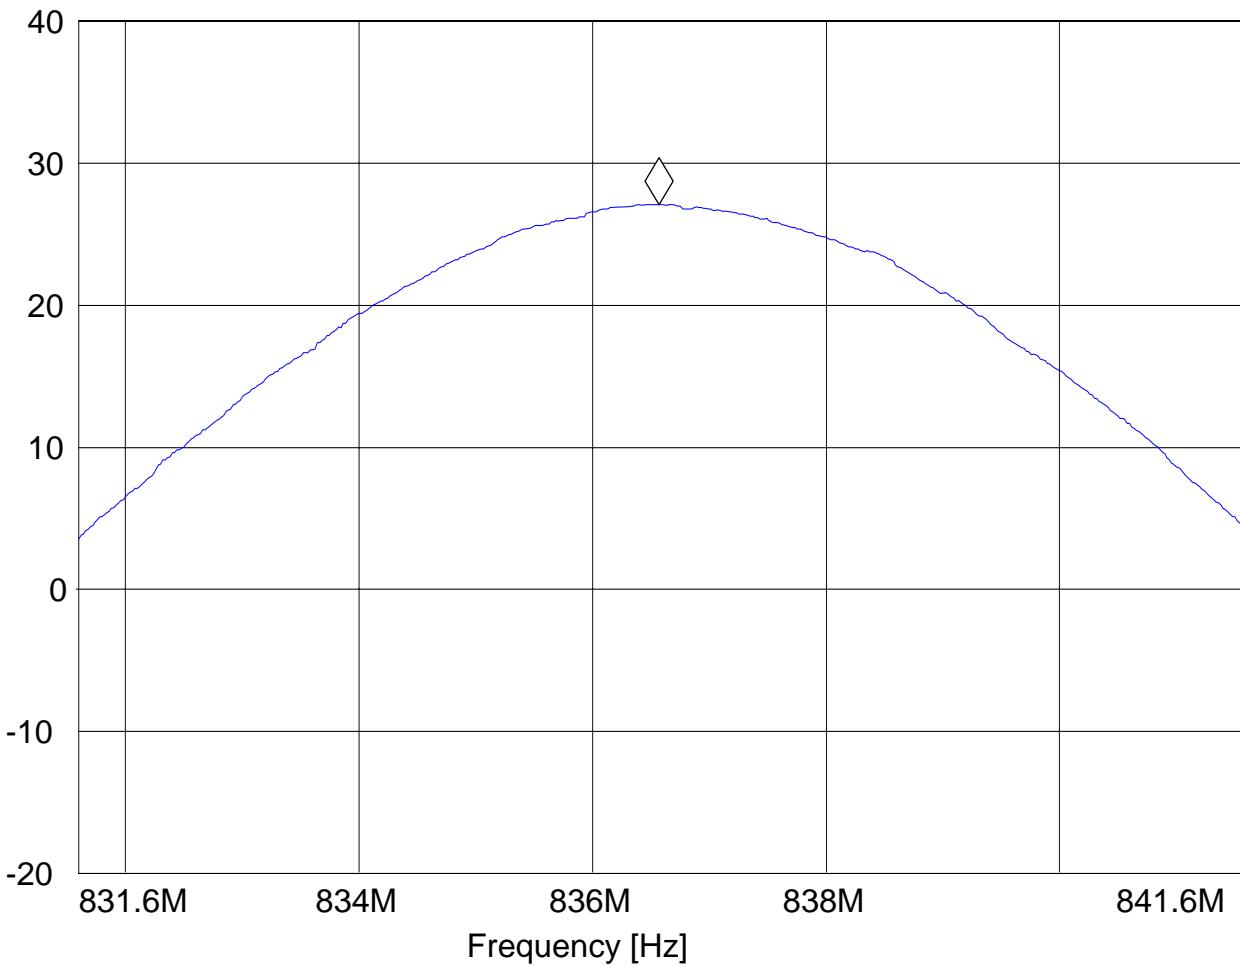

**EIRP (GSM 850)**

§22.913(a)

**CHANNEL 251 GPRS**

EUT: Unit 18

Customer: @Road

Test Mode: GSM850

ANT Orientation: V

EUT Orientation: 30° Option A

Test Engineer: Peter Mu

Power Supply: 12V DC


Comments:

**SWEEP TABLE: "EIRP 850 CH 251 H"**

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 848.950301 MHz 26.36 dBm

Level [dBm]

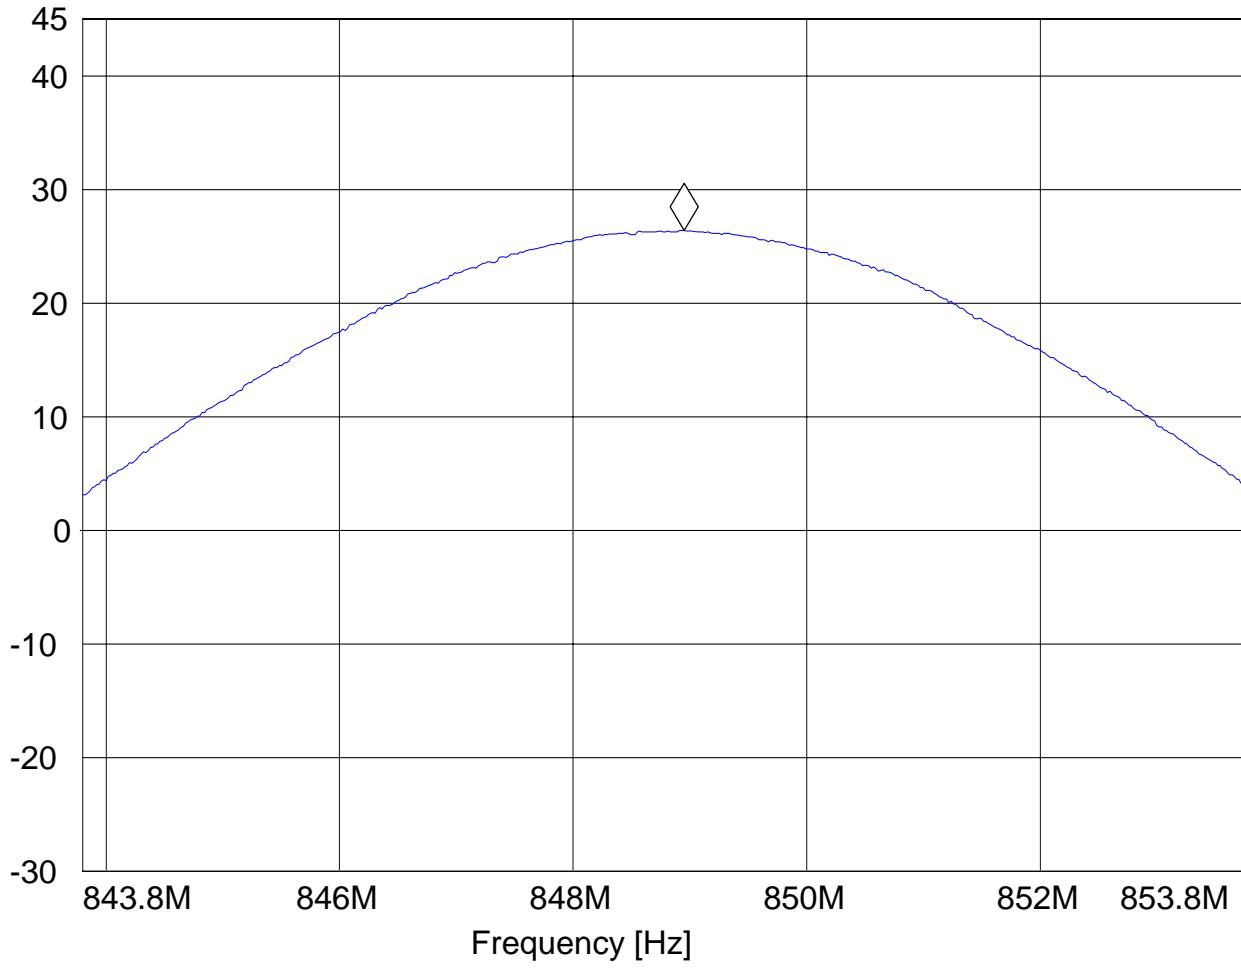

§24.232(b)

**EIRP (PCS-1900)  
CHANNEL 512 GPRS**

EUT: Unit 18

Customer: @Road

Test Mode: GSM1900

ANT Orientation: V

EUT Orientation: 30° Option J

Test Engineer: Peter Mu


Power Supply: 12V DC

Comments:

***SWEEP TABLE: "EIRP 1900 CH512"***

Short Description:		EIRP PCS 1900 for channel-512			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.8 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 1.85021002 GHz 22.74 dBm

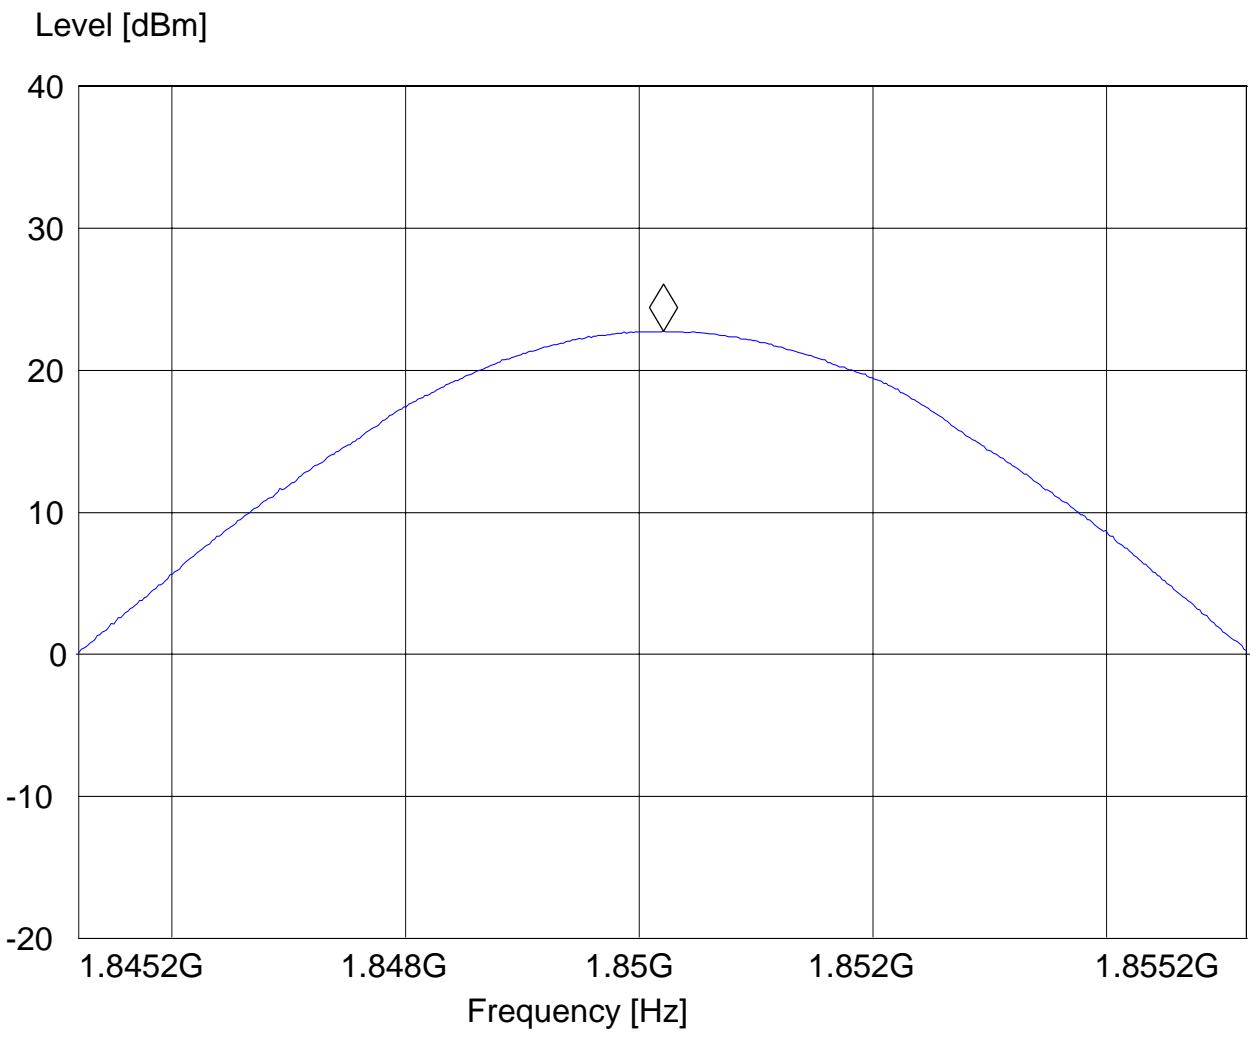

**EIRP (PCS-1900)****§24.232(b)****CHANNEL 661 GPRS**

EUT: Unit 18

Customer: @Road

Test Mode: GSM1900

ANT Orientation: V

EUT Orientation: 30° Option J

Test Engineer: Peter Mu

Power Supply: 12V DC


Comments:

***SWEET TABLE: "EIRP 1900 CH661"***

Short Description:		EIRP PCS 1900 for channel-661				
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer	
1.9 GHz	1.9 GHz		MaxPeak	Coupled	3 MHz	DUMMY-DBM
			MaxPeak			

Marker: 1.88011022 GHz 22.93 dBm

Level [dBm]

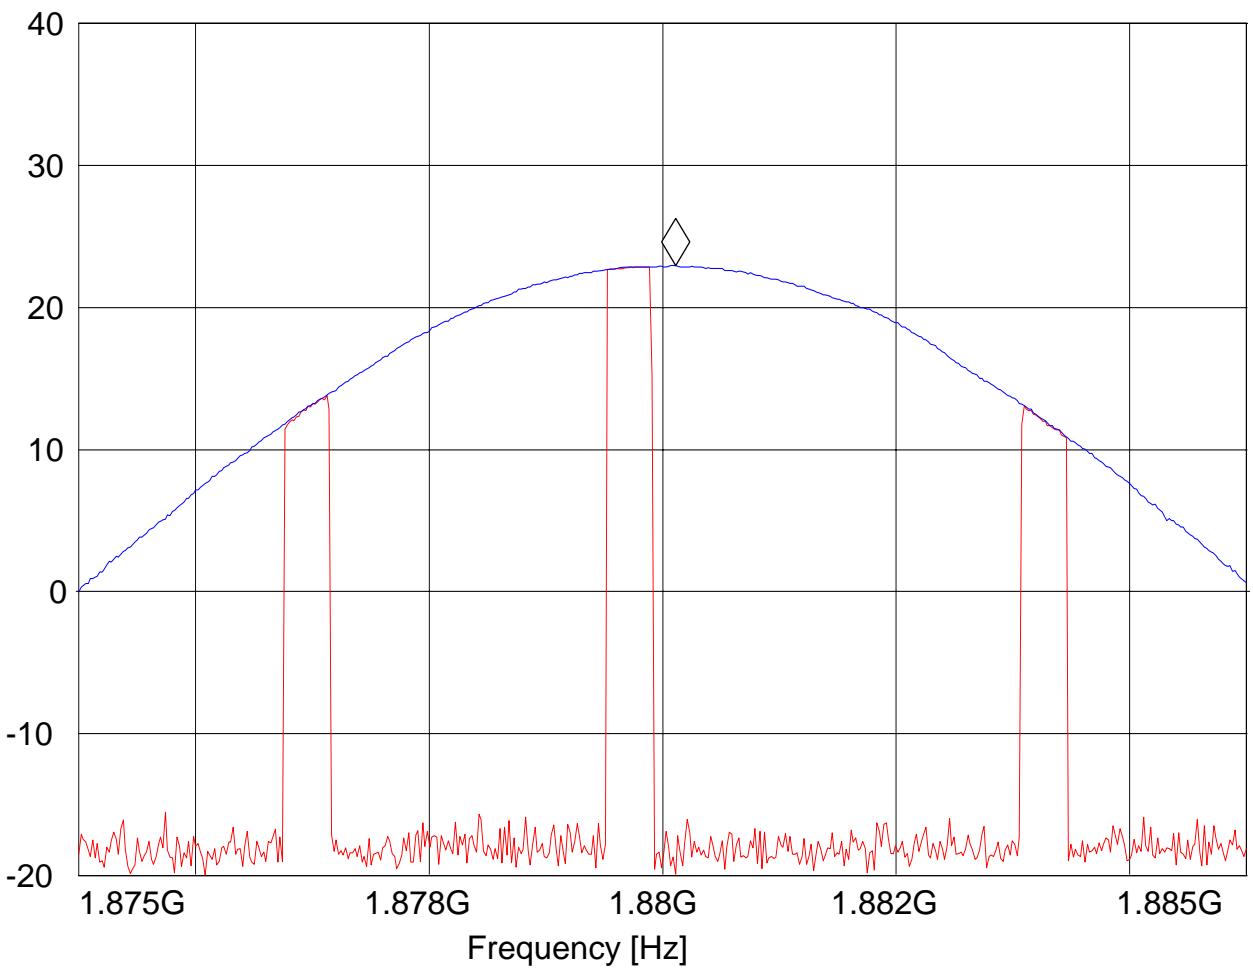

**EIRP (PCS-1900)  
CHANNEL 810 GPRS****§24.232(b)**

EUT: Unit 18

Customer: @Road

Test Mode: GSM1900

ANT Orientation: V

EUT Orientation: 30° Option J

Test Engineer: Peter Mu

Power Supply: 12V DC


Comments:

***SWEEP TABLE: "EIRP 1900 CH810"***

Short Description:	EIRP PCS 1900 for channel-810			
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz DUMMY-DBM

Marker: 1.90989018 GHz 22.65 dBm

Level [dBm]

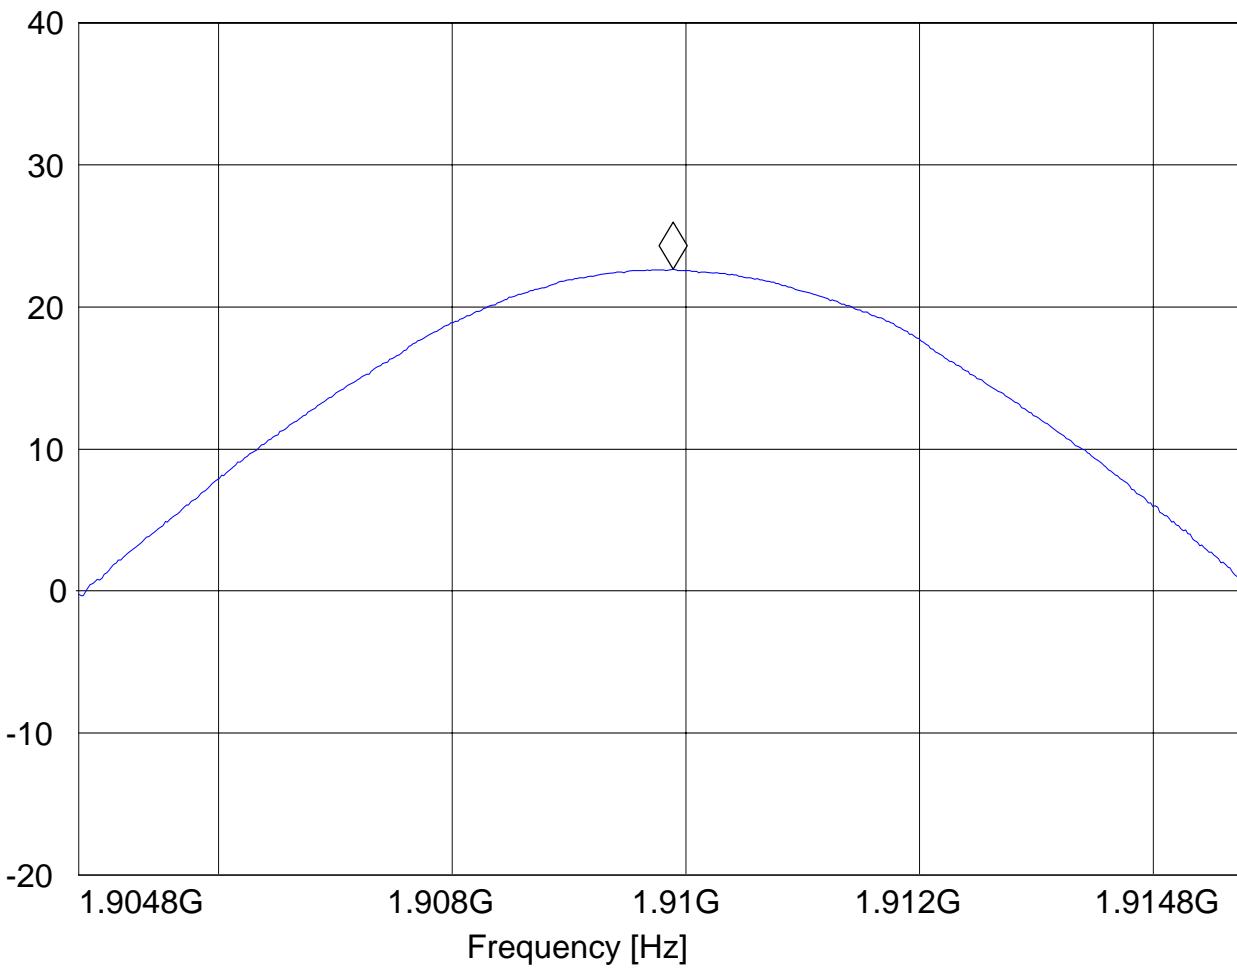


## **4.2 Occupied Bandwidth/Emission Bandwidth**

### **4.2.1 FCC 2.1049 Measurements required: Occupied bandwidth**

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.

(h) Transmitters employing digital modulation techniques-when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated.

### **4.2.2 Occupied / emission bandwidth measurement procedure:**

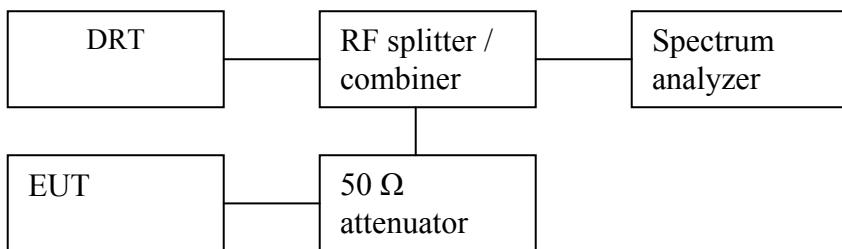

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure the 99% (-20 dB) occupied bandwidth. Record the value.
4. Set the spectrum analyzer to measure the 99.5% (-26 dB) emission bandwidth. Record the value.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

**4.2.3 Occupied / Emission bandwidth results 850 MHz band:**

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the following test reports:

Test Report conducted 850.pdf

Test Report conducted 1900.pdf

## 4.3 Frequency Stability

### 4.3.1 Limit

#### **For Hand carried battery powered equipment:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.2VDC and 4.5VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -2.7% and +21.62%. For the purposes of measuring frequency stability these voltage limits are to be used.

#### **Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU 200 UNIVERSAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30 C.
3. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS-1900&9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50 C.
7. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS-1900&9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

#### **For equipment powered by primary supply voltage:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

For this EUT section 2.1055(d)(1) applies. This requires to vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

**4.3.2 FREQUENCY STABILITY (GSM-850)**

Some of the test results in this report are extracted from conducted test report for the GSM radio module. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the following test reports:

Test Report conducted 850.pdf

Test Report conducted 1900.pdf

**4.3.3 FREQUENCY STABILITY (PCS-1900)**

Some of the test results in this report are extracted from conducted test report for the GSM radio module. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the following test reports:

Test Report conducted 850.pdf

Test Report conducted 1900.pdf

## 4.4 Spurious Emissions Conducted

### 4.4.1 FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

### 4.4.2 Limits:

#### 4.4.2.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### 4.4.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the

transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### **4.4.3 Conducted out of band emissions measurement procedure:**

**Based on TIA-603C 2004**

##### **2.2.13 Unwanted Emissions: Conducted Spurious**

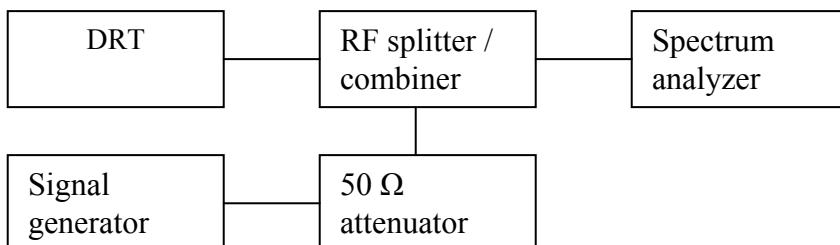

1. Connect the equipment as shown in the above diagram.
2. Set the spectrum analyzer to measure peak hold with the required settings.
3. Set the signal generator to a known output power and record the path loss in dB (**LOSS**) for frequencies up to the tenth harmonic of the EUT's carrier frequency. **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
4. Replace the signal generator with the EUT.
5. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.

**(note:** Step 3 above is performed prior to testing and **LOSS** is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the following test reports:

Test Report conducted 850.pdf  
Test Report conducted 1900.pdf

#### **4.5 Spurious Emissions Radiated**

**4.5.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.**

(a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

**4.5.2 Limits:****4.5.2.1 FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

**4.5.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.


(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### 4.5.3 Radiated out of band measurement procedure:

Based on TIA-603C 2004

#### 2.2.12 Unwanted emissions: Radiated Spurious

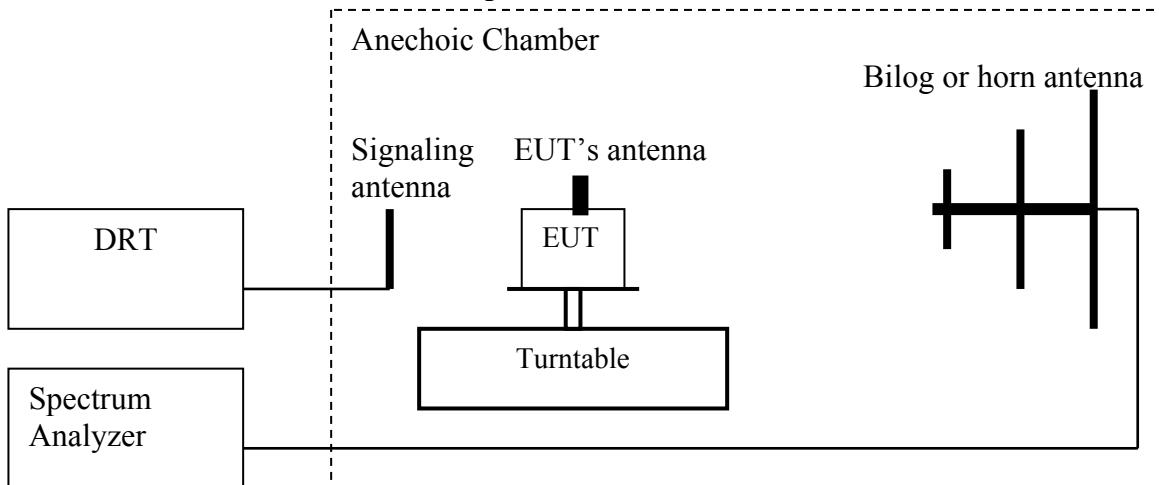

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (**LVL**) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:  

$$\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$$
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:  

$$\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$$
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

#### Spectrum analyzer settings:



Res B/W: 1 MHz

Vid B/W: 1 MHz

### **Measurement Survey:**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

#### 4.5.4 Radiated out of band emissions results on EUT:

##### 4.5.4.1 RESULTS OF RADIATED TESTS GSM-850:

Harmonics	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
2	<b>1648.4</b>	NF	<b>1673.2</b>	NF	<b>1697.6</b>	NF
3	<b>2472.6</b>	NF	<b>2509.8</b>	NF	<b>2546.4</b>	NF
4	<b>3296.8</b>	NF	<b>3346.4</b>	NF	<b>3395.2</b>	NF
5	<b>4121</b>	NF	<b>4183</b>	NF	<b>4244</b>	NF
6	<b>4945.2</b>	NF	<b>5019.6</b>	NF	<b>5092.8</b>	NF
7	<b>5769.4</b>	NF	<b>5856.2</b>	NF	<b>5941.6</b>	NF
8	<b>6593.6</b>	NF	<b>6692.8</b>	NF	<b>6790.4</b>	NF
9	<b>7417.8</b>	NF	<b>7529.4</b>	NF	<b>7639.2</b>	NF
10	<b>8242</b>	NF	<b>8366</b>	NF	<b>8488</b>	NF
NF = NOISE FLOOR						

#### 4.5.4.2 RADIATED SPURIOUS EMISSIONS (GSM-850)

**TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical**

**Note:**

1. The peak above the limit line is the carrier freq.
2. This plot is valid for low, mid & high channels (worst-case plot)


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17  
 Customer: ATRoad  
 Test Mode: GSM 850 CH190  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Satya Radhakrishna  
 Voltage: 12V battery  
 Comments: Peak marked is uplink

***SWEET TABLE: "FCC 24 Spur 30M-1G\_V"***

Short Description:		FCC 24 30MHz-1GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 836.713427 MHz 24.09 dBm

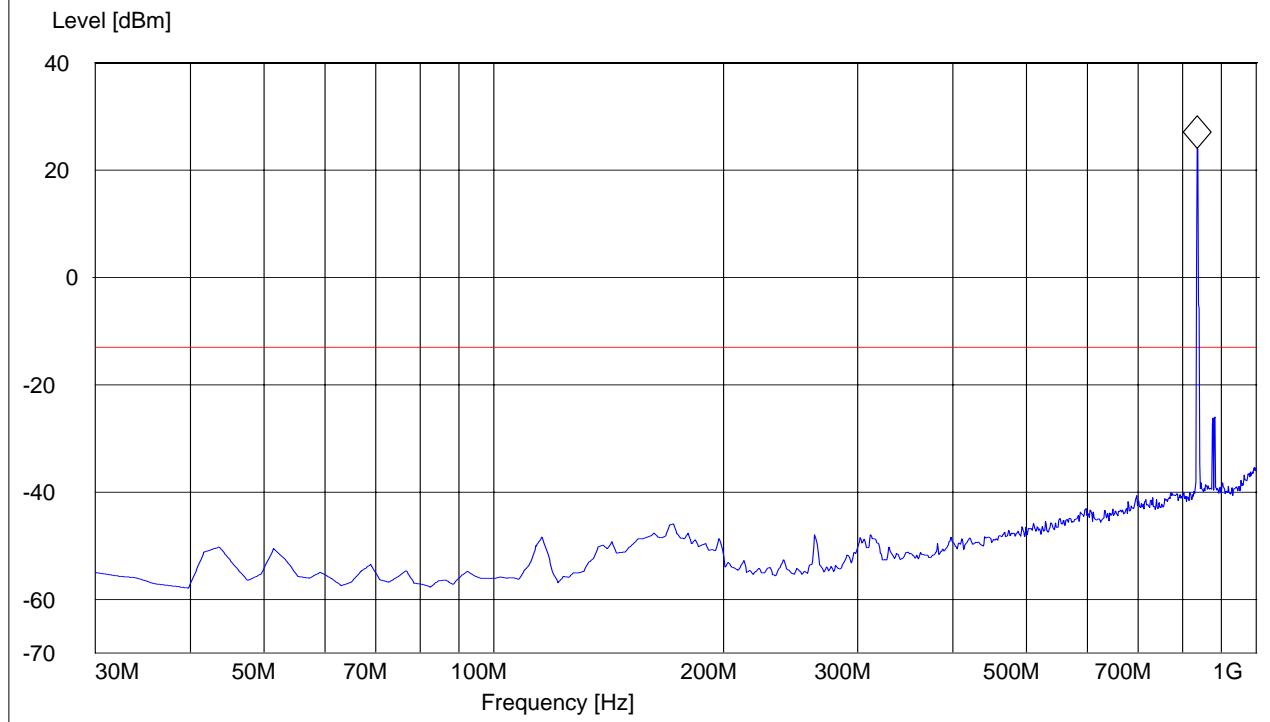

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 1GHz – 1.58GHz**


Spurious emission limit –13dBm

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17  
Customer: ATRoad  
Test Mode: GSM 850 CH128  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Satya Radhakrishna  
Voltage: 12V battery  
Comments:

***SWEEP TABLE: "FCC 22Spuri 1-1.58G"***

Short Description:		FCC 24 1GHz-8GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

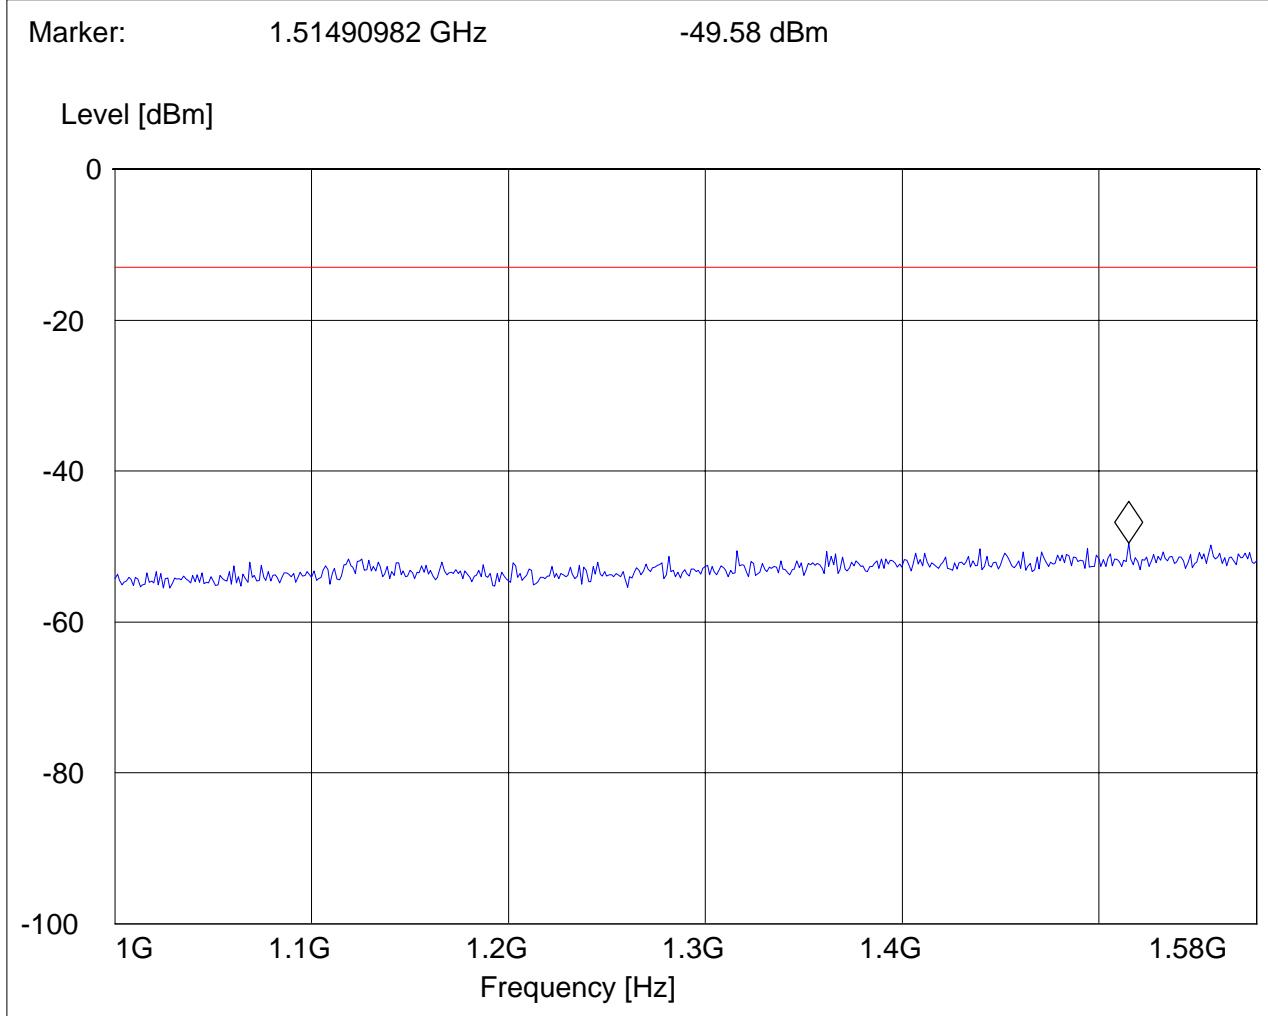

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 824.2MHz: 1.58GHz – 9GHz**

Spurious emission limit –13dBm


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17  
Customer: ATRoad  
Test Mode: GSM 850 CH128  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Satya Radhakrishna  
Voltage: 12V battery  
Comments:

**SWEEP TABLE: "FCC 22Spuri 1.58-9G"**

Short Description:		FCC 24 1GHz-8GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.338316633 GHz -48.6 dBm

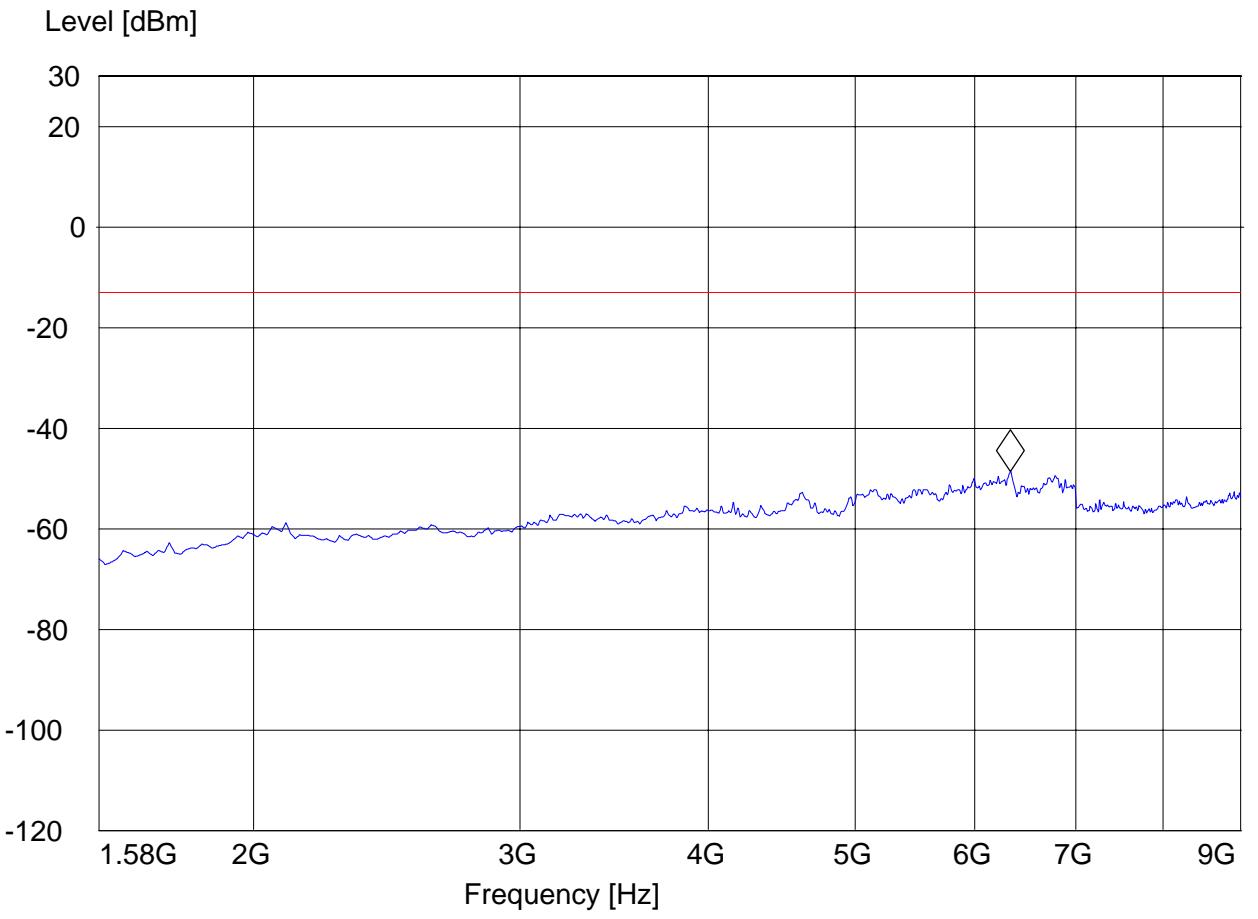

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 836.6MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17  
Customer: ATRoad  
Test Mode: GSM 850 CH190  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Satya Radhakrishna  
Voltage: 12V battery  
Comments:

***SWEET TABLE: "FCC 22Spuri 1-1.58G"***

Short Description:		FCC 24 1GHz-8GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.439358717 GHz -50.34 dBm

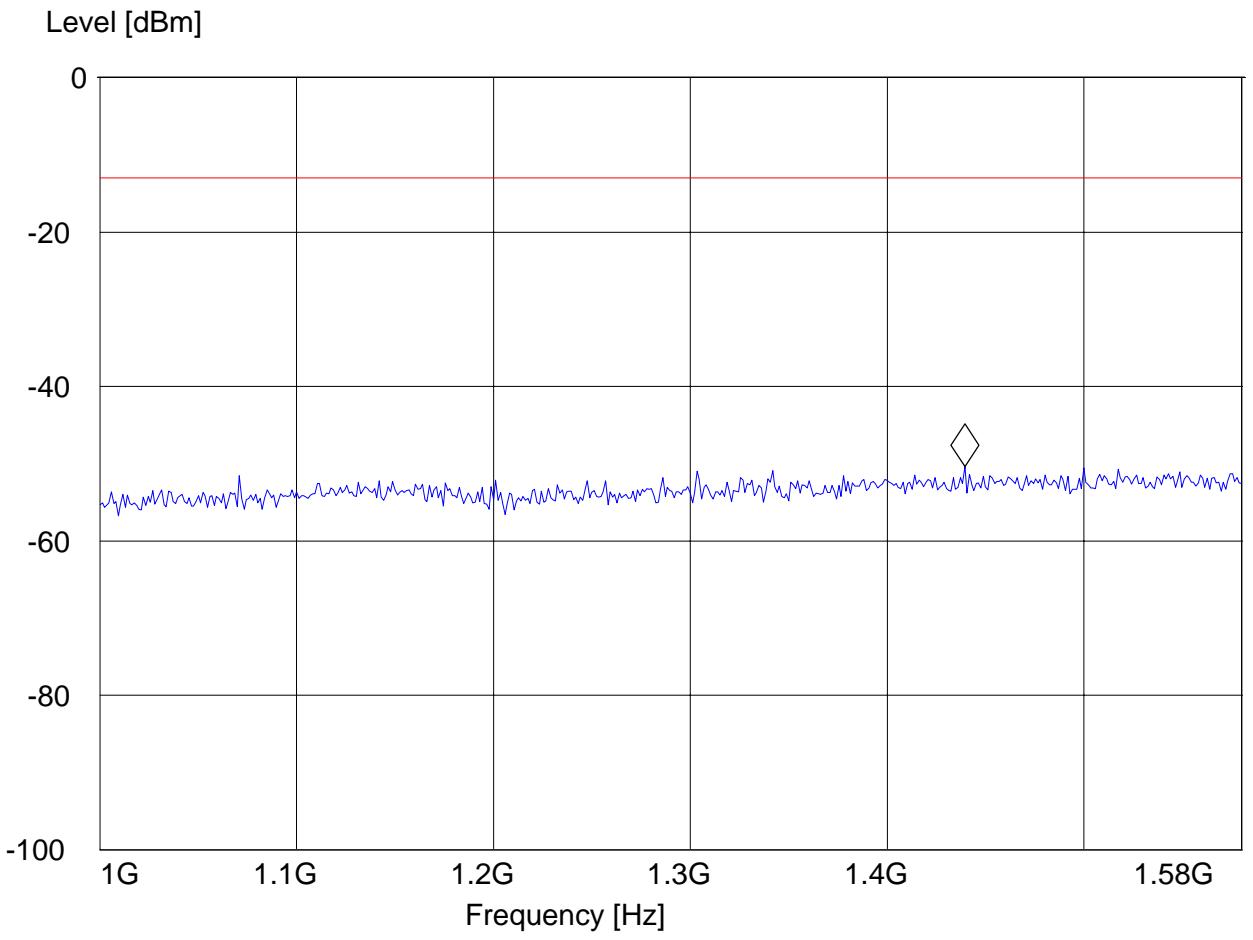

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 836.6MHz: 1.58GHz – 9GHz**

Spurious emission limit –13dBm

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**


EUT: iLM4500, #17  
Customer: ATRoad  
Test Mode: GSM 850 CH190  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Satya Radhakrishna  
Voltage: 12V battery  
Comments:

***SWEEP TABLE: "FCC 22Spuri 1.58-9G"***

Short Description:		FCC 24 1GHz-8GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.234228457 GHz -49.93 dBm

Level [dBm]

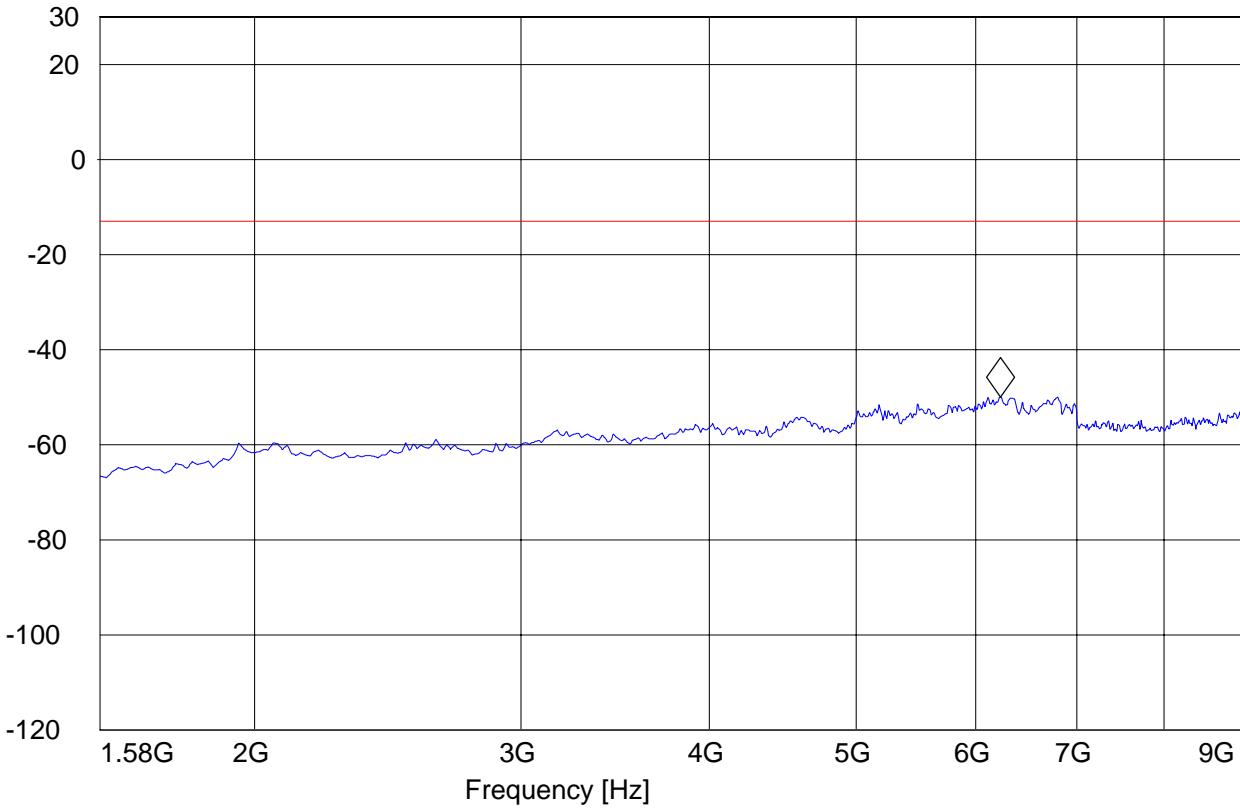

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 848.8MHz: 1GHz – 1.58GHz**

Spurious emission limit –13dBm


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17  
Customer: ATRoad  
Test Mode: GSM 850 CH 251  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Satya Radhakrishna  
Voltage: 12V battery  
Comments:

***SWEEP TABLE: "FCC 22Spuri 1-1.58G"***

Short Description:		FCC 24 1GHz-8GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker:	1.008136273 GHz	-49.77 dBm
---------	-----------------	------------

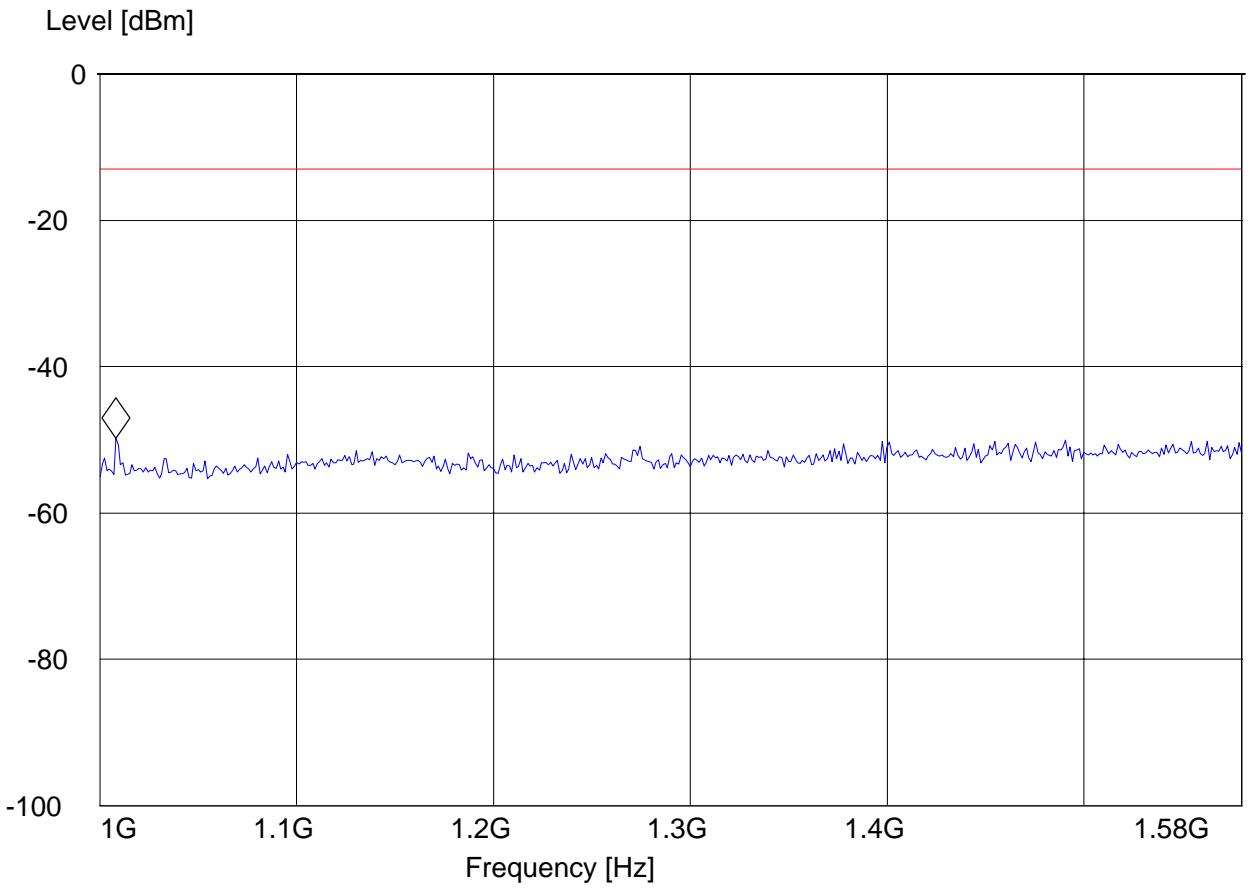

**RADIATED SPURIOUS EMISSIONS (GSM-850)****Tx @ 848.8MHz: 1.58GHz – 9GHz**

Spurious emission limit –13dBm


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17  
Customer: ATRoad  
Test Mode: GSM 850 CH 251  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Satya Radhakrishna  
Voltage: 12V battery  
Comments:

***SWEET TABLE: "FCC 22Spuri 1.58-9G"***

Short Description:		FCC 24 1GHz-8GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.338316633 GHz -49.51 dBm

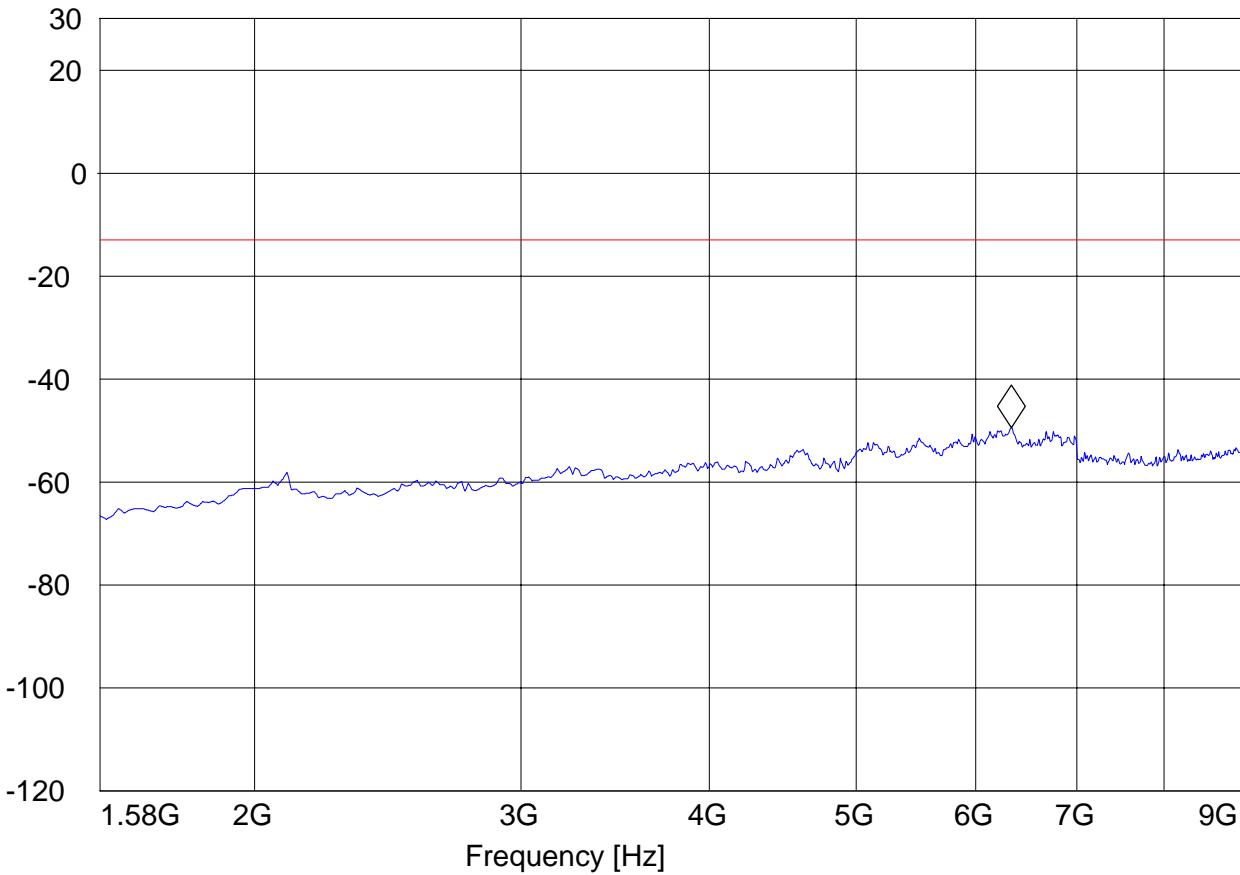**Level [dBm]**

#### **4.5.4.3 RESULTS OF RADIATED TESTS PCS-1900:**

Harmonic	Tx ch-512 Freq.(MHz)	Level (dBm)	Tx ch-661 Freq. (MHz)	Level (dBm)	Tx ch-810 Freq. (MHz)	Level (dBm)
2	<b>3700.4</b>	NF	<b>3760</b>	NF	<b>3819.6</b>	NF
3	<b>5550.6</b>	NF	<b>5640</b>	NF	<b>5729.4</b>	NF
4	<b>7400.8</b>	NF	<b>7520</b>	NF	<b>7639.2</b>	NF
5	<b>9251</b>	NF	<b>9400</b>	NF	<b>9549</b>	NF
6	<b>11101.2</b>	NF	<b>11280</b>	NF	<b>11458.8</b>	NF
7	<b>12951.4</b>	NF	<b>13160</b>	NF	<b>13368.6</b>	NF
8	<b>14801.6</b>	NF	<b>15040</b>	NF	<b>15278.4</b>	NF
9	<b>16651.8</b>	NF	<b>16920</b>	NF	<b>17188.2</b>	NF
10	<b>18502</b>	NF	<b>18800</b>	NF	<b>19098</b>	NF
NF = NOISE FLOOR						

#### 4.5.4.4 RADIATED SPURIOUS EMISSIONS(PCS 1900)

**TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical**

**Note: This plot is valid for low, mid & high channels (worst-case plot)**


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17  
Customer: ATRoad  
Test Mode: FCC 24 Rad  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Ed  
Voltage: 12v battery  
Comments:

***SWEET TABLE: "FCC 24 Spur 30M-1G\_V"***

Short Description:		FCC 24 30MHz-1GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1 GHz -34.47 dBm

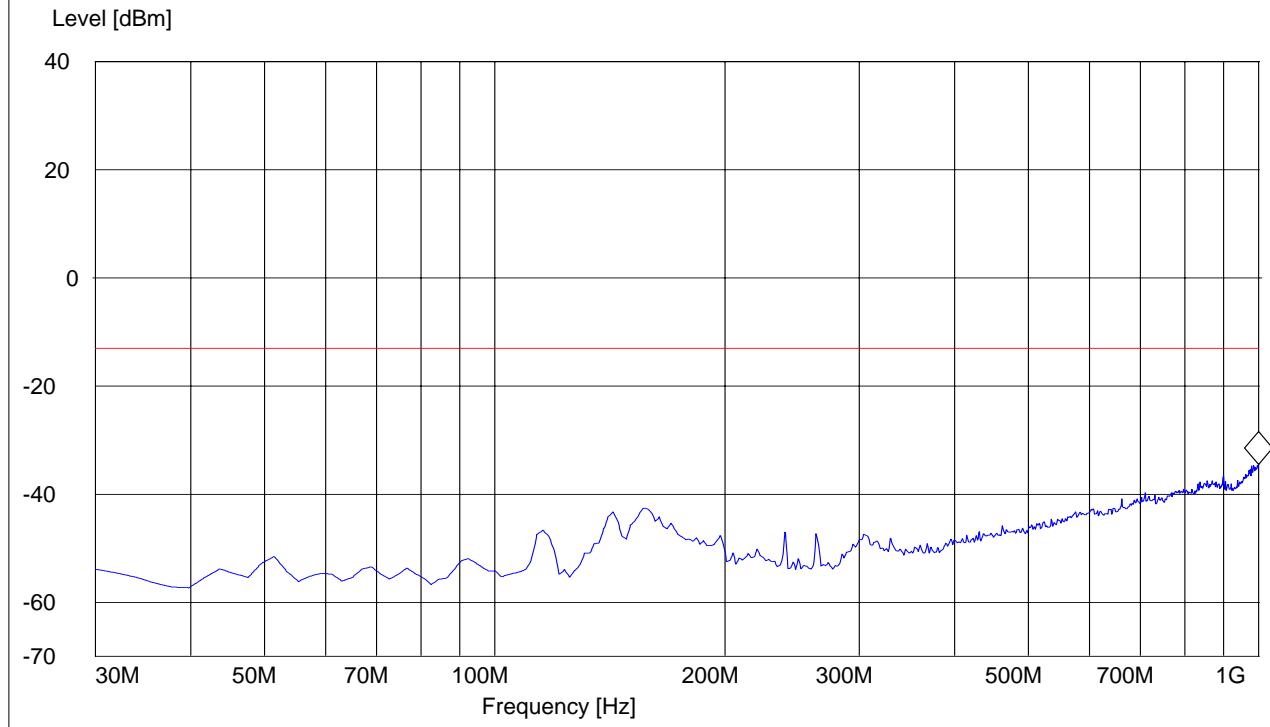

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1850.2MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm

**Note: The peak above the limit line is the carrier freq. at ch-512.****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17

Customer: ATRoad

Test Mode: FCC 24 Rad

ANT Orientation: V

EUT Orientation: H

Test Engineer: Ed

Voltage: 12v battery


Comments:

**SWEEP TABLE: "FCC 24Spuri 1-3G"**

Short Description:		FCC 24 1GHz-8GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.849699399 GHz 17.27 dBm

Level [dBm]

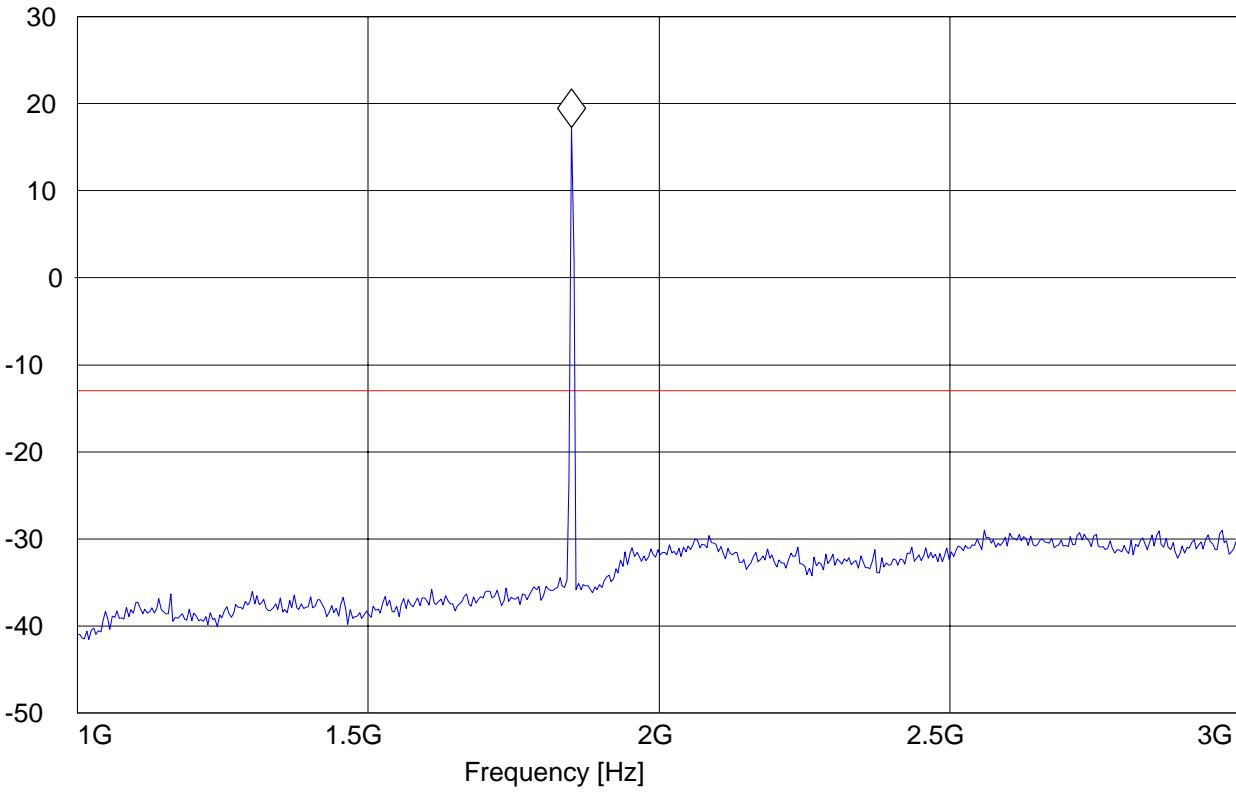

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1850.2MHz: 3GHz – 18GHz**

Spurious emission limit -13dBm


**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17  
Customer: ATRoad  
Test Mode: FCC 24 Rad  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Ed  
Voltage: 12v battery  
Comments:

***SWEEP TABLE: "FCC 24Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 17.849699399 GHz -50.94 dBm

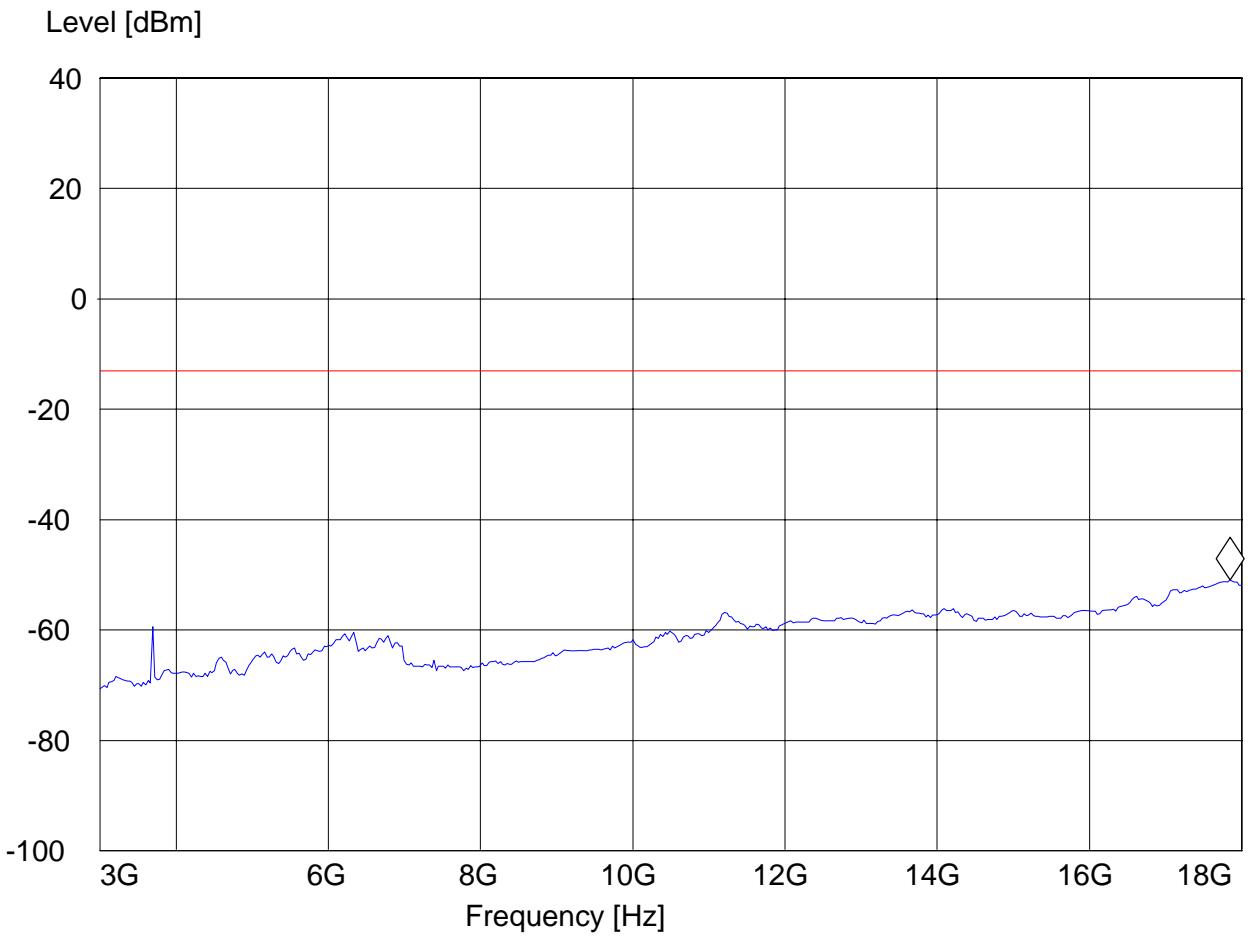**RADIATED SPURIOUS EMISSIONS(PCS 1900)**

**Tx @ 1880.0MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm

**Note: The peak above/close to the limit line is the carrier freq. at ch-661.****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17

Customer: ATRoad

Test Mode: FCC 24 Rad

ANT Orientation: V

EUT Orientation: H

Test Engineer: Ed

Voltage: 12v battery


Comments:

**SWEEP TABLE: "FCC 24Spuri 1-3G"**

Short Description:		FCC 24 1GHz-8GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.881763527 GHz 16.09 dBm

Level [dBm]

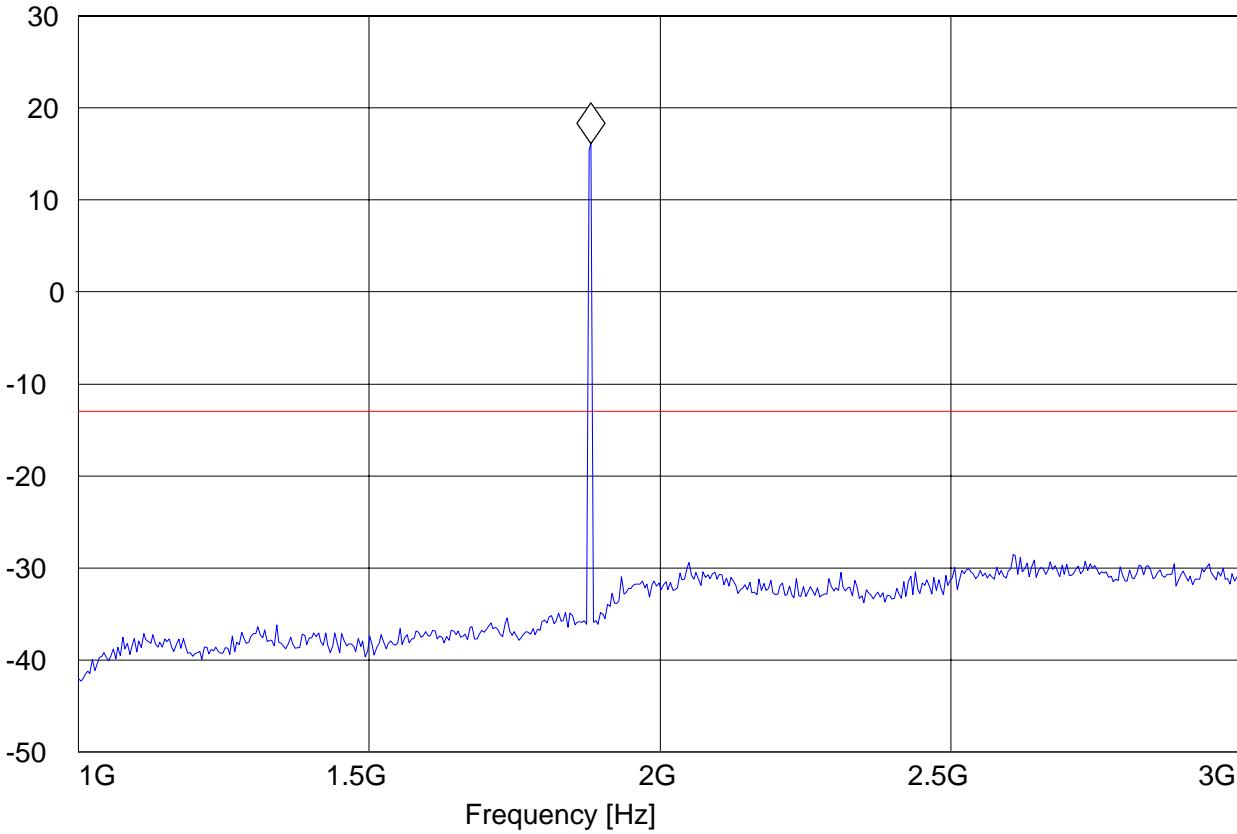

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1880.0MHz: 3GHz – 18GHz**

Spurious emission limit –13dBm

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17

Customer: ATRoad

Test Mode: FCC 24 Rad

ANT Orientation: V

EUT Orientation: H

Test Engineer: Ed


Voltage: 12v battery

Comments:

***SWEEP TABLE: "FCC 24Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 17.819639279 GHz -51.3 dBm

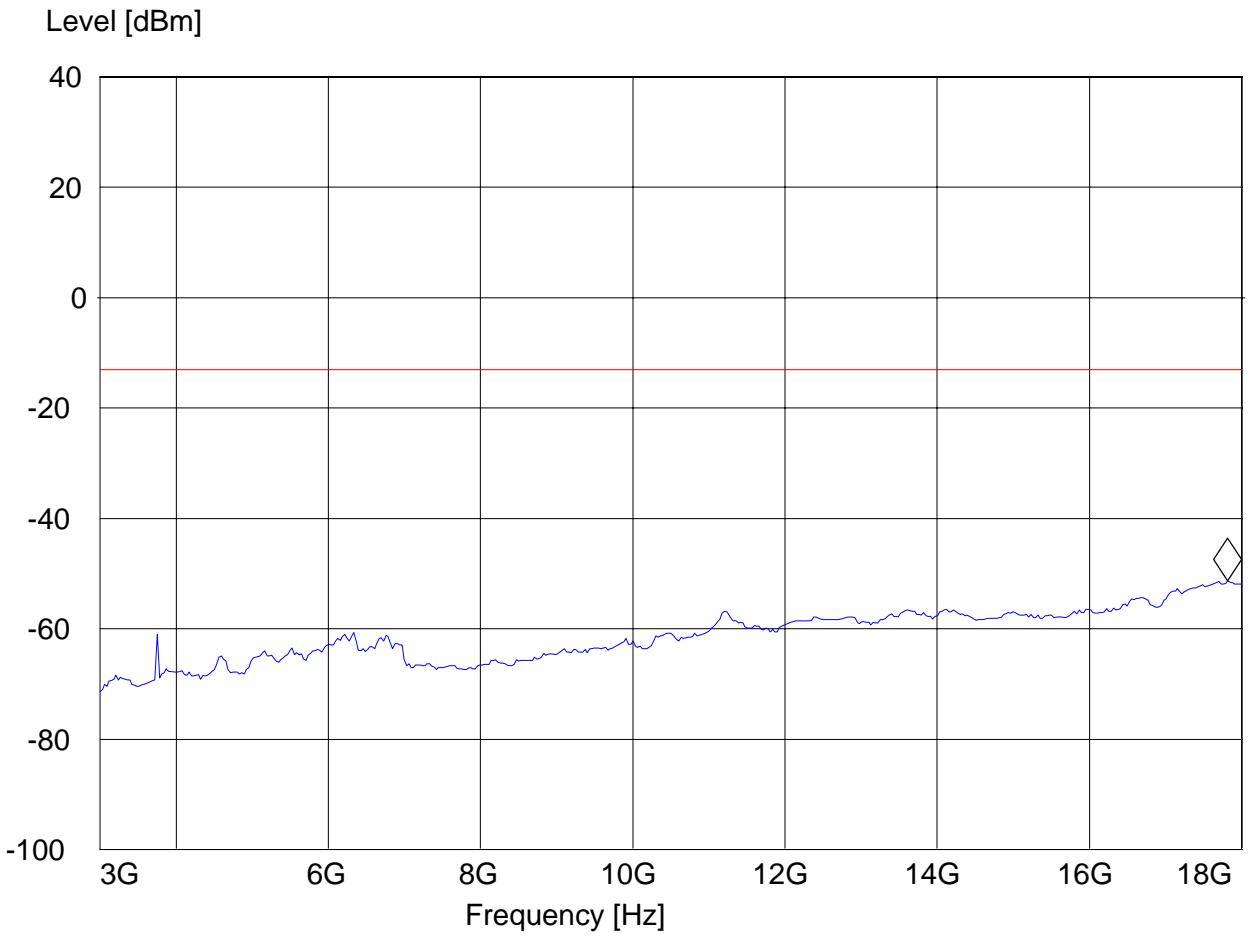

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1909.8MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm

**Note: The peak above the limit line is the carrier freq. at ch-810.****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**


EUT: iLM4500, #17  
Customer: ATRoad  
Test Mode: FCC 24 Rad  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Ed  
Voltage: 12v battery  
Comments:

**SWEEP TABLE: "FCC 24Spuri 1-3G"**

Short Description:		FCC 24 1GHz-8GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.909819639 GHz 16.98 dBm

Level [dBm]

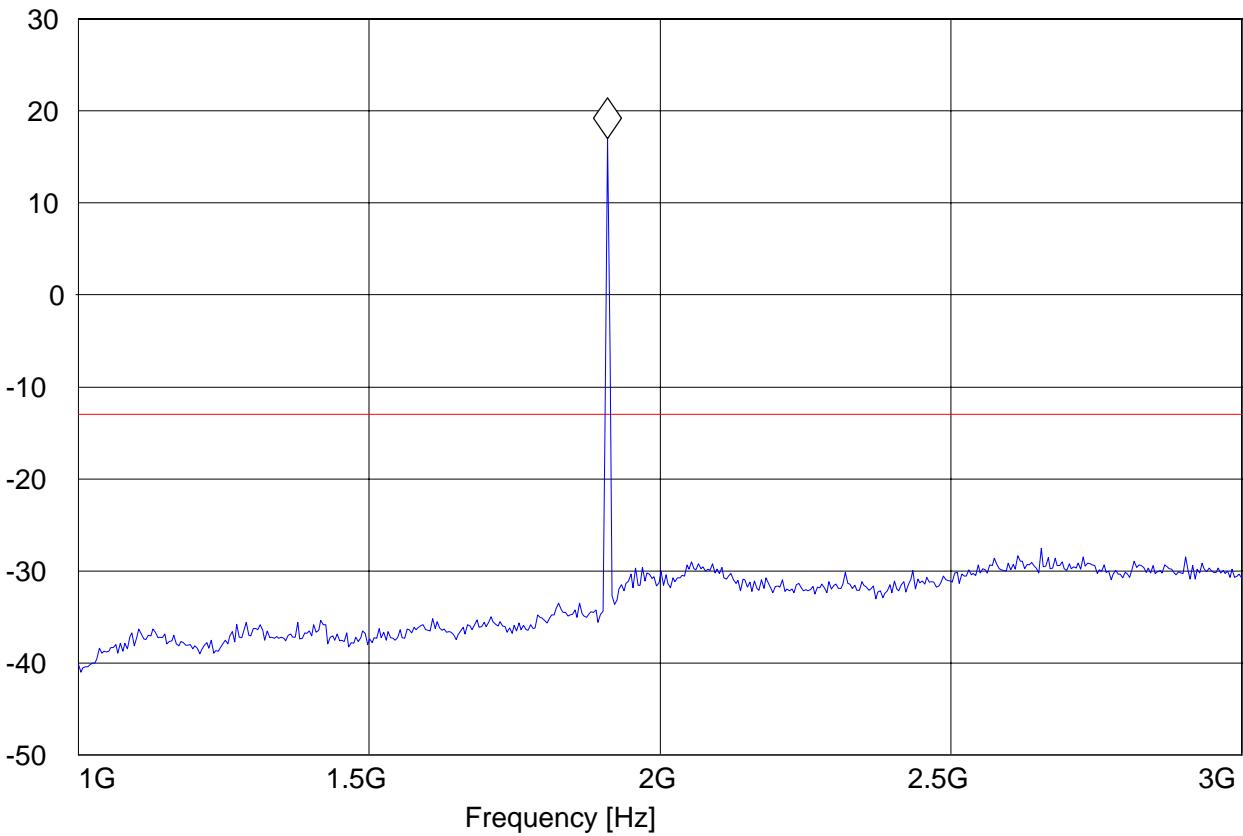

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****Tx @ 1909.8MHz: 3GHz – 18GHz**

Spurious emission limit –13dBm

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: iLM4500, #17

Customer: ATRoad

Test Mode: FCC 24 Rad

ANT Orientation: V

EUT Orientation: H

Test Engineer: Ed

Voltage: 12v battery


Comments:

***SWEEP TABLE: "FCC 24Spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 17.759519038 GHz -51.26 dBm

Level [dBm]

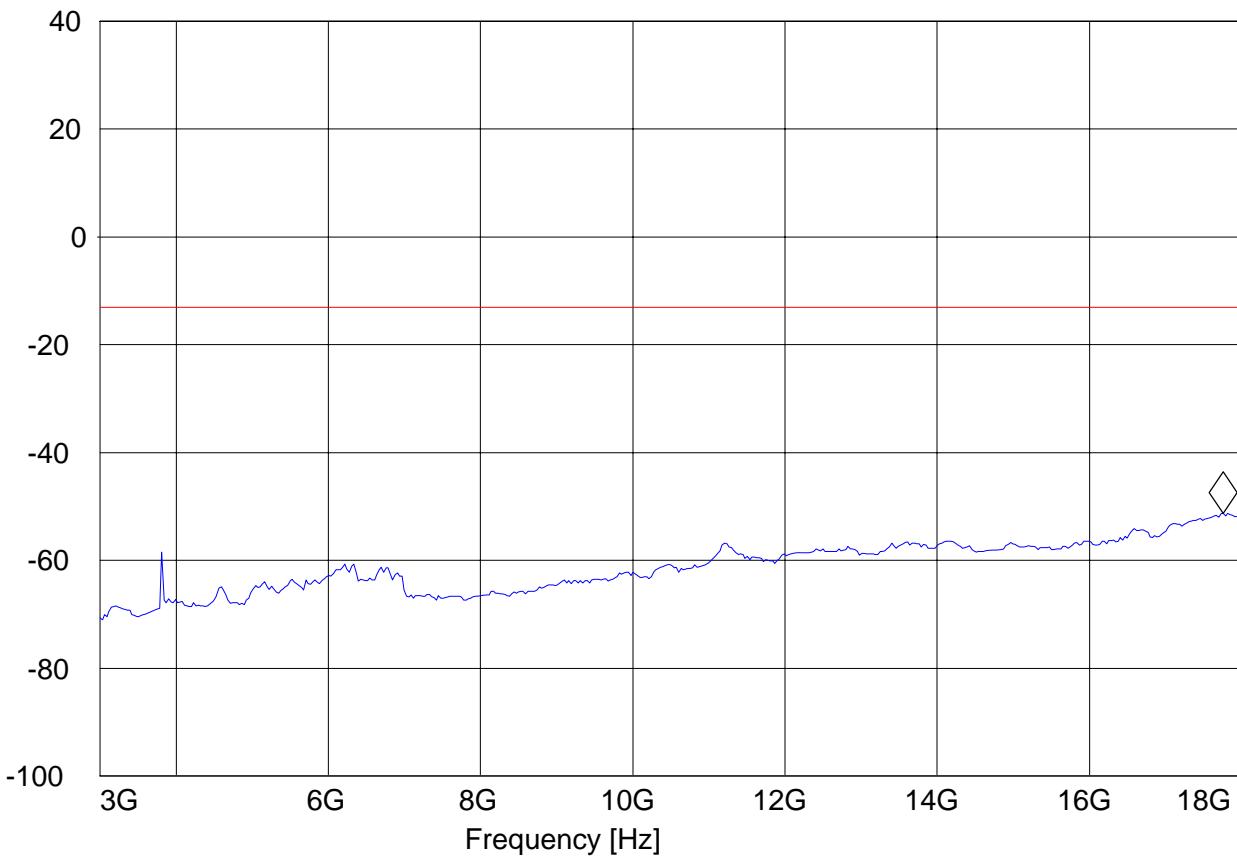

**RADIATED SPURIOUS EMISSIONS(PCS 1900)****18GHz – 19.1GHz**

Spurious emission limit –13dBm

**Note: This plot is valid for low, mid & high channels (worst-case plot)****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**


EUT: iLM4500, #17  
Customer: ATRoad  
Test Mode: FCC 24 Rad  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Ed  
Voltage: 12v battery  
Comments:

***SWEET TABLE: "FCC 24spuri 18-19.1G"***

Short Description:		FCC 24 18GHz-19.1GHz			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
18.0 GHz	19.1 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 19.1 GHz -50.86 dBm

Level [dBm]

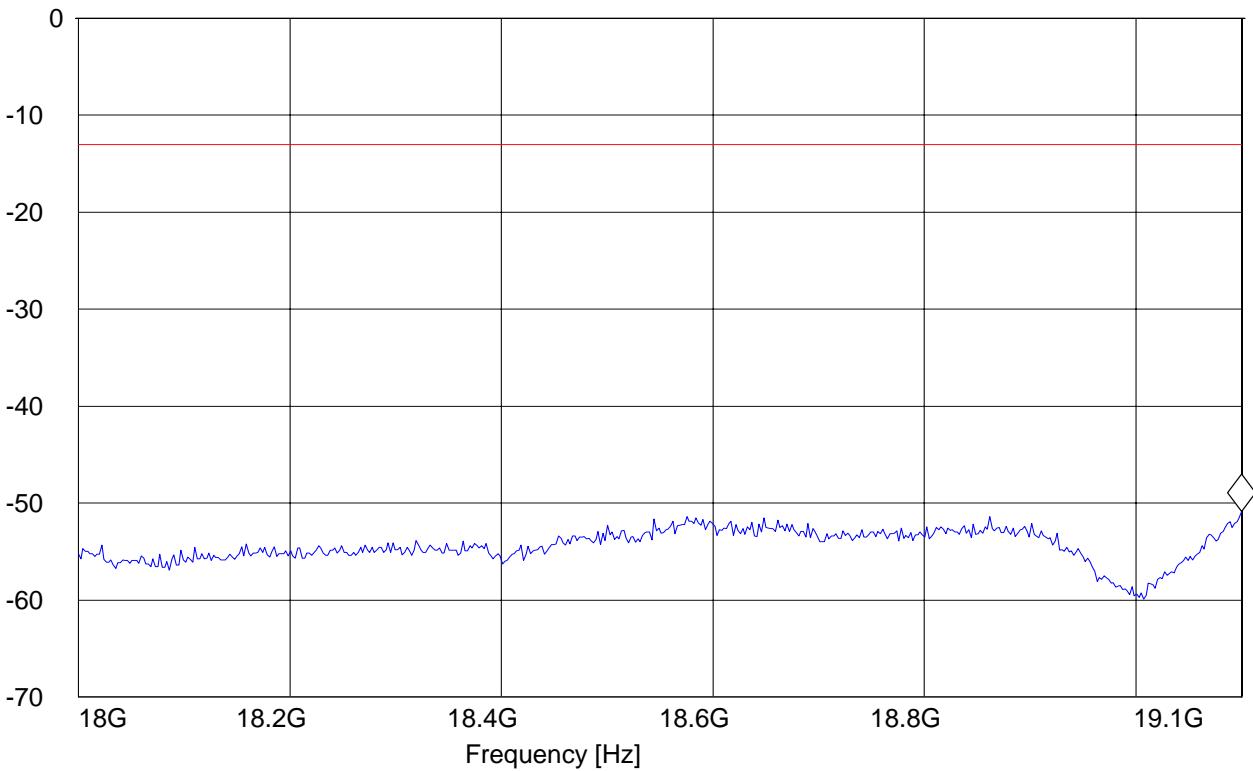

**4.6 RECEIVER RADIATED EMISSIONS****§ 2.1053 / RSS-132 & 133****NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

**Limits****SUBCLAUSE § RSS-133**

Frequency (MHz)	Field strength ( $\mu$ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**4.6.1 Receiver Spurious on EUT 850 MHz****RECEIVER RADIATED EMISSIONS**


EUT in Idle Mode: 30MHz – 1GHz

**Note: Peak Reading Vs. Quasi-Peak Limit.*****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA***

EUT: iLM4500 #18  
Customer: AtRoad  
Test Mode: GSM850  
ANT Orientation: H  
EUT Orientation: H  
Test Engineer: PETER MU  
Voltage: 12 V BATTERY  
Comments:

***SWEEP TABLE: "CANADA RE\_30M-1G\_Hor"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

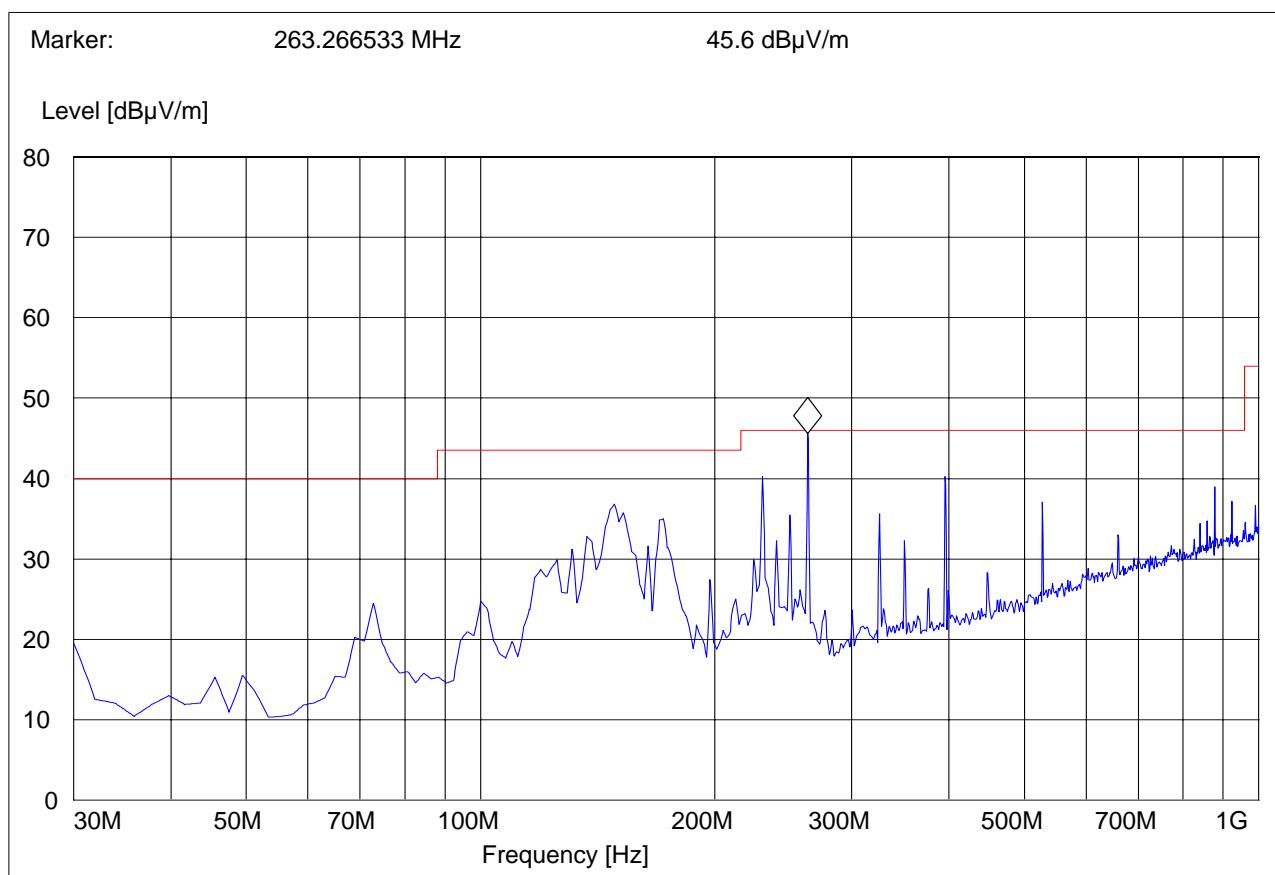

**RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 1GHz -3GHz****Note: Peak Reading Vs. Average Limit.****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**


EUT: #18  
Customer: @Road  
Test Mode: GSM 850, Idle Mode  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Ed  
Power Supply:: 12V Battery  
Comments: 2 ferrites on data/pwr cables

**SWEEP TABLE: "CANADA RE\_1-3G"**

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Time Coupled	1 MHz	#326horn_AF_vert

Marker: 2.919839679 GHz 49.91 dB $\mu$ V/m

Level [dB $\mu$ V/m]

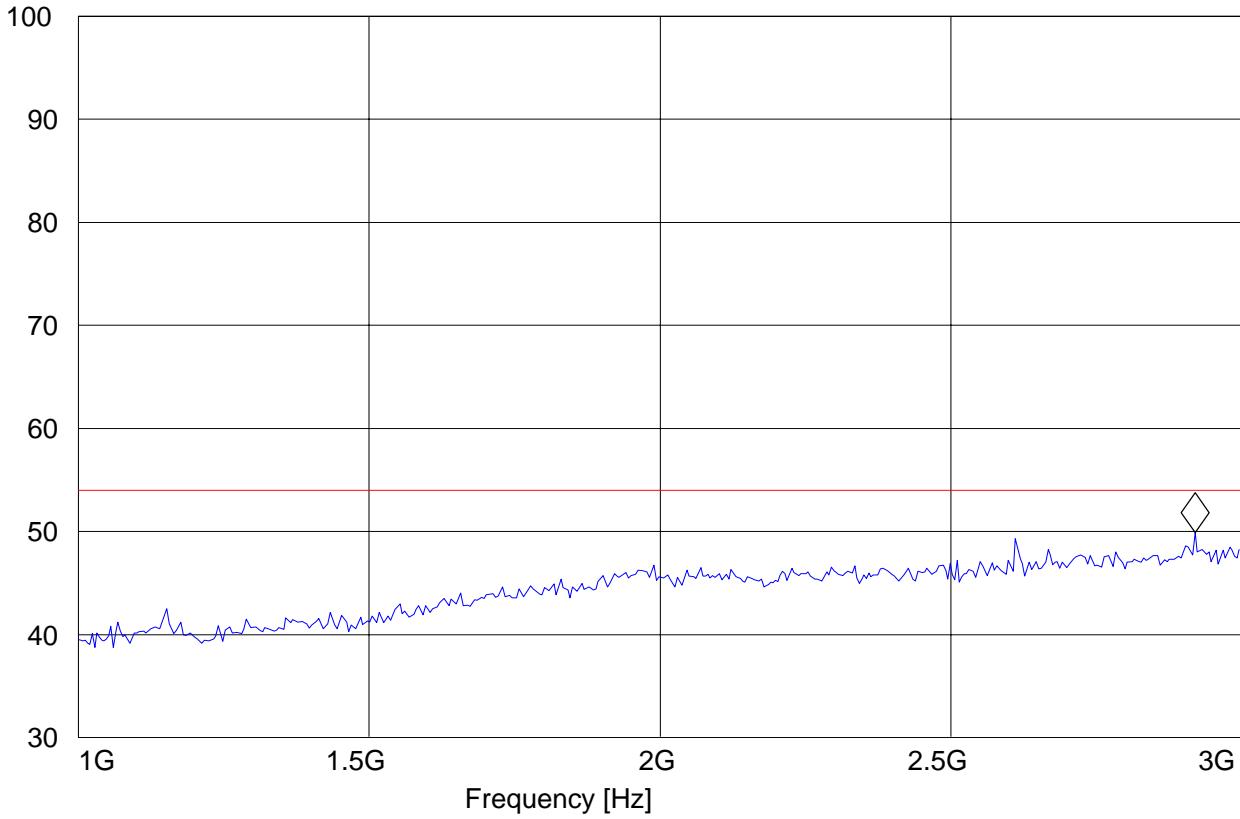

**RECEIVER RADIATED EMISSIONS**


EUT in Idle Mode: 3GHz – 18GHz

**Note: Peak Reading Vs. Average Limit.****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: #18  
Customer: @Road  
Test Mode: GSM 850, Idle Mode  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Ed  
Power Supply:: 12V Battery  
Comments: 2 ferrites on data/pwr cables

***SWEEP TABLE: "CANADA RE\_3-18G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

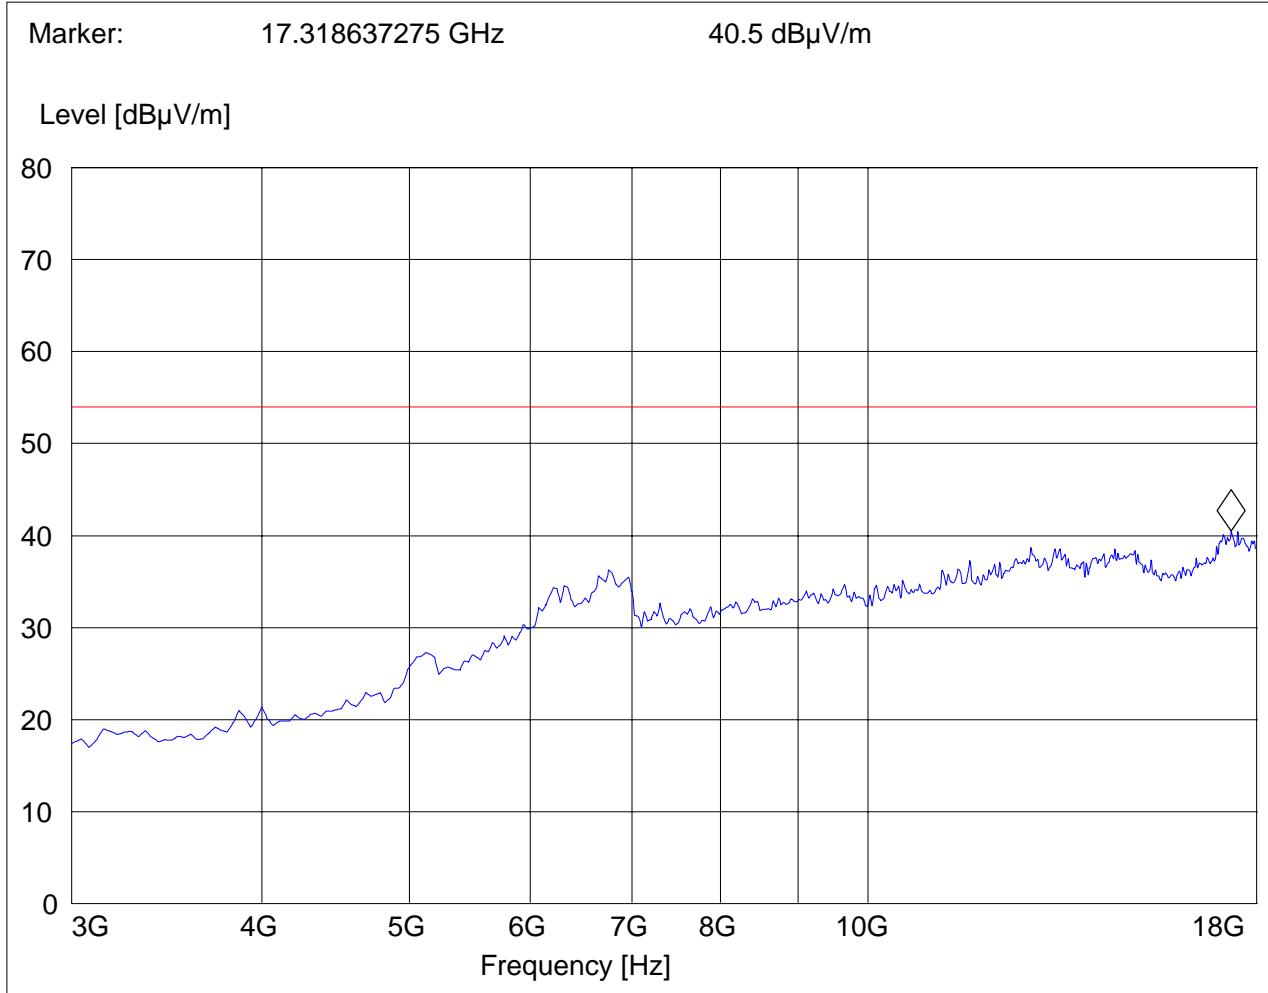

#### 4.6.2 Receiver Spurious on EUT 1900 MHz

##### RECEIVER RADIATED EMISSIONS

EUT in Idle Mode: 30MHz – 1GHz

Antenna: vertical

**Note: Peak Reading Vs. Quasi-Peak Limit.**

**CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**


EUT: #18  
 Customer: @Road  
 Test Mode: GSM 1900, Idle Mode  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Ed  
 Power Supply: 12V Battery  
 Comments: 2 ferrites on data/pwr cables

***SWEET TABLE: "CANADA RE\_30M-1G\_Ver"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

Marker: 924.188377 MHz 42.47 dB $\mu$ V/m

Level [dB $\mu$ V/m]

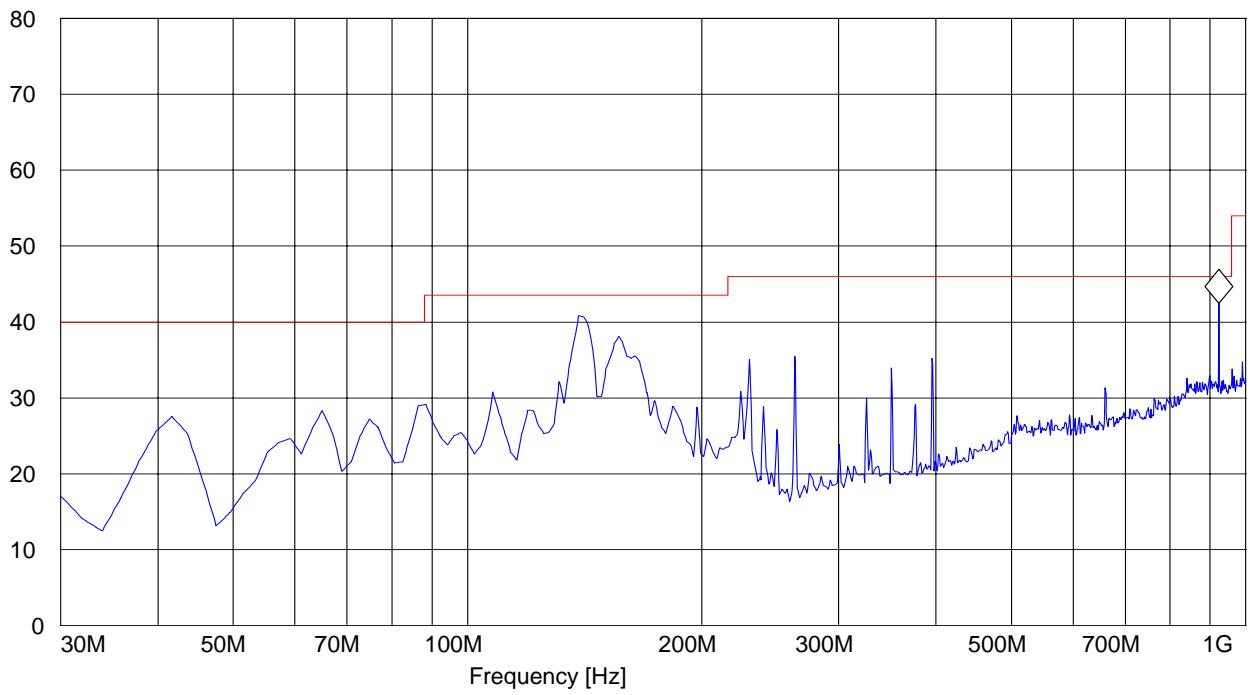

**RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 1GHz – 3GHz****Note: Peak Reading Vs. Average Limit.****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**


EUT: #18  
Customer: @Road  
Test Mode: GSM 1900, Idle Mode  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Ed  
Power Supply:: 12V Battery  
Comments: 2 ferrites on data/pwr cables

***SWEET TABLE: "CANADA RE\_1-3G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.887775551 GHz 48.75 dB $\mu$ V/m

Level [dB $\mu$ V/m]

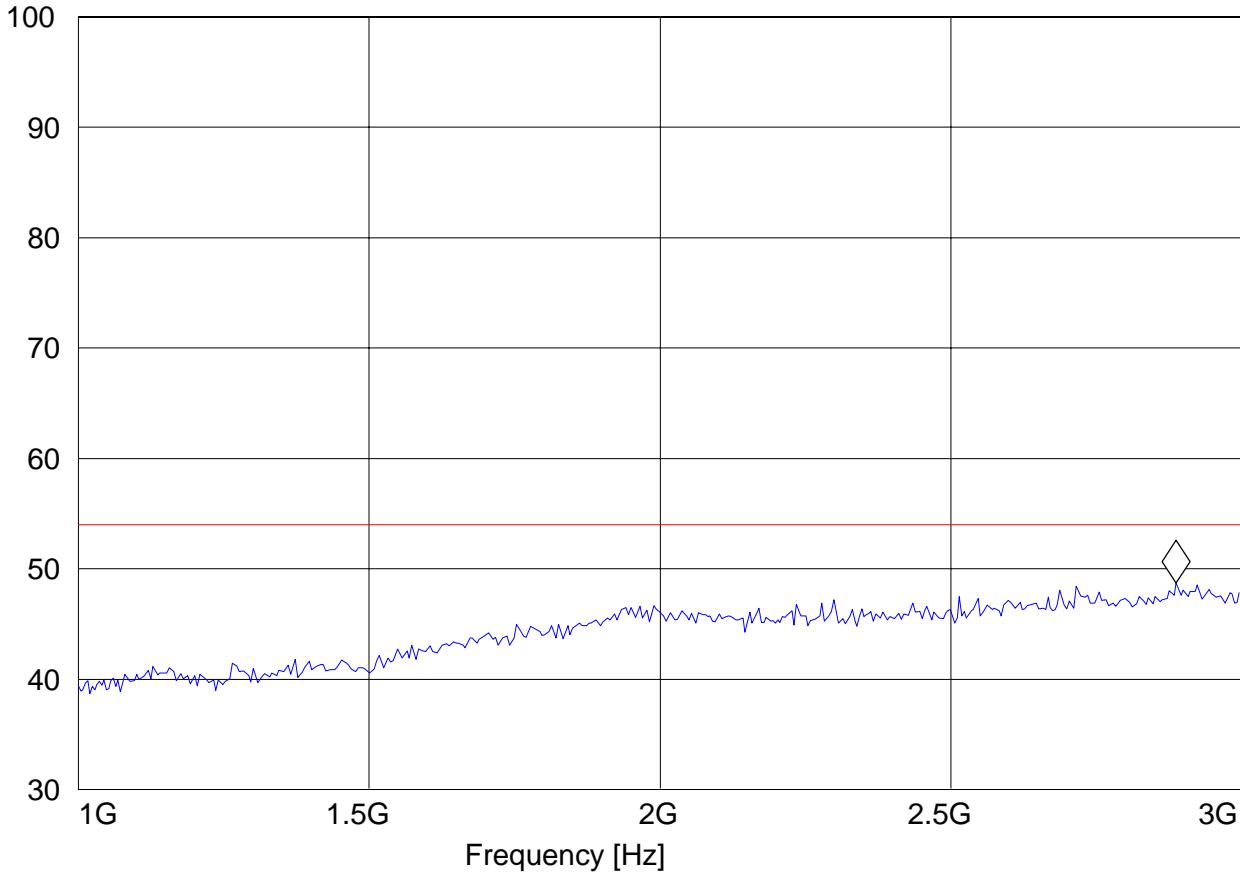

**RECEIVER RADIATED EMISSIONS**


EUT in Idle Mode: 3GHz – 18GHz

**Note: Peak Reading Vs. Average Limit.****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**

EUT: #18  
Customer: @Road  
Test Mode: GSM 1900, Idle Mode  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Ed  
Power Supply:: 12V Battery  
Comments: 2 ferrites on data/pwr cables

***SWEEP TABLE: "CANADA RE\_3-18G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

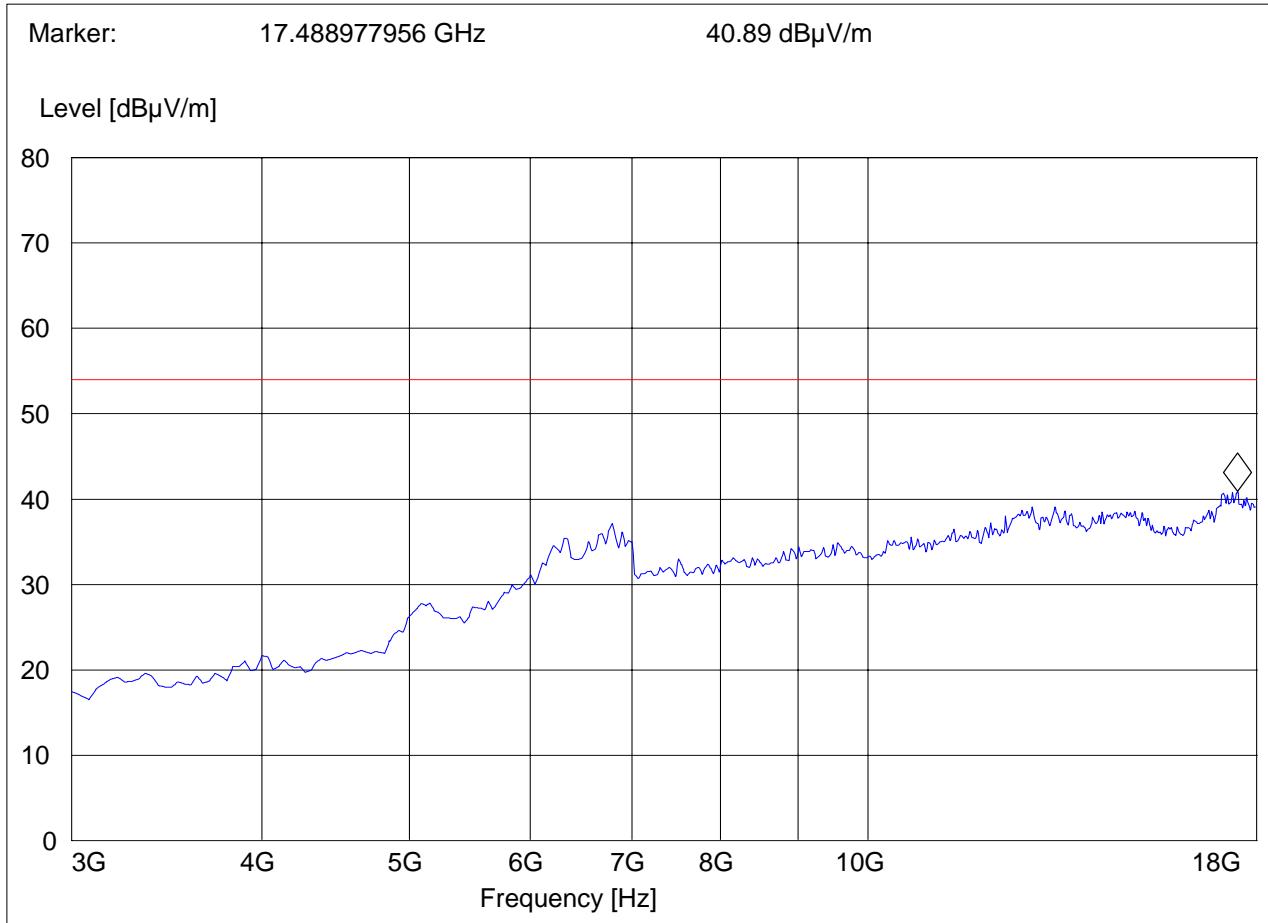

**RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 18GHz – 19.1GHz****Note: Peak Reading Vs. Average Limit.****CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA**


EUT: #18  
Customer: @Road  
Test Mode: GSM 1900, Idle Mode  
ANT Orientation: V  
EUT Orientation: H  
Test Engineer: Ed  
Power Supply:: 12V Battery  
Comments: 2 ferrites on data/pwr cables  
Comments:

***SWEEP TABLE: "CANADA RE\_18-26.5G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

Marker: 22.985971944 GHz 27.24 dB $\mu$ V/m

Level [dB $\mu$ V/m]

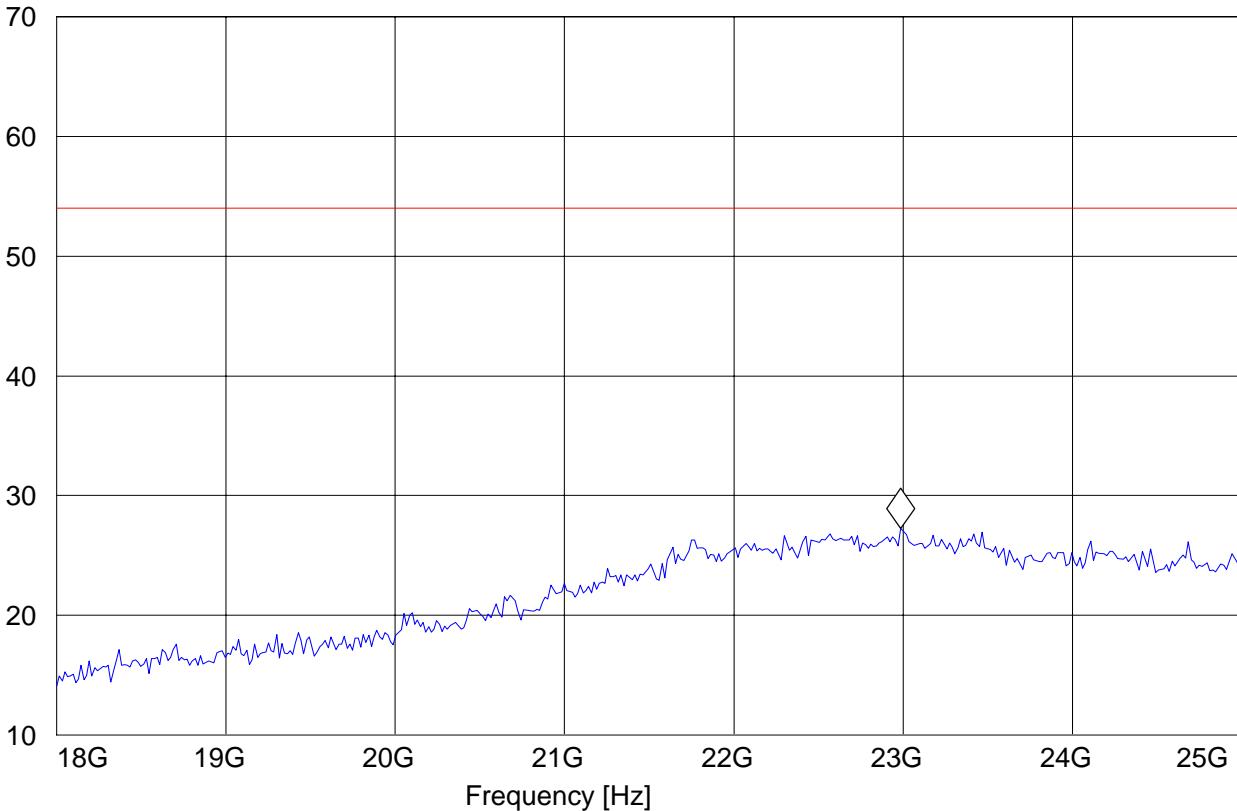

## **5 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
<b>01</b>	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2007	1 year
<b>02</b>	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2007	1 year
<b>03</b>	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2007	1 year
<b>04</b>	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2007	1 year
<b>05</b>	Biconilog Antenna	3141	EMCO	0005-1186	June 2007	1 year
<b>06</b>	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2007	1 year
<b>07</b>	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2007	1 year
<b>08</b>	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
<b>09</b>	Climatic Chamber	VT4004	Voltsch	G1115	May 2007	1 year
<b>10</b>	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
<b>11</b>	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
<b>12</b>	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2007	1 year
<b>13</b>	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2007	1 year
<b>14</b>	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2007	1 year
<b>15</b>	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2007	1 year
<b>16</b>	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2007	1 year
<b>17</b>	Loop Antenna	6512	EMCO	00049838	July 2007	2 years

## **6 References**

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,  
PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,  
PART 22 PUBLIC MOBILE SERVICES October 1, 1998.


FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,  
PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-C-2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.

## **7 BLOCK DIAGRAMS**

**Conducted Testing**

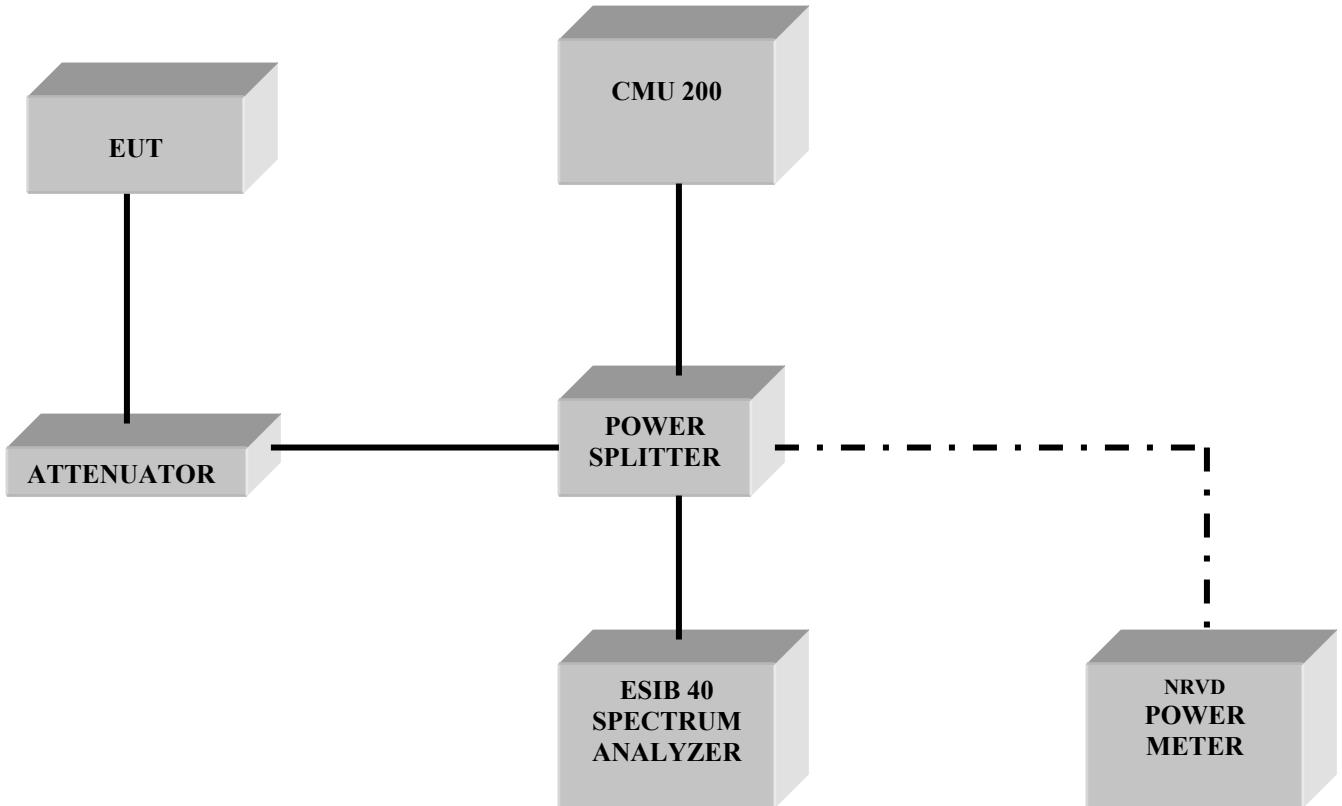

**Radiated Testing**

**ANECHOIC CHAMBER**

