

# **FCC Test Report**

Test report no.: EMC\_813FCC22-24\_2004

FCC Part 22, 24 / RSS 132, 133 Model: iWM3130

FCC ID: PDC-IWM313XSM IC ID: 5079A-IWM313XS







Bluetooth Qualification Test Facility (BQTF)



FCC listed # 101450

IC recognized # 3925

#### CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • http://www.cetecom.com

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May



Test report no.: EMC 815FCC22-24 2004 Issue date: 2004-12-03 Page 2 (49)

## **Table of Contents**

| 4 | $\sim$  |        | 4 •    |
|---|---------|--------|--------|
|   | General | intorm | nation |
|   |         |        |        |

- 1.1 Notes
- 1.2 Testing laboratory
- 1.3 Details of applicant
- 1.4 Application details
- 1.5 Test item
- 1.6 Test standards
- 2 Technical test
- 2.1 Summary of test results
- 2.2 Test report
- 1 General information
- 1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc.

# TEST REPORT PREPARED BY: EMC Engineer: Harpreet Sidhu

# 1.2 Testing laboratory

CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: lothar.schmidt@cetecomusa.com

Internet: www.cetecom.com



## 1.3 Details of applicant

Name : At Road, Inc.

Street : 47200 Bayside Pkwy City / Zip Code : Fremont, CA 94538

Country : USA

 Contact
 :
 Hung Phan

 Telephone
 :
 510 870 1252

 Tele-fax
 :
 510 870 1281

e-mail : <u>hphan@road-inc.com</u>

1.4 Application details

Date of receipt test item : 2004-11-01 Date of test : 2004-11-01/02

1.5 Test item

Manufacturer : Applicant
Marketing Name : iWM313X
Model No. : iWM3130

Description : GSM 850/1900 & 802.11b WLAN model for vehicular use

FCC-ID : PDC-IWM313XSM IC-ID : 5079A-IWM313XS

Additional information

Frequency : 824.2MHz – 848.8MHz for GSM 850,

1850.2MHz – 1909.8MHz for PCS 1900

Type of modulation : GMSK

Number of channels : 124 for GSM-850, 299 for PCS-1900

Antenna : External

Power supply : 12VDC Nominal voltage (10-24VDC)

Output power : 24.67dBm (293.09mW) max. ERP measured in GSM-850

26.14dBm (411.15mW) max. EIRP measured in PCS-1900

Extreme temp. Tolerance : Lower: -20°C Upper: +60°C

#### 1.6 Test standards

FCC Part 22,24 / RSS132,133 r1

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

The EUT (iWM3130) carries pre-certified Siemens GSM module model# MC46 with FCC ID: OIPMC46

This test report covers full radiated testing as per FCC 22/24 on EUT with GSM module. All conducted measurements for GSM 1900 are covered under test report# 2-205420436/02 and for GSM850 are covered under test report# 2 3350-01-01/03.



| T 4 FRAC 01/FC/C03 34 3004            | T 1 4 2004 12 02       | D 4 (40)     |  |
|---------------------------------------|------------------------|--------------|--|
| Test report no.: EMC 815FCC22-24 2004 | Issue date: 2004-12-03 | Page 4 (49)  |  |
|                                       | 133uc uatc. 2007-12-03 | 1 426 7 (77) |  |
|                                       |                        |              |  |

# 2 Technical test

# 2.1 Summary of test results

| No deviations from the technical specification(s) were ascertained in the course of the tests  Performed |        |  |
|--|--------|--|
| Final Verdict: (only "passed" if all single measurements are "passed")                                   | Passed |  |

Technical responsibility for area of testing:

| 2004-12-03 | EMC & Radio | Lothar Schmidt<br>(Technical Manager) | ldunida   |
|------------|-------------|---------------------------------------|-----------|
| Date       | Section     | Name                                  | Signature |

Responsible for test report and project leader:

| 2004-12-03 | EMC & Radio | Harpreet Sidhu (EMC Engineer) | \         |
|------------|-------------|-------------------------------|-----------|
| Date       | Section     | Name                          | Signature |



2.2 Test report

**TEST REPORT** 

Test report no.: EMC\_815FCC22-24\_2004

Model: iWM3130



# TEST REPORT REFERENCE

| PARAMETER TO BE MEASURED      | PARAGRAPH                 | PAGE |
|-------------------------------|---------------------------|------|
| POWER OUTPUT                  | §22.913(a) / § 24.232 (b) | 7    |
| EMISSION LIMITS TRANSMITTER   | §2.1051 / §24.238         | 16   |
| RECEIVER RADIATED EMISSIONS   | §2.1053 / RSS-133         | 42   |
| CONDUCTED EMISSIONS           | §15.107/207               | 47   |
| TEST EQUIPMENT AND ANCILLARIE | ES USED FOR TESTS         | 48   |
| BLOCK DIAGRAMS                |                           | 49   |



#### **POWER OUTPUT**

§ 22.913(a) / § 24.232 (b)

#### **Summary:**

During the process of testing, the EUT was controlled via Rhode & Schwarz Universal Radio Communication tester (CMU 200) to ensure max. Power transmission and proper modulation.

This paragraph contains average output power, peak output power, EIRP & ERP measurements for the EUT. In all cases, the peak output power is within the specified limits.

#### **Method of Measurements:**

The EUT was set up for the max. Output power with pseudo random data modulation.

The power was measured with R&S Spectrum Analyzer ESIB 40 (peak)

These measurements were done at 3 frequencies,

824.2 MHz, 836.6 MHz and 848.8 MHz (bottom, middle and top of operational frequency range) for GSM-850 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range) for PCS-1900



ERP (GSM-850) §22.913(a)

## Limits:

| Power Control Level | Burst Peak ERP |
|---------------------|----------------|
| 5                   | ≤38.45dBm (7W) |

## EIRP


| Frequency               | Power Control Level | Burst Peak |       |  |
|-------------------------|---------------------|------------|-------|--|
| (MHz)                   |                     | (dBm)      |       |  |
|                         |                     | EIRP ERP   |       |  |
| 824.2                   | 5                   | 26.01      | 23.87 |  |
| 836.6                   | 5                   | 26.57      | 24.43 |  |
| 848.8                   | 5                   | 26.81      | 24.67 |  |
| Measurement uncertainty | ±0.5 dB             |            |       |  |

ANALYZER SETTINGS: RBW = VBW = 3MHz




§22.913(a)

EIRP (GSM-850) CHANNEL 128

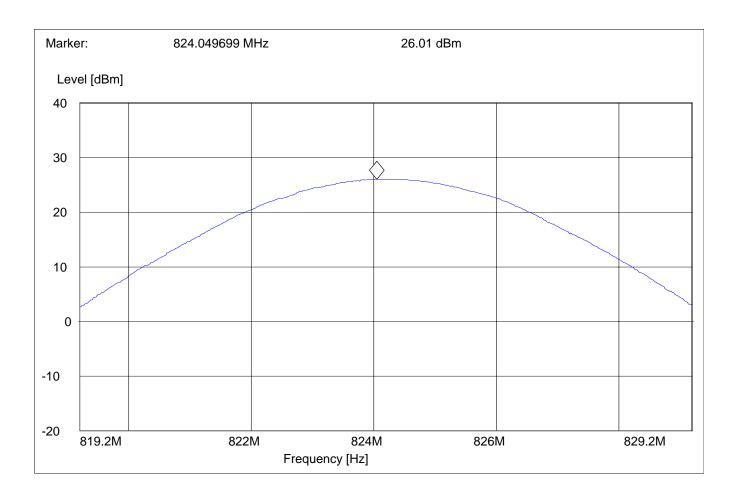



EIRP (GSM-850) CHANNEL 190 §22.913(a)

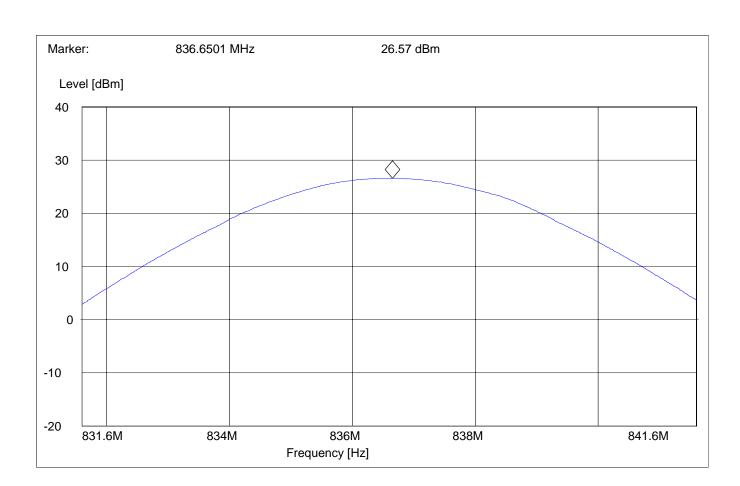




EIRP (GSM-850)

§22.913(a)

**CHANNEL 251** 

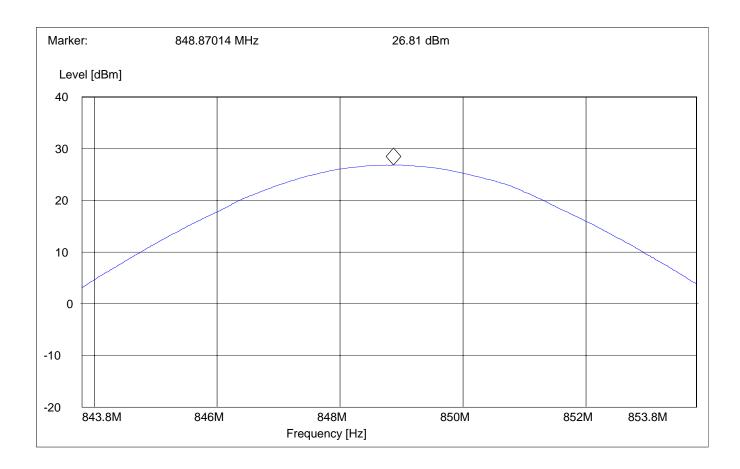



EIRP (PCS-1900) §24.232(b)

## Limits:

| Power Control Level | Burst Peak EIRP |
|---------------------|-----------------|
| 0                   | ≤33dBm (1W)     |


## EIRP

| Frequency               | Power Control Level | Burst Peak |  |
|-------------------------|---------------------|------------|--|
| (MHz)                   |                     | (dBm)      |  |
|                         |                     | EIRP       |  |
| 1850.2                  | 0                   | 24.01      |  |
| 1880.0                  | 0                   | 26.14      |  |
| 1909.8                  | 0                   | 24.31      |  |
| Measurement uncertainty | ±0.5 dB             |            |  |

ANALYZER SETTINGS: RBW = VBW = 3MHz



EIRP (PCS-1900) CHANNEL 512 §24.232(b)

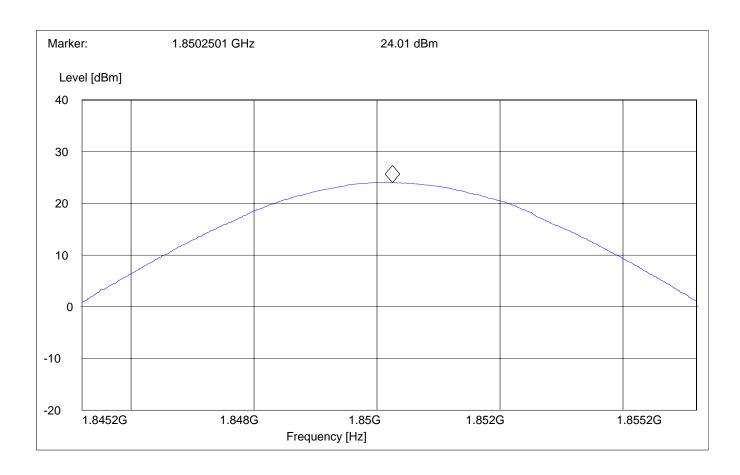




EIRP (PCS-1900)


§24.232(b)

**CHANNEL 661** 

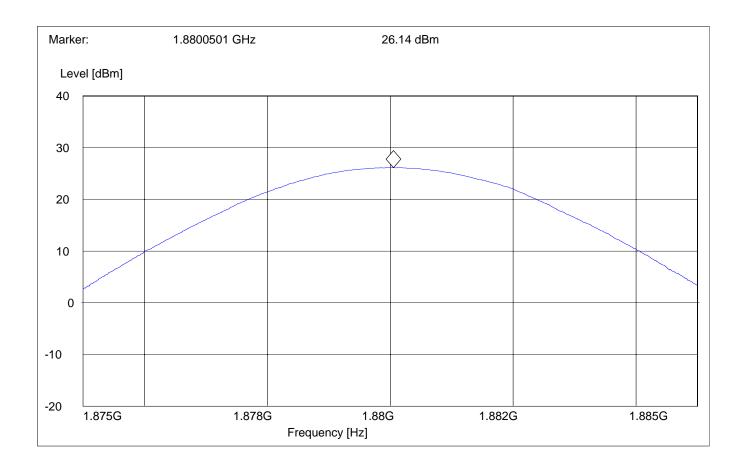



EIRP (PCS-1900) CHANNEL 810 §24.232(b)

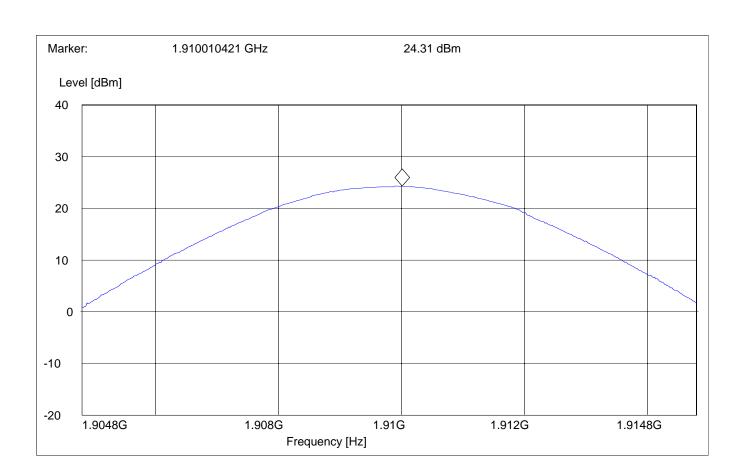



#### **EMISSION LIMITS TRANSMITTER**

§2.1051 / §24.238

#### **Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the EUT. The site is constructed in accordance with ANSI C63.4 – 2003 requirements and is recognised by the FCC. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8MHz for GSM-850 & 1910 MHz for PCS-1900 The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the GSM-850 & PCS-1900 bands.

#### The final Radiated emission test procedure is as follows:

- a) The test item was placed on a 0. 8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50-ohm load.
- c) A double-ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was determined by the substitution method described for ERP measurements.

#### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### **Measurement Results:**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.



# **RESULTS OF RADIATED TESTS GSM-850:**

| Harmonics | Tx ch-128<br>Freq. (MHz) | Level (dBm) | Tx ch-190<br>Freq. (MHz) | Level (dBm) | Tx ch-251<br>Freq. (MHz) | Level (dBm) |
|-----------|--------------------------|-------------|--------------------------|-------------|--------------------------|-------------|
| 2         | 1648.4                   | -26.50      | 1673.2                   | -23.43      | 1697.6                   | -21.13      |
| 3         | 2472.6                   | -38.30      | 2509.8                   | -33.55      | 2546.4                   | -29.44      |
| 4         | 3296.8                   | -31.84      | 3346.4                   | -22.46      | 3395.2                   | -22.73      |
| 5         | 4121                     | -24.42      | 4183                     | -15.21      | 4244                     | -17.79      |
| 6         | 4945.2                   | -23.92      | 5019.6                   | -21.71      | 5092.8                   | -35.79      |
| 7         | 5769.4                   | -27.78      | 5856.2                   | -26.72      | 5941.6                   | -21.81      |
| 8         | 6593.6                   | -42.34      | 6692.8                   | -38.77      | 6790.4                   | -37.55      |
| 9         | 7417.8                   | -30.42      | 7529.4                   | -29.11      | 7639.2                   | -28.35      |
| 10        | 8242                     | -24.39      | 8366                     | -27.58      | 8488                     | -17.83      |



## **RADIATED SPURIOUS EMISSIONS (GSM-850)**

**30MHz - 1GHz** 

Spurious emission limit -13dBm

**Antenna: vertical** 

SWEEP TABLE: "FCC 22 Spur 30M-1G"

Start Stop Detector Meas. RBW/VBW


Frequency Frequency Time

30MHz 1GHz Max Peak Coupled 1 MHz

#### Note:

1. The peak above the limit line is the carrier freq.

2. This plot is valid for low, mid & high channels (worst-case plot)

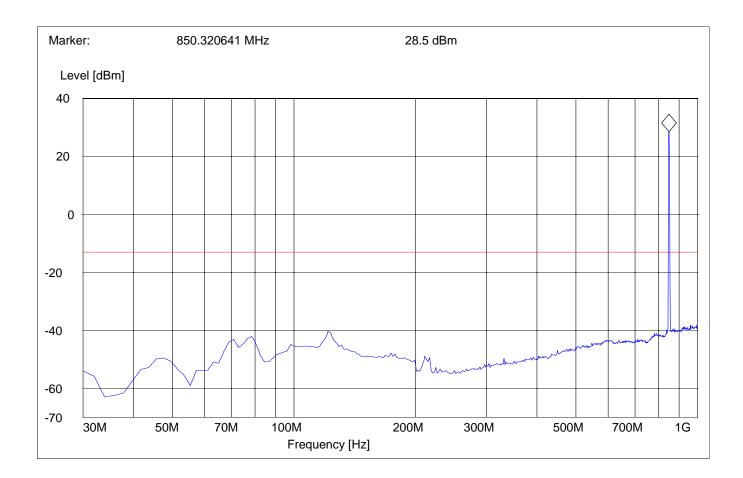



## **RADIATED SPURIOUS EMISSIONS (GSM-850)**

Tx @ 824.2MHz: 1GHz – 1.58GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 1.58GHz Max Peak Coupled 1 MHz

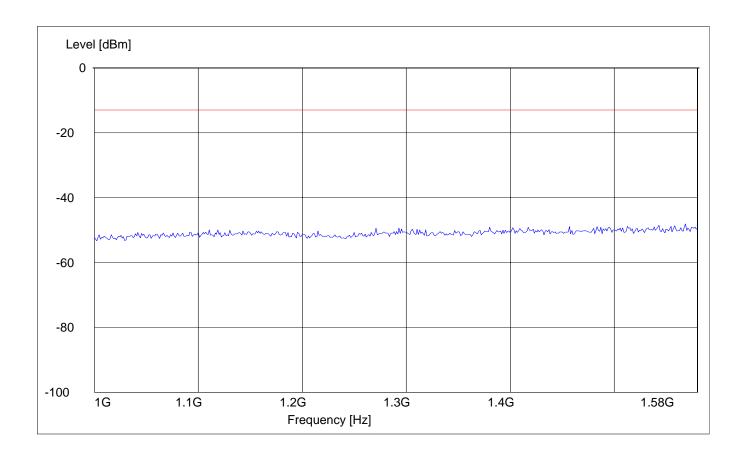



## **RADIATED SPURIOUS EMISSIONS (GSM-850)**

Tx @ 824.2MHz: 1.58GHz – 3GHz


Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1.58GHz 3GHz Max Peak Coupled 1 MHz

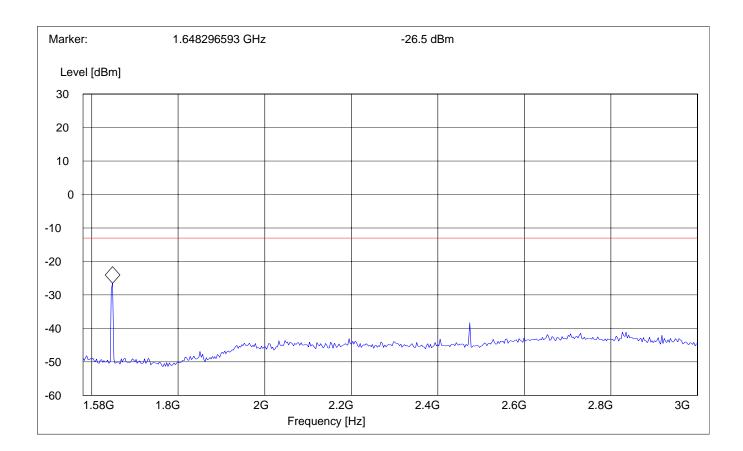



## **RADIATED SPURIOUS EMISSIONS (GSM-850)**

Tx @ 824.2MHz: 3GHz – 9GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 3-9G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

3GHz 9GHz Max Peak Coupled 1 MHz

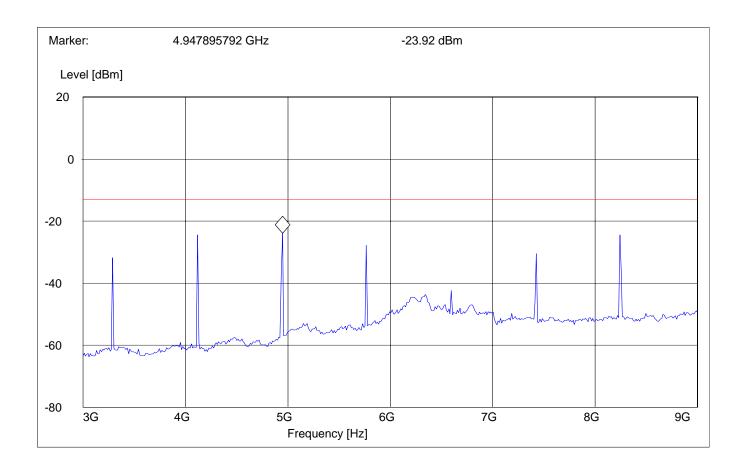



## **RADIATED SPURIOUS EMISSIONS (GSM-850)**

Tx @ 836.6MHz: 1GHz – 1.58GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 1.58GHz Max Peak Coupled 1 MHz

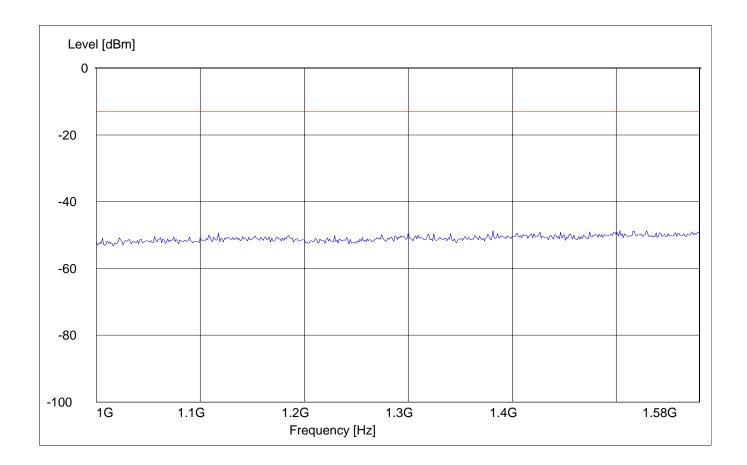



## **RADIATED SPURIOUS EMISSIONS (GSM-850)**

Tx @ 836.6MHz: 1.58GHz – 3GHz


Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1.58GHz 3GHz Max Peak Coupled 1 MHz

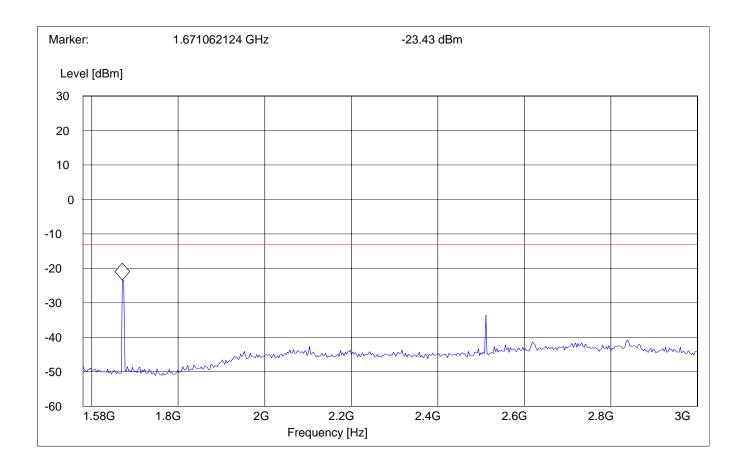



## **RADIATED SPURIOUS EMISSIONS (GSM-850)**

Tx @ 836.6MHz: 3GHz – 9GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 3-9G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

3GHz 9GHz Max Peak Coupled 1 MHz

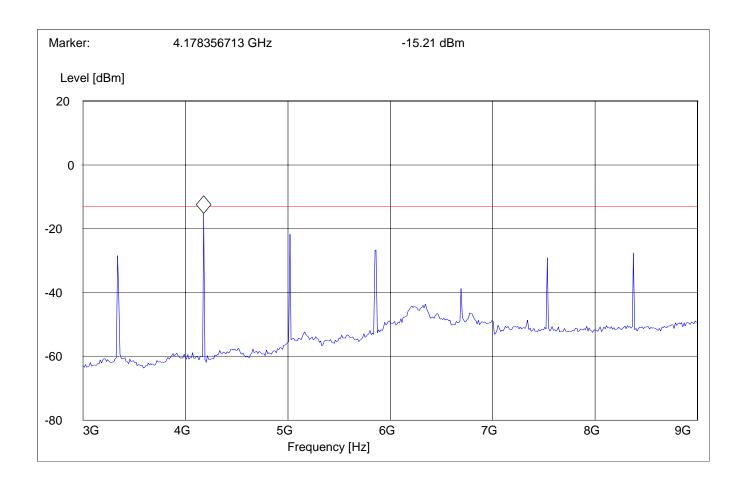



## **RADIATED SPURIOUS EMISSIONS (GSM-850)**

Tx @ 848.8MHz: 1GHz – 1.58GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 1-1.58G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 1.58GHz Max Peak Coupled 1 MHz

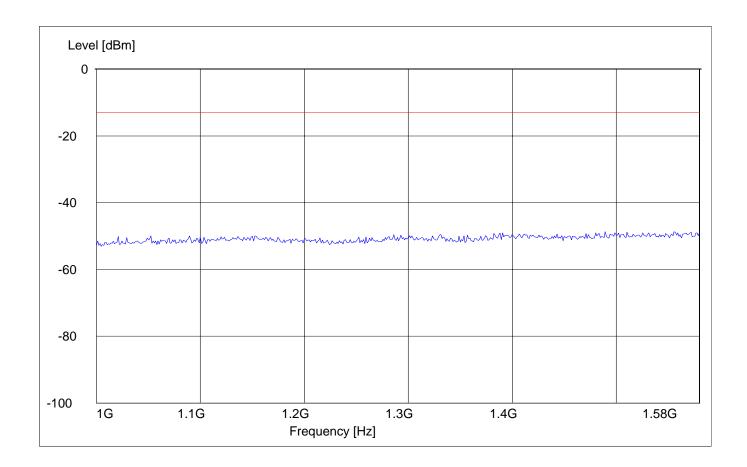



## **RADIATED SPURIOUS EMISSIONS (GSM-850)**

Tx @ 848.8MHz: 1.58GHz – 3GHz


Spurious emission limit –13dBm

SWEEP TABLE: "FCC 22 Spur 1.58-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1.58GHz 3GHz Max Peak Coupled 1 MHz

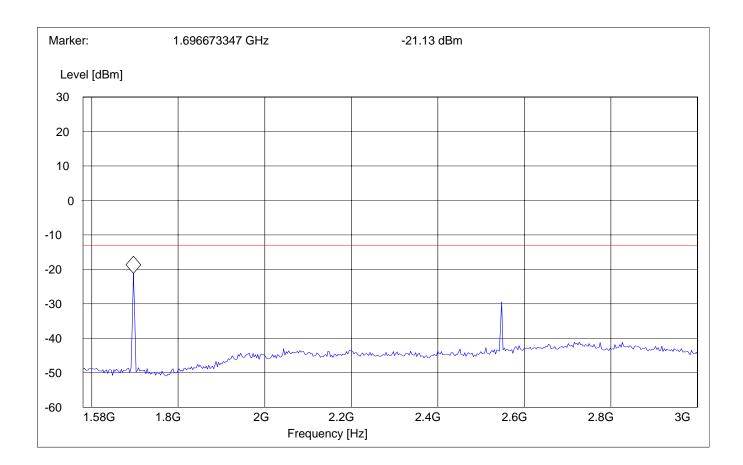



## **RADIATED SPURIOUS EMISSIONS (GSM-850)**

Tx @ 848.8MHz: 3GHz – 9GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 22 Spur 3-9G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

3GHz 9GHz Max Peak Coupled 1 MHz

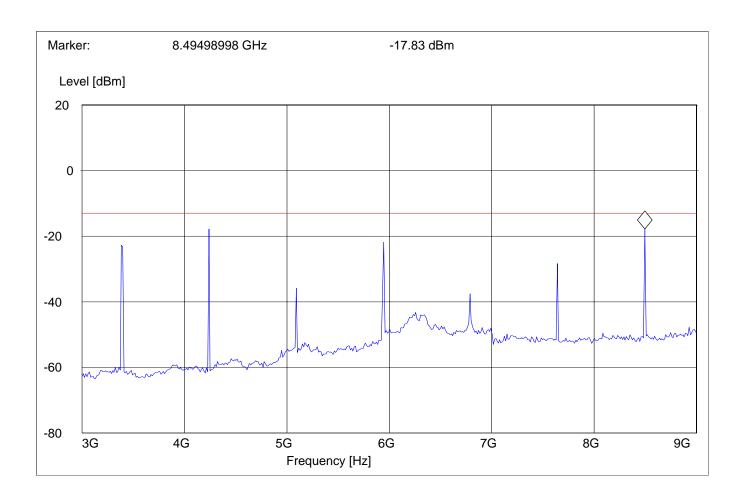



# **RESULTS OF RADIATED TESTS PCS-1900:**

nf=noise floor

| Harmonic | Tx ch-512<br>Freq.(MHz) | Level<br>(dBm) | Tx ch-661<br>Freq. (MHz) | Level (dBm) | Tx ch-810<br>Freq. (MHz) | Level (dBm) |
|----------|-------------------------|----------------|--------------------------|-------------|--------------------------|-------------|
| 2        | 3700.4                  | -19.60         | 3760                     | -15.76      | 3819.6                   | -19.73      |
| 3        | 5550.6                  | -21.25         | 5640                     | -14.70      | 5729.4                   | -13.84      |
| 4        | 7400.8                  | -23.59         | 7520                     | -15.22      | 7639.2                   | -20.91      |
| 5        | 9251                    | -22.59         | 9400                     | -17.82      | 9549                     | -26.45      |
| 6        | 11101.2                 | -26.77         | 11280                    | -28.22      | 11458.8                  | -24.80      |
| 7        | 12951.4                 | -33.79         | 13160                    | -35.08      | 13368.6                  | -40.62      |
| 8        | 14801.6                 | -43.08         | 15040                    | -31.98      | 15278.4                  | -34.65      |
| 9        | 16651.8                 | -36.18         | 16920                    | nf          | 17188.2                  | nf          |
| 10       | 18502                   | nf             | 18800                    | nf          | 19098                    | nf          |



#### **RADIATED SPURIOUS EMISSIONS**

30MHz - 1GHz

Spurious emission limit -13dBm

**Antenna: vertical** 


SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

30MHz 1GHz Max Peak Coupled 1 MHz

Note: This plot is valid for low, mid & high channels (worst-case plot)

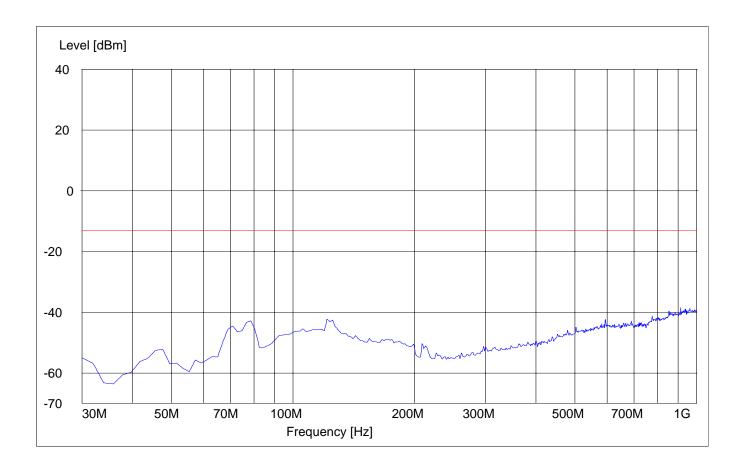



#### **RADIATED SPURIOUS EMISSIONS**

30MHz - 1GHz

Spurious emission limit –13dBm

Antenna: horizontal


SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

30MHz 1GHz Max Peak Coupled 1 MHz

Note: This plot is valid for low, mid & high channels (worst-case plot)

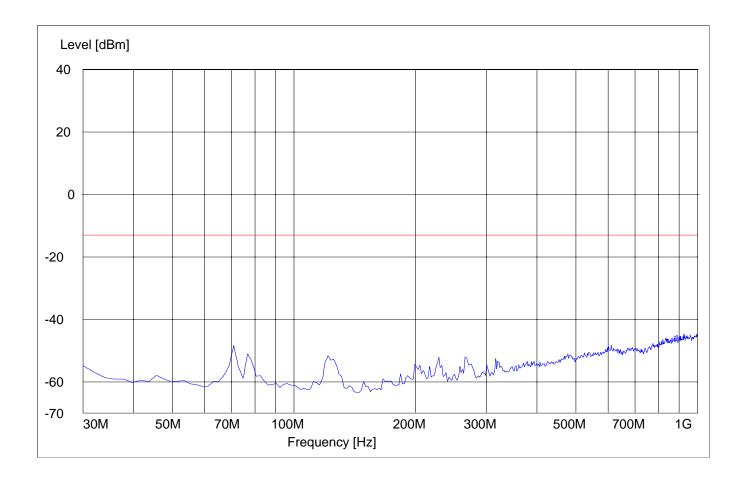



#### RADIATED SPURIOUS EMISSIONS

Tx @ 1850.2MHz: 1GHz – 3GHz

Spurious emission limit -13dBm


SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 3GHz Max Peak Coupled 1 MHz

Note: The peak above the limit line is the carrier freq. at ch-512.

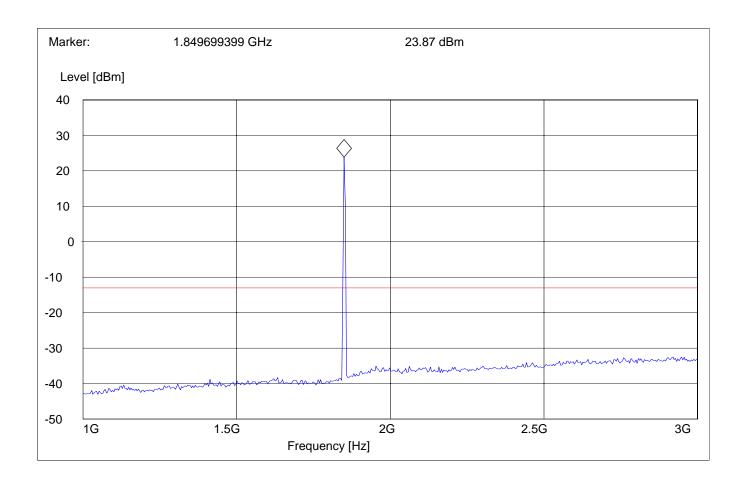



## RADIATED SPURIOUS EMISSIONS

Tx @ 1850.2MHz: 3GHz – 18GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

3GHz 18GHz Max Peak Coupled 1 MHz

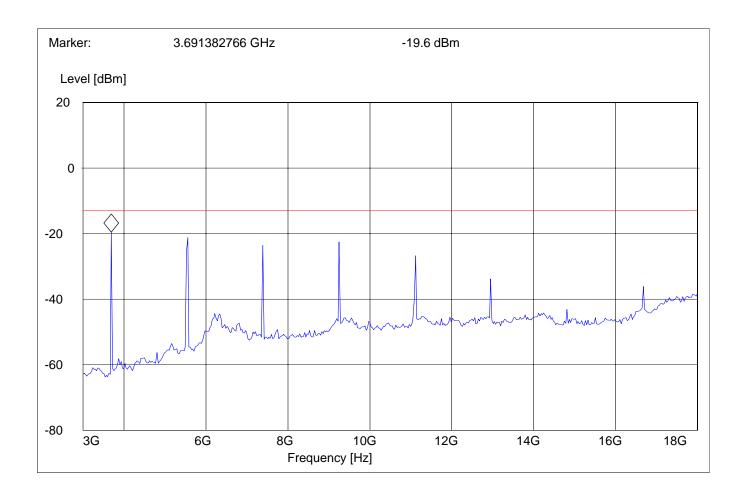



#### RADIATED SPURIOUS EMISSIONS

Tx @ 1880.0MHz: 1GHz – 3GHz

Spurious emission limit -13dBm


SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 3GHz Max Peak Coupled 1 MHz

Note: The peak above the limit line is the carrier freq. at ch-661.

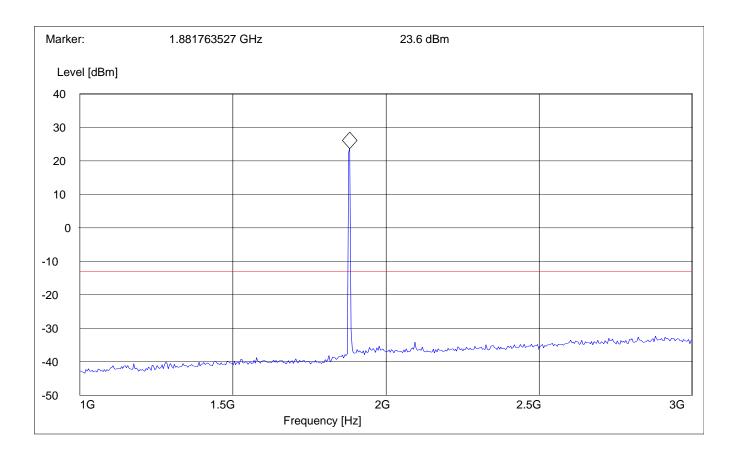



## RADIATED SPURIOUS EMISSIONS

Tx @ 1880.0MHz: 3GHz – 18GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

3GHz 18GHz Max Peak Coupled 1 MHz

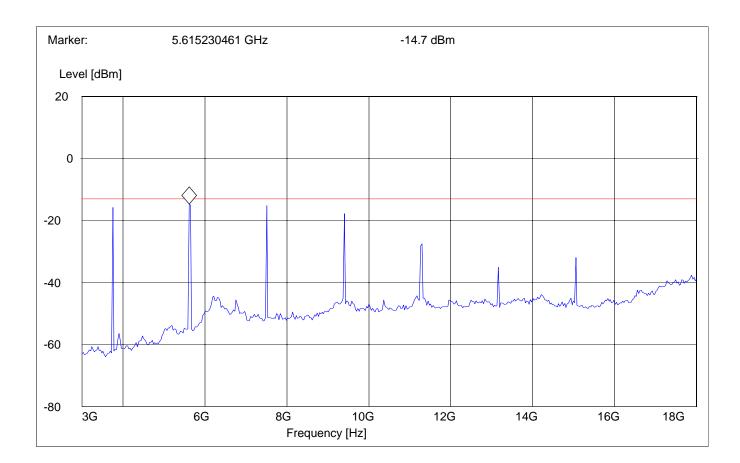



#### RADIATED SPURIOUS EMISSIONS

Tx @ 1909.8MHz: 1GHz – 3GHz

Spurious emission limit -13dBm


SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 3GHz Max Peak Coupled 1 MHz

Note: The peak above the limit line is the carrier freq. at ch-810.

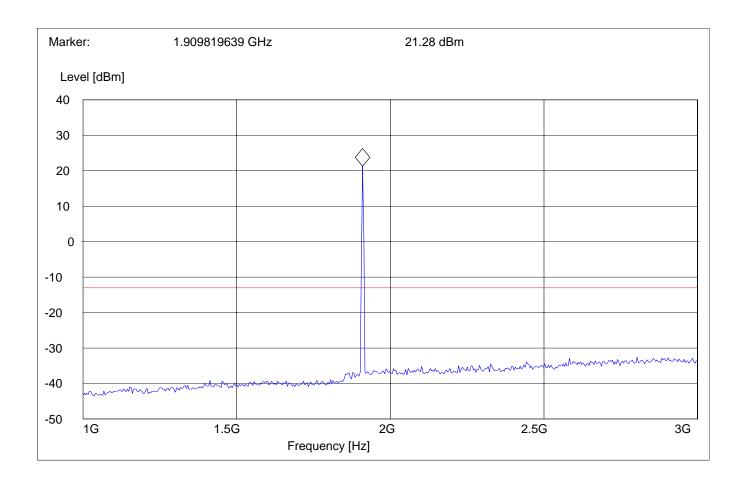



## RADIATED SPURIOUS EMISSIONS

Tx @ 1909.8MHz: 3GHz – 18GHz


Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

3GHz 18GHz Max Peak Coupled 1 MHz

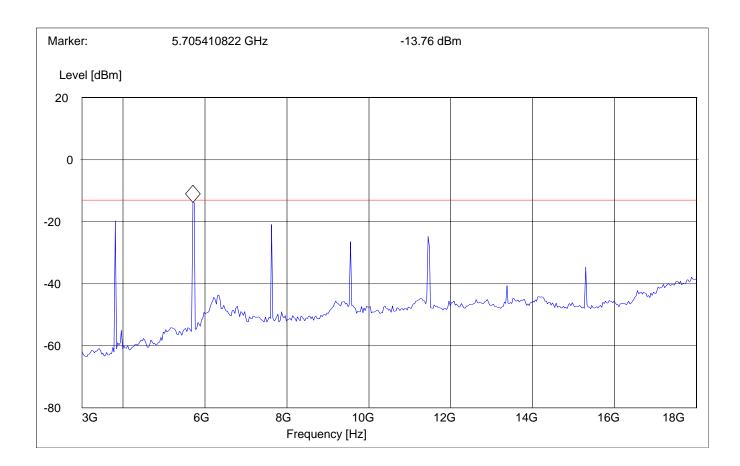



## RADIATED SPURIOUS EMISSIONS

18GHz – 19.1GHz

Spurious emission limit -13dBm


SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

18GHz 19.1GHz Max Peak Coupled 1 MHz

Note: This plot is valid for low, mid & high channels (worst-case plot)

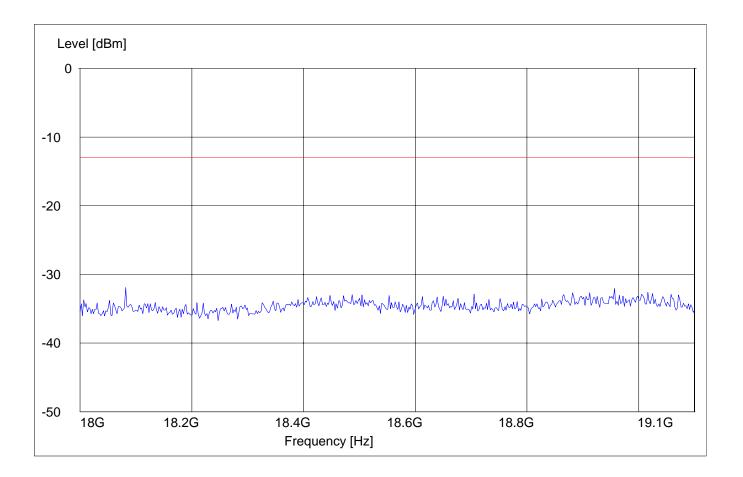



# RADIATED SPURIOUS EMISSIONS (IDLE MODE)

**EUT in Idle Mode: 30MHz – 1GHz** 

Spurious emission limit -13dBm


Note: This plot is valid for both polarities (worst-case plot)

SWEEP TABLE: "FCC 22 Spur 30M-1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

30MHz 1GHz Max Peak Coupled 1 MHz

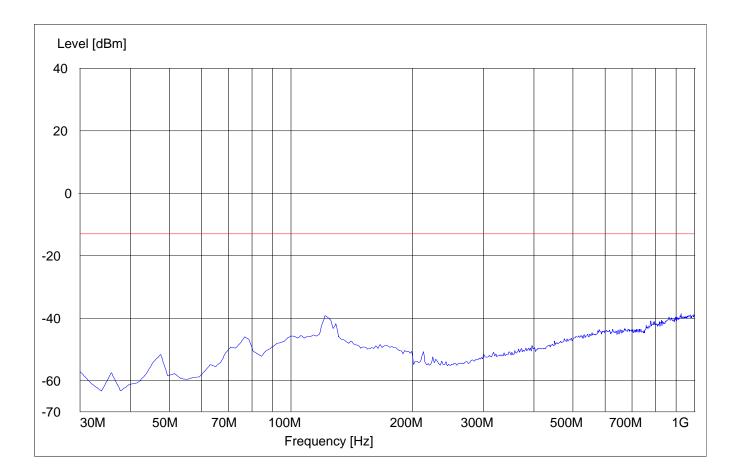



## RADIATED SPURIOUS EMISSIONS (IDLE MODE)

**EUT in Idle Mode: 1GHz – 3GHz** 


Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 3GHz Max Peak Coupled 1 MHz

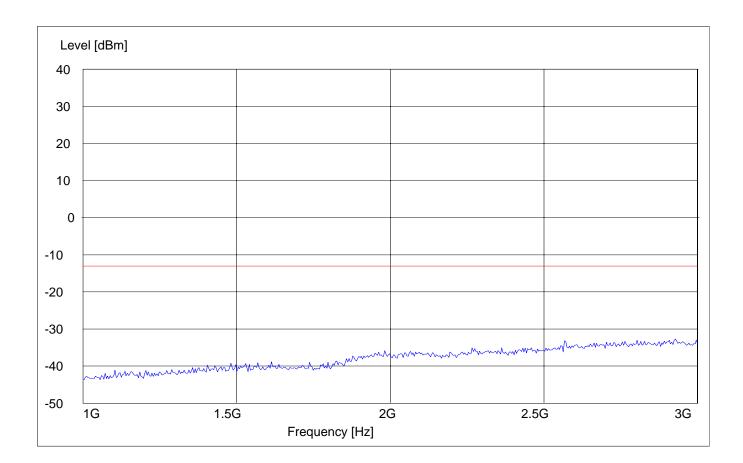



# RADIATED SPURIOUS EMISSIONS (IDLE MODE)

EUT in Idle Mode: 3GHz – 18GHz


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 24 spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

3GHz 18GHz Max Peak Coupled 1 MHz

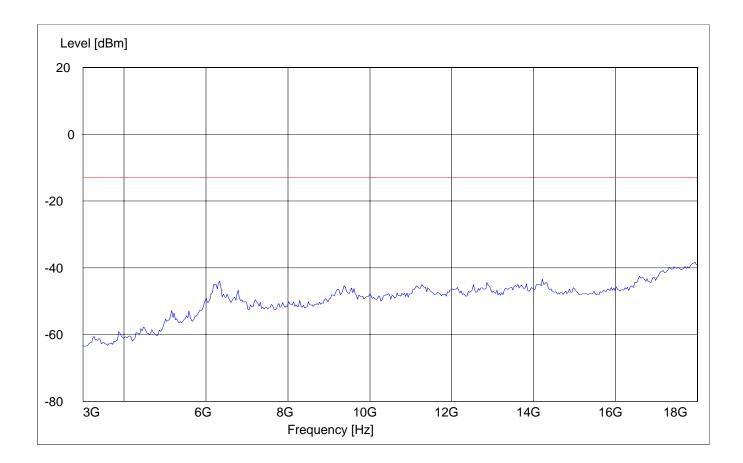



## RADIATED SPURIOUS EMISSIONS (IDLE MODE)

EUT in Idle Mode: 18GHz – 19.1GHz


Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

18GHz 19.1GHz Max Peak Coupled 1 MHz

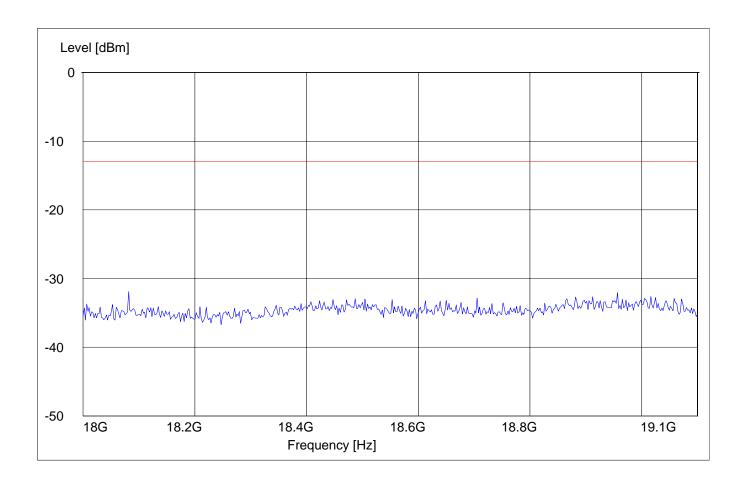



#### RECEIVER RADIATED EMISSIONS

§ 2.1053 / RSS-133

#### **NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

2. Receiver radiated emissions were done on both 850/1900 bands, but only worst-case plots are submitted in the test reports.

#### Limits

#### **SUBCLAUSE § RSS-133**

| Frequency (MHz) | Field strength (μV/m) | Measurement distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 - 0.490   | 2400/F (kHz)          | 300                      |
| 0.490 - 1.705   | 24000/F (kHz)         | 30                       |
| 1.705 - 30.0    | 30                    | 30                       |
| 30 - 88         | 100                   | 3                        |
| 88 - 216        | 150                   | 3                        |
| 216 - 960       | 200                   | 3                        |
| Above 960       | 500                   | 3                        |



## RECEIVER RADIATED EMISSIONS EUT in Idle Mode: 30MHz – 1GHz

**Antenna: vertical** 


SWEEP TABLE: "FCCSpur 30M-1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

30MHz 1GHz Max Peak Coupled 100KHz

Note: This plot is valid for both polarities (worst-case plot)

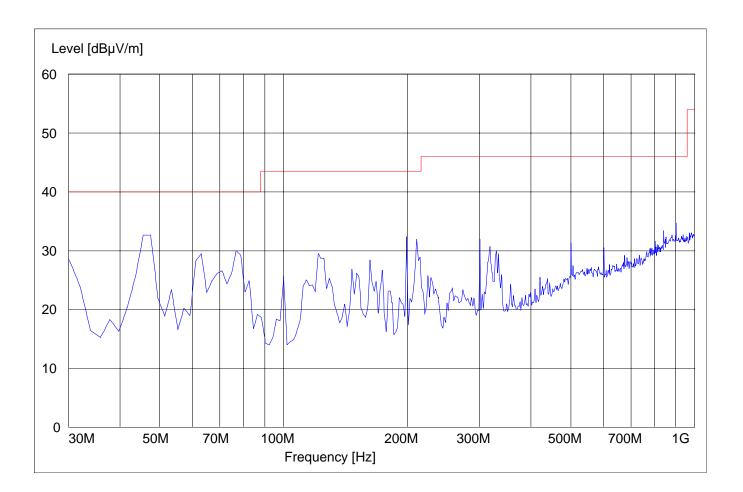



## RECEIVER RADIATED EMISSIONS EUT in Idle Mode: 1GHz – 3GHz


Note: marked peak is downlink from the base station

SWEEP TABLE: "FCC Spuri 1-3G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

1GHz 3GHz Max Peak Coupled 1 MHz

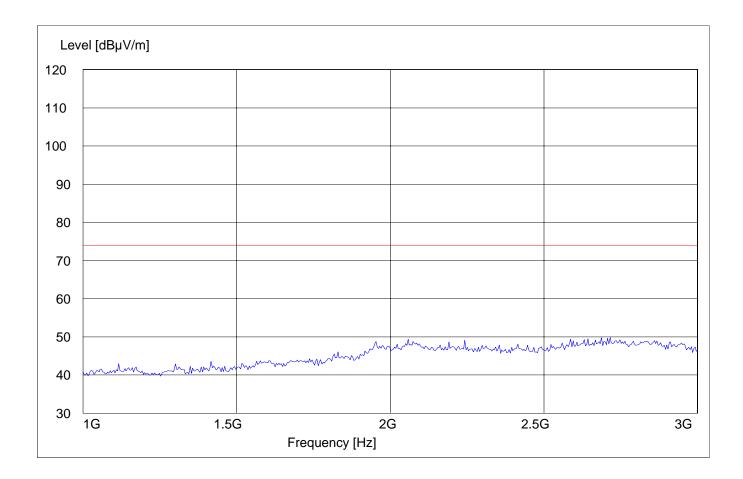




## RECEIVER RADIATED EMISSIONS EUT in Idle Mode: 3GHz – 18GHz

SWEEP TABLE: "FCC 24 spuri 3-18G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

3GHz 18GHz Max Peak Coupled 1 MHz

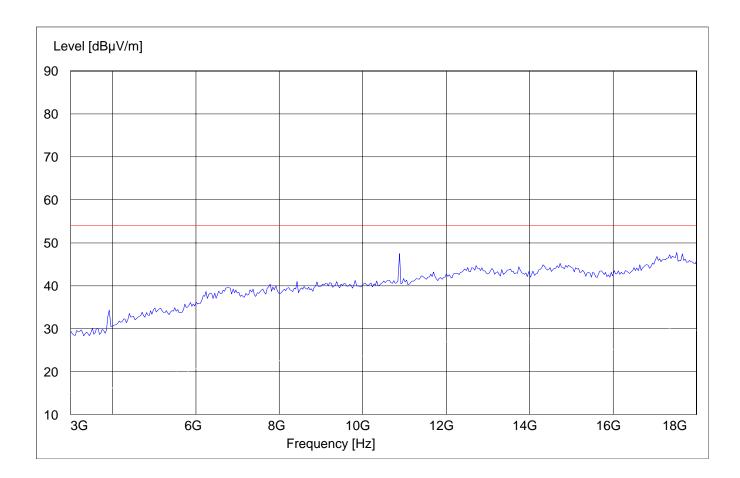



## RECEIVER RADIATED EMISSIONS EUT in Idle Mode: 18GHz – 19.1GHz

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start Stop Detector Meas. RBW/VBW

Frequency Frequency Time

18GHz 19.1GHz Max Peak Coupled 1 MHz

Level [dBµV/m] 60 50 why have a second 40 30 20 18G 19G 21G 20G 22G 23G 24G 25G 26.5G Frequency [Hz]



**CONDUCTED EMISSIONS** 

§ 15.107/207

This test is not applicable for the EUT



# TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

| No | Instrument/Ancillary         | Type         | Manufacturer    | Serial No.   |
|----|------------------------------|--------------|-----------------|--------------|
| 01 | Spectrum Analyzer            | ESIB 40      | Rohde & Schwarz | 100107       |
| 02 | Spectrum Analyzer            | FSEM 30      | Rohde & Schwarz | 826880/010   |
| 03 | Signal Generator             | SMY02        | Rohde & Schwarz | 836878/011   |
| 04 | Power-Meter                  | NRVD         | Rohde & Schwarz | 0857.8008.02 |
| 05 | Biconilog Antenna            | 3141         | EMCO            | 0005-1186    |
| 06 | Horn Antenna (1-18GHz)       | SAS-200/571  | AH Systems      | 325          |
| 07 | Horn Antenna (18-26.5GHz)    | 3160-09      | EMCO            | 1240         |
| 08 | Power Splitter               | 11667B       | Hewlett Packard | 645348       |
| 09 | Climatic Chamber             | VT4004       | Voltsch         | G1115        |
| 10 | High Pass Filter             | 5HC2700      | Trilithic Inc.  | 9926013      |
| 11 | High Pass Filter             | 4HC1600      | Trilithic Inc.  | 9922307      |
| 12 | Pre-Amplifier                | JS4-00102600 | Miteq           | 00616        |
| 13 | Power Sensor                 | URV5-Z2      | Rohde & Schwarz | DE30807      |
| 14 | Digital Radio Comm. Tester   | CMD-55       | Rohde & Schwarz | 847958/008   |
| 15 | Universal Radio Comm. Tester | CMU 200      | Rohde & Schwarz | 832221/06    |



# **BLOCK DIAGRAMS Radiated Testing**

#### ANECHOIC CHAMBER

