

03/20/02

TTI TECH CO., LTD. (Model GMRS-7000)

(Body position, low channel, 20.5 mm separation)

Frequency: 450 MHz; Crest factor: 1.0

Medium: Muscle 450 MHz: $\sigma = 0.93$ mho/m $\epsilon_r = 56.0$ $\rho = 1.00$ g/cm³


Generic Twin Phantom; Flat Section; Position: (270°,90°)

Probe: ET3DV6 - SN1577M; ConvF(8.00,8.00,8.00);

SAR:Cube 5x5x7: Peak: 2.89 mW/g, SAR (1g): 2.09 mW/g, SAR (10g): 1.53 mW/g, (Worst-case extrapolation)


Penetration depth: 16.8 (15.3, 18.5) [mm]; Powerdrift: -0.92 dB

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

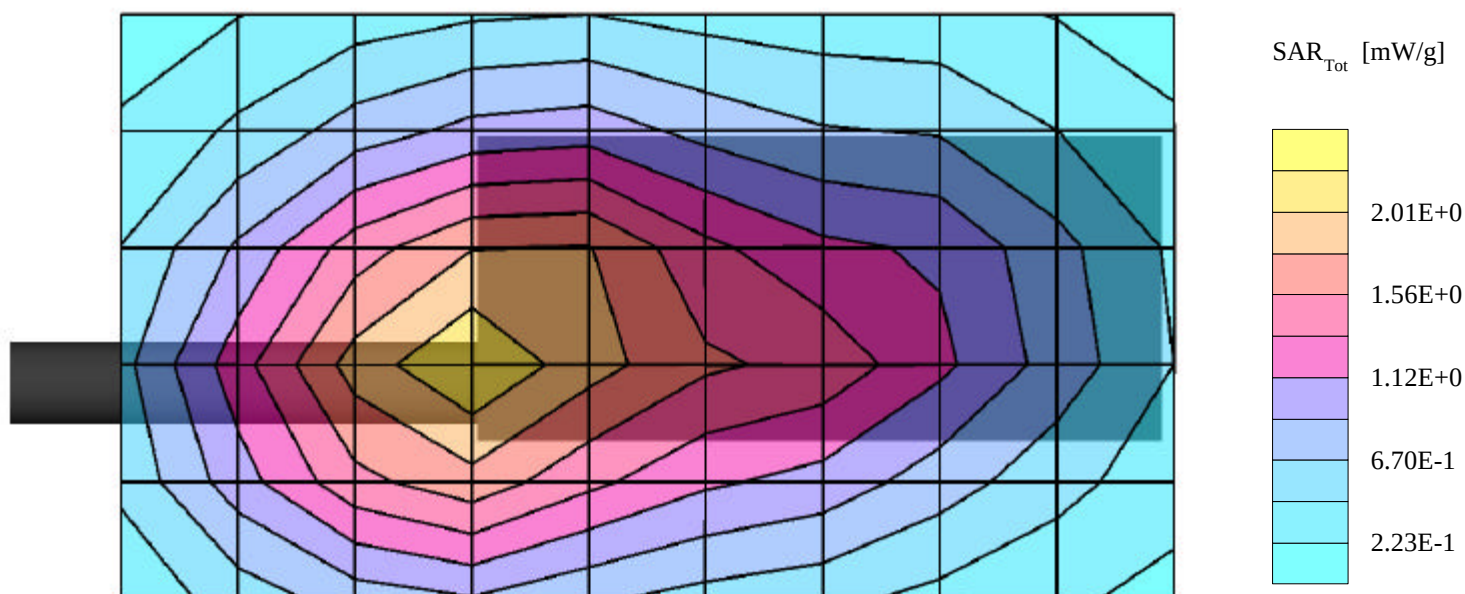

TTI TECH CO., LTD. (Model GMRS-7000)

(Body position, low channel, 20.5 mm separation)
Frequency: 450 MHz; Crest factor: 1.0
Medium: Muscle 450 MHz: $\sigma = 0.93 \text{ mho/m}$ $\epsilon_r = 56.0$ $\rho = 1.00 \text{ g/cm}^3$
Generic Twin Phantom; Section; Position:
Probe: ET3DV6 - SN1577M; ConvF(8.00,8.00,8.00);
SAR:: , , ()
Penetration depth: 17.0 (15.4, 18.6) [mm];
Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 2.0

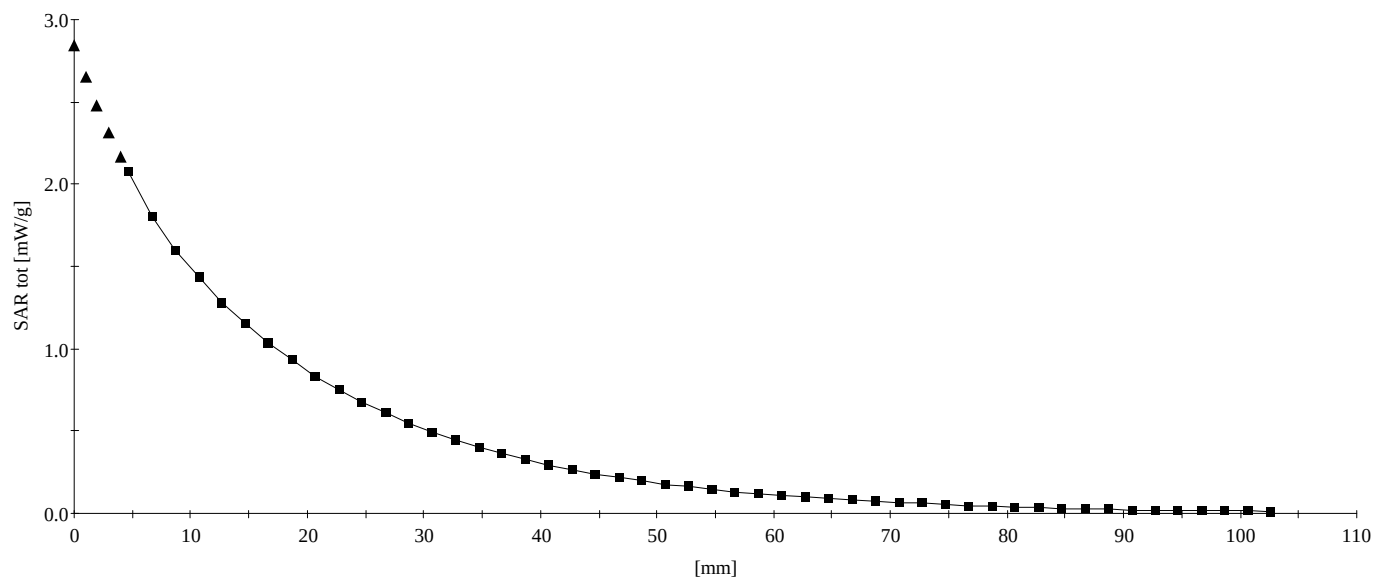

03/20/02

TTI TECH CO., LTD. (Model GMRS-7000)

(Body position, high channel, 20.5 mm separation)

Frequency: 450 MHz; Crest factor: 1.0

Medium: Muscle 450 MHz: $\sigma = 0.93$ mho/m $\epsilon_r = 56.0$ $\rho = 1.00$ g/cm³


Generic Twin Phantom; Flat Section; Position: (270°,90°)

Probe: ET3DV6 - SN1577M; ConvF(8.00,8.00,8.00);

SAR:Cube 5x5x7: Peak: 2.11 mW/g, SAR (1g): 1.53 mW/g, SAR (10g): 1.11 mW/g, (Worst-case extrapolation)

Penetration depth: 16.7 (15.2, 18.2) [mm]; Powerdrift: -0.26 dB

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

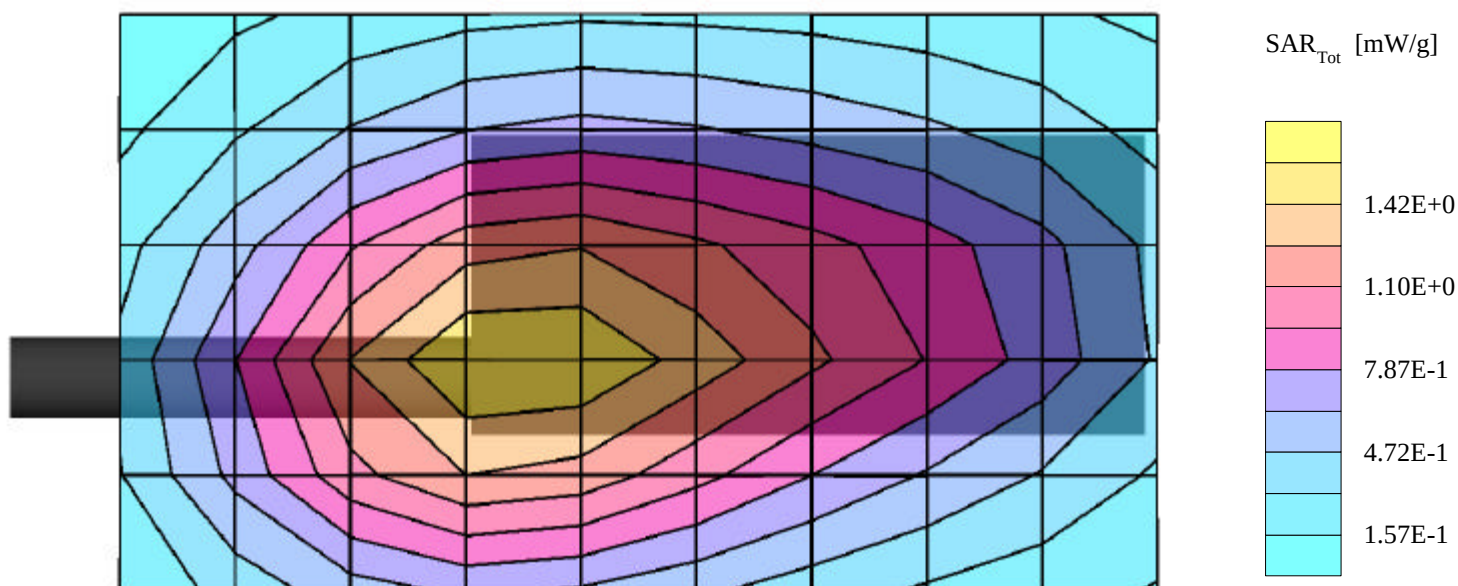

TTI TECH CO., LTD. (Model GMRS-7000)

(Body position, high channel, 20.5 mm separation)
Frequency: 450 MHz; Crest factor: 1.0
Medium: Muscle 450 MHz: $\sigma = 0.93 \text{ mho/m}$ $\epsilon_r = 56.0$ $\rho = 1.00 \text{ g/cm}^3$
Generic Twin Phantom; Section; Position:
Probe: ET3DV6 - SN1577M; ConvF(8.00,8.00,8.00);
SAR:: , , ()
Penetration depth: 16.6 (15.3, 17.9) [mm];
Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 2.0

