



# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

**Test Report No.**

: E052R-042

**Applicant**

: ATEC CO., LTD.

**Address**

: #1451-78, Seocho-Dong, Seocho-Gu, Seoul, 137-867, Korea

**Manufacturer**

: ATEC CO., LTD.

**Address**

: #1451-78, Seocho-Dong, Seocho-Gu, Seoul, 137-867, Korea

**Type of Equipment**

: 20.1" LCD TV

**FCC ID**

: PDLAV201

**Model Name**

: AV201

**Serial number**

: N/A

**Total page of Report**

: 13 pages (including this page)

**Date of Incoming**

: January 18, 2005

**Date of Issuing**

: February 17, 2005

## SUMMARY

The equipment complies with the regulation; **FCC CRF 47 PART 15, SUBPART C, SECTION 15.239**.

This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production

**Prepared by:**

Seung-Hyun, Nam / Project Engineer  
EMC Div.  
ONETECH Corp.

**Reviewed by:**

Gea-Won, Lee / Chief Engineer  
EMC Div.  
ONETECH Corp.



## CONTENTS

	Page
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>3</b>
<b>2. GENERAL INFORMATION.....</b>	<b>4</b>
<b>2.1 PRODUCT DESCRIPTION.....</b>	<b>4</b>
<b>2.2 MODEL DIFFERENCES.....</b>	<b>4</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>4</b>
<b>2.4 TEST SYSTEM DETAILS .....</b>	<b>4</b>
<b>2.5 TEST METHODOLOGY .....</b>	<b>5</b>
<b>2.6 TEST FACILITY .....</b>	<b>5</b>
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
<b>3.1 JUSTIFICATION .....</b>	<b>6</b>
<b>3.2 EUT EXERCISE SOFTWARE.....</b>	<b>6</b>
<b>3.3 CABLE DESCRIPTION .....</b>	<b>7</b>
<b>3.4 NOISE SUPPRESSION PARTS ON CABLE .....</b>	<b>7</b>
<b>3.5 EQUIPMENT MODIFICATIONS .....</b>	<b>7</b>
<b>3.6 CONFIGURATION OF TEST SYSTEM .....</b>	<b>8</b>
<b>4. PRELIMINARY TEST .....</b>	<b>8</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>8</b>
<b>4.2 RADIATED EMISSION TEST .....</b>	<b>8</b>
<b>5. FINAL RESULT OF MEASUREMENT .....</b>	<b>9</b>
<b>5.1 CONDUCTED EMISSION TEST .....</b>	<b>9</b>
<b>5.2 RADIATED EMISSION TEST .....</b>	<b>11</b>
<b>6. FIELD STRENGTH CALCULATION .....</b>	<b>12</b>
<b>7. LIST OF TEST EQUIPMENT .....</b>	<b>13</b>

**1. VERIFICATION OF COMPLIANCE**

APPLICANT : ATEC CO., LTD.  
ADDRESS : #1451-78, Seocho-Dong, Seocho-Gu, Seoul, 137-867, Korea  
CONTACT PERSON : Mr. Dong-Suk, Cha / Research Engineer  
TELEPHONE NO : +82-2-2190-5152  
FCC ID : PDLAV201  
MODEL NO/NAME : AV201  
SERIAL NUMBER : N/A  
DATE : February 17, 2005

DEVICE TYPE	Peripheral Device for Class B Computing Device
E.U.T. DESCRIPTION	20.1" LCD TV
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	PART 15 SUBPART B, SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	Yes
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



## 2. GENERAL INFORMATION

### 2.1 Product Description

The ATEC CO., LTD., Model AV201 (referred to as the EUT in this report) is a 20.1" LCD TV. The verification report for the TV tuner in the EUT shall be issued with another test report number. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	12.000 MHz, 24.576 MHz, 27.000 MHz, 6.000 MHz and 18.432 MHz on the Main Board
NUMBER OF LAYERS	2 Layers : Main Board, Inverter Board, OSD Board
ELECTRICAL RATING	Input : AC100-240V, 50/60Hz, 1.5A, Output : DC 15V, 4.67A, Max.70W
EXTERNAL TERMINALS	RGB, Audio In/Out, Component, A/V IN, DC In, ANT

### 2.2 Model Differences

The difference(s) compared to the EUT is as follows: None

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
AV201	ATEC CO., LTD.	BRFLTD104DD	20.1" LCD TV (EUT)	Notebook PC
LSE0219B1570	Li Shin International Enterprise	N/A	AC/DC Adaptor	EUT
PP05LC	Dell Computer Corp	Doc	Notebook PC	-
GHV-S9990	GoldStar	N/A	VCR	EUT
2225C	HP	DSI6XU2225	Printer	Notebook PC
020-0470	Cardinal	GDE0196	Modem	Notebook PC
HM-700V	ROCKY	N/A	Head-Microphone Set	EUT
DVD2000	TAEYOUNG TELSTAR	N/A	DVD	EUT
LT416	LEADER	N/A	Pattern Generator	EUT



## 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

## 2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-City, Kyunggi-Do, 464-080, Korea. Description details of test facilities were submitted to the Commission on April 04, 2003. (Registration Number: 340658)



### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	AL201A	N/A
SMPS Board	N/A	N/A	N/A
Inverter Board	DS Plus	N/A	N/A
LED & IR Board	N/A	LED & IR	N/A
OB-T Board	N/A	OB-T Rev : 6	N/A
OSD Board	N/A	OSD Rev1-1	N/A
LCD Panel	LG PHILIPS	LC201 V0Z	N/A
Tuner Board	LG	N/A	N/A

#### 3.2 EUT exercise Software

The windows program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. This program was included into HOST. Once loaded, this program sequentially exercises each system component in turn. The sequence used is: (1) series of "H" characters are printed on the monitor until the screen is completely full, (2) copy series of "H" characters to mass storage device (if one is used), (3) print series of "H" characters to printer. The complete cycle is repeated continuously.

The test was performed about each resolution from minimum resolution to maximum resolution for getting maximum noise level and the investigated maximum resolution mode of the EUT was 640 x 480, 75Hz.



### 3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
20.1" LCD TV	N	Y	1.5(P), 1.5(D)
AC/DC Adaptor	N	N/A	1.5(P)
Notebook PC	N	-	1.5(P)
VCR	N	N	1.5(P), 1.5(D)
Printer	N	Y	1.5(P), 1.5(D)
Modem	N	Y	1.5(P), 1.5(D)
Head-Microphone Set	N/A	N	1.2(D)
DVD	N	N	1.5(P), 1.5(D)
Pattern Generator	N	N	1.5(P), 1.5(D)

\* The marked "(P)" means the Power Cable and "(D)" means Signal Cable.

### 3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
20.1" LCD TV	Y	BOTH END	Y	BOTH END
AC/DC Adaptor	Y	EUT END	Y	EUT END
Notebook PC	-	-	-	-
VCR	N	N/A	Y	BOTH END
Printer	N	N/A	Y	BOTH END
Modem	N	N/A	Y	BOTH END
Head-Microphone Set	N	N/A	Y	EUT END
DVD	N	N/A	Y	BOTH END
Pattern Generator	N	N/A	Y	BOTH END

### 3.5 Equipment Modifications

- The EMI gasket was added to the rear enclosure, bottom of main board and rear of LCD panel.
- The ferrite core was added to the video signal cable that is connected from main board to LCD panel.
- The resistors(TTL output) were changed to bead(80 Ohm).



### 3.6 Configuration of Test System

Line Conducted Test: The power of the EUT was supplied by AC/DC adapter and the adapter was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2001 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emission test was conducted using the procedure in ANSI C63.4: 2001 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Resolution: 640 x 480	X

### 4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Resolution: 640 x 480	X



## 5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

### 5.1 Conducted Emission Test

Humidity Level	: <u>39 %</u>	Temperature: <u>20 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART B, SECTION 15.107(a)</u>	
Type of Test	: <u>CLASS B</u>	
Result	: <u>PASSED BY -4.70 dB at 21.23 MHz under average mode</u>	

EUT	: 20.1" LCD TV	Date: February 02, 2005
Operating Condition	: Continuously displayed "H" characters on the screen of the EUT	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)	
Resolution	: 640 x 480, 75Hz	

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.19	H	41.10	64.04	-22.94
5.50	H	37.23	60.00	-22.77
11.03	H	40.59	60.00	-19.41
16.82	H	49.53	60.00	-10.47
21.22	N	52.06	60.00	-7.94
21.23	H	53.89	60.00	-6.11
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
11.03	H	35.18	50.00	-14.82
16.82	H	41.79	50.00	-8.21
21.22	N	43.49	50.00	-6.51
21.23	H	45.30	50.00	-4.70

Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line

See next page for an overview sweep performed with peak and average detector.

Tested by: Sue-Yong, Lee / Test Engineer




# ONETECH

Testing & Evaluation Lab.

Page 10 of 13

FCC ID. : PD LAV201

Report No. : E052R-042

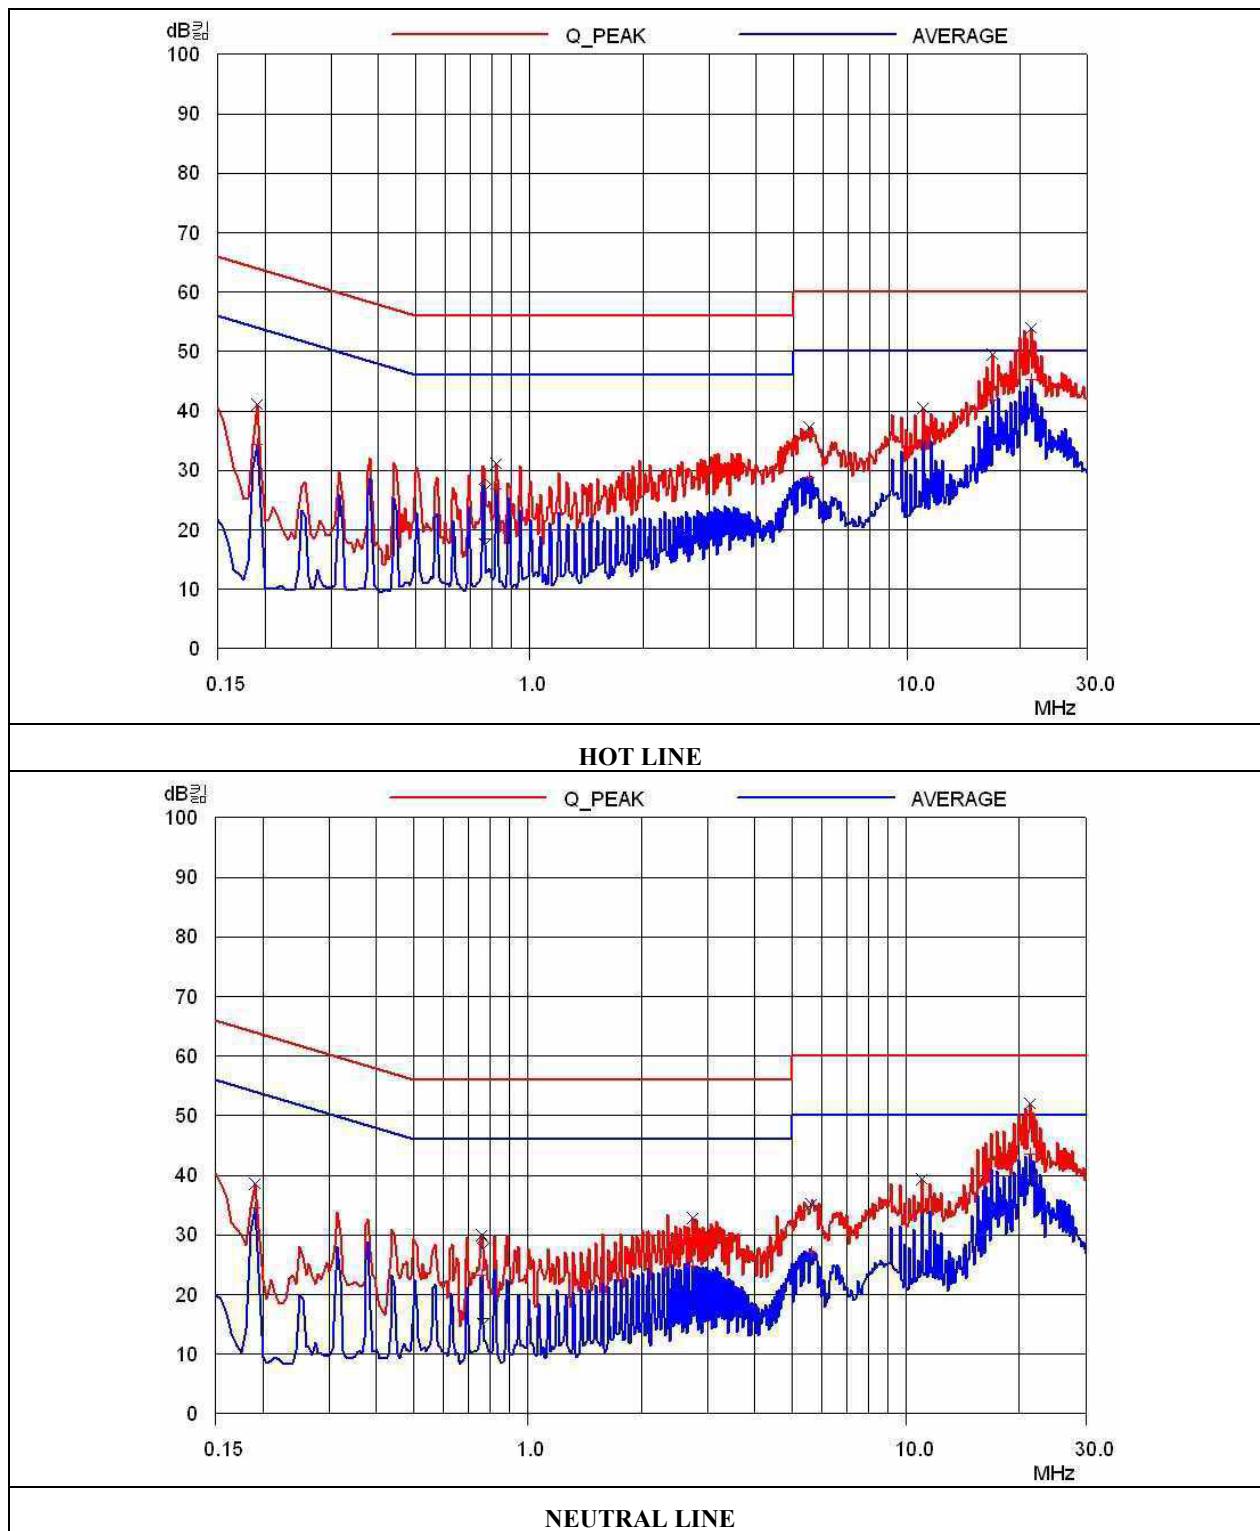

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-004 (Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea  
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

**EMC Testing Dept** : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Si, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



## 5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>41 %</u>	Temperature: <u>19 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART B, SECTION 15.109(a)</u>	
Type of Test	: <u>CLASS B</u>	
Result	: <u>PASSED BY -5.66dB at 114.00MHz</u>	

EUT	: 20.1" LCD TV	Date: January
24, 2005		
Operating Condition	: Continuously displayed "H" characters on the screen of the EUT	
Frequency range	: 30MHz – 1000MHz	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)	
Distance	: 3 Meter	
Resolution	: 640 x 480, 75Hz	

Radiated Emission		Ant	Correction Factors		Total	FCC	
Freq. (MHz)	Amp. (dBuV)		Ant. (dBuV/m)	Cable (dB)		Amp. (dBuV/m)	Limit (dBuV/m)
72.10	26.30	V	5.22	1.54	33.06	40.00	-6.94
77.80	22.60	V	5.73	1.60	29.93	40.00	-10.07
108.00	23.30	V	11.49	1.90	36.69	43.52	-6.83
114.00	23.60	H	12.24	2.02	37.86	43.52	-5.66
168.50	12.90	V	14.72	2.10	29.72	43.52	-13.80
217.45	20.55	H	16.70	2.41	39.66	46.02	-6.36
218.70	13.30	V	16.74	2.42	32.46	46.02	-13.56
400.00	17.90	H	15.82	3.50	37.22	46.02	-8.80
466.06	11.60	H	17.20	3.53	32.33	46.02	-13.69

Tested by: Sue-Yong, Lee / Test Engineer



## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

---

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



## 7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUe CAL	USE
1.	Test receiver	R/S	ESVS10	827864/005	DEC/04	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/04	12MONTH	
3.	Spectrum analyzer	HP	8566B	3407A08547	JUL/04	12MONTH	
4.	Spectrum analyzer	HP	8568B	3109A05456	JUL/04	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	APR/04	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	JUL/04	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	FEB/05	12MONTH	
8.	Biconical antenna	EMCO	3104C	9109-4443	MAY/04	12MONTH	■
		Schwarzbeck	VHA9103	91031852	JAN/05		
9.	Log Periodic antenna	EMCO	3146	9109-3213	FEB/05	12MONTH	■
				9109-3217	MAY/04		
		Schwarzbeck	9108-A(494)	62281001	JAN/05		
10.	LISN	EMCO	3825/2	9109-1867	JUL/04	12MONTH	■
				9109-1869	OCT/04		
11.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
12.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
13.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■