

**EMC TEST REPORT For FCC**

Test Report No. : 2006010029
Date of Issue : January 16, 2006
FCC ID : PDLAV420A
Model/Type No. : AV420A
Kind of Product : 42" TFT LCD TV
Applicant : ATEC CO., LTD.
Applicant Address : #1451-78, Seocho-Dong, Seocho-Gu, Seoul 137-867, Korea
Manufacturer : ATEC CO., LTD.
Manufacturer Address : #1451-78, Seocho-Dong, Seocho-Gu, Seoul 137-867, Korea
Contact Person : Park Hun. / Engineering Manager
Telephone : +82-2-2190-5155
Received Date : January 5, 2006
Test period : Start : January 10, 2006 End : January 13, 2006
Test Results : **In Compliance** **Not in Compliance**

The test results presented in this report relate only to the object tested.

CERTiTEK Standards Laboratory Co., Ltd. is accredited by Korea Laboratory Accreditation Scheme (KOLAS) which signed the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Arrangement (MRA) for the above test item(s) and test method(s).

Tested by

Eun-Won, Lee
EMC Test Engineer
Date: January 16, 2006

Reviewed by

James Hong
EMC Technical Manager
Date: January 16, 2006



REPORT REVISION HISTORY

Date	Revision	Page No
January 16, 2006	Issued (2006010029)	All

This report shall not be reproduced except in full, without the written approval of CERTiTEK Standards Laboratory Co., Ltd. This document may be altered or revised by CERTiTEK Standards Laboratory Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CERTiTEK Standards Laboratory Co., Ltd. will constitute fraud and shall nullify the document.



TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Model Differences	4
1.2 Device Modifications.....	4
1.3 EUT Configuration(s)	5
1.4 Test Software	5
1.5 EUT Operating Mode(s)	5
1.6 Configuration	6
1.7 Calibration Details of Equipment Used for Measurement	7
1.8 Test Facility.....	7
1.9 Measurement Procedure	7
1.10 Laboratory Accreditations and Listings.....	8
2.0 Emissions Test Regulations	9
2.1 Conducted Voltage Emissions	10
2.2 Radiated Electric Field Emissions	11
APPENDIX A – TEST DATA.....	12
Conducted Voltage Emissions	12
Radiated Electric Field Emissions.....	16
APPENDIX B - Test Setup Photos and Configuration.....	18
Conducted Voltage Emissions	18
Radiated Electric Field Emissions.....	19
APPENDIX C – EUT Photographs	20
EUT External Photographs.....	21
EUT Internal Photographs	22
PCB.....	23
Photographs related to Label	32
FCC ID label location	33



CERTiTEK Standards Laboratory Co., Ltd.

386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100

Tel: +82-31-339-9970 Fax: +82-31-339-9855

<http://www.certitek.com/>



1.0 General Product Description

1.0.1 Tested Equipment

- Unless otherwise indicated, all tests were conducted on Model AV420A.
- Tests performed on Model _____ were considered to be representative of Model(s) _____.

1.0.2 Equipment Size, Mobility and Identification

Dimensions: 1221(W) by 304(D) by 731(H) mm inch
Mobility: Hand-held Table-top Built-in
 Traveling Floor-standing
Serial No.: Prototype

1.0.3 Electrical Ratings

Input: 100-240 Vac, 50/60 Hz, 253 W
Output: -

1.0.4 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage: 120 Vac
Frequency: 60 Hz

1.0.5 Clock & Other Frequencies Utilized

14.31818 MHz, 18.432 MHz, 27 MHz, 28.322 MHz

1.1 Model Differences

Not applicable

1.2 Device Modifications

The following modifications were necessary for compliance:

Not applicable



CERTiTEK Standards Laboratory Co., Ltd.

386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100

Tel: +82-31-339-9970 Fax: +82-31-339-9855

<http://www.certitek.com/>



CERTiTEK

1.3 EUT Configuration(s)

See Appendix A for individual test set-up configuration(s). The following peripheral devices and/or interface cables were connected during the measurement:

Peripheral Devices

Device	Manufacturer	Model No.	Serial No.	FCC ID or DoC
Headphone	-	-	-	-
Personal Computer	Hewlett-Packard Company	PD1059P	-	DoC
Keyboard (PS/2 type)	SILITEK YET FOUNDATION	SK-8110	-	DoC
Mouse (PS/2 type)	Hewlett-Packard Company	5219	BN5017686	DoC
Mouse (USB type)	SAMSUNG	OMS3CB	0303009881	DoC

Cable Description

#	Description	Ferrite Core	Length (m)	Other Details
1	EUT Power Cable, Unshielded	No	1.8	Connect to AC power
2	Headphone Cable, Unshielded	No	2.1	Between the EUT and Headphone
3	S-Video Cable, Shielded	No	1.8	Unterminated (only cable)
4	Composite Cable, Unshielded	No	1.8	Unterminated (only cable)
5	DVI Cable, Shielded	Yes	1.5	Between the EUT and PC
6	RGB Cable, Shielded	Yes	1.5	Between the EUT and PC
7	PC Audio Input Cable, Unshielded	No	1.5	Between the EUT and PC
8	RS-232C Cable, Unshielded	No	1.5	Unterminated (only cable)
9	Component Video Input Cable, Unshielded	No	1.8	Unterminated (only cable)
10	Component Audio Input Cable, Unshielded	No	1.8	Unterminated (only cable)
11	Optical Output Cable, Unshielded	No	1.2	Unterminated (only cable)
12	S-Video Cable, Shielded	No	1.8	Unterminated (only cable)
13	Video Input Cable 1, Unshielded	No	1.8	Unterminated (only cable)
14	Video Input Cable 2, Unshielded	No	1.8	Unterminated (only cable)
15	Antenna Cable, Shielded	No	10.0	Unterminated (only cable)
16	Video Out Cable, Unshielded	No	1.5	Unterminated (only cable)
17	Mouse cable, Shielded	No	1.5	USB type
18	Mouse cable, Shielded	No	1.5	PS/2 type
19	Keyboard cable, Shielded	No	1.5	PS/2 type
20	AC power cable, Unshielded	No	1.8	Connect to AC power

1.4 Test Software

EMC Test V 1.0
 Display Test Patterns – V1.5
 Ping.exe
 Not applicable


1.5 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

Standby Scrolling 'H'
 Display circles pattern Read / Write
 Practice operation – Resolution : 1360 x 768 @ 60 Hz

During testing, the EUT was connected to a PC via a DVI port and a RGB port.
(Digital mode and Analog mode)

1.6 Configuration

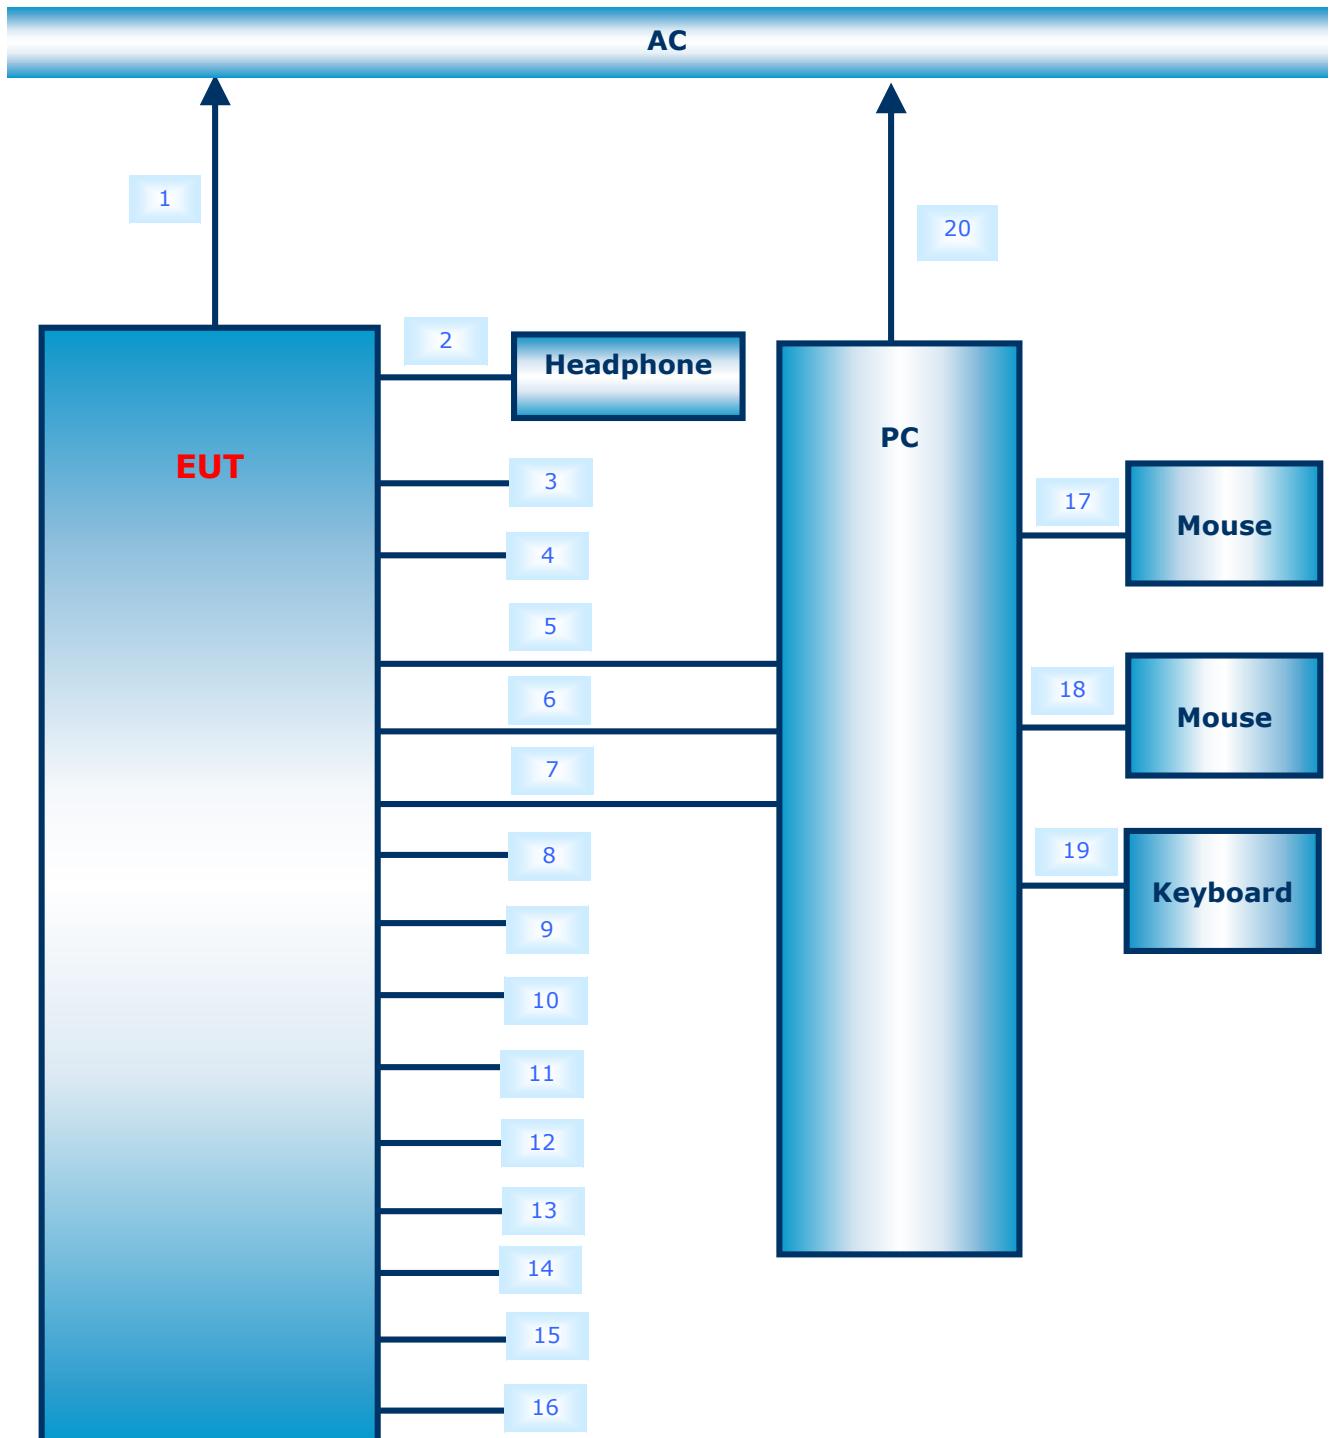



1.7 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.8 Test Facility

The measurement facility is located at 386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.9 Measurement Procedure

Preliminary AC power line conducted emissions tests were performed shielded room. To find worst mode, several typical mode and typical cable position were tested.

Final AC power line conducted emissions test was performed shielded room. (location is same as Preliminary test)

Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

Preliminary radiated emissions test were performed anechoic chamber (Distance of antenna and EUT was 3 m). To find worst mode, several typical mode and typical cable position were tested and peak level and frequency were recorded.

Final radiated emissions test was performed Open Area Test Site. Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

* Measurement procedures was In accordance with ANSI C63.4-2003 7.2.3, 7.2.4, 8.3.1.1, 8.3.1.2



1.10 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	 93250
JAPAN	VCCI	10 meter Open Area Test Site and one conducted site.	 R-948, C-986
KOREA	MIC	EMI (10 meter Open Area Test Site and two conducted sites) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 No. 51, KR0025
International	KOLAS	EMC	
Europe	GLAS	EMC EN 55011, EN 55022, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2, EN 50130-4, EN 55024, EN 61204-3, EN 60601-1-2, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11	 No.13000796-02



2.0 Emissions Test Regulations

The emissions tests were performed according to following regulations:

<input type="checkbox"/> EN 61000-6-3:2001	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input type="checkbox"/> EN 61000-6-4:2001	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input type="checkbox"/> EN 50083-2:2001		
<input type="checkbox"/> EN 55011:1998 +A1:1999	<input type="checkbox"/> Group 1	<input type="checkbox"/> Group 2
<input type="checkbox"/> EN 55011:1998 +A1:1999 +A2:2002	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
	<input type="checkbox"/> Group 1	<input type="checkbox"/> Group 2
	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input type="checkbox"/> EN 55013:1990 +A12:1994 +A13:1996 +A14:1999		
<input type="checkbox"/> EN 55013:2001		
<input type="checkbox"/> EN 55014-1:2000		
<input type="checkbox"/> EN 55014-1:2000 +A1:2001		
<input type="checkbox"/> EN 55015:2000		
<input type="checkbox"/> EN 55015:2000 +A1:2001		
<input type="checkbox"/> EN 55022:1994 +A1:1995 +A2:1997	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input type="checkbox"/> EN 55022:1998	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input type="checkbox"/> EN 55022:1998 +A1:2000	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input type="checkbox"/> EN 55022:1998 +A1:2000 +A2:2003	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input type="checkbox"/> EN 61000-3-2:2000		
<input type="checkbox"/> EN 61000-3-3:1995 +A1:2001		
<input type="checkbox"/> VCCI V-3/2004.04	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input type="checkbox"/> AS/NZS 3548:1995 +A1:1997 +A2:1997	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B
<input checked="" type="checkbox"/> FCC Part 15 Subpart B	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B
<input checked="" type="checkbox"/> CISPR 22:1997	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B
The unit was tested to CISPR 22 and complied with the alternate methods allowed by FCC under paragraphs 15.107 and 15.109.		
<input type="checkbox"/> CISPR 22:1997 +A1:2000	<input type="checkbox"/> Class A	<input type="checkbox"/> Class B



2.1 Conducted Voltage Emissions

Test Date

January 10, 2006

Test Location

Shielded Room

Test Equipment

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	Field Strength Meter	Rohde & Schwarz	ESHS30	828144/002	2006-02-01
<input checked="" type="checkbox"/>	LISN	EMCO	3825/2	9607-2575	2006-09-03
<input checked="" type="checkbox"/>	LISN	EMCO	3825/2	9409-2246	2006-09-03

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

[Analog mode]

 MET

Frequency (MHz)	Measured Data (dBuV)	Margin (dB)	Remark
0.28	40.2	10.6	Average

[Digital mode]

 MET

Frequency (MHz)	Measured Data (dBuV)	Margin (dB)	Remark
0.26	50.5	10.9	Quasi-peak

 NOT MET

Frequency (MHz)	Measured Data (dBuV)	Margin (dB)	Remark

 NOT APPLICABLE**Remarks**See Appendix A for test data.



2.2 Radiated Electric Field Emissions

Test Date

January 13, 2006

Test Location Testing was performed at a test distance of 10 meter Open Area Test Site**Test Equipment**

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
<input checked="" type="checkbox"/>	Field Strength Meter	Rohde & Schwarz	ESVS30	826638/008	2006-04-14
<input checked="" type="checkbox"/>	ULTRA Broadband Antenna	Rohde & Schwarz	HL562	361324/014	2006-05-27
<input type="checkbox"/>	Biconical Antenna	EMCO	3110	9202-1510	2006-04-13
<input type="checkbox"/>	Log-periodic Antenna	EMCO	3146	9607-4567	2006-04-08

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

[Analog mode]

 MET

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
795.25	33.6	3.4	Quasi-peak

[Digital mode]

 MET

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
818.00	33.6	3.4	Quasi-peak

 NOT MET

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark

 NOT APPLICABLE**Remarks**See Appendix A for test data

**APPENDIX A – TEST DATA****Conducted Voltage Emissions**

[Analog mode]

Frequency [MHz]	Correction Factor		Line	Quasi-peak				Average			
	LISN	Cable		Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Margin [dB]	Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Margin [dB]
0.15	0.2	0.1	H	66.0	49.5	49.8	16.2	56.0	28.6	28.9	27.1
0.16	0.2	0.1	H	65.5	49.4	49.7	15.8	55.5	32.3	32.6	22.9
0.20	0.2	0.1	N	63.6	48.6	48.9	14.7	53.6	39.4	39.7	13.9
0.24	0.1	0.1	H	62.1	48.6	48.8	13.3	52.1	37.8	38.0	14.1
0.28	0.1	0.1	N	60.8	48.9	49.1	11.7	50.8	40.0	40.2	10.6
0.32	0.1	0.1	H	59.7	43.1	43.3	16.4	49.7	30.9	31.1	18.6





CERTiTEK Standards Laboratory Co., Ltd.

386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100

Tel: +82-31-339-9970

Fax: +82-31-339-9855

<http://www.certitek.com/>

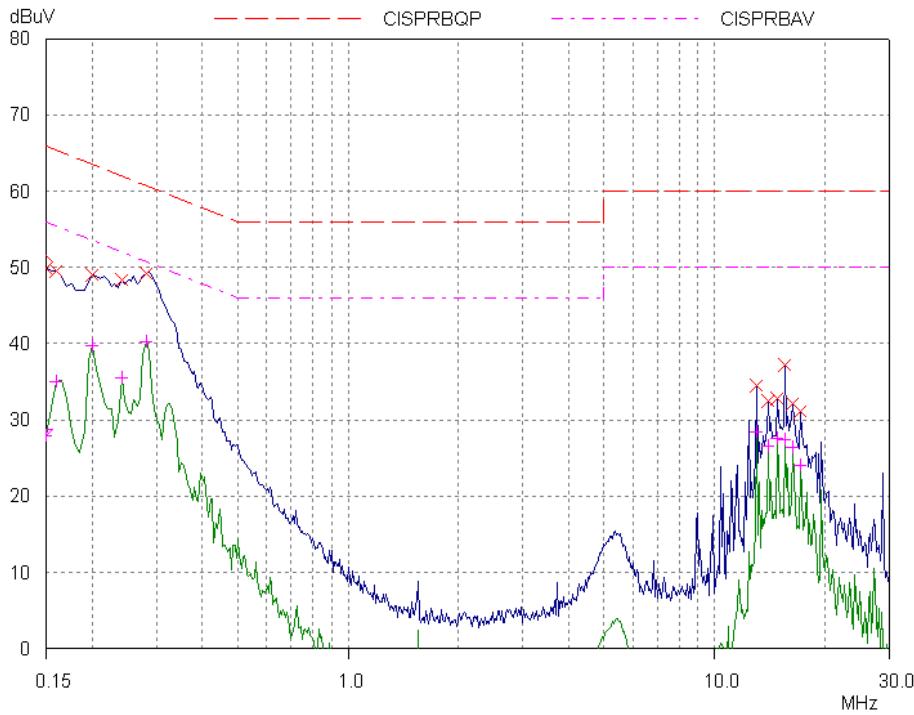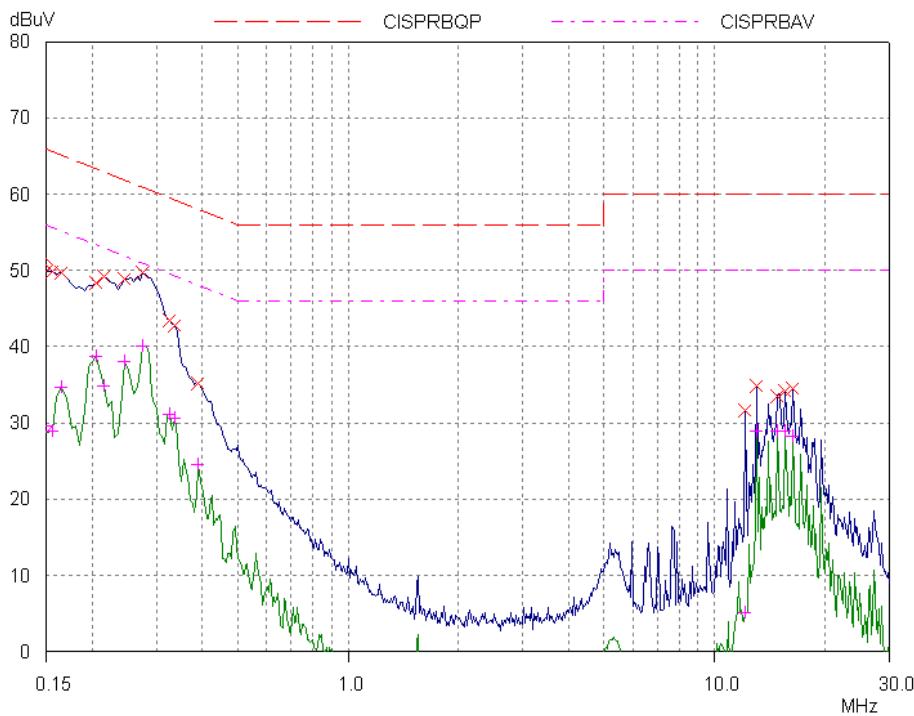



CERTiTEK Standards Laboratory Co., Ltd.

386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100

Tel: +82-31-339-9970 Fax: +82-31-339-9855

<http://www.certitek.com/>



[Digital mode]

Frequency [MHz]	Correction Factor		Line	Quasi-peak				Average			
	LISN	Cable		Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Margin [dB]	Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Margin [dB]
0.15	0.2	0.1	H	66.0	52.3	52.6	13.4	56.0	34.5	34.8	21.2
0.18	0.2	0.1	H	64.5	48.9	49.2	15.3	54.5	35.1	35.4	19.1
0.22	0.2	0.1	H	62.8	48.6	48.9	13.9	52.8	38.7	39.0	13.8
0.26	0.1	0.1	H	61.4	50.3	50.5	10.9	51.4	40.0	40.2	11.2
0.28	0.1	0.1	N	60.8	48.5	48.7	12.1	50.8	35.3	35.5	15.3
0.29	0.1	0.1	N	60.5	47.5	47.7	12.8	50.5	36.5	36.7	13.8





CERTiTEK Standards Laboratory Co., Ltd.

386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100

Tel: +82-31-339-9970

Fax: +82-31-339-9855

<http://www.certitek.com/>

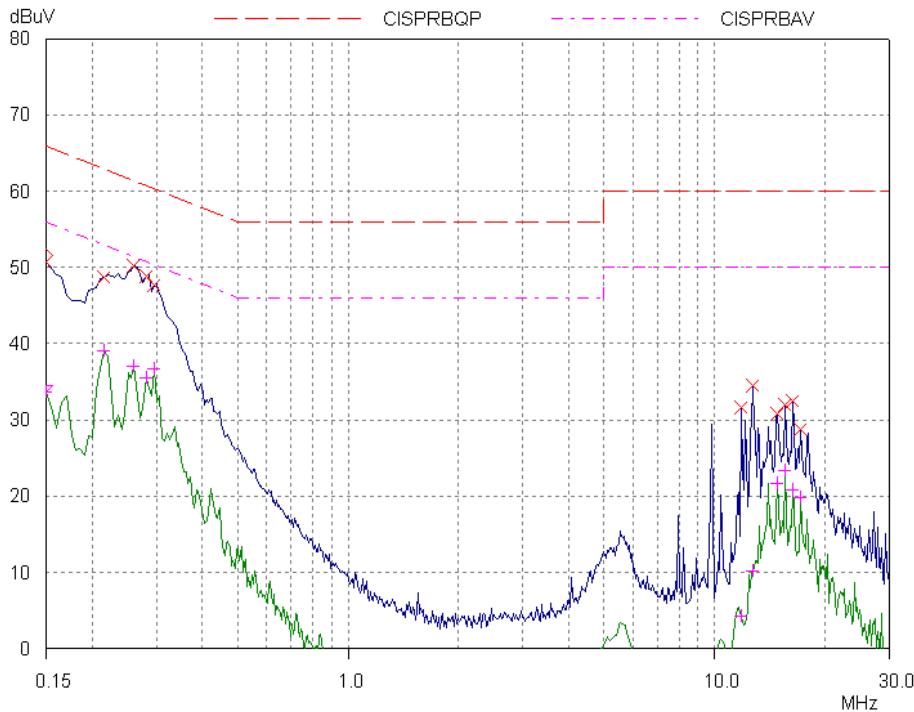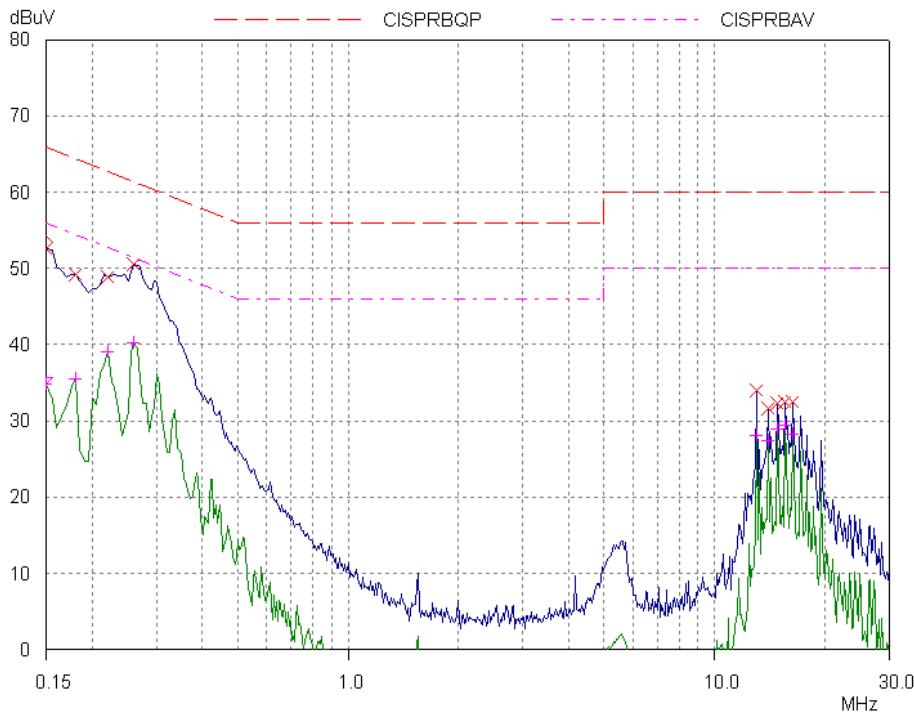



Radiated Electric Field Emissions

[Analog mode]

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Cable			
81.30	15.7	H	4.0	8.0	1.7	30.0	25.4	4.6
275.02	20.0	H	3.8	10.0	3.2	37.0	33.2	3.8
742.75	8.8	H	1.8	18.8	5.2	37.0	32.8	4.2
795.25	8.6	V	2.0	19.4	5.6	37.0	33.6	3.4
797.00	6.9	H	2.0	19.4	5.6	37.0	31.9	5.1
818.00	8.1	H	4.0	19.5	5.6	37.0	33.2	3.8



CERTiTEK Standards Laboratory Co., Ltd.

386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100

Tel: +82-31-339-9970 Fax: +82-31-339-9855

<http://www.certitek.com/>



[Digital mode]

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Cable			
49.17	17.5	V	3.8	7.8	1.2	30.0	26.5	3.5
96.82	15.1	V	1.8	9.1	1.9	30.0	26.1	3.9
283.80	17.4	H	4.0	10.4	3.2	37.0	31.0	6.0
742.75	9.0	H	2.0	18.8	5.2	37.0	33.0	4.0
793.50	8.1	V	4.0	19.3	5.5	37.0	32.9	4.1
818.00	8.5	H	2.0	19.5	5.6	37.0	33.6	3.4