

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_PD-95G_02.docx	Date of Report:	24-May-2013
Number of pages:	11	Customer's Contact person:	Huhtala Tero
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Camera Grip PD-95G / Phone RM-877 / AC charger AC-60U / Charging data cable CA-190CD / Headset WH-208		
FCC ID:	PDNB	IC:	661R-B
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22, RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 2, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			
	Jari Jantunen, System Manager, EMC		

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	02-Apr-2013
Testing completed	03-Apr-2013
The customer's contact person	Huhtala Tero
Test Plan referred to	T:\Projects\accessor\PD-95G\TestPlan\RS_testplan_PD-95G.xlsm
Notes	-
Document name	T:\Projects\accessor\PD-95G\EMC\FCC15B_PD-95G_02.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Camera Grip	PD-95G	7100573055000000269	3.1	3.1 T1	-	42995
Camera Grip	PD-95G	7100573055000000 268	3.1	3.1 T1	-	42997
Phone	RM-877	004402471265557	1000	-	3012.0000.1304.10019	42979
Phone	RM-877	004402471264998	1000	-	3012.0000.1304.10019	42980
Battery	BV-5XW		LG 2.3			42971
AC charger	AC-60U	4090493047580200312;0675678	B1.0 HW0.2 MW0.2 PV02	-	-	42973
AC charger	AC-60U	4090493047580200251;0675678	B1.0 HW0.2 MW0.2 PV02	-	-	42972
Charging data cable	CA-190CD	0730456246628	-	-	-	42977
Headset	WH-208	1411621	-	-	-	42831

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (4.6)	Radiated emissions	PASSED

GSM1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	NP

WCDMA 1700 (Band IV):

Section in CFR 47	Section in ICES-003 (RSS-139)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	3
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3).....	5
2.1. Test Setup	5
2.2. Test method and limit	5
2.3. GSM 850 Test results	6
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)	7
3.2. Test method and limit	8
3.3. GSM850 test results	9
4. Test Equipment.....	10
4.1. Conducted measurements	10
4.2. Radiated measurements	11

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	PD-95G, DUT 42997
Accessories with DUT numbers	RM-877, DUT 42980 ; BV-5XW, DUT 42971 ; AC-60U, DUT 42972 ; CA-190CD, DUT 42977 ; WH-208, DUT 42831
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 44 / 102.4
Date of measurements	03-Apr-2013
Measured by	Timo Raiskio

2.1. Test Setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference ground plane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. GSM 850 Test results

Channel 190 / 836.6 MHz, battery low in phone and camera grip

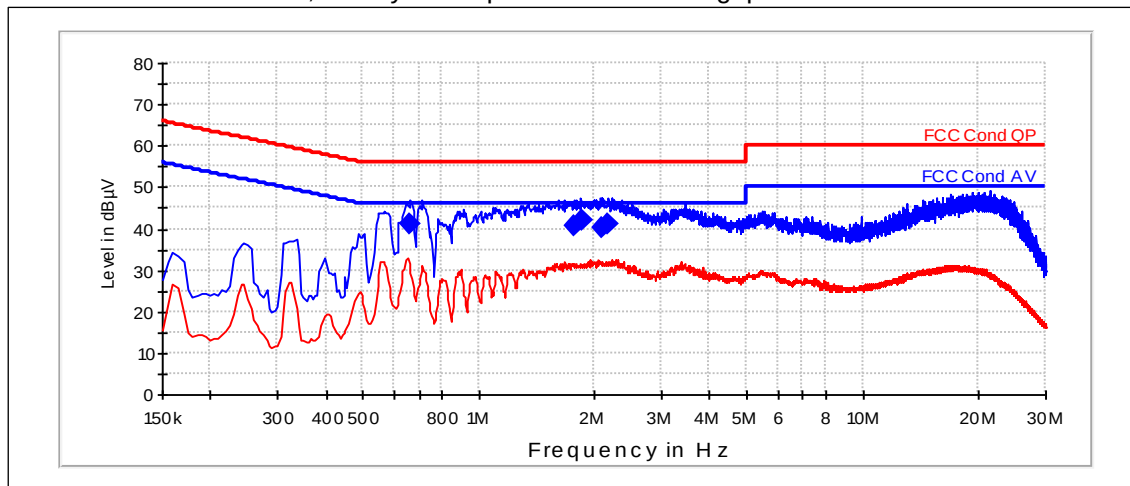

QuasiPeak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.665	41.27	L1	PASSED
1.765	40.62	N	PASSED
1.855	41.9	L1	PASSED
2.1	40.37	L1	PASSED
2.165	41.19	N	PASSED

3. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)

EUT with DUT number	PD-95G, DUT 42995
Accessories with DUT numbers	RM-877, DUT 42979 ; AC-60U, DUT 42973 ; CA-190CD, DUT 42977 ; WH-208, DUT 42831
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 47
Date of measurements	02-Apr-2013
Measured by	Hannu Söderholm

3.1.1 Test setup

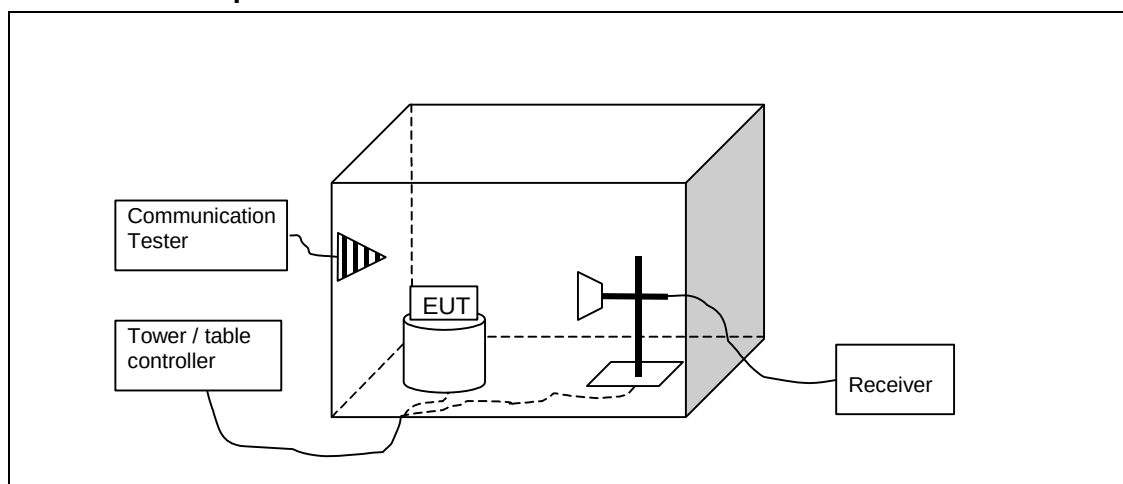

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 - 230	40	-	-
230 – 1000	47	-	-
1000 - 3000	-	50	70
Above 3000	-	54	74

3.3. GSM850 test results

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3476.4	39.25	91.675	43.9	-4.65	34.8	74	PASSED
6953.2	48.16	255.888	47.6	0.56	25.8	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3476.4	26.23	20.49	30.88	-4.65	27.8	54	PASSED
6953.2	34.66	54.063	34.1	0.56	19.3	54	PASSED

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
35.972	24.79	17.348	53.15	-28.36	15.2	40	PASSED
40.672	21.92	12.475	52.18	-30.26	18.1	40	PASSED
54.092	18.15	8.083	55.91	-37.76	21.8	40	PASSED
270.01	28.22	25.757	62.82	-34.6	18.8	47	PASSED
909.692	14.87	5.541	37.91	-23.04	32.1	47	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
7826.15	46.82	219.331	44.03	2.79	27.2	74	PASSED
7831.465	44.98	177.317	42.2	2.78	29	74	PASSED
7839.878	45.33	184.778	42.56	2.77	28.7	74	PASSED
7852.405	45.79	194.648	43.06	2.73	28.2	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
7826.15	32.35	41.467	29.56	2.79	21.6	54	PASSED
7831.465	32.39	41.649	29.61	2.78	21.6	54	PASSED
7839.878	32.47	42	29.7	2.77	21.5	54	PASSED
7852.405	32.61	42.717	29.88	2.73	21.4	54	PASSED

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3576.8	39.16	90.761	43.76	-4.6	34.8	74	PASSED
7148.7	44.19	161.92	42.69	1.5	29.8	74	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Margin	Limit [dBμV/m]	Results
3576.8	26.32	20.697	30.92	-4.6	27.7	54	PASSED
7148.7	31.02	35.571	29.52	1.5	23	54	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C, 15E
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15E, 15B
TM37678	Communication Tester	CMU200	R&S	15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C, 15E
TM23007	Oscilloscope	TDS684B	Tektronix	15E
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24/27
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27, 15C
2009	LISN 50 μ H	ENV216	R&S	15C, 15B
2010	LISN 50 μ H	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2021	Communication Tester	CMW500	R&S	22/24/27
2023	Spectrum Analyzer	ESMI-RF	R&S	15B/15C
2024	Analyzer display unit	ESAI-D	R&S	15B/15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15E, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15E, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15E, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15E, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15E, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15E, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15E, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15E, 15B
TM38066	High pass filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
2028	High pass filter	WHKX 1.0/15G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	22
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27
2021	Communication Tester	CMW500	R&S	22/24/27
2025	Antenna	HFH2-Z2	R&S	15C