

GSM850 test report for RA-3

Report Date: September 09, 2004

Signatures:

Tested by:



Marko Turkkila Testing Engineer

Contents approved:



Tomi Nyberg Laboratory Manager

CONTENTS

1	LABORATORY INFORMATION	4
2	CUSTOMER INFORMATION	4
3	SUMMARY OF TEST RESULTS	5
4	EUT INFORMATION	6
4.1	EUT description	6
5	EUT TEST SETUPS	7
6	APPLICABLE STANDARDS	7
7	RADIATED RF OUTPUT POWER	8
7.1	Test setup	8
7.2	Test method	9
7.3	EUT operation mode	9
7.4	Limit	9
7.5	Results	10
8	99% OCCUPIED BANDWIDTH	12
8.1	Test setup	12
8.2	EUT operation mode	12
8.3	Results	13
8.4	Screen shots	14
9	BAND-EDGE COMPLIANCE	17
9.1	Test setup	17
9.2	EUT operation mode	17
9.3	Limit	18
9.4	Results	18
9.5	Screen shots	19
10	RADIATED SPURIOUS EMISSIONS	21
10.1	Test setup	21
10.2	Test method	22
10.3	EUT operation mode	22
10.4	Limit	22
10.5	Results	23
11	FREQUENCY STABILITY, TEMPERATURE VARIATION	26
11.1	Test setup	26
11.2	EUT operation mode	26
11.3	Limit	26
11.4	Test method	27
11.5	Results	27
12	FREQUENCY STABILITY, VOLTAGE VARIATION	28
12.1	Test setup	28
12.2	EUT operation mode	28
12.3	Limit	28
12.4	Test method	29
12.5	Results	29

13	TEST EQUIPMENT	30
13.1	Conducted measurements.....	30
13.2	Radiated measurements.....	30
14	TEST SETUP PHOTOGRAPHS	31

1 LABORATORY INFORMATION

Test Laboratory	NATLABS OY EMC Laboratory Koneenkatu 12 / K17 05830 Hyvinkää FINLAND Tel: +358 20 475 2600 Fax: +358 20 475 2719 e-mail: firstname.surname@ette.com
FCC registration number: IC file number:	910391 (January 27, 2003) IC 4616 (May 14, 2003)

2 CUSTOMER INFORMATION

Client	Nokia Corporation Keilalahdentie 2-4 02150 Espoo PL 226 00045 NOKIA GROUP Tel: 07180 08000
Contact person:	Juha Tuominen Nokia Corporation / TCC Salo P.O. Box 86 (Joensuunkatu 7C) FIN -24101 SALO FINLAND Tel: +358 7180 08000 Fax: +358 7180 44123
Receipt of EUT:	July 08, 2004
Testing date:	July 08 – September 08, 2004
Report date:	September 09, 2004

The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 22 and 2 and IC standard RSS-132.

3 SUMMARY OF TEST RESULTS

Section in CFR 47	Section in RSS-132	Test	Result
§2.1046 (a), 22.913 (a)	6.4	Conducted RF output	-
§22.913 (a)	6.4	Radiated RF output	PASS
§2.1049 (h)	4.2	99% occupied bandwidth	PASS
§22.917 (b)	4.5	Band-edge compliance	PASS
§22.917 (b), §2.1051	4.5	Spurious emissions at antenna terminals.	-
§22.917 (b), §2.1053	4.5	Radiated spurious emissions	PASS
§2.1055 (a)(1)(b)	6.3	Frequency stability, Frequency variation	PASS
§2.1055 (d)(1)(2)	6.3	Frequency stability, Voltage variation	PASS

PASS Pass

FAIL Fail

X Measured, but there is no applicable performance criteria

- Not done

4 EUT INFORMATION

The EUT and accessories used in the tests are listed below. Later in this report only EUT numbers are used as reference.

	Device	Type	S/N	EUT number
EUT	GSM 850 Mobile phone	RA-3	004400/49/175235/6	06301
	GSM 850 Mobile phone	RA-3	004400/49/175035/0	06302
	GSM 850 Mobile phone	RA-3	004400/49/175043/4	06303
Accessories	Battery	BP-5L	v.12	06304

Notes:

EUT 06303 was equipped with antenna connector for conducted measurements

4.1 EUT description

EUT is a triple band (GSM850 / GSM 1800 / GSM 1900) mobile phone with edge, BT and WLAN functions.

The EUT was not modified during the tests.

5 EUT TEST SETUPS

For each test the EUT was exercised to find out the worst case of operation modes and device configuration.

The test setup photographs are in the document referenced in section 14.

6 APPLICABLE STANDARDS

The tests were performed in guidance of CFR 47 part 22, part 2, ANSI/TIA/EIA-603-A-2001 and RSS-132.

Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method" for each test case.

7 RADIATED RF OUTPUT POWER

EUT	06301		
Accessories	06304		
Temp, Humidity, Air Pressure	24 °C	65 RH%	999 hPa
Date of measurement	July 20 - September 09, 2004		
FCC rule part	§22.913 (a)		
RSS-132 section	6.4		
Measured by	Marko Turkkila		


7.1 Test setup

The EUT was set on a non-conductive turn table in an anechoic chamber. In the corner of the chamber there was a communications antenna, which was connected to the BS simulator located outside the chamber.

The radiated power from the EUT was measured with an antenna fixed to a antenna tower. Antenna polarization can be changed remotely. The turn table is remotely controlled to turn the EUT

The measurement antenna was set at the same height as the EUT. The measured signal was routed from the measuring antenna to the spectrum analyzer.

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

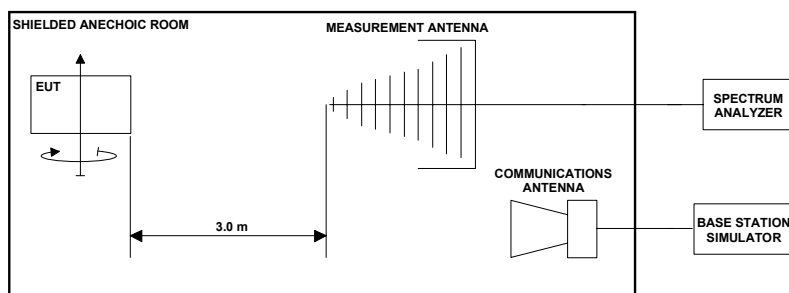

Picture 1: Test setup for radiated RF output power measurement

7.2 Test method

1. Substitution method calibration was made for determining correction factors for horizontal and vertical polarization. In the calibration the EUT was substituted with a signal generator and antenna, which gain over isotropic and dipole radiator was known.
2. The maximum power level was searched by moving the turntable, by manipulating the EUT and by changing the measurement antenna polarization and height. The maximum measured level (P_{EUT}) was recorded.
3. The measured power from EUT was corrected with the correction factor in an automated test system to give the EUT ERP.

7.3 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission
EUT channel	128,190,251
EUT TX power level	GSM 5 (33dBm) EDGE E8 (+27dBm)

7.4 Limit

ERP [W]	
FCC	≤ 7
IC	≤ 6.3

7.5 Results

The formula below was used to calculate the ERP of the EUT.

$$P_{EIRP[W]} = \frac{10^{(P_{EUT[dBm]} + (P_{Subst_RX[dBm]} - P_{Subst_TX[dBm]} + L_{Cable[dB]} - G_{Substitute_antenna[dBi]})) / 10}}{1000}$$

$$= \frac{10^{(P_{EUT[dBm]} + CF[dB]) / 10}}{1000}$$

where the variables are as follows:

$P_{EUT [dBm]}$	Measured power level (from step 2 in 7.2) from the EUT
$P_{Subst_TX [dBm]}$	Power (step 1 in 7.2) fed to the substituting antenna
$P_{Subst_RX [dBm]}$	Power (step 1 in 7.2) received with the spectrum analyzer
$G_{Substitute_antenna [dBi]}$	Gain of the substitutive antenna over isotropic radiator
$L_{Cable [dB]}$	Loss of the cable between signal generator and the substituting antenna
$CF [dB]$	Correction factor combined from the $P_{Subst_TX [dBm]}$, $P_{Subst_RX [dBm]}$, $G_{Substitute_antenna [dBi]}$ and $L_{Cable [dB]}$ used in the automated measurement system (step 3 in 7.2).

In the tables below, the abbreviated column titles are:

EUT H / H2 / V	EUT orientation, Horizontal / Horizontal 2 / Vertical
Pol H / V	Measuring antenna polarization, Horizontal / Vertical
Height [m]	Measuring antenna height from reference ground in meters
TT [deg]	Turn table angle in degrees

Table 1: Radiated RF output power measurement results, GSM GMSK. flip closed.

EUT Channel	P _{EUT} [dBm]	CF [dB]	ERP [dBm]	ERP [W]	EUT H / V /H2	Pol. H / V	Height [m]	TT [deg]
128	-0.92	32.17	31.25	1.33	H	H	1.64	79.0
190	-0.67	32.33	31.66	1.47	H	H	1.64	77.0
251	-1.14	32.49	31.35	1.36	H2	H	1.52	9.0

Table 2: Radiated RF output power measurement results, GSM GMSK, flip open.

EUT Channel	P _{EUT} [dBm]	CF [dB]	ERP [dBm]	ERP [W]	EUT H / V /H2	Pol. H / V	Height [m]	TT [deg]
128	-1.41	32.17	30.76	1.19	H2	H	1.64	5.0
190	-1.03	32.33	31.30	1.35	H	H	1.61	280.0
251	-0.53	32.49	31.96	1.57	H2	H	1.55	8.0

Table 3: Radiated RF output power measurement results, GSM EDGE 8 PSK modulation.

Ch 128 and 190 flip closed. Ch 251 flip open.

EUT Channel	P _{EUT} [dBm]	CF [dB]	ERP [dBm]	ERP [W]	EUT H / V /H2	Pol. H / V	Height [m]	TT [deg]
128	-5.95	32.17	26.22	0.42	H	H	1.64	79.0
190	-6.53	32.33	25.80	0.38	H	H	1.64	77.0
251	-6.79	32.49	25.70	0.37	H2	H	1.52	8.0

Table 4: Radiated RF output power measurement results, GSM GMSK modulation in GPRS 2 slot mode (2 uplink and 2 downlink slots).

Ch 128 and 190 flip closed. Ch 251 flip open.


EUT Channel	P _{EUT} [dBm]	CF [dB]	ERP [dBm]	ERP [W]	EUT H / V /H2	Pol. H / V	Height [m]	TT [deg]
128	-3.53	32.17	28.64	0.73	H	H	1.64	79.0
190	-4.20	32.33	28.13	0.65	H	H	1.64	77.0
251	-5.05	32.49	27.44	0.55	H2	H	1.52	8.0

8 99% OCCUPIED BANDWIDTH

EUT	06301		
Accessories	06304		
Temp, Humidity, Air Pressure	22 °C	70 RH%	992 hPa
Date of measurement	July 6, 2004		
FCC rule part	§2.1049 (h)		
RSS-132 section	4.2		
Measured by	Kimmo Aarnio		

8.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

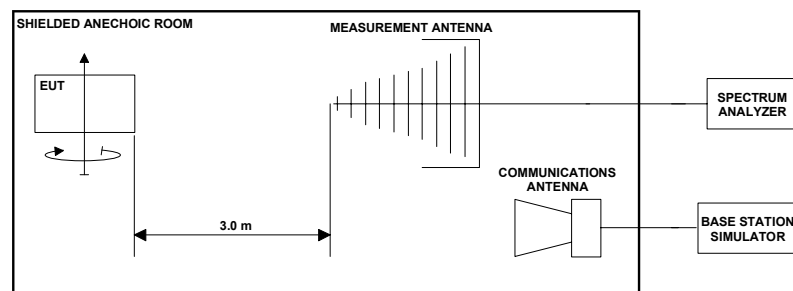

Picture 2: Test setup for band edge compliance measurement

99% occupied bandwidth measurements were made as radiated measurement similar to radiated power measurement. The worst turntable angle, antenna height and antenna polarisation found in radiated power measurements were used.

Base station simulator was used to set the EUT channel, modulation and power level.

8.2 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission,
EUT channel	128, 190, 251
EUT TX power level	GSM 5 (+35dBm) EDGE E8 (+27dBm)

8.3 Results

The 99% occupied bandwidth was calculated from spectrum analyzer measurements.

The measurement data was read from the analyzer to computer.

Software in computer calculated the total power from the measurement data and defined the frequency band containing 99% of the total power.

Markers in the spectrum analyzer were then placed between the calculated frequencies to show the calculated 99% power band in the screenshots.


Table 5: 99% occupied bandwidth measurement results, GSM GMSK modulation

EUT Channel	99% occupied bandwidth [kHz]
128	242
190	242
251	245


Table 6: 99% occupied bandwidth measurement results, EDGE 8 PSK modulation

EUT Channel	99% occupied bandwidth [kHz]
128	246
190	241
251	237


8.4 Screen shots

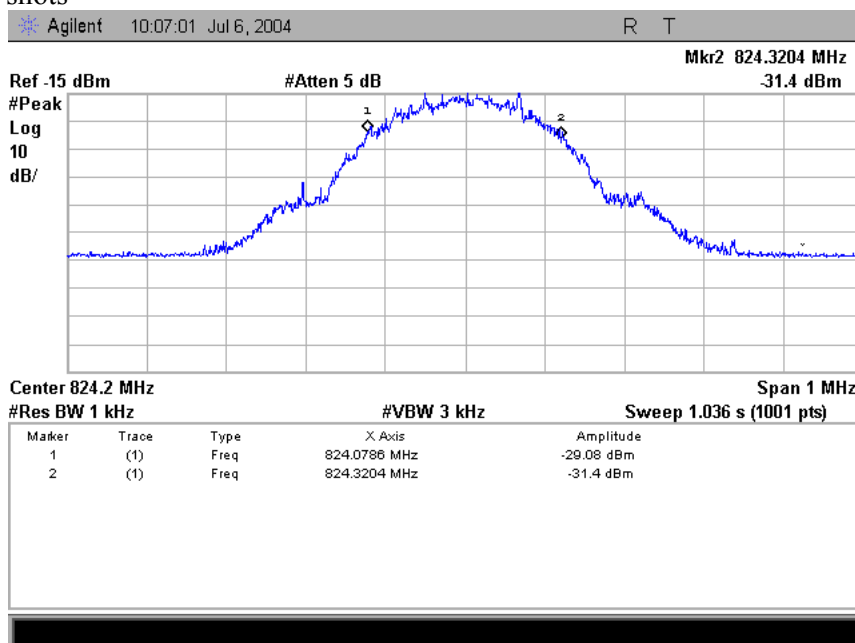


Picture 3: 99% occupied bandwidth, channel 128 GMSK

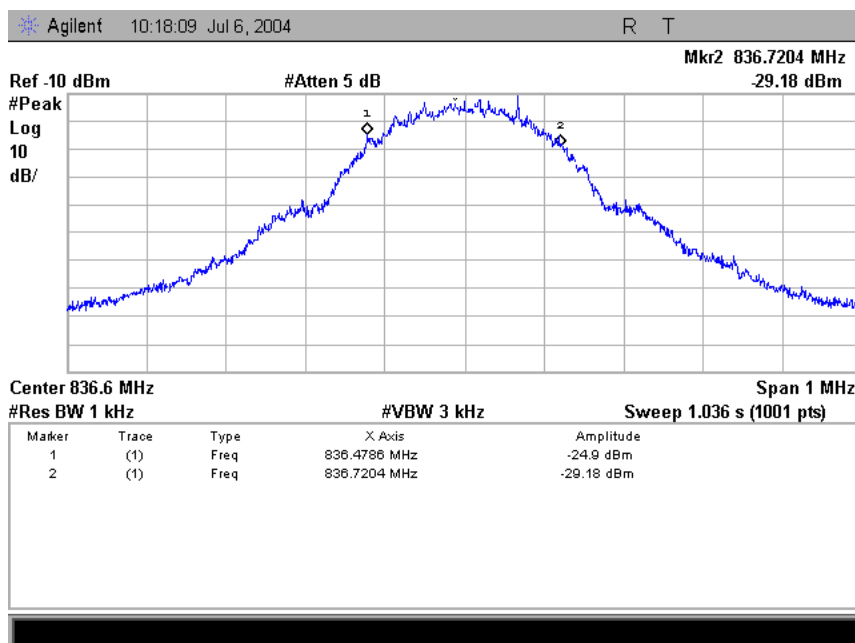


Picture 4: 99% occupied bandwidth, channel 190 GMSK

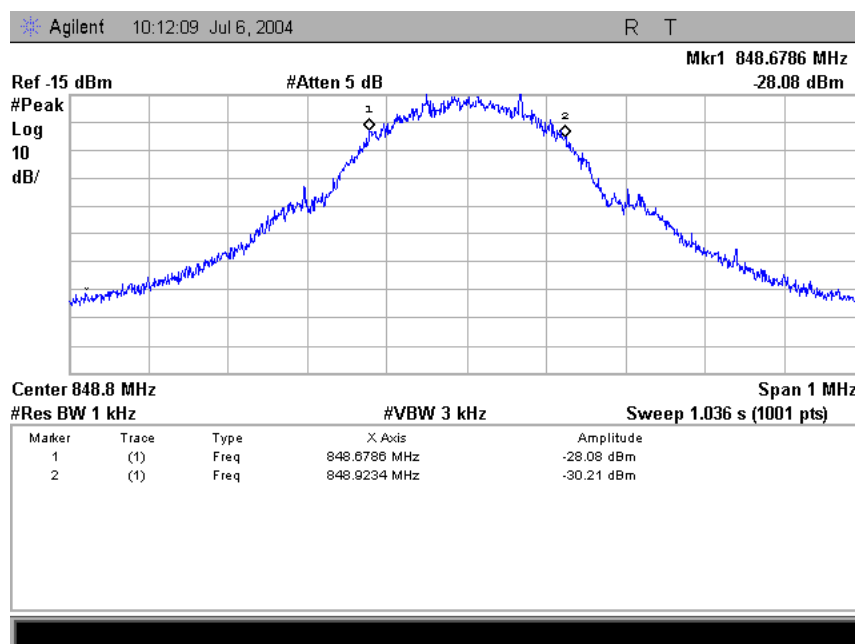


Picture 5: 99% occupied bandwidth, channel 251 GMSK

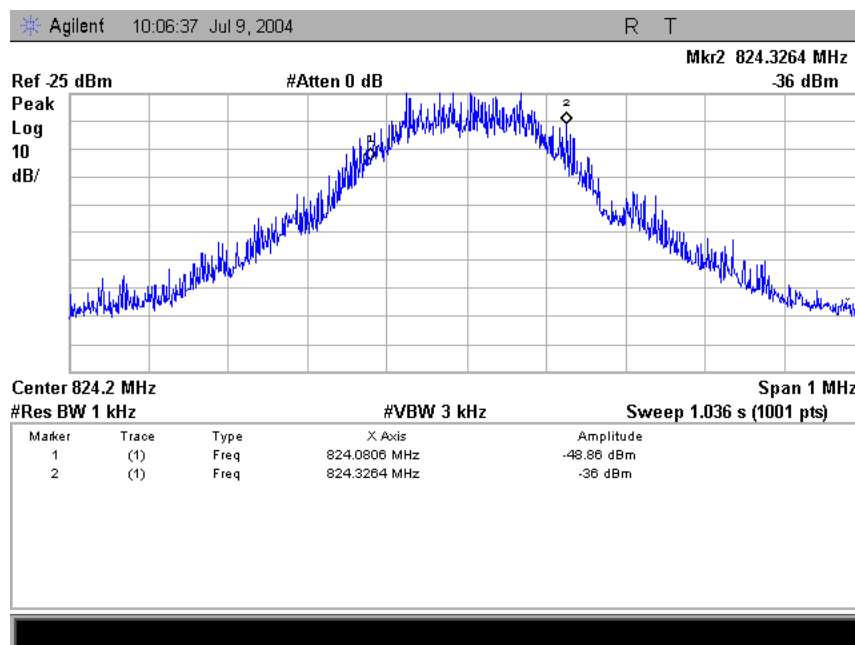

Picture 6: 99% occupied bandwidth, channel 128 EDGE 8 PSK

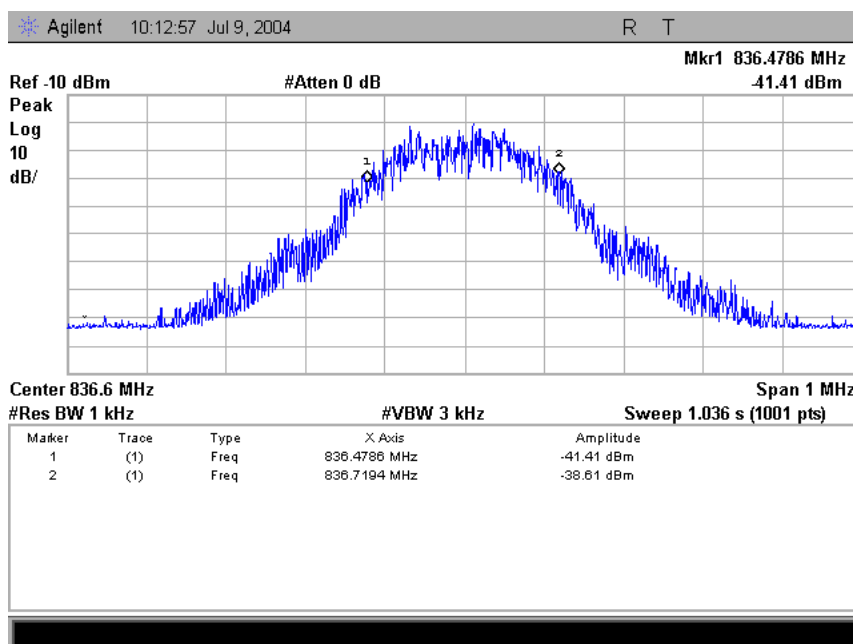

Picture 7: 99% occupied bandwidth, channel 190 EDGE 8 PSK

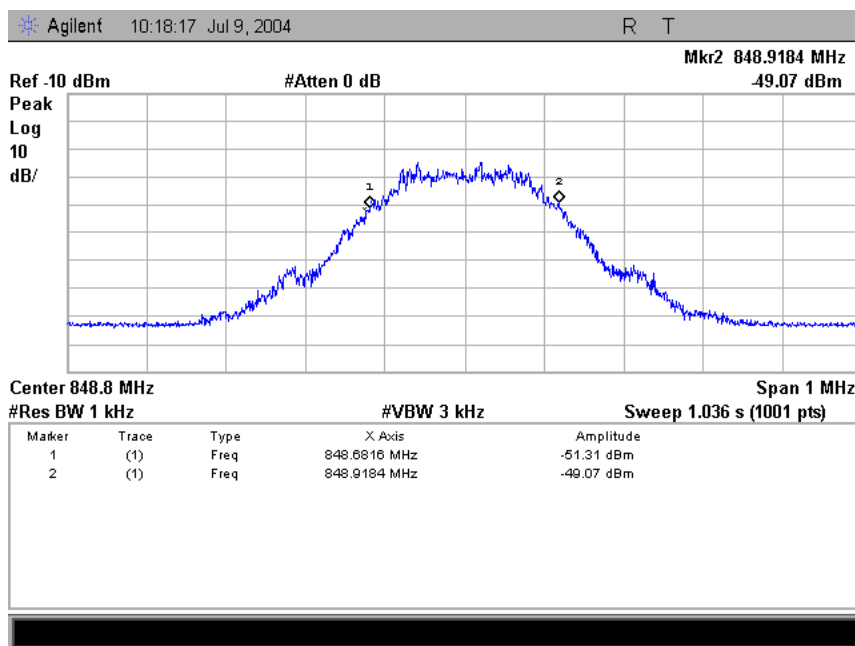


Picture 8: 99% occupied bandwidth, channel 251 EDGE 8 PSK

9 BAND-EDGE COMPLIANCE

EUT	06301		
Accessories	06304		
Temp, Humidity, Air Pressure	24 °C	65 RH%	999 hPa
Date of measurement	July 21, 2004		
FCC rule part	§22.917 (b)		
RSS-132 section	4.5		
Measured by	Marko Turkkila		

9.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

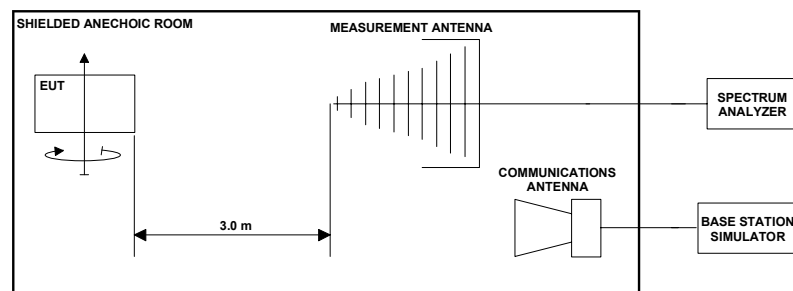

Picture 9: Test setup for band edge compliance measurement

Band edge power measurements were made as radiated measurement similar to radiated power measurement. The worst turntable angle, antenna height and antenna polarisation found in radiated power measurements were used.

Base station simulator was used to set the EUT channel, modulation and power level.

Power level at the band edge was measured with spectrum analyzer. Measured reading was corrected in the spectrum analyzer by setting correction factor calculated in radiated power measurement section (7.5), as offset.

9.2 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission
EUT channel	Channels listed in section 9.4
EUT TX power level	GSM 5 (+33dBm) EDGE E8 (+27dBm)

9.3 Limit

Frequency [MHz]	Level [dBm]
<824	-13
>849	-13

9.4 Results

The line in the screen shots is the -13dBm limit line. The results were corrected with “offset” value described in test setup section.


Table 7: Band edge compliance measurement results, GSM GMSK modulation. Ch 128 flip closed. Ch 190 Flip open.

EUT Channel	Offset [dB]	Band edge power [dBm]	EUT Orient.	Antenna Pol.	Antenna Height	Turn table Angle
128	32.17	-13.12	H	H	1.64	79.0
190	32.49	-13.42	H2	H	1.55	8.0


Table 8: Band edge compliance measurement results, GSM EDGE 8 PSK modulation. Ch 128 flip closed. Ch 190 Flip open.

EUT Channel	Offset [dB]	Band edge power [dBm]	EUT Orient.	Antenna Pol.	Antenna Height	Turn table Angle
128	32.17	-19.0	H	H	1.64	79.0
190	32.49	-19.37	H2	H	1.52	8.0


9.5 Screen shots

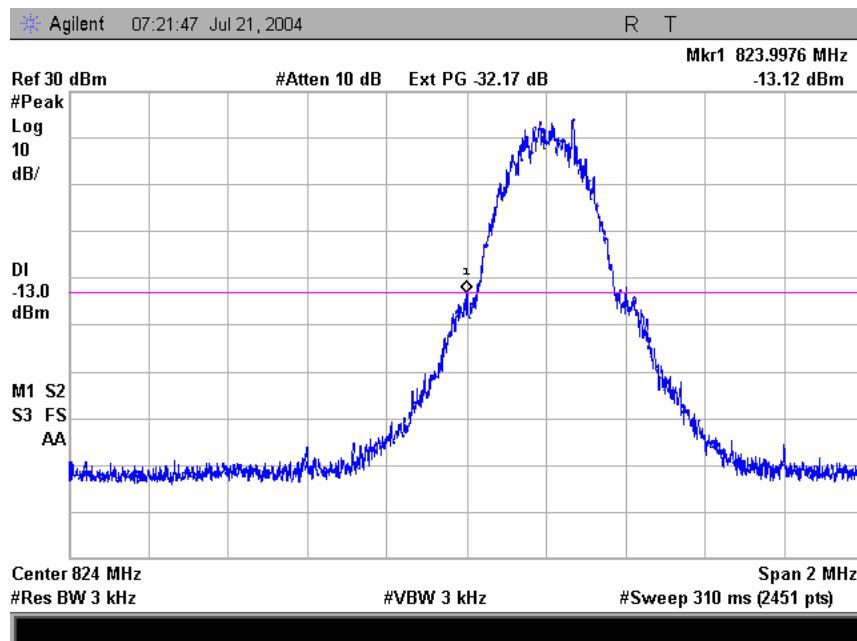


Picture 10: GSM GMSK, channel 128. Flip closed

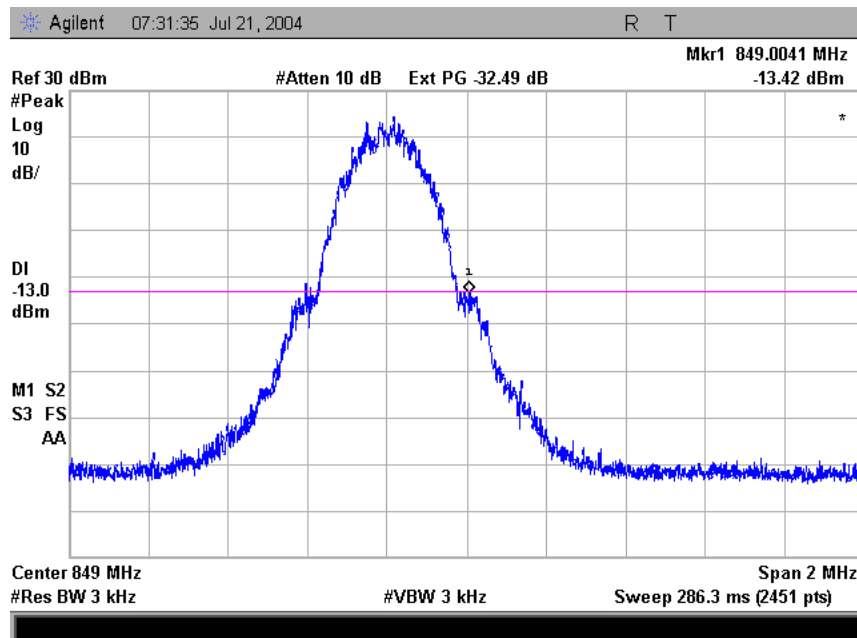

Picture 11: GSM GMSK, channel 190. Flip open.

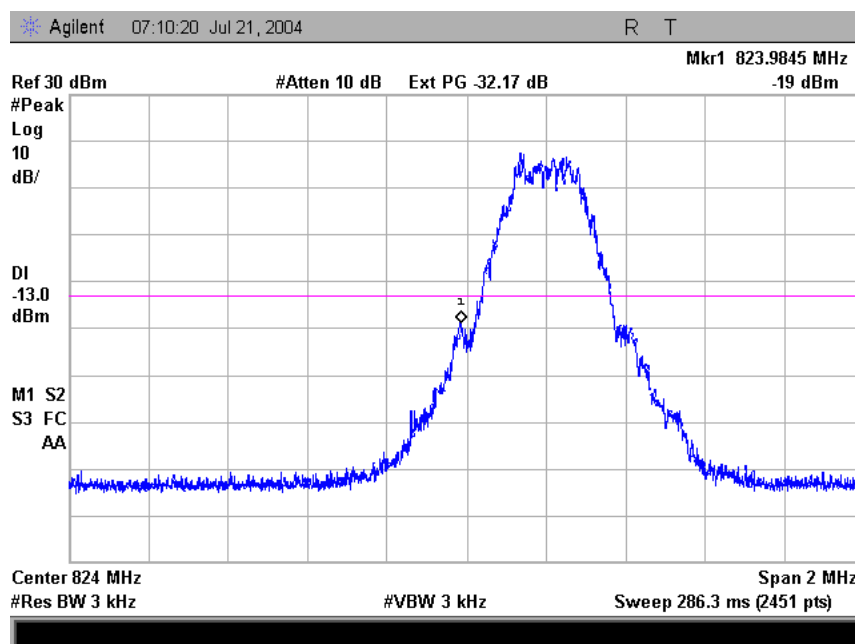

Picture 12: GSM EDGE 8 PSK, channel 128. Flip closed

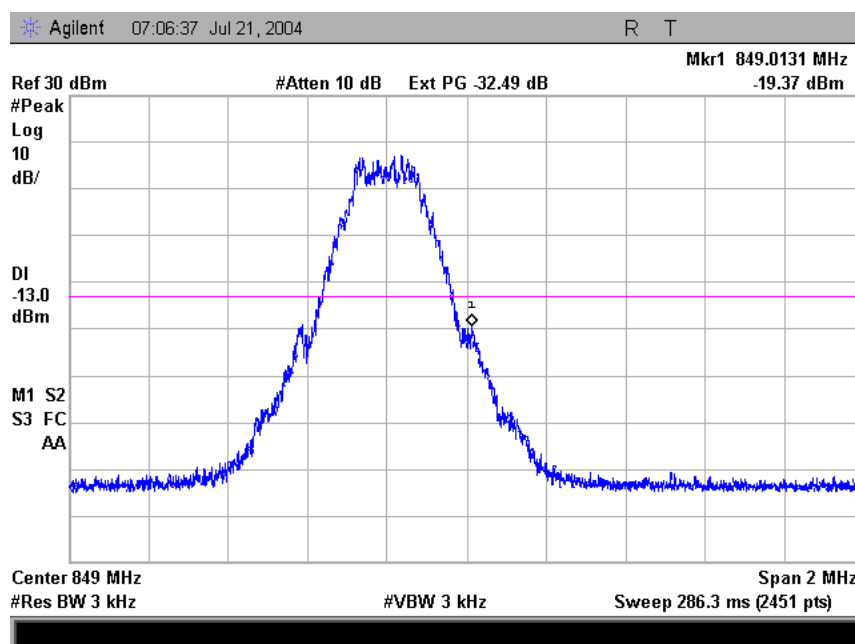

Picture 13: GSM EDGE 8 PSK, channel 190. Flip open.

10 RADIATED SPURIOUS EMISSIONS


EUT	06302		
Accessories	06304		
Temp, Humidity, Air Pressure	23 °C	51 RH%	1009 hPa
Date of measurement	July 14-21, 2003		
FCC rule part	§22.917 (b), §2.1053		
RSS-132 section	4.5		
Measured by	Marko Turkkila		

10.1 Test setup


Band reject and high pass filters was used to prevent overloading the spectrum analyzer and preamplifier.

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

The test was done using an automated test system, where the measurement equipment were controlled by a computer.

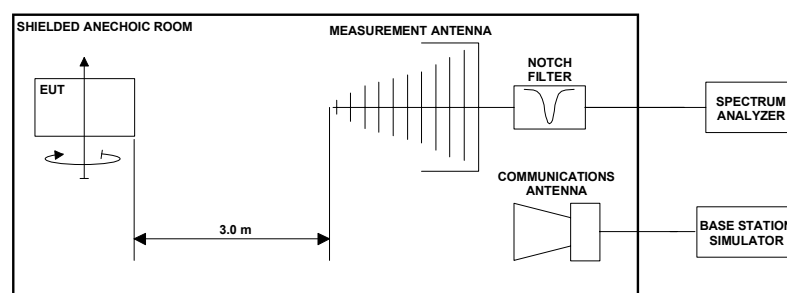

Picture 14: Test setup for radiated spurious emissions measurement on below 3 GHz frequencies

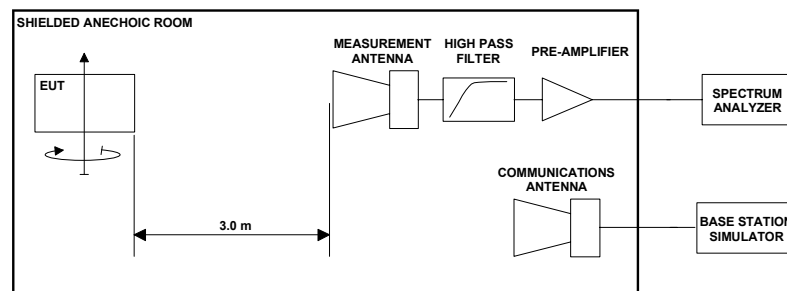

Picture 15: Test setup for radiated spurious emissions measurement on 3 GHz and above frequencies

10.2 Test method

1. The emissions were searched and maximized by moving the turntable, changing the measuring antenna polarization and manipulating the EUT.
2. Levels of suspicious signals and levels of EUT transmitter harmonics were recorded.
3. The recorded levels were corrected in the automated test system with the correction factor given by a substitution calibration made before the measurements. The calibration is made separately for vertical and horizontal polarization and the system uses different correction factors depending on the measuring antenna polarization.
4. The corrected values, giving the EUT radiated spurious emission levels as e.i.r.p, are reported.

10.3 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission,
EUT channel	190
EUT TX power level	GSM 5 (+33dBm) EDGE E8 (+27dBm)

10.4 Limit

Frequency [MHz]	Level [dBm]
30 – 19100	-13

10.5 Results

The formula below was used to calculate the ERP of the spurious emissions.

$$\begin{aligned} P_{\text{Emission[dBm]}} &= P_{\text{Measured[dBm]}} + (P_{\text{SubstRX[dBm]}} - P_{\text{SubstTX[dBm]}} + L_{\text{Cable[dB]}} - G_{\text{Antenna[dBi]}}) \\ &= P_{\text{Measured[dBm]}} + CF_{\text{[dB]}} \end{aligned}$$

where the variables are as follows:

$P_{\text{Measured [dBm]}}$	Measured emission level (from step 2 in 10.2)
$P_{\text{Subst_TX [dBm]}}$	Signal generator power (from step 4 in 10.2) fed to the substituting antenna
$P_{\text{Subst_RX [dBm]}}$	Measured power (from step 4 in 10.2) in the substitution calibration
$L_{\text{Cable [dB]}}$	Loss of the cable between antenna and signal generator (from step 4 in 10.2)
$G_{\text{Antenna [dBi]}}$	Gain of the substitutive antenna over isotropic radiator
$CF_{\text{[dB]}}$	Correction factor combined from the $P_{\text{Subst_TX [dBm]}}$, $L_{\text{Cable [dB]}}$ and $G_{\text{Antenna [dBi]}}$ used in the automated test software

Measurement system noise level was least 15 dB below the spurious emission limit. Only levels of suspicious signals and transmitter harmonic frequencies, which were above the measurement system noise, are reported.

In the tables below, the abbreviated column titles are:

f [MHz]	Measured frequency
EUT V	EUT orientation, Vertical
Pol H / V	Measuring antenna polarization, Horizontal / Vertical
Height [m]	Measuring antenna height from reference ground in meters
TT [deg]	Turn table angle in degrees

Table 9: Radiated spurious emission levels, GSM GMSK, Channel 190, Flip closed

f [MHz]	P_{Measured} [dBm]	CF [dB]	P_{Emission} [dBm]	EUT V	Pol. H / V	Height [m]	TT [deg]
1673.2	-64.7	18.4	-46.4	V	--	1.6	159
2509.8	-73.2	33.3	-39.9	V	--	2.6	39
3346.4	-48.9	-4.6	-53.5	V		1.1	207
4183	-53.2	-3.7	-56.9	V	--	1.2	165
5019.6	-55.5	-0.4	-55.9	V	--	1.3	246
5856.2	-53.5	2.7	-50.9	V	--	1.6	208
6692.8	-55.9	6.3	-49.6	V	--	1.3	222
7053	-56.8	7.8	-49.0	V	--	1.5	139
7529.4	-57.7	8.0	-49.7	V	--	1.6	272
8366	-58.3	8.9	-49.4	V	--	1.4	152
9202.6	-55.3	9.1	-46.2	V	--	1.8	234

Table 10: Radiated spurious emission levels, GSM GMSK, Channel 190 Flip open

f [MHz]	P_{Measured} [dBm]	CF [dB]	P_{Emission} [dBm]	EUT V	Pol. H / V	Height [m]	TT [deg]
1673.2	-64.6	18.4	-46.3	V	--	1.5	352
2509.8	-68.5	33.3	-35.2	V	--	2	56
3346.4	-50.6	-4.6	-55.2	V		1.3	200
4183	-54.2	-2.8	-57.1	V		1.2	195
5019.6	-57.6	-0.4	-58.0	V	--	1.3	259
5856.2	-55.3	2.7	-52.6	V	--	1.3	103
6692.8	-57.7	6.3	-51.4	V	--	1.8	51
7529.4	-55.6	8.0	-47.6	V	--	1.6	270
8366	-58.3	8.1	-50.2	V		1.1	233
9202.6	-57.7	9.1	-48.7	V	--	1.7	267
10039.2	-57.1	9.8	-47.3	V	--	1.2	177

Table 11: Radiated spurious emission levels, GSM EDGE 8 PSK, Channel 190, Flip closed


f [MHz]	P_{Measured} [dBm]	CF [dB]	P_{Emission} [dBm]	EUT V	Pol. H / V	Height [m]	TT [deg]
1673.2	-72.6	18.4	-54.2	V	--	2.4	360
2509.8	-72.0	32.3	-39.7	V		2.4	24
3346.4	-55.5	-4.6	-60.1	V		1.2	182
4183	-54.7	-3.7	-58.4	V	--	1	142
5019.6	-59.2	-0.4	-59.6	V	--	1.3	124
5856.2	-56.5	2.7	-53.9	V	--	1	209
6692.8	-59.1	6.3	-52.9	V	--	1.1	221
7053	-58.9	7.8	-51.1	V	--	1.4	265
7529.4	-62.3	8.0	-54.3	V	--	1.1	182
8366	-63.4	8.9	-54.6	V	--	1.3	331
9202.6	-62.5	8.2	-54.3	V		2.7	137

11 FREQUENCY STABILITY, TEMPERATURE VARIATION

EUT	06303		
Accessories	06304		
Temp, Humidity, Air Pressure	- °C	- RH%	- hPa
Date of measurement	July 19, 2004		
FCC rule part	§2.1055 (a)(1)(b)		
RSS-132 section	6.3		
Measured by	Matti Virkki		

11.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

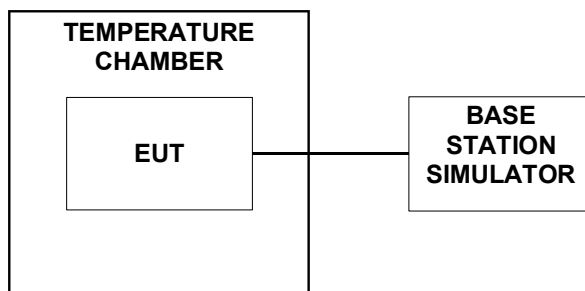

11.2 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission
EUT channel	190
EUT TX power level	GSM 5 (+33dBm)

11.3 Limit

Frequency deviation [ppm]
± 2.5

11.4 Test method

1. The climate chamber temperature was set to the minimum value and the temperature was allowed to stabilize.
2. The EUT was placed in the chamber
3. The EUT was set in idle mode for 45 minutes.
4. The EUT was set to transmit.
5. The transmit frequency error was measured immediately
6. The steps 3 - 5 were repeated for each temperature

11.5 Results

Table 12: Frequency stability over temperature measurement results

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
-30	***	
-20	12	0.006
-10	4.9	0.003
0	11.1	0.006
10	11.5	0.006
20	12.2	0.006
30	8.4	0.004
40	9.1	0.005
50	10.4	0.006

*** Call could not be made.

12 FREQUENCY STABILITY, VOLTAGE VARIATION

EUT	06303		
Accessories	06304		
Temp, Humidity, Air Pressure	23 °C	68 RH%	1014 hPa
Date of measurement	July 30, 2004		
FCC rule part	§2.1055 (d)(1)(2)		
RSS-132 section	6.3		
Measured by	Marko Turkkila		

12.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.



Picture 16: Test setup for frequency deviation over voltage variation measurement

12.2 EUT operation mode

EUT operation mode	TX on, 1 time slot transmission,
EUT channel	190
EUT TX power level	GSM 5 (+33dBm)

12.3 Limit

Frequency deviation [ppm]
± 2.5

12.4 Test method

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

12.5 Results

Table 13: Frequency stability over voltage variation measurement results

Level	Voltage [V]	Deviation [Hz]	Deviation [ppm]
Nominal	3.7	7.4	0.004
Battery cut-off point	***		

*** The EUT did not operate below the nominal voltage.

13 TEST EQUIPMENT

All testing and measurement equipment has been calibrated once a year, except the antennas which are calibrated every two years.

13.1 Conducted measurements

Equipment	Manufacturer	Model
Spectrum Analyzer	Agilent	E7405A
GSM Base station simulator	Anritsu	MT8820A
Signal Generator	Rohde & Schwarz	SMR27
Attenuator 3 dB	Narda	779-3
Power splitter	Mini Circuits	ZFSC-2-4
Power splitter	Narda	4426-2
Temperature chamber	Finero	LK 540
DC power supply	Delta Elektronika	SM 120-13
Multimeter	Fluke	179

13.2 Radiated measurements

Equipment	Manufacturer	Model
Spectrum Analyzer	Agilent	E7405A
GSM Base station simulator	Anritsu	MT8820A
Antenna	Chase	CBL 6140
Antenna	Schwarzbeck	BBHA 9120D
Antenna	Chase	CBL 6141
Antenna	EMCO	3115
Signal Generator	Rohde & Schwarz	SMR27
Tunable notch filter	Wainwright Instruments	WRCD 1700/2000-0.2/40-10EEK
Tunable notch filter	Wainwright Instruments	WRCT 800/960-0.2/40-8EEK
High pass filter	Wainwright Instruments	WHK3/18GST
High pass filter	Wainwright Instruments	WHK 2.1/18GST
Band Reject filter	Wainwright instruments	WRCT2400/2483-45/10EE
Pre-amplifier	JCA	118-400
Pre-amplifier	Agilent	87405B
Turn table / antenna mast controller	EMCO	2090
Antenna mast	EMCO	2075-2

14 TEST SETUP PHOTOGRAPHS

Test setup photographs can be found in a separate document

T04-063A-EMC_PHOTOS.doc