

Recognized by the
Federal Communications Commission
Anechoic chamber registration no: 90462 (FCC)
Anechoic chamber registration no: 3436 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 081/94-D0



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test Report No.: 2-3752-01-01/04

Test Standards: FCC Part 15 §15.247

CANADA RSS-210

Type: RA-3 / Nokia 9500b Communicator

FCC ID: PDNRA-3

IC : 661R-RA3

Table of Contents

1	GENERAL INFORMATION	3
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of applicant.....	4
1.4	Application details.....	4
1.5	Test item.....	5
1.6	Test standards:	5
2	TECHNICAL TEST	6
2.1	Summary of test results	6
2.2	Technical Test.....	7
2.2.1	Antenna Gain § 15.204.....	7
2.2.2	Spectrum Bandwidth of a DSSS System §15.247(a).....	8
2.2.3	Maximum Peak Output Power § 15.247 (b) (1)	12
2.2.4	Power spectral density §15.247 (d)	21
2.2.5	Band-edge compliance of conducted emissions §15.247 (c)	25
2.2.6	Emission Limitations - Conducted (Transmitter) § 15.247 (c) (1)	31
2.2.7	Spurious Emission (radiated) § 15.247 (c) (1).....	35
2.2.8	Conducted emissions § 15.107/207	41
2.2.9	Emissions Limitations - Receiver radiated § 15.209	42
3	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	46

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.


Responsibility for test :

2004-09-27 RSC 8414 Ames H.

Date

Section

Name



Signature


Technical responsibility for area of testing :

2004-09-27 RSC8412 Hausknecht D.

Date

Section

Name



Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : info@ict.cetecom.de

Internet : www.cetecom-ict.de

Accredited testing laboratory

DAR-registration number : TTI-P-G-081/94-D0

Accredited BluetoothTM Test Facility (BQTF)

BLUETOOTHTM is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

1.3 Details of applicant

Name : Nokia Corporation

Street : P.O. Box 68

City : 33721 Tampere

Country : Finland

Telephone: +358 (0) 718 04 6800

Telefax :

Contact : Janne Ilkka

Telephone: +358 (0) 503 83 8783

1.4 Application details

Date of receipt of application : 2004-09-13

Date of receipt of test item : 2004-09-13

Date of test : 2004-09-14 to 2004-09-15

1.5 Test item

Type of equipment : GSM Mobile Handset
Type name : RA-3 / Nokia 9500b Communicator
Hardware version : 5200
Software version : 04.22(00)

Manufacturer : Nokia Corporation
Address : Keilalahdentie 4
City : 02150 Espoo
Country : Finland

Frequency : 2412 to 2462 MHz
Type of modulation : 17M0P7D (DSSS)
Number of channels : 11
Antenna : Integral antenna
Power supply (normal) : 3,7V DC Li-Polymer Battery
Output power WLAN : EIRP: 22.73 dBm / 187.5 mW
Transmitter Spurious (worst case) : No traceable peak found
Receiver Spurious (worst case) : No traceable peak found

FCC ID : **PDNRA-3**
Certification No. IC : **661R-RA3**
Open Area Test Site IC No. : 3436
IC Standards : RSS210 Issue 5 November 2001

ATTESTATION:

DECLARATION OF COMPLIANCE: I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory Manager :

2004-09-15

RSC 8414


Ames H.

Date

Section

Name

Signature

**1.6 Test standards:**

FCC Part 15 §15.247

CANADA RSS-210

2 Technical test

2.1 Summary of test results

FCC Part 15:

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-1992 clause 4.2.

Antennas conform with ANSI C63.2-1996 item 15.

9 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave-guide horn

All measurement settings are according to FCC 15.35, 15.205, 15.209, 15.247 and the „Measurement guidelines for DSSS systems“.

Test set-up:

We measured at 11 Mbit/s (DSSS)

We also used special test software to set the samples in the required modes.

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

The product fulfills also the requirements for CANADA RSS-210.

FINAL VERDICT : PASS

2.2 Technical Test

2.2.1 Antenna Gain

§ 15.204

The antenna gain of the complete system is calculated by the difference of conducted power of the module and the radiated power in EIRP with DSSS modulation including the correction factors.

	low channel	mid channel	high channel
Conducted power	24.14 dBm	24.01 dBm	23.89 dBm
Radiated power (EIRP)	22.55 dBm	22.73 dBm	22.55 dBm
Gain	-1.59 dBi	-1.28 dBi	-1.34 dBi

2.2.2 Spectrum Bandwidth of a DSSS System

§15.247(a)

6 dB bandwidth

TEST CONDITIONS		6 dB BANDWIDTH (kHz)		
Frequency (MHz)		2412	2437	2462
T _{nom} (23.0)°C	V _{nom} (3.7)V	11673	11623	11523
Measurement uncertainty		±1kHz		

RBW=100 kHz / VBW=100 kHz

LIMIT

SUBCLAUSE §15.247(a) (2)

The minimum 6dB bandwidth shall be at least 500 kHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

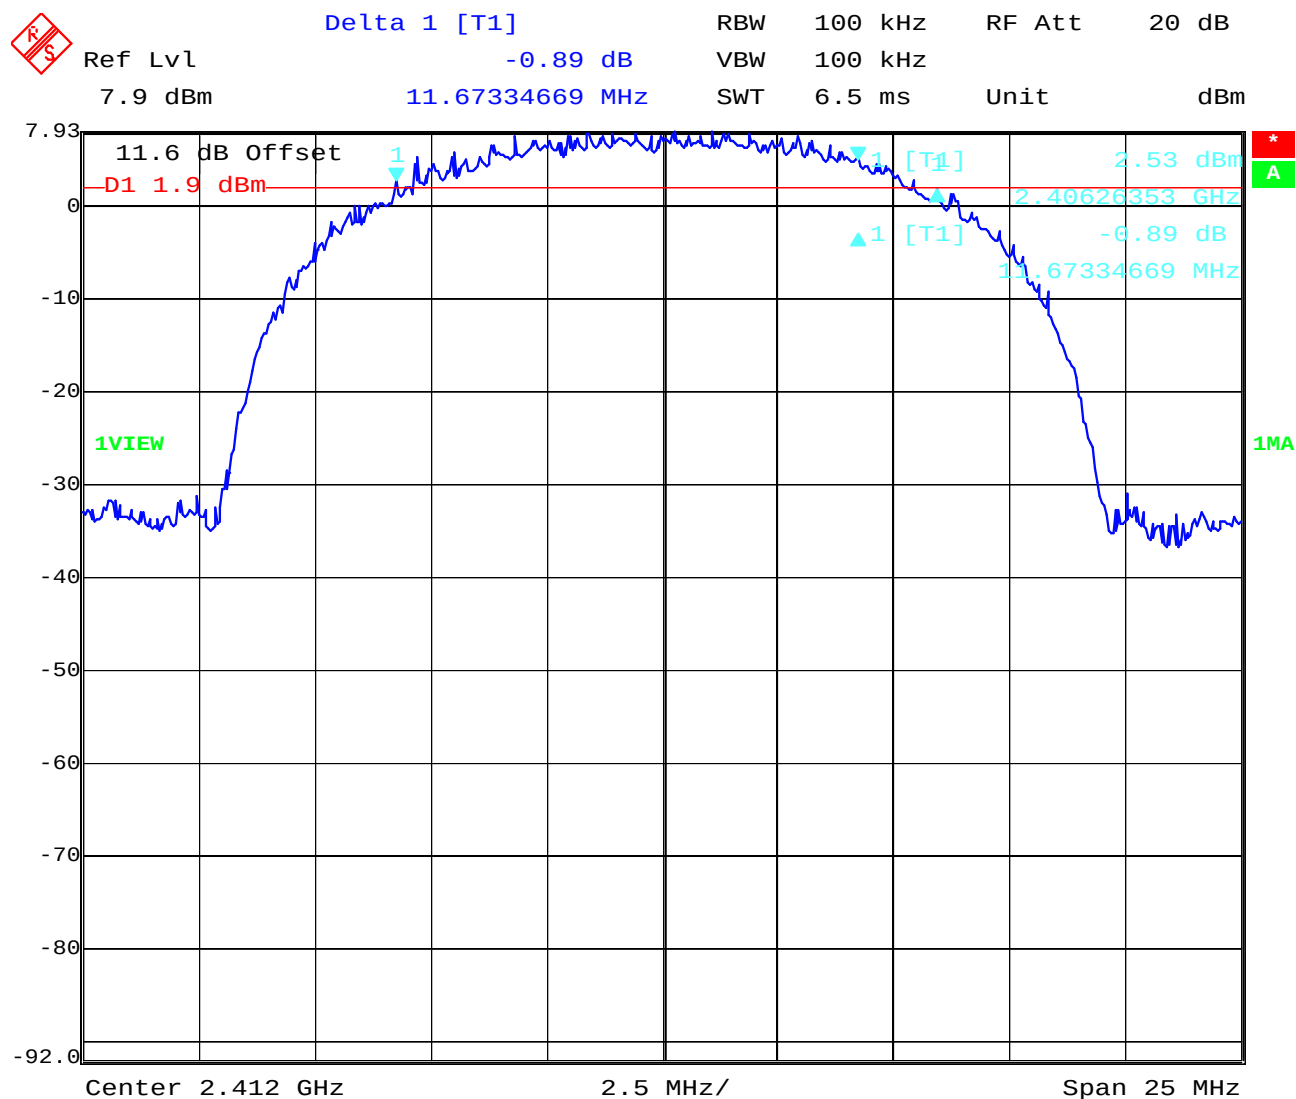
17 – 24 . 64

Spectrum Bandwidth of a DSSS System

§15.247(a)

6 dB bandwidth

Channel 1



Date: 14.SEP.2004 13:55:06

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

§15.247(a)

Channel 6



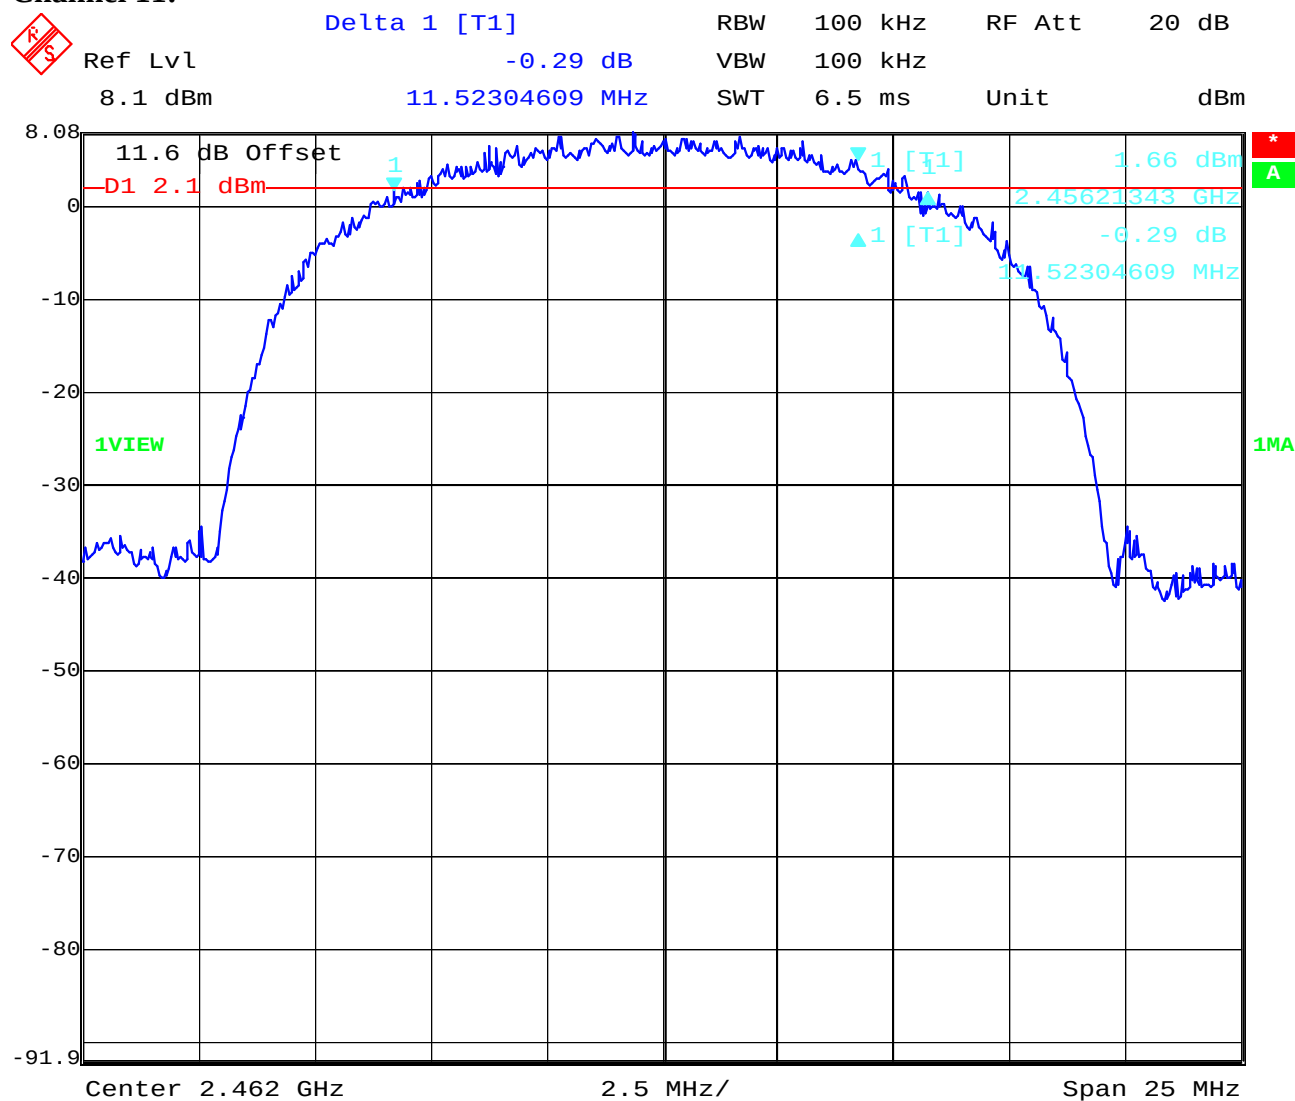
64

Spectrum Bandwidth of a DSSS System

§15.247(a)

6 dB bandwidth

Channel 11:



Date: 14.SEP.2004 14:01:58

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

2.2.3 Maximum Peak Output Power

§ 15.247 (b) (1)

(CONDUCTED)

DSSS System

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2412	2437	2462
$T_{nom}(23.0)^{\circ}C$	$V_{nom}(3.7)V$	Peak :23.47 AV : 16.85	Peak :23.34 AV : 16.99	Peak :23.22 AV : 16.81
Correction factor		+0.67 dB	+0.67 dB	+0.67 dB
Final corrected result		Peak :24.14 AV : 17.52	Peak :24.01 AV : 17.33	Peak :23.89 AV : 17.48
Measurement uncertainty		$\pm 0.5dB$		

RBW/VBW : 10 MHz

The correction factor is calculated by $10 \cdot \log(\text{measured BW} / \text{used BW})$ (dB)

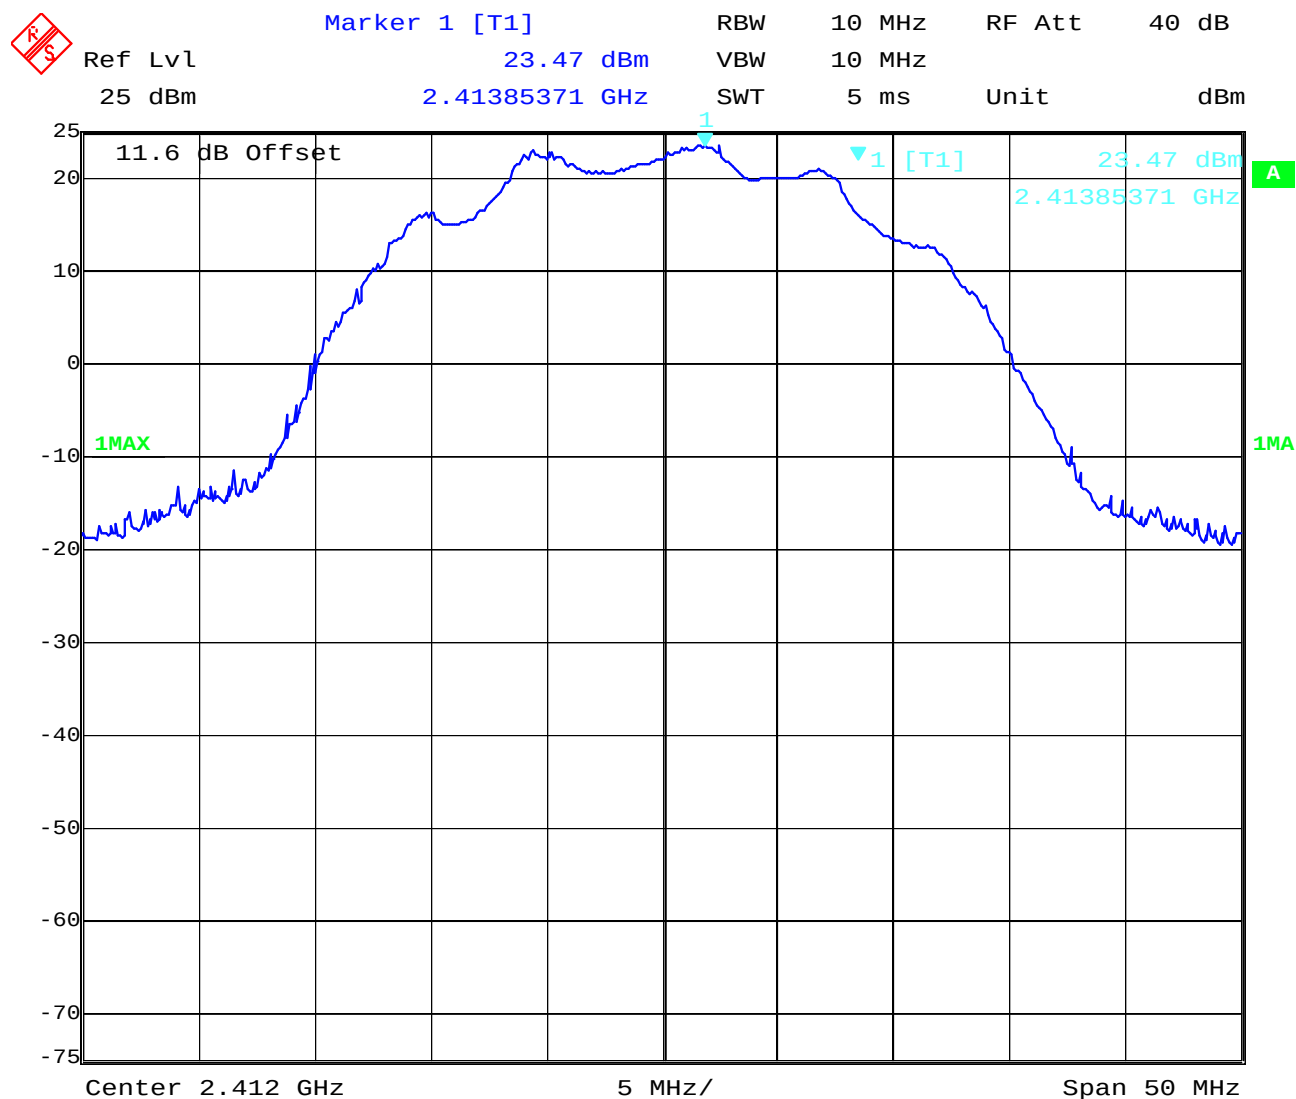
-Here 0.67 dB

LIMIT

SUBCLAUSE § 15.247 (b) (1)

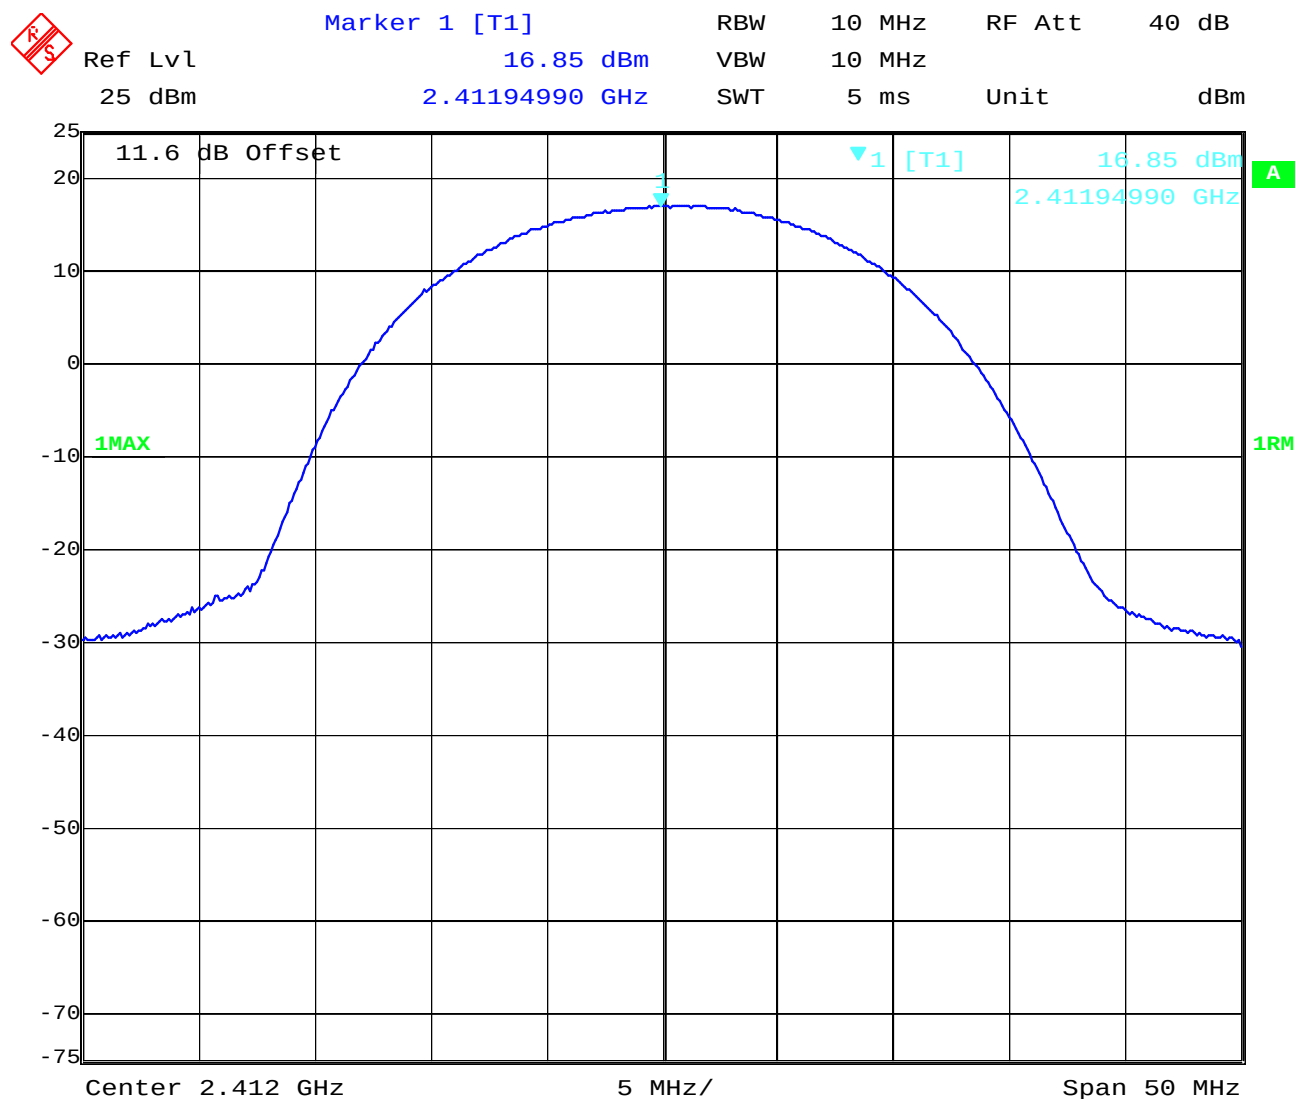
Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt/ 30dBm

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Maximum Peak Output Power
DSSS System (CONDUCTED)****§ 15.247 (b) (1)****low channel peak**

Date: 14.SEP.2004 14:10:39

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

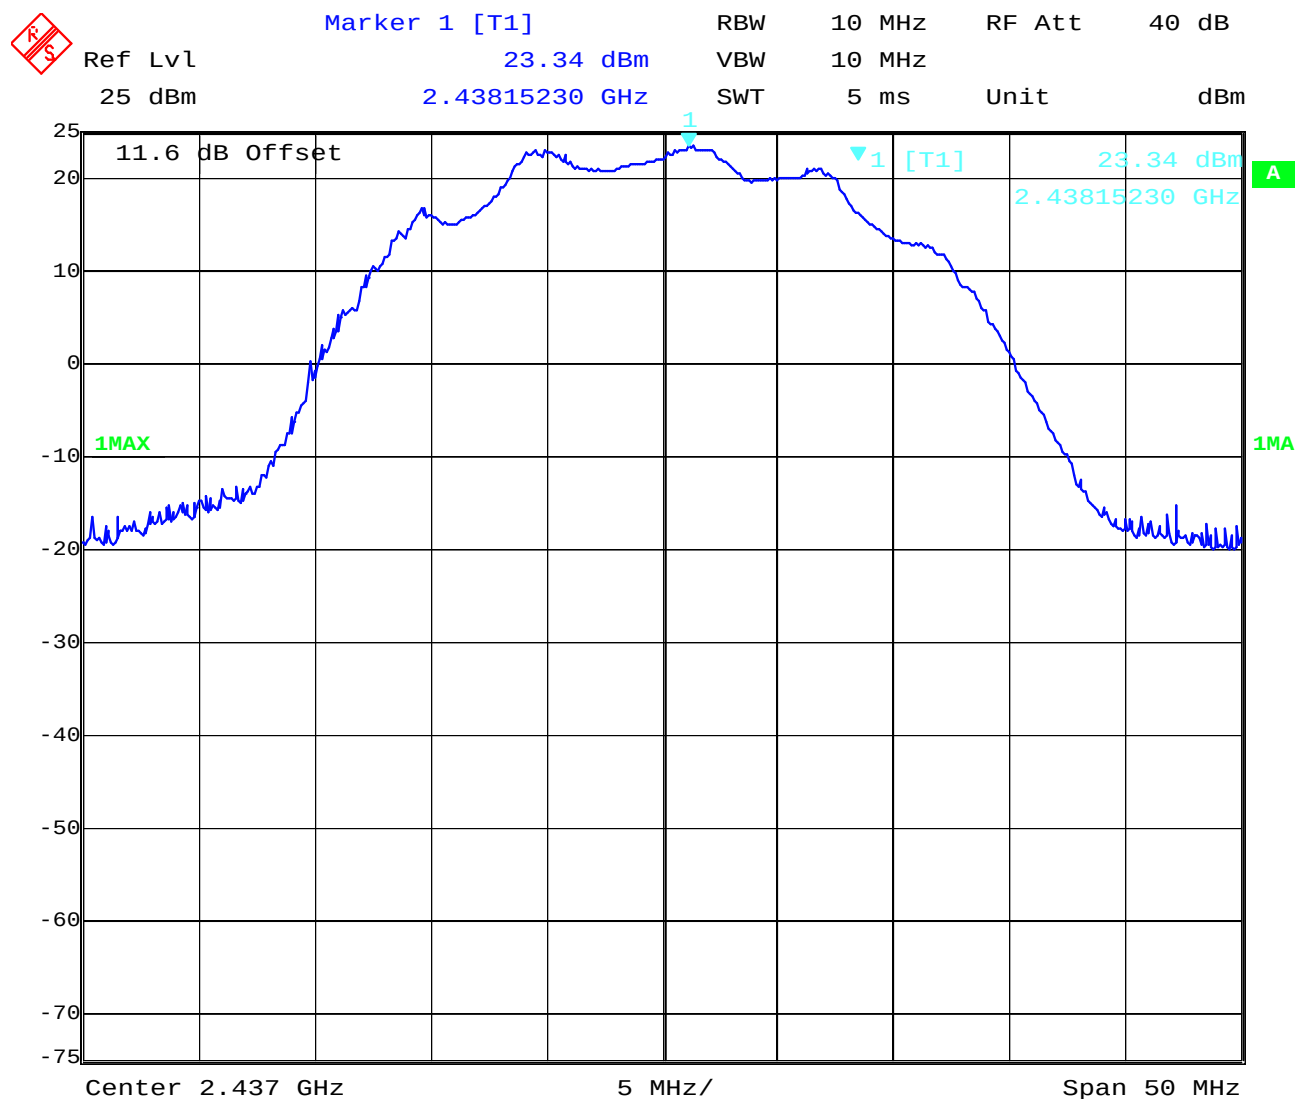
**Maximum Peak Output Power
DSSS System (CONDUCTED)****§ 15.247 (b) (1)****low channel AV**

Date: 14.SEP.2004 14:10:05

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

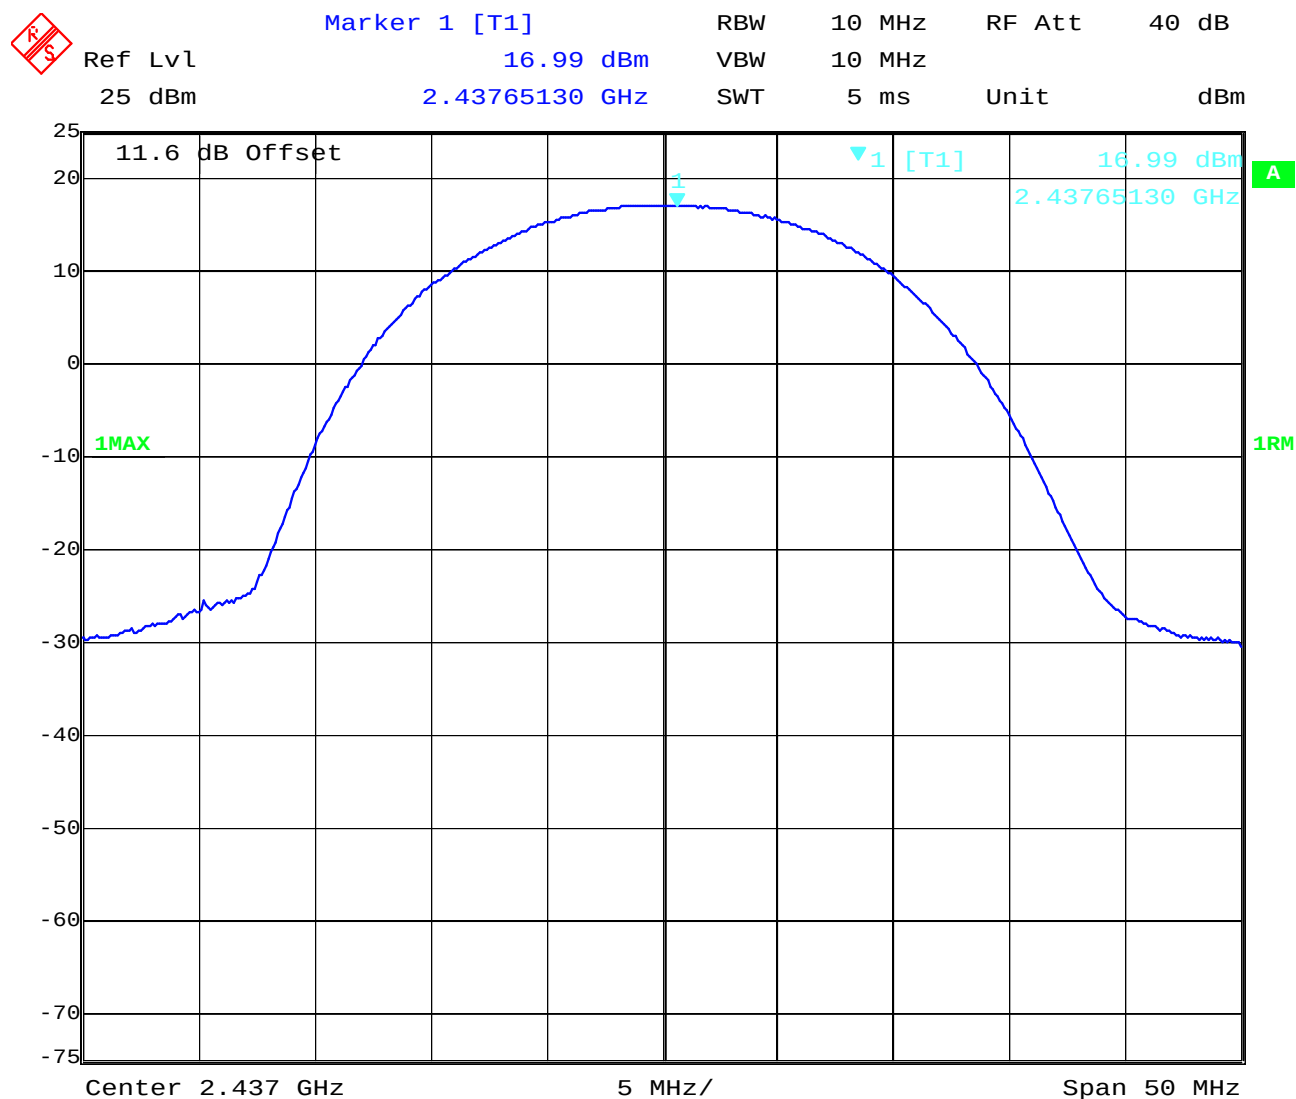
**Maximum Peak Output Power
DSSS System (CONDUCTED)****§ 15.247 (b) (1)**

mid channel peak



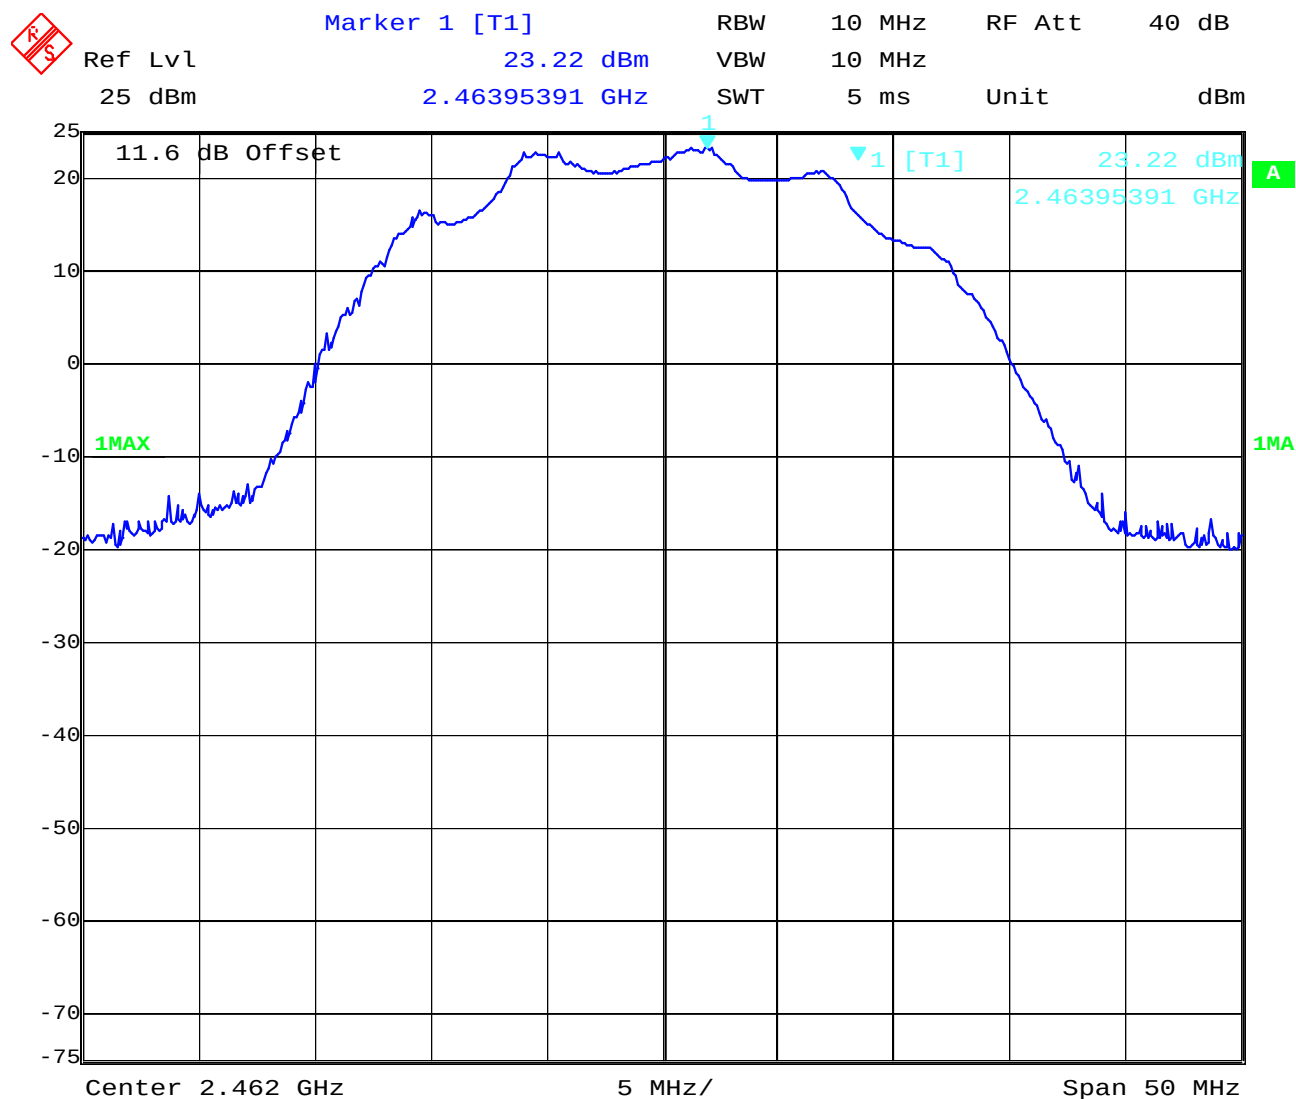
Date: 14.SEP.2004 14:09:10

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Maximum Peak Output Power
DSSS System (CONDUCTED)****§ 15.247 (b) (1)****mid channel AV**

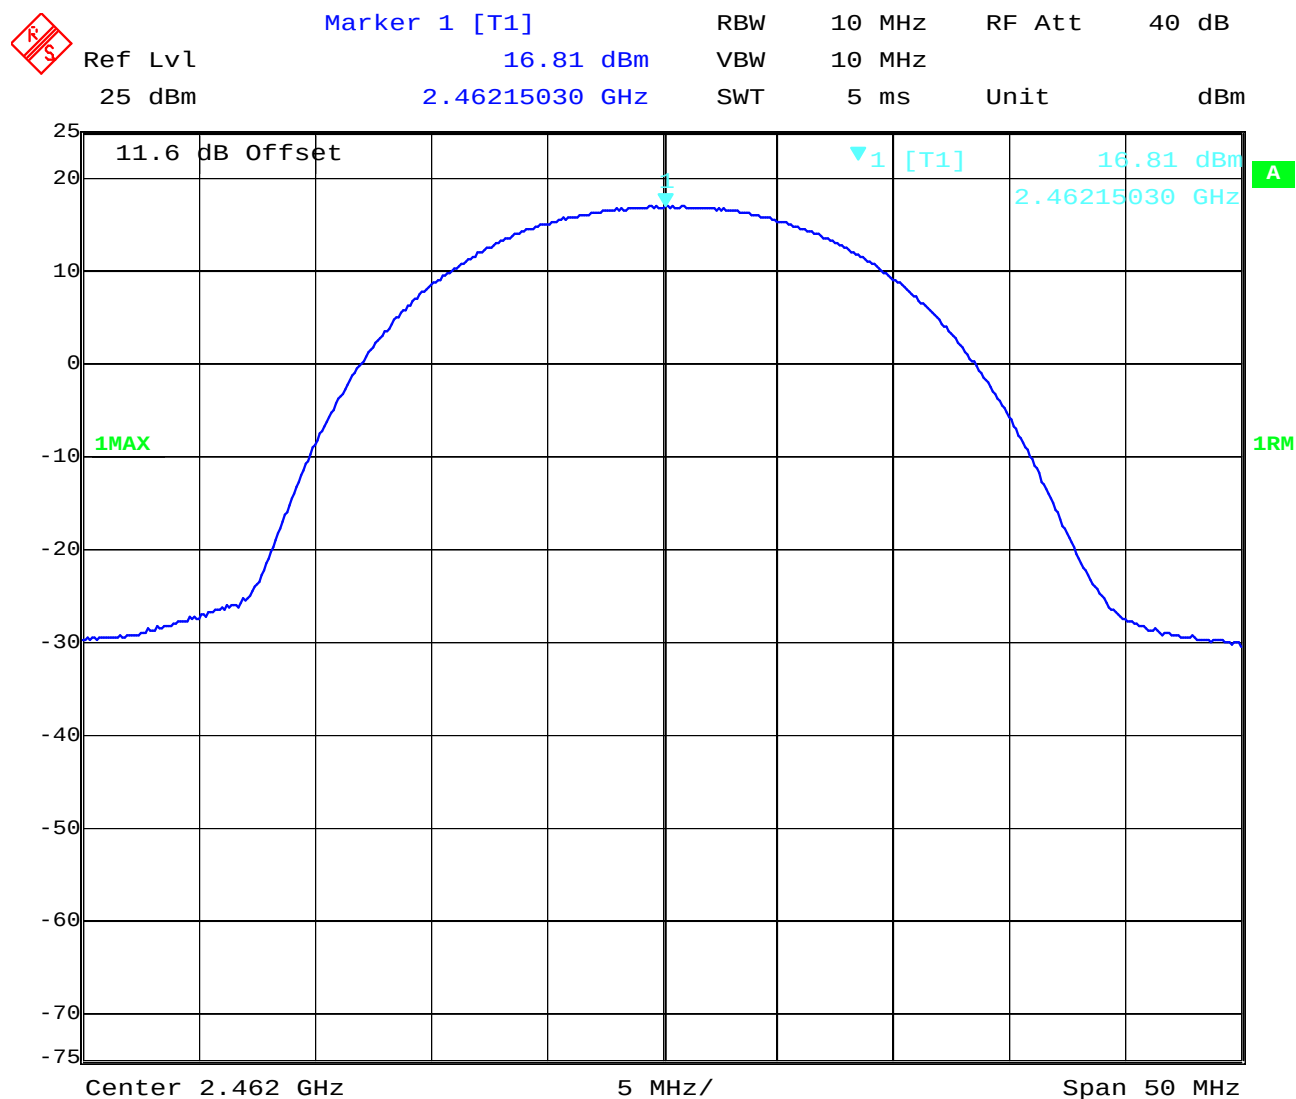
Date: 14.SEP.2004 14:09:35

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Maximum Peak Output Power
DSSS System (CONDUCTED)****§ 15.247 (b) (1)****high channel peak**

Date: 14.SEP.2004 14:08:29

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Maximum Peak Output Power
DSSS System (CONDUCTED)****§ 15.247 (b) (1)****high channel AV**

Date: 14.SEP.2004 14:08:04

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

**Maximum Peak Output Power
(RADIATED)**

§ 15.247 (b) (1)

DSSS System

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (mW)		
Frequency (MHz)		2412	2437	2462
T _{nom} (23.0)°C	V _{nom} (3.7)V	154.2 mW 21.88 dBm	160.7 mW 22.06 dBm	154.2 mW 21.88 dBm
Correction factor		+0.67 dB	+0.67 dB	+0.67 dB
Final corrected result		179.9 mW 22.55 dBm	187.5 mW 22.73 dBm	179.9 mW 22.55 dBm
Measurement uncertainty		±3dB		

RBW/VBW : 10 MHz
The correction factor is calculated by $10 \cdot \log (\text{measured BW} / \text{used BW})$ (dB)
- Here 0.67 dB
Measured at a distance of 3m
LIMIT
SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt / 30 dBm

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units e.g. mW)

G = power gain of the antenna in the direction of interest relative to the isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units e.g. cm)

or,

$$S = EIRP/4\pi R^2$$

where EIRP = equivalent isotropically radiated power

Calculation:

(Calculated for max. EIRP)

EIRP: 22.73 dBm (187.5 mW)

calculated at distance of 20 cm

$$\begin{aligned}\text{power density} &= 187.5/4\pi 20^2 \\ &= 0.037 \text{ mW/ cm}^2\end{aligned}$$

Limit:

1mW/ cm² is the reference level for general public exposure according to the OET Bulletin 65, Edition 97-01 Table 1.

2.2.4 Power spectral density**§15.247 (d)****DSSS System**

TEST CONDITIONS		RF POWER LEVEL IN 3 kHz BW		
Frequency (MHz)		2412	2437	2462
T_{nom}(22.4)°C	V_{nom}(3.7)V	-9.69 dBm	-10.75 dBm	-10.98 dBm
Measurement uncertainty		±3dB		

The measurement was performed with the power density function of the analyzer.
The correction factor from 1 Hz to 3 kHz is 34.77 dB.

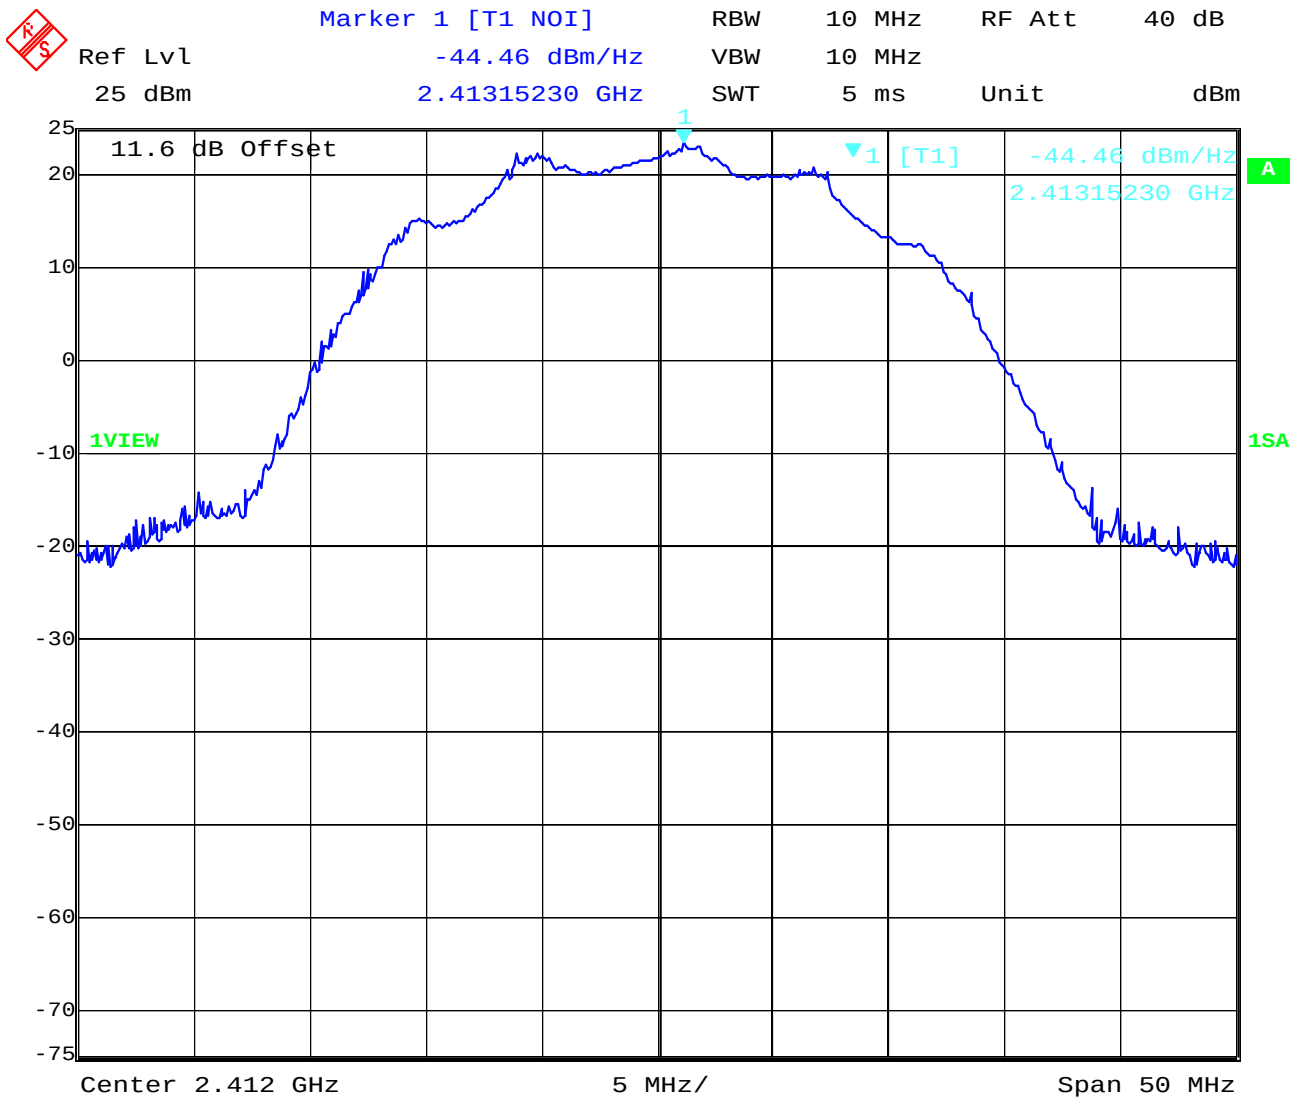
LIMIT**SUBCLAUSE §15.247(d)**

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band

Power Spectral Density
2412 MHz

§ 15.247 (d)

DSSS System



Date: 14.SEP.2004 14:14:55

LIMIT

SUBCLAUSE §15.247(d)

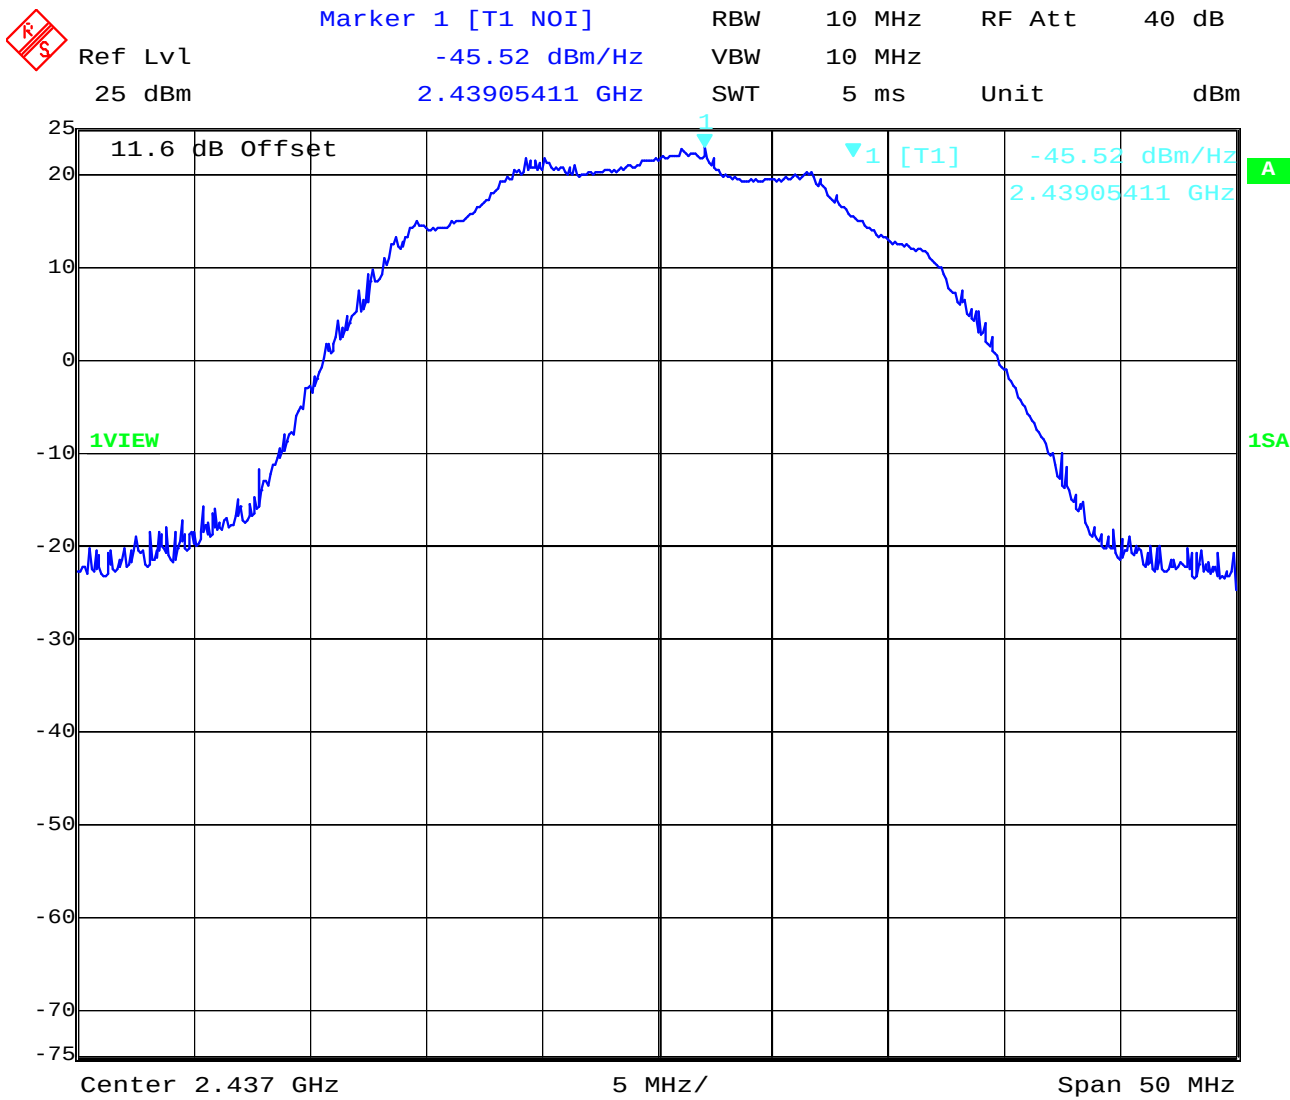
The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Power Spectral Density
2437 MHz

§ 15.247 (d)

DSSS System



Date: 14.SEP.2004 14:16:29

LIMIT

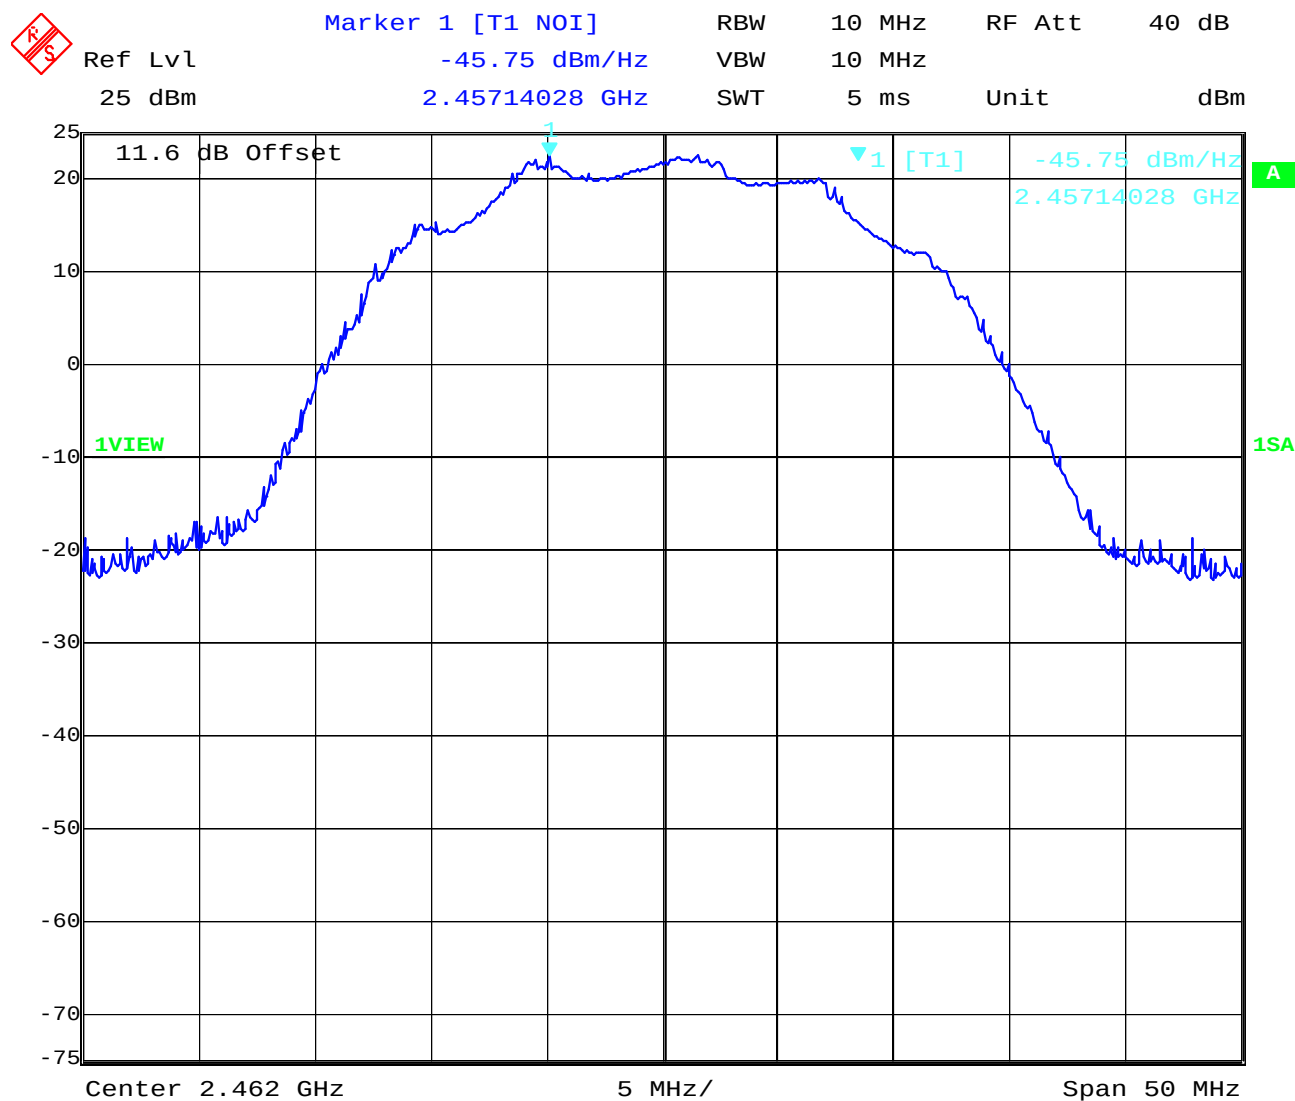
SUBCLAUSE §15.247(d)

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Power Spectral Density
2462 MHz

§ 15.247 (d)

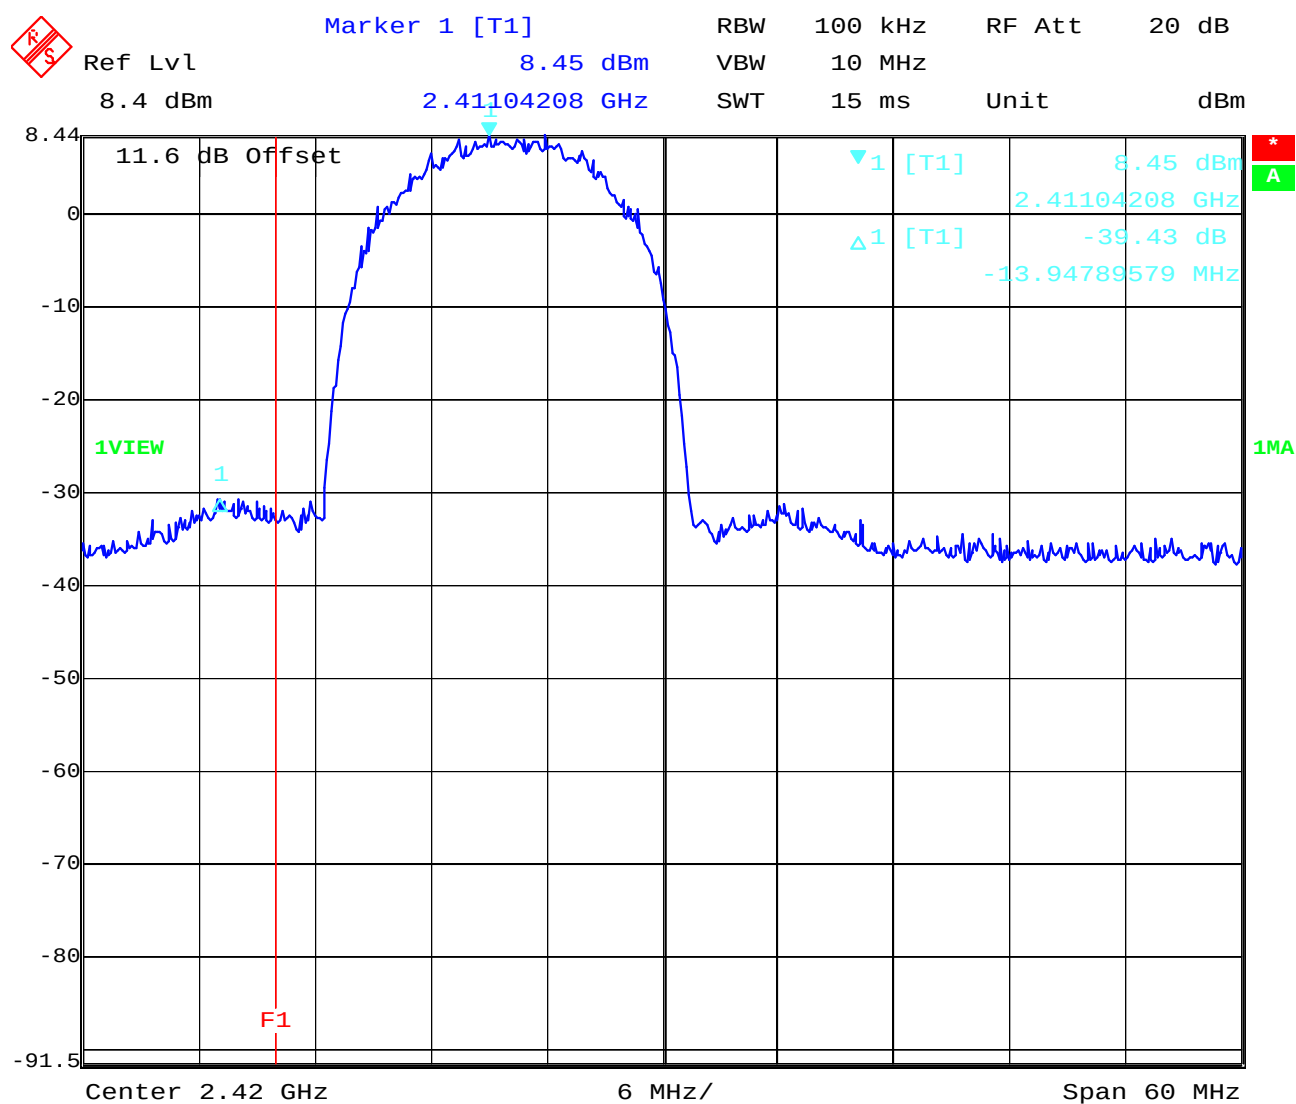
DSSS System

Date: 14.SEP.2004 14:18:16

LIMIT

SUBCLAUSE §15.247(d)

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz bandREFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

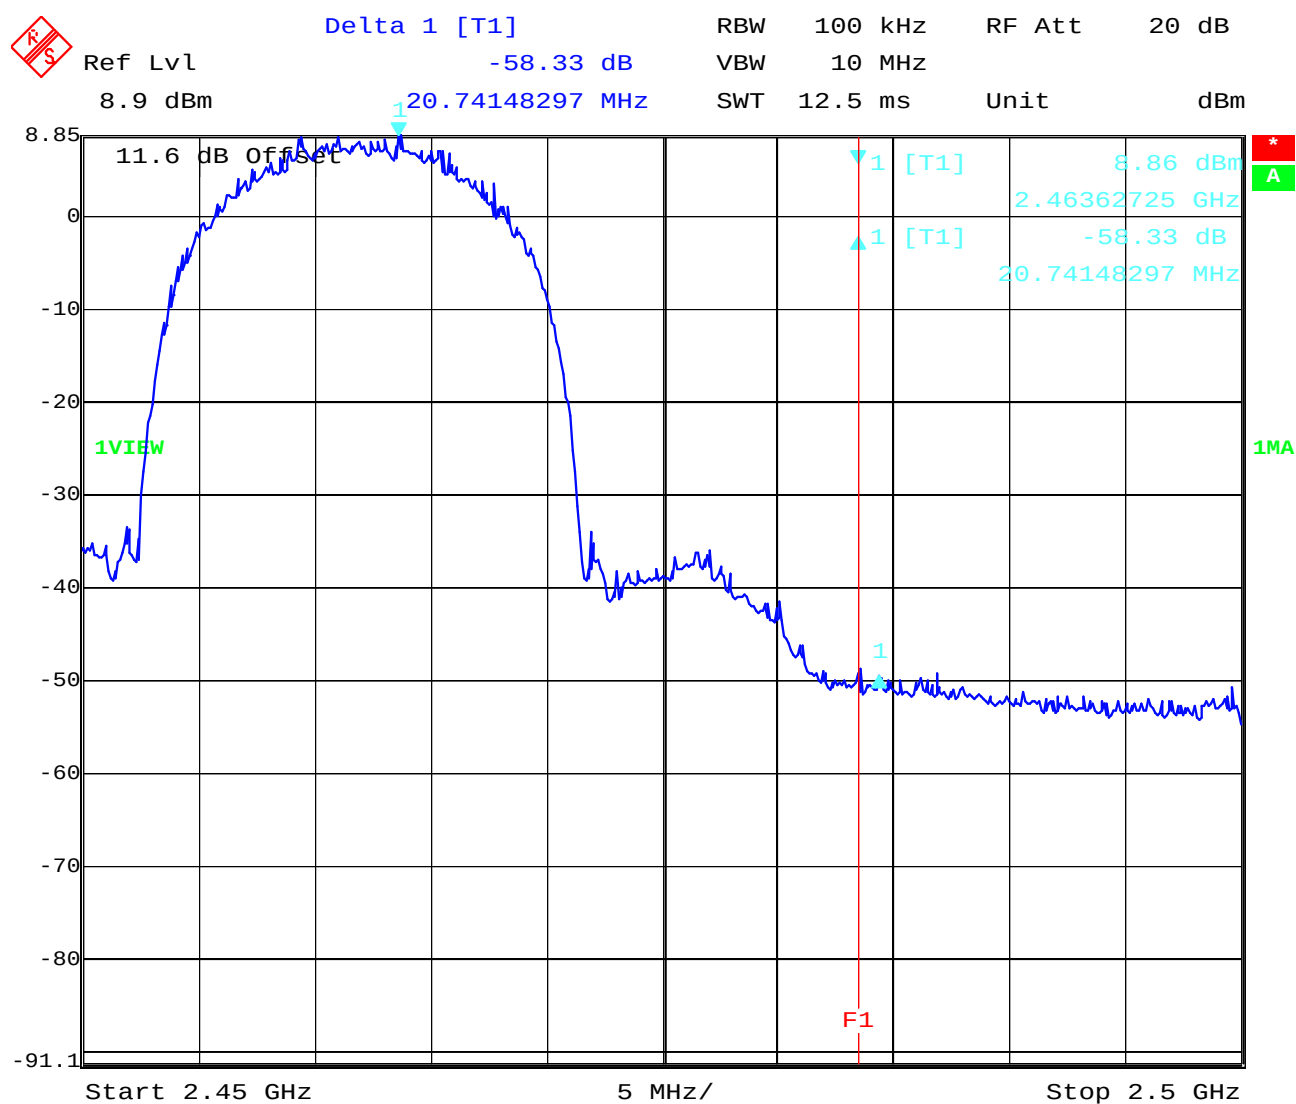
2.2.5 Band-edge compliance of conducted emissions**§15.247 (c)****Low channel****DSSS System**

Date: 14.SEP.2004 14:21:00

Delta dB = 39.4 dB**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**
(for reference numbers see test equipment listing)

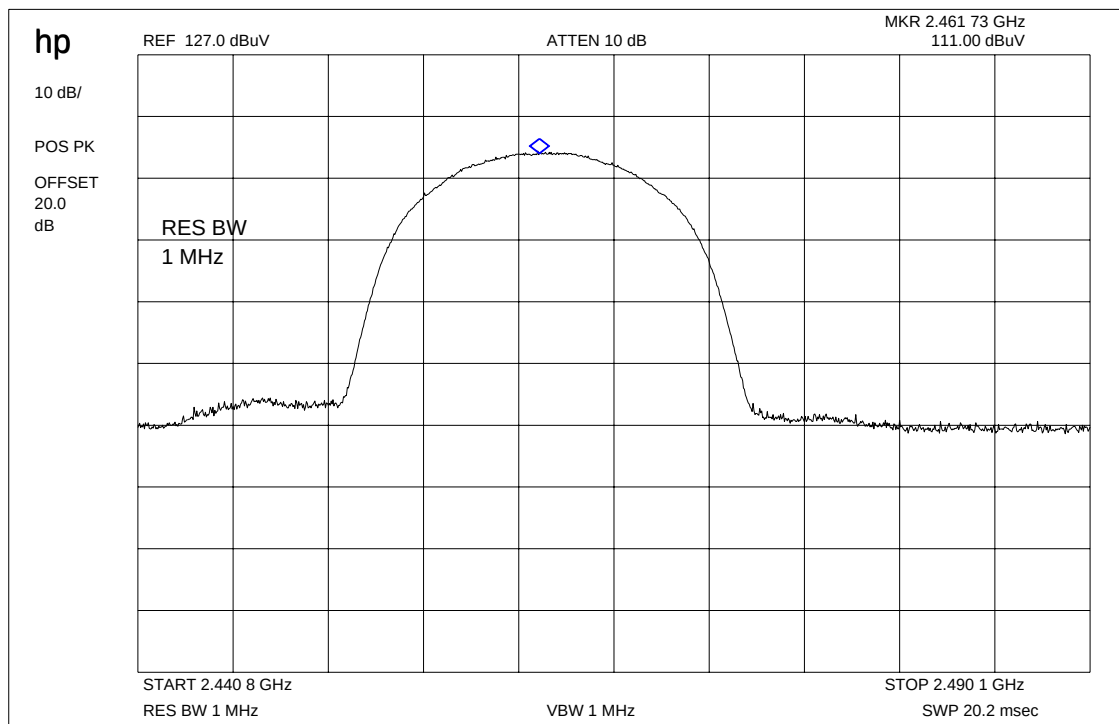
**Band-edge compliance of conducted emissions
high channel**

§15.247 (c)

DSSS System

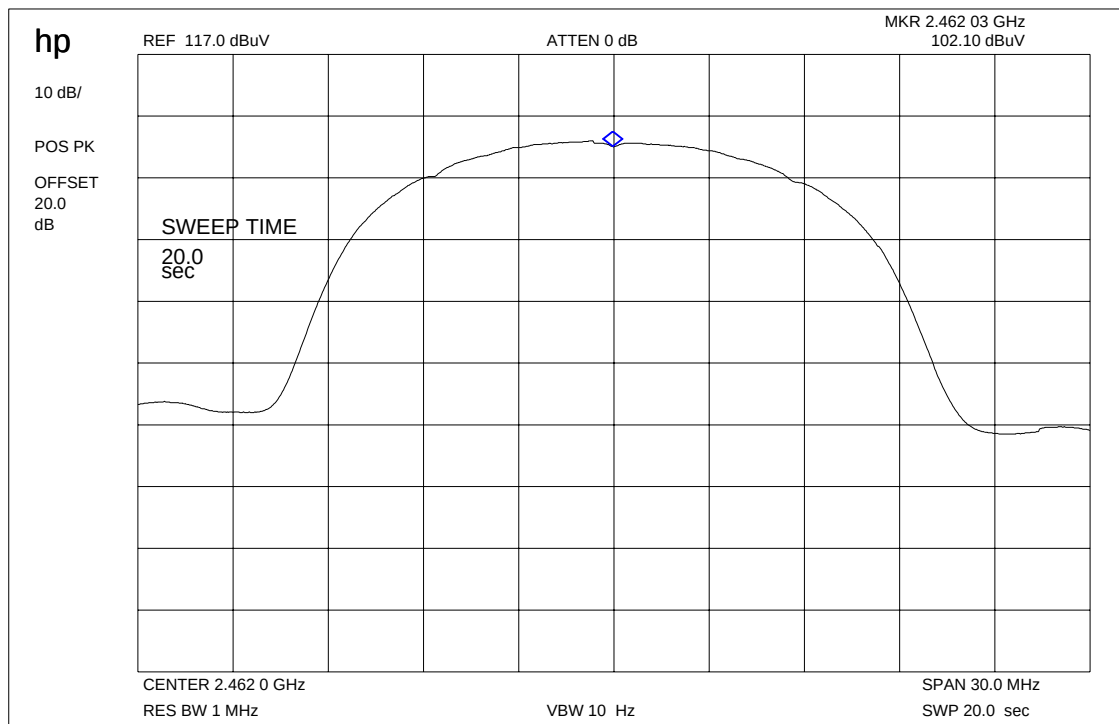
Date: 14.SEP.2004 14:23:52

Delta dB = 58.33 dB**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**
(for reference numbers see test equipment listing)

Band-edge compliance radiated**§15.247 (c)****Max. field strength in 3m distance peak
DSSS System**

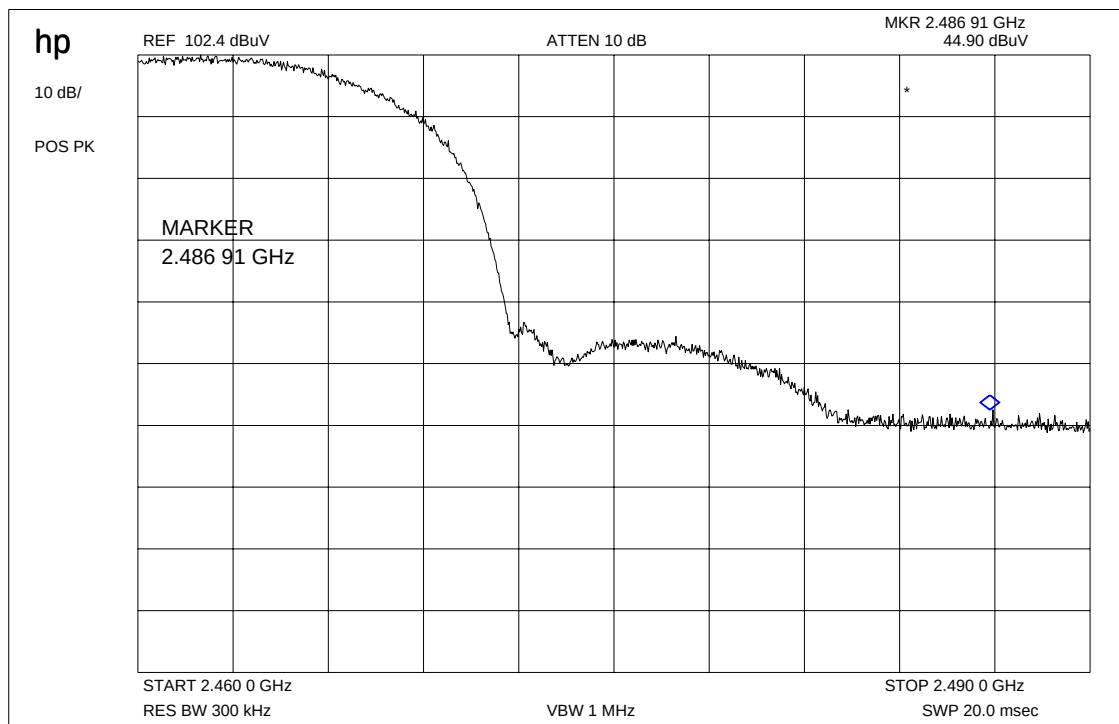
Frequency	Meter reading	Cable loss	Antenna factor	Results
2462 MHz	111.0 dB μ V	3.3 dB	-7.2	98.70 dB μ V/m

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Band-edge compliance radiated**§15.247 (c)****Max. field strength in 3m distance AV
DSSS System**

Delta dB = 46.2 dB

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Band-edge compliance radiated**§15.247 (c)****Marker delta
DSSS System****Delta dB = 57.5 dB****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**
(for reference numbers see test equipment listing)

Band-edge compliance of radiated emissions**§15.205****Radiated field strength****DSSS System**

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	111.0 dB μ V/m	-3.9 dB	107.1 dB μ V/m
Max. average value	1 MHz RBW 10 Hz VBW	106.0	-3.9 dB	102.1 dB μ V/m
Delta value	Peak 300 kHz RBW/VBW	57.5 dB	-	-
Value at band edge	limit 54 dB μ V/m			44.6 dB μ V/m
Statement:				Complies

The product complies with the limit of the restricted bands.

Delta marker plots see above pages

2.2.6 Emission Limitations - Conducted (Transmitter)

§ 15.247 (c) (1)

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emmission power	actual attenuation below frequency of operation (dB)	results
2412		24.14	30 dBm	-	Operating frequency
no	peaks	found	-20 dBc (+4.14 dBm)		
2437		24.01	30 dBm	-	Operating frequency
no	peaks	found	-20 dBc (+4.01 dBm)		
2462		23.89	30 dBm		Operating frequency
no	peaks	found	-20 dBc (+3.89 dBm)		
Measurement uncertainty		± 3dB			

RBW : 100 kHz

VBW: 100 kHz

For emissions that fall into restricted bands you find the radiated emissions later in the report.

LIMITS

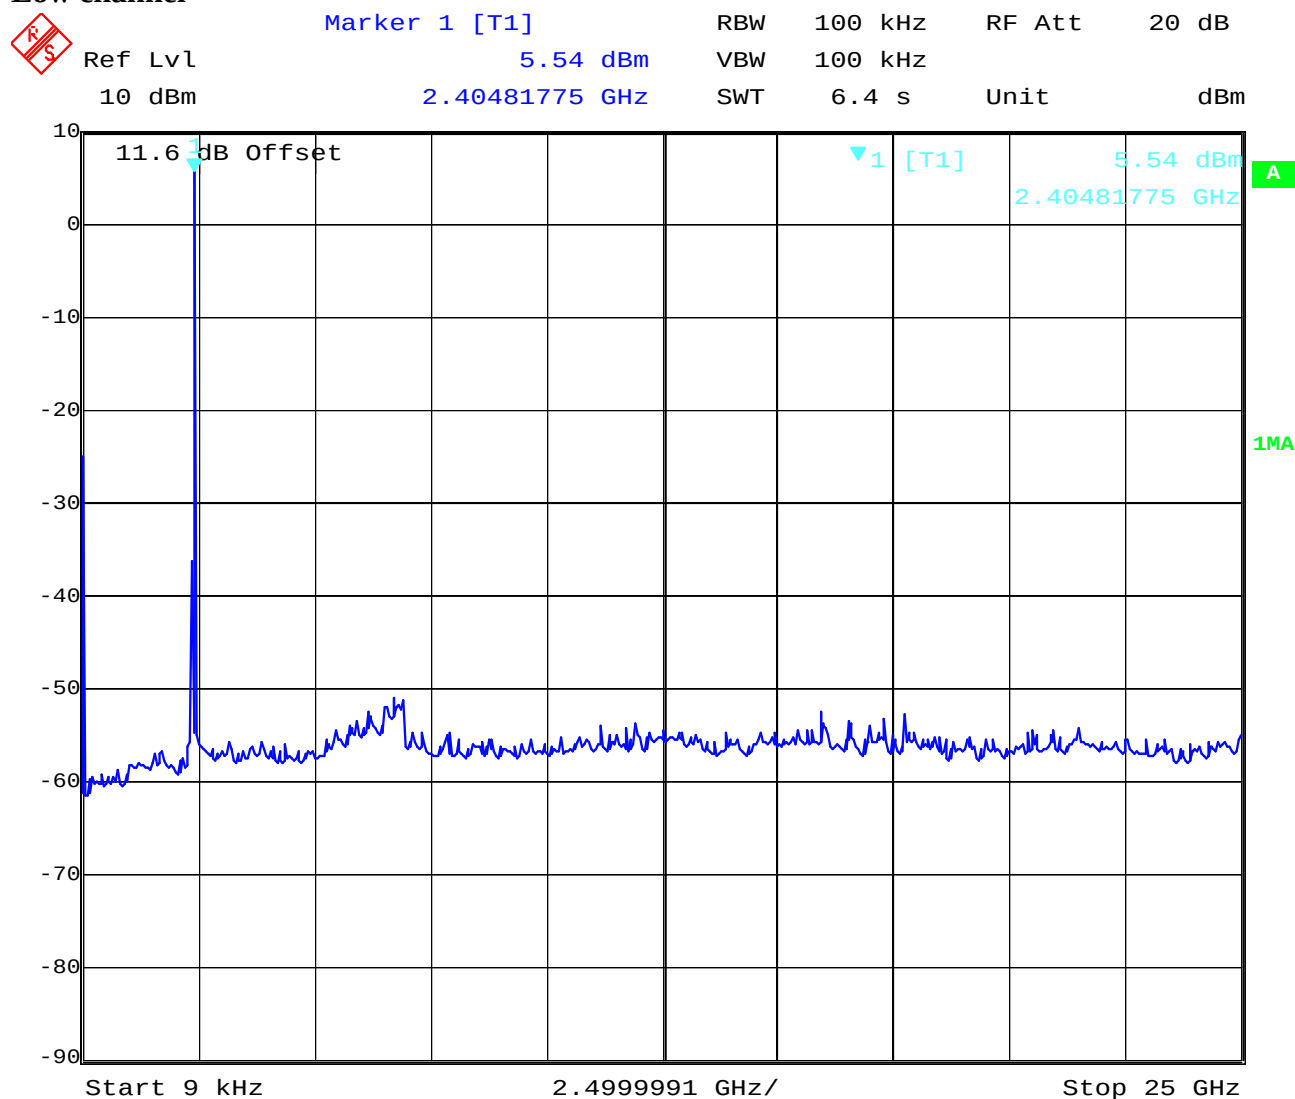
SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

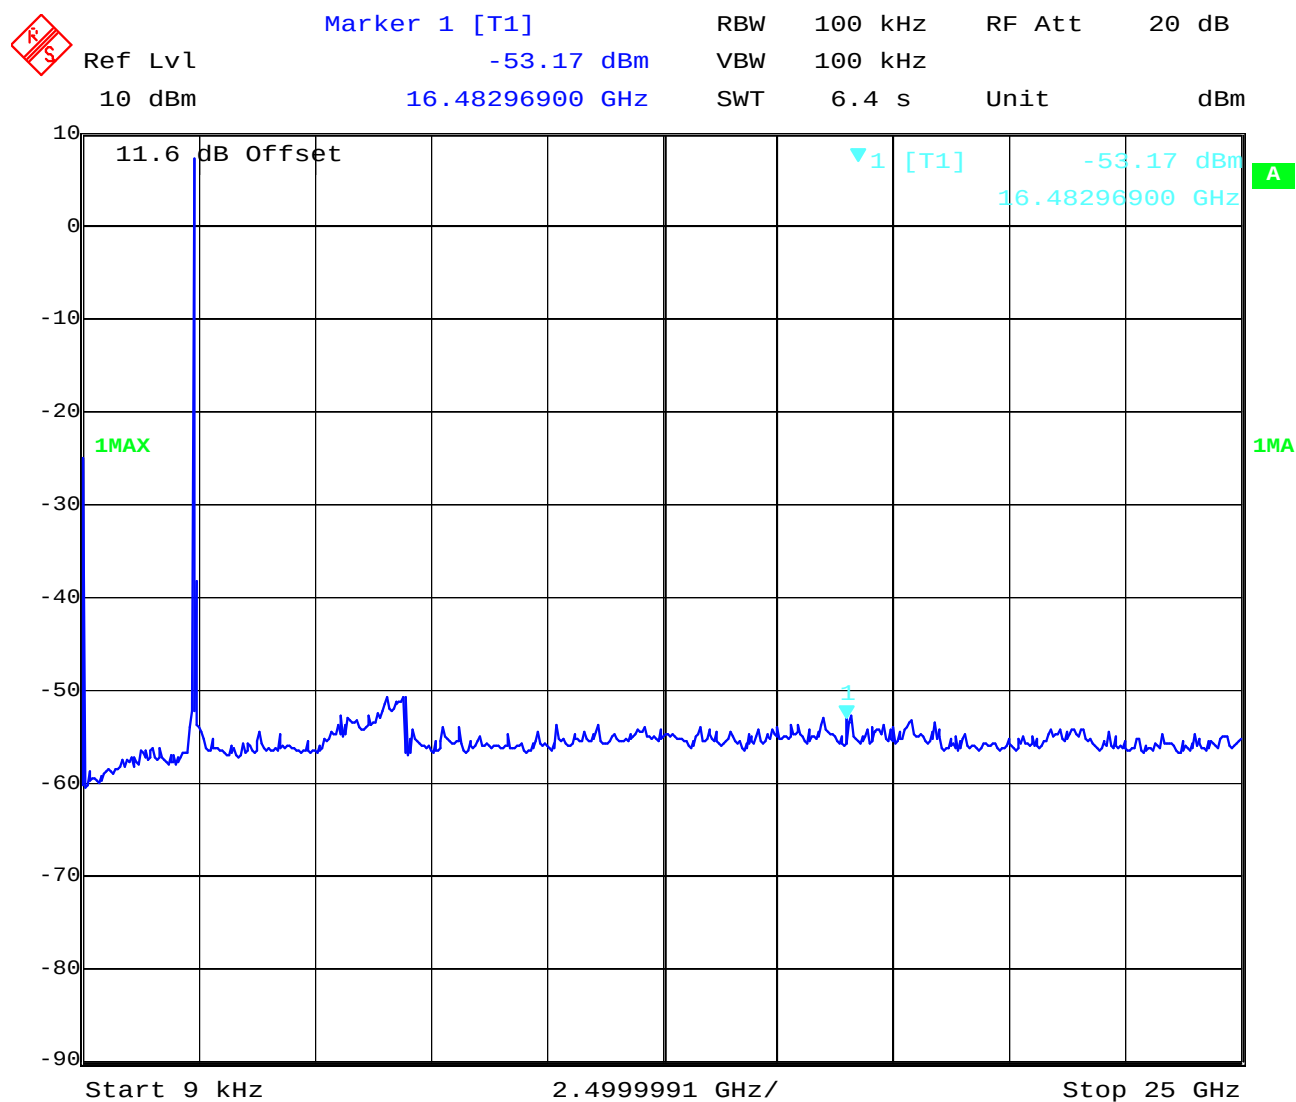
**Spurious Emission Limitation
CONDUCTED**

§ 15.247 (c) (1)

No peak found < 20 dB below Limit (20dBc)**Low channel**

Date: 14.SEP.2004 14:31:48

No spurious found in the restricted bands (2310 – 2390 MHz and 2483,5 – 2500 MHz)**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**
(for reference numbers see test equipment listing)

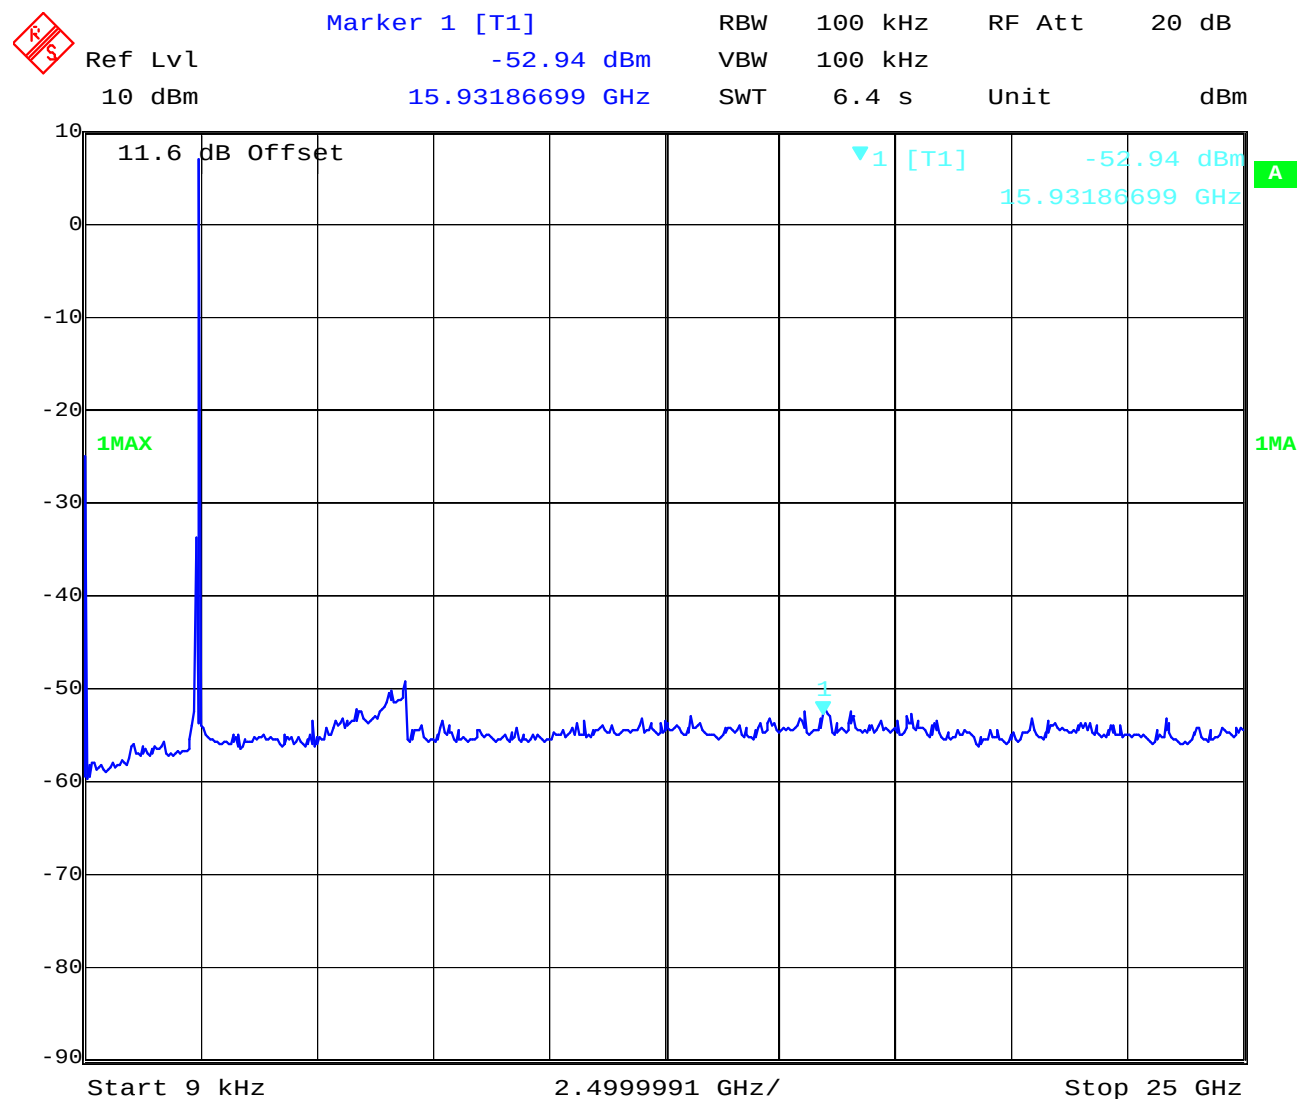
**Spurious Emission Limitation
CONDUCTED****§ 15.247 (c) (1)****Mid channel (peak)**

Date: 14.SEP.2004 14:33:23

No spurious found in the restricted bands (2310 – 2390 MHz and 2483,5 – 2500 MHz)**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**
(for reference numbers see test equipment listing)

**Spurious Emission Limitation
CONDUCTED**

§ 15.247 (c) (1)

High channel

Date: 14.SEP.2004 14:37:26

No spurious found in the restricted bands (2310 – 2390 MHz and 2483,5 – 2500 MHz)REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

2.2.7 Spurious Emission (radiated)

§ 15.247 (c) (1)

SPURIOUS EMISSIONS LEVEL ($\mu\text{V/m}$)								
2412 MHz			2437 MHz			2462 MHz		
f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)	f (MHz)	Detector	Level ($\mu\text{V/m}$)
no	peaks	found	no	peaks	found	no	peaks	found
Measurement uncertainty			$\pm 3 \text{ dB}$					

 $f < 1 \text{ GHz}$: RBW/VBW: 100 kHz $f \geq 1 \text{ GHz}$: RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits

SUBCLAUSE § 15.209

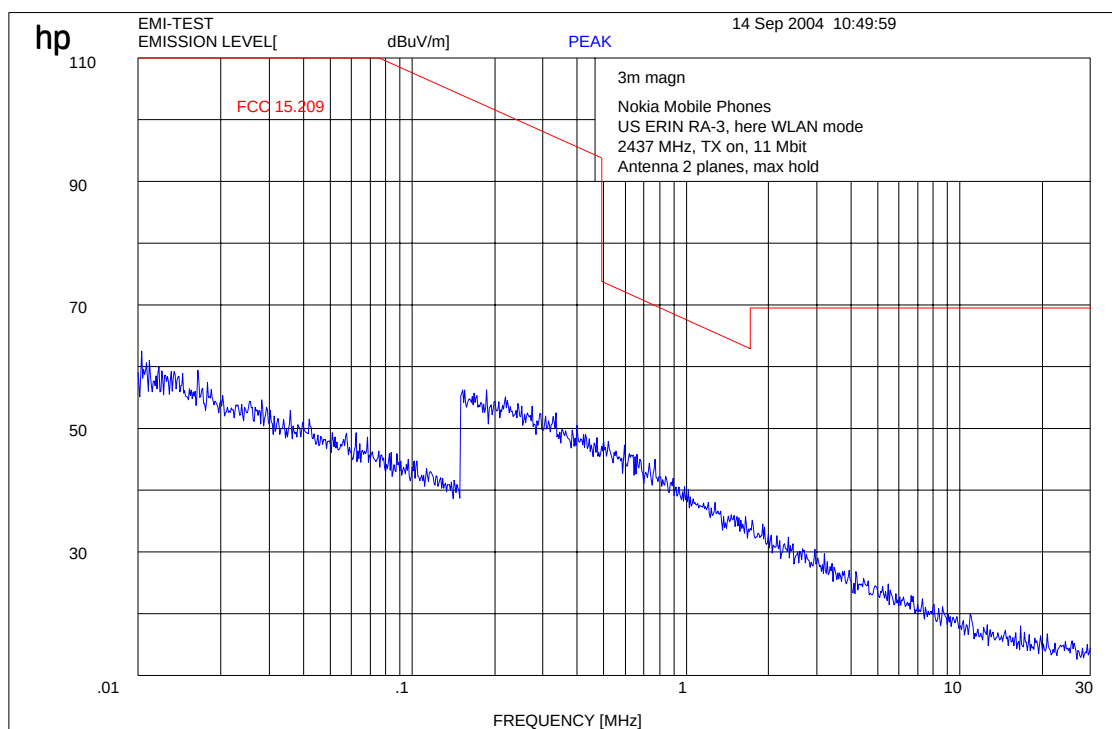
Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24; 64

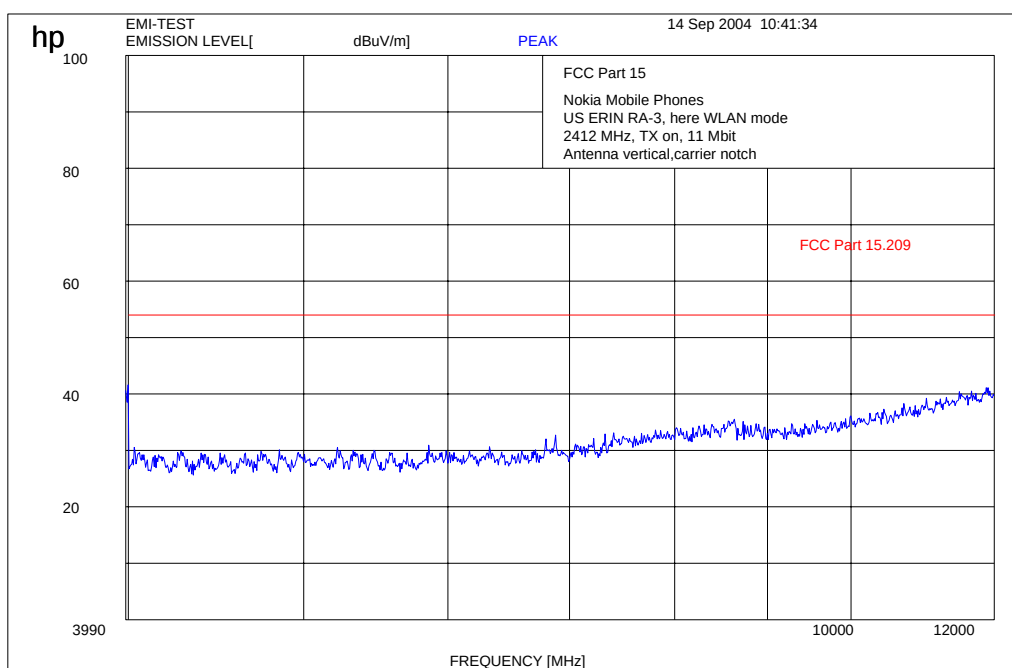
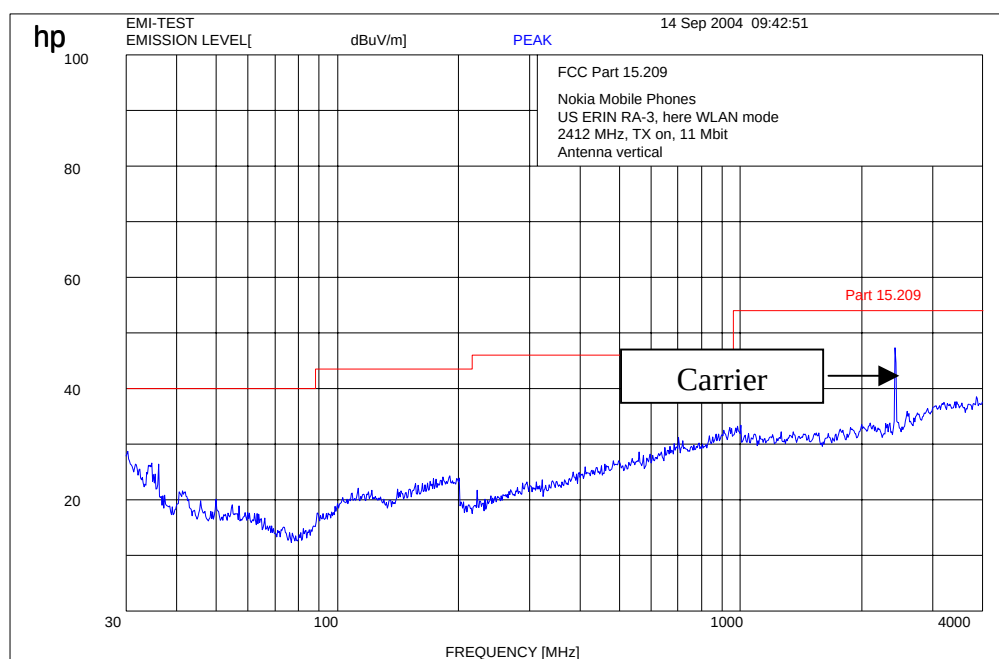
Emission Limitations – Radiated**§ 15.247 (c) (1)****Transmitter up to 30 MHz**

this plot is valid for all channels

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

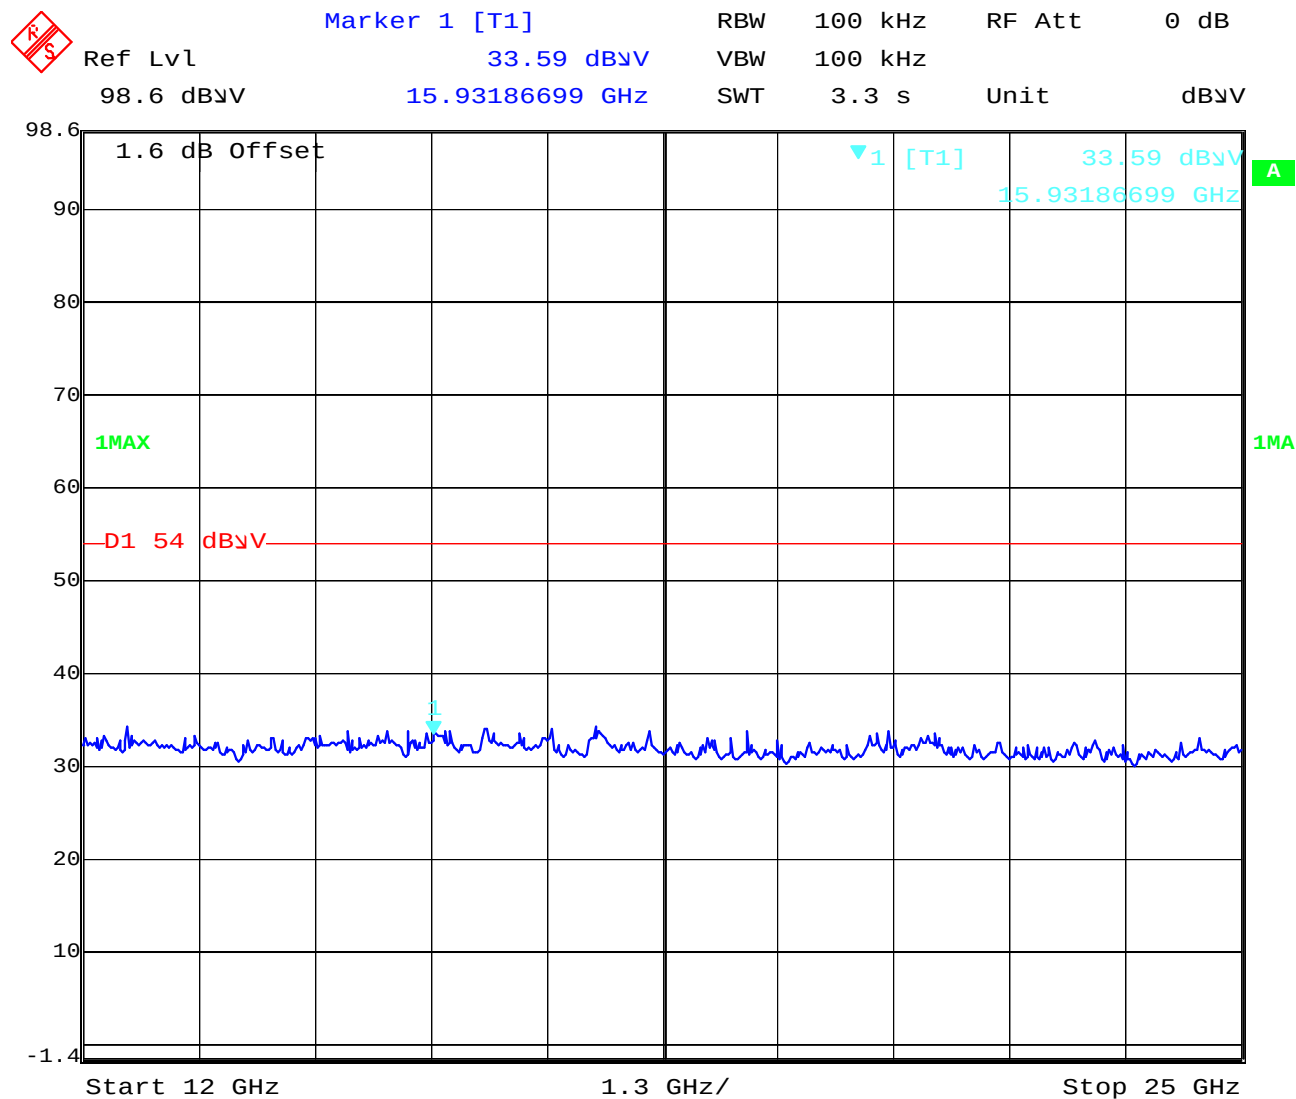
(for reference numbers see test equipment listing)

17 – 24; 64

**Emission Limitations – Radiated
low channel up to 12 GHz****§ 15.247 (c) (1)****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED****(for reference numbers see test equipment listing)****17 – 24; 64**

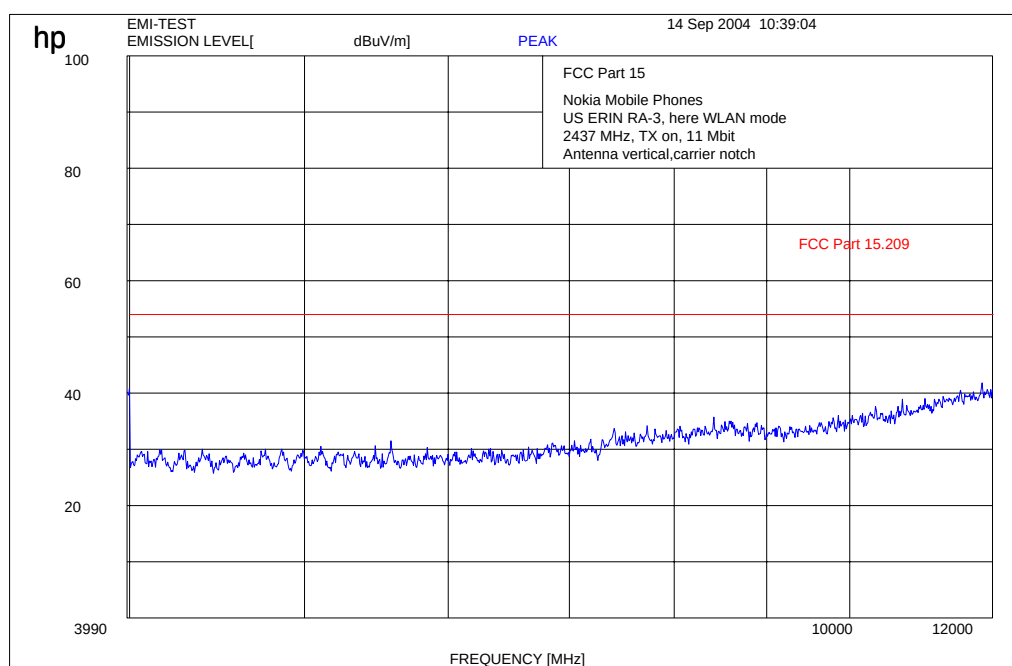
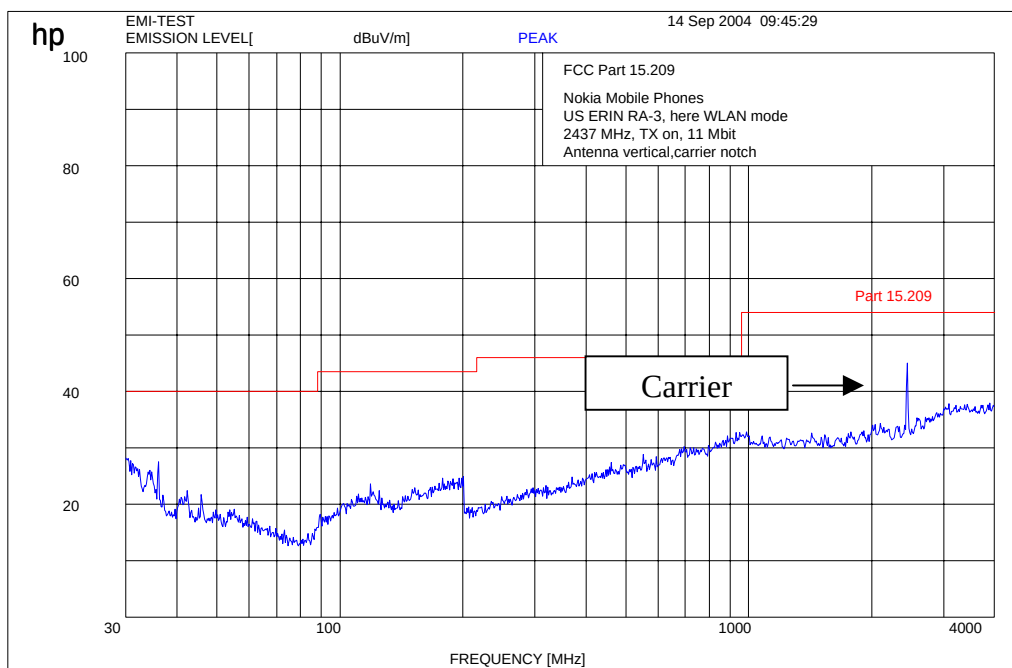
**Emission Limitations – Radiated
up to 25 GHz
this plot is valid for all 3channels**

§ 15.247 (c) (1)



Date: 14.SEP.2004 14:40:14

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 – 24; 64

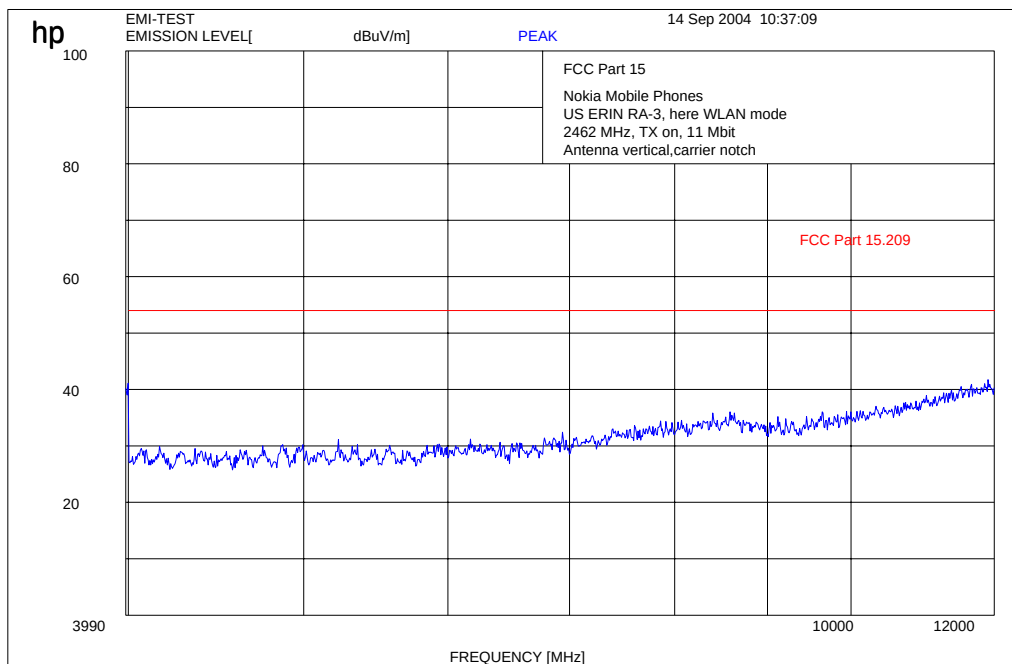
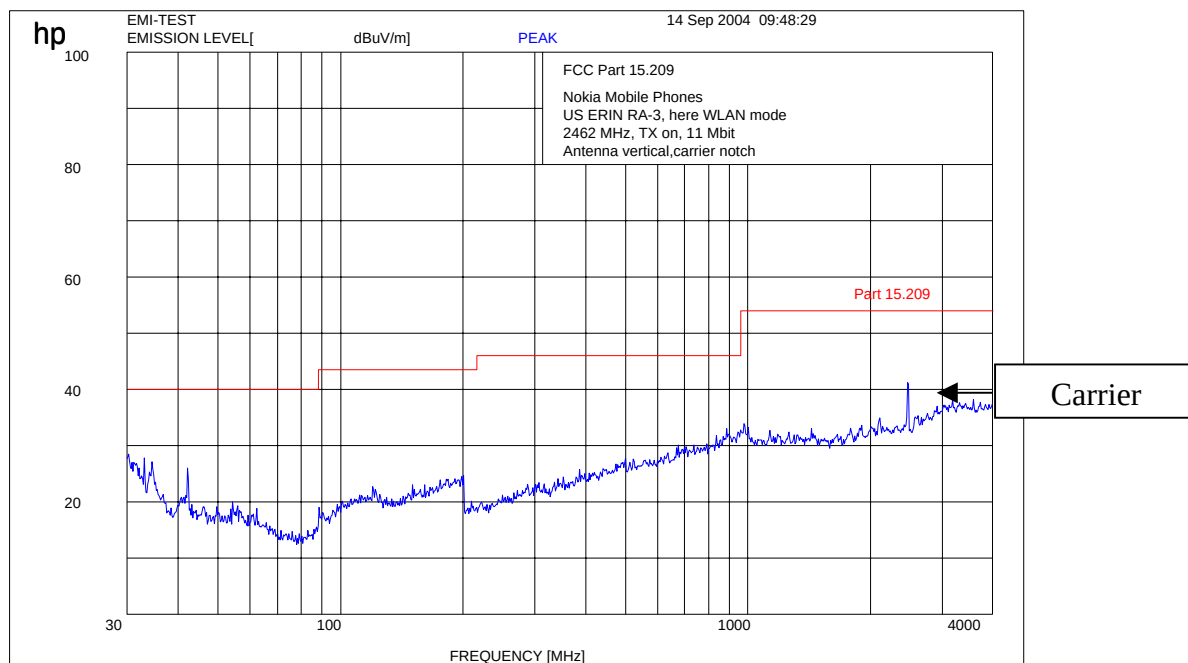
Emission Limitations – Radiated
Mid channel up to 12 GHz**§ 15.247 (c) (1)****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64

Emission Limitations – Radiated high channel up to 12 GHz

§ 15.247 (c) (1)



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

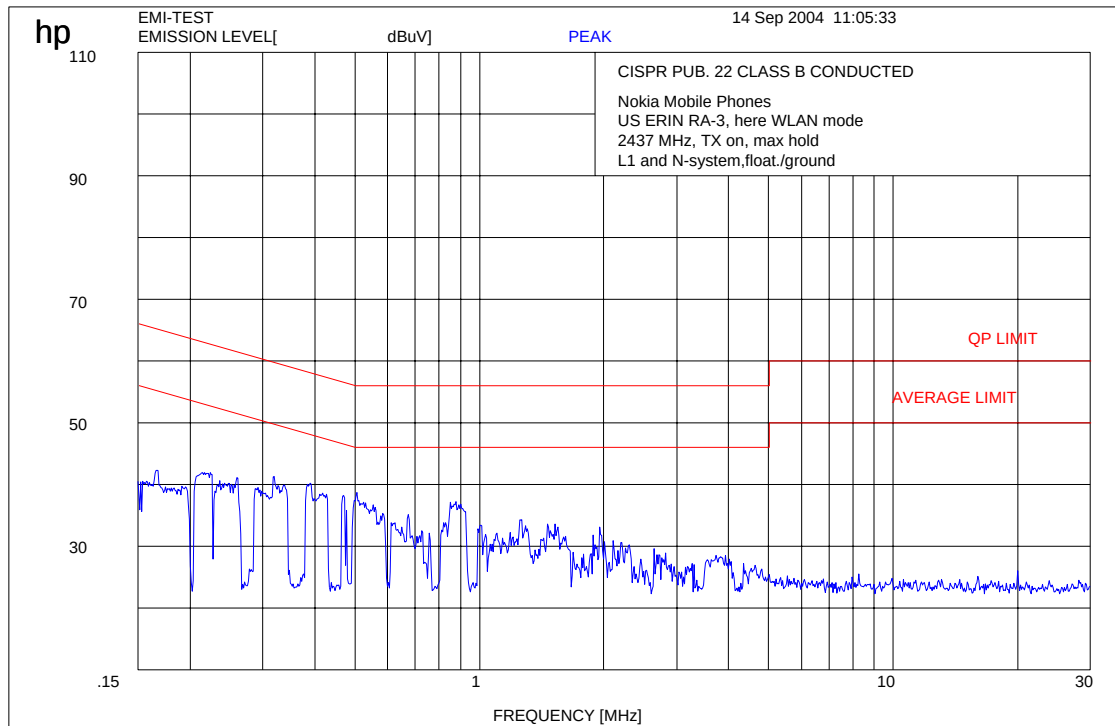
(for reference numbers see test equipment listing)

17 – 24; 64

2.2.8 Conducted emissions

§ 15.107/207

CISPR 22



Limit 15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24; 64

2.2.9 Emissions Limitations - Receiver radiated

15.209

§

SPURIOUS EMISSIONS LEVEL (µV/m)								
CH 1 / 2 / 3								
f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)
all	peaks	<<limit						
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

see above plots

Measurement distance see table

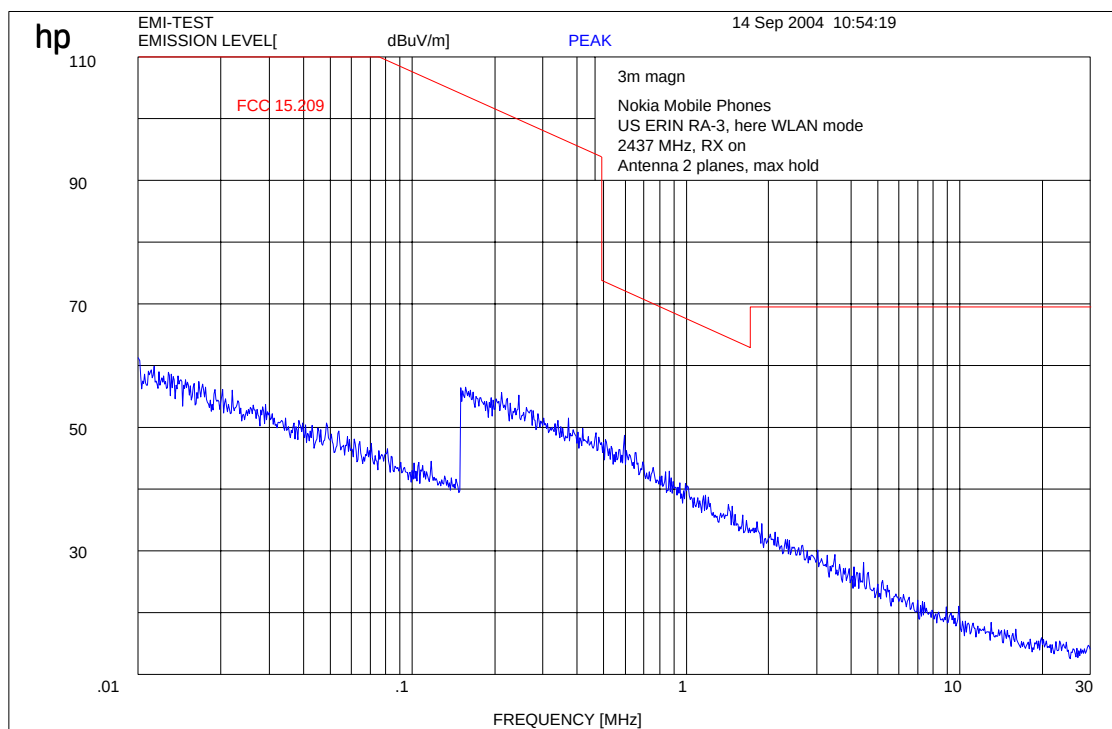
Limits

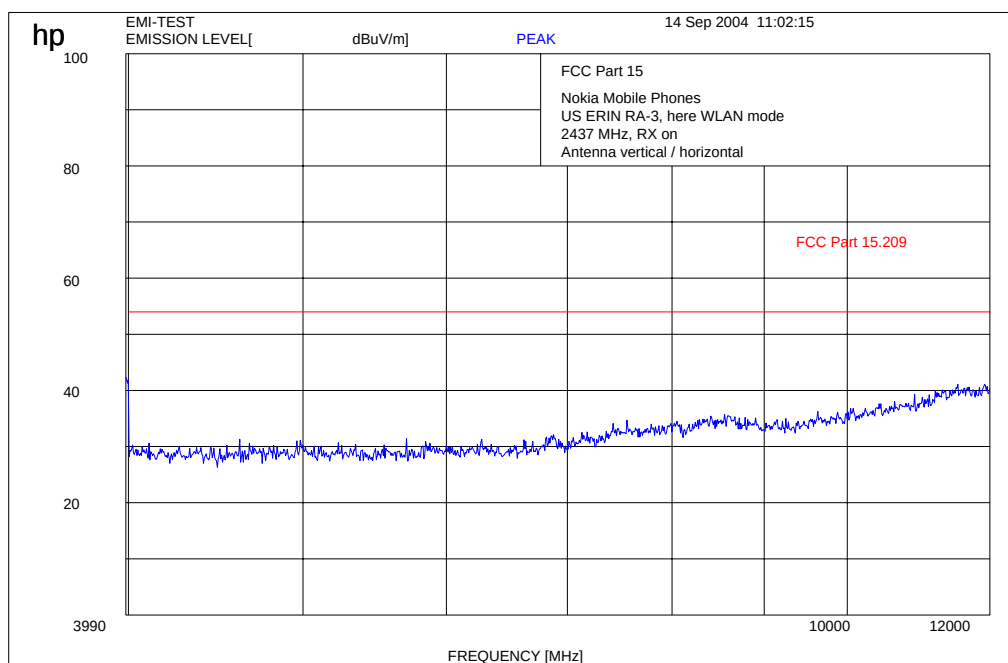
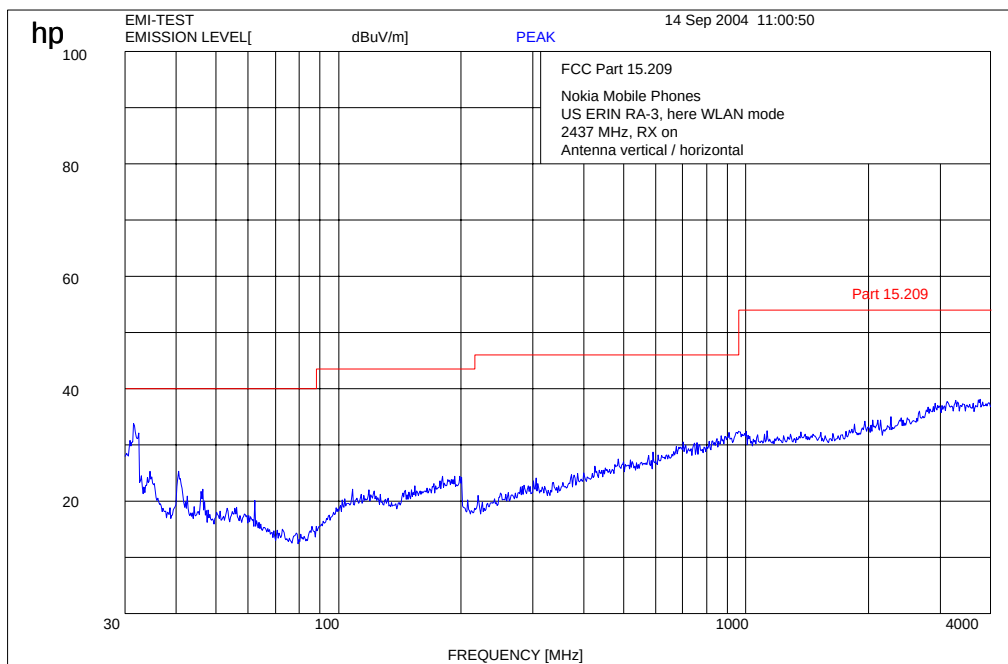
SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30
30 - 88	100 / 40 dBµV/m	3
88 - 216	150 / 43.5 dBµV/m	3
216 - 960	200 / 46 dBµV/m	3
above 960	500 / 54 dBµV/m	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24; 64

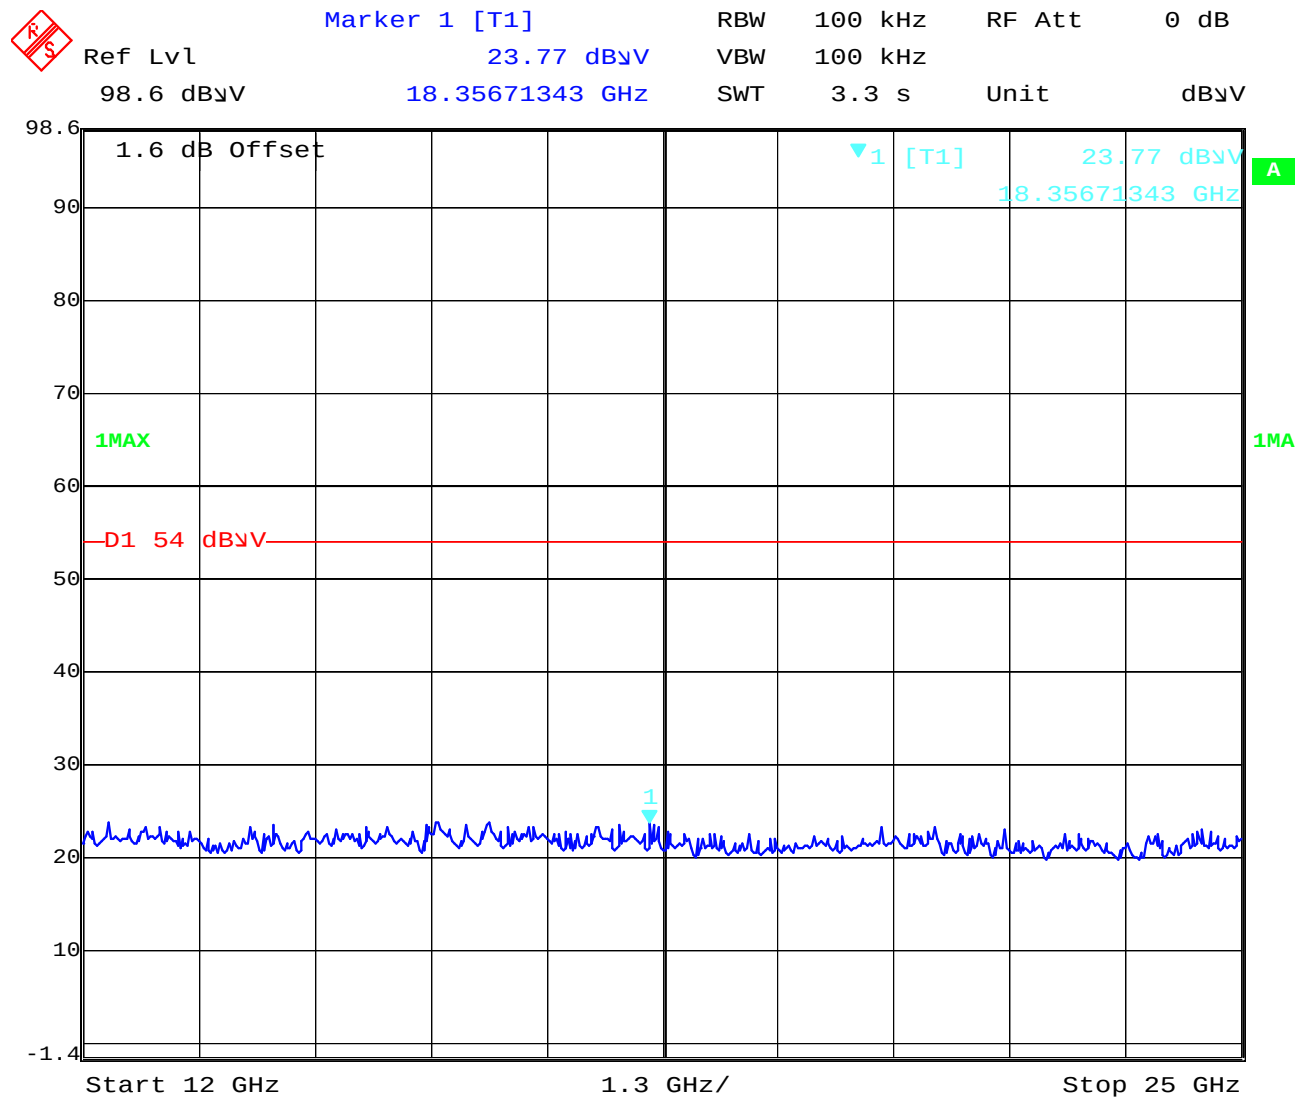
Emission Limitations - Radiated
Receiver up to 30 MHz**§ 15.209****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED****(for reference numbers see test equipment listing)****17 – 24; 64**

**Emission Limitations - Radiated
Receiver up to 12 GHz****§ 15.209**

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 – 24; 64

Emission Limitations - Radiated
Receiver up to 25 GHz

§ 15.209



Date: 14.SEP.2004 14:42:00

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 – 24; 64

3 Test Equipment and Ancillaries used for Tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Calibrated
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257	Yes
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860	Yes
03	Oscilloscope	7633	Tektronix	230054	Yes
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010	Yes
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027	Yes
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867	Yes
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012	Yes
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032	Yes
09	Regulating Transformer	MPL	Erfi	91350	n.a.
10	LISN	NNLA 8120	Schwarzbeck	8120331	Yes
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020	Yes
12	Power-Meter	436 A	Hewlett-Packard	2101A12378	Yes
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156	Yes
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616	Yes
15	Modulation Meter	9008	Racal-Dana	2647	Yes
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899	Yes
17	Anechoic Chamber	---	MWB	87400/002	Yes
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306	Yes
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541	Yes
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131	Yes
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768	Yes
22	Biconical Antenna	3104	Emco	3758	Yes
23	Log. Per. Antenna	3146	Emco	2130	Yes
24	Double Ridged Horn	3115	Emco	3088	Yes
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013	Yes
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008	Yes
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013	Yes
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002	Yes
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002	Yes
30	Highpass	HM985955	FSY Microwave	001	n.a.
31	Amplifier	P42-GA29	Tron-Tech	B 23602	Yes
32	Anechoic Chamber		Frankonia		Yes
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004	Yes
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010	Yes
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010	Yes

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Calibrated
36	Control Computer	HD 100	Deisel	100/322/93	n.a.
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003	Yes
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008	Yes
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001	Yes
40	Power Supply	6032A	Hewlett Packard	2846A04063	Yes
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006	n.a.
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002	Yes
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005	Yes
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011	Yes
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010	Yes
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461	Yes
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002	Yes
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002	Yes
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696	Yes
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105	Yes
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04	Yes
52	Controler	PSM 7	Rohde & Schwarz	883 086/026	Yes
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005	Yes
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012	Yes
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014	Yes
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019	Yes
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007	Yes
58	Power Supply	6032A	Rohde & Schwarz	2933A05441	Yes
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021	Yes
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026	n.a.
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002	Yes
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029	Yes
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007	Yes
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27	Yes
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773	Yes
68					