

## FCC Part 15C Compliance Test Report

<b>Test Report no.:</b>	FCC15C_RM-596_23.doc	<b>Date of Report:</b>	13-Apr-2010
<b>Number of pages:</b>	26	<b>Customer's Contact person:</b>	Tuomo Pursinheimo

<b>Testing laboratory:</b>	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	<b>Customer:</b>	Nokia Corporation P.O. Box 68 Sinitaival 5 FIN-33721 TAMPERE, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 46880
<b>FCC listing no.:</b>	94436		
<b>IC recognition no.:</b>	661AK-1		

**Tested devices/ accessories:** **Phone RM-596 / AC charger AC-15E, Headset WH-701**

<b>FCC ID:</b>	PDNRM-596	<b>IC:</b>	661R-RM596
----------------	-----------	------------	------------

**Supplement reports:** -

**Testing has been carried out in accordance with:** CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".

**Documentation:** The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.

**Test Results:** **The EUT complies with the requirements in respect of all parameters subject to the test.**  
The test results relate only to devices specified in this document.

**Date and signature for the contents:**

**Jari Jantunen, System Manager, EMC**

## 1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	08-Mar-2010
Testing completed	16-Mar-2010
The customer's contact person	Tuomo Pursinheimo
Test Plan referred to	T:\Projects\RM-596\TestPlan\RS_testplan_RM-596.xls
Notes	-
Document name	FCC15C_RM-596_23.doc

### 1.1. EUT and Accessory Information

The EUT is a 9-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/IV(1700)/V(850)/VIII) mobile phone with GPRS, EGPRS, Bluetooth, WLAN and FM transmitter. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-596	004402130475365	3630	-	010.008	42186
Phone	RM-596	004402130475845	3630	-	010.008	42205
Phone	RM-596	004402130475480	3630	-	010.008	42187
AC charger	AC-15E	4090499512230700960;0675463	-	-	-	42190
AC charger	AC-15E	4090499512230700974;0675463	-	-	-	42191
Headset	WH-701	06944289501G2R01954	-	-	-	42192
Headset	WH-701	06944289501G2R01781	-	-	-	42193

### 1.2. Summary of Test Results

#### Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP


The test was not performed by the TCC Nokia Tampere Laboratory.

## CONTENTS


<b>1. Summary for FCC Part 15C Compliance Test Report.....</b>	<b>2</b>
1.1. EUT and Accessory Information .....	2
1.2. Summary of Test Results .....	2
<b>2. Test setups.....</b>	<b>4</b>
2.1. Conducted RF test setup .....	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Radiated test setup .....	4
<b>3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2)).....</b>	<b>5</b>
3.1. Test method and limit .....	5
3.2. Bluetooth Test results .....	6
<b>4. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....</b>	<b>8</b>
4.1. Test method and limit.....	8
4.2. Bluetooth Test results .....	9
<b>5. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2) .....</b>	<b>12</b>
5.1. Test method and limit.....	12
5.2. Bluetooth Test results .....	13
<b>6. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (a)).....</b>	<b>14</b>
6.1. Test method and limit.....	14
6.2. Bluetooth Test results .....	15
<b>7. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b)).....</b>	<b>18</b>
7.1. Test method and limit.....	18
7.2. Bluetooth Test results .....	18
<b>8. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d)) .....</b>	<b>20</b>
8.1. Test method and limit.....	20
8.2. Bluetooth Test results .....	21
<b>9. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d)).....</b>	<b>22</b>
9.1. Test method and limit.....	22
9.2. Bluetooth test results.....	23
<b>10. Test Equipment .....</b>	<b>25</b>
10.1. Conducted measurements .....	25
10.2. Radiated measurements .....	25

## 2. Test setups


### 2.1. Conducted RF test setup

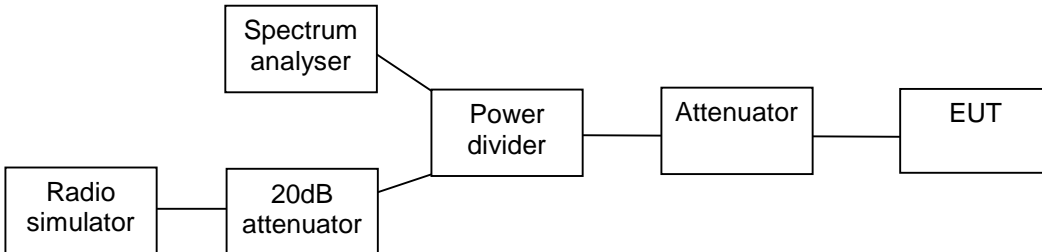

### 2.2. AC powerline conducted emissions test setup

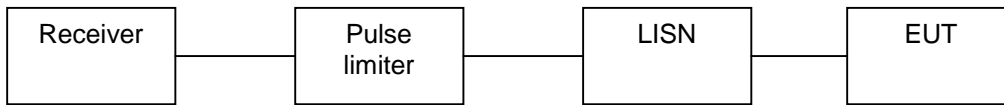

### 2.3. Radiated test setup

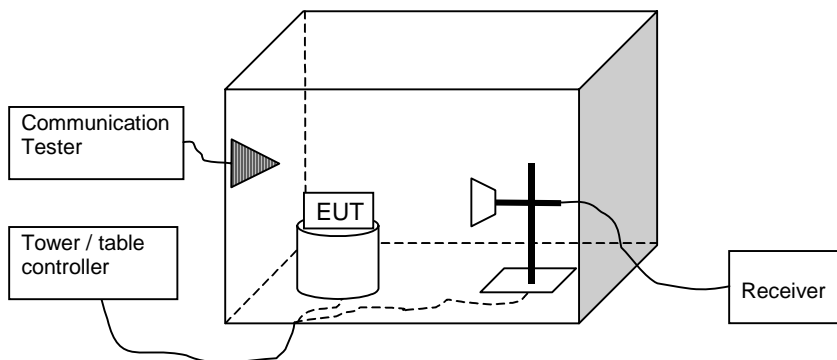

### 3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

<b>EUT with DUT number</b>	RM-596 DUT42205
<b>Accessories with DUT numbers</b>	WH-701 DUT42193
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	21 / 48 / 100.0
<b>Date of measurements</b>	15-Mar-2010
<b>Measured by</b>	Hannu Söderholm

#### 3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


<b>Frequency range [MHz]</b>	<b>Limit [W]</b>	<b>Limit [dBm]</b>
2400 – 2483.5	≤ 1	≤ 30

### 3.2. Bluetooth Test results


#### 3.2.1 GFSK modulation, PRBS packet type

Channel / $f_c$ [MHz]	P [dBm]	P [mW]	Result
0 / 2402	5.20	3.311	PASSED
40 / 2442	5.60	3.631	PASSED
78 / 2480	5.70	3.715	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

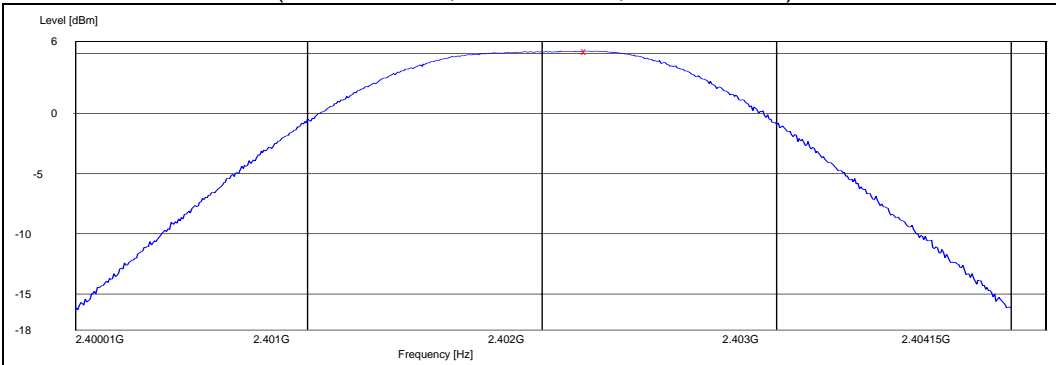

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

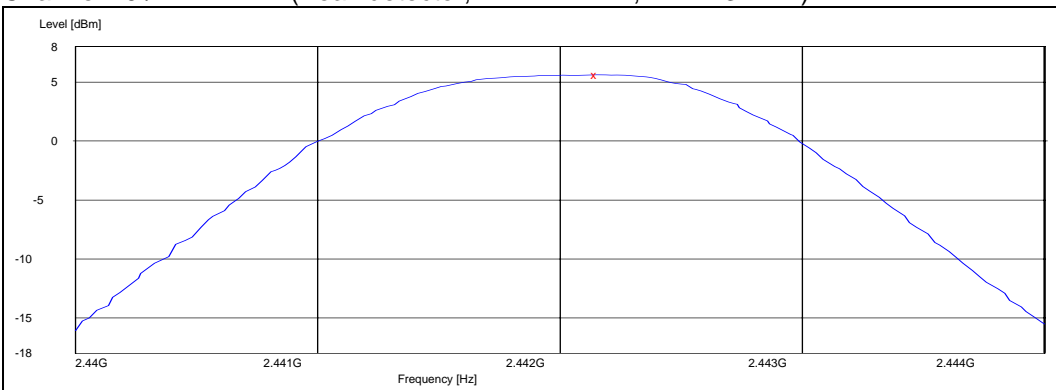


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

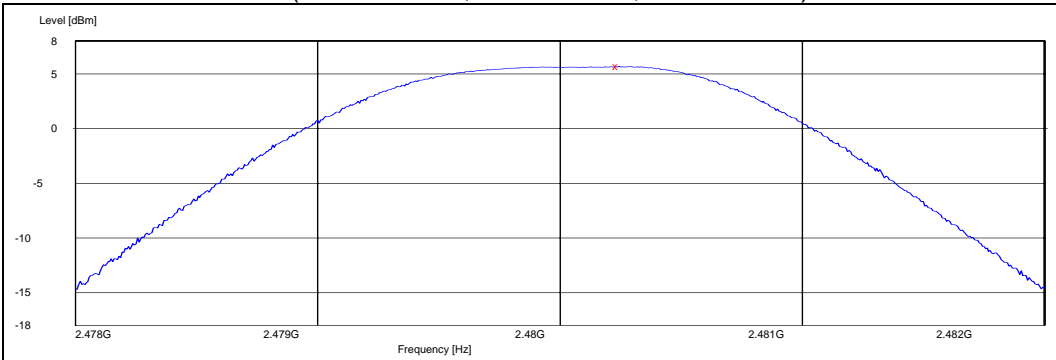


**3.2.2 8DPSK modulation, PRBS packet type**

Channel / f <sub>c</sub> [MHz]	P [dBm]	P [mW]	Result
0 / 2402	6.20	4.169	PASSED
40 / 2442	6.70	4.677	PASSED
78 / 2480	6.80	4.786	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

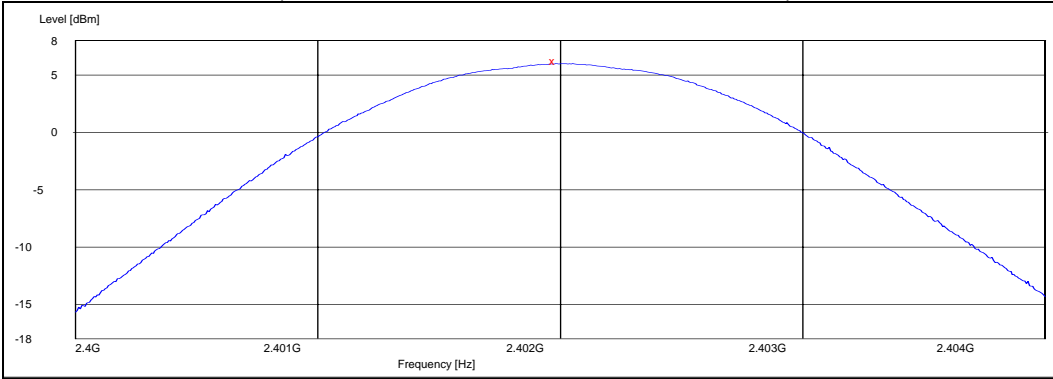

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

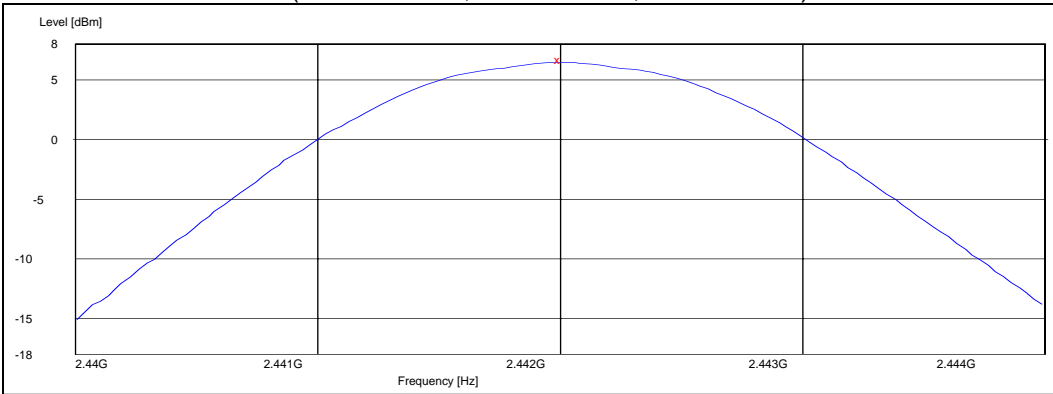

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

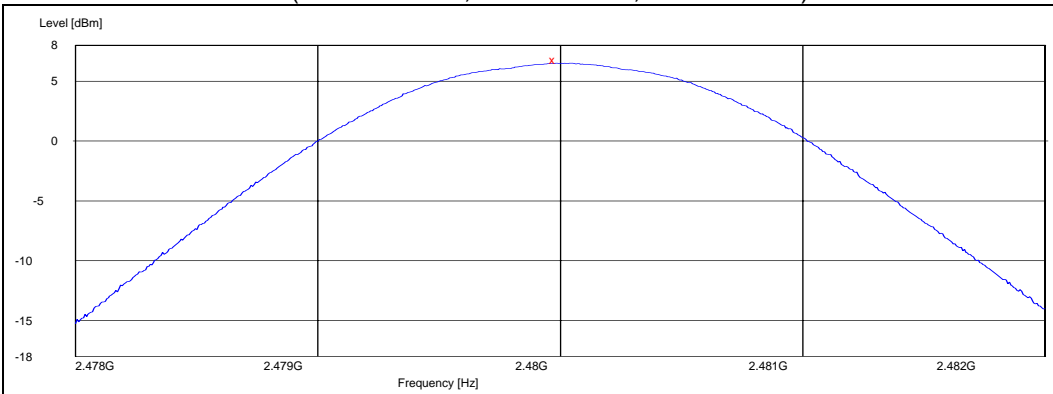

#### 4. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

<b>EUT with DUT number</b>	RM-596 DUT42205
<b>Accessories with DUT numbers</b>	WH-701 DUT42193
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	21 / 48 / 100.0
<b>Date of measurements</b>	15-Mar-2010
<b>Measured by</b>	Hannu Söderholm

##### 4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for spurious RF conducted emissions measurements


<b>Frequency range [MHz]</b>	<b>Limit [dBc]</b>
1 – 25000	≤ -20



## 4.2. Bluetooth Test results

### 4.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

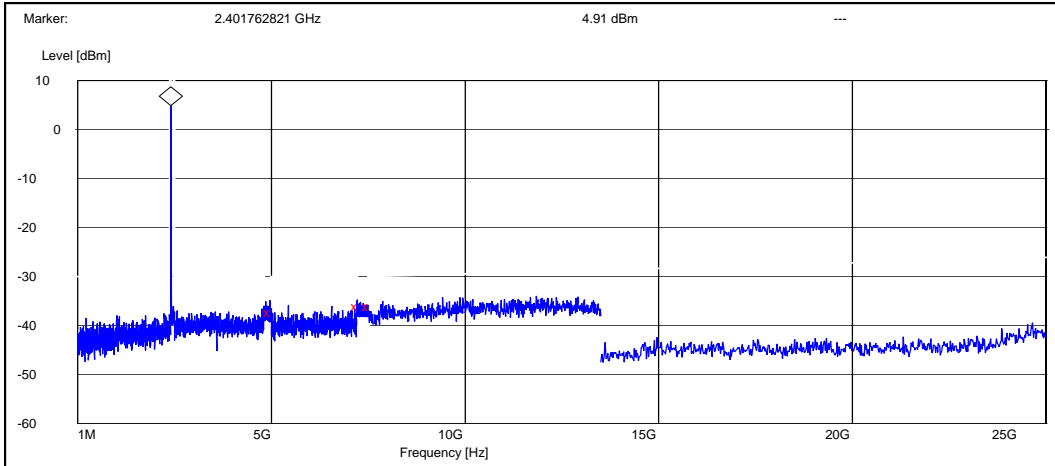

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4968.269231	-42.307987	PASSED
7212.980769	-41.007987	PASSED
7500.000000	-41.007987	PASSED


Channel 40 / 2442 MHz

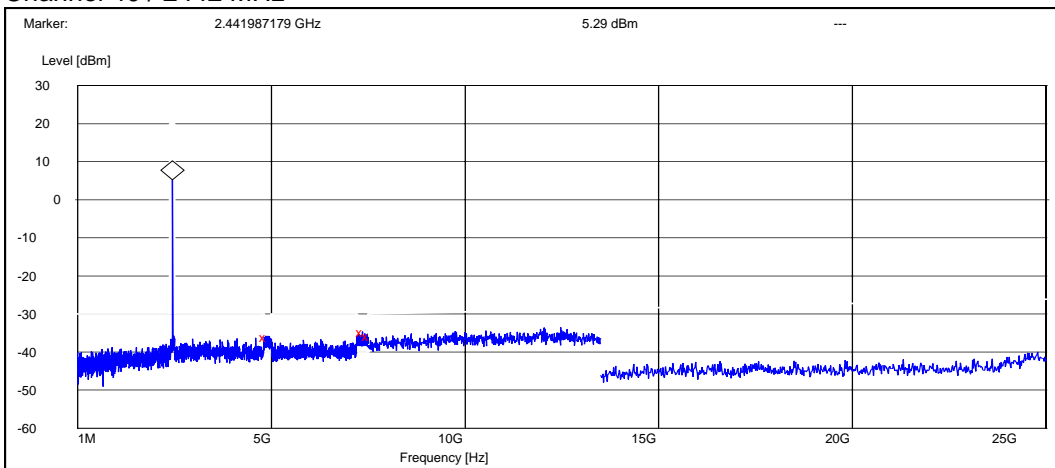

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4854.166667	-41.392253	PASSED
7358.653846	-40.192253	PASSED
7500.000000	-41.292253	PASSED

Channel 78 / 2480 MHz

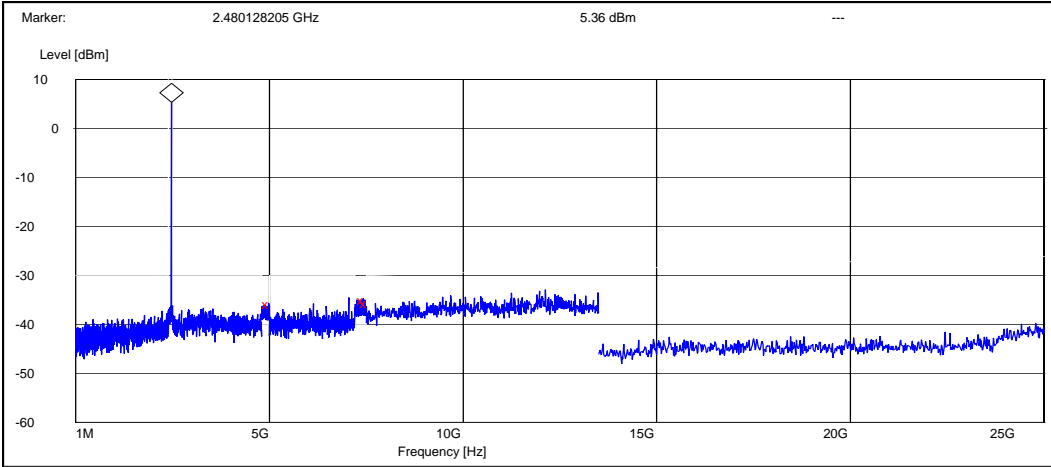


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4973.076923	-41.262535	PASSED
7423.557692	-40.562535	PASSED
7500.000000	-41.062535	PASSED

4.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

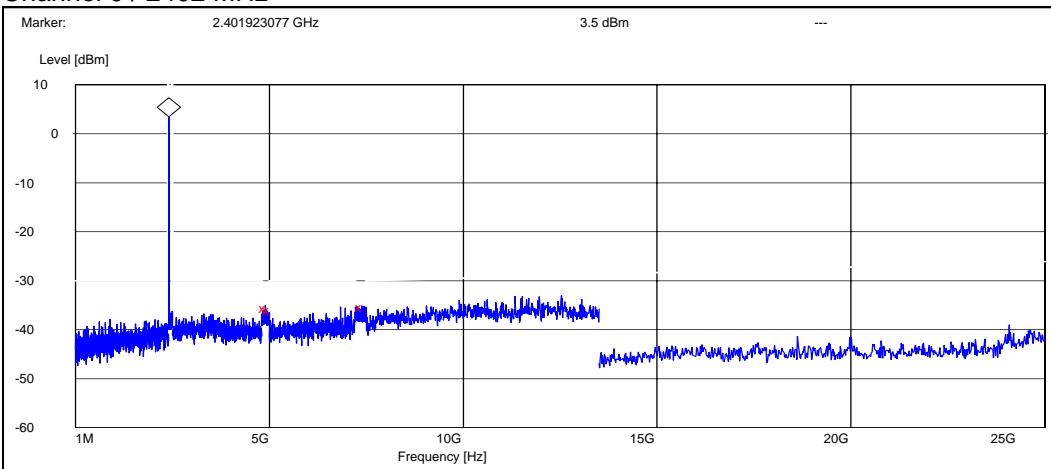

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4889.743590	-39.096708	PASSED
5000.000000	-39.596708	PASSED
7382.211538	-38.996708	PASSED


Channel 40 / 2442 MHz

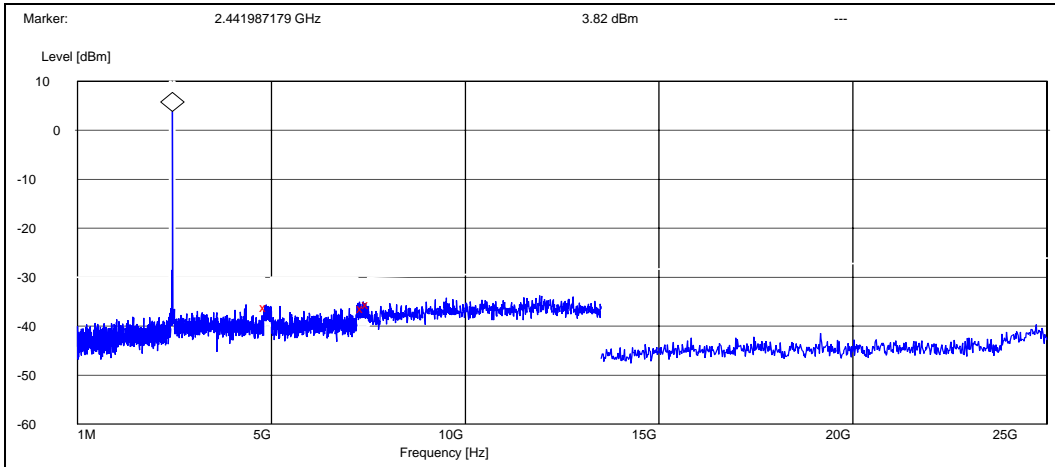

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4869.230769	-39.920825	PASSED
7367.307692	-40.220825	PASSED
7500.000000	-39.320825	PASSED

Channel 78 / 2480 MHz

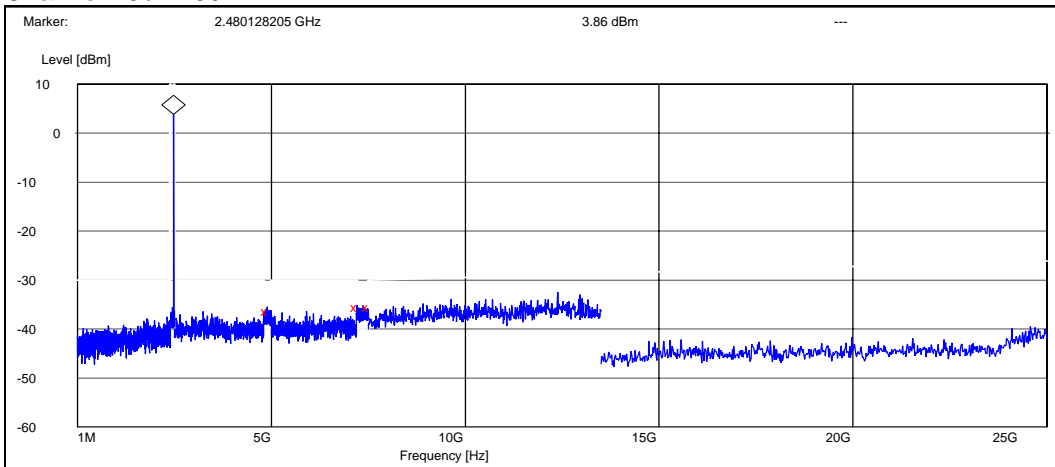

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4888.782051	-40.256531	PASSED
7200.480769	-39.356531	PASSED
7500.000000	-39.356531	PASSED

## 5. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

<b>EUT with DUT number</b>	RM-596 DUT42187
<b>Accessories with DUT numbers</b>	AC15E DUT42191, WH-701 DUT42193
<b>Operation Voltage [V] / [Hz]</b>	115 / 60
<b>Result</b>	PASSED
<b>Remarks</b>	DSSS 11 Mbps
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	24 / 39 / 99.1
<b>Date of measurements</b>	10-Mar-2010
<b>Measured by</b>	Jari Jantunen

### 5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where  $U_{RX}$  is receiver reading and  $A_{TOT}$  is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dB $\mu$ V]	Average limit [dB $\mu$ V]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

## 5.2. Bluetooth Test results

### 5.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

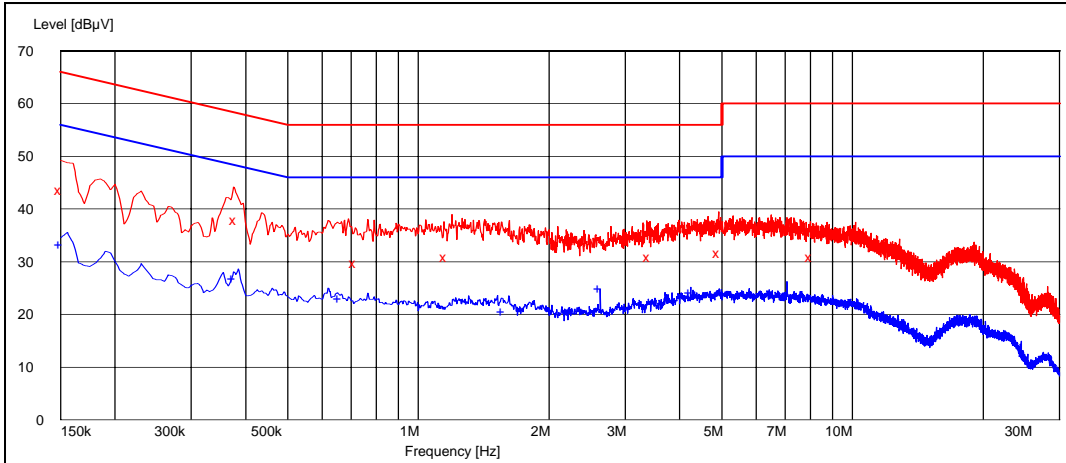

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBµV]	Line	Result
0.150000	43.60	L1	PASSED
0.380000	37.90	L1	PASSED
0.715000	29.70	L1	PASSED
1.160000	30.90	L1	PASSED
3.405000	31.00	L1	PASSED
4.935000	31.60	L1	PASSED
8.050000	30.80	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBµV]	Line	Result
0.150000	33.30	N	PASSED
0.375000	27.00	L1	PASSED
0.660000	23.00	L1	PASSED
1.565000	20.60	L1	PASSED
2.625000	25.00	L1	PASSED
4.240000	24.30	L1	PASSED

**6. 20 dB bandwidth**  
(FCC §15.247(a)(1), RSS-210 A8.1 (a))

<b>EUT with DUT number</b>	RM-596 DUT42205
<b>Accessories with DUT numbers</b>	WH-701 DUT42193
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	21 / 48 / 100.0
<b>Date of measurements</b>	15-Mar-2010
<b>Measured by</b>	Hannu Söderholm

**6.1. Test method and limit**

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

## 6.2. Bluetooth Test results


### 6.2.1 GFSK modulation, PRBS packet type

Channel / $f_c$ [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	801.282	PASSED
40 / 2442	855.769	PASSED
78 / 2480	919.872	PASSED


Channel 0 / 2402 MHz

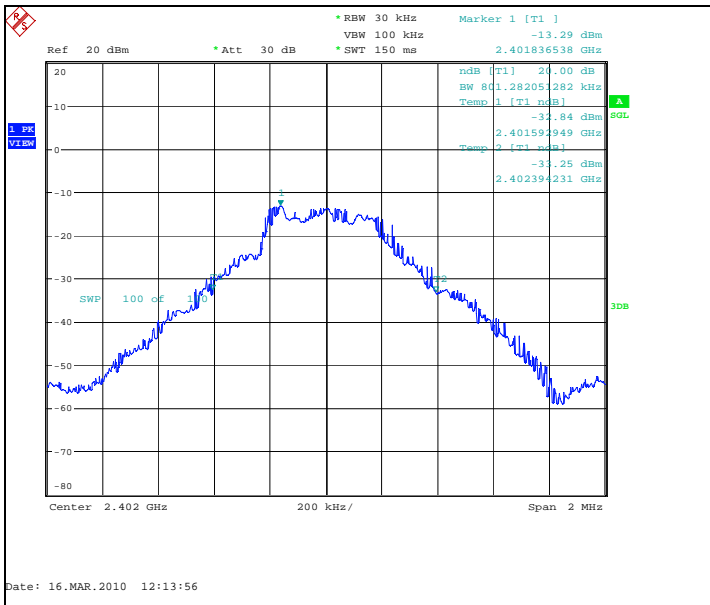

Channel 40 / 2442 MHz

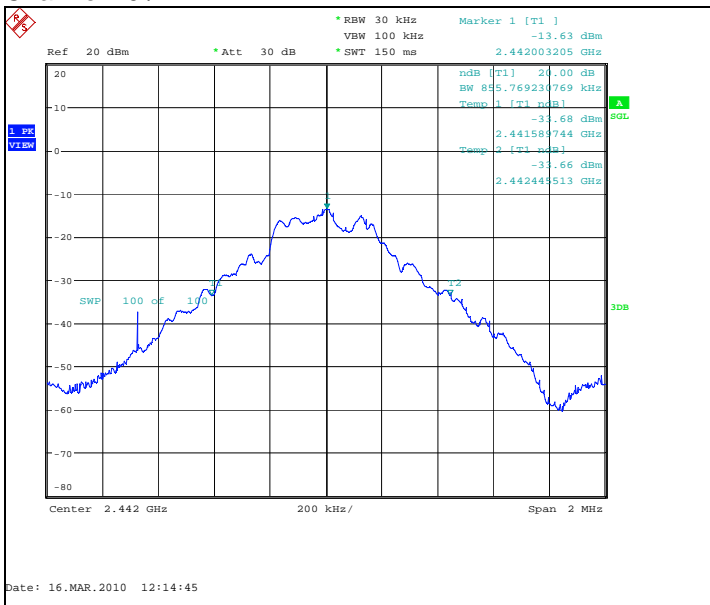


Channel 78 / 2480 MHz

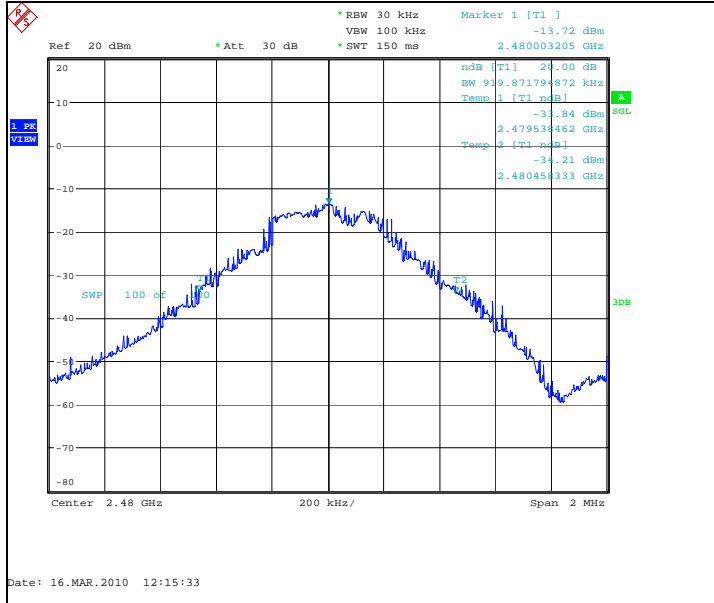

6.2.2 8DPSK modulation, PRBS packet type


Channel / f <sub>c</sub> [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1304.487	PASSED
40 / 2442	1310.897	PASSED
78 / 2480	1307.692	PASSED

Channel 0 / 2402 MHz

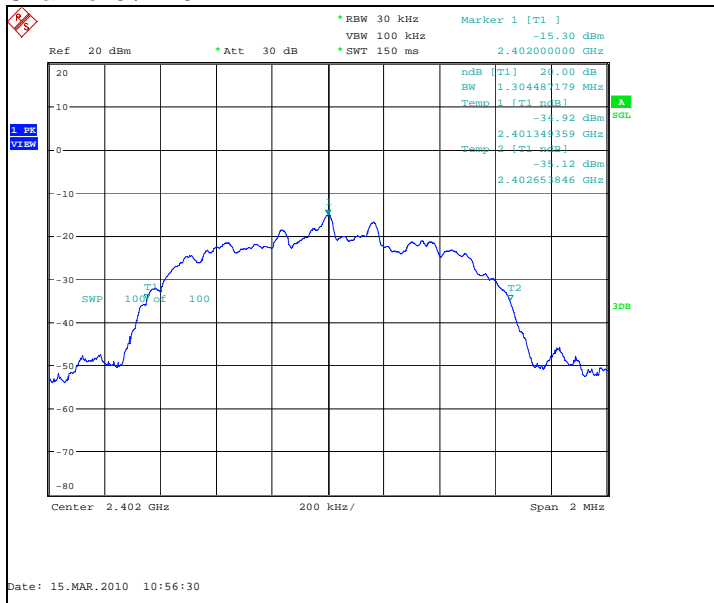




Channel 40 / 2442 MHz

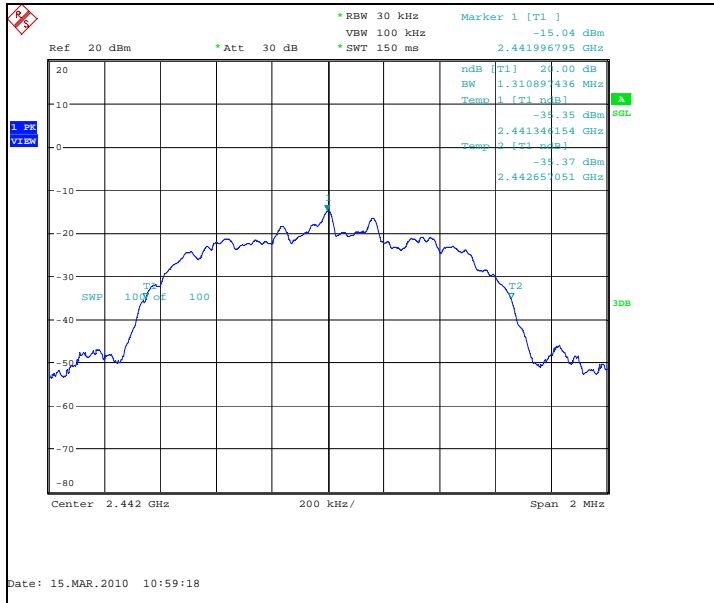

Channel 78 / 2480 MHz

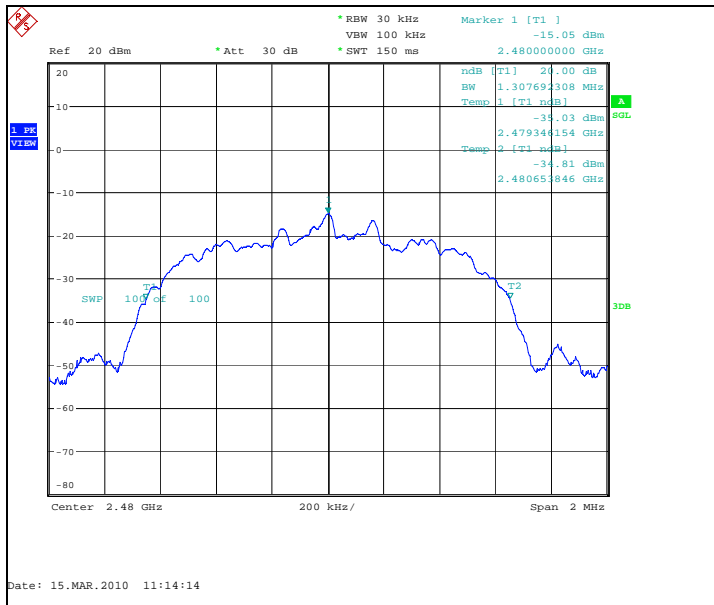

## 7. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (b))

EUT with DUT number	RM-596 DUT42205
Accessories with DUT numbers	WH-701 DUT42193
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 48 / 100.0
Date of measurements	15-Mar-2010
Measured by	Hannu Söderholm

### 7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or 2/3 of the 20 dB bandwidth

### 7.2. Bluetooth Test results

#### 7.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
993.59	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

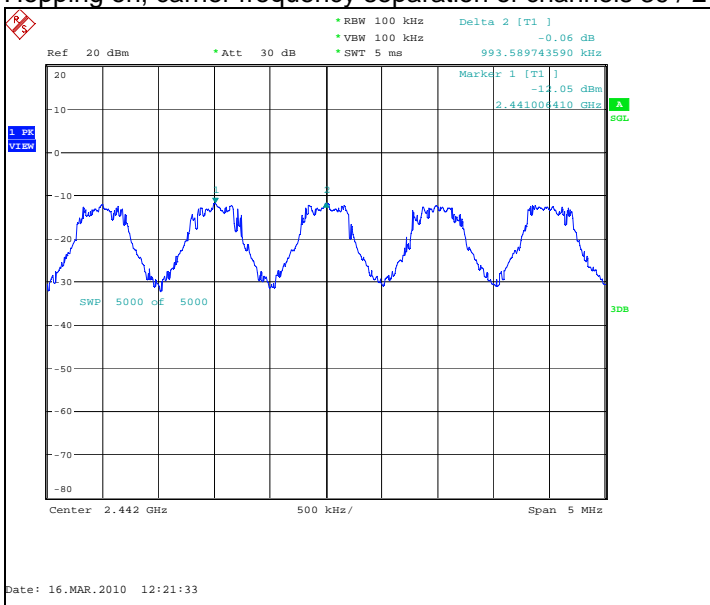

**7.2.2 8DPSK modulation, PRBS packet type**

Carrier frequency separation [kHz]	Result
993.59	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

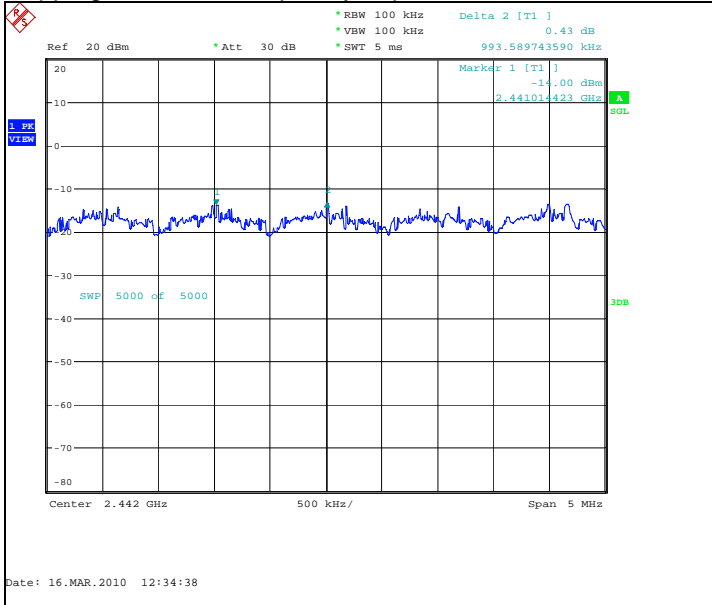

**8. Number of hopping frequencies**  
(FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

<b>EUT with DUT number</b>	RM-596 DUT42205
<b>Accessories with DUT numbers</b>	WH-701 DUT42193
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	21 / 48 / 100.0
<b>Date of measurements</b>	15-Mar-2010
<b>Measured by</b>	Hannu Söderholm

**8.1. Test method and limit**

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

## 8.2. Bluetooth Test results

### 8.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED


Hopping on, number of hopping frequencies

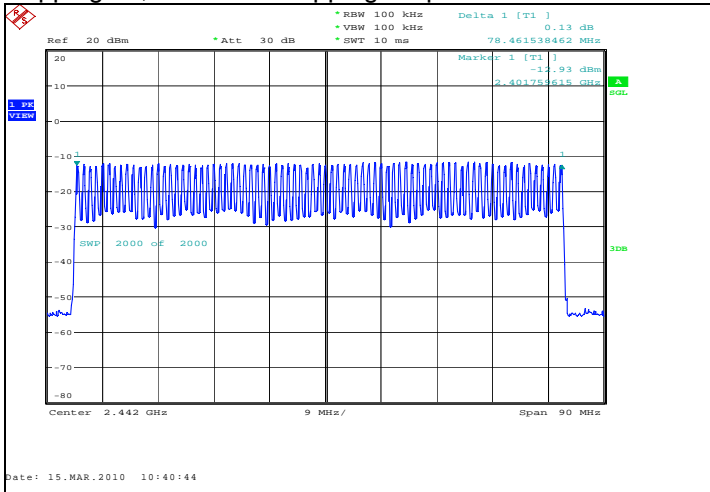

### 8.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
25	PASSED

Hopping on, number of hopping frequencies

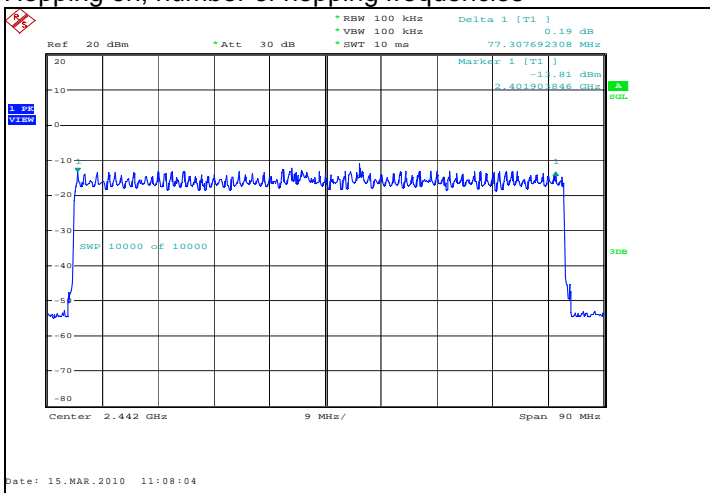

**9. Time of occupancy**  
(FCC §15.247(a)(1)(iii), RSS-210 A8.1 (d))

<b>EUT with DUT number</b>	RM-596 DUT42205
<b>Accessories with DUT numbers</b>	WH-701 DUT42193
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	21 / 48 / 100.0
<b>Date of measurements</b>	15-Mar-2010
<b>Measured by</b>	Hannu Söderholm

**9.1. Test method and limit**

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


<b>Limit [s]</b>
≤ 0.4

## 9.2. Bluetooth test results


### 9.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
84	2 929	0.246077	PASSED

#### Hopping on, number of transmissions, channel 40 / 2442 MHz

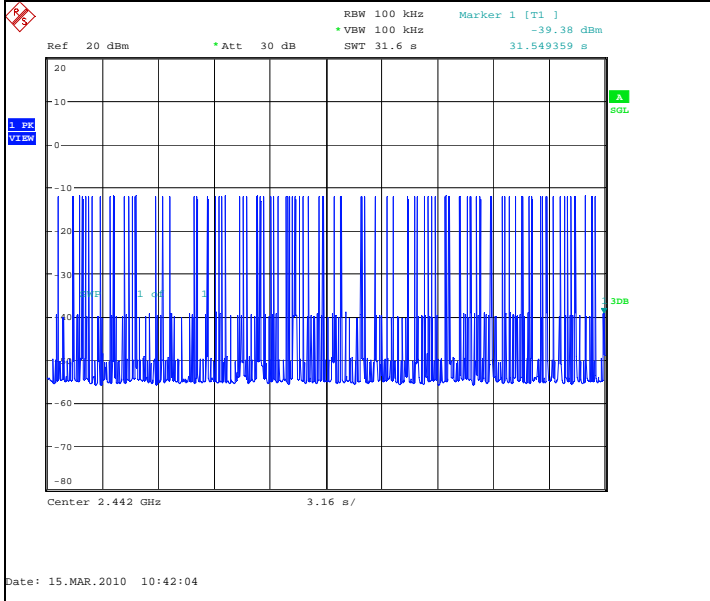


#### Hopping on, duration of one transmission, channel 40 / 2442 MHz

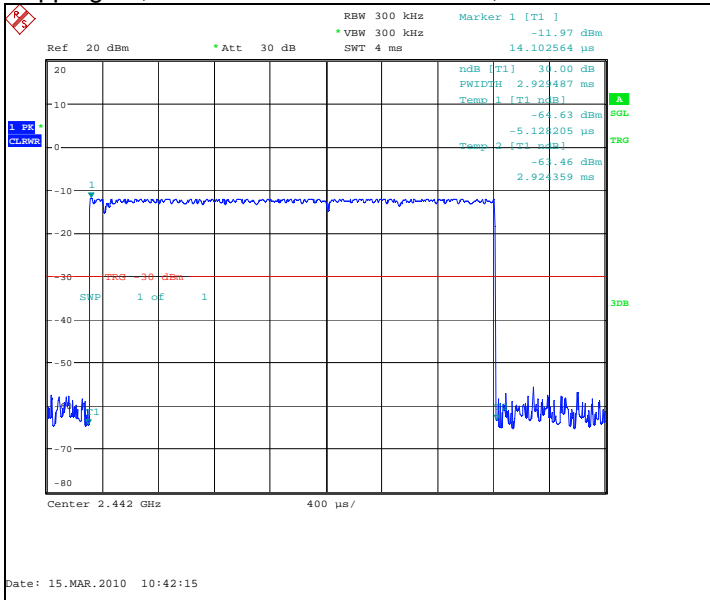


**9.2.2 8DPSK modulation, PRBS packet type**

Measured number of transmissions	Duration of one transmission [µs]	Time of occupancy [s]	Result
88	2 936	0.258359	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

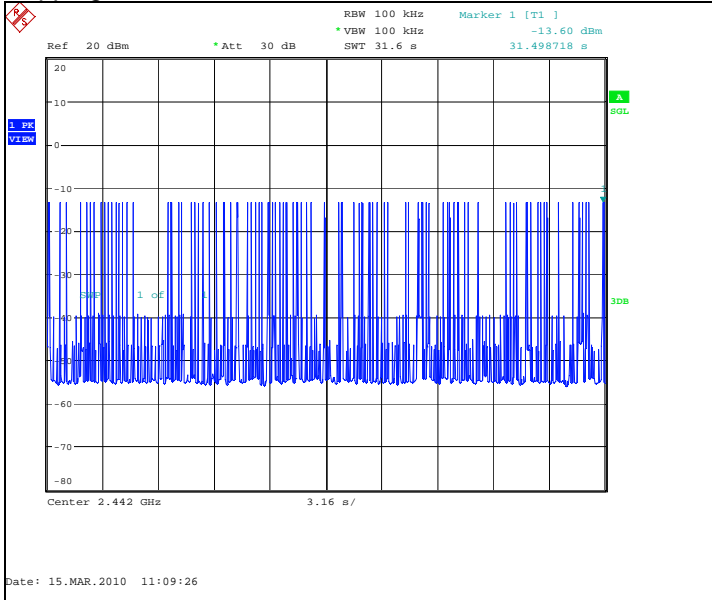

Hopping on, duration of one transmission, channel 40 / 2442 MHz

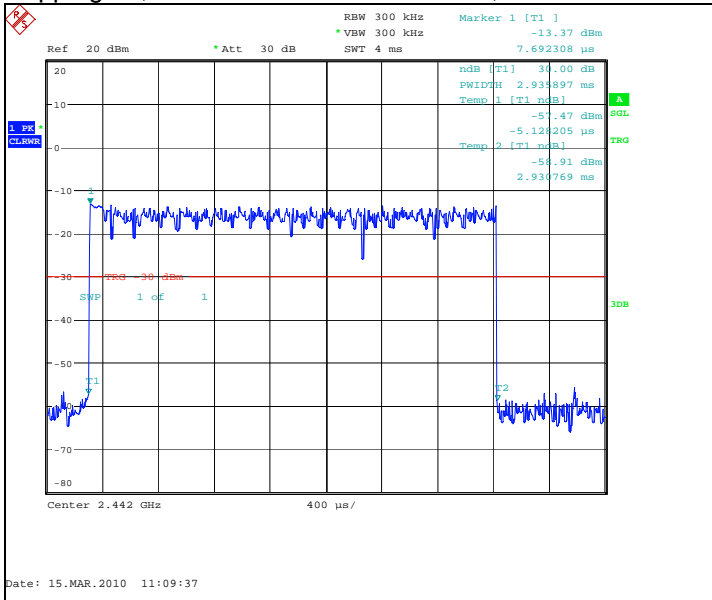



## 10. Test Equipment

### 10.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 $\mu$ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

### 10.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

