

APPLICANT: ACROWAVE SYSTEMS CO., LTD.

FCC ID: PE6AAP-1100E

TABLE OF CONTENTS

TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST & TEST PROCEDURE
PAGE 2.....TEST PROCEDURES CONTD.
PAGE 3.....PRODUCT DESCRIPTION
PAGE 4.....POWERLINE CONDUCTED INTERFERENCE DATA
PAGE 5A-5B.....POWERLINE CONDUCTED PLOTS
PAGE 6.....6.0dB BANDWIDTH & POWER OUTPUT
PAGE 7A-7C.....6.0dB BANDWIDTH PLOT
PAGE 8.....METHOD OF MEASURING RF CONDUCTED SPURIOUS
EMISSIONS & SPURIOUS EMISSIONS AT ANTENNA
TERMINALS
PAGE 9.....RADIATION INTERFERENCE TEST DATA
PAGE 10.....METHOD OF MEASURING RADIATION INTERFERENCE
PAGE 11.....RADIATED SPURIOUS EMISSIONS INTO ADJACENT
RESTRICTED BAND
PAGE 12.....BANDEDGE PLOT
PAGE 13.....POWER SPECTRAL DENSITY AND PROCESSING GAIN
PAGE 14A-14C.....POWER SPECTRAL DENSITY PLOT

EXHIBIT ATTACHMENTS:

EXHIBIT 1.....FCC ID LABEL SAMPLE
EXHIBIT 2.....SKETCH OF FCC ID LABEL LOCATION
EXHIBIT 3A.....EXTERNAL PHOTO - TOP VIEW
EXHIBIT 3B.....EXTERNAL PHOTO - BOTTOM VIEW
EXHIBIT 3C.....EXTERNAL PHOTO - RIGHT SIDE VIEW
EXHIBIT 3D.....EXTERNAL PHOTO - LEFT SIDE VIEW
EXHIBIT 3E.....EXTERNAL PHOTO - FRONT VIEW
EXHIBIT 3F.....EXTERNAL PHOTO - REAR VIEW
EXHIBIT 4A-4D.....INTERNAL PHOTOS - COPPER VIEW
EXHIBIT 4E-4F.....INTERNAL PHOTOS - COMPONENT VIEW
EXHIBIT 5A-5B.....BLOCK DIAGRAM
EXHIBIT 6A-6D.....SCHEMATICS
EXHIBIT 6E-6I.....SCHEMATICS
EXHIBIT 7.....CIRCUIT DESCRIPTION
EXHIBIT 8.....PROCESSING GAIN TEST METHODS
EXHIBIT 9.....INSTRUCTION MANUAL
EXHIBIT 10.....TEST SET UP PHOTO - RADIATED
EXHIBIT 11.....TEST SET UP PHOTO - POWERLINE
EXHIBIT 12.....SPECIFICATION SHEET

APPLICANT: ACROWAVE SYSTEMS CO., LTD.

FCC ID: PE6AAP-1100E

REPORT #: T:\A\ACRO\375K1\375K1RPT.DOC

TABLE OF CONTENTS LIST

TEST EQUIPMENT LIST

1. Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372.
2. Biconnical Antenna: Eaton Model 94455-1, S/N 1057.
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171.
4. Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632.
5. Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 40.
6. Double-Ridged Horn Antenna: Electro-Metrics Model LPA-30, S/N 409
1-18 GHz, S/N 2319.
7. 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
8. Horn 40-60GHz: ATM Part #19-443-6R
9. Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604.
10. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
11. Frequency Counter: HP Model 5385A, S/N 3242A07460
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545.
13. Open Area Test Site #1-3meters.
14. Signal Generator: HP 8640B, S/N 2308A21464 .
15. Signal Generator: HP 8614A, S/N 2015A07428
16. Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N
9706-1211.
17. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
18. AC Voltmeter: HP Model 400FL, S/N 2213A14499.
19. Digital Multimeter: Fluke Model 8012A, S/N 4810047.
20. Digital Multimeter: Fluke Model 77, S/N 43850817.
21. Oscilloscope: Tektronix Model 2230, S/N 300572.3

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. Shielded interface cables were used in all cases except for cables connecting to the telephone line and the power cords. A test program was run which simulated a normal data transmission on a network.

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-1992 using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The ambient temperature of the UUT was 80°F with a humidity of 53%.

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
FCCID: PE6AAP-1100E
REPORT #: T:\A\ACRO\375K1\375K1RPT.DOC
PAGE #: 1

TEST PROCEDURES CONTINUED

BANDWIDTH 6.0dB: The measurements were made with the spectrum analyzer's resolution bandwidth(RBW)=1.0MHz and the video bandwidth(VBW)=3.0MHz and the span set as shown on Page 7A-7C.

POWER OUTPUT: The RF power output was measured at the antenna feed point using a peak power meter.


ANTENNA CONDUCTED EMISSIONS: The RBW=100KHz, VBW=300KHz and the span set to 10.0MHz and the spectrum was scanned from 30MHz to the 10th Harmonic of the fundamental. Above 1.0GHz the resolution bandwidth was 1.0MHz and the VBW = 3.0MHz and the span to 50MHz.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth(RBW) of the spectrum analyzer was 100kHz up to 1GHz and 1.0MHz above 1GHz with an appropriate sweep speed. The VBW above 1.0GHz was = 3.0MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 80°F with a humidity of 40%.

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
FCCID: PE6AAP-1100E
REPORT #: T:\A\ACRO\375K1\375K1RPT.DOC
PAGE #: 2

PRODUCT DESCRIPTION:

This device is a wireless LAN adapter card that provides wireless connection between computers.

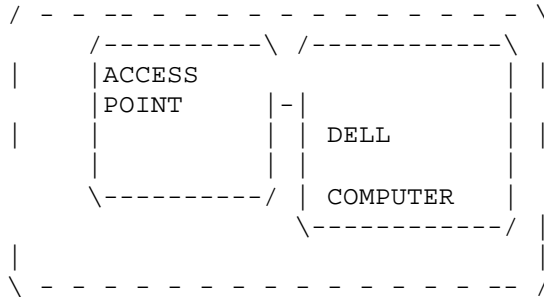

FREQUENCY RANGE: 2.4-2.4835 GHz

SUPPORT BIT RATES: 11 Mbps CCK, 5.5 Mbps CCK, 2 Mbps DQPSK,
1 mPBS dbsk

SPREADING: DSSS (Direct Sequence Spread Spectrum)

CHIP RATE: 11 Mcps

ANTENNA: External 2 dBi Antenna with reverse SMA connector

MEDIA ACCESS
PROTOCOL: CSMA/CA (Collission Avoidance) with ACK

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
FCCID: PE6AAP-1100E
REPORT #: T:\A\ACRO\375K1\375K1RPT.DOC
PAGE #: 3

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
FCC ID: PE6AAP-1100E
NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE
RULES PART NUMBER: 15.107(a)
REQUIREMENTS: .45 - 30 MHz 250 uV OR 47.96 dBuV
TEST PROCEDURE: ANSI STANDARD C63.4-1992. The spectrum
was scanned from .45 to 30 MHz.

TEST DATA:

THE HIGHEST EMISSION READ FOR LINE 1 WAS 68.308 uV @ 6.06 MHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 81.184 uv @ 5.65 MHz.

THE GRAPHS IN THE NEXT TWO PAGES REPRESENT THE EMISSIONS TAKEN FOR
THIS DEVICE.

TEST RESULTS: Both lines were observed. The measurements indicate
that the unit DOES appear to meet the FCC requirements for this class
of equipment.

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
FCCID: PE6AAP-1100E
REPORT #: T:\A\ACRO\375K1\375K1RPT.DOC
PAGE #: 4


MKR 6.06 MHz
68.308 μ V

hp REF 7.070 mV ATTEN 0 dB + 20 dB

10 dB/

ACROWAVE SYSTEMS CO LTD
FCC ID : PE6AAP-1100E
JOB # : 375K1
PAGE # 5A

DL
250.8
 μ V

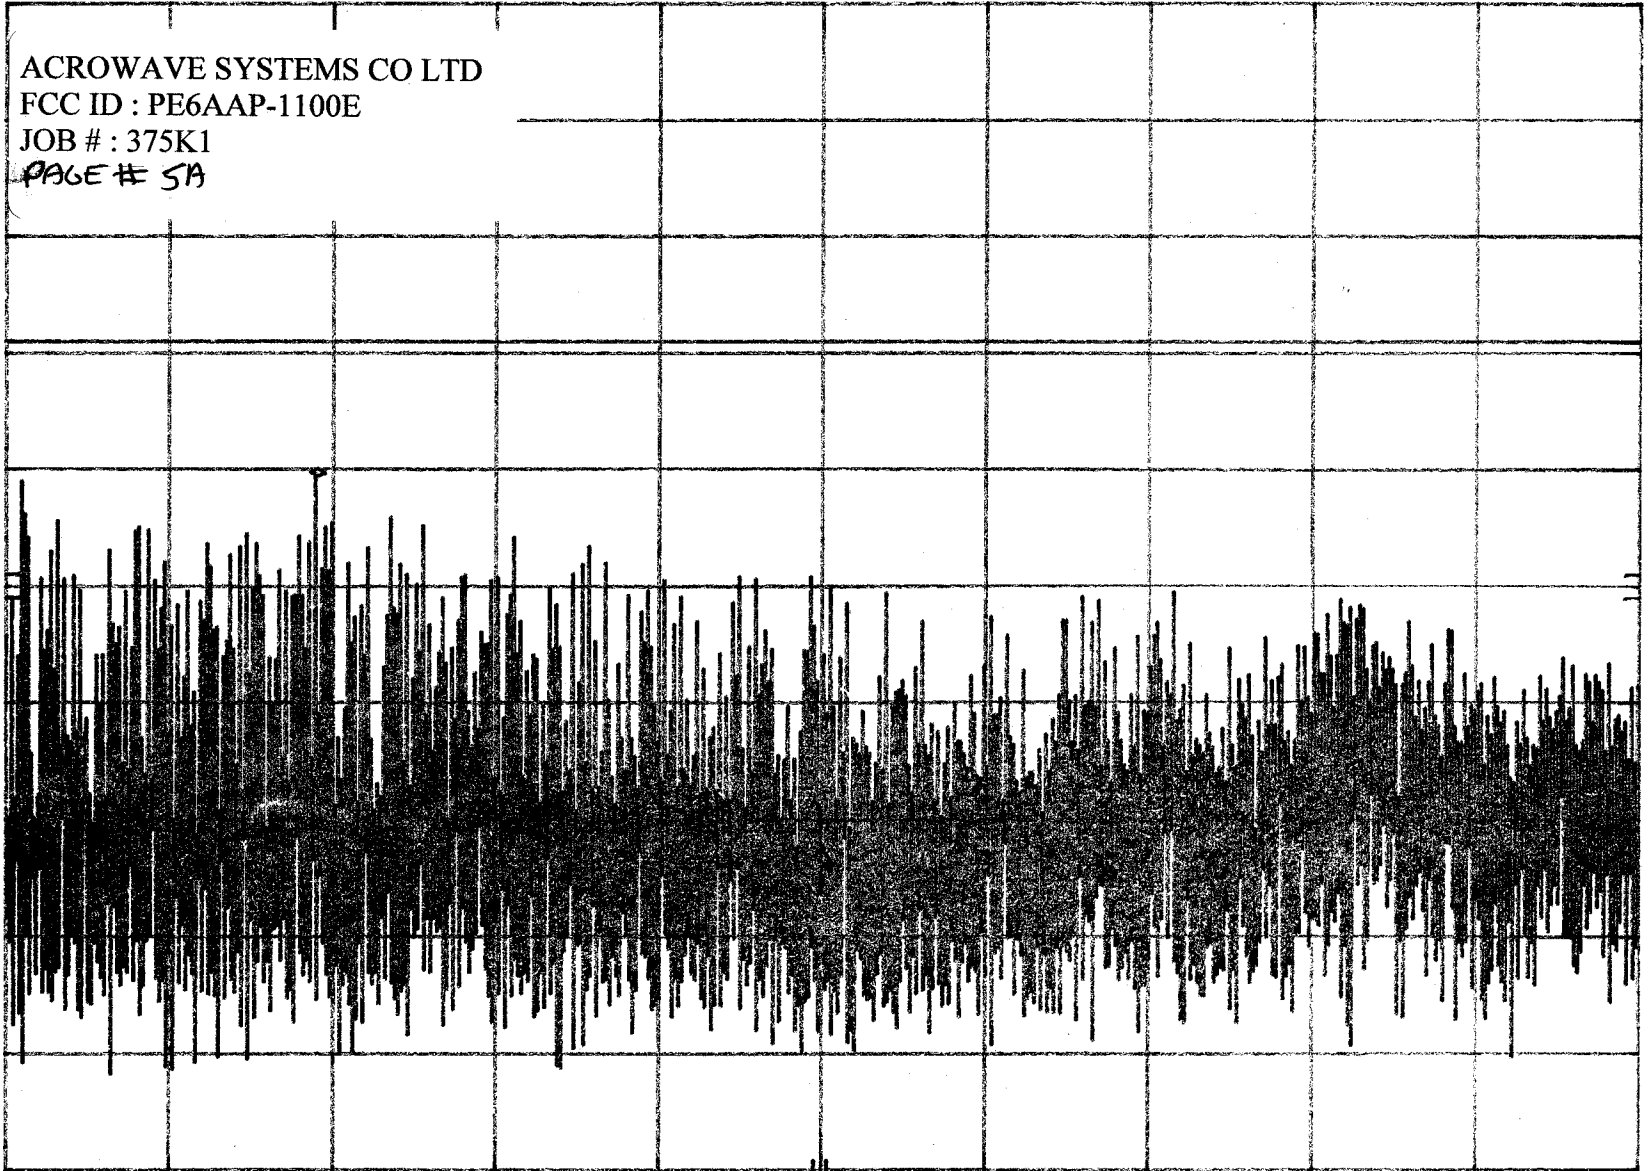

START 450 kHz RES BW 10 kHz VBW 10 kHz STOP 30.00 MHz
SWP 750 msec


hp REF 7.070 mV ATTEN 0 dB + 20 dB

MKR 5.65 MHz
81.184 μV

10 dB/

ACROWAVE SYSTEMS CO LTD
FCC ID : PE6AAP-1100E
JOB # : 375K1
PAGE # 5B

DL
250.8
μV

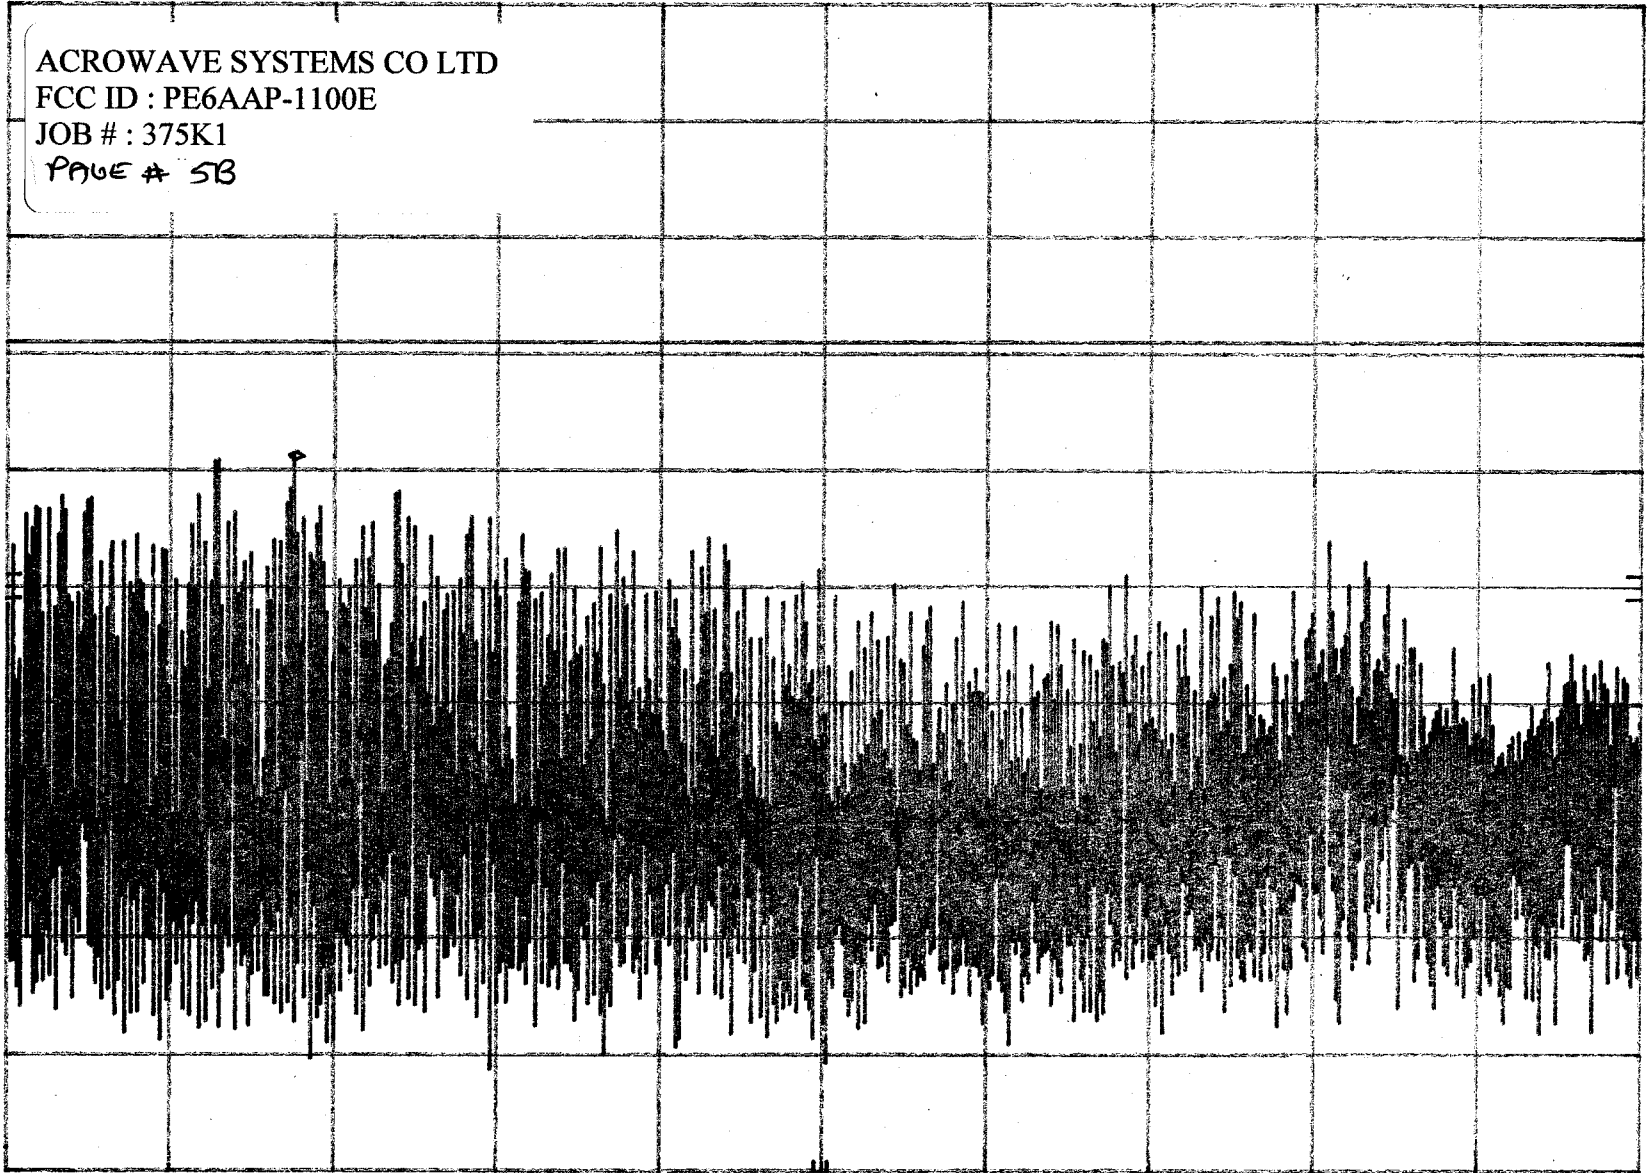

START 450 kHz

RES BW 10 kHz

VBW 10 kHz


STOP 30.00 MHz

SWP 750 msec

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
 FCC ID: PE6AAP-1100E
 NAME OF TEST: 6.0dB BANDWIDTH
 RULES PART NUMBER: 15.247(a)(2)
 REQUIREMENTS: The 6.0dB bandwidth must be greater than 500KHz.
 MEASUREMENT: The 6.0dB bandwidth measured @ 2442.00MHz was 10.50MHz.
 MEASUREMENT DATA: See plots on the next 3 pages.

NAME OF TEST: POWER OUTPUT
 RULES PART NUMBER: 15.247(b) 1.0Watt or +30dBm
 MEASUREMENT: 17 mWATTS @ 2417.00 MHz
 20 mWATTS @ 2442.00 MHz
 20 mWATTS @ 2462.00 MHz

15.247(c) Method of Measuring RF Power output:
 The Peak power Sensor was connected in place of the antenna.

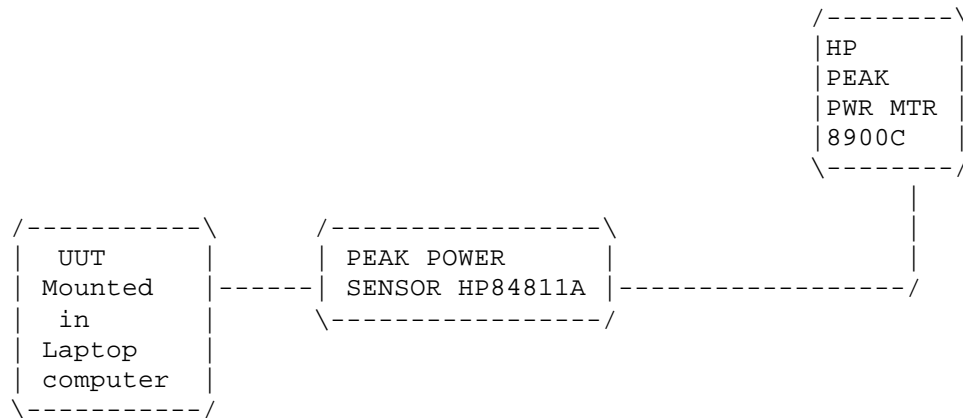

hp


REF 97.0 dB μ V ATTEN 0 dB + 20 dB

MKR Δ -10.50 MHz
-0.20 dB

10 dB/

ACROWAVE SYSTEMS CO LTD
FCC ID : PE6AAP-1100E
JOB # : 375K1
PAGE # 7A

MARKER Δ
-10.50 MHz
-0.20 dB

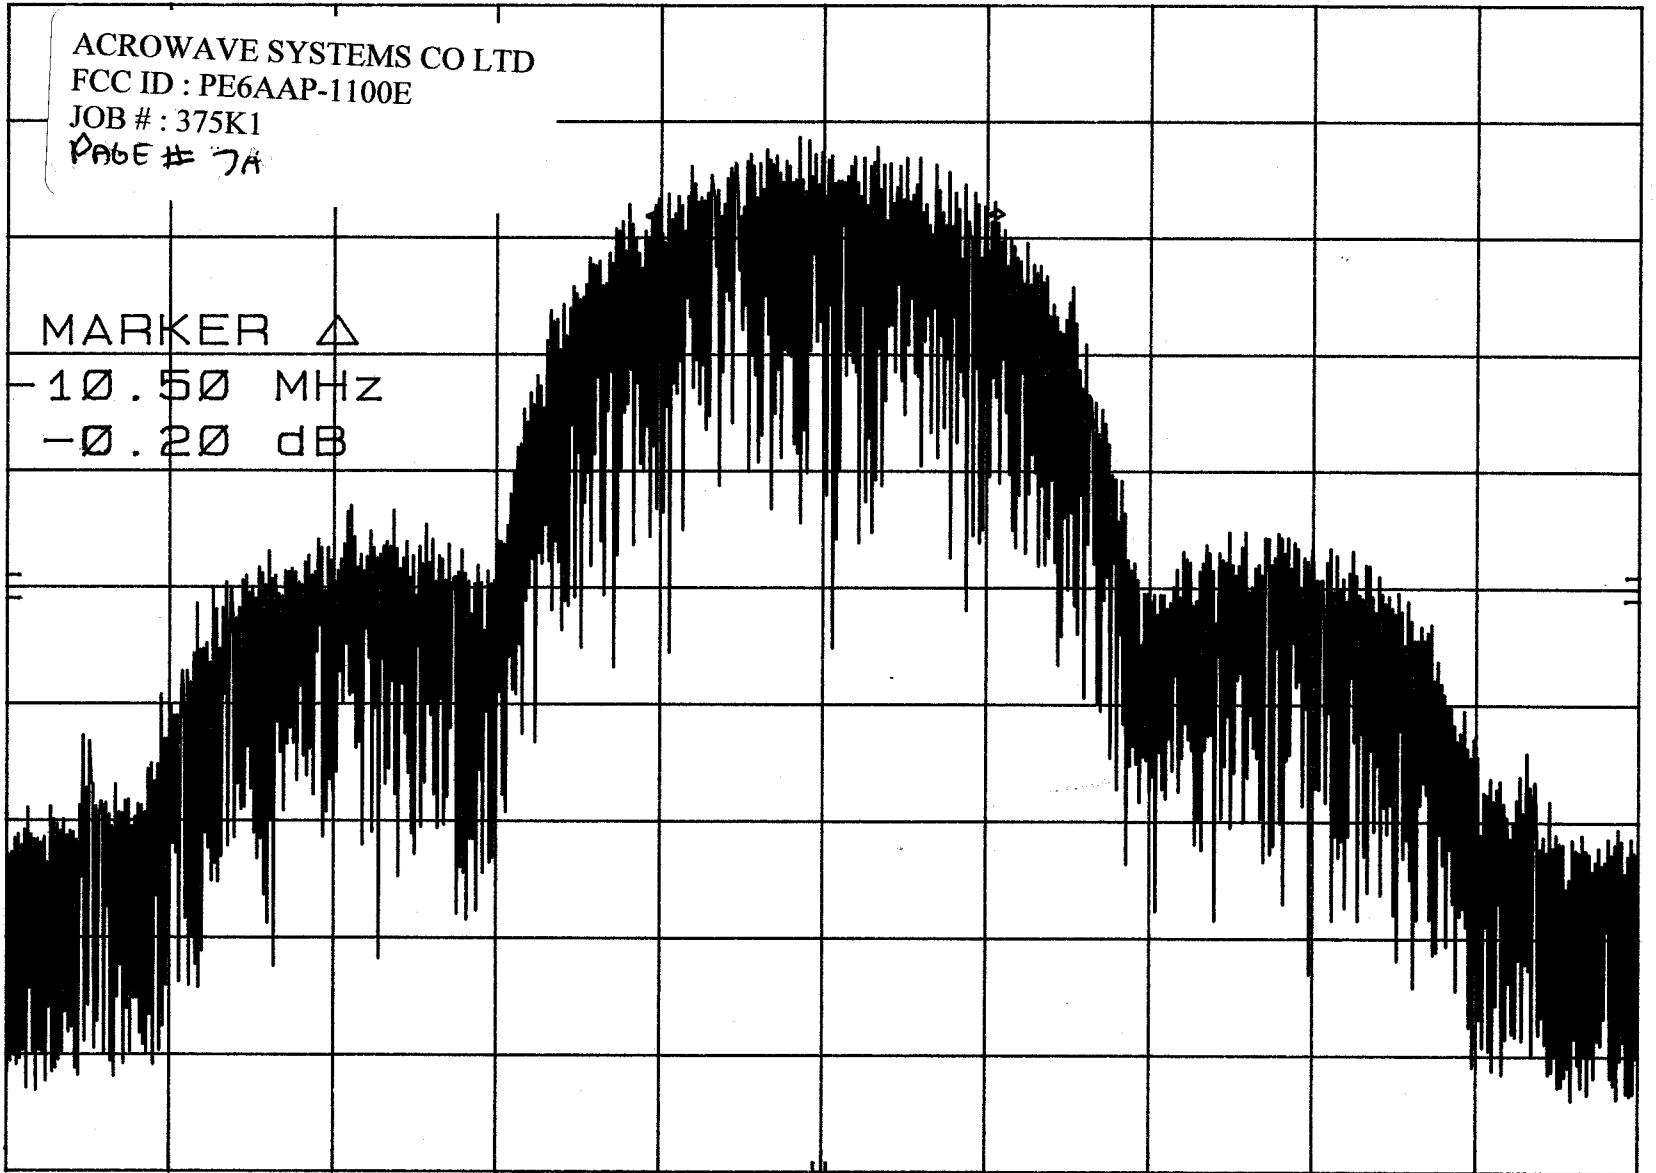

CENTER 2.442 4 GHz

RES BW 100 kHz (1) VBW 300 kHz

SPAN 50.0 MHz
SWP 37.5 msec


MKR Δ -11.00 MHz
0.20 dB

hp REF 97.0 dB μ V ATTEN 0 dB + 20 dB

10 dB/

ACROWAVE SYSTEMS CO LTD
FCC ID : PE6AAP-1100E
JOB # : 375K1
PAGE # 7B

MARKER Δ
-11.00 MHz
0.20 dB

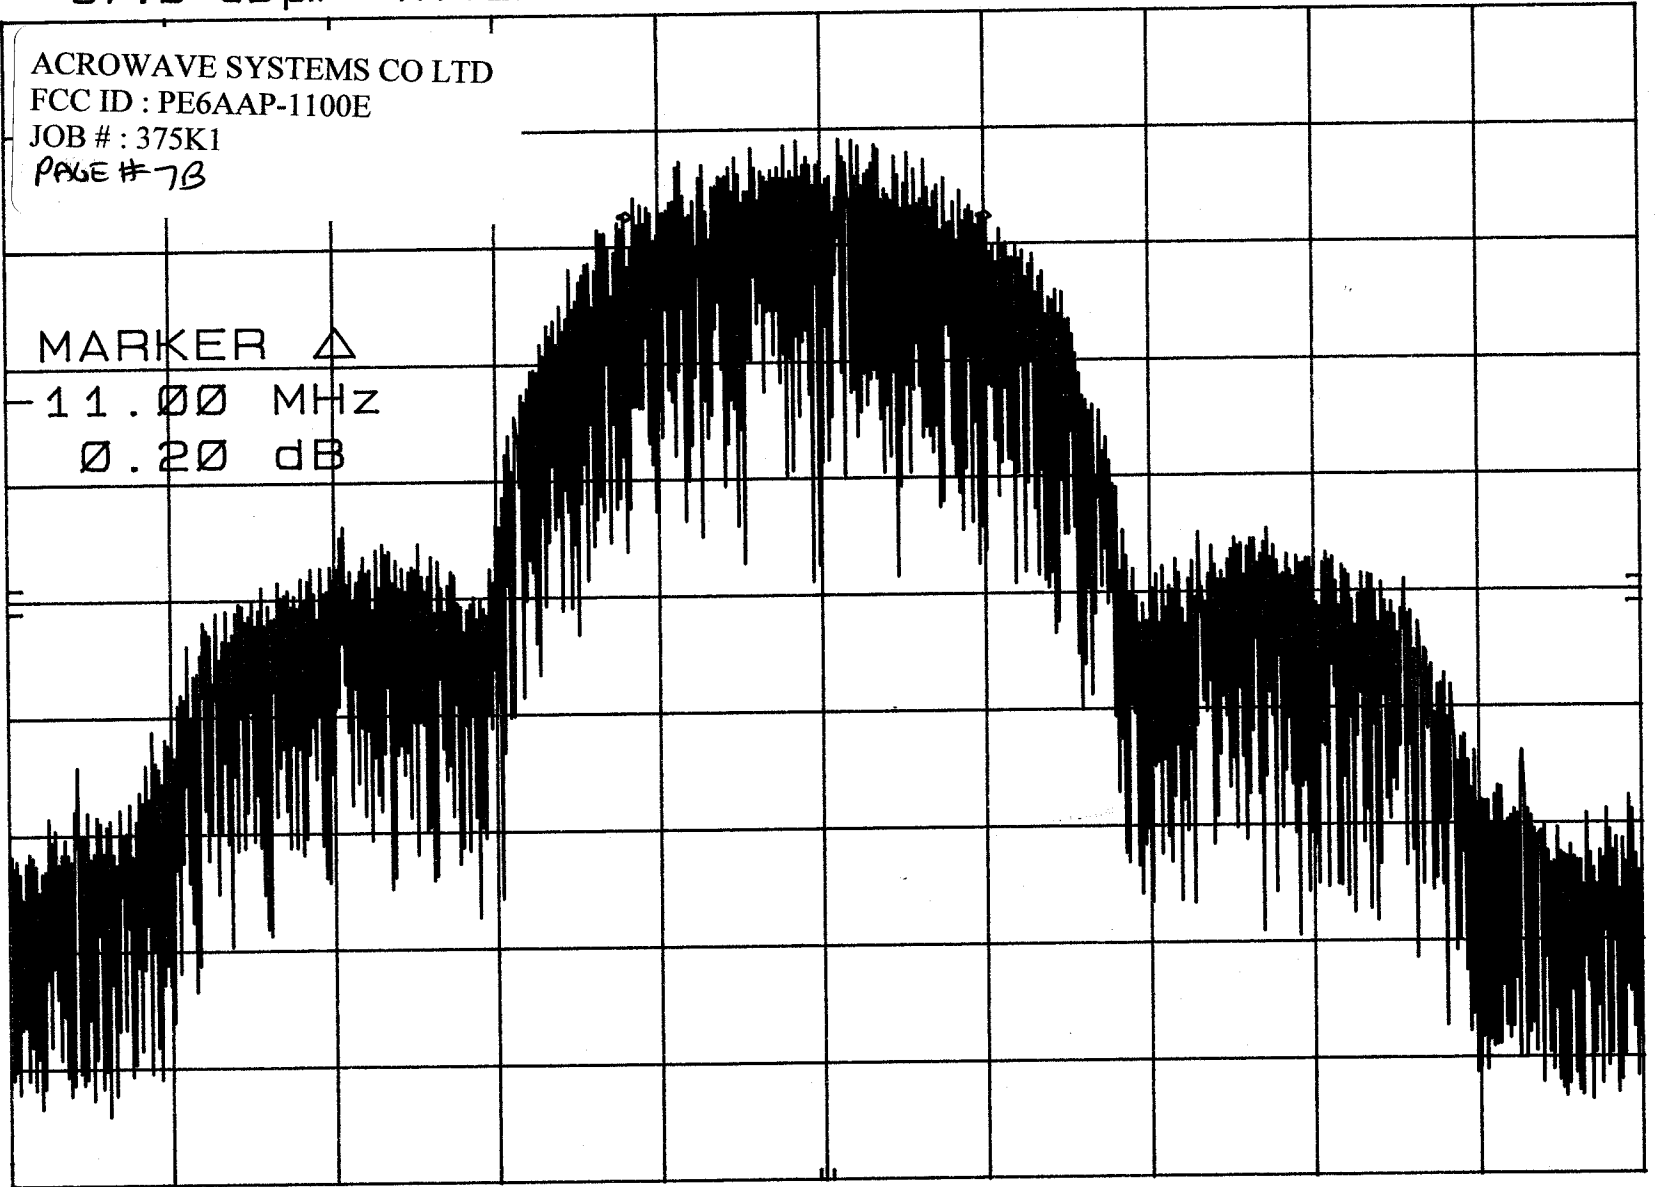

CENTER 2.417 7 GHz

RES BW 100 kHz (i) VBW 300 kHz

SPAN 50.0 MHz
SWP 37.5 msec


hp REF 97.0 dBμV ATTN 0 dB + 20 dB

MKR Δ 11.00 MHz
-0.20 dB

10 dB/


ACROWAVE SYSTEMS CO LTD
FCC ID : PE6AAP-1100E
JOB # : 375K1
PAGE # 7C

MARKER Δ
11.00 MHz
-0.20 dB

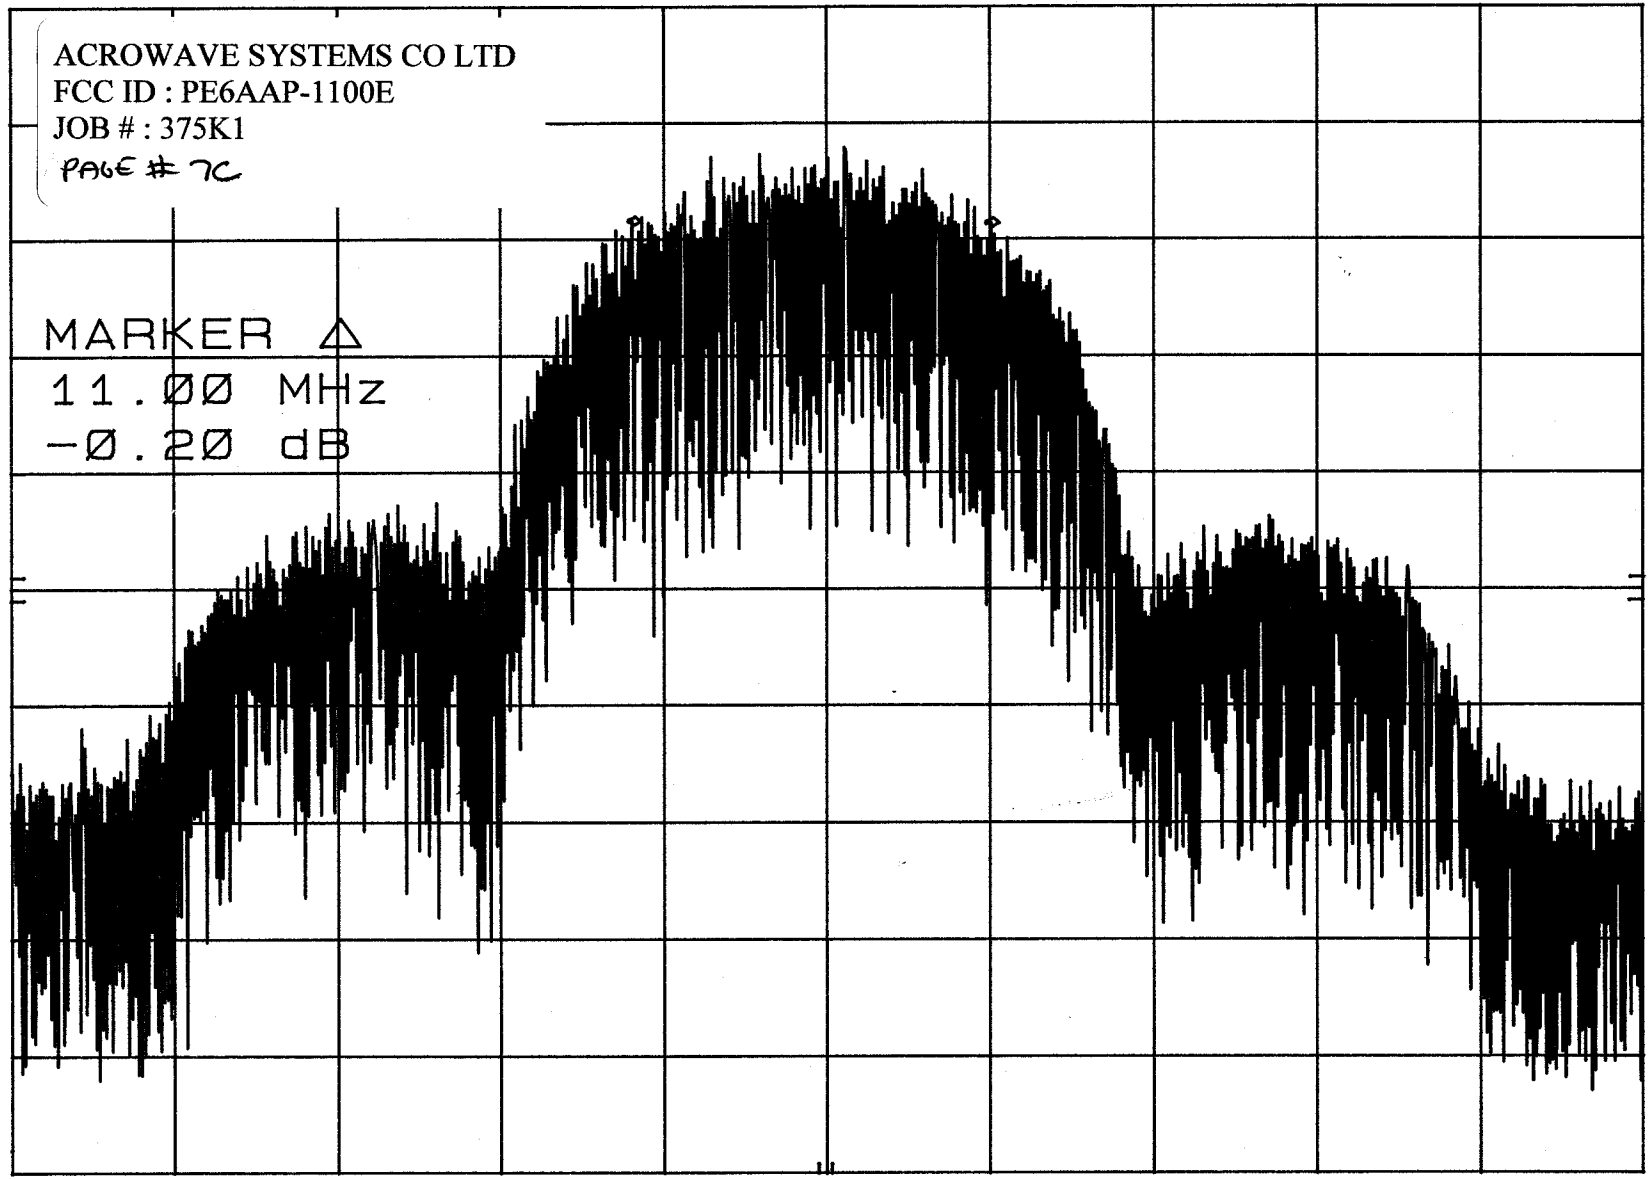

CENTER 2.462 5 GHz SPAN 50.0 MHz
RES BW 100 kHz (i) VBW 300 kHz SWP 37.5 msec

15.247(c) Method of Measuring RF Conducted Spurious Emissions

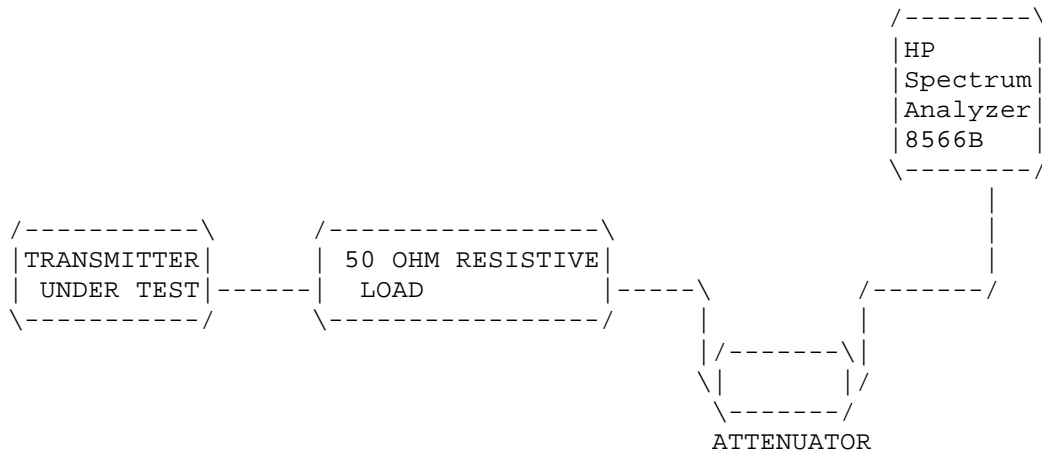

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be at least 20dB down from the highest emission level within the authorized band as measured with a 1 MHz RBW.

EMISSION FREQUENCY MHz	dB BELOW CARRIER
2417.0	00.0
4834.0	93.0
7251.0	74.3
9668.0	95.7
2442.0	00.0
4884.0	82.7
7326.0	75.1
9768.0	98.8
2462.0	00.0
4924.0	75.0
7486.0	68.3
9848.0	102.0
19696.0	102.3

NOTE: THE SPECTRUM WAS SCANNED TO THE TENTH HARMONIC.

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
 FCCID: PE6AAP-1100E
 REPORT #: T:\A\ACRO\375K1\375K1RPT.DOC
 PAGE #: 8

15.247(c),15.205 &15.209(b) Field strength of spurious emissions:

REQUIREMENTS:

FIELD STRENGTH	FIELD STRENGTH	S15.209
of Fundamental:	of Harmonics	30 - 88 MHz 40 dBuV/m @3M
902-928MHz		88 -216 MHz 43.5
2.4-2.4835GHz		216 -960 MHz 46
127.38dBuV/m @3m		ABOVE 960 MHz 54dBuV/m

REQUIREMENTS: Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

TEST DATA:

EMISSION FREQUENCY MHz	METER READING @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRENGTH dBuV/m	FCC. LIMIT dB	MARGIN dB	ANT.
------------------------------	-------------------------------	--------------------	-----------	-----------------------------	---------------------	--------------	------

Intentional Radiator Emissions

2412.00	67.50	1.09	29.03	97.62	127.38	29.76	V
4824.00R	4.30	1.45	33.93	39.68	54.00	14.32	V
7236.00R	0.50	1.82	36.64	38.96	54.00	15.04	V
9648.00	1.90	2.11	38.59	42.61	54.00	11.39	V
2442.00	66.50	1.10	29.10	96.70	127.38	30.68	V
4884.00R	5.80	1.46	33.99	41.26	54.00	12.74	V
9768.00	8.50	2.12	38.67	49.30	54.00	4.70	V
2467.00	67.00	1.10	29.17	97.27	127.38	30.11	V
4934.00R	4.00	1.47	34.05	39.52	54.00	14.48	V
9868.00	1.30	2.13	38.74	42.17	54.00	11.83	V


METHOD OF MEASUREMENT: The procedure used was ANSI STANDARD C63.4-1992 & the Guidance on Measurements for Direct Sequence Spread Spectrum Systems. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 849 N.W. State Road, Newberry, FL 32669.

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
 FCCID: PE6AAP-1100E
 REPORT #: T:\A\ACRO\375K1\375K1RPT.DOC
 PAGE #: 9

2.993(a)(b)

2.993(a)(b) Continued Field strength of spurious emissions:

Method of Measuring Radiated Spurious Emissions

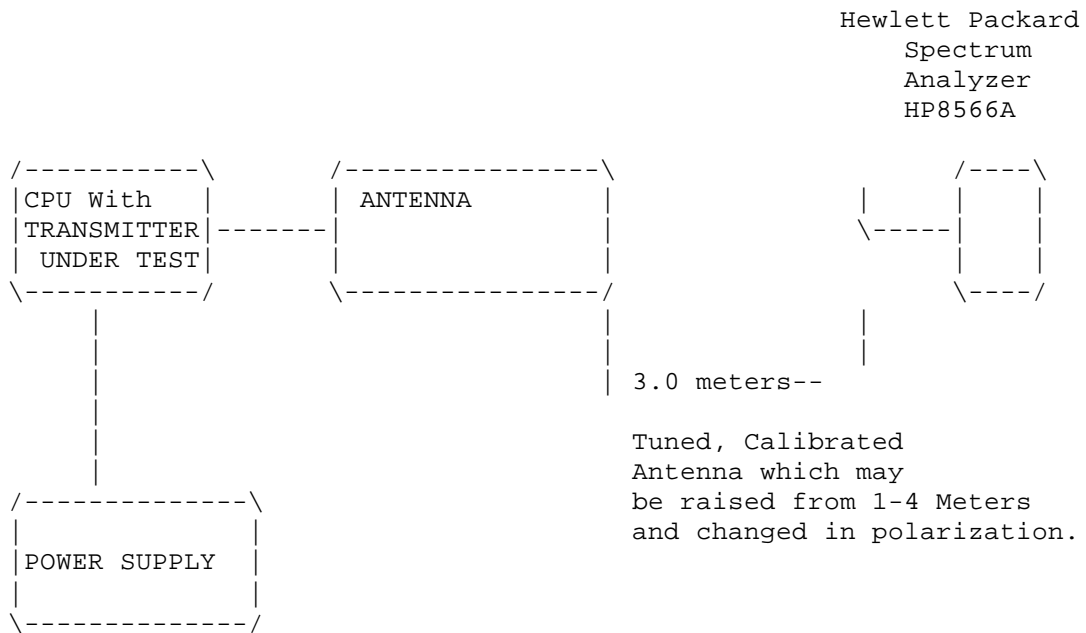

Equipment placed 80 cm above ground
on a rotatable platform.

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
FCCID: PE6AAP-1100E
REPORT #: T:\A\ACRO\375K1\375K1RPT.DOC
PAGE #: 10

APPLICANT: ACROWAVE SYSTEMS CO., LTD.

FCC ID: PE6AAP-1100E

NAME OF TEST: RADIATED SPURIOUS EMISSIONS INTO ADJACENT
RESTRICTED BAND

REQUIREMENTS: Emissions that fall in the restricted bands
(15.205). These emissions must be less than
or equal to 500 uV/m (54 dBuV/m).

TEST PROCEDURE: An in band field strength measurement of the
fundamental emissions using the RBW and
detector function required by C63.4-2000 and
FCC rules. The procedure was repeated with
an average detector and a plot made. The
calculated field strength in the adjacent
restricted band is presented below.

-102.60 dBm - from plot
+ 29.21 dB - ACF
+ 1.1 dB - Coax Loss

- 72.99 dBm
+107.00

34.71 dBuV

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
FCCID: PE6AAP-1100E
REPORT #: T:\A\ACRO\375K1\375K1RPT.DOC
PAGE #: 11


MKR 2.483 52 GHz
-102.60 dBm

hp REF -45.0 dBm ATTEN 0 dB +0 dB

10 dB/

OFFSET
-35.0
dB

DL
-95.0
dBm

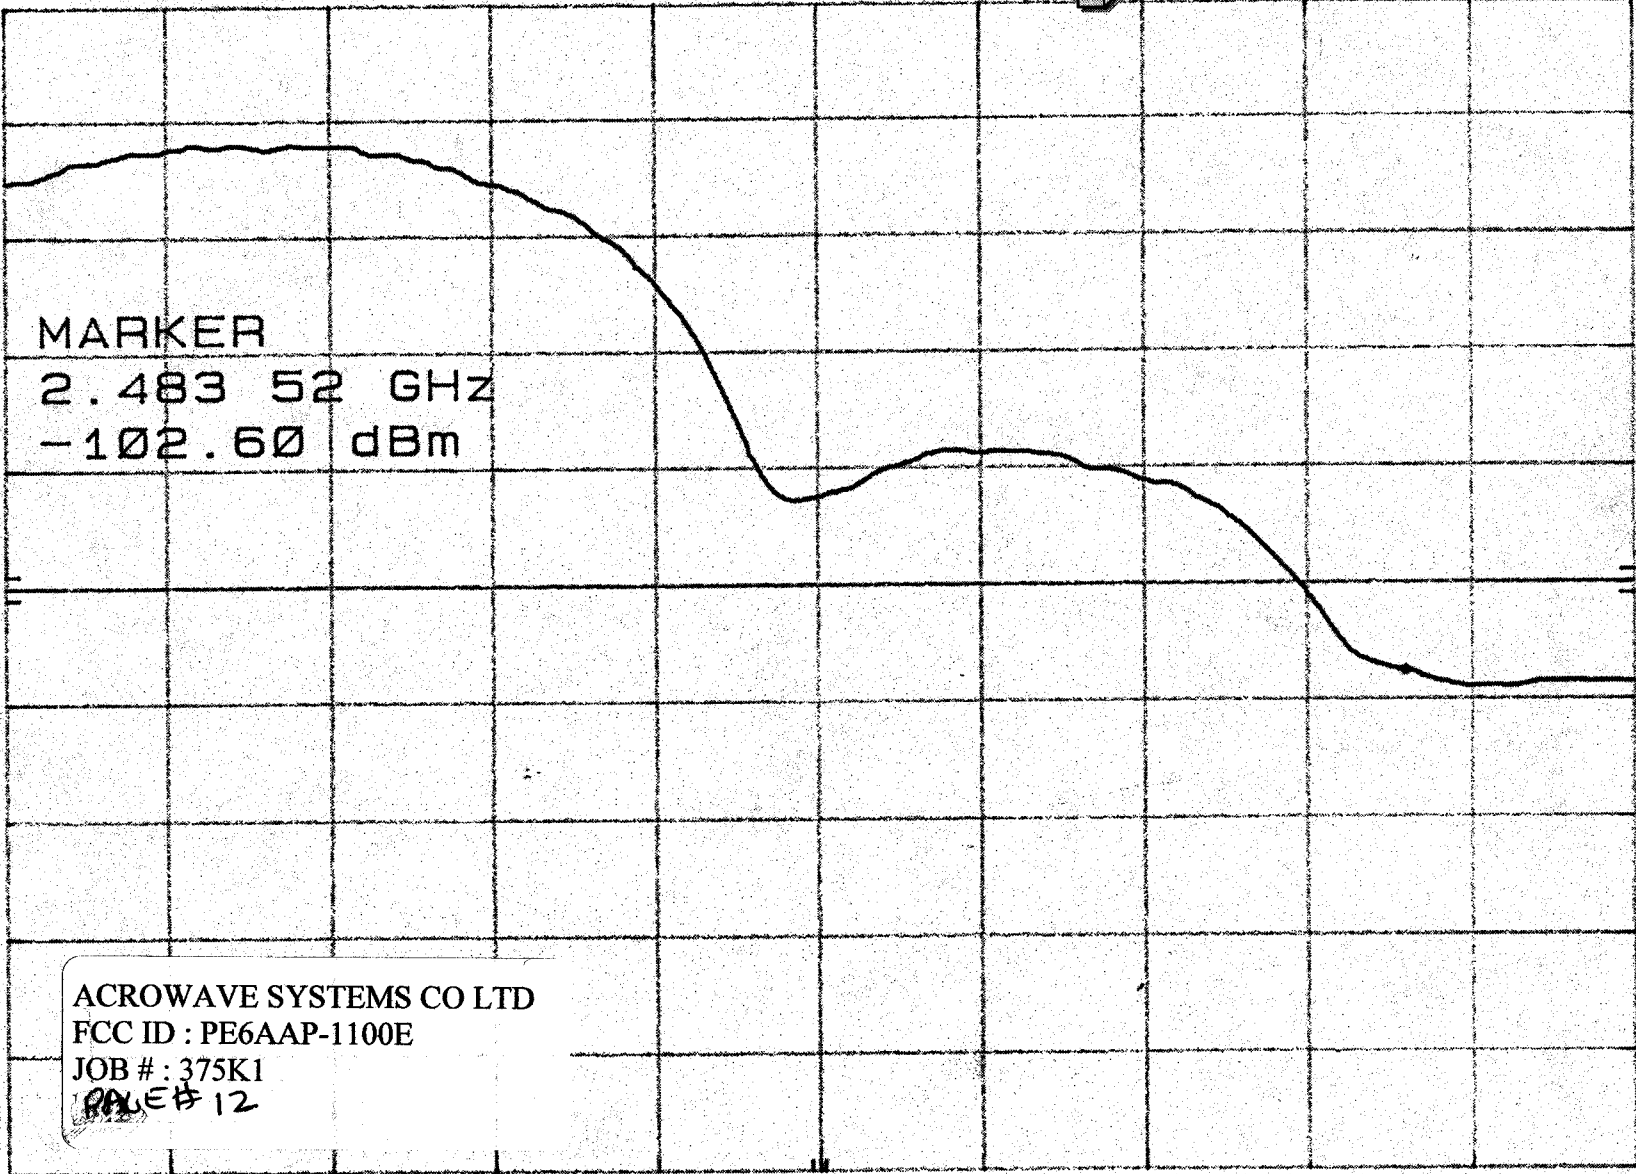

ACROWAVE SYSTEMS CO LTD
FCC ID : PE6AAP-1100E
JOB # : 375K1
RALE # 12

START 2.458 0 GHz

RES BW 1 MHz (1)

VBW 10 Hz

STOP 2.487 7 GHz

SWP 14.3 sec

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
 FCC ID: PE6AAP-1100E
 NAME OF TEST: POWER SPECTRAL DENSITY
 RULES PART NUMBER: 15.247(d)
 REQUIREMENTS: The peak level measured must be no greater than +8.0dBm.
 DATA: THE PLOTS ARE ON THE NEXT 3 PAGES.

The level at 2413.182MHz was -24.10dBm.

2417.70 MHz	2443.19 MHz	2462.26 MHz	
31.2 dBuV	36.2 dBuV	28.9 dBuV	from plots
+ 20.0 dB	+20.0 dB	+20.0 dB	Attenuation used
+ 35.0	+35.0	+35.0	Correction Factor
<u>86.2 dBm</u>	<u>91.2</u>	<u>83.9</u>	dBuV
<u>-107.0</u>	<u>-107.0</u>	<u>-107.0</u>	dBuV to dBm
- 20.8 dBm	- 15.8 dBm	- 23.1 dBm	Spectral Density

NAME OF TEST: PROCESSING GAIN

RULES PART NUMBER: 15.247(e)

REQUIREMENTS:

DATA: The processing gain information supplied by the manufacturer is 10.0dB.


See Exhibit 8 for processing gain test methods and data.

APPLICANT: ACROWAVE SYSTEMS CO., LTD.
 FCCID: PE6AAP-1100E
 REPORT #: T:\A\ACRO\375K1\375K1RPT.DOC
 PAGE #: 13

MKR 2.417 238 GHz
31.20 dB μ V (1Hz)

hp REF 97.0 dB μ V ATTEN 0 dB + 20 dB

10 dB/
SAMPLE

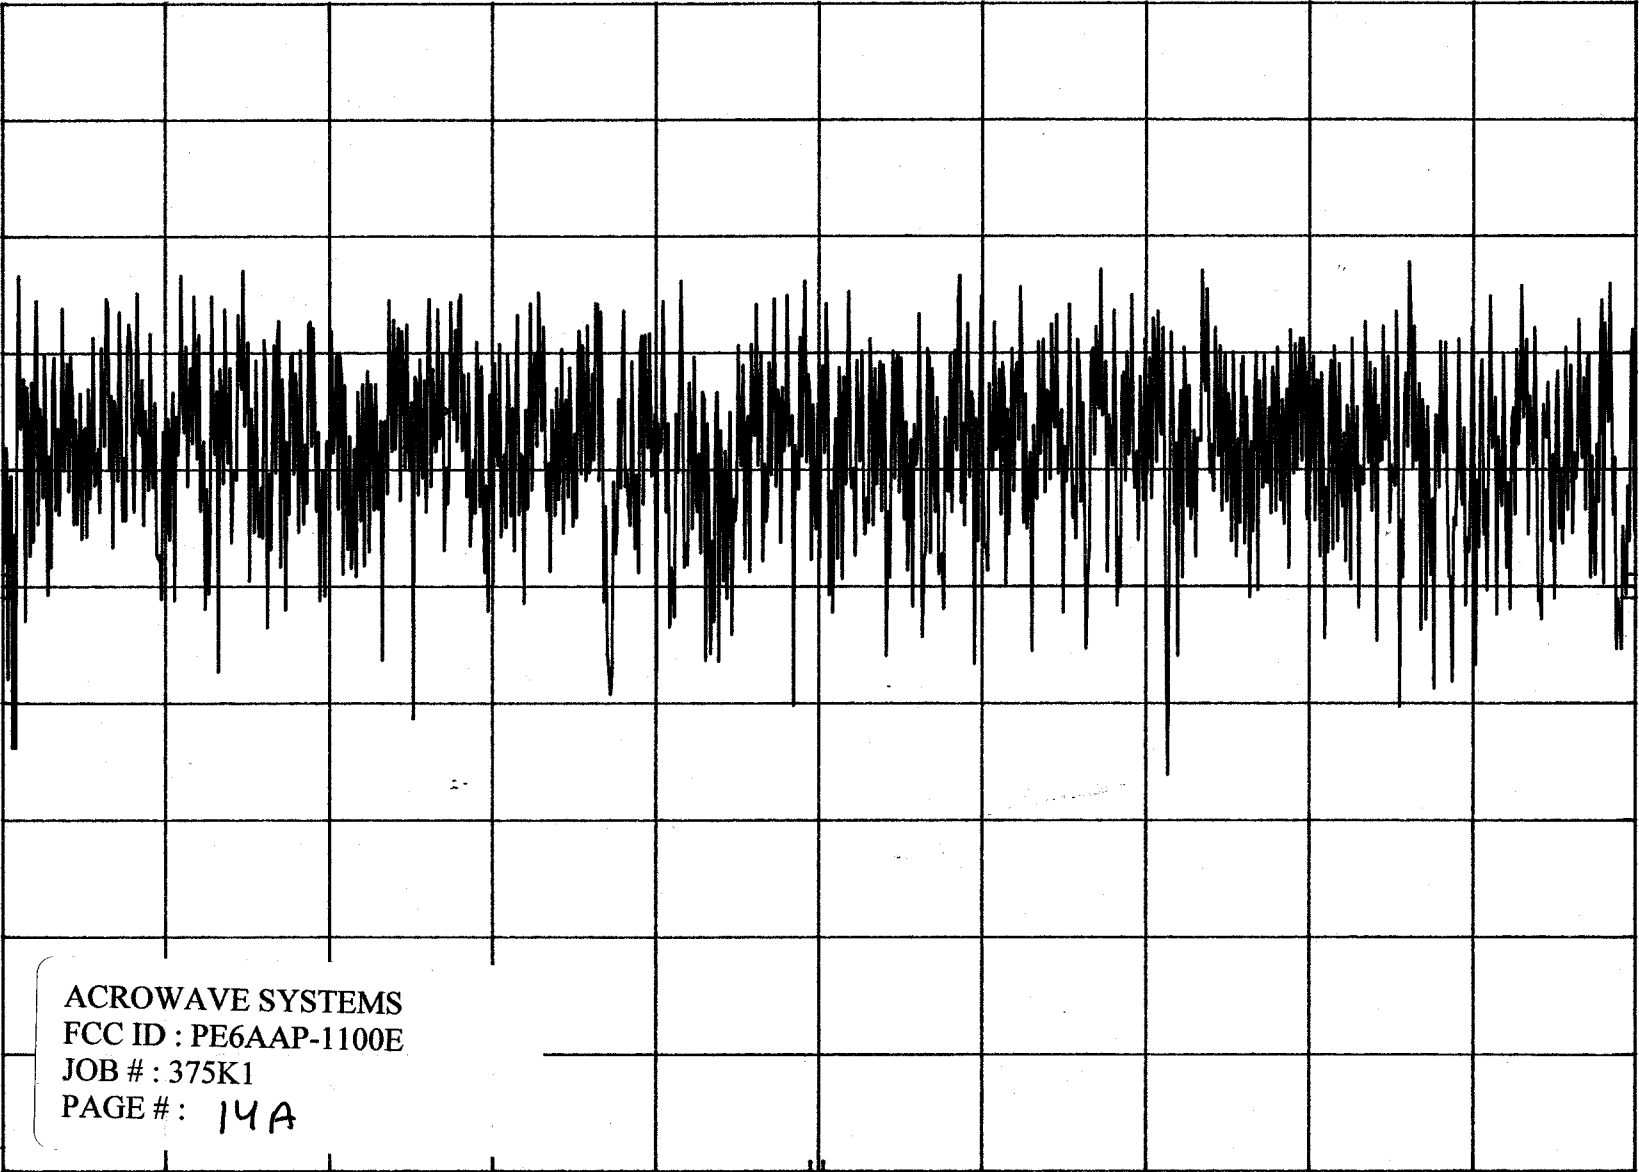

ACROWAVE SYSTEMS
FCC ID : PE6AAP-1100E
JOB # : 375K1
PAGE # : 14A

CENTER 2.417 70 GHz SPAN 2.00 MHz
RES BW 3 kHz (i) VBW 10 kHz SWP 500 sec


hp

REF 97.0 dB μ V ATTEN 0 dB + 20 dB

MKR 2.443 888 GHz
36.20 dB μ V (1Hz)

10 dB/

SAMPLE

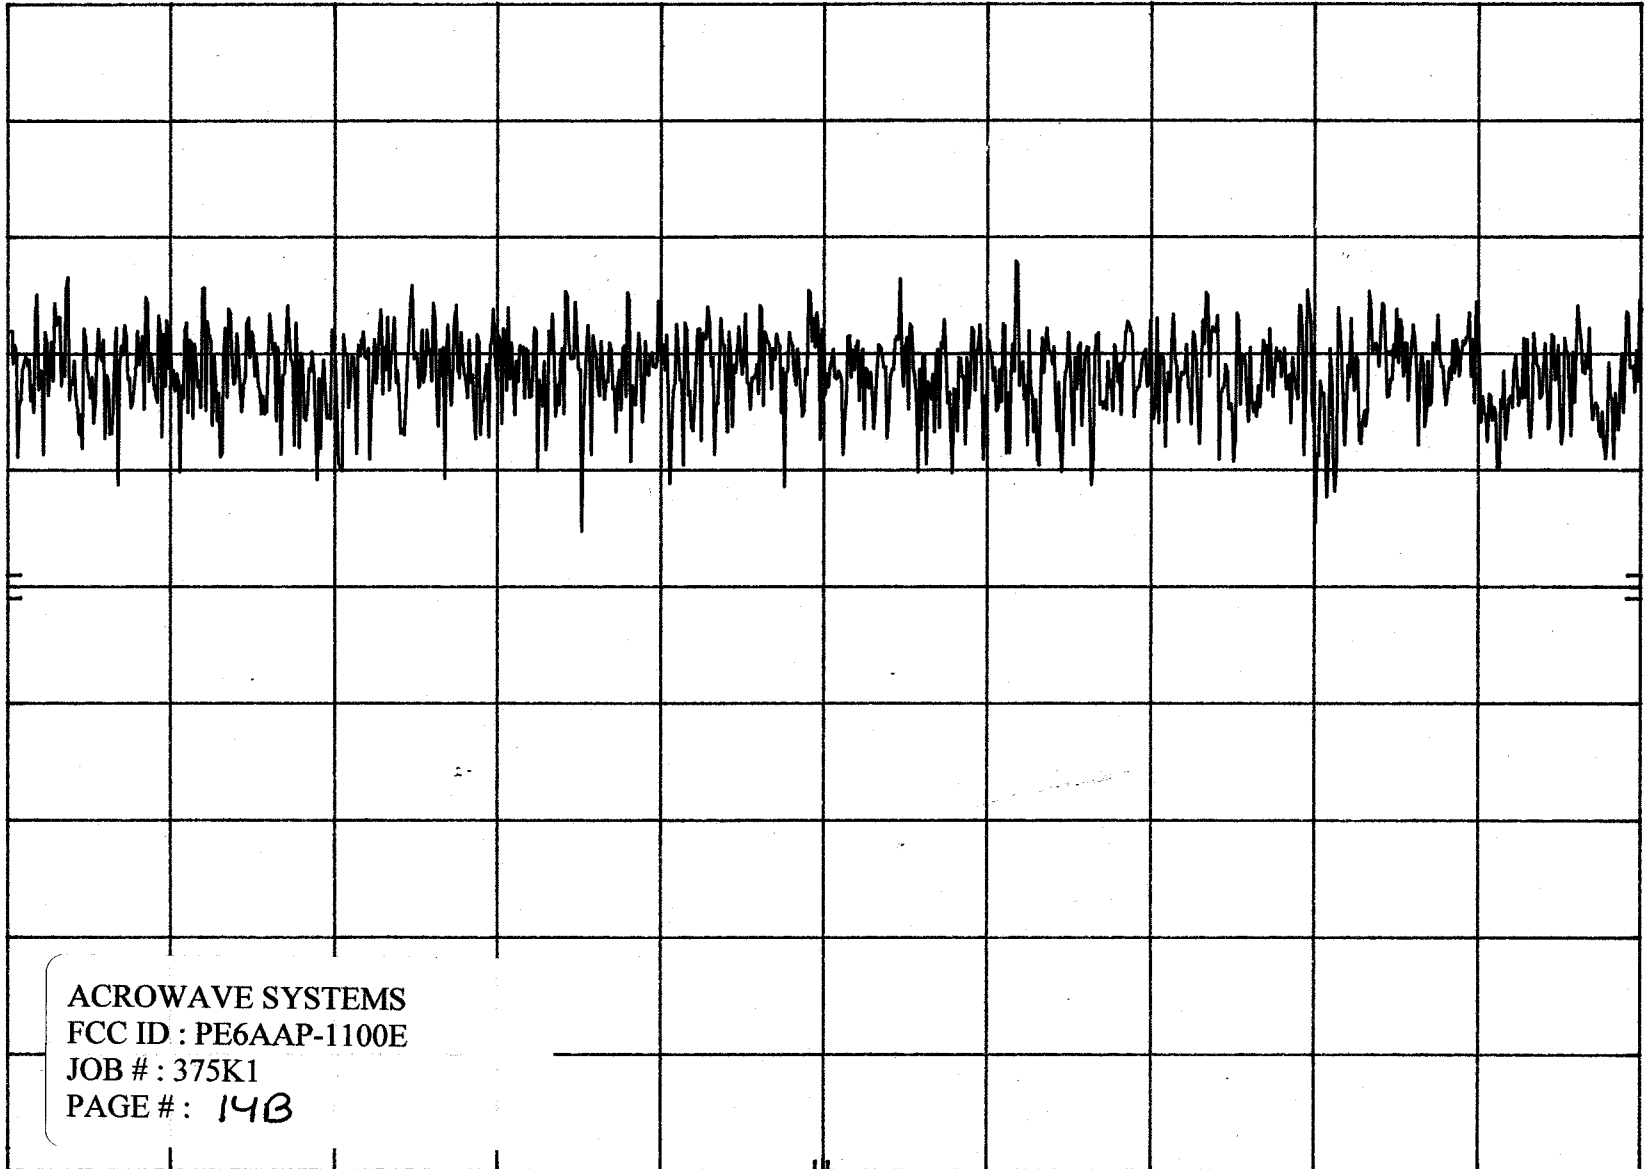

ACROWAVE SYSTEMS
FCC ID : PE6AAP-1100E
JOB # : 375K1
PAGE # : 14B

CENTER 2.443 19 GHz

RES BW 3 KHz (1)

VBW 10 KHz


SPAN 2.00 MHz

SWP 500 sec

hp REF 97.0 dB μ V ATTEN 0 dB + 20 dB

MKR 2.462 206 GHz
28.90 dB μ V (1Hz)

10 dB/
SAMPLE

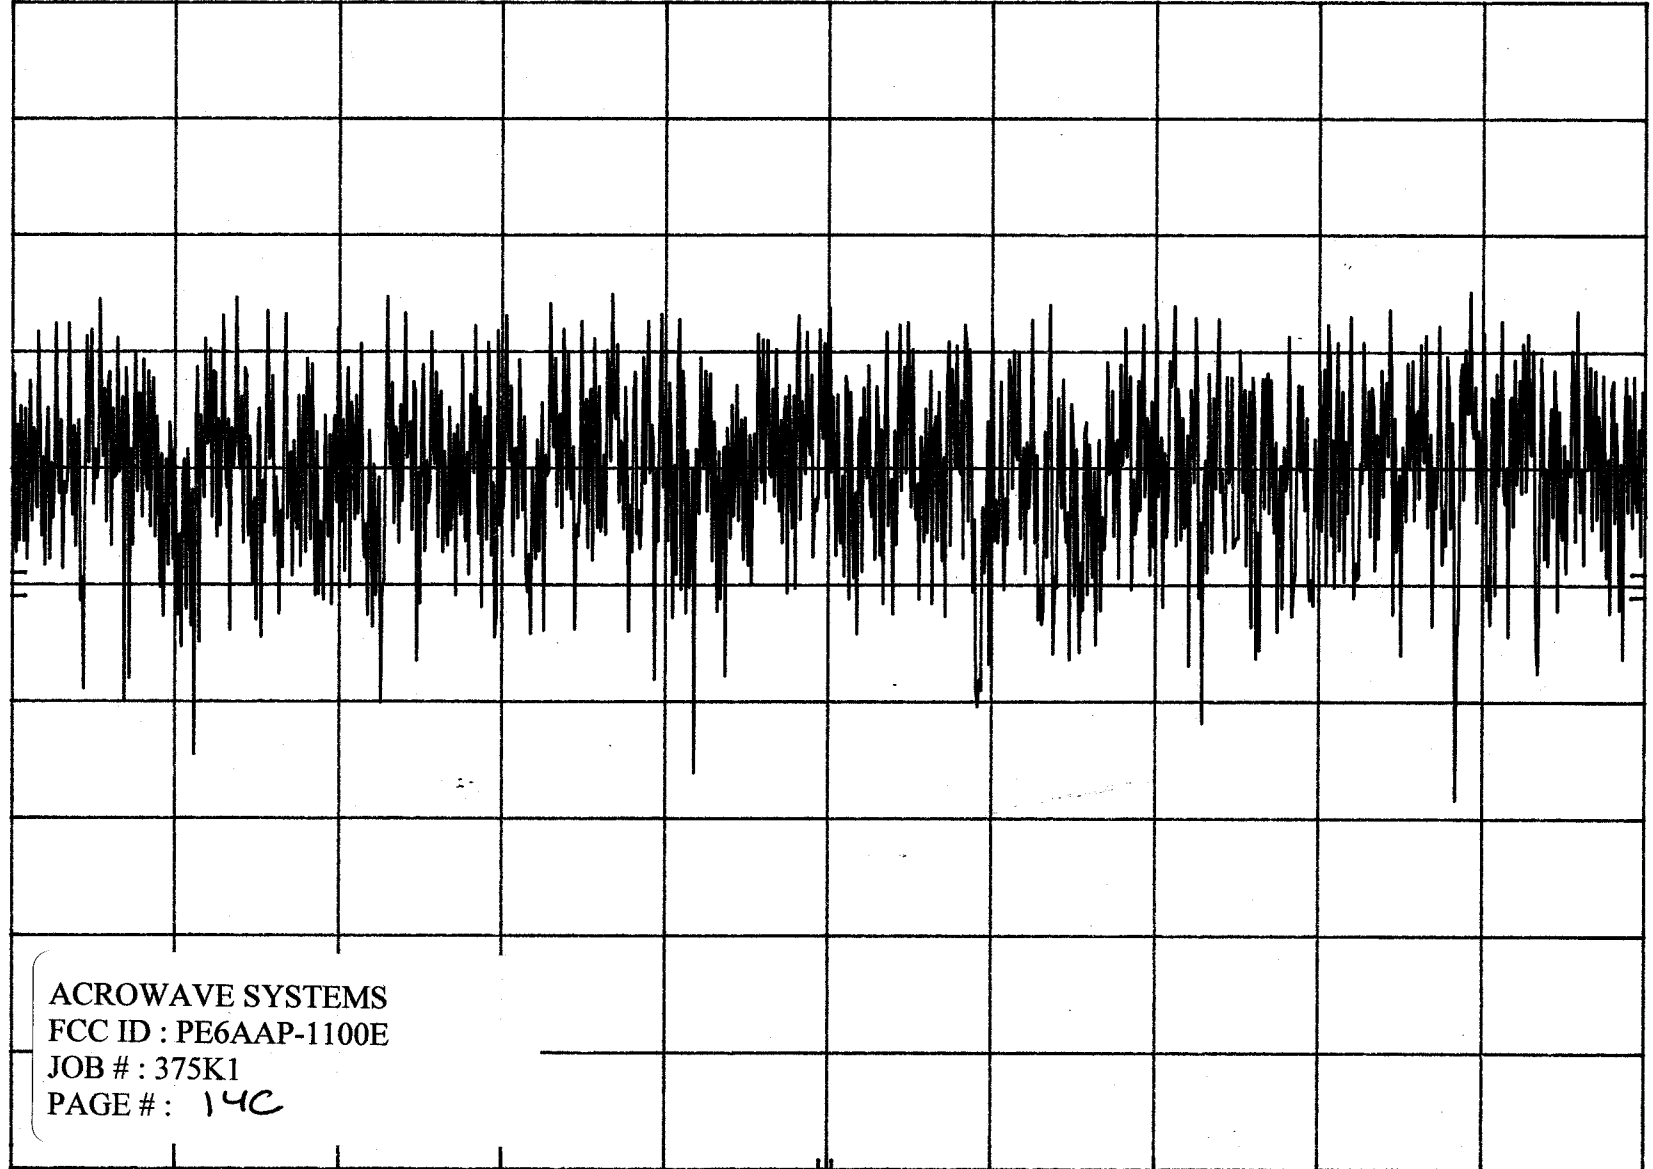

ACROWAVE SYSTEMS
FCC ID : PE6AAP-1100E
JOB # : 375K1
PAGE # : 14C

CENTER 2.462 26 GHz SPAN 2.00 MHz
RES BW 3 kHz (i) VBW 10 kHz SWP 500 sec