

# FCC PART 15.247



## EMI MEASUREMENT AND TEST REPORT

For

### Acrowave Systems Co., Ltd.

814 Anyang Mega Valley, Anyang City, Kyeonggi-Do, Korea

**FCC ID: PE6AVP-2000B**

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> IP Phone system ( Handset)
<b>Test Engineer:</b> <u>Snell Leong</u>	
<b>Report No.:</b> <u>R0512054(H)</u>	
<b>Report Date:</b> <u>2006-1-24</u>	
<b>Reviewed By:</b> <u>James Ma</u>	
<b>Prepared By:</b> Bay Area Compliance Laboratory Corporation (BACL) 1274 Anvilwood Ave. Sunnyvale, CA 94089 Tel: (408) 732-9162 Fax: (408) 732 9164	

**Note:** The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

**TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
JUSTIFICATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES.....	6
SCHEMATICS / BLOCK DIAGRAM.....	6
EQUIPMENT MODIFICATIONS .....	6
CONFIGURATION OF TEST SYSTEM .....	7
TEST SETUP BLOCK DIAGRAM.....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>§1.1307(B)(1),§2.1091 &amp; §2.1091 - RF EXPOSURE.....</b>	<b>9</b>
<b>§15.203 - ANTENNA REQUIREMENT.....</b>	<b>10</b>
STANDARD APPLICABLE .....	10
<b>§2.1051 &amp; §15.247(D) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....</b>	<b>11</b>
STANDARD APPLICABLE .....	11
EQUIPMENT LISTS .....	11
MEASUREMENT RESULT .....	11
<b>§15.205 &amp; §15.209 &amp; §15.247(C) - SPURIOUS RADIATED EMISSION.....</b>	<b>18</b>
MEASUREMENT UNCERTAINTY .....	18
EUT SETUP.....	19
SPECTRUM ANALYZER SETUP .....	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST PROCEDURE .....	20
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	20
ENVIRONMENTAL CONDITIONS.....	20
SUMMARY OF TEST RESULTS .....	20
RADIATED EMISSION TEST RESULT @ 1 METER.....	21
<b>§15.247(A)(2) – 6 DB BANDWIDTH.....</b>	<b>23</b>
STANDARD APPLICABLE .....	23
MEASUREMENT PROCEDURE.....	23
EQUIPMENT LISTS .....	23
MEASUREMENT RESULT .....	23
<b>§15.247(B)(3) - PEAK OUTPUT POWER MEASUREMENT.....</b>	<b>26</b>
STANDARD APPLICABLE .....	26
MEASUREMENT PROCEDURE.....	26
EQUIPMENT LISTS .....	26
MEASUREMENT RESULT .....	26
<b>§15.247(C) - 100 KHZ BANDWIDTH OF BAND EDGES.....</b>	<b>29</b>
STANDARD APPLICABLE .....	29
MEASUREMENT PROCEDURE.....	29
EQUIPMENT LISTS .....	29
MEASUREMENT RESULT .....	29
<b>§15.247(D) - POWER SPECTRAL DENSITY .....</b>	<b>31</b>
STANDARD APPLICABLE .....	31

---

MEASUREMENT PROCEDURE.....	31
EQUIPMENT LISTS .....	31
MEASUREMENT RESULT .....	31

---

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The *Acrowave Systems Co., Ltd.* product, *FCC ID: PE6AVP-2000B*, or the "EUT" as referred to this report is an IP Phone system, which measures approximately 115mmL x 75mmW x 40mmH for Base and 120mmL x 20mmW x 40mmH for Handset, and. The EUT operates at the frequency range of 2412~2462MHz.

*\* The test data gathered are from typical production sample, serial number: 2AVP20000001 provided by the manufacturer.*

### Objective

This type approval report is prepared on behalf of *Acrowave Systems Co., Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for Output Power, Antenna Requirements, 6 dB Bandwidth, power spectral density, 100 kHz Bandwidth of Band Edges Measurement, Spurious Emission, Conducted and Spurious Radiated Emission.

### Related Submittal(s)/Grant(s)

No Related Submittals.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Open Area Test site used by BACL to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California 94085, USA with registration number: 90464.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/hdocs/210/214/scopes/2001670.htm>

---

## **SYSTEM TEST CONFIGURATION**

---

### **Justification**

The host system was configured for testing according to ANSI C63.4-2003.

The EUT was tested in the normal (native) operating mode to represent *worst*-case results during the final qualification test.

### **EUT Exercise Software**

The test software was provided by the manufacturer.

### **Special Accessories**

As shown in following test block diagram, all interface cables used for compliance testing are shielded.


### **Schematics / Block Diagram**

Please refer to Appendix A.

### **Equipment Modifications**


No modifications were made to the EUT.

### Configuration of Test System



EUT (Handset)

### Test Setup Block Diagram

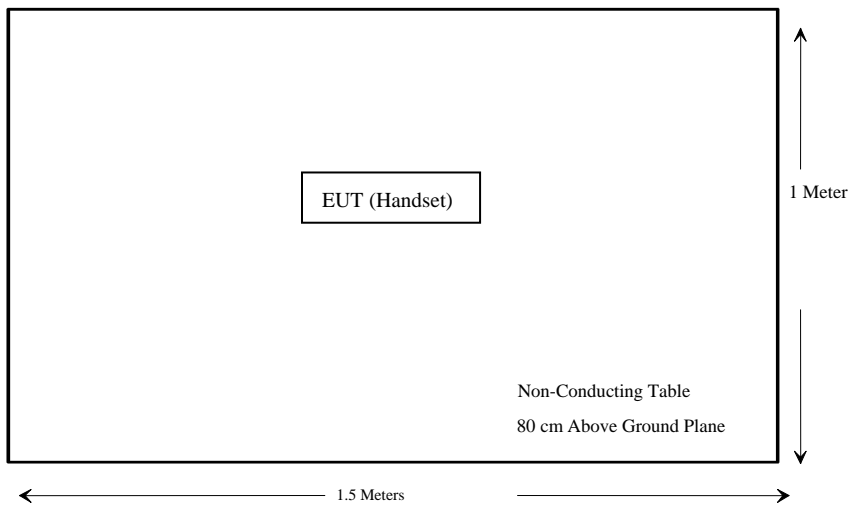

## SUMMARY OF TEST RESULTS

Results reported relate only to the product tested.

FCC RULES	DESCRIPTION OF TEST	RESULT
§2.1091 & §2.1093	RF Exposure	Pass
§15.203	Antenna Requirement	Pass
§15.205	Restricted Band	Pass
§ 15.207 (a)	Conducted Emissions	Pass
§2.1051 & §15.247(d)	Spurious Emission at Antenna Port	Pass
§15.209 (a) & §15.247(d)	Radiated Emission	Pass*
§15.247 (a)(2)	6 dB Bandwidth	Pass
§15.247 (b)(3)	Maximum Peak Output Power	Pass
§ 15.247 (d)	100 kHz Bandwidth of Frequency Band Edge	Pass
§15.247 (e)	Peak Power Spectral Density	Pass

\* test data are within the measurement uncertainty



## **§1.1307(b)(1),§2.1091 & §2.1091 - RF EXPOSURE**

According to §15.247(b)(5) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Exposure category	<u>low threshold</u>	<u>high threshold</u>
general population	$(60/f_{\text{GHz}})$ mW, $d < 2.5$ cm $(120/f_{\text{GHz}})$ mW, $d \geq 2.5$ cm	$(900/f_{\text{GHz}})$ mW, $d < 20$ cm
occupational	$(375/f_{\text{GHz}})$ mW, $d < 2.5$ cm $(900/f_{\text{GHz}})$ mW, $d \geq 2.5$ cm	$(2250/f_{\text{GHz}})$ mW, $d < 20$ cm

For 2.4 Ghz, Low Threshold =  $60/2.4 = 25$  mW  
Handset output power = 13.75 dBm = 23.66 mW.

**Result:**

Since the Power density of EUT is less than low threshold, therefore Routine SAR evaluation is not required

---

## **§15.203 - ANTENNA REQUIREMENT**

---

### **Standard Applicable**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The antenna for this device is an integral antenna with gain of 0 dBi.

## **§2.1051 & §15.247(d) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

### **Standard Applicable**

Requirements: CFR 47, § 2.1051.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1057.

### **Measurement Procedure**

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### **Equipment Lists**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Cal. Date</b>
Agilent	Analyzer, Spectrum	E4446A	US44300386	11/10/2005

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### **Measurement Result**



Please refer to following pages for plots of spurious emission.



#### **Environmental Conditions**

Temperature:	16° C
Relative Humidity:	55%
ATM Pressure:	1042mbar



*The testing was performed by Snell Leong on 2005-12-22.*

Low Channel

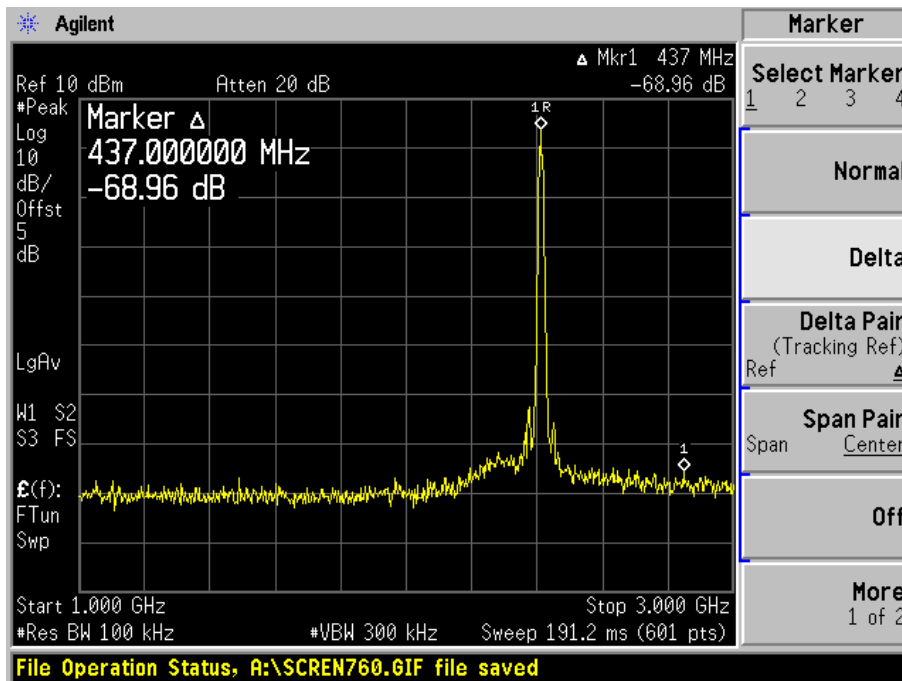
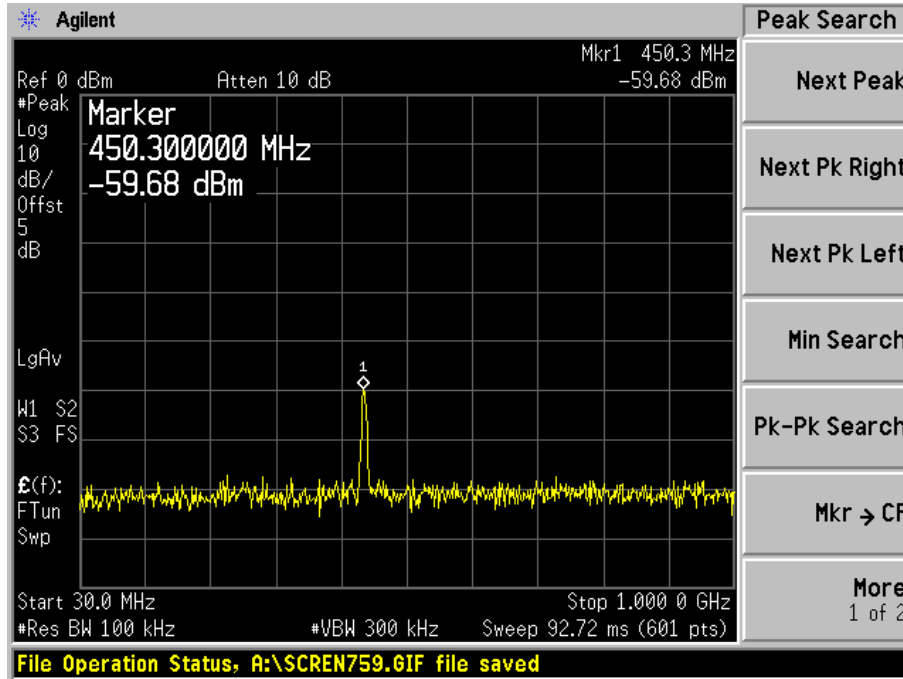


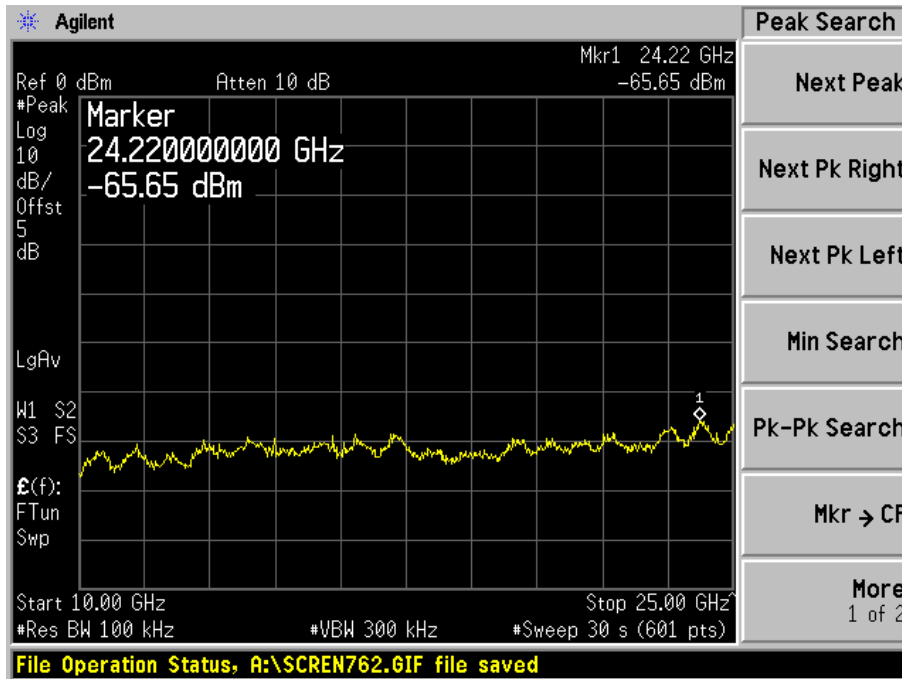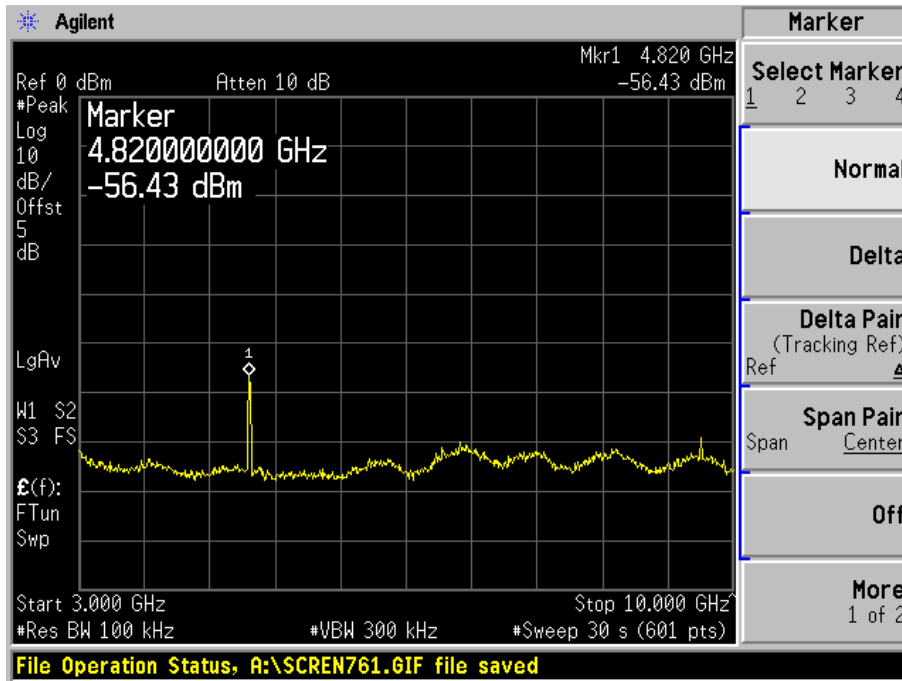





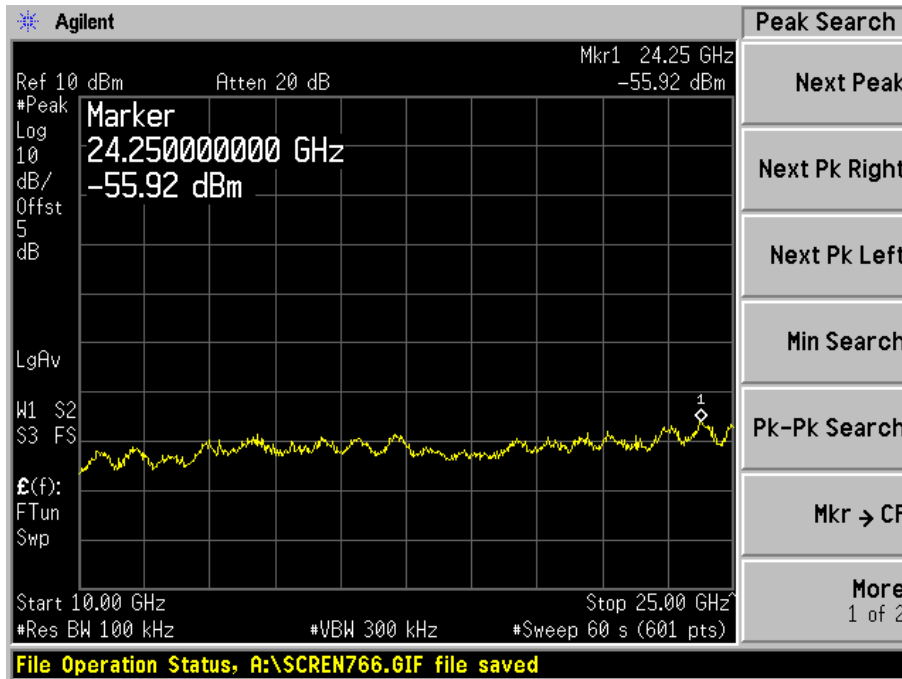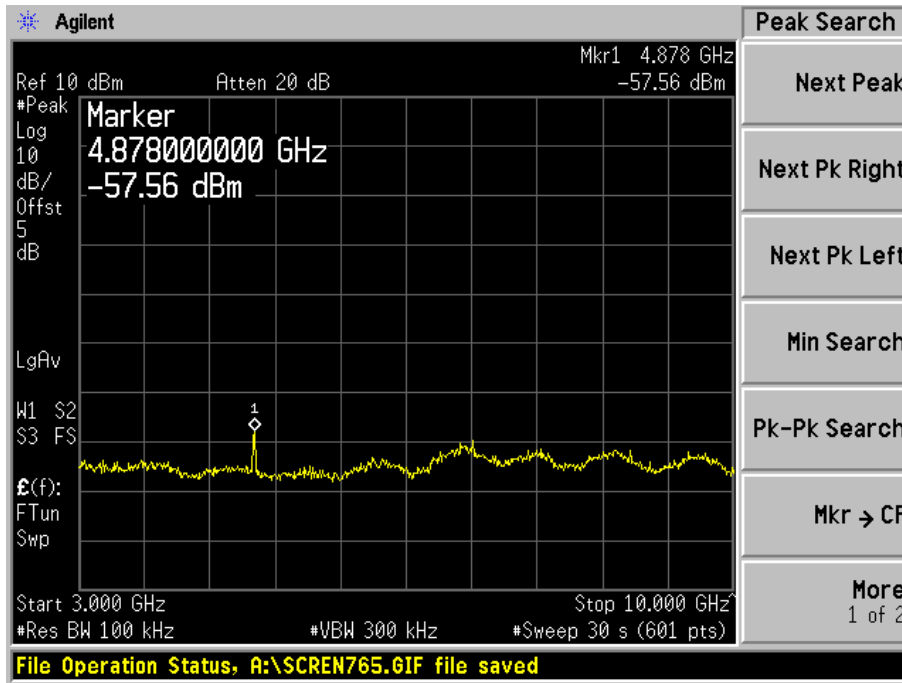

High Channel

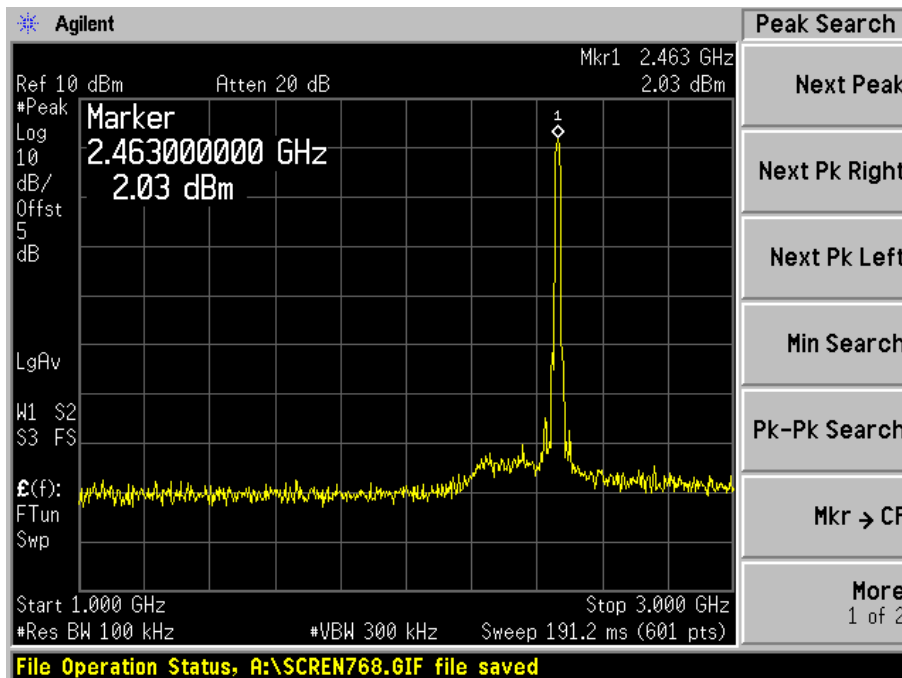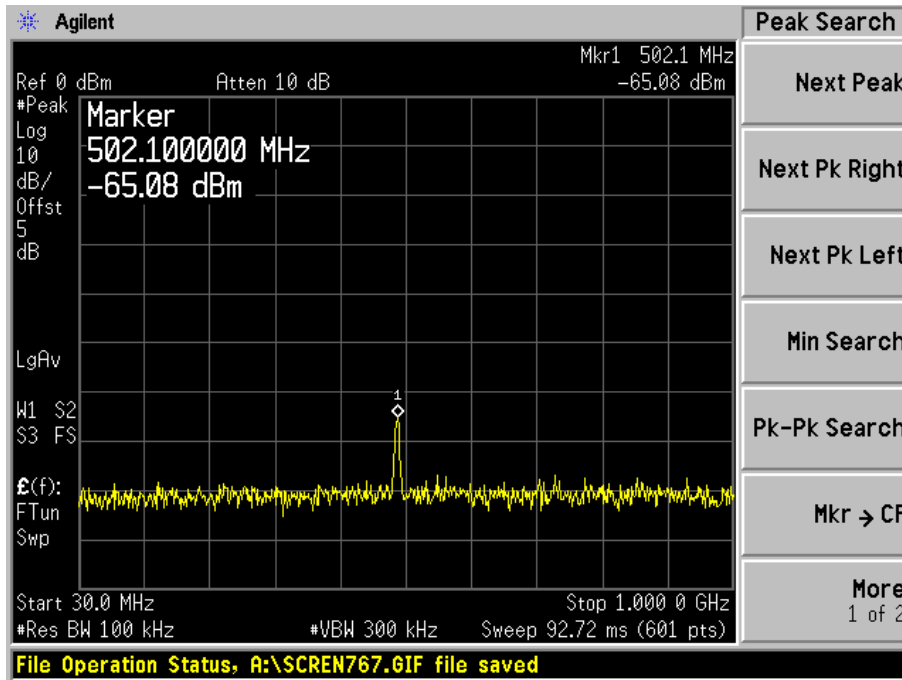



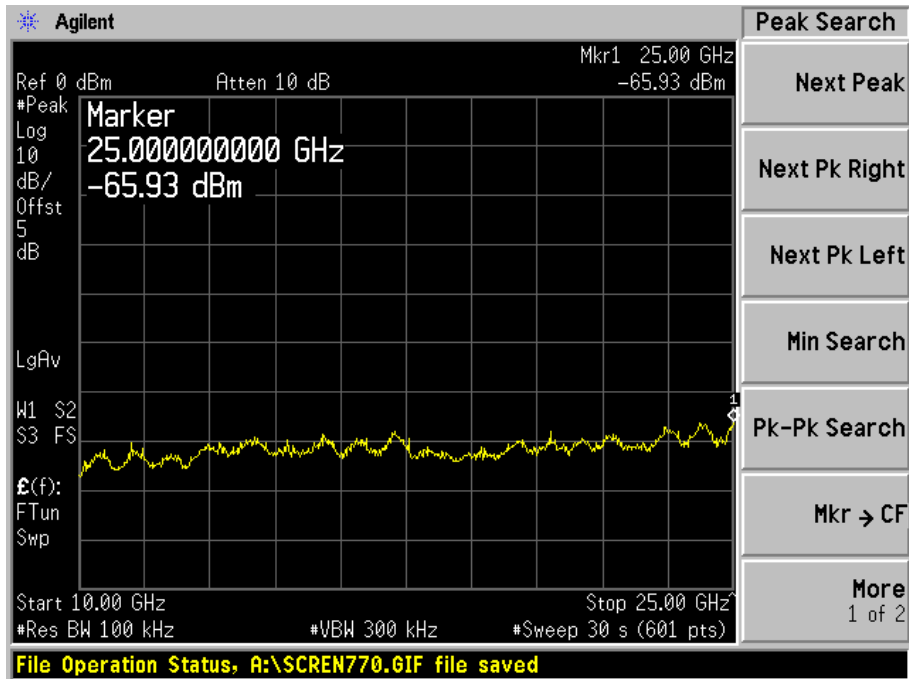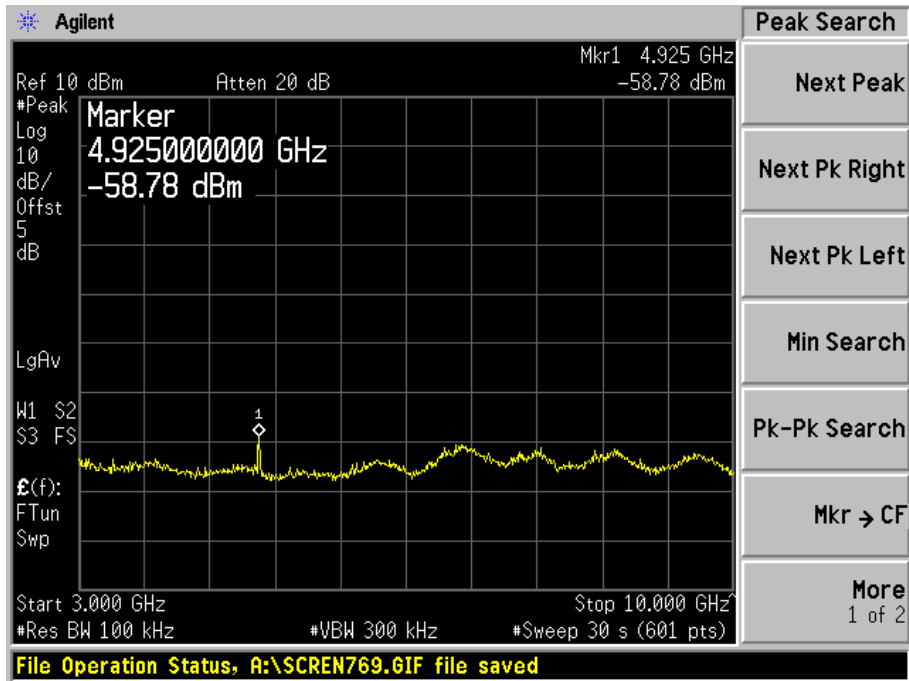

## **§15.205 & §15.209 & §15.247(c) - SPURIOUS RADIATED EMISSION**

### **Measurement Uncertainty**

All measurements involve certain levels of uncertainties. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BAEL is  $\pm 4.0$  dB.

According to §15.205, except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

<b>MHz</b>	<b>MHz</b>	<b>MHz</b>	<b>GHz</b>
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
<sup>1</sup> 0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2655 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.57725	240 – 285	3345.8 – 3358	36.43 – 36.5
13.36 – 13.41	322 – 335.4	3600 – 4400	( <sup>2</sup> )

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510MHz

<sup>2</sup> Above 38.6

Except as provided in paragraph (d) and (e), the filed strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

According to §15.209, the device shall meet radiated emission general requirements.

Except for Class A device, the filed strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength	
	(Microvolts/meter)	(dB $\mu$ V/meter)
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

### EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

### Spectrum Analyzer Setup

According to FCC Rules, 47 CFR, Section 15.33, the frequency was investigated from 30 to 25000 MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<u>Frequency Range</u>	<u>RBW</u>	<u>Video B/W</u>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

For Average measurement: RBW = 1MHz, VBW = 10Hz (above 1000MHz)

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
HP	Amplifier, Pre (.1 ~1300MHz)	8447D	2944A10198	08/17/2005
Agilent	Analyzer, Spectrum	E4446A	US44300386	11/10/2005
A. H. Systems	Antenna, Horn, DRG	SAS-200/571	261	04/20/2005
HP	Pre, Amplifier (1 ~ 26.5 GHz)	8449B	3147A00400	03/14/2005
Sunol Science	30MHz – 2 GHz Antenna	JB1	A03105-3	02/11/2005

\* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

## Test Procedure

For the radiated emissions test, the EUT, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "Qp" in the data table.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC 15.247 Limit}$$

## Environmental Conditions

Temperature:	16° C
Relative Humidity:	55%
ATM Pressure:	1042 mbar

*The testing was performed by Snell Leong on 2005-12-22*

## Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, and had the worst margin of:

- 1.5\* dB at 4824.0000 MHz in the **Horizontal** polarization, Low Channel
- 7.9 dB at 4874.0000 MHz in the **Vertical** polarization, Middle Channel
- 10.5 dB at 4924.0000 MHz in the **Horizontal** polarization, High Channel
- 15.20 dB at 520.40 MHz in the **Vertical** polarization, Unintentional Emission  
(Test data are within the measurement uncertainty  $\pm 4.0$ dB)

**Radiated Emission Test Result @ 1 meter**

For Low Channel, 1-25GHz

Frequency MHz	Reading dBuV/m	Direction Degree	Height Meter	Polar H / V	Antenna factor dB/m	Cable loss dB	Amplifier dB	Distnace factor dB	Correction Factor dBuV/m	15.247 Limit (dBuV/m)	15.247 Margin	Comments
2412.00	113.3	90	1.0	v	28.7	2.0	35.8	-10.0	98.1			Fund/Peak
2412.00	112.0	0	1.2	h	28.7	2.0	35.8	-10.0	96.8			Fund/Peak
2412.00	104.5	180	1.2	v	28.7	2.0	35.8	-10.0	89.3			Ave
2412.00	103.2	0	1.2	h	28.7	2.0	35.8	-10.0	88.0			Ave
4824.00	63.7	270	2.4	v	32.5	3.1	34.8	-10.0	54.5	74	-19.5	Peak
4824.00	64.2	180	2.3	h	32.5	3.1	34.8	-10.0	55.0	74	-19.0	Peak
4824.00	56.7	270	2.4	v	32.5	3.1	34.8	-10.0	47.5	54	-6.5	Ave
4824.00	61.7	180	2.3	h	32.5	3.1	34.8	-10.0	52.5	54	-1.5	Ave
7236.00	51.6	90	2.0	v	36.7	4.3	34.7	-10.0	47.9	74	-26.1	Peak
7236.00	57.3	180	2.0	h	36.7	4.3	34.7	-10.0	53.6	74	-20.4	Peak
7236.00	44.3	180	2.0	v	36.7	4.3	34.7	-10.0	40.7	54	-13.3	Ave
7236.00	44.0	90	2.0	h	36.7	4.3	34.7	-10.0	40.3	54	-13.7	Ave

For Middle Channel, 1-25GHz

Frequency MHz	Reading dBuV/m	Direction Degree	Height Meter	Polar H / V	Antenna factor dB/m	Cable loss dB	Amplifier dB	Distance factor dB	Correction Factor dBuV/m	15.247 Limit (dBuV/m)	15.247 Margin	Comments
2437.00	113.9	180	1.3	v	28.7	2.0	35.8	-10.0	98.7			Fund/Peak
2437.00	113.9	180	1.2	h	28.7	2.0	35.8	-10.0	98.7			Fund/Peak
2437.00	104.3	180	1.3	v	28.7	2.0	35.8	-10.0	89.2			Ave
2437.00	104.7	180	1.2	h	28.7	2.0	35.8	-10.0	89.5			Ave
4874.00	60.6	270	2.4	v	32.5	3.1	34.8	-10.0	51.4	74	-22.6	Peak
4874.00	59.6	180	2.2	h	32.5	3.1	34.8	-10.0	50.4	74	-23.6	Peak
4874.00	55.3	270	2.4	v	32.5	3.1	34.8	-10.0	46.1	54	-7.9	Ave
4874.00	53.3	180	2.2	h	32.5	3.1	34.8	-10.0	44.1	54	-9.9	Ave
7311.00	50.5	270	2.4	v	36.7	4.3	34.7	-10.0	46.8	74	-27.2	Peak
7311.00	50.2	180	2.3	h	36.7	4.3	34.7	-10.0	46.5	74	-27.5	Peak
7311.00	37.1	270	2.4	v	36.7	4.3	34.7	-10.0	33.4	54	-20.6	Ave
7311.00	37.0	180	2.1	h	36.7	4.3	34.7	-10.0	33.3	54	-20.7	Ave

## For High Channel, 1-25GHz

Frequency MHz	Reading dBuV/m	Direction Degree	Height Meter	Polar H / V	Antenna factor dB/m	Cable loss dB	Amplifier dB	Distance factor dB	Correction Factor dBuV/m	15.247 Limit (dBuV/m)	15.247 Margin	Comments
2462.00	115.2	180	1.3	v	28.7	2.0	35.8	-10.0	100.0			Fund/Peak
2462.00	115.8	180	1.2	h	28.7	2.0	35.8	-10.0	100.6			Fund/Peak
2462.00	106.4	180	1.3	v	28.7	2.0	35.8	-10.0	91.2			Ave
2462.00	107.6	180	1.2	h	28.7	2.0	35.8	-10.0	92.4			Ave
4924.00	58.0	270	2.4	v	32.5	3.1	34.8	-10.0	48.8	74	-25.2	Peak
4924.00	57.3	90	2.1	h	32.5	3.1	34.8	-10.0	48.1	74	-25.9	Peak
4924.00	50.5	270	2.4	v	32.5	3.1	34.8	-10.0	41.3	54	-12.7	Ave
4924.00	52.8	90	2.1	h	32.5	3.1	34.8	-10.0	43.6	54	-10.5	Ave
7386.00	50.3	270	2.4	v	36.7	4.3	34.7	-10.0	46.6	74	-27.4	Peak
7386.00	49.8	90	2.1	h	36.7	4.3	34.7	-10.0	46.1	74	-27.9	Peak
7386.00	37.2	270	2.4	v	36.7	4.3	34.7	-10.0	33.5	54	-20.5	Ave
7386.00	36.5	90	2.1	h	36.7	4.3	34.7	-10.0	32.8	54	-21.2	Ave

## 30MHz – 1GHz

Frequency MHz	Reading dBuV	Direction Degree	Height Meter	Polar H / V	Antenna factor dB/m	Cable loss dB	Amplifier dB	Distance factor dB	Correction Factor dBuV/m	15B Limit	15B Margin	Comments Peak
660.00	41.2	270	3.2	H	19.7	5.6	28.6	-10.0	27.9	46	-18.1	Peak
660.00	42.3	75	1.8	V	19.7	5.6	28.6	-10.0	29.0	46	-17.0	Peak
527.80	40.3	270	2.1	H	18.0	5.0	28.5	-10.0	24.8	46	-21.2	Peak
527.80	38.7	330	1.2	V	18.0	5.0	28.5	-10.0	23.2	46	-22.8	Peak
520.42	44.5	280	2.8	H	18.0	5.0	28.5	-10.0	29.0	46	-17.0	Peak
520.42	46.3	250	1.0	V	18.0	5.0	28.5	-10.0	30.8	46	-15.2	Peak

\* Test distance: 1 meter.

AVG = average

## §15.247(a)(2) – 6 dB BANDWIDTH

### Standard Applicable

According to §15.247(a)(2), for digital modulation techniques, the minimum 6dB bandwidth shall be at least 500 kHz.

### Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth. (6 dB bandwidth for DTS)
4. Repeat above procedures until all frequencies measured were complete.

### Equipment Lists

Manufacturer	Description	Model	Serial Number	Cal. Date
Agilent	Analyzer, Spectrum	E4446A	US44300386	11/10/2005

\* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### Measurement Result

#### Environmental Conditions

Temperature:	16° C
Relative Humidity:	55%
ATM Pressure:	1024mbar


*The testing was performed by Snell Leong on 2005-12-22.*

#### Test Result


For Handset:

Channel	Frequency MHz	Channel Bandwidth (KHz)	Limit KHZ	Result
Low	2412	1090.2	>500	Pass
Mid	2437	1130	>500	Pass
High	2462	1070	>500	Pass

Low Channel

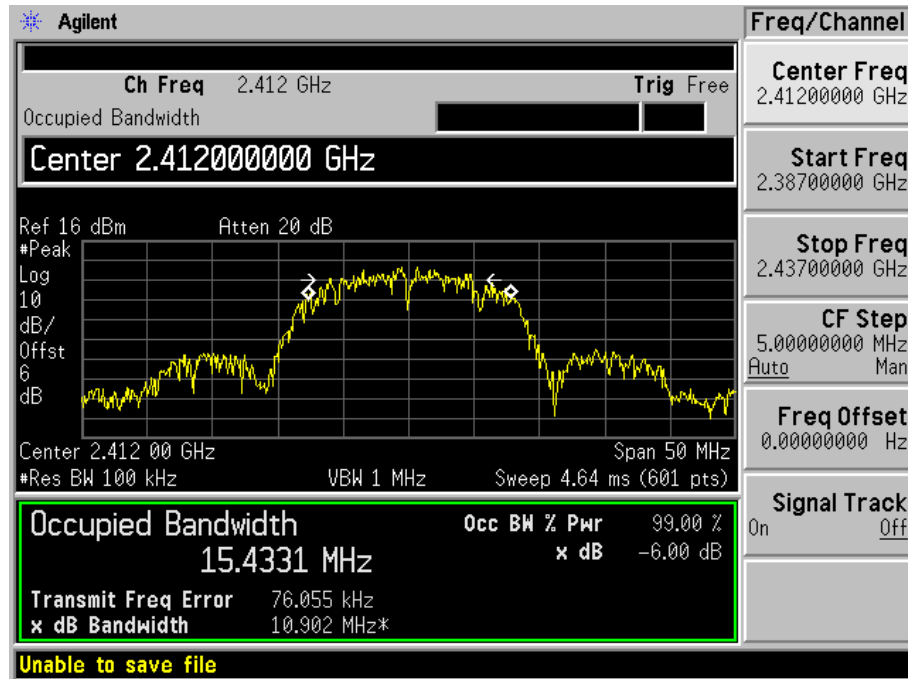


Mid. Channel

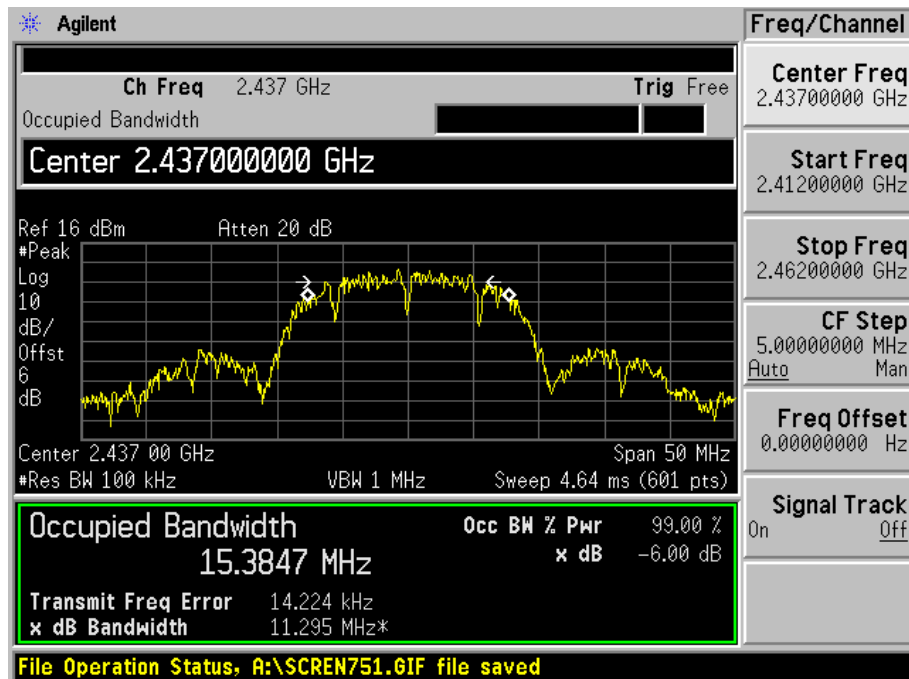



High Channel

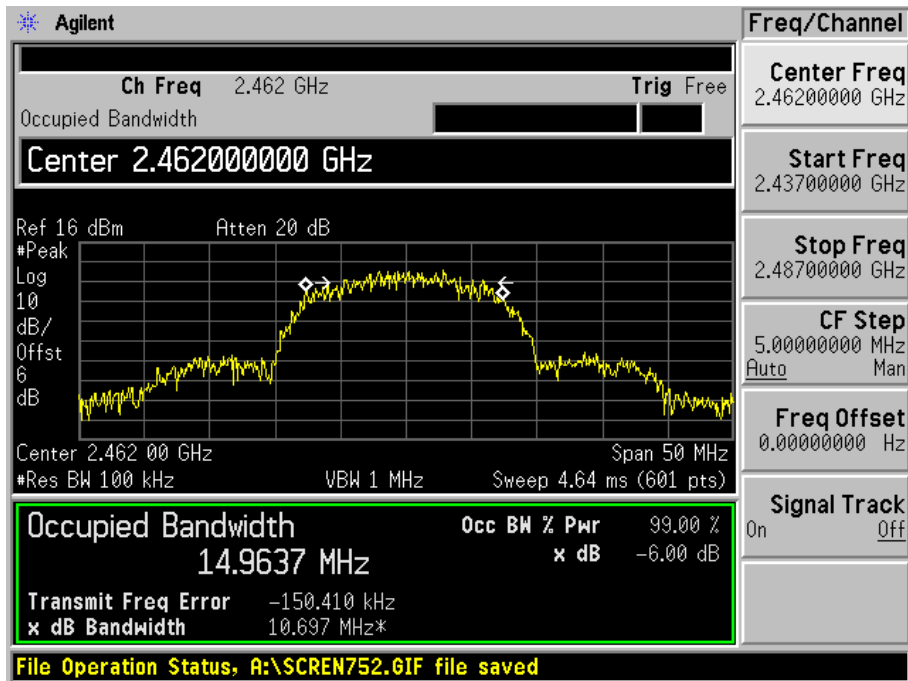


## §15.247(b)(3) - PEAK OUTPUT POWER MEASUREMENT

### Standard Applicable

According to §15.247(b) (3), for systems using digital modulation in 2400-2483.5 MHz: 1 Watt

### Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer.
3. Add a correction factor to the display.

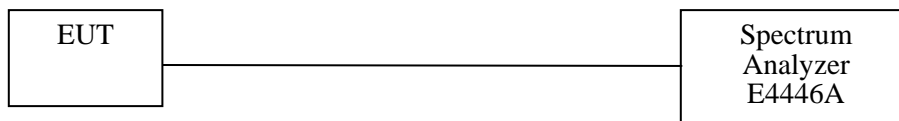

### Equipment Lists

Manufacturer	Description	Model	Serial Number	Cal. Date
Agilent	Analyzer, Spectrum	E4446A	US44300386	11/10/2005

\* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### Measurement Result

#### Environmental Conditions

Temperature:	16° C
Relative Humidity:	55%
ATM Pressure:	1024 mbar

*The testing was performed by Snell Leong on 2005-12-22.*

#### Output Power


For Handset

Channel	Frequency MHz	Max Peak Output Power		Limit (mW)	Result
		(dBm)	(mW)		
Low	2412	13.74	23.66	1000	Pass
Mid	2437	13.51	22.44	1000	Pass
High	2462	13.21	20.94	1000	Pass


Low Channel



Mid. Channel

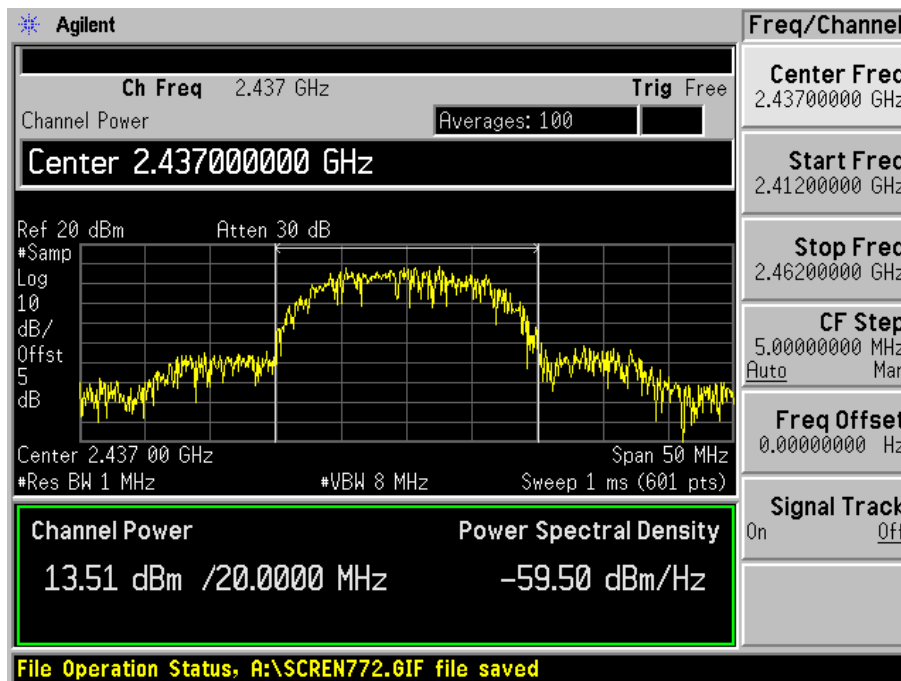

High Channel

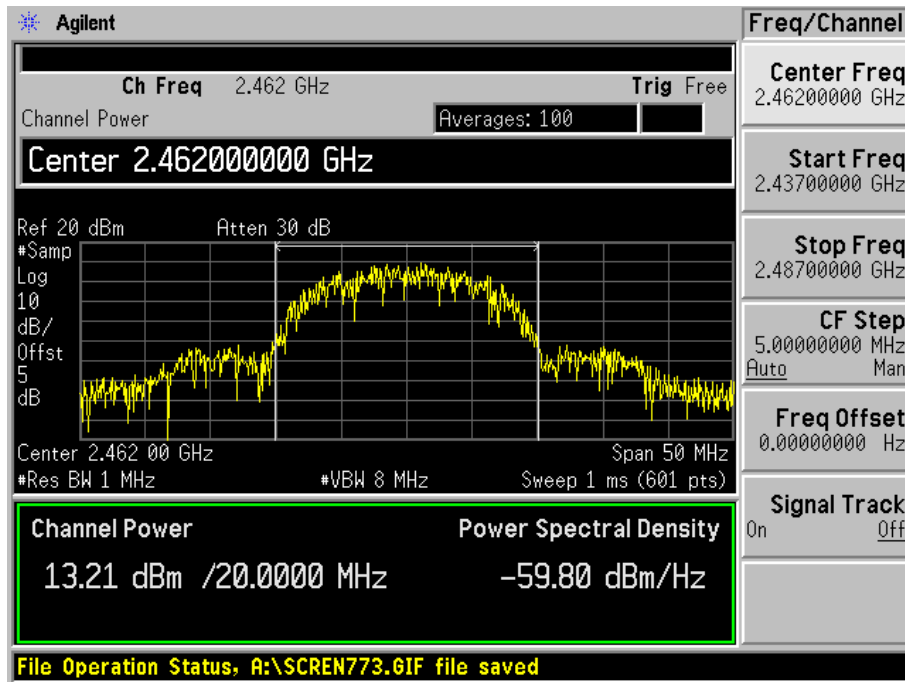

## §15.247(c) - 100 KHZ BANDWIDTH OF BAND EDGES

### Standard Applicable

According to §15.247(c), in *any* 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) see §15.205(c).

### Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Equipment Lists

Manufacturer	Description	Model	Serial Number	Cal. Date
Agilent	Analyzer, Spectrum	E4446A	US44300386	11/10/2005

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### Measurement Result



#### Environmental Conditions

Temperature:	16° C
Relative Humidity:	55%
ATM Pressure:	1024 mbar

*The testing was performed by Snell Leong on 2005-2-22.*

Please refer to following pages for plots of band edge.

For Handset:

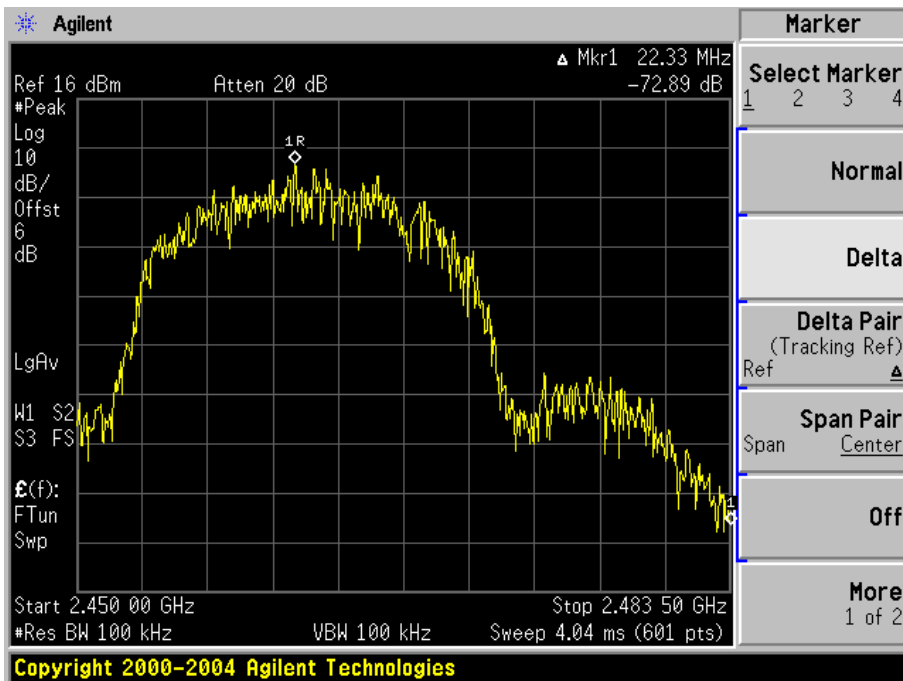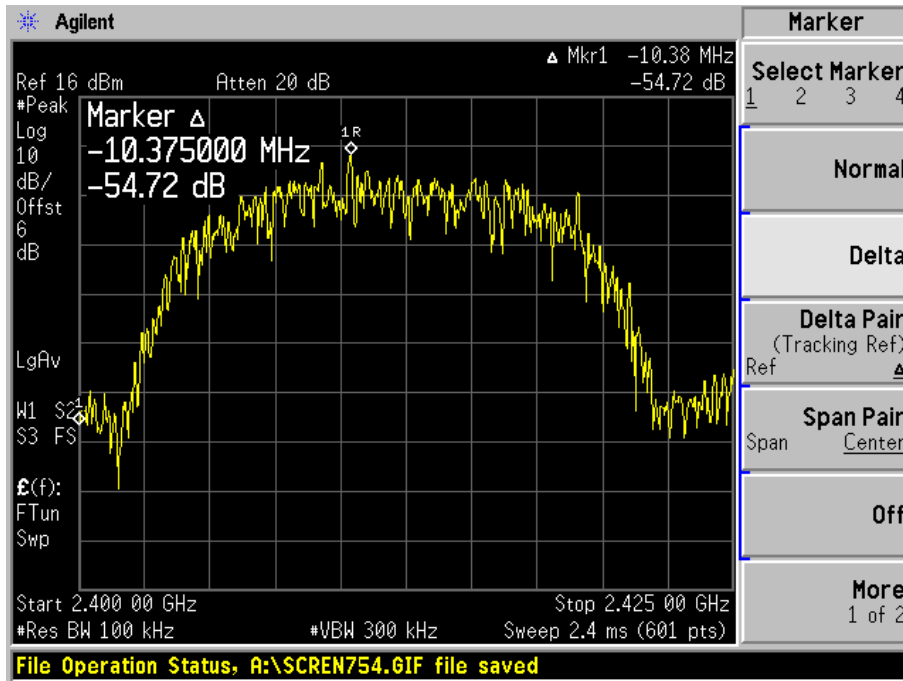

## §15.247(d) - POWER SPECTRAL DENSITY

### Standard Applicable

According to §15.247 (d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (DTS)
4. Repeat above procedures until all frequencies measured were complete.

### Equipment Lists

Manufacturer	Description	Model	Serial Number	Cal. Date
Agilent	Analyzer, Spectrum	E4446A	US44300386	11/10/2005

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### Measurement Result

#### Environmental Conditions

Temperature:	26° C
Relative Humidity:	43%
ATM Pressure:	1022 mbar


The testing was performed by Snell Leong on 2005-12-22.

#### Test Result


Channel	Frequency MHz	PSD dBm/3KHZ	Limit dBm/3KHZ	Result
Low	2412	-10.1	8	Pass
Mid	2437	-10.1	8	Pass
High	2462	-10.3	8	Pass

For Handset:

Low Channel

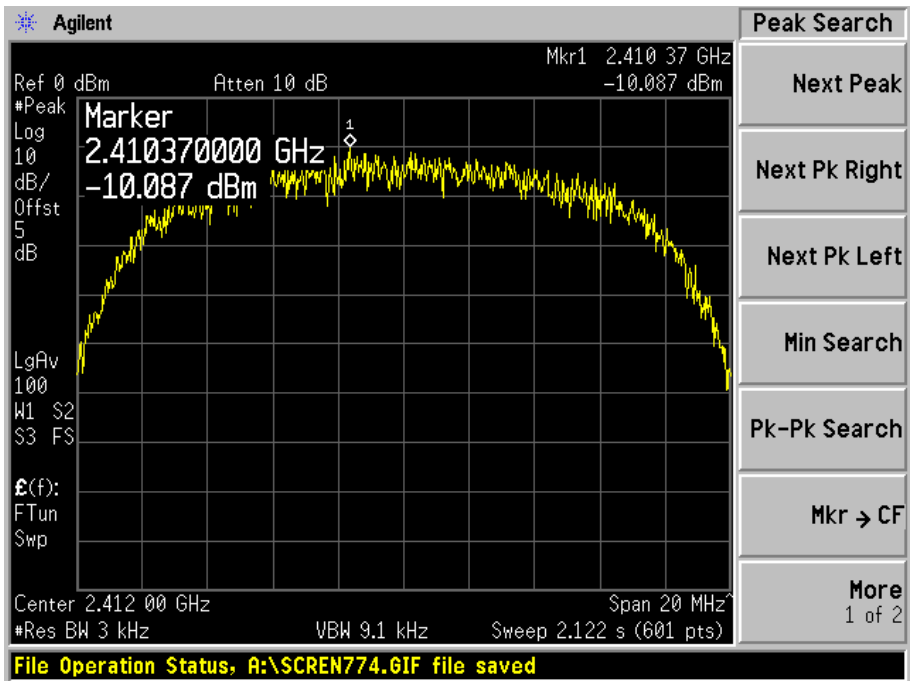

Mid. Channel

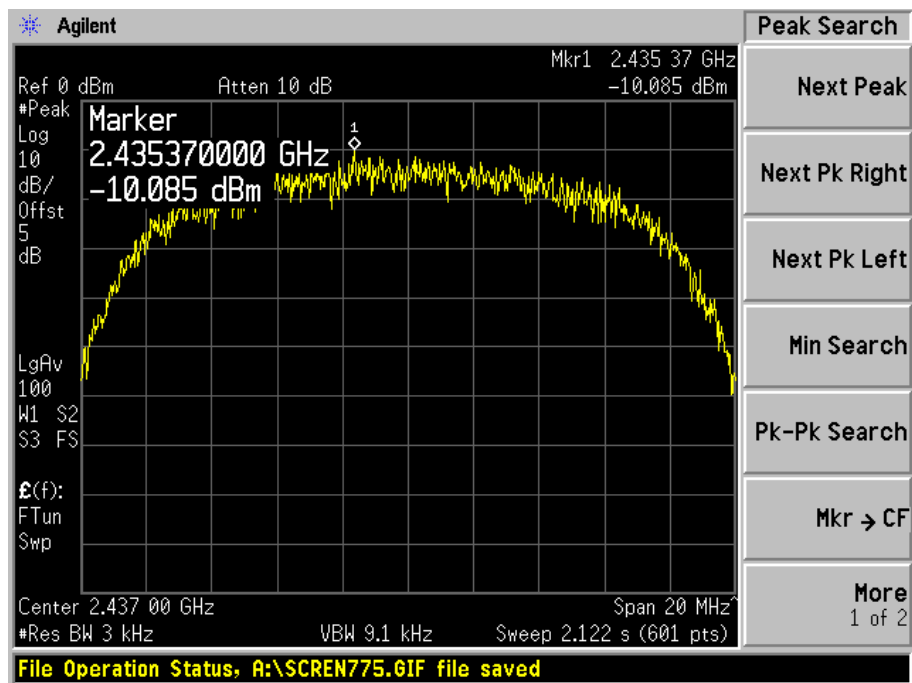



High Channel

