

Test Report: 1W04436

Applicant: Sur-Gard Security Systems

3301 Langstaff Road Vaughan, Ontario

L4K 4L2

**Equipment Under Test:** SKYROUTE Cellemetry Transceiver

(EUT)

FCC ID: PED-SKYROUTE1

In Accordance With: FCC Part 22

**Tested By:** Nemko Canada Inc.

3325 River Road, R.R. 5 Ottawa, Ontario K1V 1H2

**Authorized By:** 

G. Westwell, Wireless Technologist

Date: January 4, 2002

**Total Number of Pages:** 13

Authorized Copy: Soft Copy

## Nemko Canada Inc.

FCC PART 22 PROJECT NO.: 1W04436

EQUIPMENT: SKYROUTE Cellemetry Transceiver

FCC ID: PED-SKYROUTE1

# **Table of Contents**

Section 1.	Summary of Test Results	3
	General Equipment Specification	
Section 3.	RF Power Output	8
Section 4.	Field Strength of Spurious Emissions	9
Section 5.	Block Diagrams	12
Section 6.	Test Equipment List	13

EQUIPMENT: SKYROUTE Cellemetry Transceiver

FCC ID: PED-SKYROUTE1

#### Section 1. **Summary of Test Results**

#### General

#### All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 22.

### THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".

**TESTED BY:** 

Russell Grant, Wireless Group Manager

Russell Grant

DATE: January 4, 2002

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada. The tests included in this report are within the scope of this accreditation. The results apply only to the samples tested.

Nemko Canada Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this

This report applies only to the items tested.

EQUIPMENT: SKYROUTE Cellemetry Transceiver

FCC ID: PED-SKYROUTE1

## **Summary Of Test Data**

Name Of Test	Para. No.	Result
RF Power Output	2.1046	Complies
Audio Frequency Response	2.1047	N/A
Audio Low-Pass Filter Response	2.1047	N/A
Modulation Limiting	2.1047	Not Tested
Occupied Bandwidth	2.1049	Not Tested
Spurious Emissions at Antenna	2.1051	Not Tested
Terminals		
Field Strength of Spurious Emissions	2.1053	Complies
Frequency Stability	2.1055	Not Tested
Transient Frequency Behavior		N/A

**Footnotes For N/A's:** 

This equipment does not use voice modulation.

This equipment has been previously approved for user under FCC ID: APV09001. The approval is for OEM integration using 2.5 dBi antenna. The applicant has changed the antenna to 3 dBi and has mounted the transceiver module on a digital interface card for installation in an alarm control panel. Therefore measurements made were Transmitter Power Output and Transmitter Radiated Spurious Emissions. The applicant has permission from the original certificate holder to obtain equipment authorization based on the original certificate.

Indoor Temperature: 22 °C

Humidity: 52 %

Temperature: 25 °C Outdoor

> Humidity: 54 %

EQUIPMENT: SKYROUTE Cellemetry Transceiver

FCC ID: PED-SKYROUTE1

#### **General Equipment Specification** Section 2.

**Model No.:** SKYROUTE, SKYROUTE MAX & SKYROUTE UT

**Serial No.:** None

**Date Received In Laboratory:** October 24, 2001


**Nemko Identification No.:** Item #34

> Tx: 824 - 849 MHzRx: 826 – 894 MHz

3 Watts

36K0F1D

## **Block Diagram**

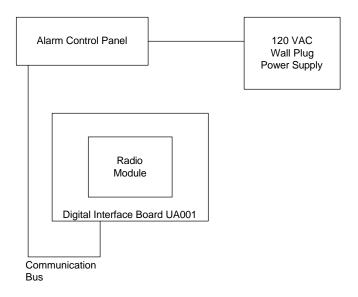

Page 5 of 13

EQUIPMENT: SKYROUTE Cellemetry Transceiver

FCC ID: PED-SKYROUTE1

# **MPE Statement** FCC Radio Frequency Exposure Limits 1.1310 Health Canada Safety Code 6 **Industry Canada RSS 102**

General Population Limit = 
$$\frac{f}{1500}$$
 mW / cm<sup>2</sup> =  $\frac{824}{1500}$  = 0.549 mW / cm<sup>2</sup>

Therefore 
$$\frac{GP}{4\mathbf{p}R^2}$$
£ Limit

$$R = \sqrt{\frac{GP}{4pL}} = \sqrt{\frac{2x3000}{4p0.549}} = 29.5cm > 30cm$$

 $Measured = 0.552mW/cm^2 @ 30cm$ 

Calculated Power Density = 
$$\frac{2x3000}{4\mathbf{p}30^2} = 0.531 \text{mW/cm}^2$$

The measured power density is within 0.2 dB of the calculated power density at 30 cm.

The first page of the installation manual contains an RF exposure warning statement.

Page ii cautions against the use of any antenna except that which is provided by the manufacturer.

Measurements were made using a Narda Microwave Radiation Monitor

EQUIPMENT: SKYROUTE Cellemetry Transceiver

FCC ID: PED-SKYROUTE1

## **Equipment Setup Photograph**

## **Front View:**



### Nemko Canada Inc.

PROJECT NO.: 1W04436

FCC PART 22

EQUIPMENT: SKYROUTE Cellemetry Transceiver

FCC ID: PED-SKYROUTE1

# Section 3. RF Power Output

Para. No.: 2.1046

**Test Performed By:** Russell Grant **Date of Test:** December 20, 2001

**Minimum Standard:** 22.913(a), 500 Watts ERP

**Test Results:** Complies within  $\pm 1$  dB of rated power.

**Measurement Data:** Measured: 35.7 dBm

Rated: 34.8 dBm

Antenna Gain: 3 dBi, 0.9 dBd

ERP: 35.7 + 0.9 = 36.6 dBm

Page 8 of 13

EQUIPMENT: SKYROUTE Cellemetry Transceiver

FCC ID: PED-SKYROUTE1

#### Section 4. **Field Strength of Spurious Emissions**

Para. No.: 2.1053

Test Performed By: Russell Grant Date of Test: December 20, 2001

**Minimum Standard:** 22.917 (d)(e), -13 dBm ERP

**Test Results:** Complies.

**Measurement Data:** See attached test data.

The spectrum was searched up to the 10<sup>th</sup> harmonic of the

fundamental frequency of operation.

Page 9 of 13

EQUIPMENT: SKYROUTE Cellemetry Transceiver

FCC ID: PED-SKYROUTE1

## **Test Data - Field Strength of Spurious Emissions**

Test Distance (meters): 3			Receiver: Spectrum Analyzer		RBW(kHz) : 1000	Detector: Peak	
Freq. (MHz)	Ant. *	Pol. (V/H)	RCVD Signal (dBµV/m)	Conversion Factor (dBµV, dBm)	Field Strength (dBm)	Limit (dBm)	Margin (dB)
1672.4	SSV	V	103.7	-117.5	-13.8	-13.0	0.8
1672.4	SSH	Н	99.2	-117.9	-18.7	-13.0	5.7
2508.6	SSV	V	72.3	-123.2	-50.9	-13.0	37.9
2508.6	SSH	Н	80.5	-122.9	-42.4	-13.0	29.4
3344.8	SSV	V	74.8	-119.9	-45.1	-13.0	32.1
3344.8	SSH	Н	72.0	-120.8	-48.8	-13.0	35.8
4180.9	SSV	V	56.2	-113.4	-57.2	-13.0	44.2
4180.9	SSH	Н	61.0	-113.1	-52.1	-13.0	39.1
5017.1	SSV	V	44.7	-111.8	-67.1	-13.0	54.1
5017.1	SSH	Н	52.3	-110.9	-58.6	-13.0	45.6
5853.2	SSV	V	49.3	-110.2	-60.9	-13.0	47.9
5853.2	SSH	Н	47.2	-107.7	-60.5	-13.0	47.5
6689.5	SSV	V	50.8	-109.4	-58.6	-13.0	45.6
6689.5	SSH	Н	41.0	-107.2	-66.2	-13.0	53.2

### **Notes:**

B/C =Biconical, B/L = Biconilog, L/P = Log-Periodic, H = Horn, D/P = Dipole

Re-measured using dipole antenna.

\*\* Includes cable loss when amplifier is not used.

Includes cable loss.

Denotes failing emission level. ()

N.D. = Not Detected

EQUIPMENT: SKYROUTE Cellemetry Transceiver

FCC ID: PED-SKYROUTE1

# Field Strength of Spurious Emissions Photograph

## **Front View:**




EQUIPMENT: SKYROUTE Cellemetry Transceiver


FCC ID: PED-SKYROUTE1


#### Section 5. **Block Diagrams**

### Para. No. 2.1046 - R.F. Power Output



## Para. No. 2.1053 - Field Strength of Spurious Radiation

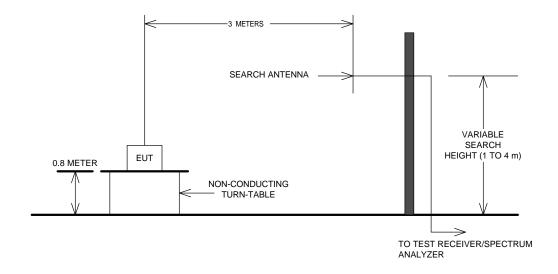



EQUIPMENT: SKYROUTE Cellemetry Transceiver

FCC ID: PED-SKYROUTE1

#### **Test Equipment List** Section 6.

CAL	EQUIPMENT	MANUFACTURER	MODEL	SERIAL	LAST CAL.	NEXT CAL.
CYCLE						
1 Year	Spectrum Analyzer	Hewlett Packard	8565E	FA000981	June 08/01	June 08/02
3 Year	RF Millivoltmeter	Rohde & Schwarz	URV5	FA001570	July 3/00	July 3/03
3 Year	Power Sensor	Rohde & Schwarz	URV5-Z5	FA000419	Oct. 6/99	Oct. 6/02
1 Year	Horn Antenna	EMCO #2	3115	4336	Dec. 1/01	Dec. 1/02
1 Year	RF AMP	JCA	2-4 GHz	FA001496	COU	COU
1 Year	RF AMP	JCA	1-2 GHz	FA001498	COU	COU
1 Year	RF AMP	JCA	4-8 GHz	FA001497	COU	COU
2 Year	RF AMP	Narda	5 - 18GHz	FA001409	COU	COU
2 Year	Radiation Monitor	Narda	8616	FA000538	Jan 25/00	Jan 25/02
2 Year	Isotropic Probe	Narda	8621D	FA000538	Jan 25/00	Jan 25/02

NA: Not Applicable NCR: No Cal Required COU: CAL On Use

Page 13 of 13